

# Global United Technology Services Co., Ltd.

Report No.: GTSE15010009904

# **FCC** Report

Applicant: National Checking Company

**Address of Applicant:** 899 Montreal Circle St. Paul MN 55102

**Equipment Under Test (EUT)** 

**Product Name:** Tablet PC

Model No.: DCG-V100MDT

FCC ID: 2AD4TDCGV100MDT

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart B:2013

Date of sample receipt: January 27, 2015

**Date of Test:** February 08-10, 2015

Date of report issue: February 10, 2015

PASS \* Test Result:

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

**Robinson Lo Laboratory Manager** 

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 2 Version

Version No.	Date	Description
00	February 10, 2015	Original

Prepared By:	Edward. Pan	Date:	February 10, 2015
	Project Engineer	_	
Check By:	hank. yan	Date:	February 10, 2015
	Reviewer		



## 3 Contents

			Page
1	COV	VER PAGE	1
2	VER	RSION	2
3	CON	NTENTS	3
4	TES	ST SUMMARY	4
5	GEN	NERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST MODE	
	5.4	Test Facility	6
	5.5	TEST LOCATION	
	5.6	DESCRIPTION OF SUPPORT UNITS	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	TES	ST INSTRUMENTS LIST	7
7	TES	ST RESULTS AND MEASUREMENT DATA	8
	7.1	CONDUCTED EMISSIONS	8
	7.2	RADIATED EMISSION	11
8	TES	ST SETUP PHOTO	17
9	FUT	CONSTRUCTIONAL DETAILS	5



# 4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	PASS
Radiated Emissions	Part15.109	PASS

PASS: The EUT complies with the essential requirements in the standard.



# **5** General Information

## 5.1 Client Information

Applicant:	National Checking Company
Address of Applicant:	899 Montreal Circle St. Paul MN 55102
Manufacturer:	National Checking Company
Address of Manufacturer:	899 Montreal Circle St. Paul MN 55102
Factory:	SHENZHEN GIEC ELECTRIC MANUFACTORY CO.,LTD.
Address of Factory:	No.1 Building, Factory, No.7 District, Dayang Development Areas, FuYong Street, Baoan, Shenzhen, Guangdong, China

## 5.2 General Description of EUT

•	
Product Name:	Tablet PC
Model No.:	DCG-V100MDT
Power supply:	Model No.: GT-WCAU05000200-303
	Input: AC 100-240V, 50-60Hz, 0.4A Max.
	Output: DC 5.0V, 2000mA
	Or
	DC 3.7V Li-ion battery

# 5.3 Test mode

Test mode:	Test mode:				
PC mode	Keep the EUT in date exchanging with PC mode.				
REC mode	Keep the EUT in video recording mode.				
Video playing mode	Keep the EUT in video playing mode				
HDMI mode	Keep the EUT in video playing with HDMI output mode				
Remark: PC mode is worst ca	Remark: PC mode is worst case and only reported				



#### 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## • CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### • FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

## • Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

#### 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen,

China

Tel: 0755-27798480 Fax: 0755-27798960

#### 5.6 Description of Support Units

<u> </u>	• •					
Manufacturer	nufacturer Description		Manufacturer Description Model		Serial Number	FCC ID/DoC
Apple	PC	A1278	C1MN99ERDTY3	DoC		
DELL	KEYBOARD	SK-8115	N/A	DoC		
DELL	MOUSE	MOC5UO	N/A	DoC		

#### 5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna. Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.

Remark: Product Name: Tablet PC with FCC ID: 2AD4TDCGV100MDT is electrically identical with the Product Name: Tablet PC, FCC ID: ZVR-10DTB12A; Models: DCG-V100MDT, only applicant name, address, manufacture name, address, FCC ID, and label are different. So the test report of FCC ID: 2AD4TDCGV100MDT have same test data with test report of FCC ID: ZVR-10DTB12A.

Global United Technology Services Co., Ltd.

2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District,

Shenzhen, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



# 6 Test Instruments list

Radia	Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	Mar. 28 2014	Mar. 27 2015	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	July 01 2014	June 30 2015	
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	July 01 2014	June 30 2015	
5	Double -ridged waveguide horn	SCHWARZBECK	9120D	GTS208	June 27 2014	June 26 2015	
6	RF Amplifier	HP	8347A	GTS204	July 01 2014	June 30 2015	
7	Preamplifier	HP	8349B	GTS206	July 01 2014	June 30 2015	
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
9	Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014	Mar. 28 2015	
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014	Mar. 28 2015	

Con	Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	July 01 2014	June 30 2015	
2	<b>EMI Test Receiver</b>	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015	
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015	
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015	
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015	
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015	
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	

Gen	General used equipment:					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015



# 7 Test Results and Measurement Data


# 7.1 Conducted Emissions

Test Requirement:	FCC Part15 B Section 15.107			
Test Method:	ANSI C63.4:2009			
Test Frequency Range:	150KHz to 30MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sv	weep time=auto		
Limit:	Frequency range (MHz)	Limit (c	dBuV)	
	, , ,	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5 5-30	56 60	46 50	
	* Decreases with the logarithm		30	
Test setup:	Reference Plane	1 7		
Toot procedure.	Remark E.U.T Equipment Under Test LISN Line impedence Stabilization Network Test table height=0.8m			
Test procedure:	The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.			
	2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).			
	3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2009 on conducted measurement.			
Test Instruments:	Refer to section 6 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Pass			



#### **Measurement Data**

Line:

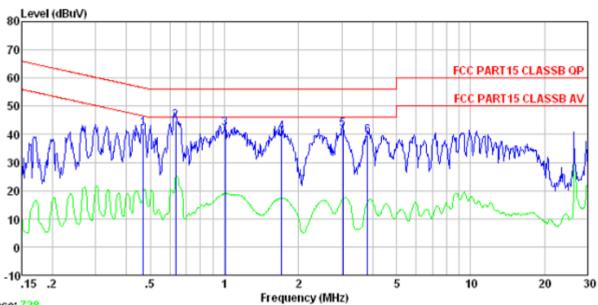

Trace: 728

Site Shielded room


: FCC PART15 CLASSB QP LISN-2013 LINE Condition

Test mode : Data Exchange

est	Engineer:								
	F	Read		Cable		Limit	Over	Paraula	
	rreq	rever	Factor	Loss	rever	Line	Limit	Kemark	
	MHz	dBuV	dB	dB	dBuV	dBuV	dB		
1	0.469	42.05	0.12	0.11	42.28	56.54	-14.26	QP	
2		44.47		0.13	44.73		-11.27		
3	1.005	41.72	0.14	0.13	41.99	56.00	-14.01	QP	
4	1.707	40.68	0.12	0.14	40.94	56.00	-15.06	QP	
5	3.025	41.63	0.16	0.15	41.94	56.00	-14.06	QP	
6	3.820	39.20	0.19	0.15	39.54	56.00	-16.46	QP	



#### Neutral:

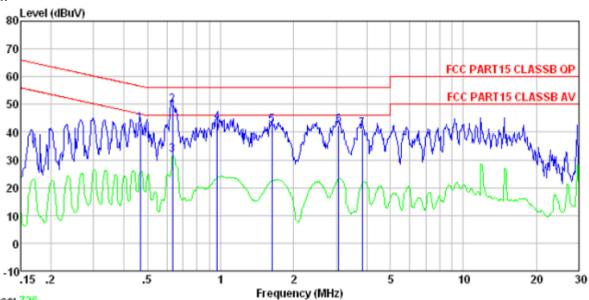

Trace: 726

Site : Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

Test mode : Data Exchange

Test Engineer: Mike

051	Freq	Read	LISN Factor	Cable Loss		Limit Line	Over Limit	Remark
	MHz	-dBuV	dB	₫B	dBu₹	dBuV	dB	
1 2 3 4	0. 466 0. 634 0. 634 0. 968	49. 48 31. 68 43. 42	0.06 0.07 0.07 0.07	0.11 0.13 0.13 0.13	43.13 49.68 31.88 43.62	56.00 46.00 56.00	-12.38	QP Average QP
5 6 7	1.628 3.074 3.840	42.31	0.09 0.12 0.14	0.14 0.15 0.15	42.33 42.58 41.08	56.00	-13.67 -13.42 -14.92	QP

#### Notes:


- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



# 7.2 Radiated Emission

 Nadiated Lillission							
Test Requirement:	FCC Part15 B Section 15.109						
Test Method:	ANSI C63.4:2009						
Test Frequency Range:	30MHz to 9GHz						
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)						
Receiver setup:		_	T	T=	T		
	Frequency	Detector Ougsi pag	RBW k 120kHz	VBW 300kHz	Remark Quasi-peak Value		
	30MHz- Quasi-peak 1GHz		K 120KI12	300KI 12	Quasi-peak value		
	Above 1GHz	Peak	1MHz	3MHz	Peak Value		
	7.0000 10112	Peak	1MHz	10Hz	Average Value		
Limit:					T		
	Freque	ency	Limit (dBuV	/m @3m)	Remark		
	30MHz-8	88MHz	40.0	0	Quasi-peak Value		
	88MHz-2	16MHz	43.5	0	Quasi-peak Value		
	216MHz-9	60MHz	46.0	0	Quasi-peak Value		
	960MHz	-1GHz	54.0	0	Quasi-peak Value		
	Above 1	IGHz	54.0	0	Average Value		
	7,5010		74.0	0	Peak Value		
Test Procedure:	The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.      The EUT was set 3 meters away from the interference-receiving						
			•		ole-height antenna		
	ground to de	termine the r	naximum valu	e of the field	r meters above the d strength. Both are set to make the		
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.						
	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.						
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.						
Test setup:	Below 1GHz						



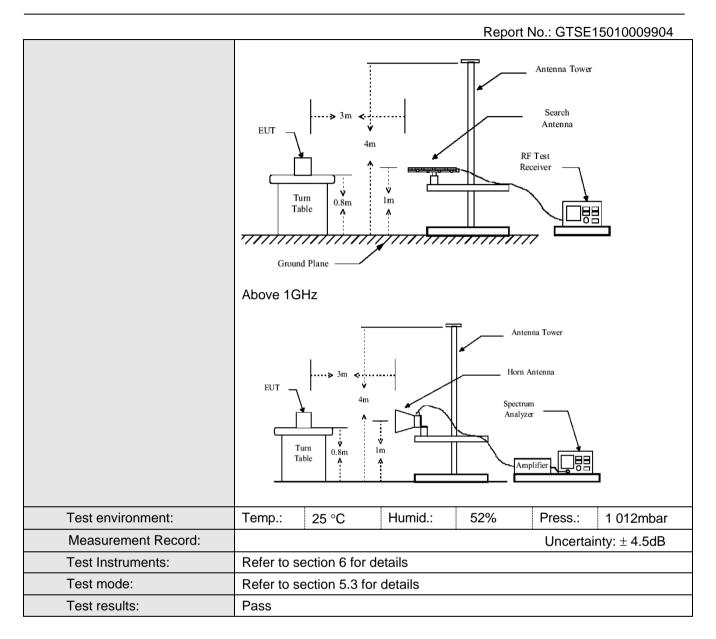

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



#### **Measurement Data**

Below 1GHz

#### Horizontal:

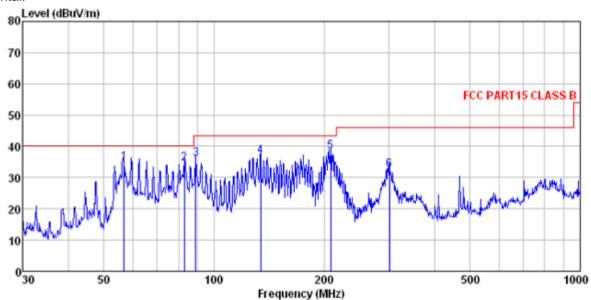

Site


: 3m chamber : FCC PART15 CLASS B 3m VULB9163-2013M HORIZONTAL Condition

Test Mode : Data Exchange

620	Engineer:								
		Read	Ant enna	Cable	Preamp		Limit	0ver	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBu∀	dB/m	dB		dBuV/m	dB., 777	dB	
	Junz	and.	CD/ M	ш	ш	and a / w	and 47 m	ш	
	F. 800								
1	56.792	49.17	14.89	0.83	29.94	34.95	40.00	-5.05	QP
2	82.938	51.66	11.57	1.05	29.78	34.50	40.00	-5.50	QP
3	89, 276	50.95	13.76	1.10	29, 75	36.06	43, 50	-7.44	ΩP
4	134.088					36.85			
2									
5	207.850	52.89	12.80	1.89	29.28	38.30	43.50	-5.20	QP
6	301.422	45.12	15.08	2.37	29.99	32.58	46.00	-13.42	QP



#### Vertical:

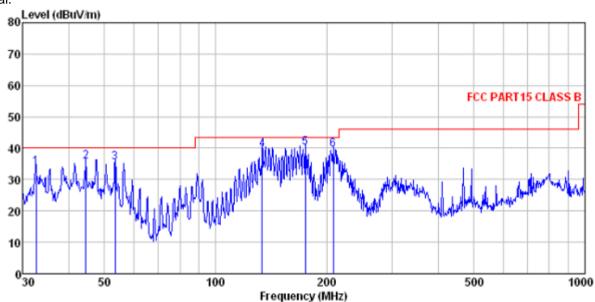

Site

3m chamber FCC PART15 CLASS B 3m VULB9163-2013M VERTICAL Condition


Test Mode Data Exchange

Engineer:	Chen							
	Read	Antenna	Cable	Preamp		Limit	Over	
Freq						Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	ша,	ш, м			aba+, m	ши, ж		
32,634	49.09	14.31	0.58	30.08	33, 90	40.00	-6.10	QP
44.587	49.59	15.55	0.72	30.02	35.84	40.00	-4.16	QP
53.505	49.63	15.08	0.80	29.97	35.54	40.00	-4.46	QP
133.619	57.03	10.67	1.46	29.49	39.67	43.50	-3.83	QP
175.037	56.45	11.29	1.72	29.30	40.16	43.50	-3.34	QP
207.850	54.12	12.80	1.89	29.28	39.53	43.50	-3.97	QP
	Freq MHz 32.634 44.587 53.505 133.619 175.037	MHz dBuV 32.634 49.09 44.587 49.59 53.505 49.63 133.619 57.03 175.037 56.45	ReadAntenna Freq Level Factor  MHz dBuV dB/m  32.634 49.09 14.31 44.587 49.59 15.55 53.505 49.63 15.08 133.619 57.03 10.67 175.037 56.45 11.29	ReadAntenna Cable Freq Level Factor Loss  MHz dBuV dB/m dB  32.634 49.09 14.31 0.58 44.587 49.59 15.55 0.72 53.505 49.63 15.08 0.80 133.619 57.03 10.67 1.46 175.037 56.45 11.29 1.72	ReadAntenna Cable Preamp Freq Level Factor Loss Factor  MHz dBuV dB/m dB dB  32.634 49.09 14.31 0.58 30.08 44.587 49.59 15.55 0.72 30.02 53.505 49.63 15.08 0.80 29.97 133.619 57.03 10.67 1.46 29.49 175.037 56.45 11.29 1.72 29.30	ReadAntenna Cable Preamp Freq Level Factor Loss Factor Level  MHz dBuV dB/m dB dB dBuV/m  32.634 49.09 14.31 0.58 30.08 33.90 44.587 49.59 15.55 0.72 30.02 35.84 53.505 49.63 15.08 0.80 29.97 35.54 133.619 57.03 10.67 1.46 29.49 39.67 175.037 56.45 11.29 1.72 29.30 40.16	ReadAntenna   Cable Preamp   Limit   Level Factor   Loss Factor   Level Line   Level Factor   Level F	ReadAntenna   Cable Preamp   Limit   Over



#### Above 1GHz

#### Horizontal:

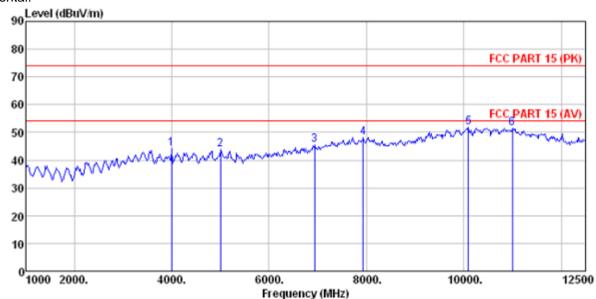


Site

: 3m chamber : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL Condition

: Data Exchange Test mode

62(	rugineer:	Citen								
		Readânt enna		Readântenna Cable Preamp				Limit	Over	
	Free		Factor						Remark	
	ricq	Level	ractor	LUSS	ractor	LCVCI	LINE	LIMIC	I/CMGI K	
	MHz	dBu∀	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3992,000	38.73	29.66	7.85	32.19	44.05	74 00	-29.95	Dook	
1	3992.000	30.13	29.00	1.00	JZ. 19	44.00	14.00	-29.90	reak	
2	4995.000	35.17	31.95	8.75	32.18	43.69	74.00	-30.31	Peak	
3	6933,000	31.13	35, 24	11.45	32.26	45, 56	74 00	-28.44	Peak	
_										
4	7936.000	30.17	37.18	12.07	31.31	48.11	74.00	-25.89	Peak	
5	10095.000	30.16	39.24	14.48	32.18	51.70	74.00	-22.30	Peak	
-										
6	10996.000	30.04	40.28	14.92	33.74	51.50	74.00	-22.50	Peak	



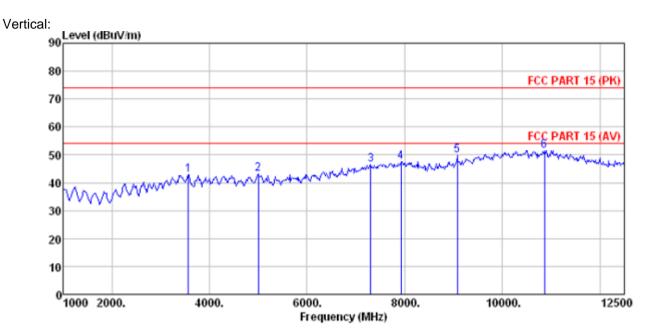

Site


: 3m chamber : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL : Data Exchange Condition : FCC | Test mode : Data Test Engineer: Chen


000	Trigations.								
	Freq				Preamp Factor			Over Limit	Remark
	MHz	dBu₹	<u>dB</u> /m	<u>d</u> B	<u>d</u> B	dBuV/m	dBu∜/m	<u>d</u> B	
1 2	3567.000 4995.000	34.59		8.75	32.18		74.00	-30.89	Peak
3 4 5	7307.000 7919.000 9075.000	29.63	37.16	12.05	31.91 31.33 32.23	47.51	74.00	-26.49	Peak
	10860.000								



# 8 Test Setup Photo

Radiated Emission

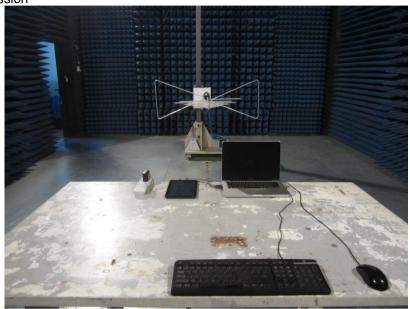

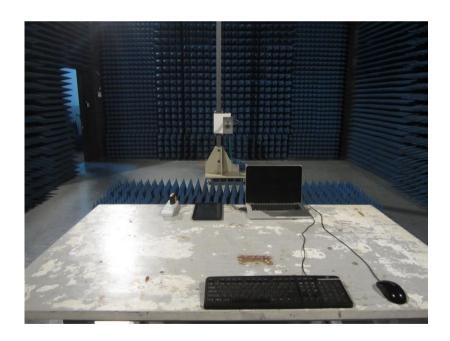



Conducted Emission



# 9 EUT Constructional Details

Reference to the test report No. GTSE15010009901

----- end-----