


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2462MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Y
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

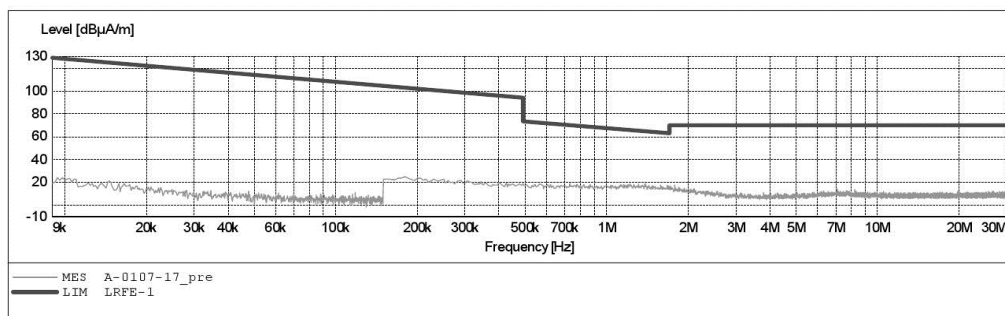


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2462MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Z
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

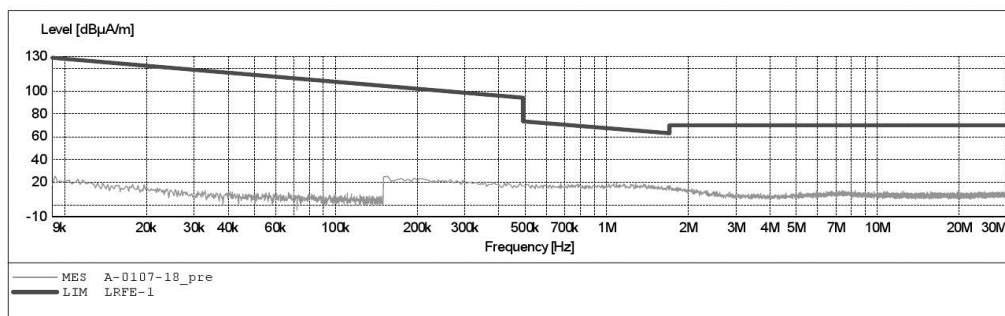



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2016

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2412MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Vertical

Power Source: DC 5V


Date: 14/12/30/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

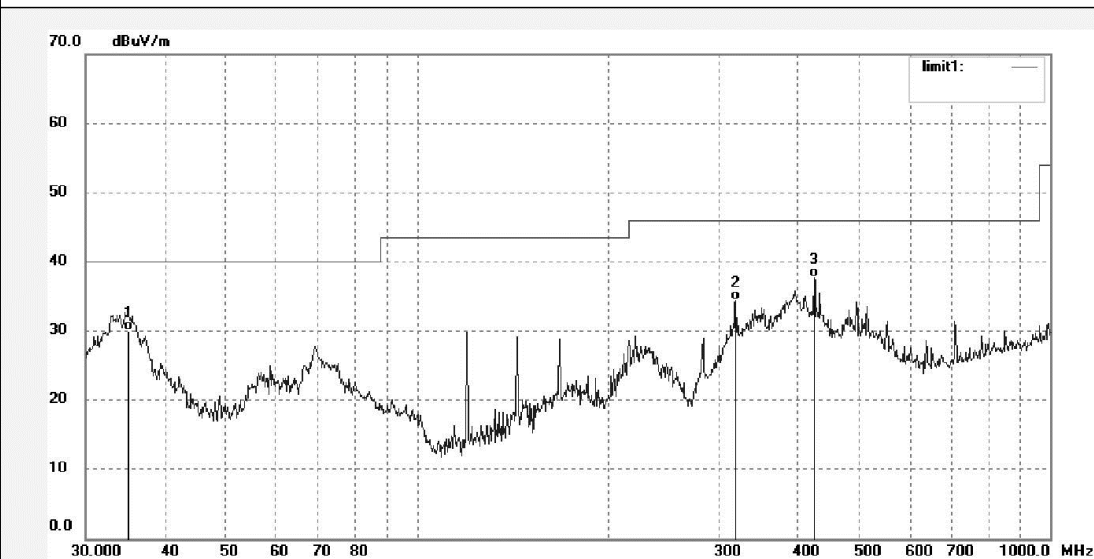

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.0048	40.39	-10.42	29.97	40.00	-10.03	QP			
2	318.8170	43.21	-8.78	34.43	46.00	-11.57	QP			
3	423.5403	43.87	-6.16	37.71	46.00	-8.29	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2017

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2412MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 14/12/30/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

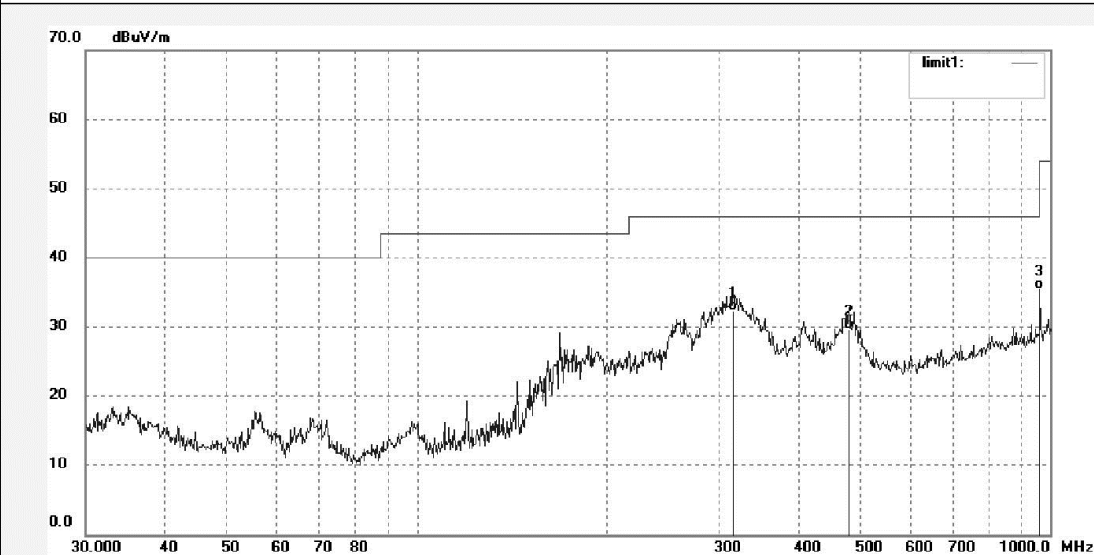

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	315.4806	41.07	-8.87	32.20	46.00	-13.80	QP			
2	480.5276	35.09	-5.34	29.75	46.00	-16.25	QP			
3	962.1622	33.13	2.37	35.50	54.00	-18.50	QP			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2018

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2437MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 14/12/30/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

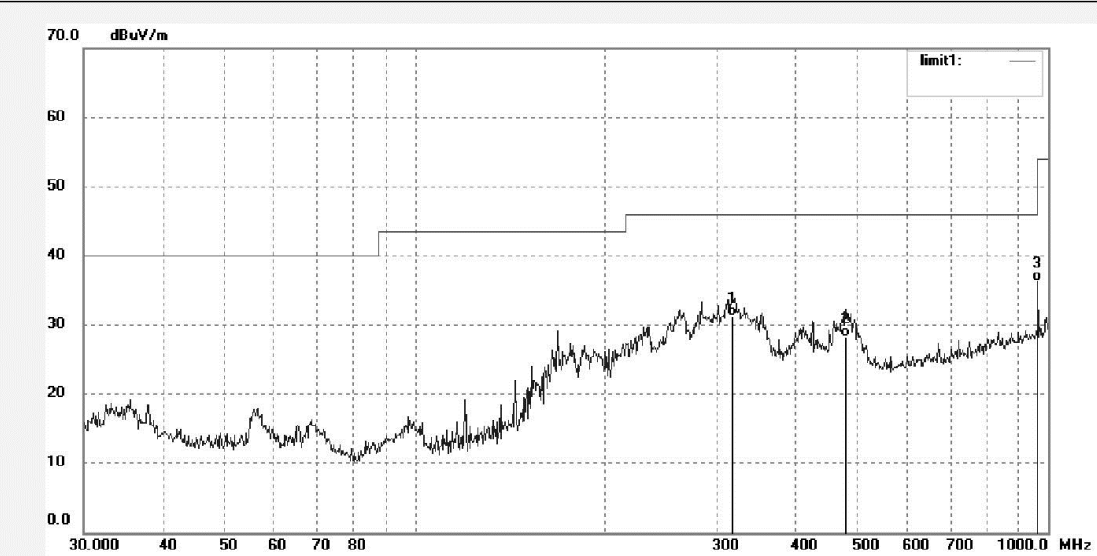

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	317.7010	40.05	-8.81	31.24	46.00	-14.76	QP			
2	478.8455	33.70	-5.36	28.34	46.00	-17.66	QP			
3	962.1622	33.93	2.37	36.30	54.00	-17.70	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2019

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2437MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Vertical

Power Source: DC 5V


Date: 14/12/30/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

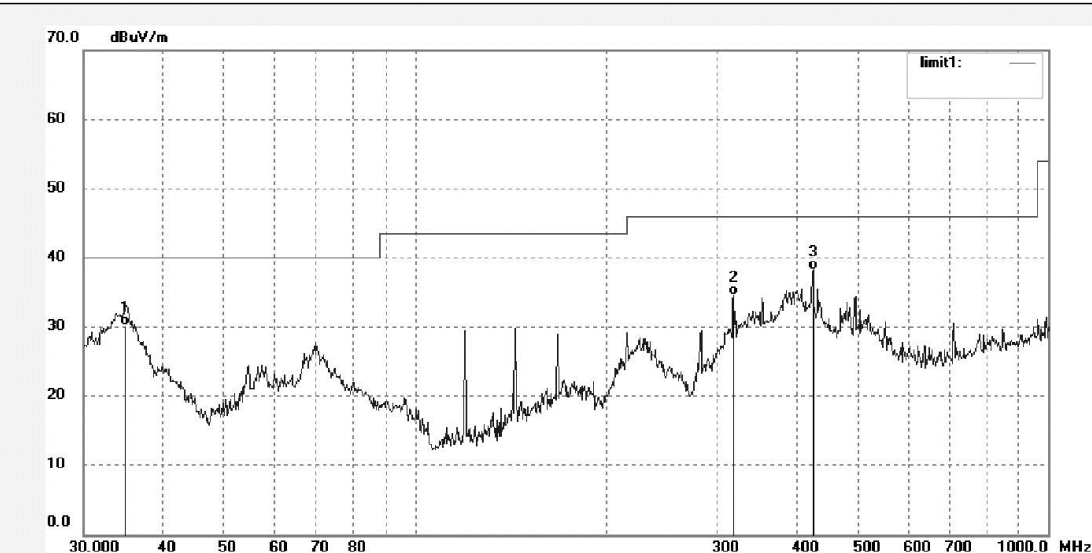

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.8823	40.59	-10.41	30.18	40.00	-9.82	QP			
2	318.8170	43.36	-8.78	34.58	46.00	-11.42	QP			
3	425.0280	44.39	-6.16	38.23	46.00	-7.77	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2020

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2462MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Vertical

Power Source: DC 5V


Date: 14/12/30/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

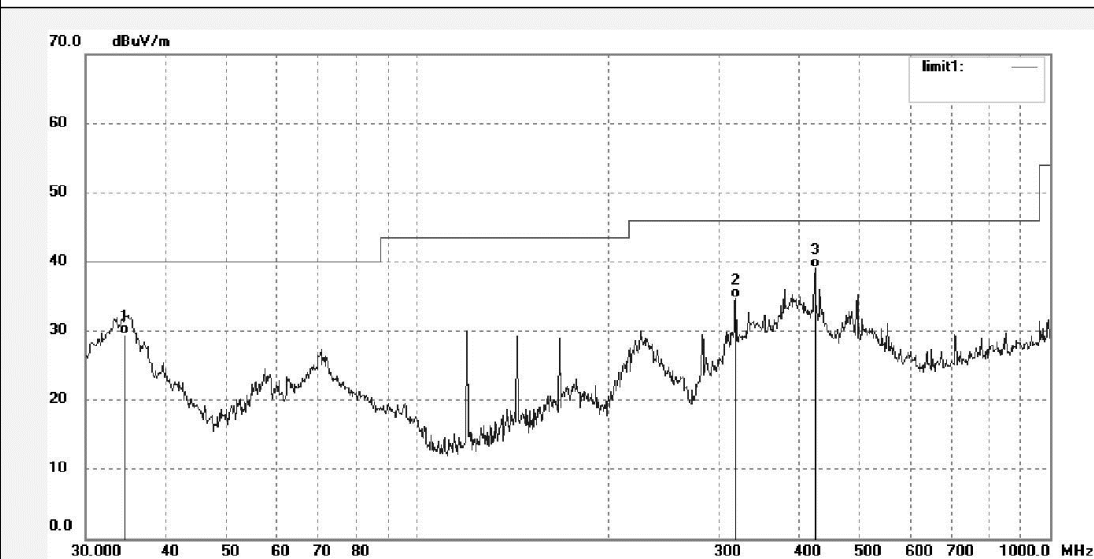

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.5172	39.80	-10.37	29.43	40.00	-10.57	QP			
2	318.8170	43.55	-8.78	34.77	46.00	-11.23	QP			
3	425.0280	45.22	-6.16	39.06	46.00	-6.94	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2021

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2462MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 14/12/30/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

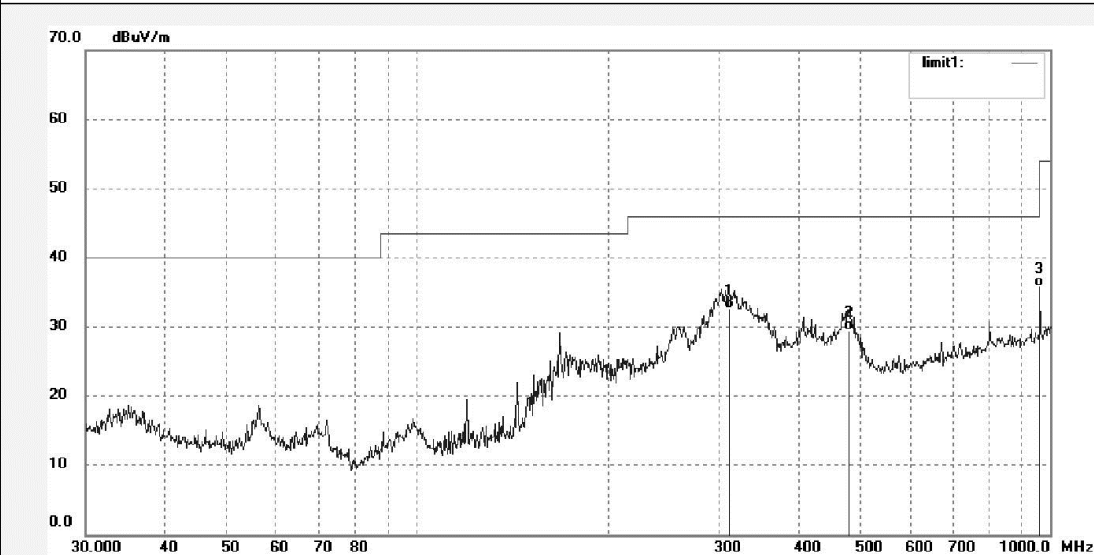

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	311.0867	41.67	-8.99	32.68	46.00	-13.32	QP			
2	480.5276	34.84	-5.34	29.50	46.00	-16.50	QP			
3	962.1622	33.48	2.37	35.85	54.00	-18.15	QP			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2213

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2412MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Vertical

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

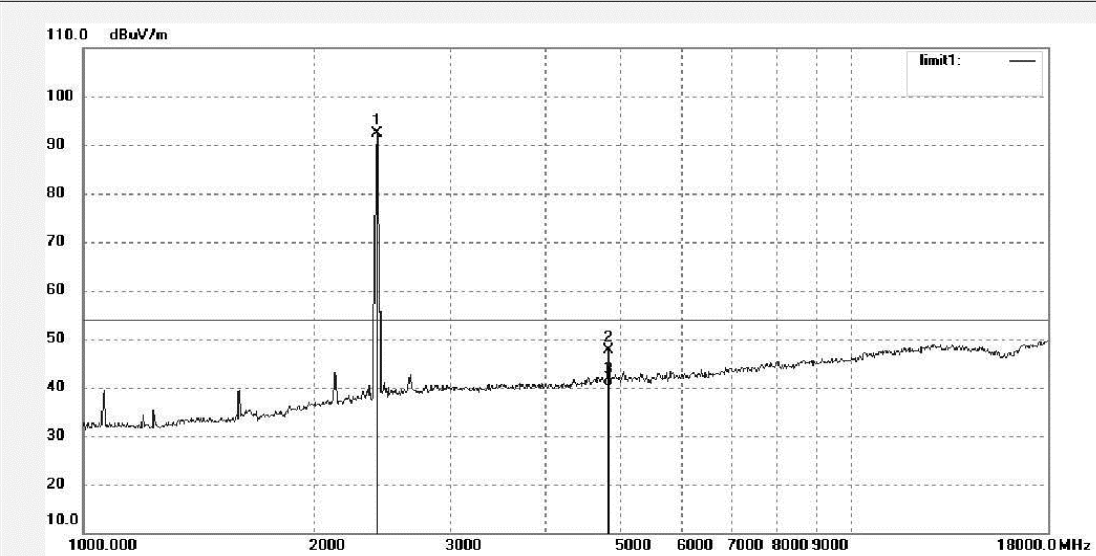

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2412.000	99.90	-7.43	92.47	/	/	peak			
2	4824.255	47.89	-0.19	47.70	74.00	-26.30	peak			
3	4824.255	40.29	-0.19	40.10	54.00	-13.90	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2214

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2412MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

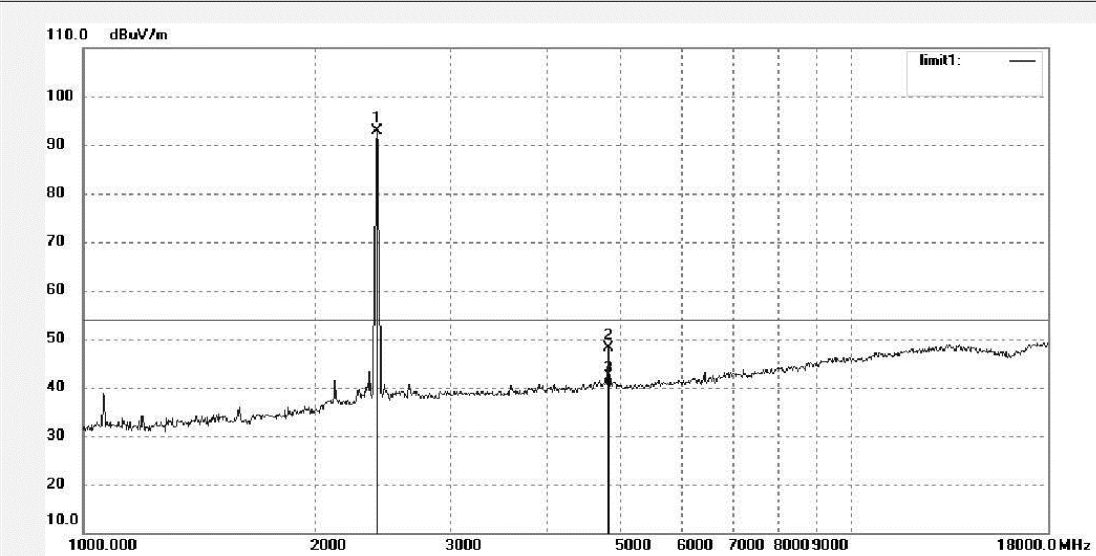

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2412.000	100.41	-7.43	92.98	/	/	peak			
2	4824.339	48.27	-0.19	48.08	74.00	-25.92	peak			
3	4824.339	40.67	-0.19	40.48	54.00	-13.52	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2014 #2215

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2437MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

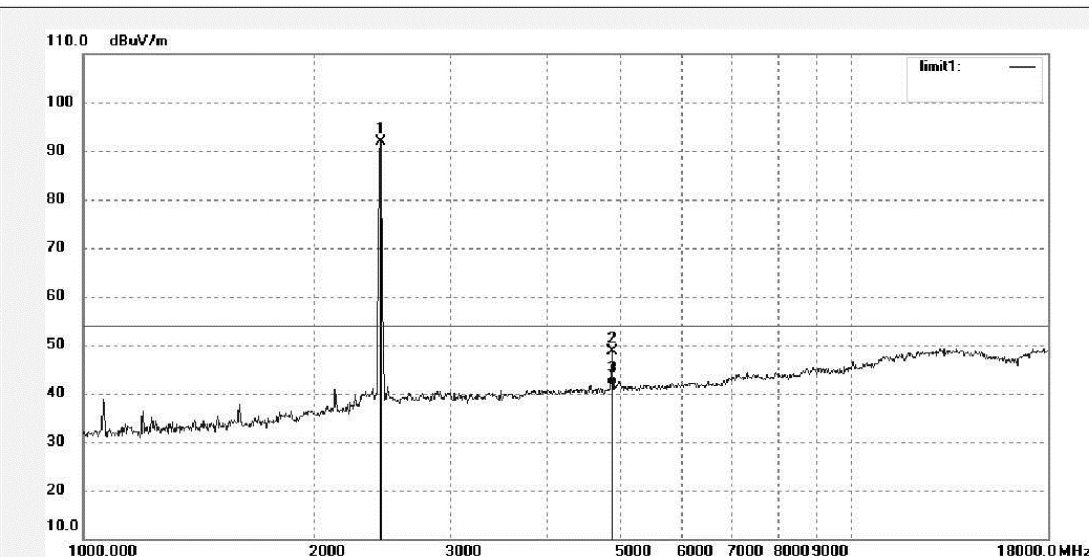

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	99.27	-7.36	91.91	/	/	peak			
2	4874.341	48.61	0.09	48.70	74.00	-25.30	peak			
3	4874.341	41.46	0.09	41.55	54.00	-12.45	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2216

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2437MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Vertical

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

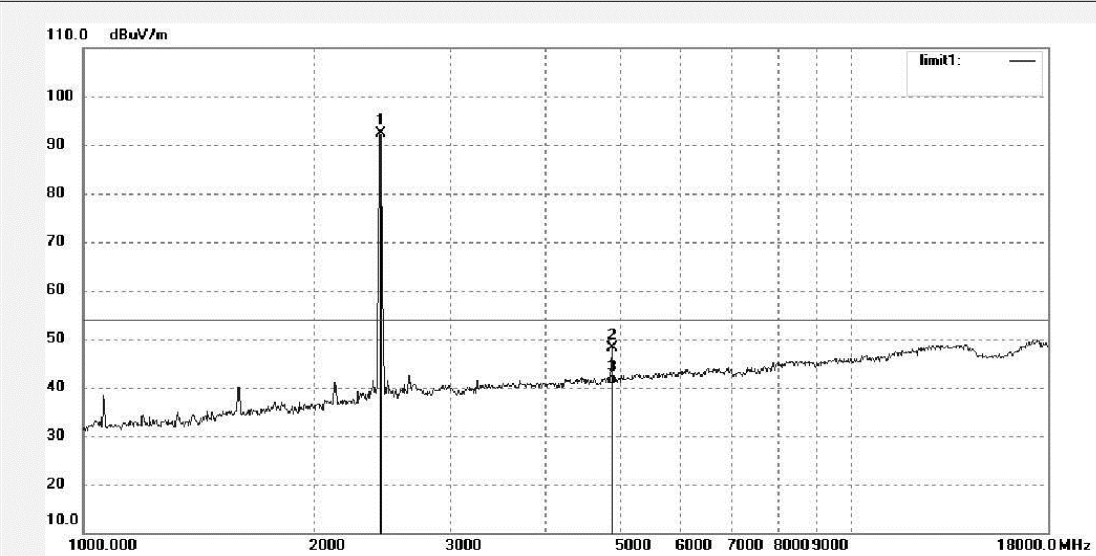

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	99.76	-7.36	92.40	/	/	peak			
2	4874.229	47.94	0.09	48.03	74.00	-25.97	peak			
3	4874.229	40.51	0.09	40.60	54.00	-13.40	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2014 #2217
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Wi-Fi Dongle
Mode: TX 2462MHz
Model: TD-2021N-USB
Manufacturer: HUAWEI

Polarization: Vertical
Power Source: DC 5V
Date: 15/05/09/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11n20

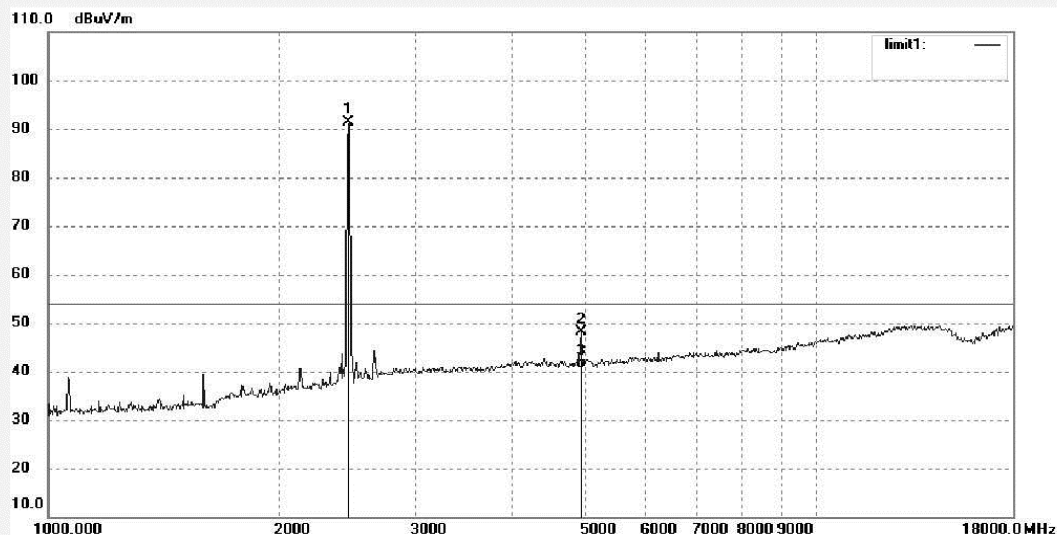

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.000	98.79	-7.35	91.44	/	/	peak			
2	4924.308	47.82	0.34	48.16	74.00	-25.84	peak			
3	4924.308	40.35	0.34	40.69	54.00	-13.31	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2218

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2462MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

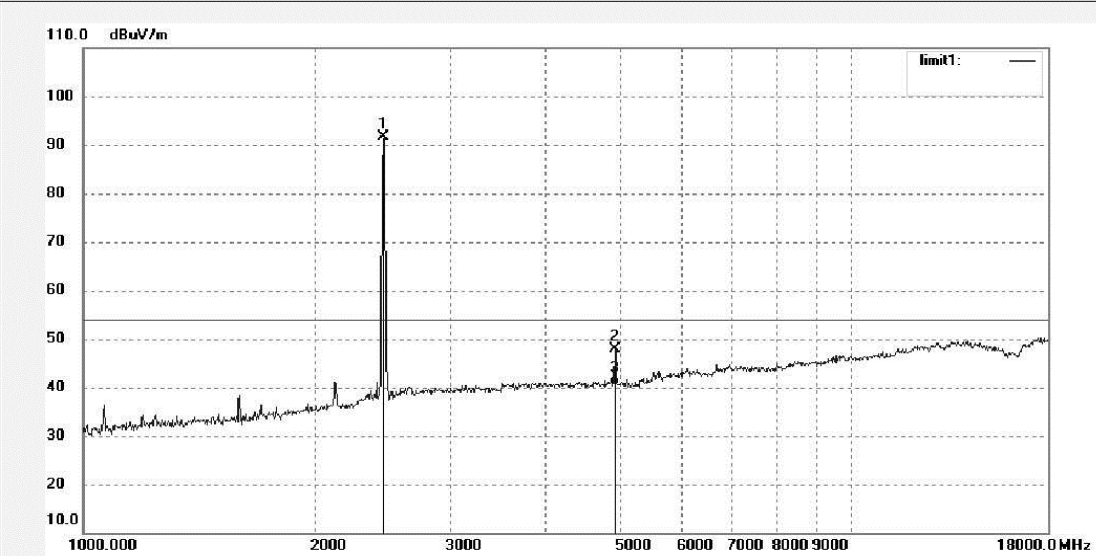

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.000	99.04	-7.35	91.69	/	/	peak			
2	4924.288	47.65	0.34	47.99	74.00	-26.01	peak			
3	4924.288	40.11	0.34	40.45	54.00	-13.55	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel: +86-0755-26503290

Fax: +86-0755-26503396

Job No.: LAN2014 #2272

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2412MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

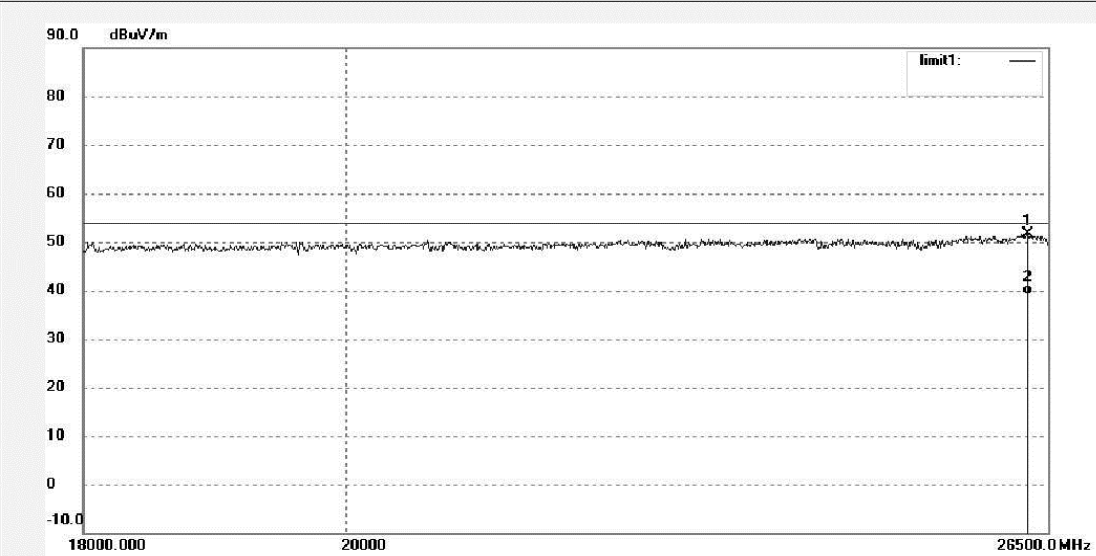

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26285.633	35.25	16.50	51.75	74.00	-22.25	peak			
2	26285.633	22.75	16.50	39.25	54.00	-14.75	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2273

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2412MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Vertical

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

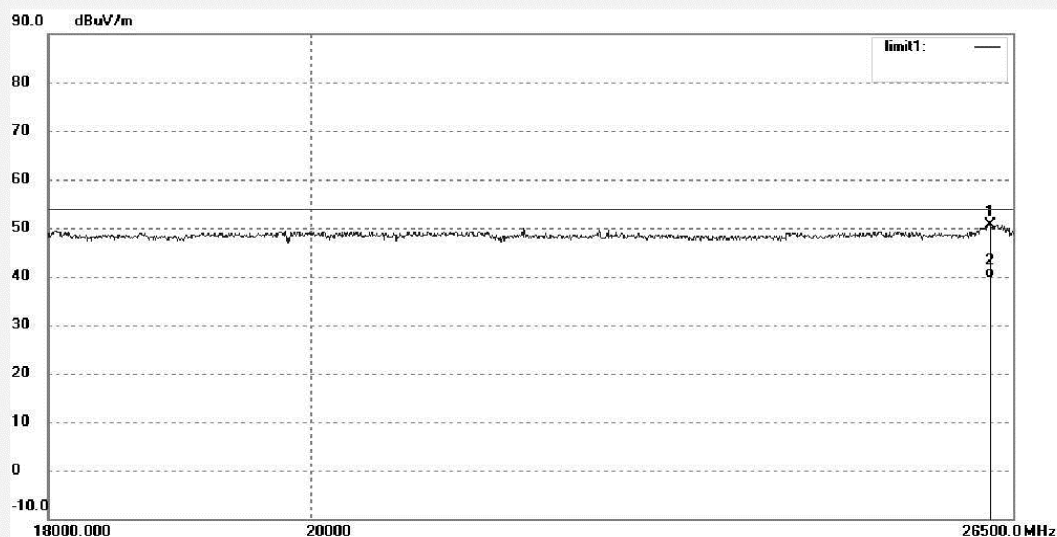

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26265.307	34.22	16.50	50.72	74.00	-23.28	peak			
2	26265.307	23.08	16.50	39.58	54.00	-14.42	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2014 #2274
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Wi-Fi Dongle
Mode: TX 2437MHz
Model: TD-2021N-USB
Manufacturer: HUAWEI

Polarization: Vertical
Power Source: DC 5V
Date: 15/05/09/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11n20

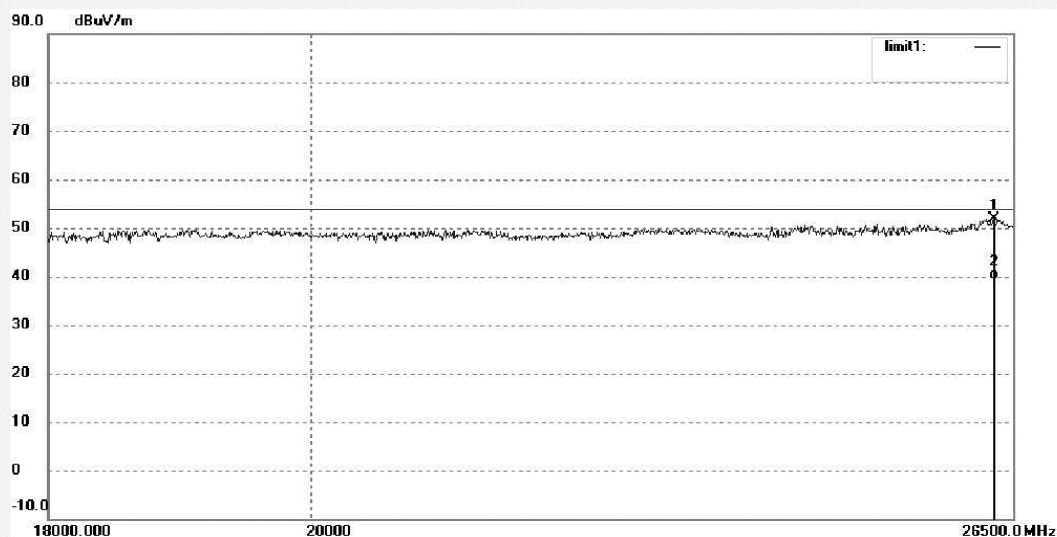

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26295.801	35.38	16.50	51.88	74.00	-22.12	peak			
2	26295.801	22.82	16.50	39.32	54.00	-14.68	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel: +86-0755-26503290

Fax: +86-0755-26503396

Job No.: LAN2014 #2275

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2437MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

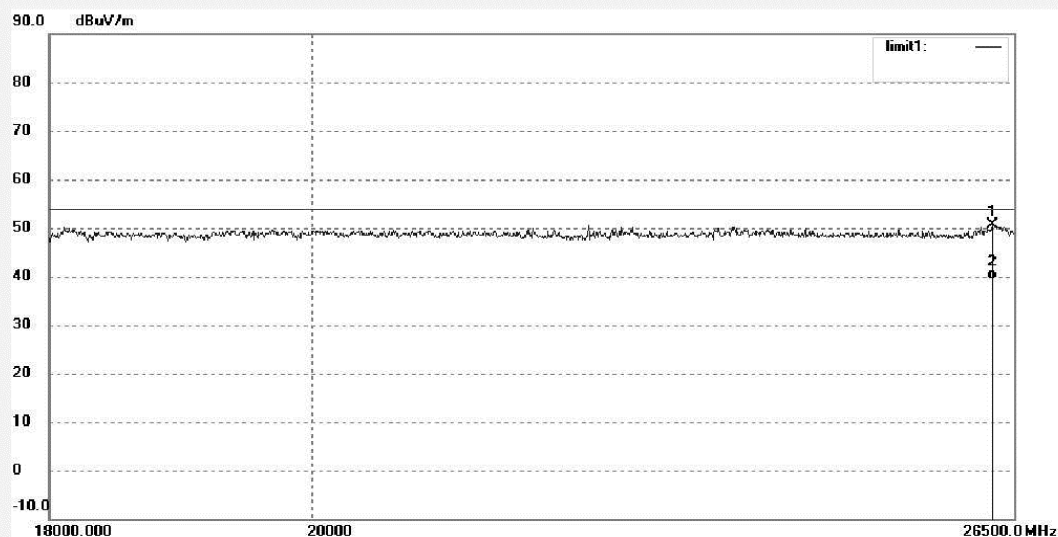

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26275.468	34.24	16.50	50.74	74.00	-23.26	peak			
2	26275.468	22.79	16.50	39.29	54.00	-14.71	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2276

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2462MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

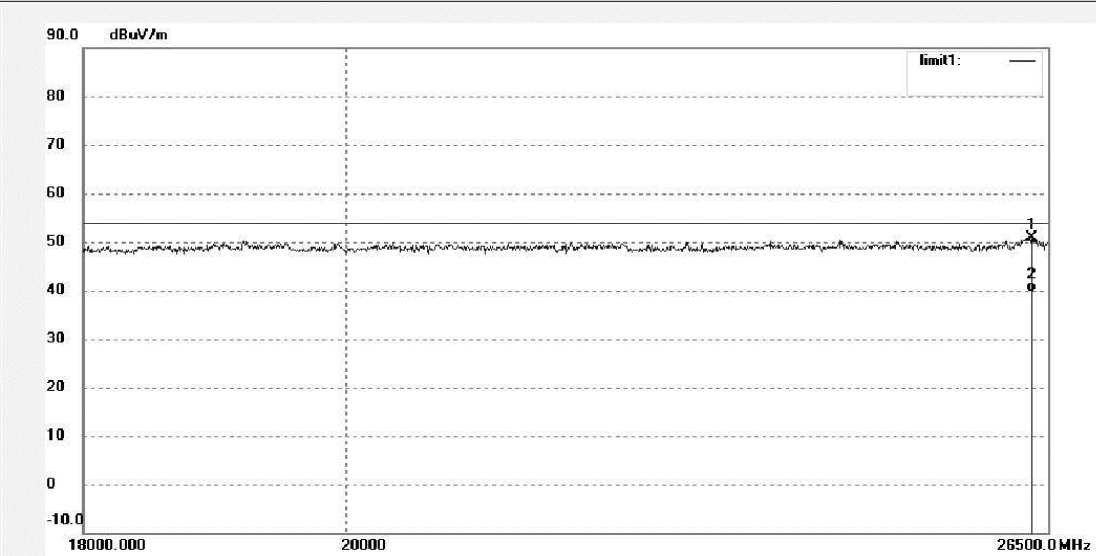

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26326.330	34.42	16.50	50.92	74.00	-23.08	peak			
2	26326.330	23.11	16.50	39.61	54.00	-14.39	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2277

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2462MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Vertical

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n20

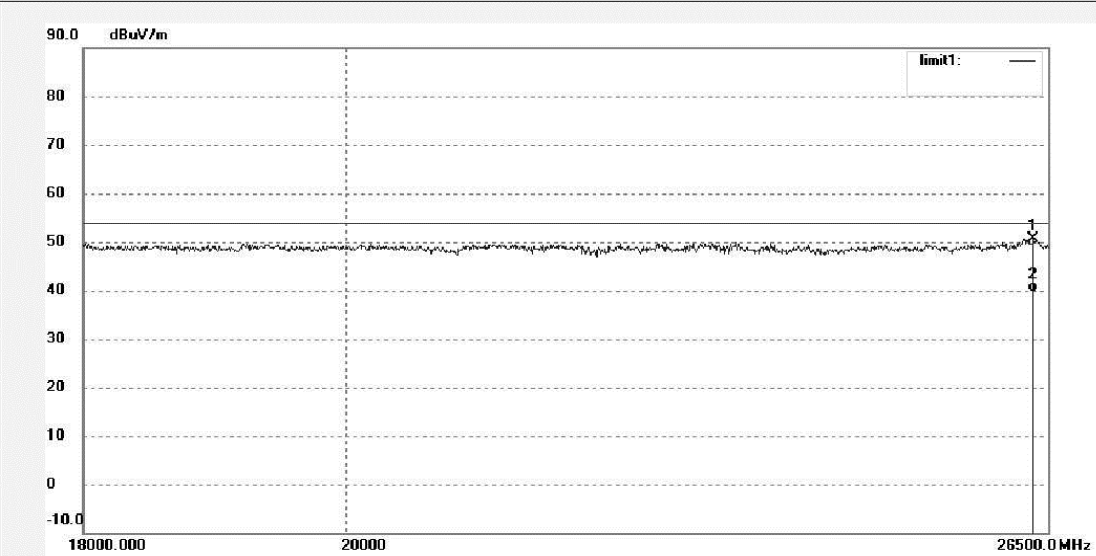

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26346.703	34.25	16.50	50.75	74.00	-23.25	peak			
2	26346.703	23.11	16.50	39.61	54.00	-14.39	AVG			

Appendix C.4: Spurious Emissions, 802.11n HT40_1TX


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2422MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: X
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
Frequency	Frequency	Width					
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

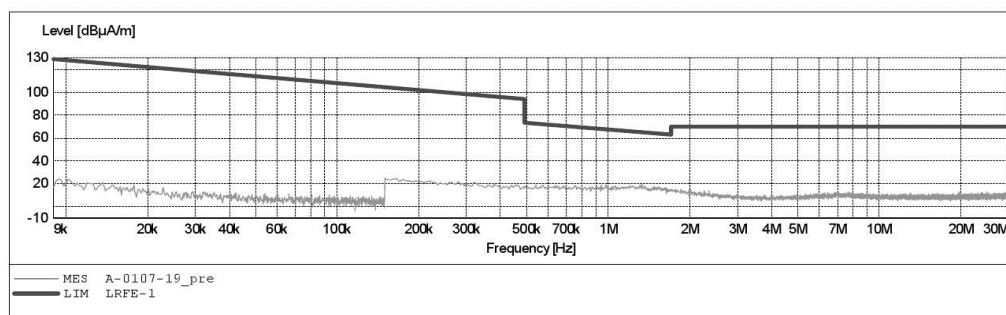


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2422MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Y
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

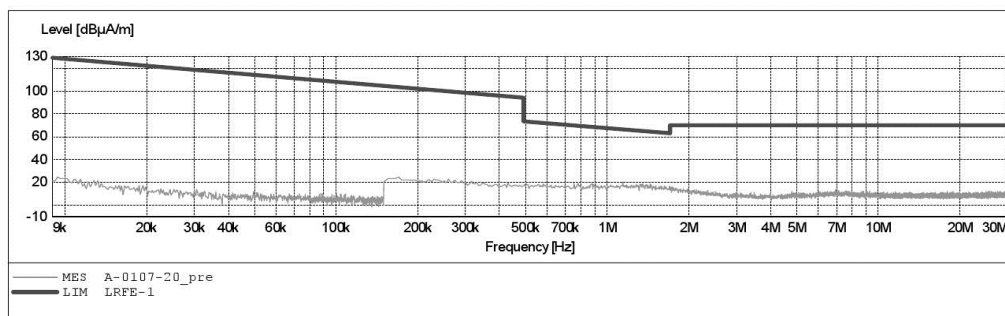


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2422MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Z
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

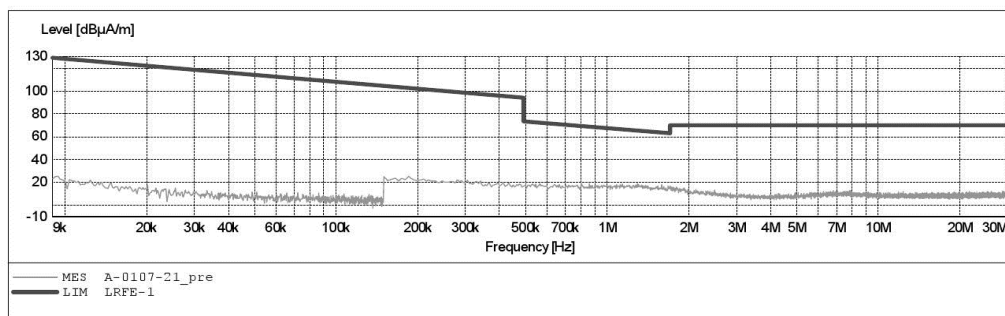


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2437MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: X
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

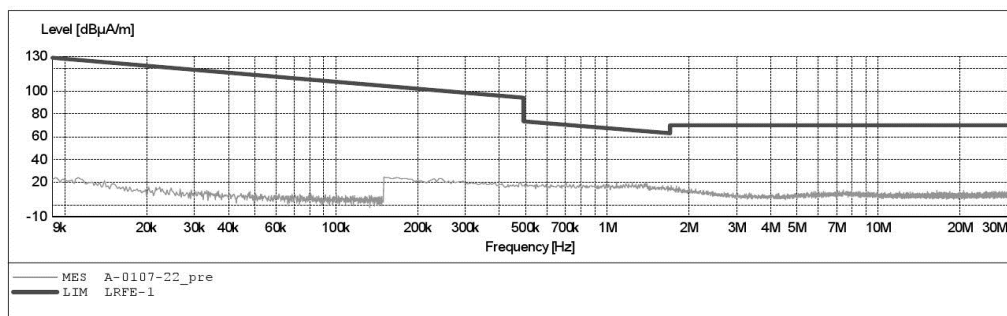


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2437MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Y
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

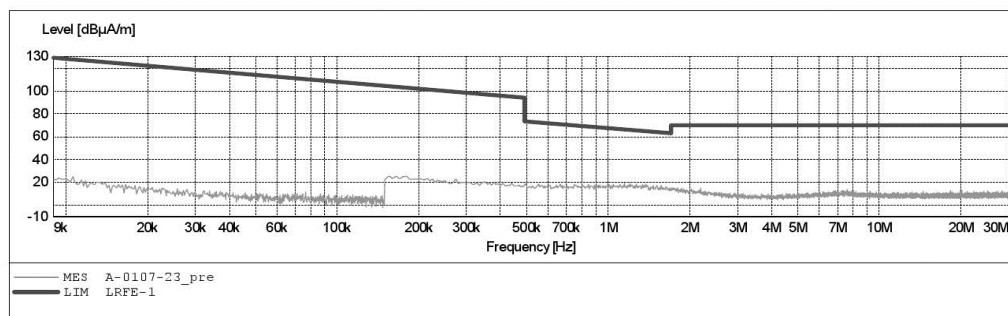


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2437MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Z
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

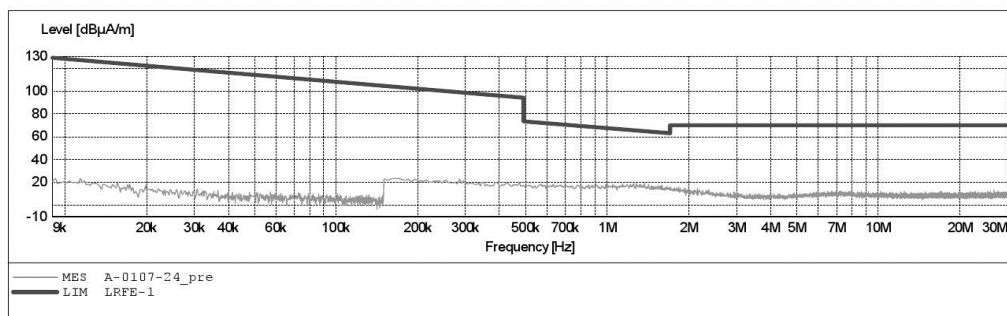


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2452MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: X
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

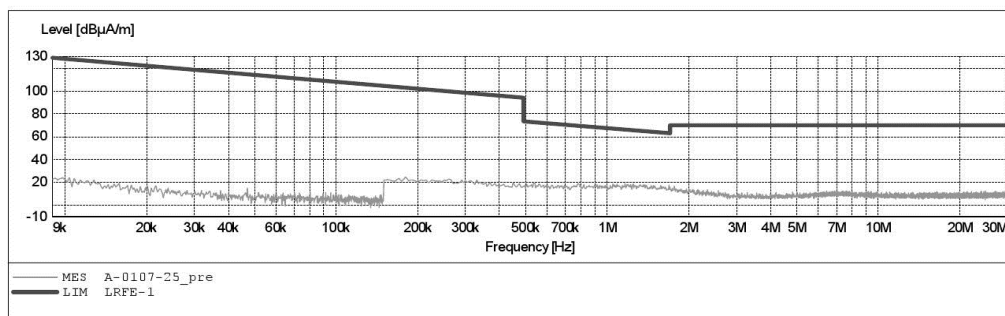


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2452MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Y
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

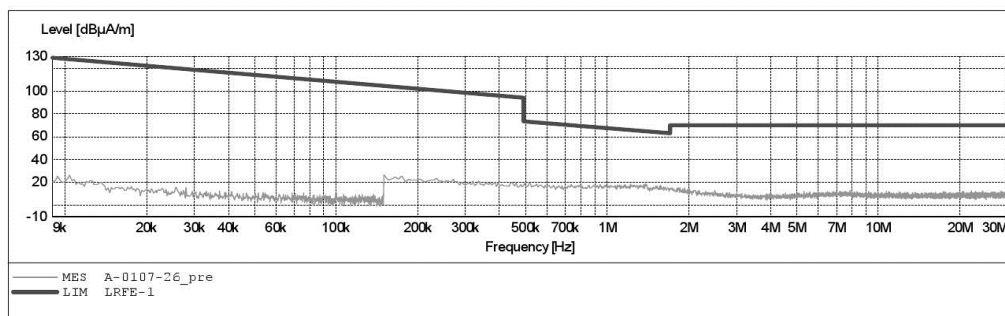


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2452MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Z
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

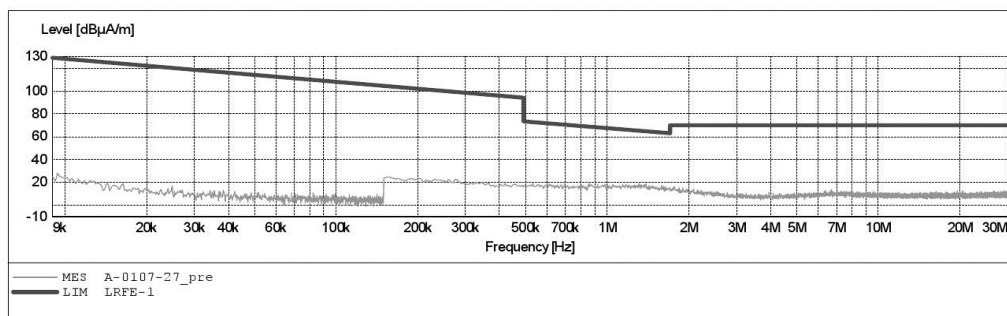

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel: +86-0755-26503290

Fax: +86-0755-26503396

Job No.: LAN2014 #2022

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2422MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 14/12/30/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n40

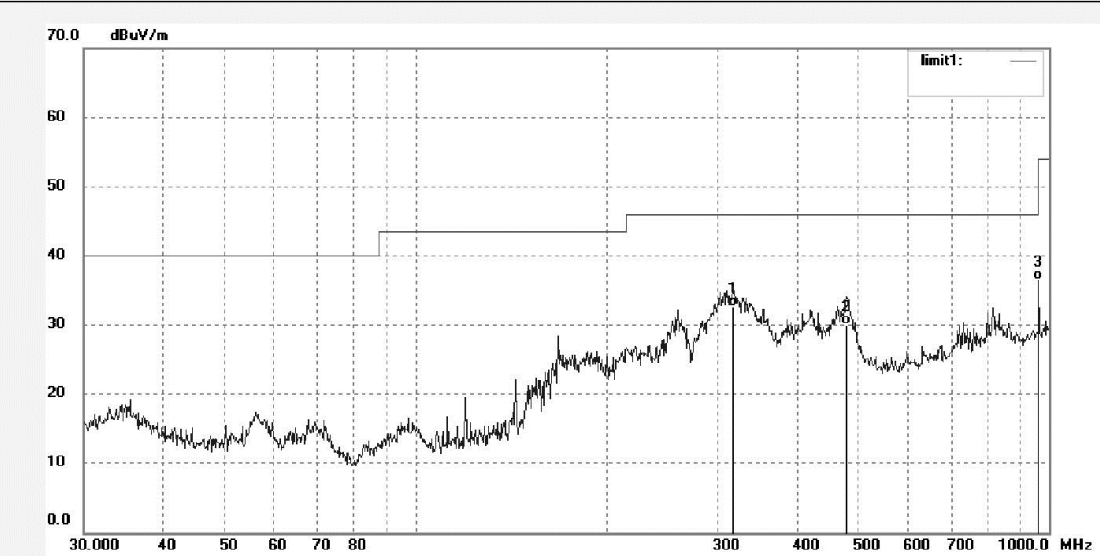

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	317.7010	41.46	-8.81	32.65	46.00	-13.35	QP			
2	478.8455	35.41	-5.36	30.05	46.00	-15.95	QP			
3	962.1622	34.09	2.37	36.46	54.00	-17.54	QP			