



RF TEST REPORT

Product Name: WiFi6 Wireless Router Module

Model Name: HLK-RM65, HLK-RM65L, HLK-RM65A, HLK-RM65B,
HLK-RM65C, HLK-RM65D

FCC ID: 2AD56HLK-RM65

Issued For : Shenzhen Hi-Link Electronic CO.,Ltd
1705, 1706, 1709A, Building E, Xinghe WORLD, Minle
Community, Minzhi Street, Longhua District, Shenzhen

Issued By : Shenzhen LGT Test Service Co., Ltd.
Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street,
Pingshan District, Shenzhen, Guangdong, China

Report Number: LGT25C210RF06

Sample Received Date: Mar. 28, 2025

Date of Test: Mar. 28, 2025 ~ June 03, 2025

Date of Issue: June 03, 2025

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Shenzhen Hi-Link Electronic CO.,Ltd
Address: 1705, 1706, 1709A, Building E, Xinghe WORLD, Minle Community,
Minzhi Street, Longhua District, Shenzhen

Manufacturer: Shenzhen Hi-Link Electronic CO.,Ltd
Address: 1705, 1706, 1709A, Building E, Xinghe WORLD, Minle Community,
Minzhi Street, Longhua District, Shenzhen

Product Name: WiFi6 Wireless Router Module

Trademark: Hi-Link

Model Name: HLK-RM65, HLK-RM65L, HLK-RM65A, HLK-RM65B,
HLK-RM65C, HLK-RM65D

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.407, Subpart E ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	11
2.3 TEST SOFTWARE AND POWER LEVEL	12
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	13
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3 . EMC EMISSION TEST	16
3.1 CONDUCTED EMISSION MEASUREMENT	16
3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT	20
4. POWER SPECTRAL DENSITY TEST	34
4.1 LIMIT	34
4.2 TEST PROCEDURE	34
4.3 DEVIATION FROM STANDARD	34
4.4 TEST SETUP	35
4.5 EUT OPERATION CONDITIONS	35
4.6 TEST RESULTS	35
5. BANDWIDTH MEASUREMENT	36
5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	36
5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	37
5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	38
6. MAXIMUM CONDUCTED OUTPUT POWER	39
6.1 LIMIT	39
6.2 TEST PROCEDURE	39
6.3 DEVIATION FROM STANDARD	39
6.4 TEST SETUP	39
6.5 EUT OPERATION CONDITIONS	39
6.6 TEST RESULTS	39
7. AUTOMATICALLY DISCONTINUE TRANSMISSION	40
7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	40
7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	40
8. ANTENNA REQUIREMENT	41



Table of Contents

Page

8.1 STANDARD REQUIREMENT	41
8.2 EUT ANTENNA	41
APPENDIX I - TEST RESULTS	42
DUTY CYCLE	42
MAXIMUM CONDUCTED OUTPUT POWER	161
-26DB BANDWIDTH	168
OCCUPIED CHANNEL BANDWIDTH	240
BAND EDGE	332
-6DB BANDWIDTH	405
MAXIMUM POWER SPECTRAL DENSITY LEVEL	426
APPENDIX II - MEASUREMENT PHOTOS	601



Revision History

Rev.	Issue Date	Contents
00	June 03, 2025	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Part 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)/15.205/15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.
- (3) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	± 3.2 %
2	RF Output Power, Conducted	± 0.71 dB
3	Power Spectral Density, Conducted	± 1.57 dB
4	Unwanted Emission, Conducted	± 0.63 dB
5	Conducted emission	± 2.80 dB
6	All Emissions, Radiated (0.009-30MHz)	± 2.16 dB
7	All Emissions, Radiated (30MHz-1GHz)	± 4.40 dB
8	All Emissions, Radiated (1GHz-18GHz)	± 5.49 dB
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$
11	Duty Cycle	$\pm 2.3\%$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	WiFi6 Wireless Router Module																												
Trademark:	Hi-Link																												
Model Name:	HLK-RM65																												
Series Model:	HLK-RM65L, HLK-RM65A, HLK-RM65B, HLK-RM65C, HLK-RM65D																												
Model Difference:	Except for the different sizes of FLASH and memory capacity, everything else is the same.																												
Product Description:	<table><tr><td rowspan="12">Operation Frequency:</td><td>IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.180GHz-5.240GHz</td></tr><tr><td>IEEE 802.11n(HT40)/ ac(VHT40)/ax(HE40): 5.190GHz-5.230GHz</td></tr><tr><td>IEEE 802.11 ac(VHT80)/ax(HE80): 5.210GHz</td></tr><tr><td>IEEE 802.11 ac(VHT160)/ax(HE160): 5.250GHz</td></tr><tr><td>IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.260GHz-5.320GHz</td></tr><tr><td>IEEE 802.11 n(HT40)/ ac(VHT40)/ax(HE40): 5.270GHz-5.310GHz</td></tr><tr><td>IEEE 802.11 ac(VHT80)/ax(HE80): 5.290GHz</td></tr><tr><td>IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.500GHz-5.700GHz</td></tr><tr><td>IEEE 802.11 n(HT40)/ ac(VHT40)/ax(HE40): 5.510GHz-5.670GHz</td></tr><tr><td>IEEE 802.11 ac(VHT80)/ax(HE80): 5.530GHz-5.610GHz</td></tr><tr><td>IEEE 802.11 ac(VHT160)/ax(HE160): 5.570GHz</td></tr><tr><td>IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.745GHz-5.825GHz</td></tr><tr><td>IEEE 802.11a/n(HT40)/ac(VHT40)/ax(HE40): 5.755GHz-5.795GHz</td></tr><tr><td>IEEE 802.11 ac(VHT80)/ax(HE80): 5.775GHz</td></tr><tr><td rowspan="4">Modulation Type:</td><td>802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM</td></tr><tr><td>802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM</td></tr><tr><td>802.11ac (OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM</td></tr><tr><td>802.11ax(OFDM, OFDMA): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024QAM</td></tr><tr><td>Antenna Designation:</td><td colspan="2">Dipole Antenna</td></tr><tr><td>Antenna Gain(dBi)</td><td colspan="2">ANT 1: 4.69 ANT 2: 4.69 ANT 3: 4.69</td></tr></table> More details of EUT technical specification, please refer to the User Manual.			Operation Frequency:	IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.180GHz-5.240GHz	IEEE 802.11n(HT40)/ ac(VHT40)/ax(HE40): 5.190GHz-5.230GHz	IEEE 802.11 ac(VHT80)/ax(HE80): 5.210GHz	IEEE 802.11 ac(VHT160)/ax(HE160): 5.250GHz	IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.260GHz-5.320GHz	IEEE 802.11 n(HT40)/ ac(VHT40)/ax(HE40): 5.270GHz-5.310GHz	IEEE 802.11 ac(VHT80)/ax(HE80): 5.290GHz	IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.500GHz-5.700GHz	IEEE 802.11 n(HT40)/ ac(VHT40)/ax(HE40): 5.510GHz-5.670GHz	IEEE 802.11 ac(VHT80)/ax(HE80): 5.530GHz-5.610GHz	IEEE 802.11 ac(VHT160)/ax(HE160): 5.570GHz	IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.745GHz-5.825GHz	IEEE 802.11a/n(HT40)/ac(VHT40)/ax(HE40): 5.755GHz-5.795GHz	IEEE 802.11 ac(VHT80)/ax(HE80): 5.775GHz	Modulation Type:	802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM	802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM	802.11ac (OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM	802.11ax(OFDM, OFDMA): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024QAM	Antenna Designation:	Dipole Antenna		Antenna Gain(dBi)	ANT 1: 4.69 ANT 2: 4.69 ANT 3: 4.69	
Operation Frequency:	IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.180GHz-5.240GHz																												
	IEEE 802.11n(HT40)/ ac(VHT40)/ax(HE40): 5.190GHz-5.230GHz																												
	IEEE 802.11 ac(VHT80)/ax(HE80): 5.210GHz																												
	IEEE 802.11 ac(VHT160)/ax(HE160): 5.250GHz																												
	IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.260GHz-5.320GHz																												
	IEEE 802.11 n(HT40)/ ac(VHT40)/ax(HE40): 5.270GHz-5.310GHz																												
	IEEE 802.11 ac(VHT80)/ax(HE80): 5.290GHz																												
	IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.500GHz-5.700GHz																												
	IEEE 802.11 n(HT40)/ ac(VHT40)/ax(HE40): 5.510GHz-5.670GHz																												
	IEEE 802.11 ac(VHT80)/ax(HE80): 5.530GHz-5.610GHz																												
	IEEE 802.11 ac(VHT160)/ax(HE160): 5.570GHz																												
	IEEE 802.11a/n(HT20)/ ac(VHT20)/ax(HE20): 5.745GHz-5.825GHz																												
IEEE 802.11a/n(HT40)/ac(VHT40)/ax(HE40): 5.755GHz-5.795GHz																													
IEEE 802.11 ac(VHT80)/ax(HE80): 5.775GHz																													
Modulation Type:	802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM																												
	802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM																												
	802.11ac (OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM																												
	802.11ax(OFDM, OFDMA): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024QAM																												
Antenna Designation:	Dipole Antenna																												
Antenna Gain(dBi)	ANT 1: 4.69 ANT 2: 4.69 ANT 3: 4.69																												
Test Channel:	Please refer to the Note 3.																												
Rating:	Input: DC 3.3V 5A																												
Hardware Version:	N/A																												
Software Version:	N/A																												
Connecting I/O Port(s):	Please refer to the Note 1.																												



Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.

Operation Frequency of channel			
5.180GHz-5.240GHz		5.260GHz-5.320GHz	
Channel	Frequency	Channel	Frequency
36	5180	52	5260
38	5190	54	5270
40	5200	56	5280
42	5210	58	5290
44	5220	60	5300
46	5230	62	5310
48	5240	64	5320
5.500GHz-5.720GHz		5.745GHz-5.825GHz	
Channel	Frequency	Channel	Frequency
100	5500	149	5745
102	5510	151	5755
104	5520	153	5765
108	5540	157	5785
110	5550	159	5795
112	5560	161	5805
116	5580	165	5825
118	5590		
120	5600		
124	5620		
126	5630		
128	5640		
132	5660		
134	5670		
136	5680		
140	5700		
142	5710		
144	5720		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

Channel List for 802.11a/n/ac/ax(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	60	5300	116	5580	157	5785
48	5240	64	5320	140	5700	165	5825



Channel List for 802.11n/ac/ax(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
134	5670						

Channel List for 802.11ac/ax(80MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
122	5610						

Channel List for 802.11ac/ax (160MHz)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
50	5250	114	5570



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH52&CH60&CH64	6 Mbps
Mode 3	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 4	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 5	TX IEEE 802.11 ac VHT20 /ax HE20 CH36&CH40&CH48	NSS1 MCS0
Mode 6	TX IEEE 802.11n HT20 CH52&CH60&CH64	MCS 0
Mode 7	TX IEEE 802.11 ac VHT20 /ax HE20 CH52&CH60&CH64	NSS1 MCS0
Mode 8	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 9	TX IEEE 802.11ac VHT20 /ax HE20 CH149&CH157&CH165	NSS1 MCS0
Mode 10	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 11	TX IEEE 802.11 ac VHT40/ax HE40 CH38&CH46	NSS1 MCS0
Mode 12	TX IEEE 802.11n HT40 CH54 &CH62	MCS 0
Mode 13	TX IEEE 802.11 ac VHT40/ax HE40 CH54 &CH62	NSS1 MCS0
Mode 14	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 15	TX IEEE 802.11ac VHT40/ax HE40 CH151&CH159	NSS1 MCS0
Mode 16	TX IEEE 802.11 ac VHT80/ax HE80 CH42	NSS1 MCS0
Mode 17	TX IEEE 802.11 ac VHT80/ax HE80 CH58	NSS1 MCS0
Mode 18	TX IEEE 802.11ac VHT80/ax HE80 CH155	NSS1 MCS0
Mode 19	TX IEEE 802.11 ac VHT160/ax HE160CH50	NSS1 MCS0
Mode 20	TX IEEE 802.11ac VHT160/ax HE160 CH114	NSS1 MCS0

- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
 (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
 (3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.
 (4) The battery is fully-charged during the radiated and RF conducted test.
 (5) All 20M, 40M, 80M, 160M bandwidth modes have been tested, and the report only shown the worst mode data
 (6) The 802.11ax mode is investigated among different tones (26/52/106/242-tone RU channel), full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 21: TX Mode



2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 5G WIFI B1		
QATool_Ulv2.78	Mode Or Modulation type	SISO Power setting	MIMO Power setting
	a	15	-
	n20	15	15
	n40	15	15
	ac20	15	15
	ac40	15	15
	ac80	15	15
	ac160	15	15
	ax20	15	15
	ax40	15	15
	ax80	15	15
	ax160	15	15
Test software Version	Test program: 5G WIFI B2		
QATool_Ulv2.78	Mode Or Modulation type	SISO Power setting	MIMO Power setting
	a	15	-
	n20	15	15
	n40	15	15
	ac20	15	15
	ac40	15	15
	ac80	15	15
	ax20	15	15
	ax40	15	15
	ax80	15	15
	ax160	15	15
Test software Version	Test program: 5G WIFI B3		
QATool_Ulv2.78	Mode Or Modulation type	SISO Power setting	MIMO Power setting
	a	15	-
	n20	15	15
	n40	15	15
	ac20	15	15
	ac40	15	15
	ac80	15	15
	ac160	15	15
	ax20	15	15
	ax40	15	15
	ax80	15	15
	ax160	15	15
Test software Version	Test program: 5G WIFI B4		
QATool_Ulv2.78	Mode Or Modulation type	SISO Power setting	MIMO Power setting
	a	15	-
	n20	15	15
	n40	15	15
	ac20	15	15
	ac40	15	15
	ac80	15	15
	ax20	15	15
	ax40	15	15
	ax80	15	15
	ax160	15	15



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	HKF-16	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
LISN	COM-POWER	LI-115	02032	2025.03.05	2026.03.04
LISN	SCHWARZBECK	NNLK 8122	00160	2025.03.05	2026.03.04
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2025.03.05	2026.03.04
Coaxial cables (9kHz-30MHz)	Juncoax	JMR600- NMNM-2M	N.A	2025.03.06	2026.03.05
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
Active loop Antenna	ETS	6502	00049544	2025.03.11	2028.03.10
Spectrum Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Trilog Broadband Antenna (30M-1G)	SCHWARZBECK	VULB 9168	2705	2024.05.17	2027.05.16
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2025.03.10	2028.03.09
Horn Antenna(18-40G)	SCHWARZBECK	BBHA 9170	685	2023.10.23	2026.10.22
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2025.03.06	2026.03.05
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2025.03.06	2026.03.05
Pre-amplifier(18-40G)	SCHWARZBECK	BBV 9721	9721-019	2024.10.21	2025.10.20
Coaxial cables (9kHz-1GHz)	Juncoax	JMR600- NMNM-8M	N.A	2025.03.06	2026.03.05
Coaxial cables (1GHz-18GHz)	TaiHe	UCD460B- NMSM-1M9	N.A	2025.03.06	2026.03.05
Coaxial cables (18GHz-40GHz)	Junkosha Inc.	MWX241- 05000KMSKMS	N.A	2025.03.08	2026.03.07
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.08.05	2025.08.04
Antenna Tower	SAEMC	BK-4AT-BS-D	SK2021093008	N.A	N.A
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Signal Analyzer	Keysight	N9020A	MY50530994	2025.03.05	2026.03.04
Power Sensor	R&S	NRP8S	149.0006K02- 104963-Ae	2025.03.06	2026.03.05
RF Automatic Test system	MW	MW100 -RFCB	MW220324LG- 33	2025.03.06	2026.03.05
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2025.03.05	2026.03.04
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.08.05	2025.08.04
Attenuator	eastsheep	90db	N.A	2025.03.06	2026.03.05
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09



Digital multimeter	MASTECH	MS8261	MBGBC83053	2025.03.05	2026.03.04
DC source	Jiuyuan	QJ6010E	N.A	2025.03.09	2026.03.08
Testing Software	MTS8310_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

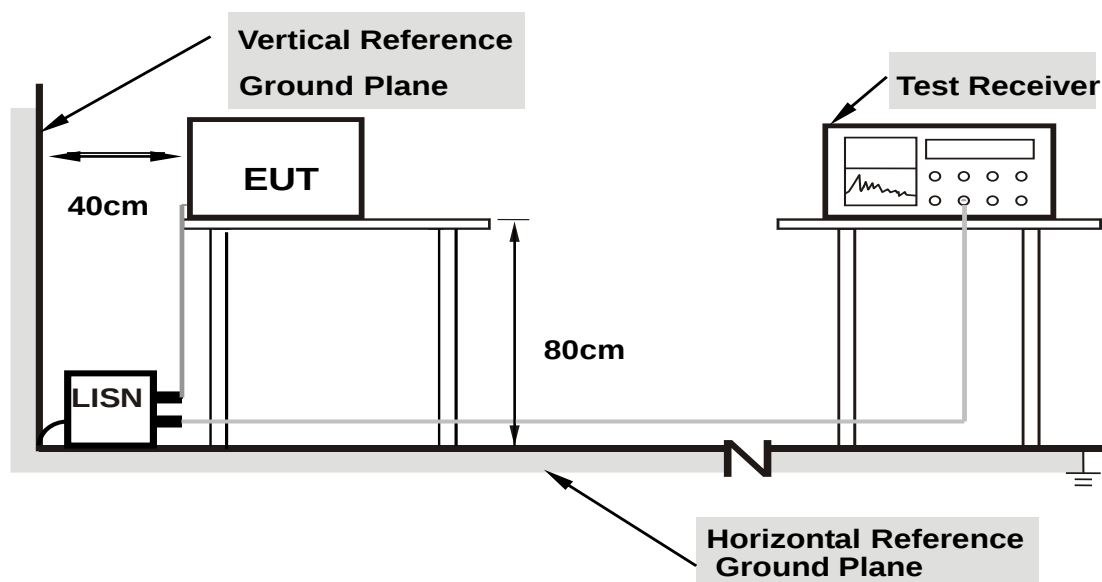

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Project: LGT25C210	Test Engineer: LiuH
EUT: WiFi6 Wireless Router Module	Temperature: 24.6°C
M/N: HLK-RM65	Humidity: 49%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-04-16
Test Mode: TX 802.11a 5180	
Note:	

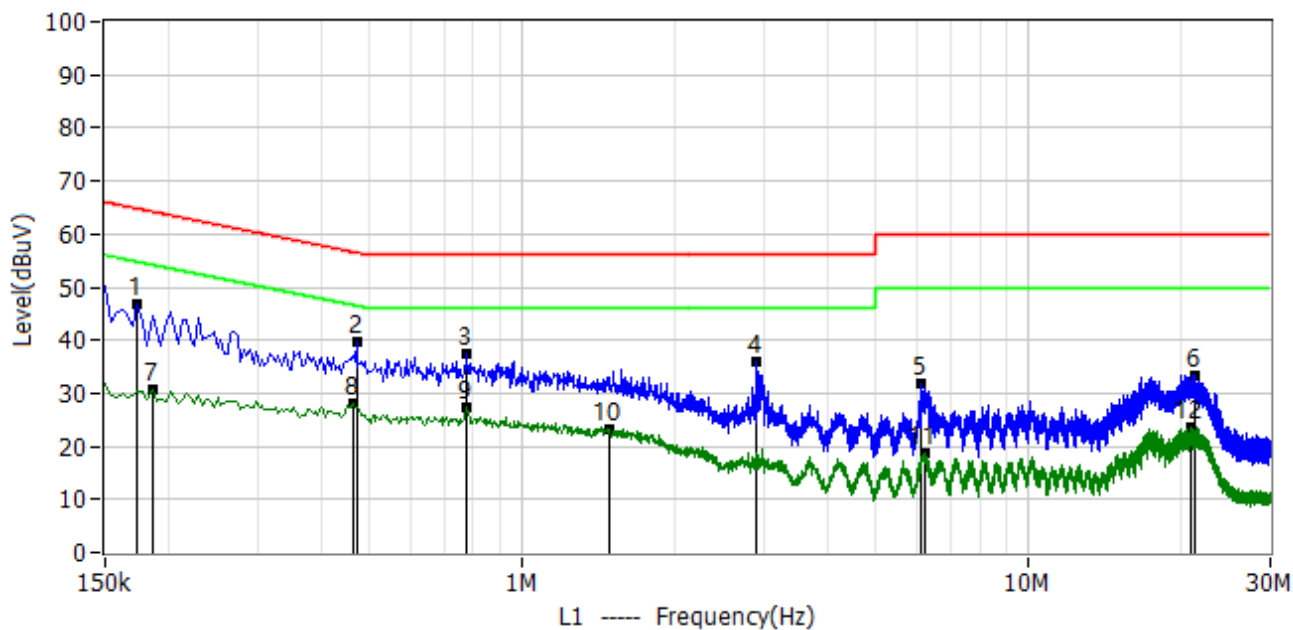

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.174	35.98	10.67	46.65	64.77	-18.12	QP	L1
2*	0.470	28.89	10.84	39.73	56.51	-16.79	QP	L1
3*	0.778	26.52	10.85	37.37	56.00	-18.63	QP	L1
4*	2.906	24.85	10.98	35.83	56.00	-20.17	QP	L1
5*	6.146	20.58	11.20	31.78	60.00	-28.22	QP	L1
6*	21.250	21.61	11.79	33.40	60.00	-26.60	QP	L1
7*	0.186	19.89	10.67	30.56	54.21	-23.65	AV	L1
8*	0.462	17.24	10.83	28.07	46.66	-18.58	AV	L1
9*	0.778	16.67	10.85	27.52	46.00	-18.48	AV	L1
10*	1.490	12.37	10.94	23.31	46.00	-22.69	AV	L1
11*	6.246	7.41	11.20	18.61	50.00	-31.39	AV	L1
12*	20.854	11.84	11.78	23.62	50.00	-26.38	AV	L1



Project: LGT25C210	Test Engineer: LiuH
EUT: WiFi6 Wireless Router Module	Temperature: 24.6°C
M/N: HLK-RM65	Humidity: 49%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-04-16
Test Mode: TX 802.11a 5180	
Note:	

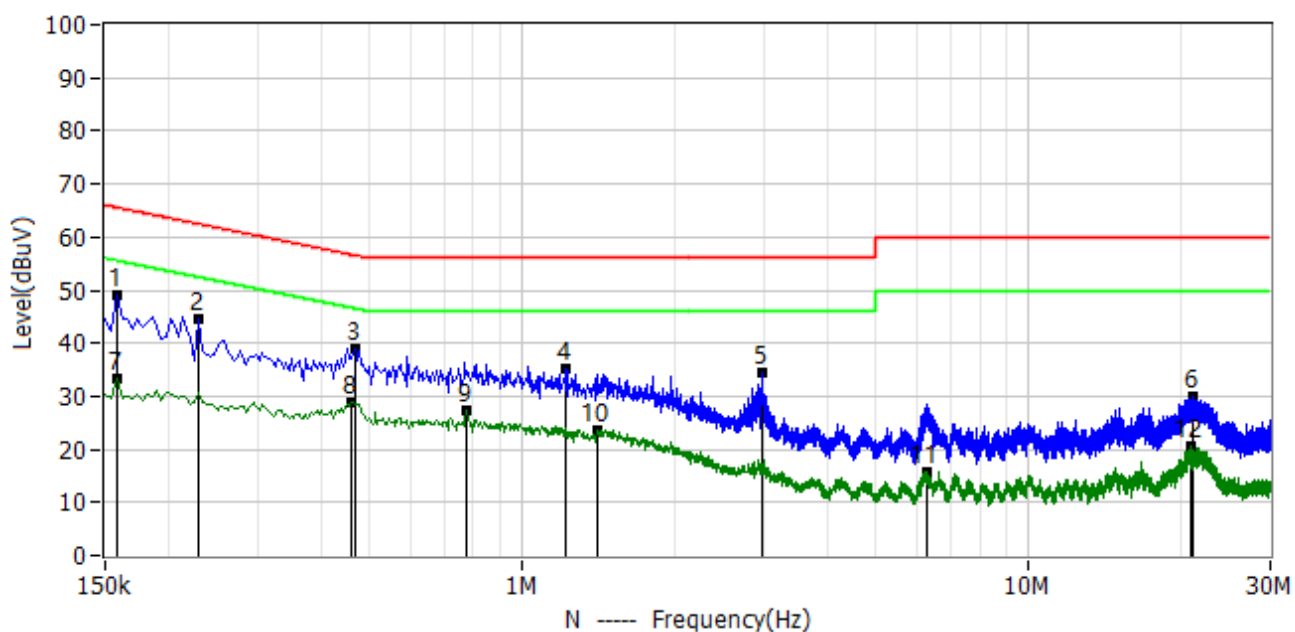

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.158	38.47	10.71	49.18	65.57	-16.39	QP	N
2*	0.230	33.62	10.77	44.39	62.45	-18.06	QP	N
3*	0.466	27.99	10.86	38.85	56.58	-17.73	QP	N
4*	1.218	24.36	10.97	35.33	56.00	-20.67	QP	N
5*	2.978	23.56	10.99	34.55	56.00	-21.45	QP	N
6*	21.170	18.06	11.83	29.89	60.00	-30.11	QP	N
7*	0.158	22.62	10.71	33.33	55.57	-22.24	AV	N
8*	0.458	17.98	10.86	28.84	46.73	-17.89	AV	N
9*	0.778	16.31	10.91	27.22	46.00	-18.78	AV	N
10*	1.402	12.55	10.96	23.51	46.00	-22.49	AV	N
11*	6.294	4.61	11.12	15.73	50.00	-34.27	AV	N
12*	20.974	8.69	11.83	20.52	50.00	-29.48	AV	N



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&15.205/209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Note: In case the emission radiated emission above 1000MHz fall within the restricted band the restricted frequency bands, the peak limit is 74 dBuV/m.



LIMITS OF EMISSIONS OUTSIDE OF THE FREQUENCY BANDS

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: dBuV/m(at 3M) = EIRP(dBm) + 95.2.

Peak Limit = -27dBm/MHz + 95.2 = 68.2 dBuV/m.

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.2 DEVIATION FROM TEST STANDARD


No deviation

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

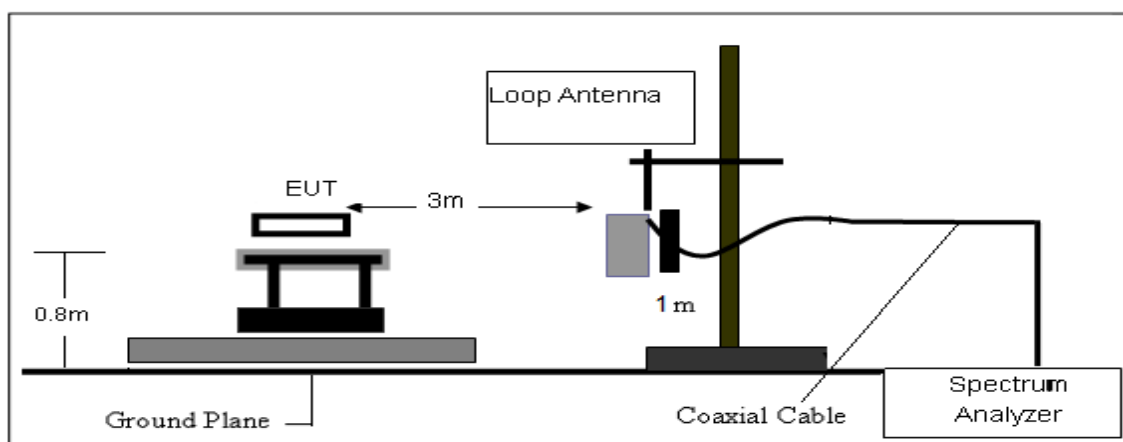

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

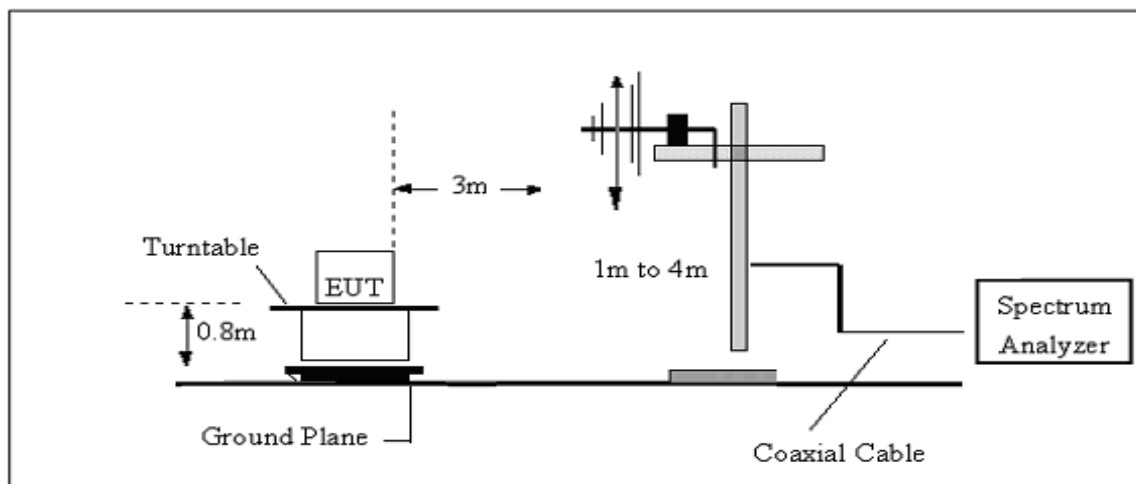

(C) Radiated Emission Test-Up Frequency Above 1GHz

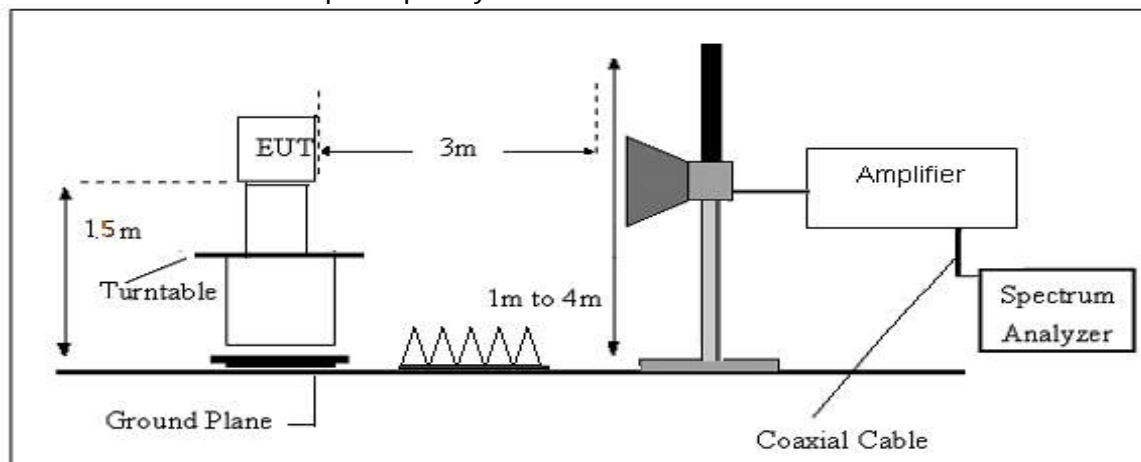



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



3.2.6 TEST RESULTS

Results of Radiated Emissions (9 KHz~30MHz)

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Remark
1*	-	-	-	-	-	-	-	See Note

Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.




Results of Radiated Emissions (30MHz~1000MHz)

Project: LGT25C210	Test Engineer: LiuH
EUT: WiFi6 Wireless Router Module	Temperature: 24.6°C
M/N: HLK-RM65	Humidity: 49%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-04-16
Test Mode: TX 802.11a 5180	
Note:	

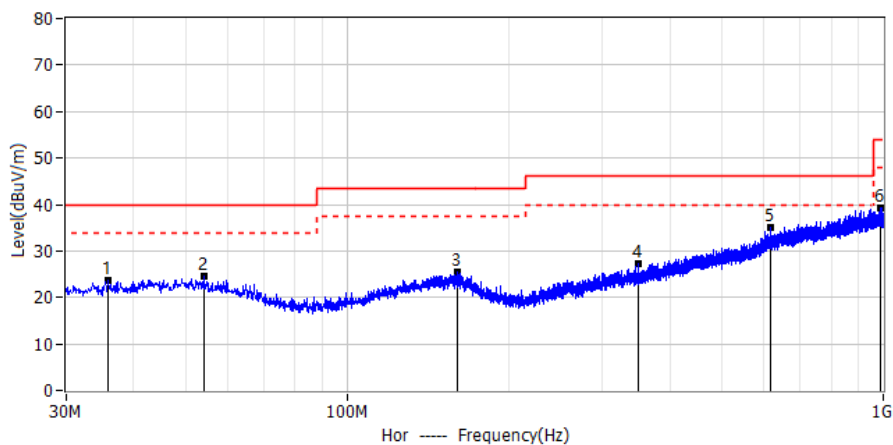

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	35.820	3.86	19.84	23.70	40.00	-16.30	QP	Hor
2*	54.129	4.16	20.27	24.43	40.00	-15.57	QP	Hor
3*	160.829	4.07	21.39	25.46	43.50	-18.04	QP	Hor
4*	348.524	4.58	22.65	27.23	46.00	-18.77	QP	Hor
5*	616.365	6.03	29.14	35.17	46.00	-10.83	QP	Hor
6*	988.360	5.44	33.93	39.37	54.00	-14.63	QP	Hor

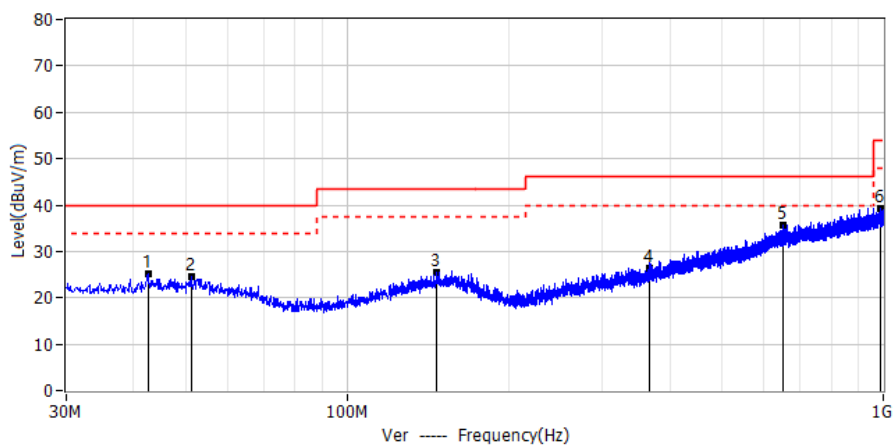

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	42.610	4.37	20.68	25.05	40.00	-14.95	QP	Ver
2*	51.219	4.09	20.60	24.69	40.00	-15.31	QP	Ver
3*	147.370	3.95	21.57	25.52	43.50	-17.98	QP	Ver
4*	365.741	3.07	23.36	26.43	46.00	-19.57	QP	Ver
5*	651.164	5.99	29.54	35.53	46.00	-10.47	QP	Ver
6*	987.269	5.14	34.04	39.18	54.00	-14.82	QP	Ver



Results of Radiated Emissions (Above 1000MHz)

Band I(5.15-5.25) GHz							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (802.11/ 5180 MHz)							
3990.25	52.83	-6.89	45.94	74.00	-28.06	PK	Vertical
3990.25	42.89	-6.89	36.00	54.00	-18.00	AV	Vertical
3990.97	52.03	-6.89	45.14	74.00	-28.86	PK	Horizontal
3990.97	42.54	-6.89	35.65	54.00	-18.35	AV	Horizontal
8911.89	53.21	-3.80	49.41	68.20	-18.79	PK	Vertical
8911.89	44.40	-3.80	40.60	54.00	-13.40	AV	Vertical
8911.56	53.10	-3.80	49.30	68.20	-18.90	PK	Horizontal
8911.56	43.48	-3.80	39.68	54.00	-14.32	AV	Horizontal
10360.25	55.25	-2.92	52.33	68.20	-15.87	PK	Vertical
10360.25	45.42	-2.92	42.50	54.00	-11.50	AV	Vertical
10360.16	55.43	-2.92	52.51	68.20	-15.69	PK	Horizontal
10360.16	44.18	-2.92	41.26	54.00	-12.74	AV	Horizontal
13285.41	54.76	-0.67	54.09	74.00	-19.91	PK	Vertical
13285.41	44.19	-0.67	43.52	54.00	-10.48	AV	Vertical
13288.62	54.74	-0.67	54.07	74.00	-19.93	PK	Horizontal
13288.62	44.92	-0.67	44.25	54.00	-9.75	AV	Horizontal
Mid Channel (802.11/ 5200 MHz)							
3994.29	52.42	-6.89	45.53	74.00	-28.47	PK	Vertical
3994.29	42.37	-6.89	35.48	54.00	-18.52	AV	Vertical
3990.85	52.38	-6.89	45.49	74.00	-28.51	PK	Horizontal
3990.85	42.18	-6.89	35.29	54.00	-18.71	AV	Horizontal
7227.01	53.50	-3.80	49.70	68.20	-18.50	PK	Vertical
7227.01	43.11	-3.80	39.31	54.00	-14.69	AV	Vertical
7225.70	53.62	-3.80	49.82	68.20	-18.38	PK	Horizontal
7225.70	43.20	-3.80	39.40	54.00	-14.60	AV	Horizontal
10400.12	55.85	-2.92	52.93	68.20	-15.27	PK	Vertical
10400.12	44.56	-2.92	41.64	54.00	-12.36	AV	Vertical
10400.32	55.98	-2.92	53.06	68.20	-15.14	PK	Horizontal
10400.32	44.59	-2.92	41.67	54.00	-12.33	AV	Horizontal
13295.72	54.54	-0.67	53.87	74.00	-20.13	PK	Vertical
13295.72	43.74	-0.67	43.07	54.00	-10.93	AV	Vertical
13290.54	53.57	-0.67	52.90	74.00	-21.10	PK	Horizontal
13290.54	44.69	-0.67	44.02	54.00	-9.98	AV	Horizontal
High Channel (802.11/ 5240 MHz)							
3990.80	52.78	-6.89	45.89	74.00	-28.11	PK	Vertical
3990.80	42.79	-6.89	35.90	54.00	-18.10	AV	Vertical
3990.45	53.26	-6.89	46.37	74.00	-27.63	PK	Horizontal
3990.45	43.24	-6.89	36.35	54.00	-17.65	AV	Horizontal
7217.84	53.71	-3.80	49.91	68.20	-18.29	PK	Vertical
7217.84	44.45	-3.80	40.65	54.00	-13.35	AV	Vertical
7231.84	53.41	-3.80	49.61	68.20	-18.59	PK	Horizontal
7231.84	43.46	-3.80	39.66	54.00	-14.34	AV	Horizontal
10480.11	55.30	-2.92	52.38	68.20	-15.82	PK	Vertical
10480.11	45.14	-2.92	42.22	54.00	-11.78	AV	Vertical
10480.19	56.09	-2.92	53.17	68.20	-15.03	PK	Horizontal
10480.19	44.41	-2.92	41.49	54.00	-12.51	AV	Horizontal
13288.10	53.78	-0.67	53.11	74.00	-20.89	PK	Vertical
13288.10	44.27	-0.67	43.60	54.00	-10.40	AV	Vertical
13293.77	54.47	-0.67	53.80	74.00	-20.20	PK	Horizontal
13293.77	44.76	-0.67	44.09	54.00	-9.91	AV	Horizontal



Band II(5.25-5.35) GHz							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (802.11/ 5260 MHz)							
3999.36	52.15	-6.89	45.26	74.00	-28.74	PK	Vertical
3999.36	43.38	-6.89	36.49	54.00	-17.51	AV	Vertical
3985.38	52.23	-6.89	45.34	74.00	-28.66	PK	Horizontal
3985.38	42.63	-6.89	35.74	54.00	-18.26	AV	Horizontal
8924.38	53.39	-3.80	49.59	68.20	-18.61	PK	Vertical
8924.38	43.98	-3.80	40.18	54.00	-13.82	AV	Vertical
8917.18	53.22	-3.80	49.42	68.20	-18.78	PK	Horizontal
8917.18	43.30	-3.80	39.50	54.00	-14.50	AV	Horizontal
10520.18	56.14	-2.92	53.22	68.20	-14.98	PK	Vertical
10520.18	44.86	-2.92	41.94	54.00	-12.06	AV	Vertical
10520.07	56.37	-2.92	53.45	68.20	-14.75	PK	Horizontal
10520.07	44.01	-2.92	41.09	54.00	-12.91	AV	Horizontal
13296.15	54.70	-0.67	54.03	74.00	-19.97	PK	Vertical
13296.15	43.83	-0.67	43.16	54.00	-10.84	AV	Vertical
13286.16	54.63	-0.67	53.96	74.00	-20.04	PK	Horizontal
13286.16	44.32	-0.67	43.65	54.00	-10.35	AV	Horizontal
Mid Channel (802.11/ 5300 MHz)							
3991.55	53.34	-6.89	46.45	74.00	-27.55	PK	Vertical
3991.55	42.58	-6.89	35.69	54.00	-18.31	AV	Vertical
3996.32	52.28	-6.89	45.39	74.00	-28.61	PK	Horizontal
3996.32	42.50	-6.89	35.61	54.00	-18.39	AV	Horizontal
8914.54	53.10	-3.80	49.30	68.20	-18.90	PK	Vertical
8914.54	43.48	-3.80	39.68	54.00	-14.32	AV	Vertical
8916.49	53.73	-3.80	49.93	68.20	-18.27	PK	Horizontal
8916.49	43.99	-3.80	40.19	54.00	-13.81	AV	Horizontal
10600.25	55.06	-2.92	52.14	74.00	-21.86	PK	Vertical
10600.25	44.96	-2.92	42.04	54.00	-11.96	AV	Vertical
10600.37	55.05	-2.92	52.13	74.00	-21.87	PK	Horizontal
10600.37	45.16	-2.92	42.24	54.00	-11.76	AV	Horizontal
13293.70	54.01	-0.67	53.34	74.00	-20.66	PK	Vertical
13293.70	44.05	-0.67	43.38	54.00	-10.62	AV	Vertical
13293.53	54.05	-0.67	53.38	74.00	-20.62	PK	Horizontal
13293.53	44.81	-0.67	44.14	54.00	-9.86	AV	Horizontal
High Channel (802.11/ 5320 MHz)							
3996.63	52.28	-6.89	45.39	74.00	-28.61	PK	Vertical
3996.63	42.42	-6.89	35.53	54.00	-18.47	AV	Vertical
3987.06	52.42	-6.89	45.53	74.00	-28.47	PK	Horizontal
3987.06	42.37	-6.89	35.48	54.00	-18.52	AV	Horizontal
8909.71	53.36	-3.80	49.56	68.20	-18.64	PK	Vertical
8909.71	43.34	-3.80	39.54	54.00	-14.46	AV	Vertical
8911.67	53.69	-3.80	49.89	68.20	-18.31	PK	Horizontal
8911.67	44.36	-3.80	40.56	54.00	-13.44	AV	Horizontal
10640.35	55.72	-2.92	52.80	74.00	-21.20	PK	Vertical
10640.35	45.40	-2.92	42.48	54.00	-11.52	AV	Vertical
10640.32	56.48	-2.92	53.56	74.00	-20.44	PK	Horizontal
10640.32	45.04	-2.92	42.12	54.00	-11.88	AV	Horizontal
13288.41	53.63	-0.67	52.96	74.00	-21.04	PK	Vertical
13288.41	44.20	-0.67	43.53	54.00	-10.47	AV	Vertical
13288.14	54.36	-0.67	53.69	74.00	-20.31	PK	Horizontal
13288.14	44.36	-0.67	43.69	54.00	-10.31	AV	Horizontal



Band III(5.47-5.725) GHz							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Reslut (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (802.11/ 5500 MHz)							
3990.67	52.91	-6.89	46.02	74.00	-27.98	PK	Vertical
3990.67	42.07	-6.89	35.18	54.00	-18.82	AV	Vertical
3980.78	52.25	-6.89	45.36	74.00	-28.64	PK	Horizontal
3980.78	42.16	-6.89	35.27	54.00	-18.73	AV	Horizontal
8918.80	54.31	-3.80	50.51	68.20	-17.69	PK	Vertical
8918.80	43.58	-3.80	39.78	54.00	-14.22	AV	Vertical
8920.40	53.21	-3.80	49.41	68.20	-18.79	PK	Horizontal
8920.40	43.56	-3.80	39.76	54.00	-14.24	AV	Horizontal
10991.89	55.89	-2.92	52.97	74.00	-21.03	PK	Vertical
10991.89	44.17	-2.92	41.25	54.00	-12.75	AV	Vertical
10985.65	55.57	-2.92	52.65	74.00	-21.35	PK	Horizontal
10985.65	45.32	-2.92	42.40	54.00	-11.60	AV	Horizontal
13292.51	54.08	-0.35	53.73	74.00	-20.27	PK	Vertical
13292.51	44.09	-0.35	43.74	54.00	-10.26	AV	Vertical
13284.29	54.76	-0.35	54.41	74.00	-19.59	PK	Horizontal
13284.29	43.93	-0.35	43.58	54.00	-10.42	AV	Horizontal
Mid Channel (802.11/ 5580 MHz)							
3998.14	52.45	-6.89	45.56	74.00	-28.44	PK	Vertical
3998.14	42.07	-6.89	35.18	54.00	-18.82	AV	Vertical
3985.72	52.49	-6.89	45.60	74.00	-28.40	PK	Horizontal
3985.72	42.79	-6.89	35.90	54.00	-18.10	AV	Horizontal
8909.12	54.18	-3.80	50.38	68.20	-17.82	PK	Vertical
8909.12	43.21	-3.80	39.41	54.00	-14.59	AV	Vertical
8909.72	53.77	-3.80	49.97	68.20	-18.23	PK	Horizontal
8909.72	43.63	-3.80	39.83	54.00	-14.17	AV	Horizontal
11150.90	55.45	-2.92	52.53	74.00	-21.47	PK	Vertical
11150.90	44.73	-2.92	41.81	54.00	-12.19	AV	Vertical
11153.68	56.12	-2.92	53.20	74.00	-20.80	PK	Horizontal
11153.68	44.35	-2.92	41.43	54.00	-12.57	AV	Horizontal
13297.45	54.40	-0.35	54.05	74.00	-19.95	PK	Vertical
13297.45	43.75	-0.35	43.40	54.00	-10.60	AV	Vertical
13286.73	54.84	-0.35	54.49	74.00	-19.51	PK	Horizontal
13286.73	44.89	-0.35	44.54	54.00	-9.46	AV	Horizontal
High Channel (802.11/ 5700 MHz)							
3996.48	52.37	-6.89	45.48	74.00	-28.52	PK	Vertical
3996.48	43.22	-6.89	36.33	54.00	-17.67	AV	Vertical
3999.00	53.25	-6.89	46.36	74.00	-27.64	PK	Horizontal
3999.00	43.41	-6.89	36.52	54.00	-17.48	AV	Horizontal
8909.32	54.31	-3.80	50.51	68.20	-17.69	PK	Vertical
8909.32	43.45	-3.80	39.65	54.00	-14.35	AV	Vertical
8918.44	54.17	-3.80	50.37	68.20	-17.83	PK	Horizontal
8918.44	44.48	-3.80	40.68	54.00	-13.32	AV	Horizontal
11386.76	56.47	-2.92	53.55	74.00	-20.45	PK	Vertical
11386.76	44.54	-2.92	41.62	54.00	-12.38	AV	Vertical
11383.16	55.69	-2.92	52.77	74.00	-21.23	PK	Horizontal
11383.16	45.35	-2.92	42.43	54.00	-11.57	AV	Horizontal
13291.46	54.21	-0.35	53.86	74.00	-20.14	PK	Vertical
13291.46	44.43	-0.35	44.08	54.00	-9.92	AV	Vertical
13298.04	54.04	-0.35	53.69	74.00	-20.31	PK	Horizontal
13298.04	44.36	-0.35	44.01	54.00	-9.99	AV	Horizontal



Band IV(5.725-5.85) GHz							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (802.11/ 5745 MHz)							
3992.80	52.87	-6.89	45.98	74.00	-28.02	PK	Vertical
3992.80	42.07	-6.89	35.18	54.00	-18.82	AV	Vertical
3990.80	52.23	-6.89	45.34	74.00	-28.66	PK	Horizontal
3990.80	42.41	-6.89	35.52	54.00	-18.48	AV	Horizontal
8922.80	54.28	-3.80	50.48	68.20	-17.72	PK	Vertical
8922.80	43.62	-3.80	39.82	54.00	-14.18	AV	Vertical
8910.76	53.53	-3.80	49.73	68.20	-18.47	PK	Horizontal
8910.76	43.36	-3.80	39.56	54.00	-14.44	AV	Horizontal
11479.92	55.71	-2.92	52.79	74.00	-21.21	PK	Vertical
11479.92	44.18	-2.92	41.26	54.00	-12.74	AV	Vertical
11474.91	56.05	-2.92	53.13	74.00	-20.87	PK	Horizontal
11474.91	45.01	-2.92	42.09	54.00	-11.91	AV	Horizontal
13283.72	53.95	-0.35	53.60	74.00	-20.40	PK	Vertical
13283.72	44.87	-0.35	44.52	54.00	-9.48	AV	Vertical
13298.50	53.68	-0.35	53.33	74.00	-20.67	PK	Horizontal
13298.50	44.37	-0.35	44.02	54.00	-9.98	AV	Horizontal
Mid Channel (802.11/ 5785 MHz)							
3996.69	52.75	-6.89	45.86	74.00	-28.14	PK	Vertical
3996.69	42.18	-6.89	35.29	54.00	-18.71	AV	Vertical
3993.15	52.24	-6.89	45.35	74.00	-28.65	PK	Horizontal
3993.15	43.16	-6.89	36.27	54.00	-17.73	AV	Horizontal
8913.57	54.17	-3.80	50.37	68.20	-17.83	PK	Vertical
8913.57	43.28	-3.80	39.48	54.00	-14.52	AV	Vertical
8910.35	53.74	-3.80	49.94	68.20	-18.26	PK	Horizontal
8910.35	43.84	-3.80	40.04	54.00	-13.96	AV	Horizontal
11554.34	56.36	-2.92	53.44	74.00	-20.56	PK	Vertical
11554.34	44.41	-2.92	41.49	54.00	-12.51	AV	Vertical
11553.17	55.58	-2.92	52.66	74.00	-21.34	PK	Horizontal
11553.17	44.12	-2.92	41.20	54.00	-12.80	AV	Horizontal
13286.11	54.05	-0.35	53.70	74.00	-20.30	PK	Vertical
13286.11	44.13	-0.35	43.78	54.00	-10.22	AV	Vertical
13293.45	53.51	-0.35	53.16	74.00	-20.84	PK	Horizontal
13293.45	43.68	-0.35	43.33	54.00	-10.67	AV	Horizontal
High Channel (802.11/ 5825 MHz)							
3986.23	52.56	-6.89	45.67	74.00	-28.33	PK	Vertical
3986.23	42.19	-6.89	35.30	54.00	-18.70	AV	Vertical
3984.99	52.42	-6.89	45.53	74.00	-28.47	PK	Horizontal
3984.99	42.82	-6.89	35.93	54.00	-18.07	AV	Horizontal
8925.83	53.84	-3.80	50.04	68.20	-18.16	PK	Vertical
8925.83	44.46	-3.80	40.66	54.00	-13.34	AV	Vertical
8915.80	54.07	-3.80	50.27	68.20	-17.93	PK	Horizontal
8915.80	43.70	-3.80	39.90	54.00	-14.10	AV	Horizontal
11643.72	55.15	-2.92	52.23	74.00	-21.77	PK	Vertical
11643.72	44.97	-2.92	42.05	54.00	-11.95	AV	Vertical
11650.31	56.45	-2.92	53.53	74.00	-20.47	PK	Horizontal
11650.31	45.45	-2.92	42.53	54.00	-11.47	AV	Horizontal
13296.29	54.64	-0.35	54.29	74.00	-19.71	PK	Vertical
13296.29	44.62	-0.35	44.27	54.00	-9.73	AV	Vertical
13293.89	54.56	-0.35	54.21	74.00	-19.79	PK	Horizontal
13293.89	44.41	-0.35	44.06	54.00	-9.94	AV	Horizontal

Remark:

In frequency ranges 18–25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.



3.2.7 TEST RESULTS(Band edge Requirements)

Band I & Band II (5.15-5.35) GHz							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
802.11n BW20MHz							
5150	55.11	-7.51	47.60	74	-26.40	PK	Vertical
5150	45.10	-7.51	37.59	54	-16.41	AV	Vertical
5150	55.18	-7.51	47.67	74	-26.33	PK	Horizontal
5150	45.05	-7.51	37.54	54	-16.46	AV	Horizontal
5350	54.66	-8.19	46.47	74	-27.53	PK	Vertical
5350	43.98	-8.19	35.79	54	-18.21	AV	Vertical
5350	55.19	-8.19	47.00	74	-27.00	PK	Horizontal
5350	44.61	-8.19	36.42	54	-17.58	AV	Horizontal
802.11n BW40MHz							
5150	55.44	-7.51	47.93	74	-26.07	Peak	Vertical
5150	44.15	-7.51	36.64	54	-17.36	AVG	Vertical
5150	55.42	-7.51	47.91	74	-26.09	Peak	Horizontal
5150	44.80	-7.51	37.29	54	-16.71	AVG	Horizontal
5350	54.94	-8.19	46.75	74	-27.25	Peak	Vertical
5350	43.98	-8.19	35.79	54	-18.21	AVG	Vertical
5350	54.12	-8.19	45.93	74	-28.07	Peak	Horizontal
5350	44.50	-8.19	36.31	54	-17.69	AVG	Horizontal
802.11ac BW80MHz							
5150	55.83	-7.51	48.32	74	-25.68	Peak	Vertical
5150	44.05	-7.51	36.54	54	-17.46	AVG	Vertical
5150	56.24	-7.51	48.73	74	-25.27	Peak	Horizontal
5150	44.80	-7.51	37.29	54	-16.71	AVG	Horizontal
5350	55.45	-8.19	47.26	74	-26.74	Peak	Vertical
5350	43.52	-8.19	35.33	54	-18.67	AVG	Vertical
5350	54.11	-8.19	45.92	74	-28.08	Peak	Horizontal
5350	44.11	-8.19	35.92	54	-18.08	AVG	Horizontal



Band III(5.47-5.725 GHz)							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
802.11n BW20MHz							
5460	54.24	-8.27	45.97	74	-28.03	PK	Vertical
5460	43.51	-8.27	35.24	54	-18.76	AV	Vertical
5460	53.58	-8.27	45.31	74	-28.69	PK	Horizontal
5460	43.35	-8.27	35.08	54	-18.92	AV	Horizontal
7250	55.09	-6.33	48.76	74	-25.24	PK	Vertical
7250	44.34	-6.33	38.01	54	-15.99	AV	Vertical
7250	55.33	-6.33	49.00	74	-25.00	PK	Horizontal
7250	43.70	-6.33	37.37	54	-16.63	AV	Horizontal
802.11n BW40MHz							
5460	53.75	-8.27	45.48	74	-28.52	PK	Vertical
5460	43.48	-8.27	35.21	54	-18.79	AV	Vertical
5460	54.17	-8.27	45.90	74	-28.10	PK	Horizontal
5460	43.64	-8.27	35.37	54	-18.63	AV	Horizontal
7250	55.07	-6.33	48.74	74	-25.26	PK	Vertical
7250	44.51	-6.33	38.18	54	-15.82	AV	Vertical
7250	54.23	-6.33	47.90	74	-26.10	PK	Horizontal
7250	43.81	-6.33	37.48	54	-16.52	AV	Horizontal
802.11ac BW80MHz							
5460	54.37	-8.27	46.10	74	-27.90	PK	Vertical
5460	43.56	-8.27	35.29	54	-18.71	AV	Vertical
5460	53.96	-8.27	45.69	74	-28.31	PK	Horizontal
5460	43.49	-8.27	35.22	54	-18.78	AV	Horizontal
7250	54.57	-6.33	48.24	74	-25.76	PK	Vertical
7250	44.43	-6.33	38.10	54	-15.90	AV	Vertical
7250	54.10	-6.33	47.77	74	-26.23	PK	Horizontal
7250	43.65	-6.33	37.32	54	-16.68	AV	Horizontal



Band IV(5.725-5.85 GHz)							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
802.11n BW20MHz							
5460	53.04	-8.27	44.77	74	-29.23	PK	Vertical
5460	43.58	-8.27	35.31	54	-18.69	AV	Vertical
5460	53.64	-8.27	45.37	74	-28.63	PK	Horizontal
5460	43.27	-8.27	35.00	54	-19.00	AV	Horizontal
7250	54.24	-6.33	47.91	74	-26.09	PK	Vertical
7250	43.61	-6.33	37.28	54	-16.72	AV	Vertical
7250	54.01	-6.33	47.68	74	-26.32	PK	Horizontal
7250	43.59	-6.33	37.26	54	-16.74	AV	Horizontal
802.11n BW40MHz							
5460	53.99	-8.27	45.72	74	-28.28	PK	Vertical
5460	42.91	-8.27	34.64	54	-19.36	AV	Vertical
5460	53.81	-8.27	45.54	74	-28.46	PK	Horizontal
5460	43.84	-8.27	35.57	54	-18.43	AV	Horizontal
7250	54.52	-6.33	48.19	74	-25.81	PK	Vertical
7250	44.51	-6.33	38.18	54	-15.82	AV	Vertical
7250	54.64	-6.33	48.31	74	-25.69	PK	Horizontal
7250	44.71	-6.33	38.38	54	-15.62	AV	Horizontal
802.11ac BW80MHz							
5460	53.16	-8.27	44.89	74	-29.11	PK	Vertical
5460	43.47	-8.27	35.20	54	-18.80	AV	Vertical
5460	53.30	-8.27	45.03	74	-28.97	PK	Horizontal
5460	43.06	-8.27	34.79	54	-19.21	AV	Horizontal
7250	55.43	-6.33	49.10	74	-24.90	PK	Vertical
7250	44.93	-6.33	38.60	54	-15.40	AV	Vertical
7250	55.24	-6.33	48.91	74	-25.09	PK	Horizontal
7250	44.39	-6.33	38.06	54	-15.94	AV	Horizontal



4. POWER SPECTRAL DENSITY TEST

4.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.



4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

For the measurement records, refer to the appendix I.



5. BANDWIDTH MEASUREMENT

5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

The following procedure shall be used for measuring 26 bandwidth.

5.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

For the measurement records, refer to the appendix I.



5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth.

5.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

5.2.2 DEVIATION FROM STANDARD

No deviation.

5.2.3 TEST SETUP



5.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.5 TEST RESULTS

For the measurement records, refer to the appendix I.



5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth.

5.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.2 DEVIATION FROM STANDARD

No deviation.

5.3.3 TEST SETUP



5.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.3.5 TEST RESULTS

For the measurement records, refer to the appendix I.



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or $11 \text{ dBm} + 10 \log (26 \text{ dB emission bandwidth})$	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5825	


6.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

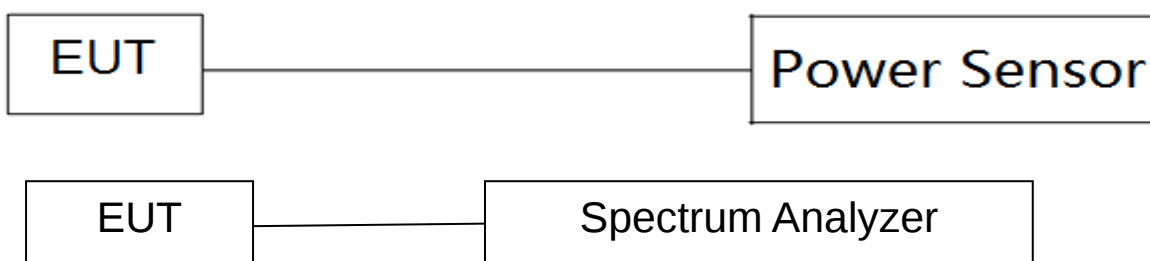

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

For the measurement records, refer to the appendix I.



7. AUTOMATICALLY DISCONTINUE TRANSMISSION

7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

Part 15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is Dipole Antenna. It comply with the standard requirement.



APPENDIX I - TEST RESULTS

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	1.396	1.453	96.08	0.17	0.72
NVNT	a	5200	Ant1	1.396	1.453	96.08	0.17	0.72
NVNT	a	5240	Ant1	1.396	1.453	96.08	0.17	0.72
NVNT	a	5260	Ant1	1.397	1.453	96.15	0.17	0.72
NVNT	a	5300	Ant1	1.396	1.453	96.08	0.17	0.72
NVNT	a	5320	Ant1	1.396	1.452	96.14	0.17	0.72
NVNT	a	5500	Ant1	1.396	1.452	96.14	0.17	0.72
NVNT	a	5580	Ant1	1.396	1.453	96.08	0.17	0.72
NVNT	a	5700	Ant1	1.396	1.453	96.08	0.17	0.72
NVNT	a	5745	Ant1	1.396	1.453	96.08	0.17	0.72
NVNT	a	5785	Ant1	1.396	1.453	96.08	0.17	0.72
NVNT	a	5825	Ant1	1.396	1.453	96.08	0.17	0.72
NVNT	a	5180	Ant2	1.396	1.453	96.08	0.17	0.72
NVNT	a	5200	Ant2	1.397	1.453	96.15	0.17	0.72
NVNT	a	5240	Ant2	1.396	1.453	96.08	0.17	0.72
NVNT	a	5260	Ant2	1.396	1.452	96.14	0.17	0.72
NVNT	a	5300	Ant2	1.396	1.452	96.14	0.17	0.72
NVNT	a	5320	Ant2	1.397	1.453	96.15	0.17	0.72
NVNT	a	5500	Ant2	1.396	1.452	96.14	0.17	0.72
NVNT	a	5580	Ant2	1.396	1.453	96.08	0.17	0.72
NVNT	a	5700	Ant2	1.396	1.453	96.08	0.17	0.72
NVNT	a	5745	Ant2	1.396	1.453	96.08	0.17	0.72
NVNT	a	5785	Ant2	1.397	1.453	96.15	0.17	0.72
NVNT	a	5825	Ant2	1.397	1.453	96.15	0.17	0.72
NVNT	a	5180	Ant3	1.396	1.453	96.08	0.17	0.72
NVNT	a	5200	Ant3	1.397	1.453	96.15	0.17	0.72
NVNT	a	5240	Ant3	1.396	1.453	96.08	0.17	0.72
NVNT	a	5260	Ant3	1.396	1.452	96.14	0.17	0.72
NVNT	a	5300	Ant3	1.397	1.453	96.15	0.17	0.72
NVNT	a	5320	Ant3	1.397	1.453	96.15	0.17	0.72
NVNT	a	5500	Ant3	1.397	1.453	96.15	0.17	0.72
NVNT	a	5580	Ant3	1.397	1.453	96.15	0.17	0.72
NVNT	a	5700	Ant3	1.397	1.453	96.15	0.17	0.72
NVNT	a	5745	Ant3	1.396	1.453	96.08	0.17	0.72
NVNT	a	5785	Ant3	1.397	1.453	96.15	0.17	0.72
NVNT	a	5825	Ant3	1.397	1.453	96.15	0.17	0.72
NVNT	n20	5180	Ant1	1.309	1.365	95.9	0.18	0.76
NVNT	n20	5200	Ant1	1.308	1.365	95.82	0.19	0.76
NVNT	n20	5240	Ant1	1.309	1.366	95.83	0.18	0.76
NVNT	n20	5260	Ant1	1.308	1.365	95.82	0.19	0.76
NVNT	n20	5300	Ant1	1.308	1.365	95.82	0.19	0.76
NVNT	n20	5320	Ant1	1.308	1.365	95.82	0.19	0.76
NVNT	n20	5500	Ant1	1.309	1.365	95.9	0.18	0.76
NVNT	n20	5580	Ant1	1.308	1.364	95.89	0.18	0.76
NVNT	n20	5700	Ant1	1.308	1.365	95.82	0.19	0.76
NVNT	n20	5745	Ant1	1.309	1.365	95.9	0.18	0.76
NVNT	n20	5785	Ant1	1.308	1.365	95.82	0.19	0.76
NVNT	n20	5825	Ant1	1.308	1.365	95.82	0.19	0.76
NVNT	n20	5180	Ant2	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5200	Ant2	1.304	1.361	95.81	0.19	0.77
NVNT	n20	5240	Ant2	1.304	1.361	95.81	0.19	0.77
NVNT	n20	5260	Ant2	1.304	1.36	95.88	0.18	0.77
NVNT	n20	5300	Ant2	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5320	Ant2	1.304	1.361	95.81	0.19	0.77
NVNT	n20	5500	Ant2	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5580	Ant2	1.304	1.36	95.88	0.18	0.77
NVNT	n20	5700	Ant2	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5745	Ant2	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5785	Ant2	1.304	1.361	95.81	0.19	0.77
NVNT	n20	5825	Ant2	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5180	Ant3	1.304	1.361	95.81	0.19	0.77
NVNT	n20	5200	Ant3	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5240	Ant3	1.305	1.362	95.81	0.19	0.77
NVNT	n20	5260	Ant3	1.304	1.361	95.81	0.19	0.77
NVNT	n20	5300	Ant3	1.304	1.361	95.81	0.19	0.77
NVNT	n20	5320	Ant3	1.304	1.36	95.88	0.18	0.77
NVNT	n20	5500	Ant3	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5580	Ant3	1.304	1.36	95.88	0.18	0.77
NVNT	n20	5700	Ant3	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5745	Ant3	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5785	Ant3	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5825	Ant3	1.305	1.361	95.89	0.18	0.77
NVNT	n20	5180	MIMO	2.56	2.617	97.82	0.1	0.39
NVNT	n20	5200	MIMO	2.56	2.617	97.82	0.1	0.39
NVNT	n20	5240	MIMO	2.56	2.617	97.82	0.1	0.39
NVNT	n20	5260	MIMO	2.56	2.617	97.82	0.1	0.39
NVNT	n20	5300	MIMO	2.56	2.617	97.82	0.1	0.39
NVNT	n20	5320	MIMO	2.56	2.617	97.82	0.1	0.39
NVNT	n20	5500	MIMO	2.561	2.617	97.86	0.09	0.39
NVNT	n20	5580	MIMO	2.56	2.617	97.82	0.1	0.39
NVNT	n20	5700	MIMO	2.56	2.617	97.82	0.1	0.39
NVNT	n20	5745	MIMO	2.56	2.617	97.82	0.1	0.39
NVNT	n20	5785	MIMO	2.56	2.617	97.82	0.1	0.39
NVNT	n20	5825	MIMO	2.56	2.617	97.82	0.1	0.39
NVNT	n40	5190	Ant1	0.648	0.704	92.05	0.36	1.54
NVNT	n40	5230	Ant1	0.649	0.705	92.06	0.36	1.54



NVNT	n40	5270	Ant1	0.648	0.704	92.05	0.36	1.54
NVNT	n40	5310	Ant1	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5510	Ant1	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5550	Ant1	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5670	Ant1	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5755	Ant1	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5795	Ant1	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5190	Ant2	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5230	Ant2	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5270	Ant2	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5310	Ant2	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5510	Ant2	0.649	0.705	92.06	0.36	1.54
NVNT	n40	5550	Ant2	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5670	Ant2	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5755	Ant2	0.649	0.705	92.06	0.36	1.54
NVNT	n40	5795	Ant2	0.649	0.705	92.06	0.36	1.54
NVNT	n40	5190	Ant3	0.649	0.705	92.06	0.36	1.54
NVNT	n40	5230	Ant3	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5270	Ant3	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5310	Ant3	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5510	Ant3	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5550	Ant3	0.649	0.705	92.06	0.36	1.54
NVNT	n40	5670	Ant3	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5755	Ant3	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5795	Ant3	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5190	MIMO	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5230	MIMO	0.649	0.705	92.06	0.36	1.54
NVNT	n40	5270	MIMO	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5310	MIMO	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5510	MIMO	0.648	0.704	92.05	0.36	1.54
NVNT	n40	5550	MIMO	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5670	MIMO	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5755	MIMO	0.648	0.705	91.91	0.37	1.54
NVNT	n40	5795	MIMO	0.648	0.704	92.05	0.36	1.54
NVNT	ac20	5180	Ant1	0.48	0.536	89.55	0.48	2.08
NVNT	ac20	5200	Ant1	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5240	Ant1	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5260	Ant1	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5300	Ant1	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5320	Ant1	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5500	Ant1	0.48	0.536	89.55	0.48	2.08
NVNT	ac20	5580	Ant1	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5700	Ant1	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5745	Ant1	0.48	0.536	89.55	0.48	2.08
NVNT	ac20	5785	Ant1	0.48	0.536	89.55	0.48	2.08
NVNT	ac20	5825	Ant1	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5180	Ant2	0.48	0.536	89.55	0.48	2.08
NVNT	ac20	5200	Ant2	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5240	Ant2	0.481	0.538	89.41	0.49	2.08
NVNT	ac20	5260	Ant2	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5300	Ant2	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5320	Ant2	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5500	Ant2	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5580	Ant2	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5700	Ant2	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5745	Ant2	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5785	Ant2	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5825	Ant2	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5180	Ant3	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5200	Ant3	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5240	Ant3	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5260	Ant3	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5300	Ant3	0.48	0.536	89.55	0.48	2.08
NVNT	ac20	5320	Ant3	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5500	Ant3	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5580	Ant3	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5700	Ant3	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5745	Ant3	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5785	Ant3	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5825	Ant3	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5180	MIMO	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5200	MIMO	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5240	MIMO	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5260	MIMO	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5300	MIMO	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5320	MIMO	0.48	0.536	89.55	0.48	2.08
NVNT	ac20	5500	MIMO	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5580	MIMO	0.481	0.537	89.57	0.48	2.08
NVNT	ac20	5700	MIMO	0.48	0.536	89.55	0.48	2.08
NVNT	ac20	5745	MIMO	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5785	MIMO	0.48	0.537	89.39	0.49	2.08
NVNT	ac20	5825	MIMO	0.48	0.537	89.39	0.49	2.08
NVNT	ac40	5190	Ant1	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5230	Ant1	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5270	Ant1	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5310	Ant1	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5510	Ant1	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5550	Ant1	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5670	Ant1	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5755	Ant1	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5795	Ant1	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5190	Ant2	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5230	Ant2	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5270	Ant2	0.26	0.317	82.02	0.86	3.85



NVNT	ac40	5310	Ant2	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5510	Ant2	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5550	Ant2	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5670	Ant2	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5755	Ant2	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5795	Ant2	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5190	Ant3	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5230	Ant3	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5270	Ant3	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5310	Ant3	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5510	Ant3	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5550	Ant3	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5670	Ant3	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5755	Ant3	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5795	Ant3	0.261	0.317	82.33	0.84	3.83
NVNT	ac40	5190	MIMO	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5230	MIMO	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5270	MIMO	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5310	MIMO	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5510	MIMO	0.26	0.316	82.28	0.85	3.85
NVNT	ac40	5550	MIMO	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5670	MIMO	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5755	MIMO	0.26	0.317	82.02	0.86	3.85
NVNT	ac40	5795	MIMO	0.26	0.317	82.02	0.86	3.85
NVNT	ac80	5210	Ant1	0.148	0.204	72.55	1.39	6.76
NVNT	ac80	5290	Ant1	0.149	0.205	72.68	1.39	6.71
NVNT	ac80	5530	Ant1	0.149	0.205	72.68	1.39	6.71
NVNT	ac80	5610	Ant1	0.149	0.205	72.68	1.39	6.71
NVNT	ac80	5775	Ant1	0.148	0.204	72.55	1.39	6.76
NVNT	ac80	5210	Ant2	0.149	0.205	72.68	1.39	6.71
NVNT	ac80	5290	Ant2	0.149	0.205	72.68	1.39	6.71
NVNT	ac80	5530	Ant2	0.148	0.204	72.55	1.39	6.76
NVNT	ac80	5610	Ant2	0.149	0.205	72.68	1.39	6.71
NVNT	ac80	5775	Ant2	0.148	0.204	72.55	1.39	6.76
NVNT	ac80	5210	Ant3	0.149	0.205	72.68	1.39	6.71
NVNT	ac80	5290	Ant3	0.148	0.204	72.55	1.39	6.76
NVNT	ac80	5530	Ant3	0.149	0.205	72.68	1.39	6.71
NVNT	ac80	5610	Ant3	0.149	0.205	72.68	1.39	6.71
NVNT	ac80	5775	Ant3	0.148	0.204	72.55	1.39	6.76
NVNT	ac80	5210	MIMO	0.148	0.204	72.55	1.39	6.76
NVNT	ac80	5290	MIMO	0.149	0.205	72.68	1.39	6.71
NVNT	ac80	5530	MIMO	0.149	0.205	72.68	1.39	6.71
NVNT	ac80	5610	MIMO	0.148	0.204	72.55	1.39	6.76
NVNT	ac80	5775	MIMO	0.149	0.205	72.68	1.39	6.71
NVNT	ac160	5250	Ant1	0.1	0.151	66.23	1.79	9.95
NVNT	ac160	5570	Ant1	0.1	0.151	66.23	1.79	10
NVNT	ac160	5250	Ant2	0.1	0.15	66.67	1.76	10
NVNT	ac160	5570	Ant2	0.101	0.151	66.89	1.75	9.95
NVNT	ac160	5250	Ant3	0.1	0.15	66.67	1.76	10
NVNT	ac160	5570	Ant3	0.101	0.151	66.89	1.75	9.95
NVNT	ac160	5250	MIMO	0.1	0.15	66.67	1.76	9.95
NVNT	ac160	5570	MIMO	0.101	0.151	66.89	1.75	10
NVNT	ax20	5180	Ant1	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5200	Ant1	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5240	Ant1	0.43	0.486	88.48	0.53	2.33
NVNT	ax20	5260	Ant1	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5300	Ant1	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5320	Ant1	0.43	0.486	88.48	0.53	2.33
NVNT	ax20	5500	Ant1	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5580	Ant1	0.43	0.486	88.48	0.53	2.33
NVNT	ax20	5700	Ant1	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5745	Ant1	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5785	Ant1	0.43	0.486	88.48	0.53	2.33
NVNT	ax20	5825	Ant1	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5180	Ant2	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5200	Ant2	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5240	Ant2	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5260	Ant2	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5300	Ant2	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5320	Ant2	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5500	Ant2	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5580	Ant2	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5700	Ant2	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5745	Ant2	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5785	Ant2	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5825	Ant2	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5180	Ant3	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5200	Ant3	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5240	Ant3	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5260	Ant3	0.43	0.486	88.48	0.53	2.33
NVNT	ax20	5300	Ant3	0.43	0.486	88.48	0.53	2.33
NVNT	ax20	5320	Ant3	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5500	Ant3	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5580	Ant3	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5700	Ant3	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5745	Ant3	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5785	Ant3	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5825	Ant3	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5180	MIMO	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5200	MIMO	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5240	MIMO	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5260	MIMO	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5300	MIMO	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5320	MIMO	0.429	0.485	88.45	0.53	2.33



NVNT	ax20	5500	MIMO	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5580	MIMO	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5700	MIMO	0.43	0.486	88.48	0.53	2.33
NVNT	ax20	5745	MIMO	0.429	0.485	88.45	0.53	2.33
NVNT	ax20	5785	MIMO	0.429	0.486	88.27	0.54	2.33
NVNT	ax20	5825	MIMO	0.429	0.486	88.27	0.54	2.33
NVNT	ax40	5190	Ant1	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5230	Ant1	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5270	Ant1	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5310	Ant1	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5510	Ant1	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5550	Ant1	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5670	Ant1	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5755	Ant1	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5795	Ant1	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5190	Ant2	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5230	Ant2	0.425	0.481	88.36	0.54	2.35
NVNT	ax40	5270	Ant2	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5310	Ant2	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5510	Ant2	0.425	0.481	88.36	0.54	2.35
NVNT	ax40	5550	Ant2	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5670	Ant2	0.425	0.481	88.36	0.54	2.35
NVNT	ax40	5755	Ant2	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5795	Ant2	0.426	0.482	88.38	0.54	2.35
NVNT	ax40	5190	Ant3	0.425	0.481	88.36	0.54	2.35
NVNT	ax40	5230	Ant3	0.426	0.482	88.38	0.54	2.35
NVNT	ax40	5270	Ant3	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5310	Ant3	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5510	Ant3	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5550	Ant3	0.426	0.482	88.38	0.54	2.35
NVNT	ax40	5670	Ant3	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5755	Ant3	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5795	Ant3	0.426	0.482	88.38	0.54	2.35
NVNT	ax40	5190	MIMO	0.425	0.481	88.36	0.54	2.35
NVNT	ax40	5230	MIMO	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5270	MIMO	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5310	MIMO	0.426	0.482	88.38	0.54	2.35
NVNT	ax40	5510	MIMO	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5550	MIMO	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5670	MIMO	0.425	0.482	88.17	0.55	2.35
NVNT	ax40	5755	MIMO	0.425	0.481	88.36	0.54	2.35
NVNT	ax40	5795	MIMO	0.425	0.482	88.17	0.55	2.35
NVNT	ax80	5210	Ant1	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5290	Ant1	0.412	0.469	87.85	0.56	2.43
NVNT	ax80	5530	Ant1	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5610	Ant1	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5775	Ant1	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5210	Ant2	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5290	Ant2	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5530	Ant2	0.412	0.469	87.85	0.56	2.43
NVNT	ax80	5610	Ant2	0.412	0.469	87.85	0.56	2.43
NVNT	ax80	5775	Ant2	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5210	Ant3	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5290	Ant3	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5530	Ant3	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5610	Ant3	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5775	Ant3	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5210	MIMO	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5290	MIMO	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5530	MIMO	0.411	0.468	87.82	0.56	2.43
NVNT	ax80	5610	MIMO	0.412	0.468	88.03	0.55	2.43
NVNT	ax80	5775	MIMO	0.411	0.468	87.82	0.56	2.43
NVNT	ax160	5250	Ant1	0.411	0.462	88.96	0.51	2.43
NVNT	ax160	5570	Ant1	0.411	0.462	88.96	0.51	2.43
NVNT	ax160	5250	Ant2	0.412	0.462	89.18	0.5	2.43
NVNT	ax160	5570	Ant2	0.412	0.462	89.18	0.5	2.43
NVNT	ax160	5250	Ant3	0.411	0.462	88.96	0.51	2.43
NVNT	ax160	5570	Ant3	0.411	0.462	88.96	0.51	2.43
NVNT	ax160	5250	MIMO	0.412	0.462	89.18	0.5	2.43
NVNT	ax160	5570	MIMO	0.411	0.462	88.96	0.51	2.43









