



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

FCC PART 15 SUBPART C TEST REPORT

FCC Part 15.225

Report Reference No......: **CTL1501090071-WF**

Compiled by

(position+printed name+signature)..
File administrators Jacky Chen

Jacky Chen

Name of the organization performing
the tests
Test Engineer Happy Guo

Happy Guo

(position+printed name+signature)..
Approved by

(position+printed name+signature)..
Manager Tracy Qi

Tracy Qi

Date of issue.....: Jan. 29, 2015

Test Firm.....: **Shenzhen CTL Testing Technology Co., Ltd.**

Address.....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Applicant's name.....: **Shenzhen Seeworld Intelligent Technology Co., Ltd.**

Address.....: Room205, Jinlong Industrial Building, No.14 Yuehua Road,
Futian District, Shenzhen, PR.China

Test specification:

Standard: FCC Part 15.225: Operation within the band 13.110–14.010 MHz.

Master TRF: Dated 2011-01

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: **RF Series contactless IC card reader**

FCC ID.....: **2AD5RSRW-ABXX-B3**

Trade Mark:

Model/Type reference.....: SRW-AB/XX-B3

Transmit Frequency.....: 13.56MHz

Number of channels: 1

Modulation Type: ASK

Antenna type: Loop antenna

Result.....: **Positive**

TEST REPORT

Test Report No. :	CTL1501090071-WF	Jan. 29, 2015 Date of issue
-------------------	------------------	--------------------------------

Equipment under Test : RF Series contactless IC card reader

Model /Type : SRW-AB/XX-B3

Applicant : **Shenzhen Seeworld Intelligent Technology Co., Ltd.**

Address : Room205, Jinlong Industrial Building, No.14 Yuehua Road, Futian District, Shenzhen, PR.China

Manufacturer : **Shenzhen Seeworld Intelligent Technology Co., Ltd.**

Address : Room205, Jinlong Industrial Building, No.14 Yuehua Road, Futian District, Shenzhen, PR.China

Test Result according to the standards on page 4:	Positive
--	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	4
<u>2.</u>	<u>SUMMARY</u>	5
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	EUT configuration	5
2.6.	Related Submittal(s) / Grant (s)	5
2.7.	Modifications	5
2.8.	NOTE	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	7
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Statement of the measurement uncertainty	7
3.5.	Test Description	8
3.6.	Equipments Used during the Test	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	8
4.1.	AC Power Conducted Emission	9
4.2.	Radiated Emission	12
4.3.	Frequency Tolerance	17
4.4.	20dB Bandwidth	18
4.5.	ANTENNA REQUIREMENT	19
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	20
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	21

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.225: Operation within the band of 13.110–14.010 MHz.

ANSI C63.4-2009

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.



2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Jan. 10, 2015
Testing commenced on	:	Jan. 10, 2015
Testing concluded on	:	Jan. 29, 2015

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 5V from USB

2.3. Short description of the Equipment under Test (EUT)

A RF Series contactless IC card reader work frequency at 13.56MHz.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting mode for testing.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- supplied by the lab
- Notebook PC Manufacturer : DELL
Model No. : PP18L
FCC DOC approved

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AD5RSRW-ABXX-B3 filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.

2.8. NOTE

1. The EUT is a/an RFID Reader, The functions of the EUT listed as below:

	Test Standards	Reference Report
Radio	FCC Part 15 Subpart C (Section15.225)	CTL1501090071-WF

2. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	13.110–14.010 MHz
	✓

3. The EUT provides one completed transmitter.

Modulation Mode	TX Function
ASK	1TX



3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.
Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Test Description

FCC PART 15 Subpart C		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.225(a)(b)(c)(d)	Radiated Emission (9kHz ~ 30MHz)	PASS
FCC Part 15.225(d),15.209	Radiated Emission (30MHz ~ 1GHz)	PASS
FCC §15.225(e)	Frequency stability	PASS
FCC Part 2.1049	20dB Bandwidth	PASS

Remark: The measurement uncertainty is not included in the test result.


3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2014/07/12	2015/07/11
EMI Test Receiver	R&S	ESCI	103710	2014/07/10	2015/07/09
Spectrum Analyzer	Agilent	E4407B	MY45108355	2014/07/06	2015/07/05
Controller	EM Electronics	Controller EM 1000	N/A	2014/07/06	2015/07/05
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2014/07/12	2015/07/11
Horn Antenna	SCHWARZBECK	BBHA9170	1562	2014/07/12	2015/07/11
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2014/07/12	2015/07/11
LISN	R&S	ENV216	101316	2014/07/10	2015/07/09
LISN	SCHWARZBECK	NSLK8127	8127687	2014/07/10	2015/07/09
Microwave Preamplifier	HP	8349B	3155A00882	2014/07/10	2015/07/09
Amplifier	HP	8447D	3113A07663	2014/07/10	2015/07/09
Transient Limiter	Com-Power	LIT-153	532226	2014/07/10	2015/07/09
Radio Communication Tester	R&S	CMU200	3655A03522	2014/07/06	2015/07/05
Temperature/Humidity Meter	zhicheng	ZC1-2	22522	2014/07/10	2015/07/09
SIGNAL GENERATOR	HP	8647A	3200A00852	2014/07/10	2015/07/09
Wideband Peak Power Meter	Anritsu	ML2495A	220.23.35	2014/07/06	2015/07/05
Climate Chamber	ESPEC	EL-10KA	A20120523	2014/07/06	2015/07/05
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	/	2014/07/06	2015/07/05
High-Pass Filter	K&L	41H10-1375/U12750-O/O	/	2014/07/06	2015/07/05

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

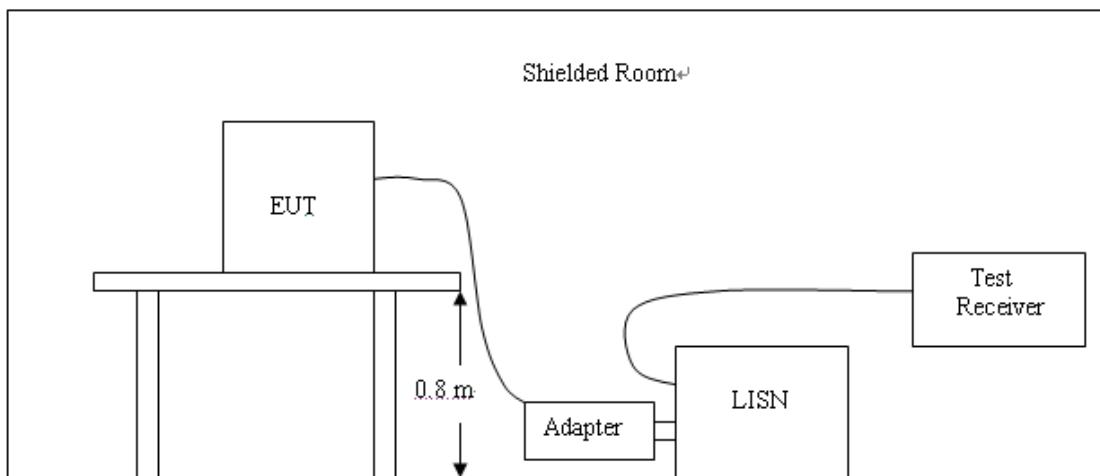

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2009
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2009
- 4 The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

AC Power Conducted Emission Limit


For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

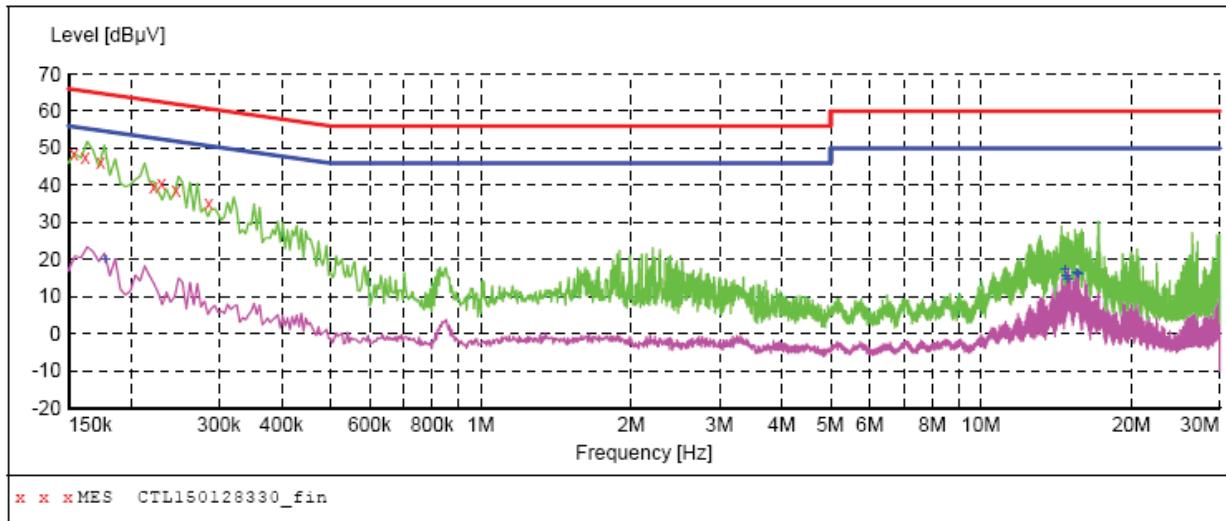
**MEASUREMENT RESULT: "CTL150128330_fin"**

1/28/2015 10:08AM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.154000	48.40	10.2	66	17.4	QP	N	GND
	0.162000	47.40	10.2	65	18.0	QP	N	GND
	0.174000	46.10	10.2	65	18.7	QP	N	GND
	0.222000	39.50	10.2	63	23.2	QP	N	GND
	0.230000	40.40	10.2	62	22.0	QP	N	GND
	0.246000	38.60	10.2	62	23.3	QP	N	GND

MEASUREMENT RESULT: "CTL150128330_fin2"

1/28/2015 10:08AM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.178000	20.00	10.2	55	34.6	AV	N	GND
	14.738000	17.30	10.7	50	32.7	AV	N	GND
	14.798000	15.60	10.7	50	34.4	AV	N	GND
	14.918000	14.50	10.7	50	35.5	AV	N	GND
	15.524000	16.50	10.7	50	33.5	AV	N	GND
	15.584000	16.30	10.7	50	33.7	AV	N	GND

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

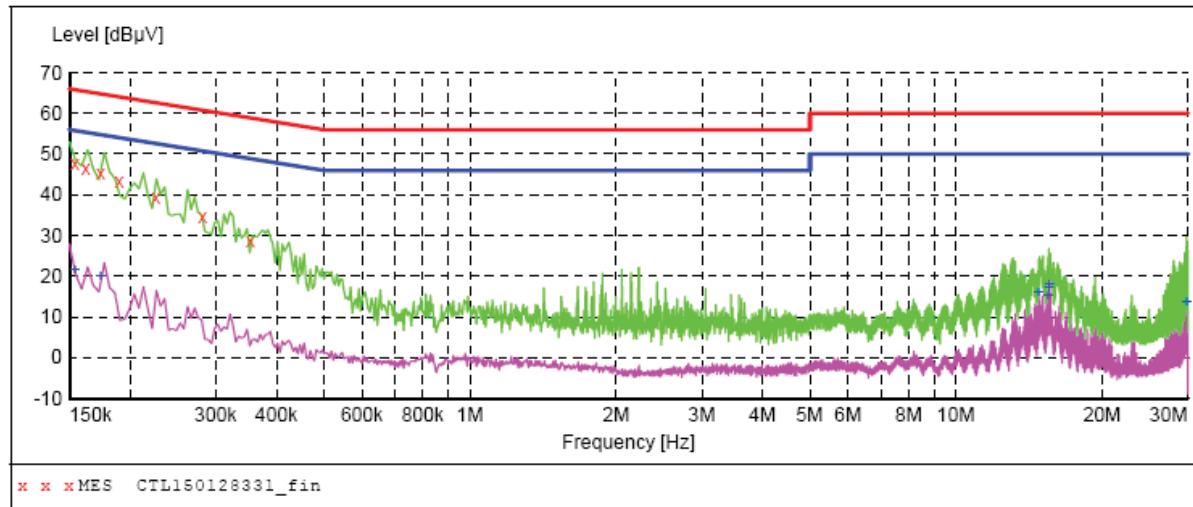

MEASUREMENT RESULT: "CTL150128331_fin"

1/28/2015 10:12AM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.154000	47.70	10.2	66	18.1	QP	L1	GND
	0.162000	46.60	10.2	65	18.8	QP	L1	GND
	0.174000	45.50	10.2	65	19.3	QP	L1	GND
	0.190000	43.20	10.2	64	20.8	QP	L1	GND
	0.226000	39.40	10.2	63	23.2	QP	L1	GND
	0.282000	34.70	10.2	61	26.1	QP	L1	GND


MEASUREMENT RESULT: "CTL150128331_fin2"

1/28/2015 10:12AM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.154000	21.60	10.2	56	34.2	AV	L1	GND
	0.174000	19.90	10.2	55	34.9	AV	L1	GND
	14.798000	16.20	10.7	50	33.8	AV	L1	GND
	15.464000	15.30	10.7	50	34.7	AV	L1	GND
	15.524000	17.10	10.7	50	32.9	AV	L1	GND
	15.584000	17.90	10.7	50	32.1	AV	L1	GND


4.2. Radiated Emission

TEST CONFIGURATION


Radiated Emission Test Set-Up
Frequency range 9KHz – 30MHz

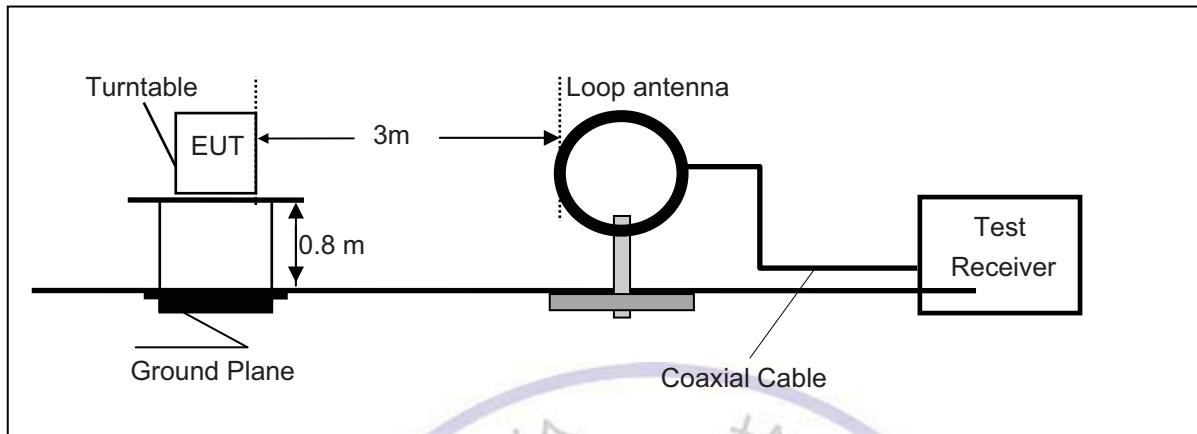

Frequency range 30MHz – 1000MHz

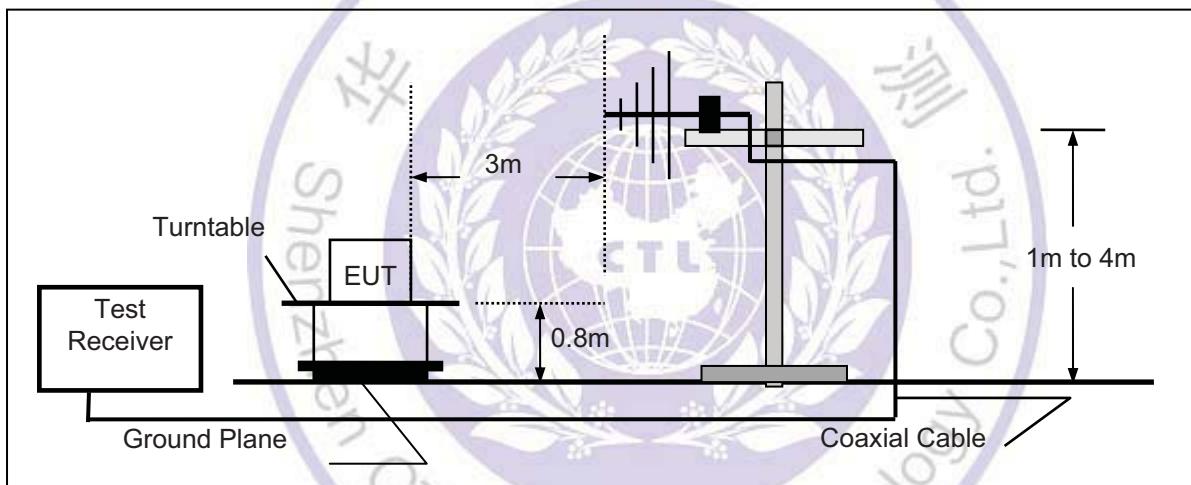

Frequency range above 1GHz-25GHz

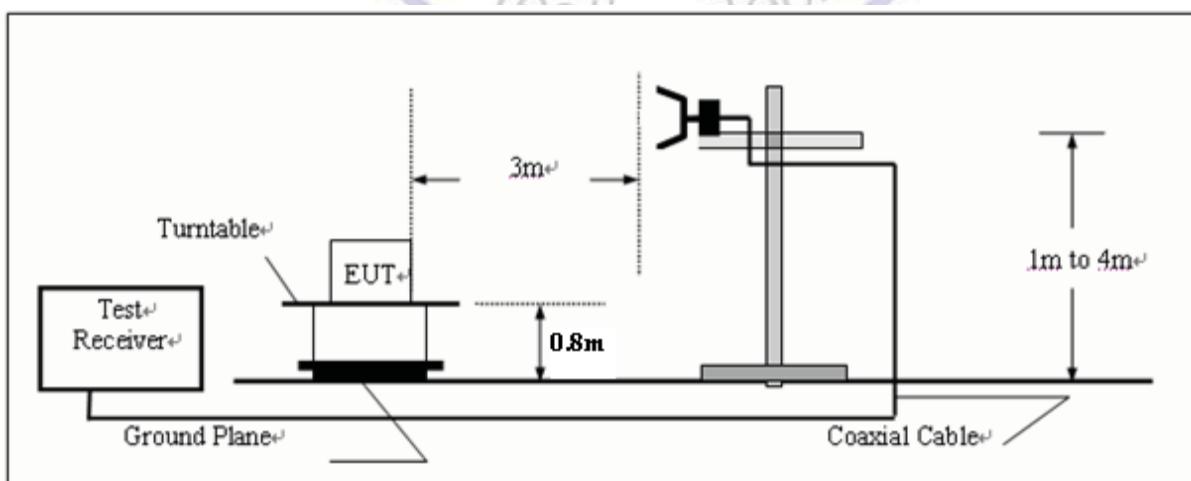

TEST PROCEDURE

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- 3 And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4 Repeat above procedures until all frequency measurements have been completed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$Transd = AF + CL - AG$$

RADIATION LIMIT

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength @30m (uV/m)	Field strength @30m (dB μ V/m)	Field strength @3m (dB μ V/m)
Below 13.110	30	29.5	69.5
13.110 ~13.410	106	40.5	80.5
13.410~13.553	334	50.5	90.5
13.553~13.567	15,848	84	124
13.567~13.710	334	50.5	90.5
13.710~14.010	106	40.5	80.5
Above 14.010	30	29.5	69.5

Note:

- (1) The tighter limit shall apply at the edge between two frequency bands.
- (2) dB μ V/m = 20*log(uV/m)
- (3) Distance factor = 40dB / decade(15.31(f))

FCC Part15, Subpart C Section 15.209 limit of radiated emission for frequency below1000MHz. The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

TEST RESULTS

WORST-CASE RADIATED EMISSION BELOW 30 MHz


Frequency (MHz)	Meter Reading (dB μ V)	Polar	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Levels (dB μ V/m)	Limits at 3m (dB μ V/m)	Margin (dB)	Detector Mode
13.560	79.26	Loop	25.36	0.34	104.96	124.00	19.04	QP
13.550	50.14	Loop	25.36	0.35	75.85	90.5	14.65	QP
13.569	51.57	Loop	25.36	0.34	77.27	90.5	13.23	QP
24.653	21.42	Loop	22.71	0.59	44.72	69.5	24.78	QP
27.120	25.06	Loop	22.34	0.62	48.02	69.5	21.48	QP
27.120	19.71	Loop	22.34	0.62	42.67	69.5	26.83	QP

Remark: 1. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
 2. The test limit distance is 3m limit.
 3. PK means Peak Value, QP means Quasi Peak Value, AV means Average Value.

Radiated Emission Test Data 30-1000MHz:

SWEEP TABLE: "test (30M-1G)"

Short Description:			Field Strength		
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

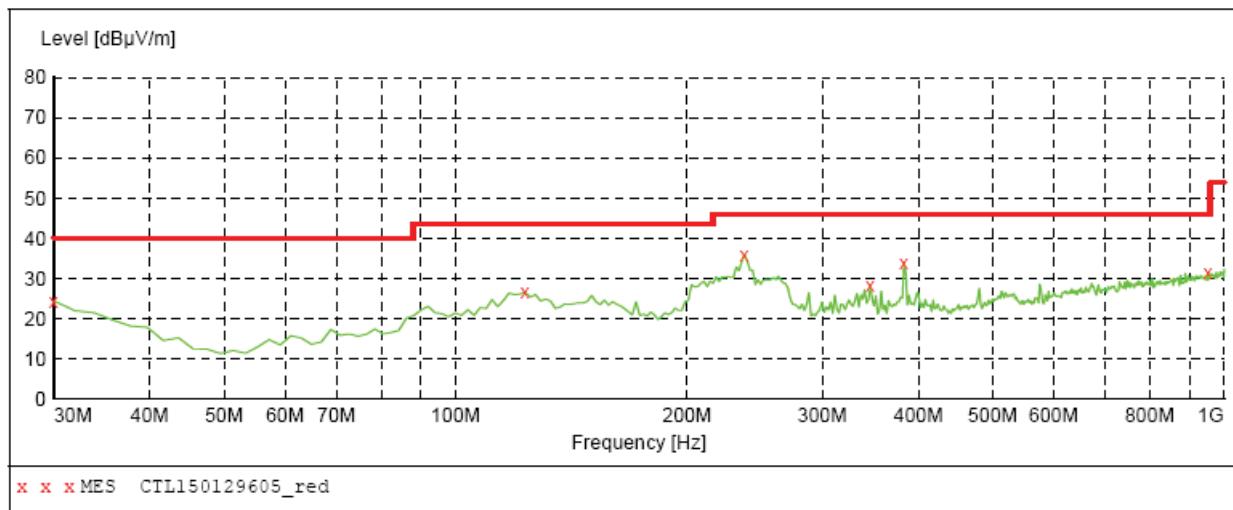


MEASUREMENT RESULT: "CTL150129605_red"

1/29/2015 3:59PM									
Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization	
MHz	dB μ V/m	dB	dB μ V/m	dB		cm	deg		
30.000000	24.40	21.1	40.0	15.6	---	0.0	0.00	HORIZONTAL	
123.120000	26.50	15.1	43.5	17.0	---	0.0	0.00	HORIZONTAL	
237.580000	35.90	14.1	46.0	10.1	---	0.0	0.00	HORIZONTAL	
346.220000	28.10	16.8	46.0	17.9	---	0.0	0.00	HORIZONTAL	
383.080000	33.70	17.8	46.0	12.3	---	0.0	0.00	HORIZONTAL	
953.440000	31.60	26.7	46.0	14.4	---	0.0	0.00	HORIZONTAL	



SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

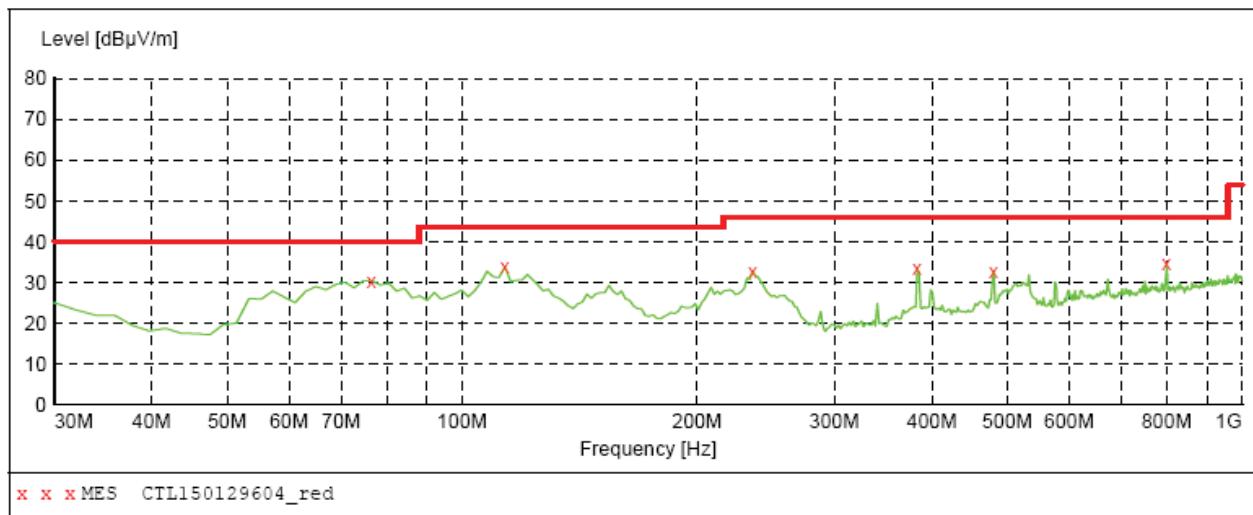***MEASUREMENT RESULT: "CTL150129604_red"***


1/29/2015 3:57PM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. ---	Height cm	Azimuth deg	Polarization
76.560000	30.40	8.6	40.0	9.6	---	0.0	0.00	VERTICAL
113.420000	33.70	14.5	43.5	9.8	---	0.0	0.00	VERTICAL
235.640000	32.80	14.1	46.0	13.2	---	0.0	0.00	VERTICAL
383.080000	33.30	17.8	46.0	12.7	---	0.0	0.00	VERTICAL
480.080000	32.80	20.1	46.0	13.2	---	0.0	0.00	VERTICAL
800.180000	34.50	24.8	46.0	11.5	---	0.0	0.00	VERTICAL



4.3. Frequency Tolerance

TEST CONFIGURATION

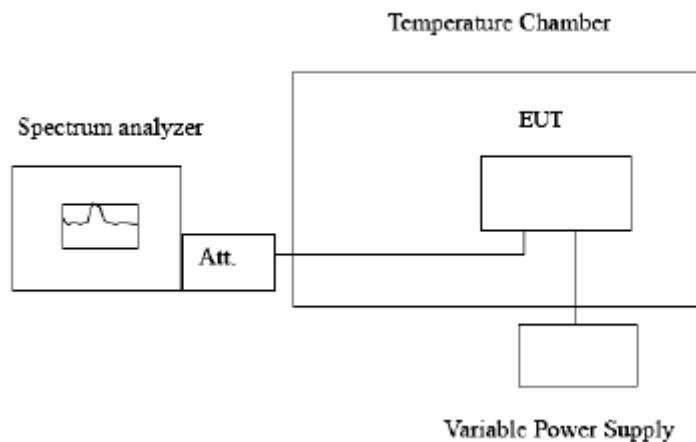

TEST PROCEDURE

The frequency stability of the transmitter is measured by: (a) Temperature: The temperature is varied from -20 to +50°C using an environmental chamber. (b) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally input to the device or at the power supply terminals if cables are not normally supplied.

LIMIT

The frequency tolerance of the carrier shall be maintained within $\pm 0.01\%$ of the operating frequency.

TEST RESULTS

limit : $\pm 1356\text{Hz}$ (0.001356MHz) ; So limit is $<13.561356\text{MHz}$ and $>13.558644\text{MHz}$

Voltage (%)	Power (VDC)	Temperature (°C)	Frequency (MHz)
100	5.0	+20°C (Ref)	13.560012
100	5.0	-20	13.560230
100	5.0	-10	13.560164
100	5.0	0	13.560213
100	5.0	10	13.560228
100	5.0	25	13.560056
100	5.0	30	13.560041
100	5.0	40	13.560073
100	5.0	50	13.560089
85	4.25	20	13.560498
115	5.75	20	13.560513

result : Pass

4.4. 20dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1KHz RBW and 3KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


LIMIT

The 20dB bandwidth shall be specified in operating frequency band.

TEST RESULTS

20dB BW : 2.6kHz

20dBc point (low)	20dBc point (High)	Operating frequency band (MHz)	PASS/FAIL
13.5588MHz	13.5614MHz	13.553~13.567	PASS

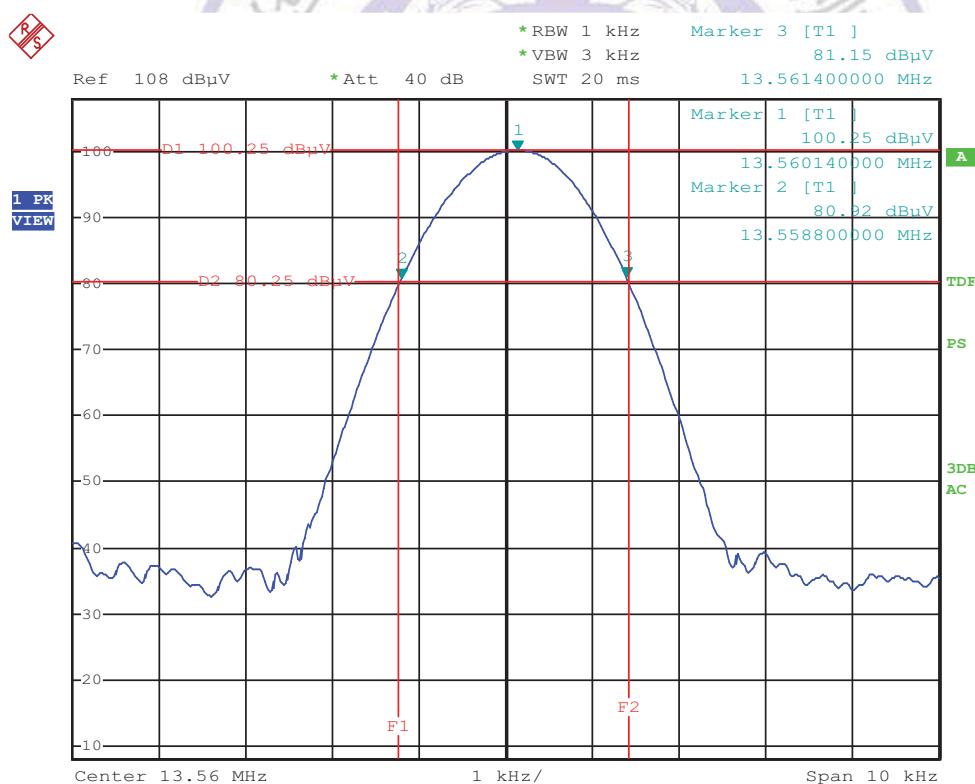

4.5. ANTENNA REQUIREMENT

STANDARD APPLICABLE


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

ANTENNA CONNECTED CONSTRUCTION

The antenna is a loop antenna and connector is designed with permanent attachment no consideration of replacement. The antenna used in this product is complied with Standard. The maximum Gain of the antenna lower than 6.0dBi and has the definite antenna Specification.



5. Test Setup Photos of the EUT

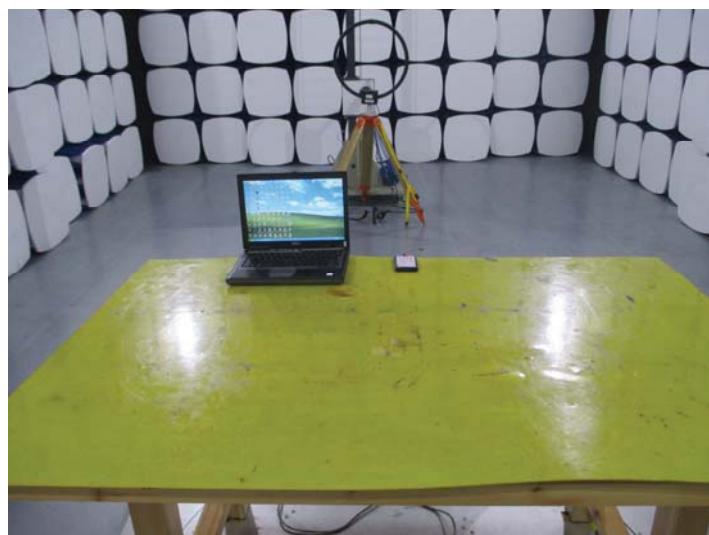




6. External and Internal Photos of the EUT


External Photos of EUT





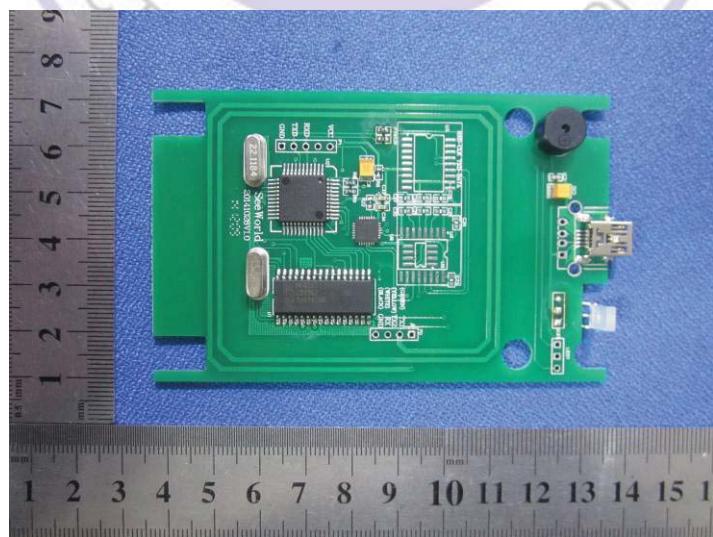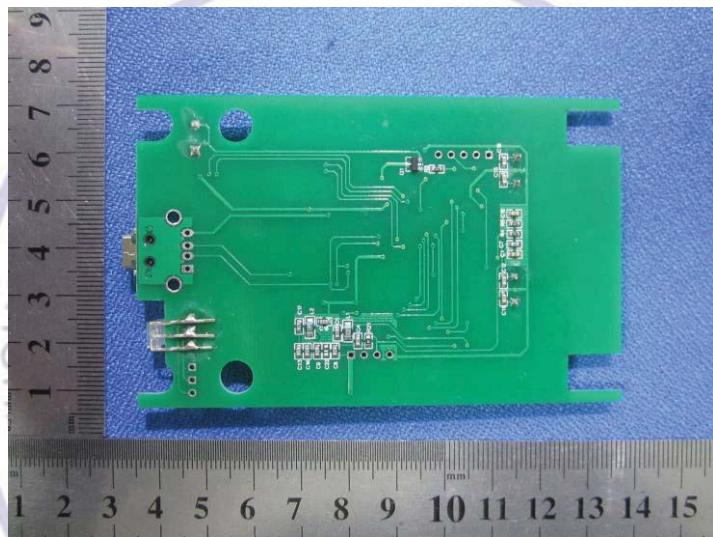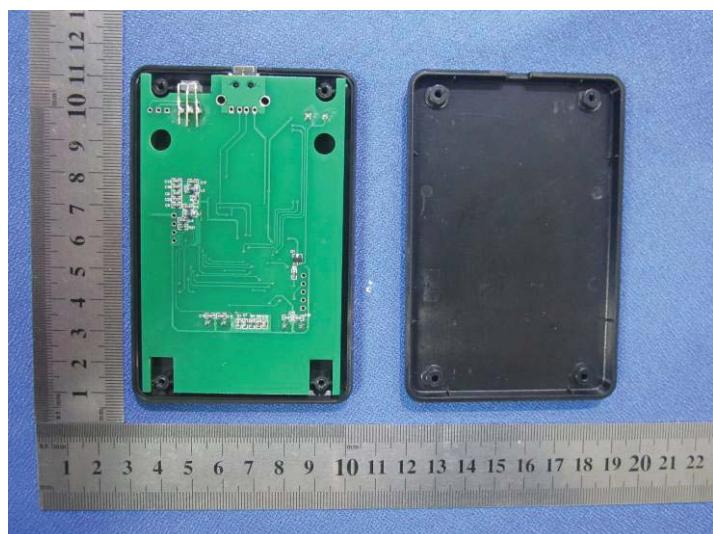

Internal Photos of EUT

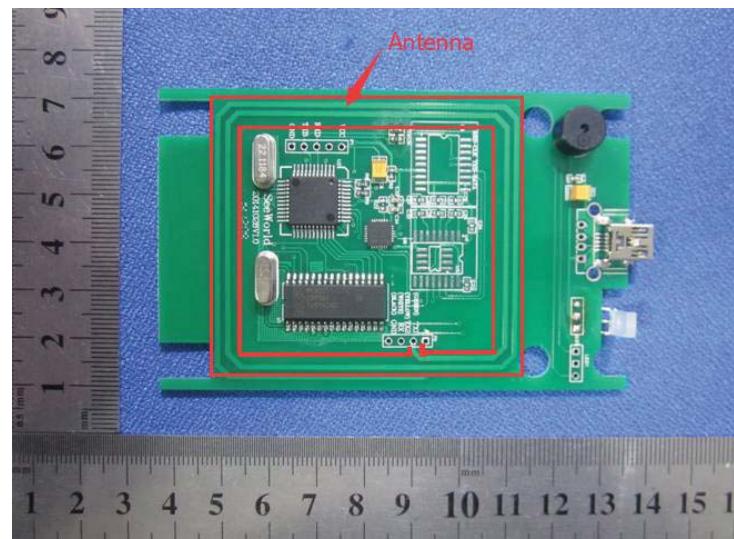

..End of Report.