# Appendix 1

# Test Results

# 6 dB Bandwidth Measurement

Tx frequency: 2402MHz

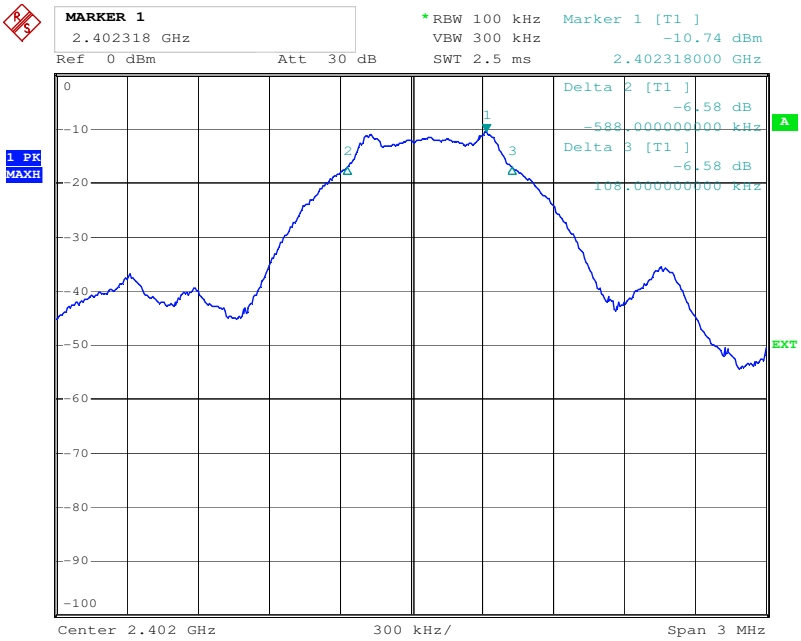


Tx frequency: 2440MHz

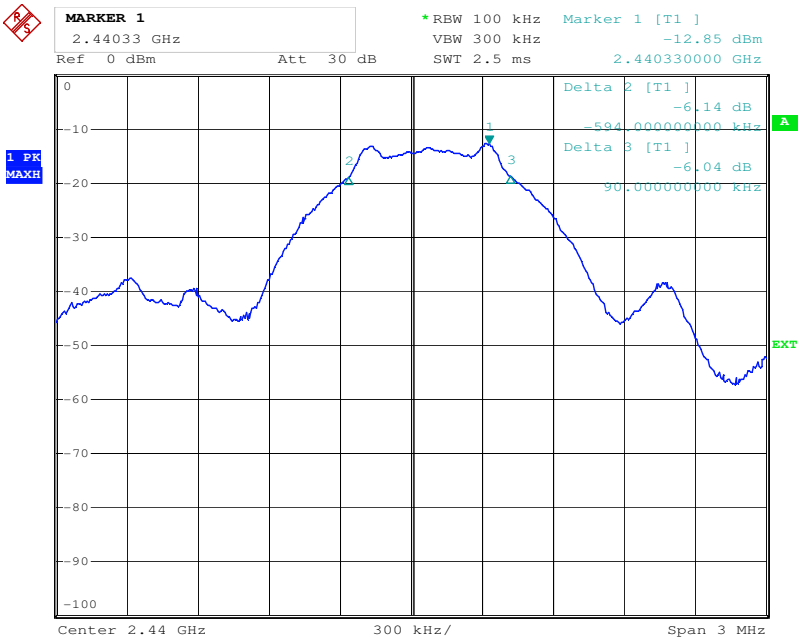

Tx frequency: 2480MHz

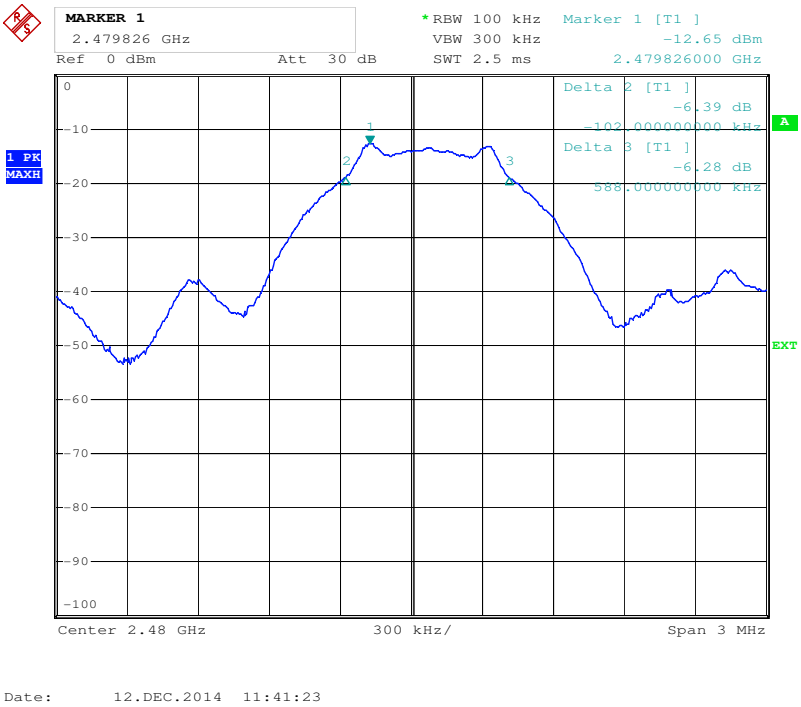

# Peak Output Power

## BLE Mode

Tx frequency: 2402MHz

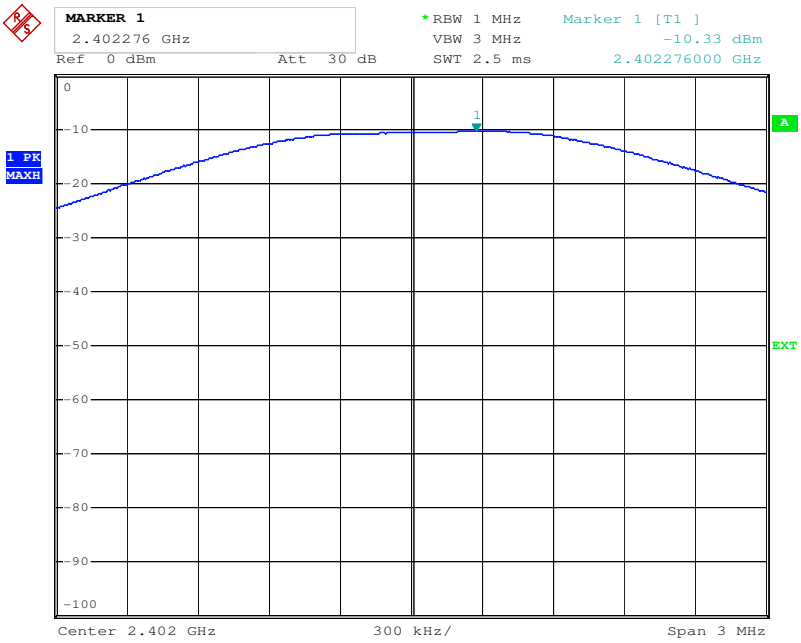


Date: 12.DEC.2014 11:43:54

Tx frequency: 2440MHz

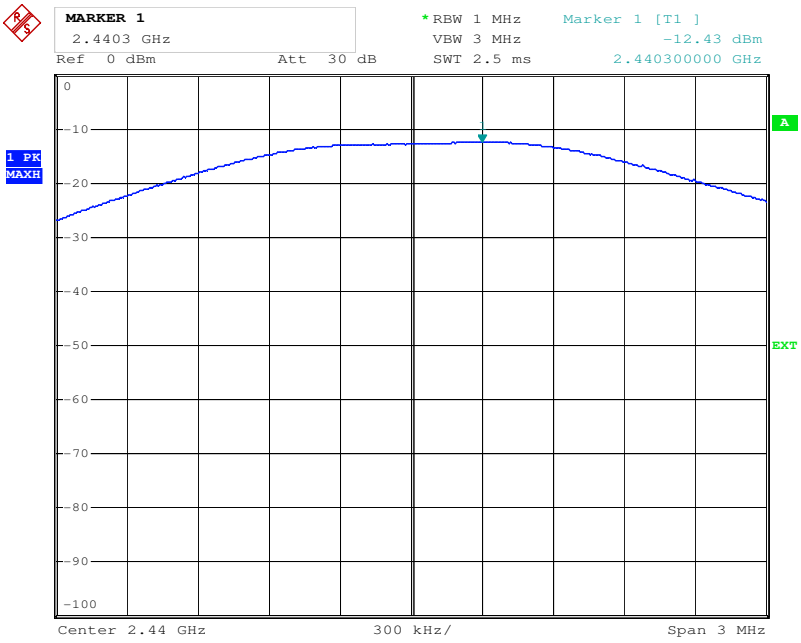


Date: 12.DEC.2014 11:43:12

Tx frequency: 2480MHz

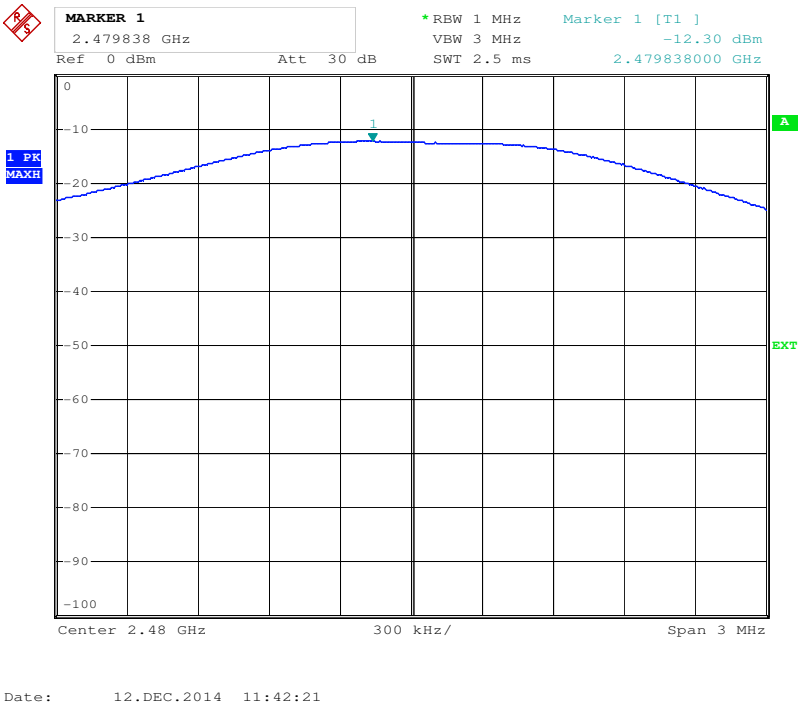

# Spurious Conducted Emissions

## BLE mode

Tx frequency: 2402MHz

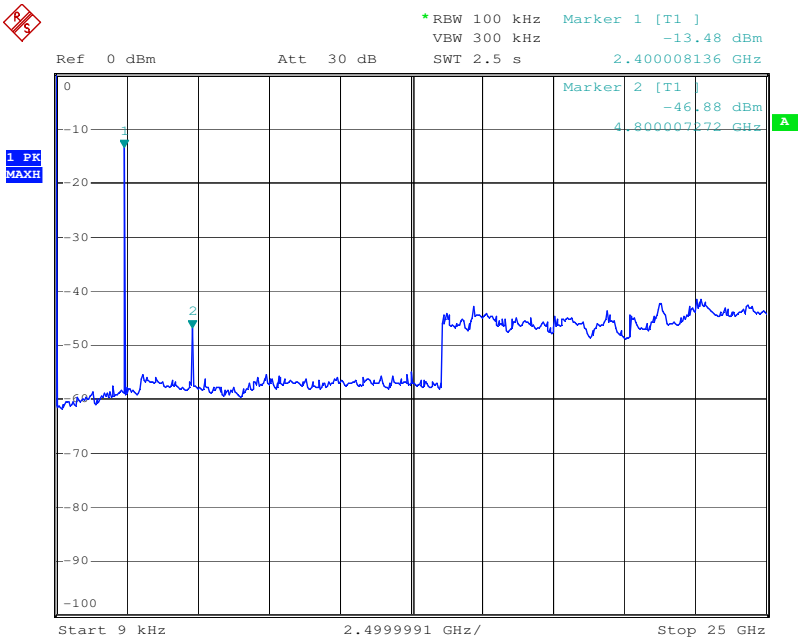


Date: 12.DEC.2014 10:56:47

Tx frequency: 2440MHz

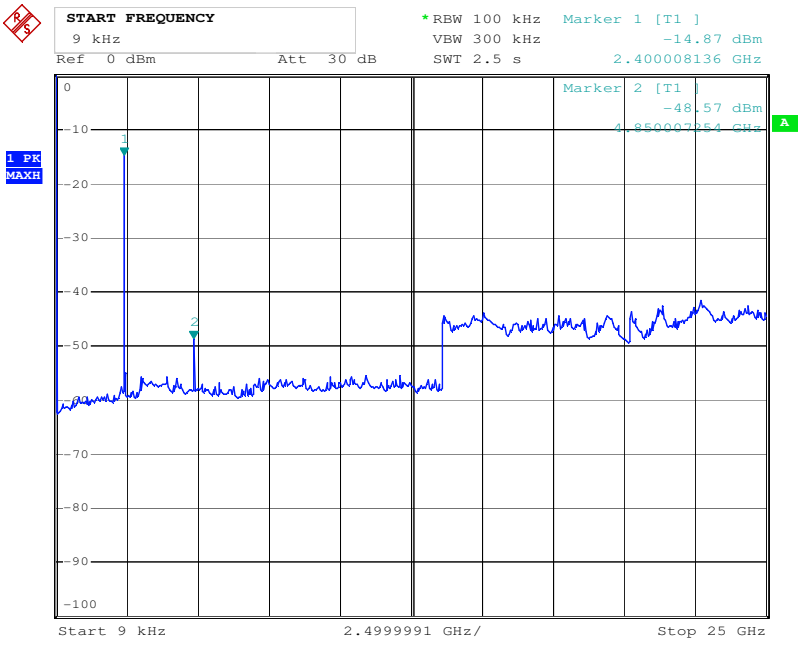


Date: 12.DEC.2014 10:58:24

Tx frequency: 2480MHz

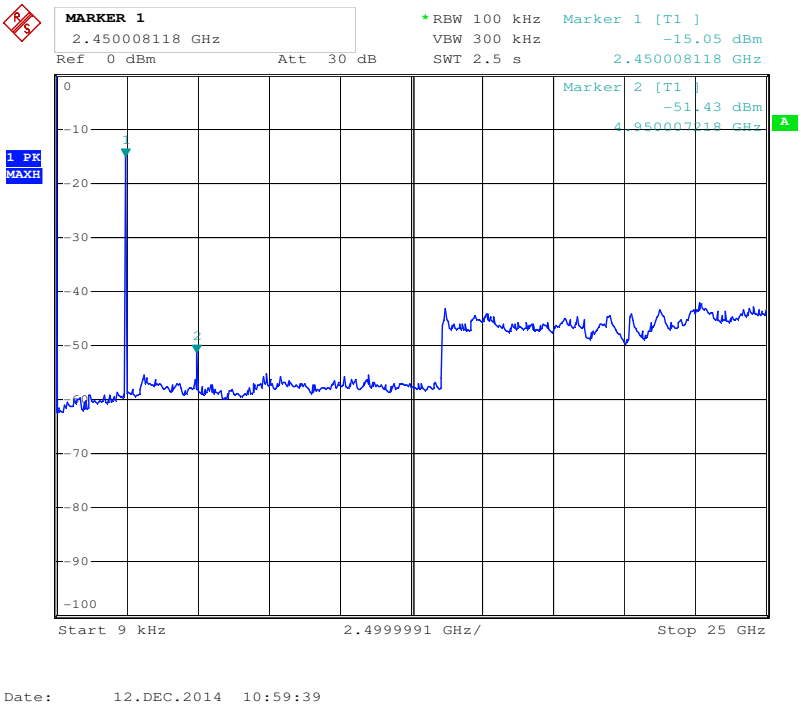

# Band Edge Compliance

## BLE mode

Tx frequency: 2402MHz (conducted measurement)

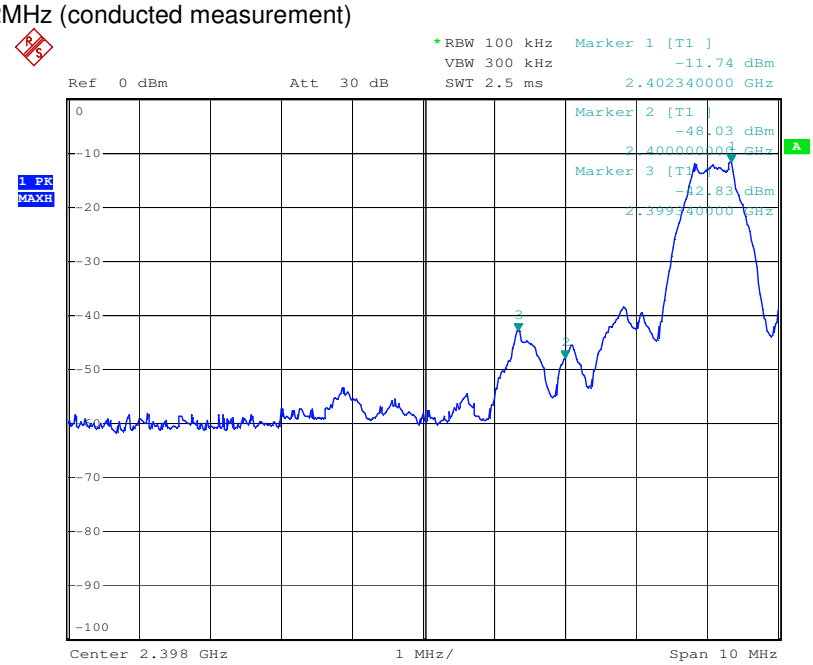


Tx frequency: 2480MHz (conducted measurement)

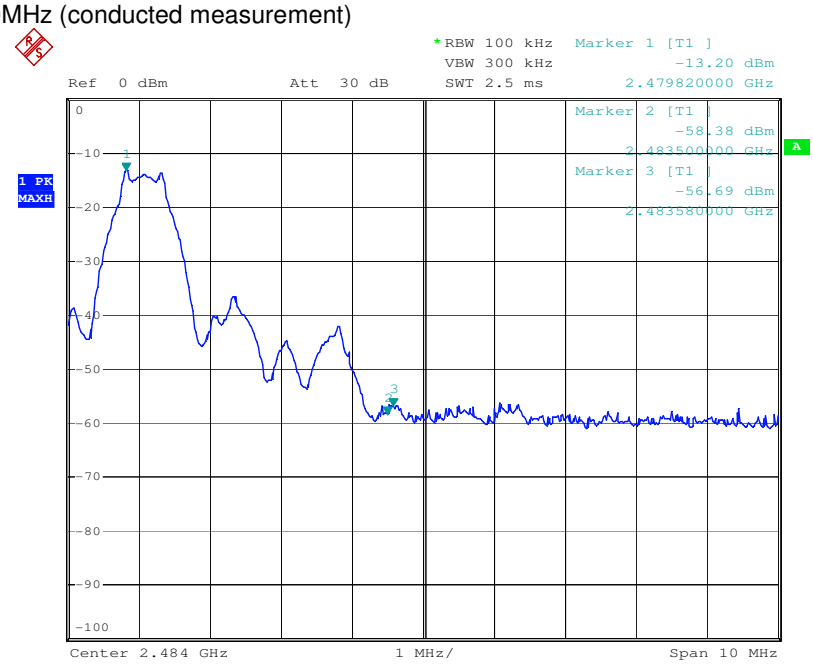

# Restricted Bands Next to The Band Edge

**BLE mode**

Tx frequency: 2402MHz (radiated measurement)

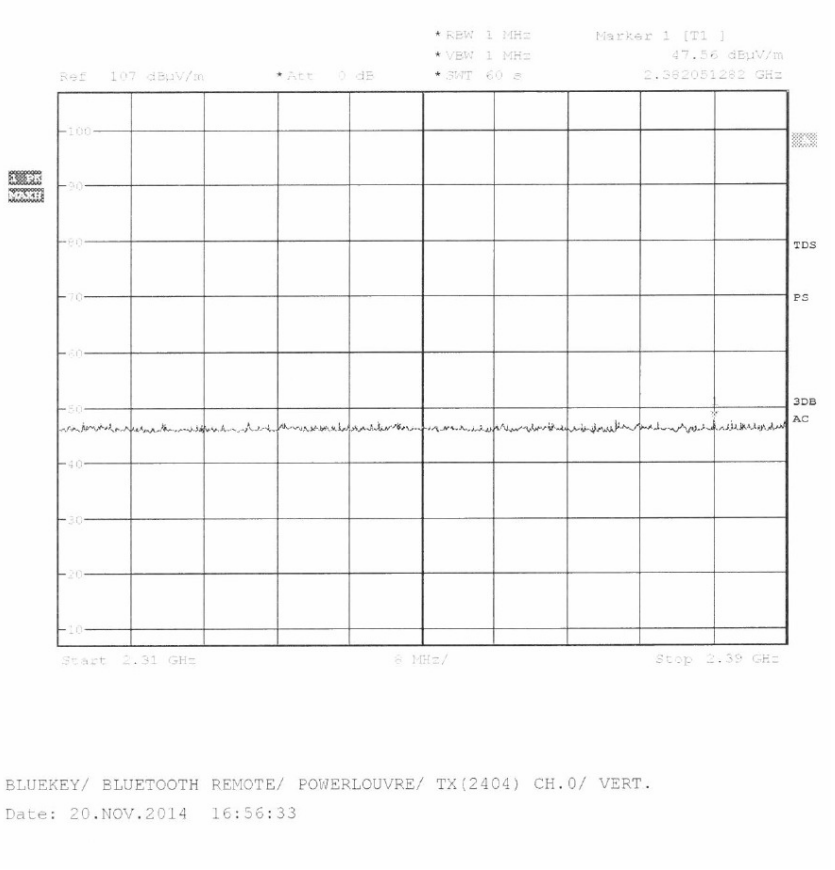


Vertical Polarization

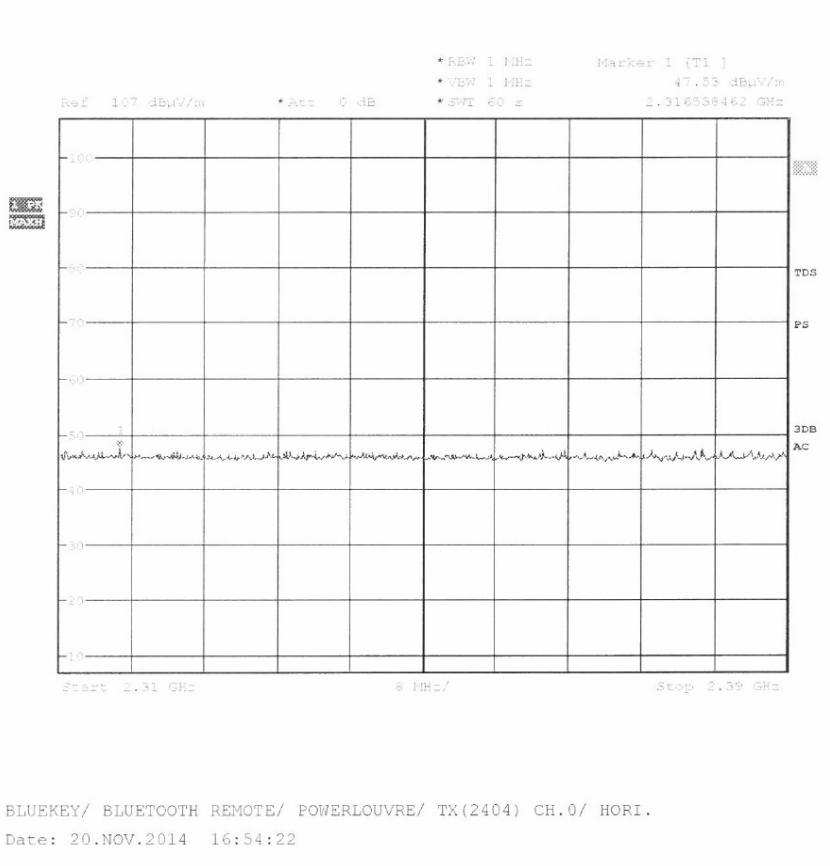


Horizontal Polarization

Tx frequency: 2480MHz (radiated measurement)

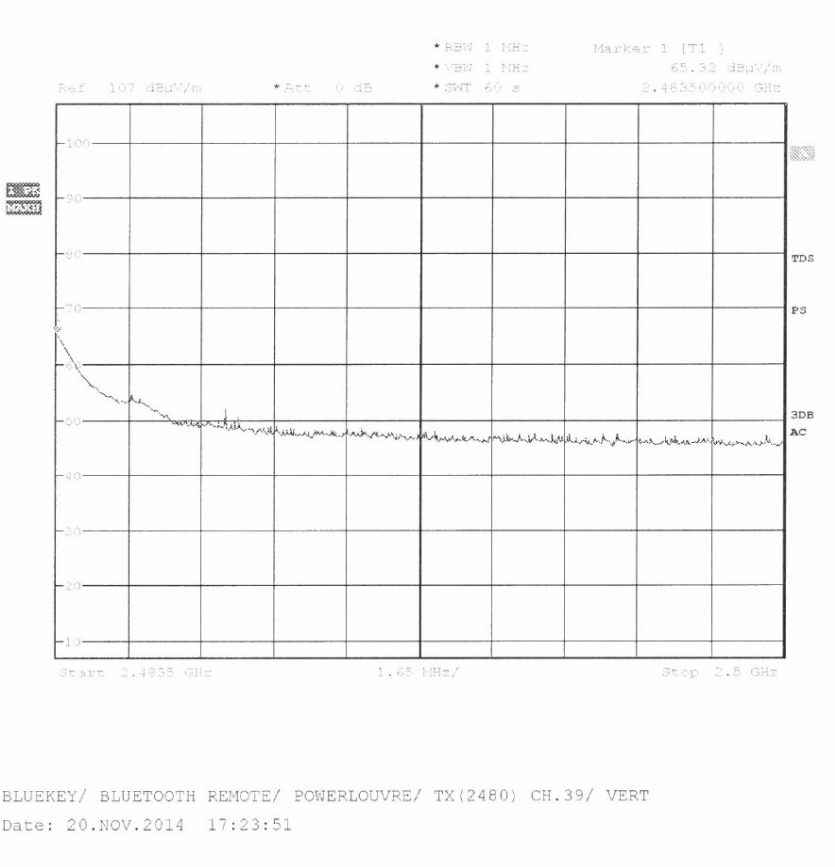


Vertical Polarization

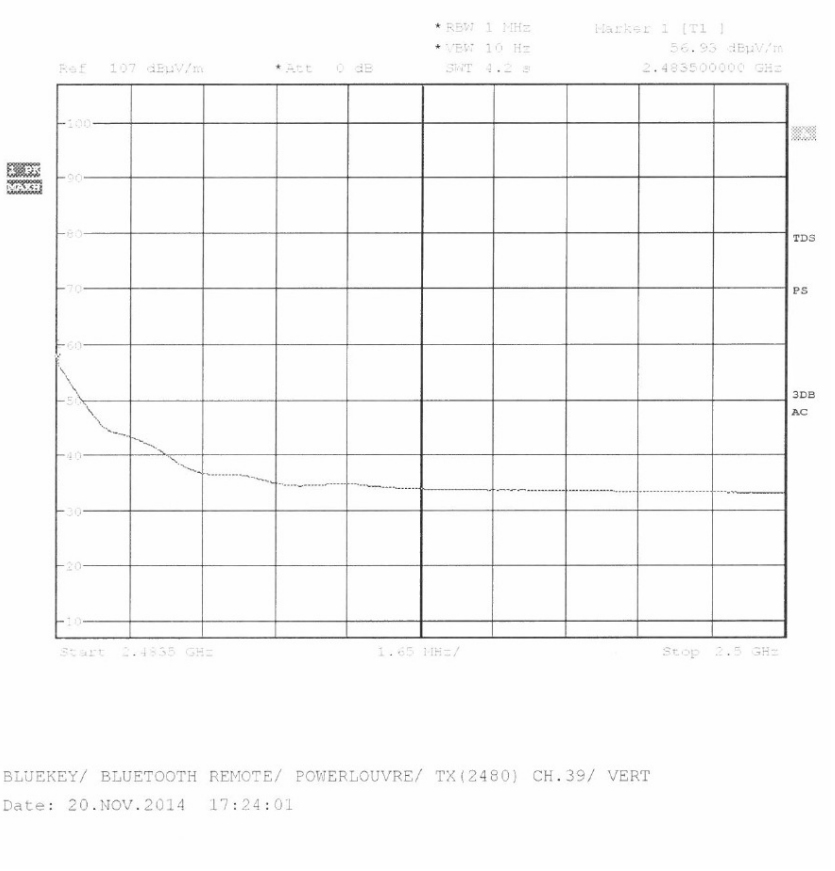


Vertical Polarization

By using Marker-delta method, the reading of bandedge 2480MHz transmitting is
-56.69 – (-13.20) = -43.49dB down from the fundamental 2480MHz.

The field strength of fundamental 2480MHz measured at 3 meters in radiated emission vertical is 90.76 dBµV/m.
Hence the field strength at bandedge = 90.76 – 43.49 = 47.27 dBµV/m, which can meet the requirement of
54 dBµV/m at bandedge measured at 3 meters.

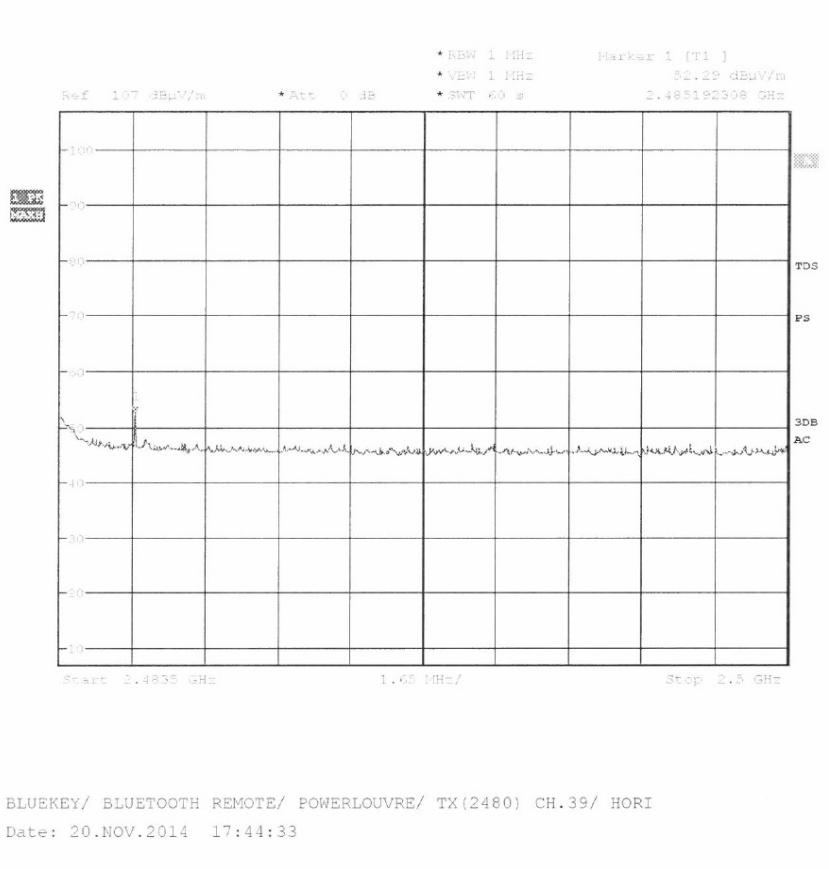


Horizontal Polarization

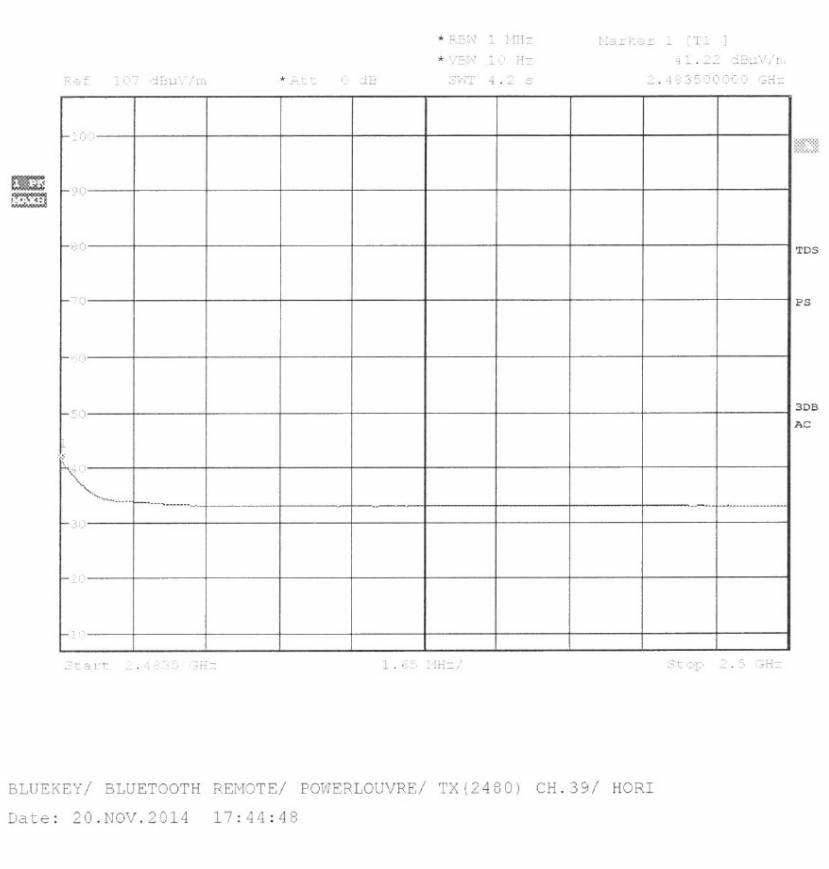


Horizontal Polarization

# Power Spectral Density

Tx frequency: 2402MHz

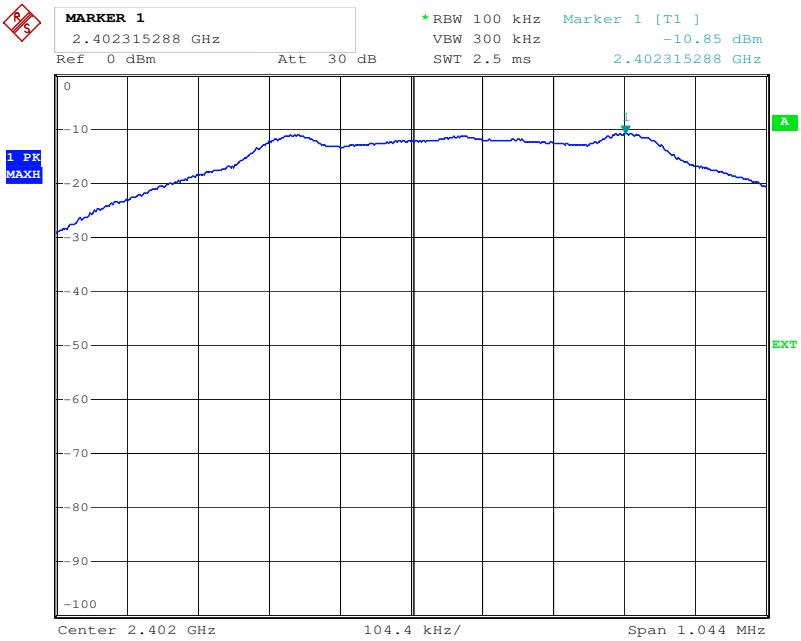


Date: 12.DEC.2014 11:52:18

Tx frequency: 2440MHz

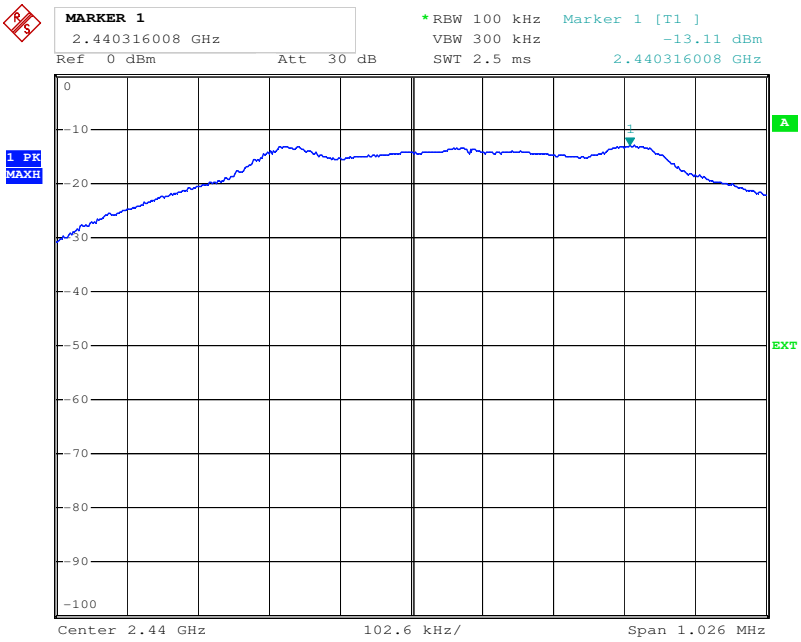


Date: 12.DEC.2014 11:53:22

Tx frequency: 2480MHz

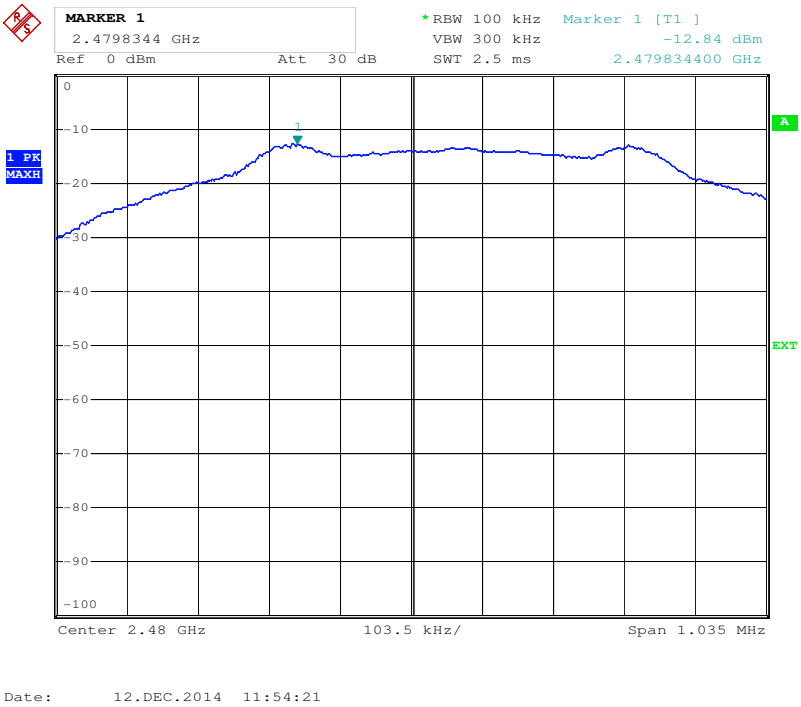

# Duty cycle correction factor

Tx mode: transmission burst in channel 2402MHz

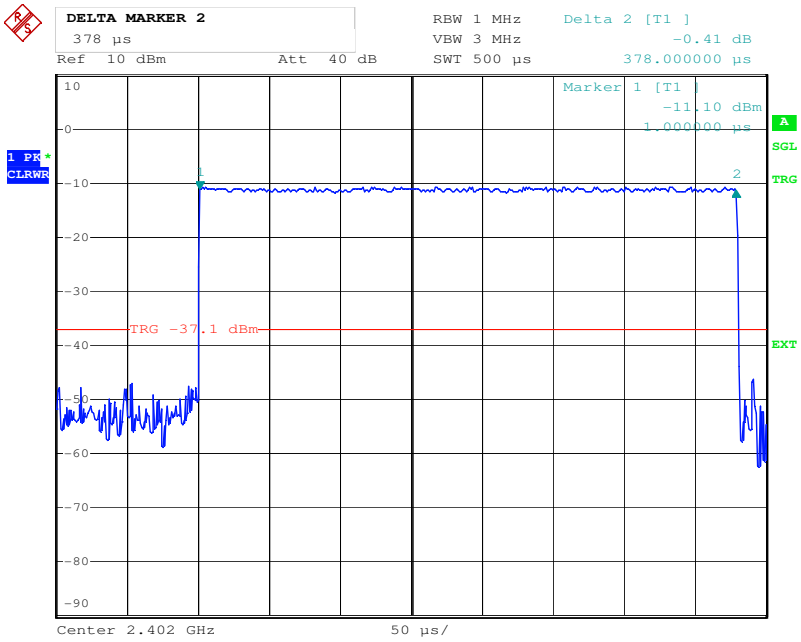


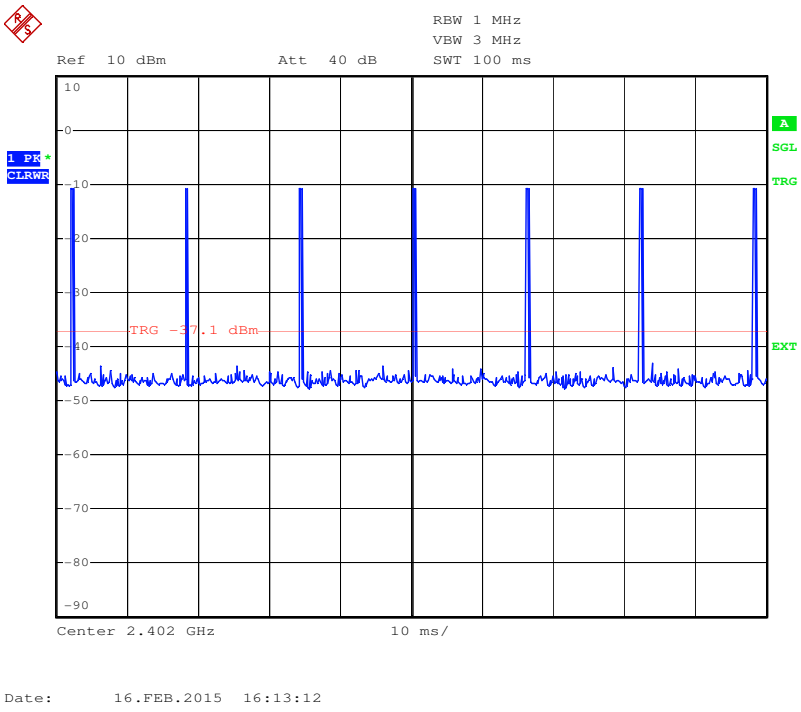


There are 7 pulses were found in 100ms time.

Tx mode: transmission burst in channel 2480MHz

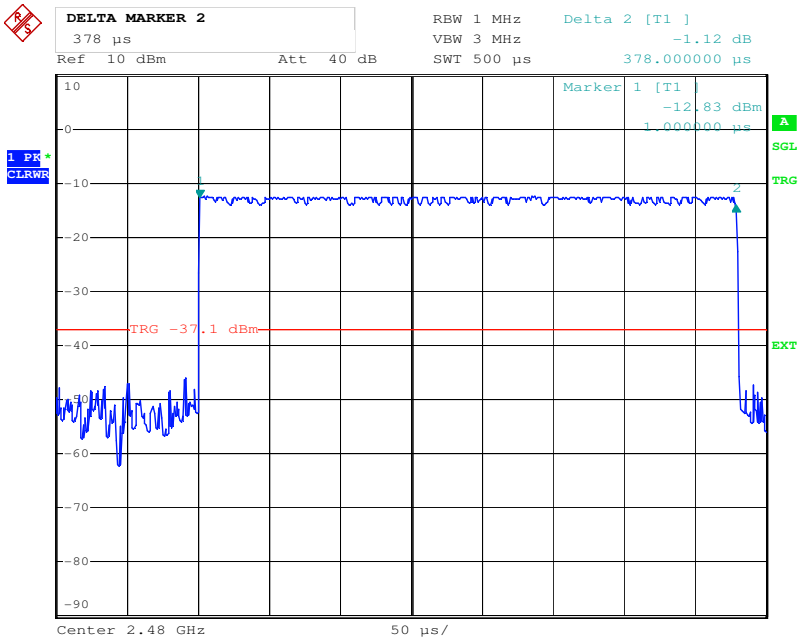


Date: 16.FEB.2015 16:18:20

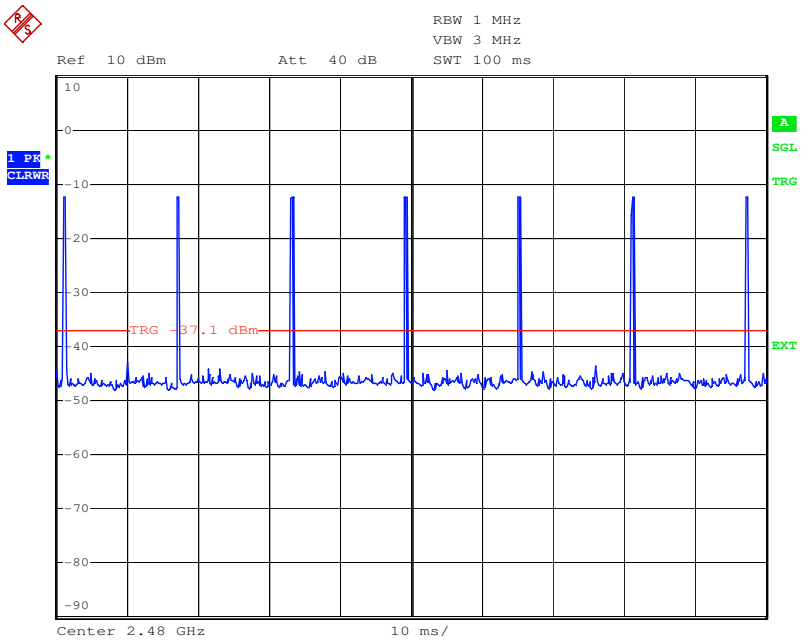


Date: 16.FEB.2015 16:20:23

There are 7 pulses were found in 100ms time.