

Report No. : EED32I003021 Page 1 of 23

FCC TEST REPORT

Product: Thermal Receipt Printer

Trade mark : RONGTA

Model/Type reference : See Clause 1

Serial Number : N/A

Ratings : DC 24V

FCC ID : 2AD6G-RP400-US
Report Number : EED32I003021

Date : Dec. 12, 2016
Regulations : See below

Test Standards	Results
	PASS

Prepared for:

XIAMEN RONGTA TECHNOLOGY CO., LTD.

3F-1/E Building No. 195 Gaoqishe, Gaodian Village, Dianqian Street
Office, Huli District, Xianmen City

Prepared by:

Centre Testing International (Shenzhen)Corporation
Building C, Scientific Innovation Park, Tiegang Reservior, Xixiang,
Baoan District,Shenzhen, China

TEL: +86-755-3368 3668 FAX: +86-755-3368 3385

Approved by Report Seal

Jacksoon wu

Reviewed by:

Date:

Christy Chen

Lab supervisor

Check No.: 2392180562





TABLE OF CONTENTS

Description			Pag	e
1. GENERAL INFORMATION				
2. TEST SUMMARY	•••••		•••••	3
3. MEASUREMENT UNCERTAINTY	•••••	•••••	•••••	3
4. PRODUCT INFORMATION AND TEST SETUP				
5. FACILITIES AND ACCREDITATIONS		•••••		4
5.1 TEST FACILITY		•••••		4
5.2 TEST EQUIPMENT LIST	••••••		••••••	4
6. SYSTEM TEST CONFIGURATION	•••••		•••••	6
6.1. JUSTIFICATION	•••••	•••••	•••••	6
6.2. PRODUCT EXERCISING SOFTWARE				
7. CONDUCTED EMISSION TEST		•••••		7
7.1. LIMITS		•••••		7
7.2. BLOCK DIAGRAM OF TEST SETUP	•••••	•••••	•••••	7
7.3. PROCEDURE OF CONDUCTED EMISSION TEST				
7.4. WORST CASE TEST GRAPHS AND TEST DATA				
8. RADIATED EMISSION TEST	•••••	•••••	••••••	12
8.1. LIMITS	•••••	•••••	•••••	12
8.2. BLOCK DIAGRAM OF TEST SETUP		•••••		12
8.3. PROCEDURE OF RADIATED EMISSION TEST	•••••	•••••	•••••	12
8.4. WORST CASE TEST GRAPHS AND TEST DATA	••••••	••••••	••••••	13
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	•••••		•••••	15
APPENDIX 2 EXTERNAL PHOTOGRAPHS OF PR	RODUCT		•••••	16
APPENDIX 3 INTERNAL PHOTOGRAPHS OF PROCESSION (Note: N/A means not applicable)	ODUCT	••••••		19



Report No. : EED32I003021 Page 3 of 23

1. GENERAL INFORMATION

Applicant: XIAMEN RONGTA TECHNOLOGY CO., LTD.

3F-1/E Building No. 195 Gaoqishe, Gaodian Village, Dianqian Street Office, Huli District, Xianmen City

Manufacturer: XIAMEN RONGTA TECHNOLOGY CO., LTD.

3F-1/E Building No. 195 Gaoqishe, Gaodian Village, Dianqian Street Office, Huli District, Xianmen City

Equipment Authorization: Certification

FCC ID: 2AD6G-RP400-US

Product: Thermal Receipt Printer

Trade mark: RONGTA

Model/Type reference: RP400H-US, RP400A-US, RP500-US

Model difference: All models are identical except appearance and model . The

test model RP400H-US and the test results are applicable to

the others.

Serial Number: Not Applicable

Report Number: EED32l003021

Sample Received Date: Nov. 22, 2016

Sample tested Date: Nov. 22, 2016 to Dec. 01, 2016

The tested sample(s) and the sample information are provided by the client.

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Standard	Test Item	Test
FCC 15.107	Conducted Emission	Yes
FCC 15.109	Radiated Emission	Yes

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value (dB)
Conducted disturbance	3.4
Radiated disturbance (30MHz to 1GHz)	5.3



Report No. : EED32I003021 Page 4 of 23

4. PRODUCT INFORMATION AND TEST SETUP

4.1. PRODUCT INFORMATION

Ratings: DC 24V

Adapter information: Manufacture: GUANGZHOU DAJING SCIENCE AND

TECHNOLOGY CO.,LTD Model No. : DJ-240250-SA

Input: 100-240V~, 50/60Hz 1.5 MAX

Output: +24V___ 2.5 MAX

4.2. TEST SETUP CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between Product and support equipment.

4.3. SUPPORT EQUIPMENT

	No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
Ĉ	1.	Notebook	LENOVO	E42L	R36037B10223	(()	Detachable
1	2	Mouse	L.selection	OP-200	B1005023926IYNB	Shielded 1.5m	

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5. FACILITIES AND ACCREDITATIONS

5.1 TEST FACILITY

All test facilities used to collect the test data are located at Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4, CISPR 16-1-1 and other equivalent standards.

5.2 TEST EQUIPMENT LIST

Instrumentation: The following list contains equipments used at CTI for testing. The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.






Report No. : EED32I003021 Page 5 of 23

Equipment used during the tests:

Shielding Room No. 1 - Conducted Emission Test														
Equipment N	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due Date									
Receiver	R&S	ESCI	100435	06/15/2016	06/15/2017									
LISN	R&S	ENV216	100098	06/15/2016	06/15/2017									

	10M Semi-ar	nechoic Chamb	per - Radiated E	mission Test	
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due Date
10M Chamber & Accessory Equipment	Rainford	CTT _		06/16/2015	06/16/2018
Spectrum Analyzer	R&S	FSP40	100416	06/15/2016	06/15/2017
EMI test receiver	R&S	ESIB40	2023282915	06/15/2016	06/15/2017
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	617	05/15/2016	05/15/2017
Microwave Preamplifier	HP		2805A03379	06/15/2016	06/15/2017

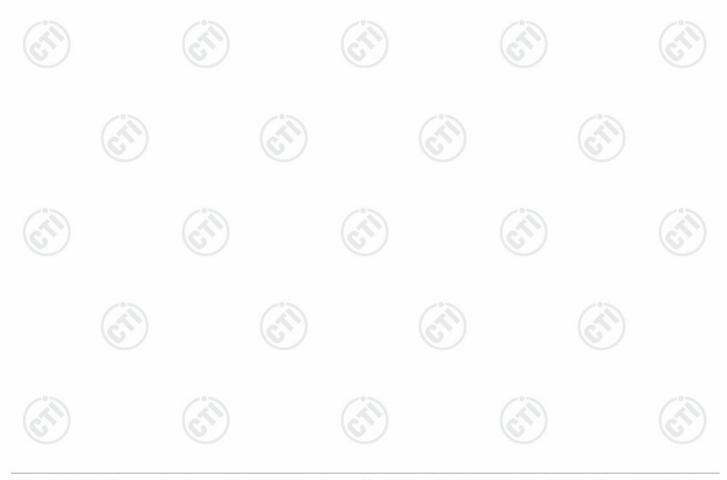







6. SYSTEM TEST CONFIGURATION

6.1. JUSTIFICATION


The system was configured for testing in a typical fashion (as a customer would normally use it), The Product was placed on a turn table, which enabled the engineer to maximize emissions through its placement as outlined in ANSI C63.4 (2009).

The Product was powered by 120VAC/ 60Hz & 240VAC/ 50Hz during conducted emission test.

The Product was powered by 120VAC/ 60Hz during radiated emission test.

For maximizing emissions, the Product was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The rear of unit shall be flushed with the rear of the table.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

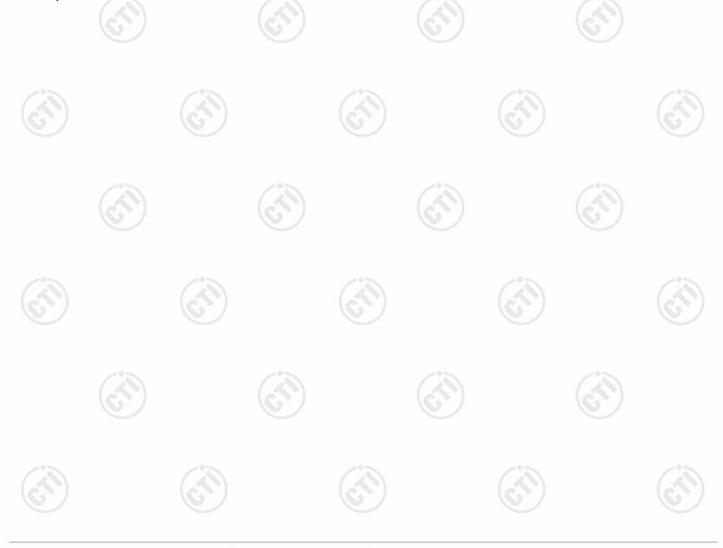



Report No. : EED32I003021 Page 7 of 23

7. CONDUCTED EMISSION TEST

7.1. LIMITS


Limits for Class B digital devices

Frequency range	Limits dB(μV)								
(MHz)	Quasi-peak	Average							
0,15 to 0,50	66 to 56	56 to 46							
0,50 to 5	56	46							
5 to 30	60	50							

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

7.2. BLOCK DIAGRAM OF TEST SETUP



7.3. PROCEDURE OF CONDUCTED EMISSION TEST

- a. The Product was placed on a nonconductive table above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.






Report No. : EED32I003021 Page 8 of 23

7.4. WORST CASE TEST GRAPHS AND TEST DATA

Product: Thermal Receipt Printer Model/Type reference: RP400H-US

Power : AC 120V/60Hz Temperature : 22° C Mode : Print H character Humidity : 53%

Phase : L

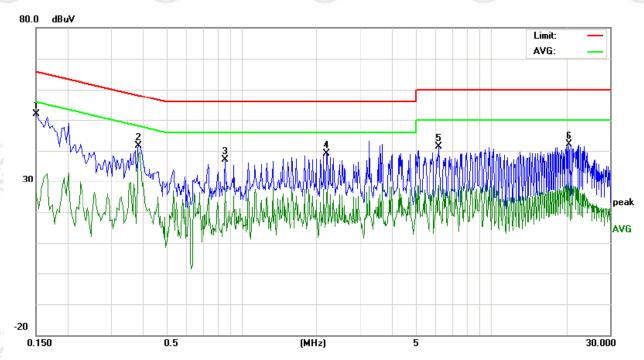

No.	Freq.		ling_Le	vel	Correct Factor	M	leasurem (dBuV)	ent	Lin (dB			rgin dB)		
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1499	42.17		16.25	9.80	51.97		26.05	66.00	56.00	-14.03	-29.95	Р	
2	0.3850	31.62		29.02	9.89	41.51		38.91	58.17	48.17	-16.66	-9.26	Р	
3	0.8615	27.33		17.83	9.78	37.11		27.61	56.00	46.00	-18.89	-18.39	Р	
4	2.1890	29.04		15.33	10.00	39.04		25.33	56.00	46.00	-16.96	-20.67	Р	
5	6.1848	31.28		18.69	10.00	41.28		28.69	60.00	50.00	-18.72	-21.31	Р	
6	20.4845	32.36		19.55	9.80	42.16		29.35	60.00	50.00	-17.84	-20.65	Ρ	






Report No. : EED32I003021 Page 9 of 23

Power : AC 120V/60Hz Temperature : 22° C Mode : Print H character Humidity : 53%

Phase : N

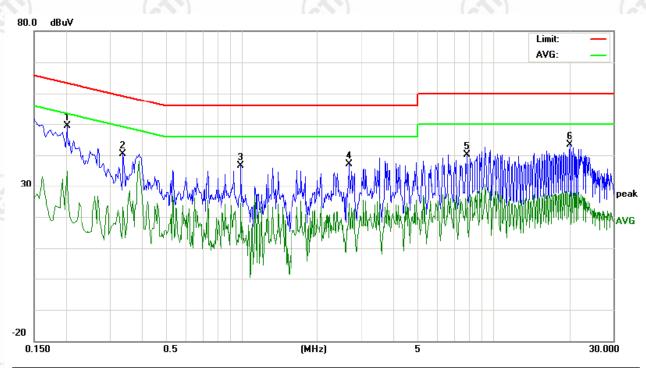

No.	Freq.		ling_Le dBu∀)	vel	Correct Factor	M	leasurem (dBu∀)	ent	Lin (dBı			rgin dB)		
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.2016	39.51		24.96	9.80	49.31		34.76	63.54	53.54	-14.23	-18.78	Р	
2	0.3371	30.59		13.22	9.84	40.43		23.06	59.27	49.27	-18.84	-26.21	Р	
3	0.9939	26.98		14.77	9.70	36.68		24.47	56.00	46.00	-19.32	-21.53	Р	
4	2.6633	27.02		14.48	10.00	37.02		24.48	56.00	46.00	-18.98	-21.52	Р	
5	7.8502	30.23		15.61	10.00	40.23		25.61	60.00	50.00	-19.77	-24.39	Р	
6	20.0548	33.59		18.29	9.80	43.39		28.09	60.00	50.00	-16.61	-21.91	Р	






Report No. : EED32I003021 Page 10 of 23

Power : AC 240V/50Hz Temperature : 22° C Mode : Print H character Humidity : 53%

Phase : L

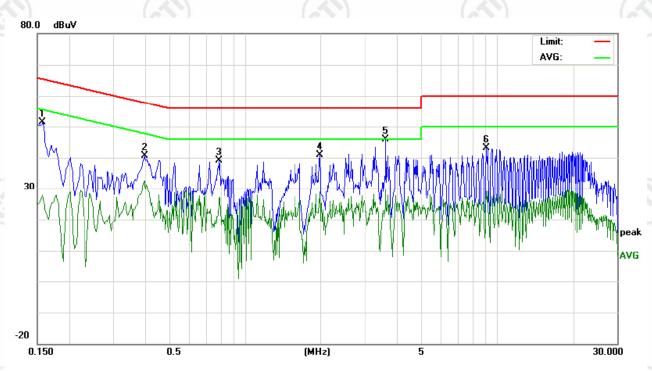

No.	Freq.		ling_Le dBuV)	vel	Correct Factor	M	leasurem (dBuV)	ent	Lin (dBı			rgin IB)		
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1580	41.59		18.11	9.80	51.39		27.91	65.56	55.56	-14.17	-27.65	Р	
2	0.3980	30.65		22.61	9.90	40.55		32.51	57.89	47.89	-17.34	-15.38	Р	
3	0.7900	29.10		16.79	9.90	39.00		26.69	56.00	46.00	-17.00	-19.31	Р	
4	1.9820	30.83		18.86	9.99	40.82		28.85	56.00	46.00	-15.18	-17.15	Р	
5	3.6380	35.98		19.57	10.00	45.98		29.57	56.00	46.00	-10.02	-16.43	Р	
6	9.0620	33.03		19.14	10.00	43.03		29.14	60.00	50.00	-16.97	-20.86	Ρ	






Report No.: EED32I003021 Page 11 of 23

Power : AC 240V/50Hz Temperature : 22° C Mode : Print H character Humidity : 53%

Phase : N

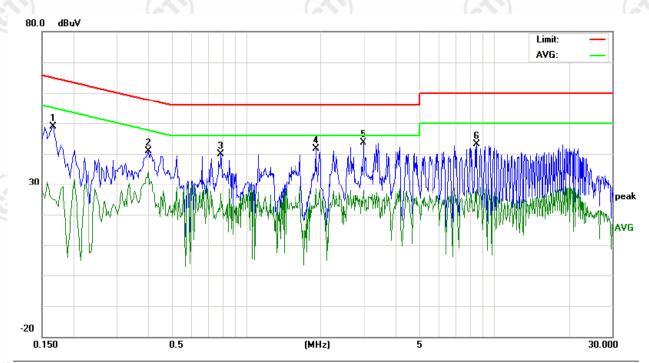

No.	Freq.	3		Correct Factor	Measurement (dBu∀)		Limit (dBuV)		Margin (dB)					
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1660	39.15		15.17	9.80	48.95		24.97	65.15	55.15	-16.20	-30.18	Р	
2	0.4020	30.98		24.32	9.90	40.88		34.22	57.81	47.81	-16.93	-13.59	Р	
3	0.7900	29.88		17.09	9.90	39.78		26.99	56.00	46.00	-16.22	-19.01	Р	
4	1.9180	31.57		18.35	9.98	41.55		28.33	56.00	46.00	-14.45	-17.67	Р	
5	2.9739	33.65		17.84	10.00	43.65		27.84	56.00	46.00	-12.35	-18.16	Р	
6	8.5260	33.09		18.20	10.00	43.09		28.20	60.00	50.00	-16.91	-21.80	Р	





Report No. : EED32I003021 Page 12 of 23

8. RADIATED EMISSION TEST

8.1. LIMITS


Limits for Class B digital devices

Frequency (MHz)	limits at 3m dΒ(μV/m)					
30-88	40.0					
88-216	43.5					
216-960	46.0					
Above 960	54.0					

NOTE: 1. The lower limit shall apply at the transition frequency.

- 2. The limits shown above are based on measuring equipment employing a CISPR quasi-peak detector function for frequencies below or equal to 1000MHz.
- 3. The limits shown above are based on measuring equipment employing an average detector function for frequencies above 1000MHz.

8.2. BLOCK DIAGRAM OF TEST SETUP

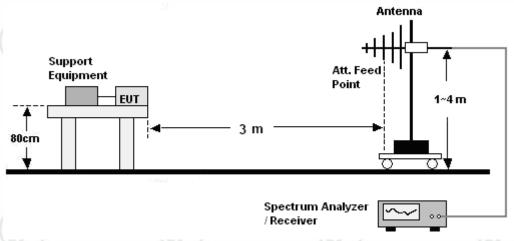

8.3. PROCEDURE OF RADIATED EMISSION TEST

30MHz ~ 1GHz:

- a. The Product was placed on the non-conductive turntable 0.8m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.




Report No. : EED32I003021 Page 13 of 23

8.4. WORST CASE TEST GRAPHS AND TEST DATA

Power : AC 120V/60Hz Temperature : 22° C Mode : Print H character Humidity : 53%

Polarization : Horizontal

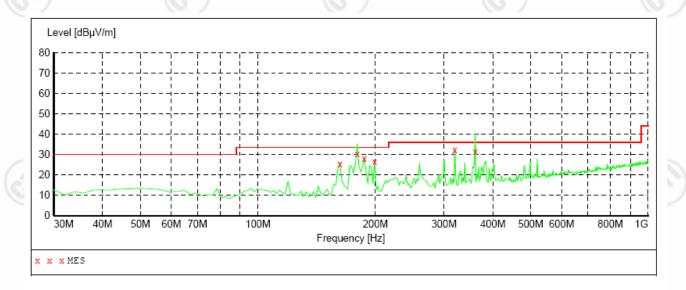

MEASUREMENT RESULT:

Frequency MHz	Level dBµV/m		Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
162.184369 179.679359 187.454910 199.118236 319.639279 360.460922	25.50 29.70 28.10 26.70 32.30 30.30	-15.3 -14.3 -13.5 -12.4 -8.6 -7.5	33.5 33.5 33.5 33.5 36.0 36.0	8.0 3.8 5.4 6.8 3.7 5.7	QP QP QP QP QP QP	300.0 400.0 400.0 300.0 200.0 300.0	45.00	HORIZONTAL HORIZONTAL HORIZONTAL HORIZONTAL HORIZONTAL HORIZONTAL





Page 14 of 23


Product: Thermal Receipt Printer

Power : AC 120V/60Hz

Mode : Print H character

Model/Type reference : RP400H-US

Temperature : 22°C Humidity : 53% Polarization : Vertical

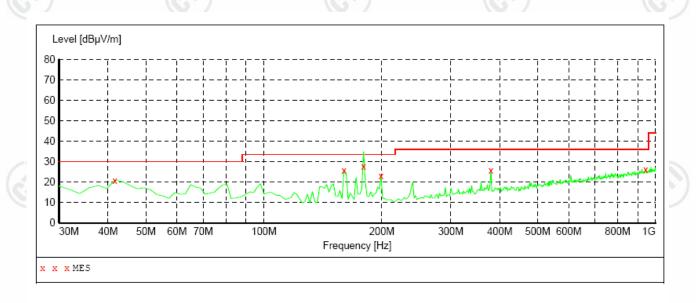

MEASUREMENT RESULT:

Frequency MHz	Level dBµV/m		Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.663327	20.90	-12.0	30.0	9.1	QР	400.0	149.00	VERTICAL
160.240481	25.90	-15.4	33.5	7.6		400.0	29.00	VERTICAL
179.679359	28.20	-14.3	33.5	5.3		300.0	133.00	VERTICAL
199.118236	22.90	-12.4	33.5	10.6	~	200.0	42.00	VERTICAL
379.899800	25.80	-7.4	36.0	10.2		300.0	194.00	VERTICAL
943.627255	26.20	0.4	36.0	9.8		100.0	179.00	VERTICAL

Remark:

The highest frequency of the internal sources of the EUT is 100 MHz, so the measurement shall only be made up to 1 GHz.






Report No. : EED32I003021 Page 15 of 23

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP



CONDUCTED EMISSION TEST SETUP

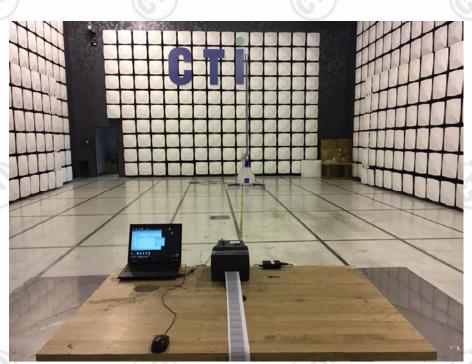

RADIATED EMISSION TEST SETUP















APPENDIX 2 EXTERNAL PHOTOGRAPHS OF PRODUCT



External View of Product-1



External View of Product-2

















External View of Product-3



External View of Product-4





































External View of Product-7












































































APPENDIX 3 INTERNAL PHOTOGRAPHS OF PRODUCT

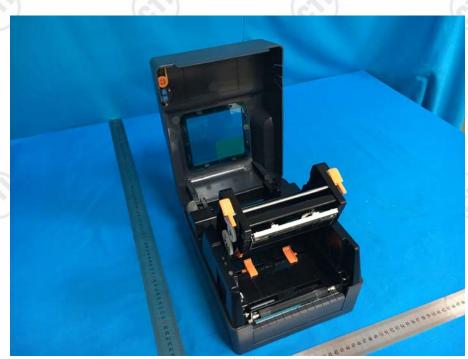

Internal View of Product-1

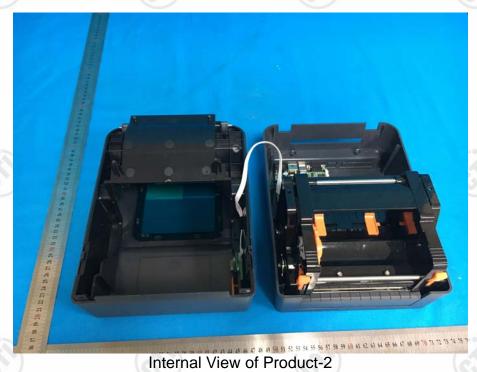



















Internal View of Product-3



Internal View of Product-4














Report No. : EED32I003021 Page 23 of 23



Internal View of Product-5

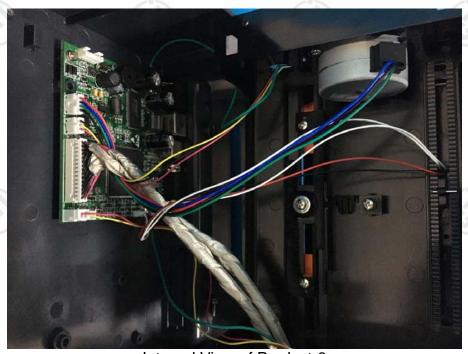

Internal View of Product-6

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

