

Report No.: EED32I002833 Page 1 of 31

FCC TEST REPORT

Product: Thermal Receipt Printer

Trade mark : Rongta

RP80-US, RP804-US, RP807-US,

Model/Type reference: RP809-US, RP812-US, RP820-US,

RP850-US

Serial Number : N/A

Report Number : EED32I002833 FCC ID : 2AD6GRP80US

Date of Issue : Nov. 25, 2016

Test Standards : 47 CFR Part 15 Subpart B (2015)

Test result : PASS

Prepared for:

XIAMEN RONGTA TECHNOLOGY CO., LTD.

3F-1/E Building, No.195 Gaoqishe, Gaodian Village, Dianqian Street
Office, Huli District, Xiamen City

Prepared by:

Centre Testing International Group Co., Ltd. Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China

TEL: +86-755-3368 3668 FAX: +86-755-3368 3385

Report Seal Date:

Hotline: 400-6788-333

Tom-chen

Compiled by:

Ware xin (Project Engineer)

Vare Xin

Tom chen (Test Project)

Kevin Yang (Reviewer)

Approved by:

Sheek Luo (Lab supervisor)

Check No.: 2392152291

Nov. 25, 2016

www.cti-cert.com E-mail: info@cti-cert.com Complaint call: 0755-33681700 Complaint E-mail: complaint@cti-cert.com









Page 2 of 31

2 Version







Version No.	Date		Description	
00	Nov. 25, 2016	(15)	Original	
/			(6.)	6.

















































































3 Test Summary


Test Item	Test Requirement	Test method	Result
Radiated Emission	47 CFR Part 15B	ANSI C63.4-2014	PASS
Conducted Emission (150KHz to 30MHz)	47 CFR Part 15B	ANSI C63.4-2014	PASS

Remark:

The tested sample and the sample information are provided by the client. Model No.: RP80-US, RP804-US, RP807-US, RP809-US, RP812-US, RP820-US, RP850-US Only the model RP80-US was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being appearance and model name.







4 Conte	ents			Page
1 COVER PAG	E		<u></u>	
2 VERSION				2
TEST SUMM	ARY			3
4 CONTENTS.				4
5 GENERAL IN	NFORMATION			5
5.2 GENERAL 5.3 PRODUCT 5.4 TEST EN 5.5 DESCRIP 5.6 TEST LOC 5.7 TEST FAC 5.8 DEVIATIO 5.9 ABNORMA 5.10 OTHER	DESCRIPTION OF EUT. SPECIFICATION SUBJECT VIRONMENT AND MODE TION OF SUPPORT UNITS CATION CILITY N FROM STANDARDS ALITIES FROM STANDARI INFORMATION REQUEST	CTIVE TO THIS STANDARD S		5 5 5 6 6 7 7
6 EQUIPMENT	LIST		•••••	8
7.1 CONDUCTOR 7.2 RADIATEI	TED EMISSIONS	MENT DATA		9 14
		EST SETUP		
APPENDIX 2 F	PHOTOGRAPHS OF E	:UT		19

























Report No. : EED32I002833 Page 5 of 31

5 General Information

5.1 Client Information

10.0.0	
Applicant:	XIAMEN RONGTA TECHNOLOGY CO., LTD.
Address of Applicant:	3F-1/E Building, No.195 Gaoqishe, Gaodian Village, Dianqian Street Office, Huli District, Xiamen City
Manufacturer:	XIAMEN RONGTA TECHNOLOGY CO., LTD.
Address of Manufacturer: 3F-1/E Building, No.195 Gaoqishe, Gaodian Village, Dianqiar Office, Huli District, Xiamen City	
Factory:	XIAMEN RONGTA TECHNOLOGY CO., LTD.
Address of Factory: 3, 4F, CPlant, Gaoqi Industrial Zone, No.199, Gaoqi Commu Gaodian Village, Huli Xiamen	

5.2 General Description of EUT

Product Name:	Thermal Receipt Printer
Model No.:	RP80-US, RP804-US, RP807-US, RP809-US, RP812-US, RP820-US, RP850-US
Test Model No.:	RP80-US
Trade Mark:	Rongta
AC adapter:	AC 100-240V, 50/60Hz Output: DC 24V, 2.5A

5.3 Product Specification subjective to this standard

EUT Function:	Printer	
Test voltage:	AC 120V/60Hz, AC 230V/50Hz	
Sample Received Date:	Oct. 31, 2016	(.)
Sample tested Date:	Oct. 31, 2016 to Nov. 25 ,2016	(25)

5.4 Test Environment and Mode

Operating Environment:		
Temperature:	24°C	
Humidity:	50% RH	(6,
Atmospheric Pressure:	1010mbar	
Test mode:		
Normal operation:	Keep the EUT at normal operation mode.	

5.5 Description of Support Units

The EUT has been tested with associated equipment below.

Associated	equipment name	Manufacture	Model	Supplied by
AE1	PC	HP	HP 430 G3	CTI
AE2	PC	Lenovo	E46L	СТІ
AE3	Mouse	L.Selectron	OP-200	CTI
AE4	Keyboard	Lenovo	LXH-EKB-10YA	CTI
AE5	Keyboard	L.Selectron	KB-101A	CTI

Hotline: 400-6788-333 www.cti-cert.com E-mail: info@cti-cert.com Complaint call: 0755-33681700 Complaint E-mail: complaint@cti-cert.com



Report No.: EED32I002833 Page 6 of 31

5.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 3368 3668 Fax:+86 (0) 755 3368 3385

No tests were sub-contracted.

5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 886427

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

IC-Registration No.: 7408A-2

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A-2.

IC-Registration No.: 7408B-1

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B-1.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 &10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Hotline: 400-6788-333 www.cti-cert.com E-mail: info@cti-cert.com Complaint call: 0755-33681700 Complaint E-mail: complaint@cti-cert.com



Report No.: EED32I002833 Page 7 of 31

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

5.8 Deviation from Standards

None.

5.9 Abnormalities from Standard Conditions

None.

5.10 Other Information Requested by the Customer

None.

5.11 Measurement Uncertainty (95% confidence levels, k=2)

Item	Measurement Uncertainty
Radio Frequency	7.9 x 10 ⁻⁸
Dadiated Courieus emission	4.5dB (30MHz-1GHz)
Radiated Spurious emission	4.8dB (1GHz-12.75GHz)
Conduction emission	3.6dB (9kHz to 150kHz)
Conduction emission	3.2dB (150kHz to 30MHz)
Temperature	0.64°C
Humidity	2.8%
DC power voltages	0.025%
	Radio Frequency Radiated Spurious emission Conduction emission Temperature Humidity











Equipment List

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-16-2016	06-15-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
LISN	R&S	ENV216	100098	06-16-2016	06-15-2017
LISN	schwarzbeck	NNLK8121	8121-529	06-16-2016	06-15-2017
Voltage Probe	R&S	ESH2-Z3		07-09-2014	07-07-2017
Current Probe	R&S	EZ17	100106	06-16-2016	06-15-2017

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3		06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-617	05-16-2016	05-15-2017
Microwave Preamplifier	Agilent	8449B	3008A02425	02-04-2016	02-03-2017
Spectrum Analyzer	R&S	FSP40	100416	06-16-2016	06-15-2017
Receiver	R&S	ESCI	100435	06-16-2016	06-15-2017
Multi device Controller	maturo	NCD/070/107 11112		01-12-2016	01-11-2017
LISN	schwarzbeck	NNBM8125	81251547	06-16-2016	06-15-2017
LISN	schwarzbeck	NNBM8125	81251548	06-16-2016	06-15-2017





































Report No. : EED32I002833 Page 9 of 31

7 Test results and Measurement Data

7.1 Conducted Emissions

Test Requirement: 47 CFR Part 15B

Test Method: ANSI C63.4

Test frequency range: 150kHz to 30MHz

Limit:


Test Procedure:

Francisco (MIS)	Limi	t (dBµV)
Frequency range (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu H + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.

Test Setup:

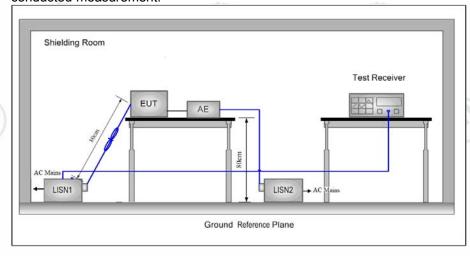

Instruments Used: Refer to section 6 for details

Test Results: Pass

Hotline: 400-6788-333 www.cti-cert.com E-mail: info@cti-cert.com Complaint call: 0755-33681700 Complaint E-mail: complaint@cti-cert.com



Report No.: EED32I002833 Page 10 of 31


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

AC 120V, 60Hz

Live Line:

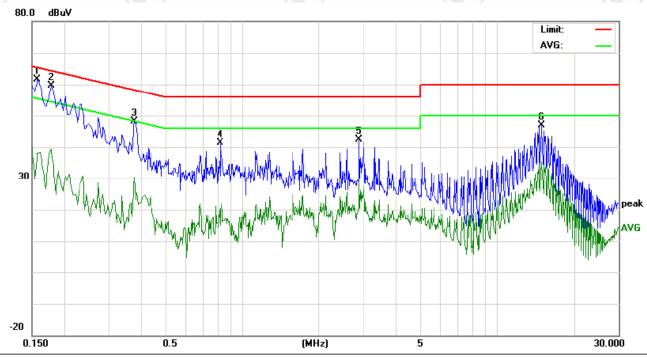

1	No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBu∀)		Margin (dB)			
		MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
	1	0.1580	51.95	44.82	24.18	9.80	61.75	54.62	33.98	65.56	55.56	-10.94	-21.58	Р	
	2	0.1780	49.73	41.61	20.89	9.80	59.53	51.41	30.69	64.57	54.57	-13.16	-23.88	Р	
	3	0.3780	38.23		20.45	9.88	48.11		30.33	58.32	48.32	-10.21	-17.99	Р	
	4	0.8260	31.46		10.62	9.85	41.31		20.47	56.00	46.00	-14.69	-25.53	Р	
	5	2.8740	32.32		19.36	10.00	42.32		29.36	56.00	46.00	-13.68	-16.64	Р	
-	6	15.0540	36.88		25.26	10.10	46.98		35.36	60.00	50.00	-13.02	-14.64	Р	




























Page 11 of 31

Neutral Line:

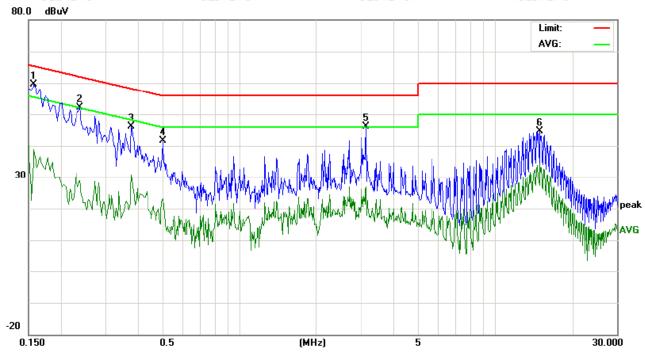

No.	Freq.	Reading_Level (dBuV)		Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)				
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1580	49.74		29.03	9.80	59.54		38.83	65.56	55.56	-6.02	-16.73	Р	
2	0.2380	42.25		19.13	9.80	52.05		28.93	62.16	52.16	-10.11	-23.23	Р	
3	0.3780	36.15		20.95	9.88	46.03		30.83	58.32	48.32	-12.29	-17.49	Р	
4	0.5020	31.83		13.32	9.90	41.73		23.22	56.00	46.00	-14.27	-22.78	Р	
5	3.1420	36.16		16.98	10.00	46.16		26.98	56.00	46.00	-9.84	-19.02	Р	
6	15.0500	34.59		24.44	10.10	44.69		34.54	60.00	50.00	-15.31	-15.46	Р	






































AC 230V, 50Hz



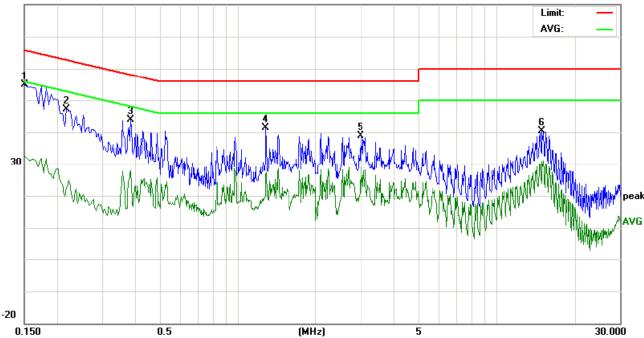

	_	3_			Correct				Limit		Margin			
No.	Freq.	(0	(dBuV)		Factor	(dBuV)			(dB	uV)	(0	dB)		
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1500	45.06		22.80	9.80	54.86		32.60	65.99	55.99	-11.13	-23.39	Р	
2	0.2180	45.06		22.80	9.80	54.86		32.60	62.89	52.89	-8.03	-20.29	Р	
3	0.3860	34.08		17.98	9.89	43.97		27.87	58.15	48.15	-14.18	-20.28	Р	
4	1.2860	31.50		16.85	9.79	41.29		26.64	56.00	46.00	-14.71	-19.36	Р	
5	2.9820	28.94		18.98	10.00	38.94		28.98	56.00	46.00	-17.06	-17.02	Р	
6	15.0540	30.23		20.71	10.10	40.33		30.81	60.00	50.00	-19.67	-19.19	Р	


































Neutral Line: 80.0 dBuV Limit: AVG: AVG: Pea AVG

	No.	Freq.	3_		Correct Factor	Measurement (dBuV)		Limit (dBuV)		Margin (dB)					
-		MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
Ī	1	0.1500	47.25		23.50	9.80	57.05		33.30	65.99	55.99	-8.94	-22.69	Р	
	2	0.2180	47.30	47.01	24.76	9.80	57.10	56.81	34.56	62.89	52.89	-6.08	-18.33	Р	
3	3	0.3660	35.78		18.81	9.87	45.65		28.68	58.59	48.59	-12.94	-19.91	Р	
	4	0.8700	28.59		16.05	9.76	38.35		25.81	56.00	46.00	-17.65	-20.19	Р	
	5	3.3100	31.73		15.83	10.00	41.73		25.83	56.00	46.00	-14.27	-20.17	Р	
Ī	6	15.3780	31.04		20.67	10.08	41.12		30.75	60.00	50.00	-18.88	-19.25	Р	

(MHz)

30.000

Notes:

0.150

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

0.5







7.2 Radiated Emission

Test Requirement: 47 CFR Part 15B **Test Method:** ANSI C63.4

Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Receiver setup:

Limit:

Frequency	Detector		RBW	VBW	Remark		
30MHz-1GHz	Quasi-peal	(120kHz	300kHz	Quasi-peak Value		
Above 1GHz	Peak		1MHz	3MHz	Peak Value		
Freque	ency	L	_imit (dBµV/	/m @3m)	Remark		
30MHz-8	8MHz		40.0)	Quasi-peak Value		
88MHz-2	16MHz		43.5	5	Quasi-peak Value		
216MHz-9	60MHz		46.0)	Quasi-peak Value		
960MHz-	-1GHz		54.0)	Quasi-peak Value		
Above 1	ICU-		54.0)	Average Value		
Above	IGHZ		74.0		Peak Value		

Test Procedure:

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber (Above 18GHz the distance is 1 meter).
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- i. Repeat above procedures until all frequencies measured was complete.














Test Setup:





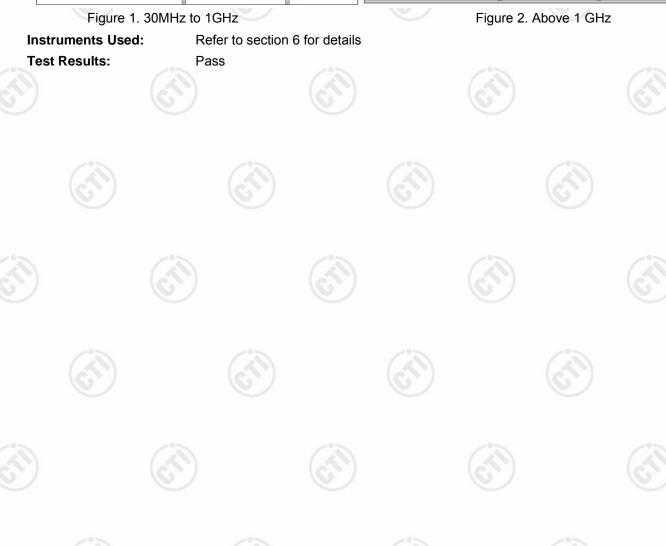






















Test data: Below 1GHz Horizontal





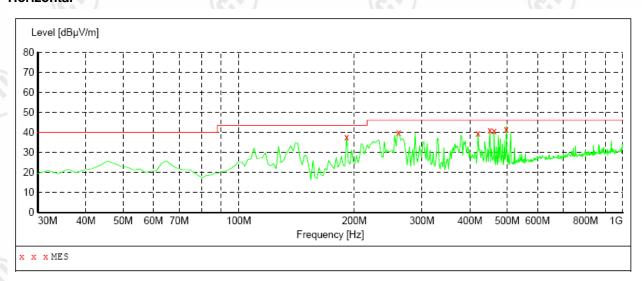

MEASUREMENT RESULT:

Frequency MHz		Transd dB		_		Height cm	Azimuth deg	Polarization
191.020000	37.70	12.9	43.5	5.8	QP	200.0	360.00	HORIZONTAL
260.860000	39.90	15.0	46.0	6.1	QP	200.0	78.00	HORIZONTAL
419.940000	39.60	18.3	46.0	6.4	QP	100.0	208.00	HORIZONTAL
450.980000	41.00	18.8	46.0	5.0	QP	100.0	31.00	HORIZONTAL
462.620000	40.70	19.0	46.0	5.3	QP	100.0	31.00	HORIZONTAL
498.000000	41.10	19.5	46.0	4.9	QP	198.0	208.00	HORIZONTAL












Vertical

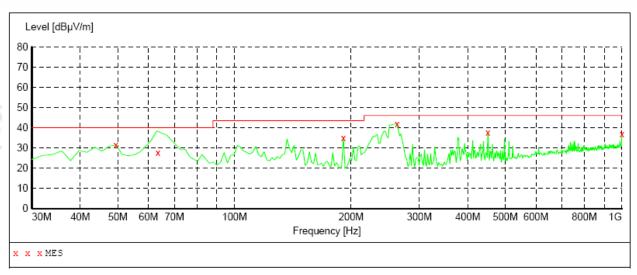



Frequency MHz	Level dBµV/m		Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
49.400000	31.40	15.6	40.0	8.6	QР	200.0	89.00	VERTICAL
63.400000	27.50	13.3	40.0	12.5		100.0	78.00	VERTICAL
191.020000	34.80	12.9	43.5	8.7		100.0	31.00	VERTICAL
262.800000	41.90	15.0	46.0	4.1	QP	100.0	153.00	VERTICAL
450.980000	37.50	18.8	46.0	8.5	QP	200.0	232.00	VERTICAL
1000.000000	37.00	26.6	46.0	9.0	QP	100.0	236.00	VERTICAL

Remark:

1) The highest frequency of the internal sources of the EUT is 80 MHz, so the measurement shall only be made up to 1 GHz.





Report No.: EED32I002833 Page 18 of 31

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

Test Model No.: RP80-US



Radiated emission Test Setup



Conducted Emissions

















APPENDIX 2 PHOTOGRAPHS OF EUT

Test Model No.: RP80-US



View of Product-1

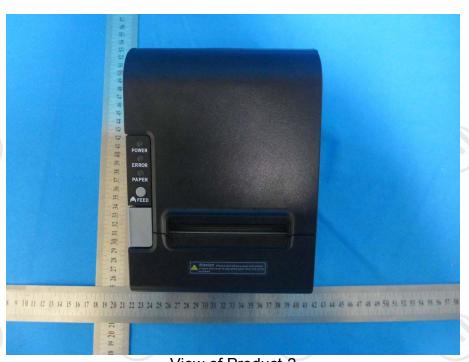

View of Product-2





















View of Product-3



View of Product-4





















View of Product-5



View of Product-6






















View of Product-7

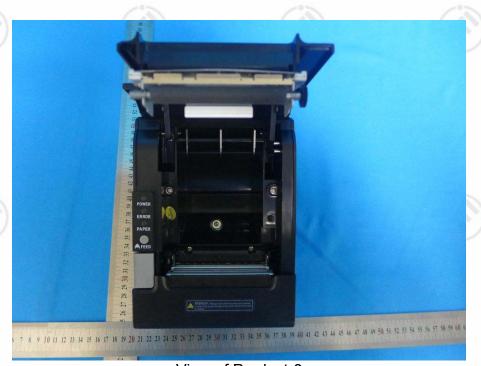

View of Product-8




















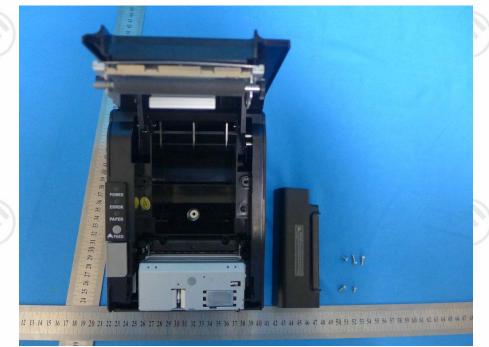

View of Product-9



View of Product-10





















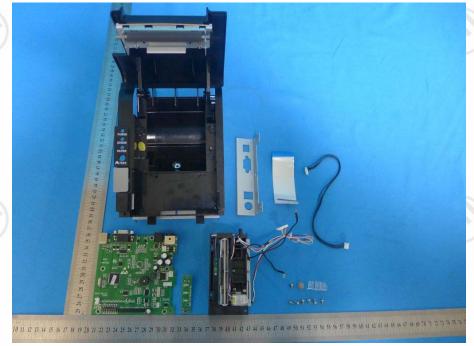

View of Product-11

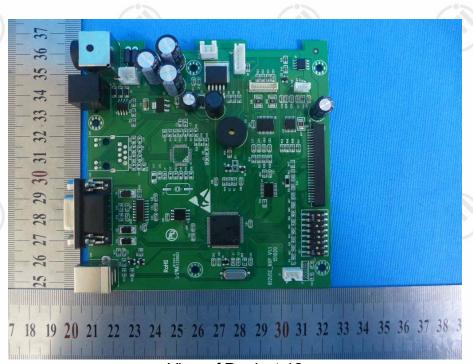

View of Product-12















Report No.: EED32I002833 Page 25 of 31

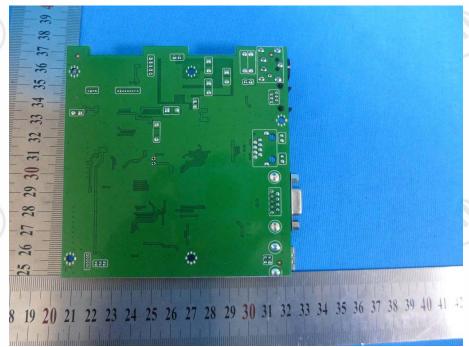

View of Product-13

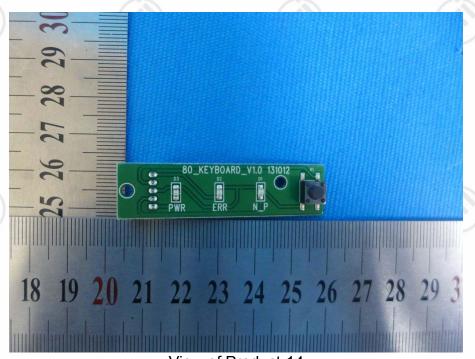

View of Product-14

















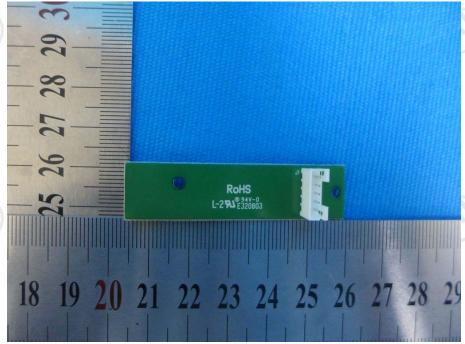

View of Product-15

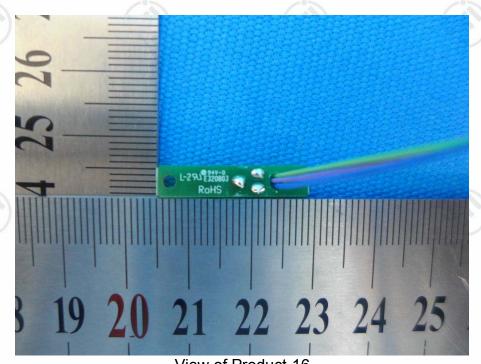

View of Product-16














Report No.: EED32I002833 Page 27 of 31

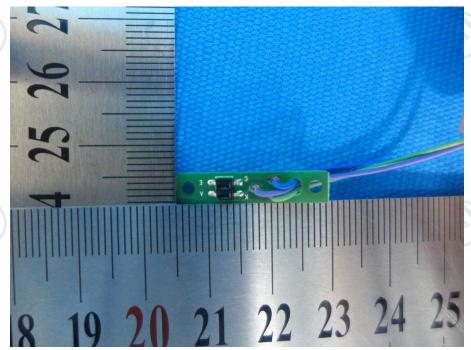

View of Product-17



View of Product-18













View of Product-19



View of Product-20






















View of Product-21

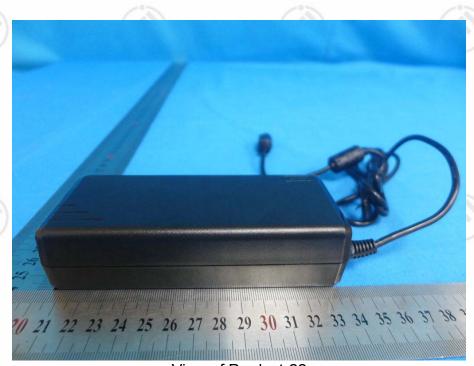

View of Product-22

















View of Product-23



View of Product-24














Report No.: EED32I002833 Page 31 of 31



View of Product-25

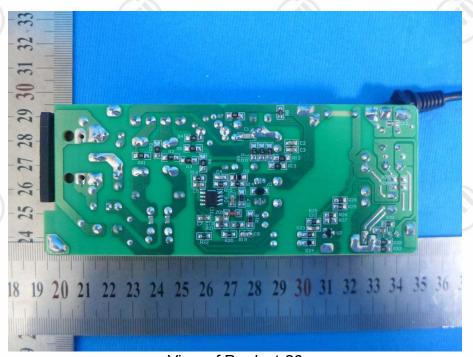

View of Product-26

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

Hotline: 400-6788-333 www.cti-cert.com E-mail: info@cti-cert.com Complaint call: 0755-33681700 Complaint E-mail: complaint@cti-cert.com