



## MEASUREMENT REPORT

### FCC PART 15.407 WLAN 802.11a/n/ac

---

**FCC ID:** 2AD6M-X20

**APPLICANT:** P2 Mobile Technologies Limited

**Application Type:** Certification

**Product:** MeshRanger X20 Dual 5GHz 802.11ac


**Model No.:** X20

**FCC Classification:** Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):** Part 15.407

**Test Procedure(s):** KDB 789033 D02v01r01, KDB 662911 D01v02r01  
KDB 644545 D03v01

**Test Date:** December 13, 2015 ~ January 16, 2016

Reviewed by :   
( Robin Wu )

Approved by :   
( Marlin Chen )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v01r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

### Revision History

| Report No.   | Version | Description  | Issue Date |
|--------------|---------|--------------|------------|
| 1511RSU00201 | Rev. 01 | Draft report | 01-19-2016 |
|              |         |              |            |

# CONTENTS

| Description                                        | Page      |
|----------------------------------------------------|-----------|
| <b>§2.1033 General Information .....</b>           | <b>6</b>  |
| <b>1. INTRODUCTION .....</b>                       | <b>7</b>  |
| 1.1. Scope .....                                   | 7         |
| 1.2. MRT Test Location .....                       | 7         |
| <b>2. PRODUCT INFORMATION .....</b>                | <b>8</b>  |
| 2.1. Equipment Description.....                    | 8         |
| 2.2. Frequency / Channel Operation .....           | 9         |
| 2.3. Description of Available Antennas .....       | 10        |
| 2.4. Description of Antenna RF Port.....           | 11        |
| 2.5. Test Mode.....                                | 12        |
| 2.6. Test Software .....                           | 12        |
| 2.7. Device Capabilities .....                     | 13        |
| 2.8. Test Configuration .....                      | 15        |
| 2.9. EMI Suppression Device(s)/Modifications ..... | 15        |
| 2.10. Labeling Requirements .....                  | 16        |
| <b>3. DESCRIPTION OF TEST .....</b>                | <b>17</b> |
| 3.1. Evaluation Procedure .....                    | 17        |
| 3.2. AC Line Conducted Emissions.....              | 17        |
| 3.3. Radiated Emissions .....                      | 18        |
| <b>4. ANTENNA REQUIREMENTS.....</b>                | <b>19</b> |
| <b>5. TEST EQUIPMENT CALIBRATION DATE .....</b>    | <b>20</b> |
| <b>6. MEASUREMENT UNCERTAINTY .....</b>            | <b>21</b> |
| <b>7. TEST RESULT .....</b>                        | <b>22</b> |
| 7.1. Summary .....                                 | 22        |
| 7.2. 26dB Bandwidth Measurement .....              | 24        |
| 7.2.1. Test Limit .....                            | 24        |
| 7.2.2. Test Procedure used.....                    | 24        |
| 7.2.3. Test Setting.....                           | 24        |
| 7.2.4. Test Setup .....                            | 24        |
| 7.2.5. Test Result.....                            | 25        |
| 7.3. 6dB Bandwidth Measurement .....               | 61        |
| 7.3.1. Test Limit .....                            | 61        |
| 7.3.2. Test Procedure used.....                    | 61        |

|                                                           |     |
|-----------------------------------------------------------|-----|
| 7.3.3. Test Setting.....                                  | 61  |
| 7.3.4. Test Setup .....                                   | 61  |
| 7.3.5. Test Result.....                                   | 62  |
| 7.4. Output Power Measurement .....                       | 84  |
| 7.4.1. Test Limit .....                                   | 84  |
| 7.4.2. Test Procedure Used .....                          | 84  |
| 7.4.3. Test Setting.....                                  | 84  |
| 7.4.4. Test Setup .....                                   | 84  |
| 7.4.5. Test Result.....                                   | 85  |
| 7.5. Transmit Power Control .....                         | 93  |
| 7.5.1. Test Limit .....                                   | 93  |
| 7.5.2. Test Procedure Used .....                          | 93  |
| 7.5.3. Test Setting.....                                  | 93  |
| 7.5.4. Test Setup .....                                   | 93  |
| 7.5.5. Test Result.....                                   | 93  |
| 7.6. Power Spectral Density Measurement .....             | 94  |
| 7.6.1. Test Limit .....                                   | 94  |
| 7.6.2. Test Procedure Used .....                          | 94  |
| 7.6.3. Test Setting.....                                  | 94  |
| 7.6.4. Test Setup .....                                   | 95  |
| 7.6.5. Test Result.....                                   | 96  |
| 7.7. Frequency Stability Measurement.....                 | 152 |
| 7.7.1. Test Limit .....                                   | 152 |
| 7.7.2. Test Procedure Used .....                          | 152 |
| 7.7.3. Test Setup .....                                   | 152 |
| 7.7.4. Test Result.....                                   | 153 |
| 7.8. Radiated Spurious Emission Measurement.....          | 154 |
| 7.8.1. Test Limit .....                                   | 154 |
| 7.8.2. Test Procedure Used .....                          | 154 |
| 7.8.3. Test Setting.....                                  | 154 |
| 7.8.4. Test Setup .....                                   | 155 |
| 7.8.5. Test Result.....                                   | 157 |
| 7.9. Radiated Restricted Band Edge Measurement .....      | 333 |
| 7.9.1. Test Limit .....                                   | 333 |
| 7.9.2. Test Result of Radiated Restricted Band Edge ..... | 335 |
| 7.10. AC Conducted Emissions Measurement.....             | 743 |
| 7.10.1. Test Limit .....                                  | 743 |
| 7.10.2. Test Procedure .....                              | 743 |
| 7.10.3. Test Setup .....                                  | 744 |

---

|                           |            |
|---------------------------|------------|
| 7.10.4. Test Result.....  | 745        |
| <b>8. CONCLUSION.....</b> | <b>749</b> |

## §2.1033 General Information

|                                  |                                                                                                                                   |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>                | P2 Mobile Technologies Limited                                                                                                    |
| <b>Applicant Address:</b>        | Unit 708, 7/F, Bio-Informatics Centre, No. 2 Science Park West Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong |
| <b>Manufacturer:</b>             | P2 Mobile Technologies Limited                                                                                                    |
| <b>Manufacturer Address:</b>     | Unit 708, 7/F, Bio-Informatics Centre, No. 2 Science Park West Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong |
| <b>Test Site:</b>                | MRT Technology (Suzhou) Co., Ltd                                                                                                  |
| <b>Test Site Address:</b>        | D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China                        |
| <b>MRT FCC Registration No.:</b> | 809388                                                                                                                            |
| <b>FCC Rule Part(s):</b>         | Part 15.407                                                                                                                       |
| <b>Model No.:</b>                | X20                                                                                                                               |
| <b>FCC ID:</b>                   | 2AD6M-X20                                                                                                                         |
| <b>Test Device Serial No.:</b>   | N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering   |
| <b>FCC Classification:</b>       | Unlicensed National Information Infrastructure (UNII)                                                                             |

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

|                                                |                                                                                                                                                                   |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name                                   | MeshRanger X20 Dual 5GHz 802.11ac                                                                                                                                 |
| Model No.                                      | X20                                                                                                                                                               |
| Frequency Range                                | For 802.11a/n-HT20/ac-VHT20:<br>5180~5240MHz, 5745~5825MHz<br>For 802.11n-HT40/ac-VHT40:<br>5190~5230MHz, 5755~5795MHz<br>For 802.11ac-VHT80:<br>5210MHz, 5775MHz |
| Maximum Average Output Power with 5GHz Card #1 | 802.11a: 29.31dBm<br>802.11n-HT20: 29.19dBm<br>802.11n-HT40: 28.47dBm<br>802.11ac-VHT20: 29.29dBm<br>802.11ac-VHT40: 28.67dBm<br>802.11ac-VHT80: 20.85dBm         |
| Maximum Average Output Power with 5GHz Card #2 | 802.11a: 28.60dBm<br>802.11n-HT20: 28.52dBm<br>802.11n-HT40: 28.05dBm<br>802.11ac-VHT20: 28.58dBm<br>802.11ac-VHT40: 28.08dBm<br>802.11ac-VHT80: 14.30dBm         |
| Type of Modulation                             | 802.11a/n/ac: OFDM                                                                                                                                                |



## 2.2. Frequency / Channel Operation

Channel List for 802.11a/n-HT20/ac-VHT20

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 36      | 5180 MHz  | 40      | 5200 MHz  | 44      | 5220 MHz  |
| 48      | 5240 MHz  | 149     | 5745 MHz  | 153     | 5765 MHz  |
| 157     | 5785 MHz  | 161     | 5805 MHz  | 165     | 5825 MHz  |

Channel List for 802.11n-HT40/ac-VHT40

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 38      | 5190 MHz  | 46      | 5230 MHz  | 151     | 5755 MHz  |
| 159     | 5795 MHz  | --      | --        | --      | --        |

Channel List for 802.11ac-VHT80

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 42      | 5210 MHz  | 155     | 5775 MHz  | --      | --        |

### 2.3. Description of Available Antennas


| Antenna Type                                                                      | Frequency Band (GHz) | Tx Paths | Max Peak Gain (dBi) | Beam Forming Directional Gain (dBi) | CDD Directional Gain (dBi) |         |
|-----------------------------------------------------------------------------------|----------------------|----------|---------------------|-------------------------------------|----------------------------|---------|
|                                                                                   |                      |          |                     |                                     | For Power                  | For PSD |
| Internal Antenna                                                                  |                      |          |                     |                                     |                            |         |
|  | 5                    | 2        | 18                  | 21                                  | 18                         | 21      |
| External Antenna                                                                  |                      |          |                     |                                     |                            |         |
|  | 5                    | 2        | 20                  | 23                                  | 20                         | 23      |

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated. For CDD transmissions, directional gain is calculated as follows,  $N_{ANT} = 2$ ,  $N_{SS} = 1$ .
  - If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.
    - For power spectral density (PSD) measurements on all devices,  
Array Gain =  $10 \log (N_{ANT}/N_{SS})$  dB = 3.01;
    - For power measurements on IEEE 802.11 devices,  
Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;
- The EUT supports Beam Forming technology for 802.11n/ac mode, and exclude 802.11a mode. Correlated signals include, but are not limited to, signals transmitted in any of the following modes:
 

Any transmit Beam Forming mode, whether fixed or adaptive (e.g., phased array modes, closed loop MIMO modes, Transmitter Adaptive Antenna modes, Maximum Ratio Transmission (MRT) modes, and Statistical Eigen Beam Forming (EBF) modes).

  - All antennas have the same gain,  $G_{ANT}$ :  
Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{SS})$  dBi, where  $N_{SS}$  = the number of independent spatial streams of data and  $G_{ANT}$  is the antenna gain in dBi.

## 2.4. Description of Antenna RF Port
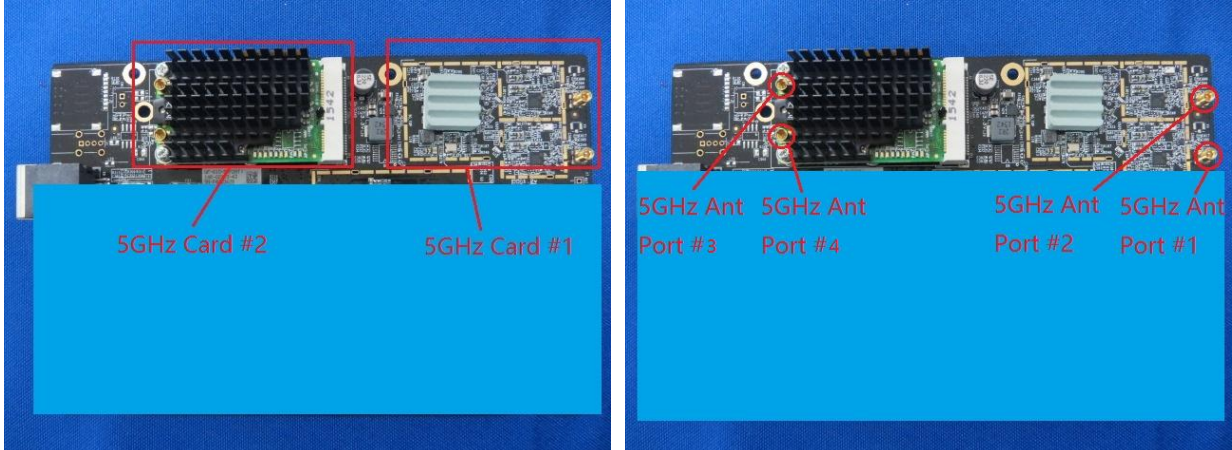
| Antenna RF Port                                                                    |                   |       |                   |       |
|------------------------------------------------------------------------------------|-------------------|-------|-------------------|-------|
| --                                                                                 | 5GHz Card #1 Port |       | 5GHz Card #2 Port |       |
| Software Control Port                                                              | Ant 1             | Ant 2 | Ant 1             | Ant 2 |
|  |                   |       |                   |       |

Note: The EUT was fixed point-to-point access points, it was for fixed point-to-point usage. During the test, the 5GHz card #1 configured internal antenna fixed, and the 5GHz card #2 configured external antenna fixed.

## 2.5. Test Mode

|           |                                                                 |
|-----------|-----------------------------------------------------------------|
| Test Mode | Mode 1: Transmit by 802.11a with card #1 and antenna #1         |
|           | Mode 2: Transmit by 802.11n-HT20 with card #1 and antenna #1    |
|           | Mode 3: Transmit by 802.11n-HT40 with card #1 and antenna #1    |
|           | Mode 4: Transmit by 802.11ac-VHT20 with card #1 and antenna #1  |
|           | Mode 5: Transmit by 802.11ac-VHT40 with card #1 and antenna #1  |
|           | Mode 6: Transmit by 802.11ac-VHT80 with card #1 and antenna #1  |
|           | Mode 7: Transmit by 802.11a with card #2 and antenna #2         |
|           | Mode 8: Transmit by 802.11n-HT20 with card #2 and antenna #2    |
|           | Mode 9: Transmit by 802.11n-HT40 with card #2 and antenna #2    |
|           | Mode 10: Transmit by 802.11ac-VHT20 with card #2 and antenna #2 |
|           | Mode 11: Transmit by 802.11ac-VHT40 with card #2 and antenna #2 |
|           | Mode 12: Transmit by 802.11ac-VHT80 with card #2 and antenna #2 |

## 2.6. Test Software

The test utility software used during testing was “ART2-GUI Version: 2.3”.


## 2.7. Device Capabilities

This device contains the following capabilities:


5GHz WLAN (UNII)

**Note:** 5GHz (UNII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


| Test Mode           | Duty Cycle | Test Mode      | Duty Cycle |
|---------------------|------------|----------------|------------|
| <b>5GHz Card #1</b> |            |                |            |
| 802.11a             | 94.77%     | 802.11n-HT20   | 94.51%     |
| 802.11n-HT40        | 90.48%     | 802.11ac-VHT20 | 94.91%     |
| 802.11ac-VHT40      | 90.33%     | 802.11ac-VHT80 | 81.74%     |
| <b>5GHz Card #2</b> |            |                |            |
| 802.11a             | 94.96%     | 802.11n-HT20   | 94.50%     |
| 802.11n-HT40        | 89.08%     | 802.11ac-VHT20 | 94.68%     |
| 802.11ac-VHT40      | 90.28%     | 802.11ac-VHT80 | 82.59%     |

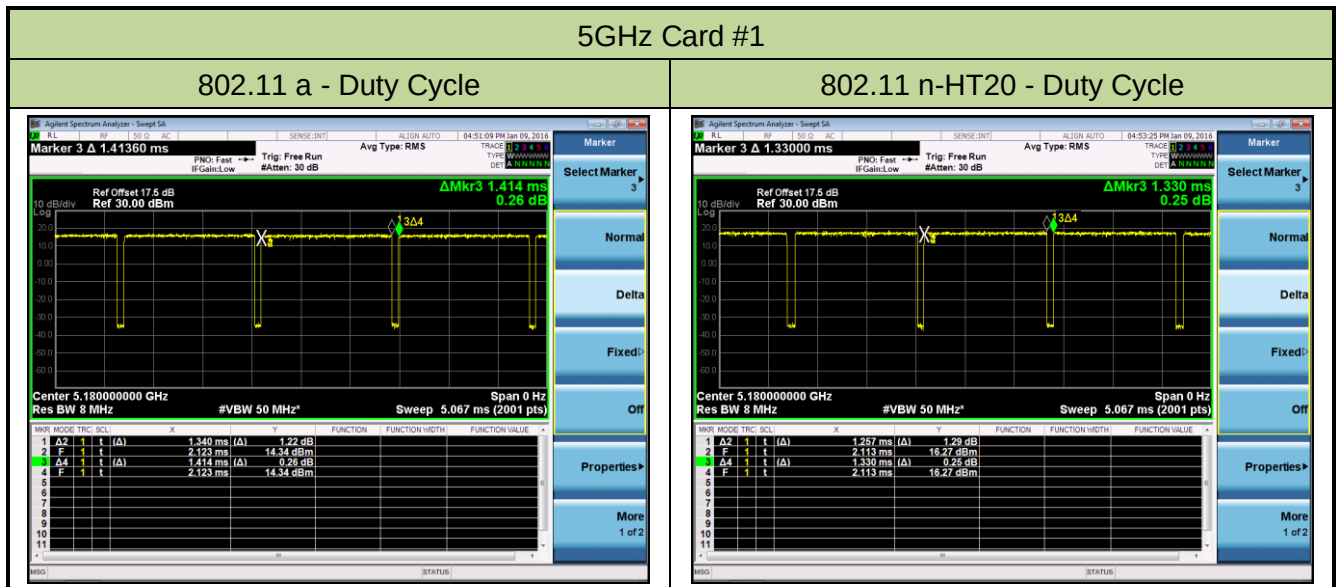


## 802.11 n-HT40 - Duty Cycle

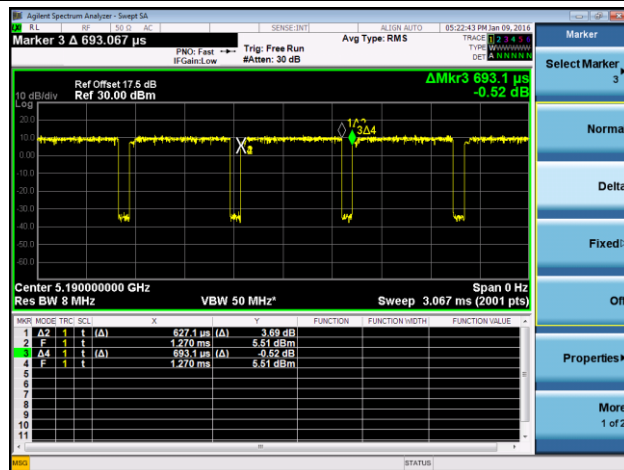


## 802.11 ac-VHT20 - Duty Cycle

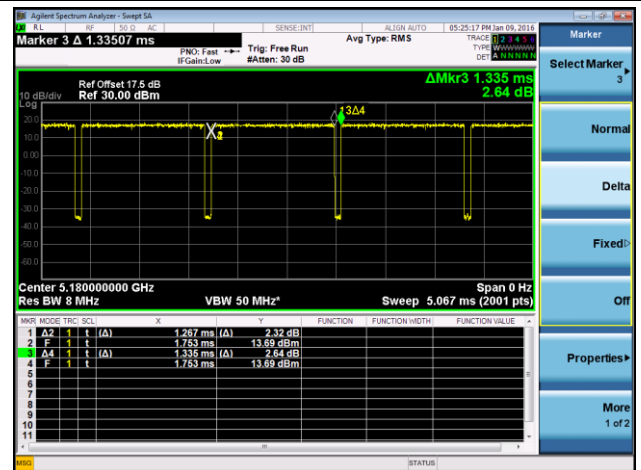

## 802.11 ac-VHT40 - Duty Cycle

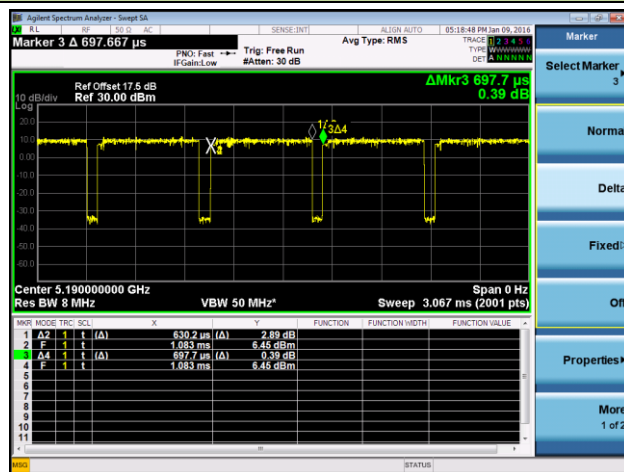


## 802.11 ac-VHT80 - Duty Cycle

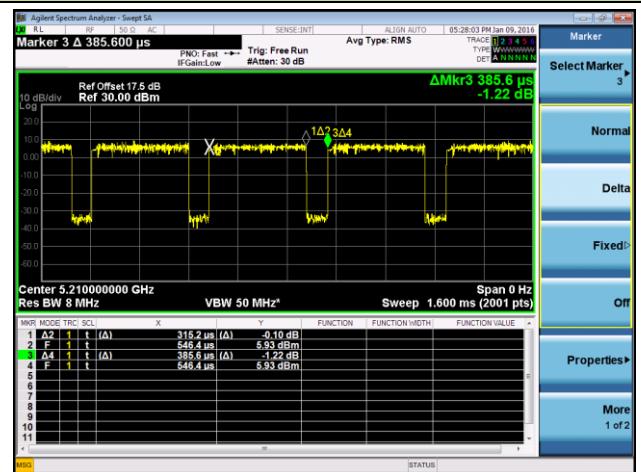



## 5GHz Card #2

## 802.11 a - Duty Cycle

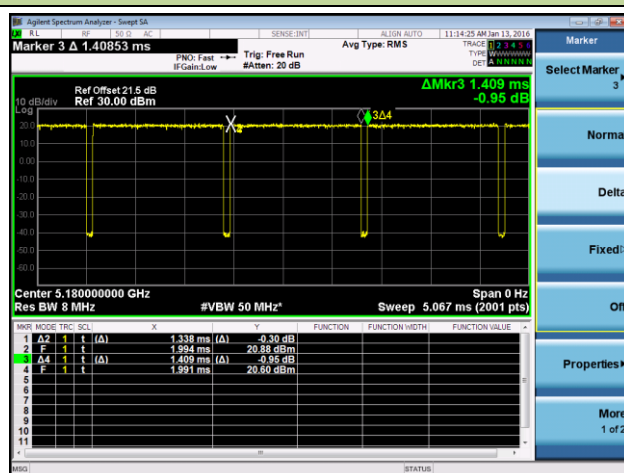

## 802.11 n-HT20 - Duty Cycle

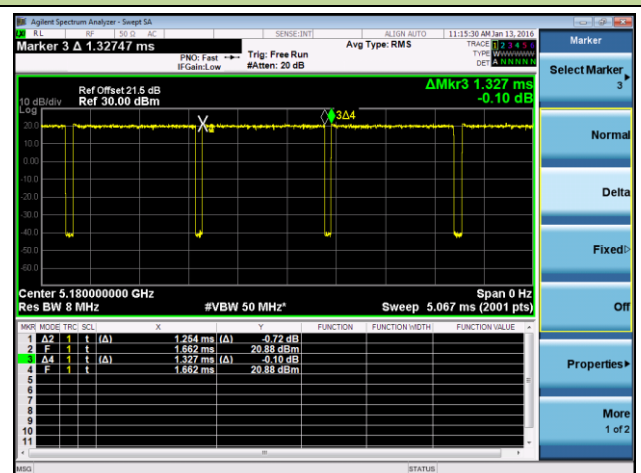

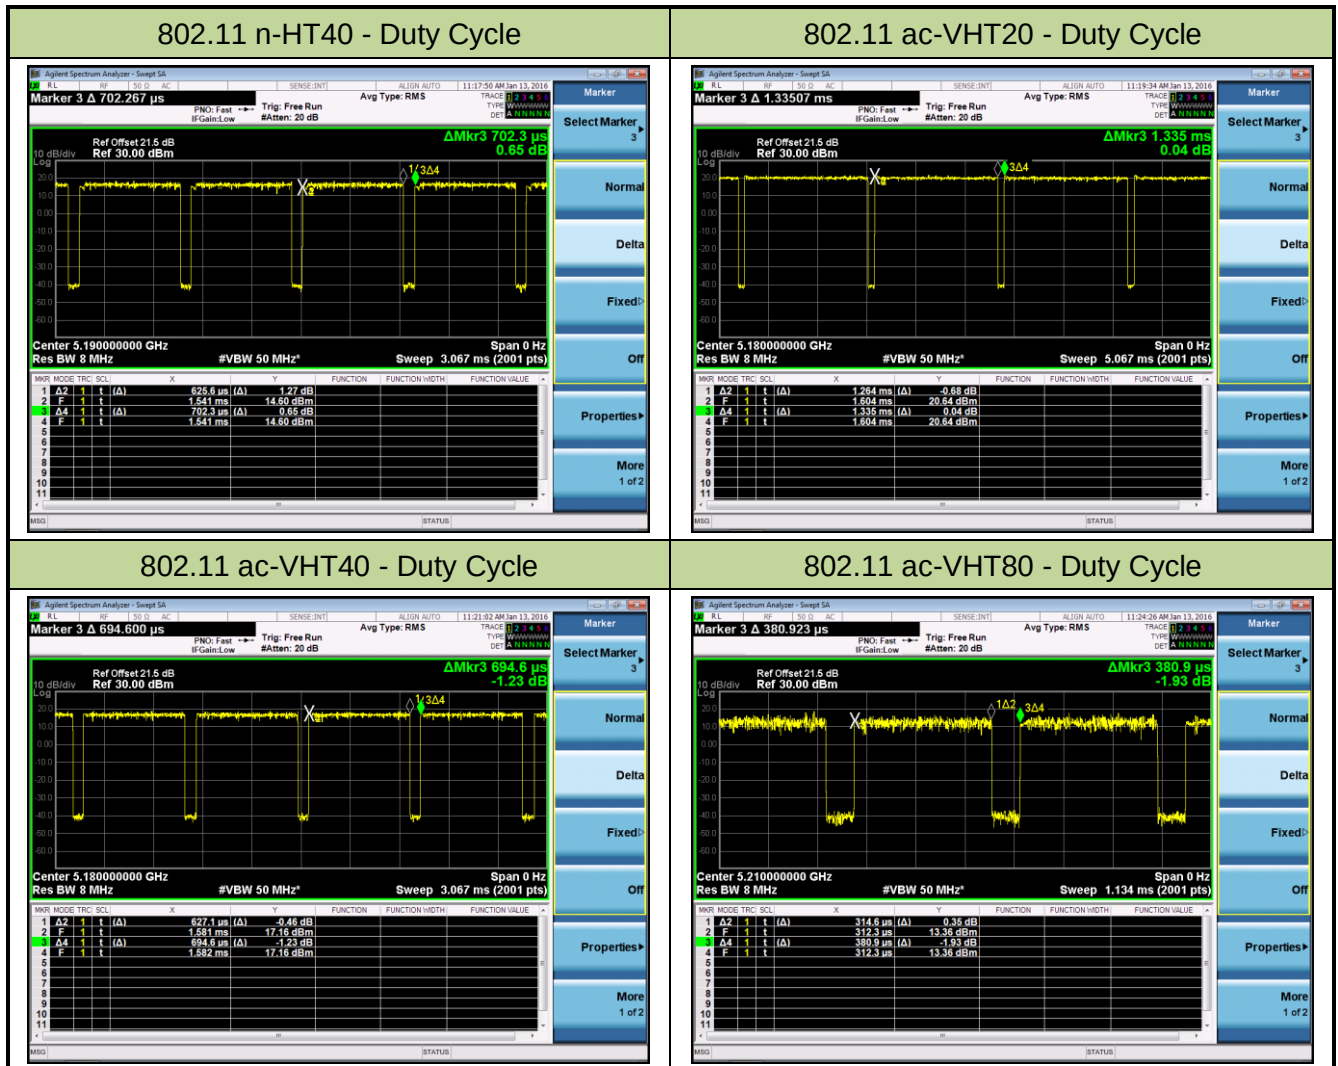

## 2.8. Test Configuration

The **MeshRanger X20 Dual 5GHz 802.11ac FCC ID: 2AD6M-X20** was tested per the guidance of KDB 789033 D02v01r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.10. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.



### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v01r01 were used in the measurement of the **MeshRanger X20 Dual 5GHz 802.11ac FCC ID: 2AD6M-X20**.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.10.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

### **Conclusion:**

The **MeshRanger X20 Dual 5GHz 802.11ac FCC ID: 2AD6M-X20** unit belongs to the professional installation of equipment, and doesn't need to comply with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions - SR2

| Instrument                 | Manufacturer | Type No. | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|----------|-------------|----------------|----------------|
| EMI Test Receiver          | R&S          | ESR7     | MRTSUE06001 | 1 year         | 2016/11/03     |
| Two-Line V-Network         | R&S          | ENV216   | MRTSUE06002 | 1 year         | 2016/11/03     |
| Two-Line V-Network         | R&S          | ENV216   | MRTSUE06003 | 1 year         | 2016/11/03     |
| Temperature/Humidity Meter | Yuhuaze      | HTC-2    | MRTSUE06182 | 1 year         | 2016/12/20     |

### Radiated Emissions - AC1

| Instrument                 | Manufacturer | Type No.  | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|-----------|-------------|----------------|----------------|
| Spectrum Analyzer          | Agilent      | E4447A    | MRTSUE06028 | 1 year         | 2016/06/23     |
| EMI Test Receiver          | R&S          | ESR7      | MRTSUE06001 | 1 year         | 2016/11/03     |
| Preamplifier               | Agilent      | 83017A    | MRTSUE06076 | 1 year         | 2016/03/29     |
| Preamplifier               | Schwarzbeck  | BBV9721   | MRTSUE06121 | 1 year         | 2016/04/15     |
| Loop Antenna               | Schwarzbeck  | FMZB1519  | MRTSUE06025 | 1 year         | 2016/12/14     |
| TRILOG Antenna             | Schwarzbeck  | VULB9162  | MRTSUE06022 | 1 year         | 2016/11/07     |
| Broad-Band Horn Antenna    | Schwarzbeck  | BBHA9120D | MRTSUE06023 | 1 year         | 2016/11/07     |
| Broadband Horn Antenna     | Schwarzbeck  | BBHA9170  | MRTSUE06024 | 1 year         | 2017/01/04     |
| Temperature/Humidity Meter | Yuhuaze      | HTC-2     | MRTSUE06183 | 1 year         | 2016/12/20     |

### Conducted Test Equipment - TR3

| Instrument                 | Manufacturer | Type No. | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|----------|-------------|----------------|----------------|
| Spectrum Analyzer          | Agilent      | N9020A   | MRTSUE06106 | 1 year         | 2016/05/08     |
| USB Wideband Power Sensor  | Boonton      | 55006    | MRTSUE06109 | 1 year         | 2016/05/08     |
| Temperature/Humidity Meter | Yuhuaze      | HTC-2    | MRTSUE06180 | 1 year         | 2016/12/20     |

| Software | Version | Function          |
|----------|---------|-------------------|
| e3       | V8.3.5  | EMI Test Software |

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

|                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------|
| AC Conducted Emission Measurement - SR2                                                                               |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>150kHz~30MHz: 3.46dB                        |
| Radiated Emission Measurement - AC1                                                                                   |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>9kHz ~ 1GHz: 4.18dB<br>1GHz ~ 40GHz: 4.76dB |

## 7. TEST RESULT

### 7.1. Summary

**Product Name:** MeshRanger X20 Dual 5GHz 802.11ac  
**FCC ID:** 2AD6M-X20  
**FCC Classification:** Unlicensed National Information Infrastructure (UNII)  
**Data Rate(s) Tested:** 6Mbps ~ 54Mbps (a);  
6.5/7.2Mbps ~ 130/144.4Mbps (n-HT20MHz BW);  
13.5/15.0Mbps ~ 270/300Mbps (n-HT40MHz BW);  
6.5/7.2Mbps ~ 156/173.4Mbps (ac-VHT20MHz BW);  
13.5/15.0Mbps ~ 360/400Mbps (ac-VHT40MHz BW);  
29.3/32.5Mbps ~ 780/866.6Mbps (ac-VHT80MHz BW)

| FCC Part Section(s)                      | Test Description                                                              | Test Limit                                                                     | Test Condition | Test Result | Reference         |
|------------------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|-------------|-------------------|
| 15.407(a)                                | 26dB Bandwidth                                                                | N/A                                                                            | Conducted      | Pass        | Section 7.2       |
| 15.407(e)                                | 6dB Bandwidth                                                                 | $\geq 500\text{kHz}$                                                           |                | Pass        | Section 7.3       |
| 15.407(a)(1)(iii), (3)                   | Maximum Conducted Output Power                                                | $< 30\text{dBm U-NII-1}$<br>$< 30\text{dBm U-NII-3}$                           |                | Pass        | Section 7.4       |
| 15.407(h)(1)                             | Transmit Power Control                                                        | $< 24\text{ dBm}$                                                              |                | N/A         | Section 7.5       |
| 15.407(a)(1)(iii), (3), (5)              | Peak Power Spectral Density                                                   | $< 17\text{dBm/MHz U-NII-1}$<br>$< 14\text{dBm/500kHz U-NII-3}$                |                | Pass        | Section 7.6       |
| 15.407(g)                                | Frequency Stability                                                           | N/A                                                                            |                | Pass        | Section 7.7       |
| 15.407(b)(1), (4)                        | Undesirable Emissions                                                         | $< -27\text{dBm/MHz EIRP}$<br>$< -17\text{dBm/MHz EIRP}$                       | Radiated       | Pass        | Section 7.8 & 7.9 |
| 15.205, 15.209<br>15.407(b)(5), (6), (7) | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 |                | Pass        |                   |
| 15.207                                   | AC Conducted Emissions<br>150kHz - 30MHz                                      | $< \text{FCC 15.207 limits}$                                                   | Line Conducted | Pass        | Section 7.10      |

#### Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the

system to connect the EUT to the analyzer at all frequencies of interest.

- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) Test Items “26dB Bandwidth” & “6dB Bandwidth” have been assessed MIMO transmission, and showed the worst test data in this report.

## 7.2. 26dB Bandwidth Measurement

### 7.2.1. Test Limit

N/A


### 7.2.2. Test Procedure used

KDB 789033 D02v01r01 - Section C.1

### 7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold.

### 7.2.4. Test Setup

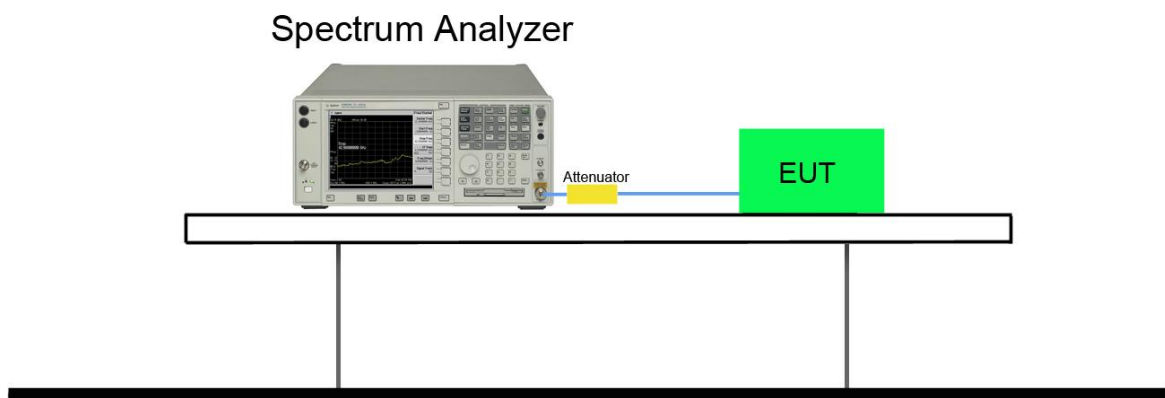



## 7.2.5. Test Result

### 5GHz Card #1

| Test Mode      | Data Rate (Mbps) | Channel No. | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Result |
|----------------|------------------|-------------|-----------------|----------------------|---------------------|--------|
| Ant 1          |                  |             |                 |                      |                     |        |
| 802.11a        | 6                | 36          | 5180            | 22.45                | 16.68               | Pass   |
| 802.11a        | 6                | 44          | 5220            | 23.60                | 16.76               | Pass   |
| 802.11a        | 6                | 48          | 5240            | 22.28                | 16.71               | Pass   |
| 802.11a        | 6                | 149         | 5745            | 21.47                | 16.68               | Pass   |
| 802.11a        | 6                | 157         | 5785            | 21.75                | 16.67               | Pass   |
| 802.11a        | 6                | 165         | 5825            | 21.69                | 16.66               | Pass   |
| 802.11n-HT20   | 6.5              | 36          | 5180            | 22.33                | 17.83               | Pass   |
| 802.11n-HT20   | 6.5              | 44          | 5220            | 24.26                | 17.85               | Pass   |
| 802.11n-HT20   | 6.5              | 48          | 5240            | 22.90                | 17.82               | Pass   |
| 802.11n-HT20   | 6.5              | 149         | 5745            | 22.76                | 17.84               | Pass   |
| 802.11n-HT20   | 6.5              | 157         | 5785            | 22.68                | 17.82               | Pass   |
| 802.11n-HT20   | 6.5              | 165         | 5825            | 23.11                | 17.83               | Pass   |
| 802.11n-HT40   | 13.5             | 38          | 5190            | 44.07                | 36.49               | Pass   |
| 802.11n-HT40   | 13.5             | 46          | 5230            | 42.80                | 36.41               | Pass   |
| 802.11n-HT40   | 13.5             | 151         | 5755            | 44.31                | 36.53               | Pass   |
| 802.11n-HT40   | 13.5             | 159         | 5795            | 44.48                | 36.46               | Pass   |
| 802.11ac-VHT20 | 6.5              | 36          | 5180            | 22.42                | 17.82               | Pass   |
| 802.11ac-VHT20 | 6.5              | 44          | 5220            | 23.43                | 17.84               | Pass   |
| 802.11ac-VHT20 | 6.5              | 48          | 5240            | 23.58                | 17.82               | Pass   |
| 802.11ac-VHT20 | 6.5              | 149         | 5745            | 22.58                | 17.82               | Pass   |
| 802.11ac-VHT20 | 6.5              | 157         | 5785            | 22.62                | 17.84               | Pass   |
| 802.11ac-VHT20 | 6.5              | 165         | 5825            | 22.87                | 17.82               | Pass   |
| 802.11ac-VHT40 | 13.5             | 38          | 5190            | 43.77                | 36.49               | Pass   |
| 802.11ac-VHT40 | 13.5             | 46          | 5230            | 44.65                | 36.47               | Pass   |
| 802.11ac-VHT40 | 13.5             | 151         | 5755            | 43.46                | 36.46               | Pass   |
| 802.11ac-VHT40 | 13.5             | 159         | 5795            | 44.05                | 36.42               | Pass   |
| 802.11ac-VHT80 | 29.3             | 42          | 5210            | 87.66                | 76.04               | Pass   |
| 802.11ac-VHT80 | 29.3             | 155         | 5775            | 86.01                | 75.91               | Pass   |

| Test Mode      | Data Rate (Mbps) | Channel No. | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Result |
|----------------|------------------|-------------|-----------------|----------------------|---------------------|--------|
| Ant 2          |                  |             |                 |                      |                     |        |
| 802.11a        | 6                | 36          | 5180            | 22.11                | 16.68               | Pass   |
| 802.11a        | 6                | 44          | 5220            | 22.81                | 16.72               | Pass   |
| 802.11a        | 6                | 48          | 5240            | 22.19                | 16.69               | Pass   |
| 802.11a        | 6                | 149         | 5745            | 21.13                | 16.65               | Pass   |
| 802.11a        | 6                | 157         | 5785            | 21.70                | 16.66               | Pass   |
| 802.11a        | 6                | 165         | 5825            | 21.55                | 16.68               | Pass   |
| 802.11n-HT20   | 6.5              | 36          | 5180            | 22.82                | 17.82               | Pass   |
| 802.11n-HT20   | 6.5              | 44          | 5220            | 23.61                | 17.87               | Pass   |
| 802.11n-HT20   | 6.5              | 48          | 5240            | 23.22                | 17.83               | Pass   |
| 802.11n-HT20   | 6.5              | 149         | 5745            | 22.19                | 17.79               | Pass   |
| 802.11n-HT20   | 6.5              | 157         | 5785            | 22.01                | 17.77               | Pass   |
| 802.11n-HT20   | 6.5              | 165         | 5825            | 22.98                | 17.83               | Pass   |
| 802.11n-HT40   | 13.5             | 38          | 5190            | 44.12                | 36.45               | Pass   |
| 802.11n-HT40   | 13.5             | 46          | 5230            | 44.14                | 36.51               | Pass   |
| 802.11n-HT40   | 13.5             | 151         | 5755            | 45.05                | 36.50               | Pass   |
| 802.11n-HT40   | 13.5             | 159         | 5795            | 45.51                | 36.50               | Pass   |
| 802.11ac-VHT20 | 6.5              | 36          | 5180            | 22.07                | 17.80               | Pass   |
| 802.11ac-VHT20 | 6.5              | 44          | 5220            | 23.70                | 17.82               | Pass   |
| 802.11ac-VHT20 | 6.5              | 48          | 5240            | 22.70                | 17.83               | Pass   |
| 802.11ac-VHT20 | 6.5              | 149         | 5745            | 22.55                | 17.82               | Pass   |
| 802.11ac-VHT20 | 6.5              | 157         | 5785            | 22.12                | 17.82               | Pass   |
| 802.11ac-VHT20 | 6.5              | 165         | 5825            | 22.82                | 17.78               | Pass   |
| 802.11ac-VHT40 | 13.5             | 38          | 5190            | 44.55                | 36.44               | Pass   |
| 802.11ac-VHT40 | 13.5             | 46          | 5230            | 44.46                | 36.44               | Pass   |
| 802.11ac-VHT40 | 13.5             | 151         | 5755            | 44.15                | 36.45               | Pass   |
| 802.11ac-VHT40 | 13.5             | 159         | 5795            | 44.12                | 36.45               | Pass   |
| 802.11ac-VHT80 | 29.3             | 42          | 5210            | 87.40                | 75.98               | Pass   |
| 802.11ac-VHT80 | 29.3             | 155         | 5775            | 89.83                | 75.98               | Pass   |

| Test Mode         | Data Rate (Mbps) | Channel No. | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Result |
|-------------------|------------------|-------------|-----------------|----------------------|---------------------|--------|
| Ant 1 / Ant 1 + 2 |                  |             |                 |                      |                     |        |
| 802.11a           | 6                | 36          | 5180            | 21.53                | 16.67               | Pass   |
| 802.11a           | 6                | 44          | 5220            | 22.91                | 16.73               | Pass   |
| 802.11a           | 6                | 48          | 5240            | 22.07                | 16.72               | Pass   |
| 802.11a           | 6                | 149         | 5745            | 22.04                | 16.69               | Pass   |
| 802.11a           | 6                | 157         | 5785            | 23.38                | 16.69               | Pass   |
| 802.11a           | 6                | 165         | 5825            | 21.14                | 16.63               | Pass   |
| 802.11n-HT20      | 6.5              | 36          | 5180            | 22.04                | 17.79               | Pass   |
| 802.11n-HT20      | 6.5              | 44          | 5220            | 22.56                | 17.82               | Pass   |
| 802.11n-HT20      | 6.5              | 48          | 5240            | 23.33                | 17.83               | Pass   |
| 802.11n-HT20      | 6.5              | 149         | 5745            | 22.11                | 17.77               | Pass   |
| 802.11n-HT20      | 6.5              | 157         | 5785            | 22.52                | 17.79               | Pass   |
| 802.11n-HT20      | 6.5              | 165         | 5825            | 23.21                | 17.82               | Pass   |
| 802.11n-HT40      | 13.5             | 38          | 5190            | 43.94                | 36.45               | Pass   |
| 802.11n-HT40      | 13.5             | 46          | 5230            | 45.27                | 36.47               | Pass   |
| 802.11n-HT40      | 13.5             | 151         | 5755            | 43.40                | 36.46               | Pass   |
| 802.11n-HT40      | 13.5             | 159         | 5795            | 44.11                | 36.36               | Pass   |
| 802.11ac-VHT20    | 6.5              | 36          | 5180            | 22.82                | 17.81               | Pass   |
| 802.11ac-VHT20    | 6.5              | 44          | 5220            | 22.86                | 17.82               | Pass   |
| 802.11ac-VHT20    | 6.5              | 48          | 5240            | 22.88                | 17.85               | Pass   |
| 802.11ac-VHT20    | 6.5              | 149         | 5745            | 22.39                | 17.82               | Pass   |
| 802.11ac-VHT20    | 6.5              | 157         | 5785            | 22.50                | 17.82               | Pass   |
| 802.11ac-VHT20    | 6.5              | 165         | 5825            | 22.71                | 17.80               | Pass   |
| 802.11ac-VHT40    | 13.5             | 38          | 5190            | 44.62                | 36.50               | Pass   |
| 802.11ac-VHT40    | 13.5             | 46          | 5230            | 44.30                | 36.40               | Pass   |
| 802.11ac-VHT40    | 13.5             | 151         | 5755            | 43.69                | 36.42               | Pass   |
| 802.11ac-VHT40    | 13.5             | 159         | 5795            | 43.63                | 36.42               | Pass   |
| 802.11ac-VHT80    | 29.3             | 42          | 5210            | 85.83                | 76.10               | Pass   |
| 802.11ac-VHT80    | 29.3             | 155         | 5775            | 84.03                | 75.62               | Pass   |

### 5GHz Card #2

| Test Mode      | Data Rate (Mbps) | Channel No. | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Result |
|----------------|------------------|-------------|-----------------|----------------------|---------------------|--------|
| Ant 1          |                  |             |                 |                      |                     |        |
| 802.11a        | 6                | 36          | 5180            | 22.77                | 16.72               | Pass   |
| 802.11a        | 6                | 44          | 5220            | 23.34                | 16.72               | Pass   |
| 802.11a        | 6                | 48          | 5240            | 23.00                | 16.76               | Pass   |
| 802.11a        | 6                | 149         | 5745            | 21.14                | 16.69               | Pass   |
| 802.11a        | 6                | 157         | 5785            | 23.50                | 16.75               | Pass   |
| 802.11a        | 6                | 165         | 5825            | 21.97                | 16.67               | Pass   |
| 802.11n-HT20   | 6.5              | 36          | 5180            | 22.75                | 17.80               | Pass   |
| 802.11n-HT20   | 6.5              | 44          | 5220            | 24.37                | 17.89               | Pass   |
| 802.11n-HT20   | 6.5              | 48          | 5240            | 23.40                | 17.88               | Pass   |
| 802.11n-HT20   | 6.5              | 149         | 5745            | 23.07                | 17.81               | Pass   |
| 802.11n-HT20   | 6.5              | 157         | 5785            | 23.62                | 17.87               | Pass   |
| 802.11n-HT20   | 6.5              | 165         | 5825            | 22.91                | 17.81               | Pass   |
| 802.11n-HT40   | 13.5             | 38          | 5190            | 45.03                | 36.52               | Pass   |
| 802.11n-HT40   | 13.5             | 46          | 5230            | 46.03                | 36.55               | Pass   |
| 802.11n-HT40   | 13.5             | 151         | 5755            | 44.50                | 36.49               | Pass   |
| 802.11n-HT40   | 13.5             | 159         | 5795            | 43.65                | 36.48               | Pass   |
| 802.11ac-VHT20 | 6.5              | 36          | 5180            | 23.37                | 17.84               | Pass   |
| 802.11ac-VHT20 | 6.5              | 44          | 5220            | 23.90                | 17.86               | Pass   |
| 802.11ac-VHT20 | 6.5              | 48          | 5240            | 23.56                | 17.85               | Pass   |
| 802.11ac-VHT20 | 6.5              | 149         | 5745            | 23.64                | 17.82               | Pass   |
| 802.11ac-VHT20 | 6.5              | 157         | 5785            | 23.58                | 17.87               | Pass   |
| 802.11ac-VHT20 | 6.5              | 165         | 5825            | 22.44                | 17.80               | Pass   |
| 802.11ac-VHT40 | 13.5             | 38          | 5190            | 44.46                | 36.51               | Pass   |
| 802.11ac-VHT40 | 13.5             | 46          | 5230            | 50.41                | 36.70               | Pass   |
| 802.11ac-VHT40 | 13.5             | 151         | 5755            | 44.22                | 36.45               | Pass   |
| 802.11ac-VHT40 | 13.5             | 159         | 5795            | 44.87                | 36.43               | Pass   |
| 802.11ac-VHT80 | 29.3             | 42          | 5210            | 85.13                | 75.77               | Pass   |
| 802.11ac-VHT80 | 29.3             | 155         | 5775            | 85.04                | 75.72               | Pass   |


| Test Mode      | Data Rate (Mbps) | Channel No. | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Result |
|----------------|------------------|-------------|-----------------|----------------------|---------------------|--------|
| Ant 2          |                  |             |                 |                      |                     |        |
| 802.11a        | 6                | 36          | 5180            | 21.67                | 16.65               | Pass   |
| 802.11a        | 6                | 44          | 5220            | 22.52                | 16.70               | Pass   |
| 802.11a        | 6                | 48          | 5240            | 21.58                | 16.68               | Pass   |
| 802.11a        | 6                | 149         | 5745            | 22.16                | 16.70               | Pass   |
| 802.11a        | 6                | 157         | 5785            | 23.08                | 16.76               | Pass   |
| 802.11a        | 6                | 165         | 5825            | 22.58                | 16.71               | Pass   |
| 802.11n-HT20   | 6.5              | 36          | 5180            | 22.97                | 17.82               | Pass   |
| 802.11n-HT20   | 6.5              | 44          | 5220            | 22.67                | 17.84               | Pass   |
| 802.11n-HT20   | 6.5              | 48          | 5240            | 23.38                | 17.81               | Pass   |
| 802.11n-HT20   | 6.5              | 149         | 5745            | 22.50                | 17.81               | Pass   |
| 802.11n-HT20   | 6.5              | 157         | 5785            | 23.50                | 17.82               | Pass   |
| 802.11n-HT20   | 6.5              | 165         | 5825            | 22.72                | 17.80               | Pass   |
| 802.11n-HT40   | 13.5             | 38          | 5190            | 44.06                | 36.49               | Pass   |
| 802.11n-HT40   | 13.5             | 46          | 5230            | 45.19                | 36.45               | Pass   |
| 802.11n-HT40   | 13.5             | 151         | 5755            | 42.82                | 36.39               | Pass   |
| 802.11n-HT40   | 13.5             | 159         | 5795            | 45.75                | 36.49               | Pass   |
| 802.11ac-VHT20 | 6.5              | 36          | 5180            | 22.03                | 17.80               | Pass   |
| 802.11ac-VHT20 | 6.5              | 44          | 5220            | 23.94                | 17.85               | Pass   |
| 802.11ac-VHT20 | 6.5              | 48          | 5240            | 22.76                | 17.82               | Pass   |
| 802.11ac-VHT20 | 6.5              | 149         | 5745            | 22.97                | 17.78               | Pass   |
| 802.11ac-VHT20 | 6.5              | 157         | 5785            | 22.44                | 17.82               | Pass   |
| 802.11ac-VHT20 | 6.5              | 165         | 5825            | 22.16                | 17.77               | Pass   |
| 802.11ac-VHT40 | 13.5             | 38          | 5190            | 42.47                | 36.46               | Pass   |
| 802.11ac-VHT40 | 13.5             | 46          | 5230            | 44.83                | 36.47               | Pass   |
| 802.11ac-VHT40 | 13.5             | 151         | 5755            | 43.26                | 36.41               | Pass   |
| 802.11ac-VHT40 | 13.5             | 159         | 5795            | 44.65                | 36.56               | Pass   |
| 802.11ac-VHT80 | 29.3             | 42          | 5210            | 87.63                | 75.91               | Pass   |
| 802.11ac-VHT80 | 29.3             | 155         | 5775            | 86.16                | 75.80               | Pass   |

| Test Mode         | Data Rate (Mbps) | Channel No. | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Result |
|-------------------|------------------|-------------|-----------------|----------------------|---------------------|--------|
| Ant 1 / Ant 1 + 2 |                  |             |                 |                      |                     |        |
| 802.11a           | 6                | 36          | 5180            | 22.00                | 16.69               | Pass   |
| 802.11a           | 6                | 44          | 5220            | 23.58                | 16.77               | Pass   |
| 802.11a           | 6                | 48          | 5240            | 23.72                | 16.75               | Pass   |
| 802.11a           | 6                | 149         | 5745            | 21.44                | 16.68               | Pass   |
| 802.11a           | 6                | 157         | 5785            | 22.84                | 16.70               | Pass   |
| 802.11a           | 6                | 165         | 5825            | 22.14                | 16.68               | Pass   |
| 802.11n-HT20      | 6.5              | 36          | 5180            | 22.24                | 17.81               | Pass   |
| 802.11n-HT20      | 6.5              | 44          | 5220            | 23.69                | 17.88               | Pass   |
| 802.11n-HT20      | 6.5              | 48          | 5240            | 24.30                | 17.86               | Pass   |
| 802.11n-HT20      | 6.5              | 149         | 5745            | 22.49                | 17.81               | Pass   |
| 802.11n-HT20      | 6.5              | 157         | 5785            | 22.90                | 17.80               | Pass   |
| 802.11n-HT20      | 6.5              | 165         | 5825            | 22.00                | 17.76               | Pass   |
| 802.11n-HT40      | 13.5             | 38          | 5190            | 44.27                | 36.49               | Pass   |
| 802.11n-HT40      | 13.5             | 46          | 5230            | 48.01                | 36.56               | Pass   |
| 802.11n-HT40      | 13.5             | 151         | 5755            | 43.51                | 36.46               | Pass   |
| 802.11n-HT40      | 13.5             | 159         | 5795            | 45.00                | 36.44               | Pass   |
| 802.11ac-VHT20    | 6.5              | 36          | 5180            | 22.51                | 17.83               | Pass   |
| 802.11ac-VHT20    | 6.5              | 44          | 5220            | 23.67                | 17.87               | Pass   |
| 802.11ac-VHT20    | 6.5              | 48          | 5240            | 23.69                | 17.87               | Pass   |
| 802.11ac-VHT20    | 6.5              | 149         | 5745            | 22.27                | 17.80               | Pass   |
| 802.11ac-VHT20    | 6.5              | 157         | 5785            | 22.09                | 17.82               | Pass   |
| 802.11ac-VHT20    | 6.5              | 165         | 5825            | 22.22                | 17.76               | Pass   |
| 802.11ac-VHT40    | 13.5             | 38          | 5190            | 44.84                | 36.50               | Pass   |
| 802.11ac-VHT40    | 13.5             | 46          | 5230            | 43.73                | 36.44               | Pass   |
| 802.11ac-VHT40    | 13.5             | 151         | 5755            | 43.96                | 36.37               | Pass   |
| 802.11ac-VHT40    | 13.5             | 159         | 5795            | 43.72                | 36.50               | Pass   |
| 802.11ac-VHT80    | 29.3             | 42          | 5210            | 87.26                | 75.93               | Pass   |
| 802.11ac-VHT80    | 29.3             | 155         | 5775            | 84.34                | 75.74               | Pass   |


## 5GHz Card #1

### 802.11a 26dB Bandwidth & 99% Bandwidth - Ant 1


#### Channel 36 (5180MHz)

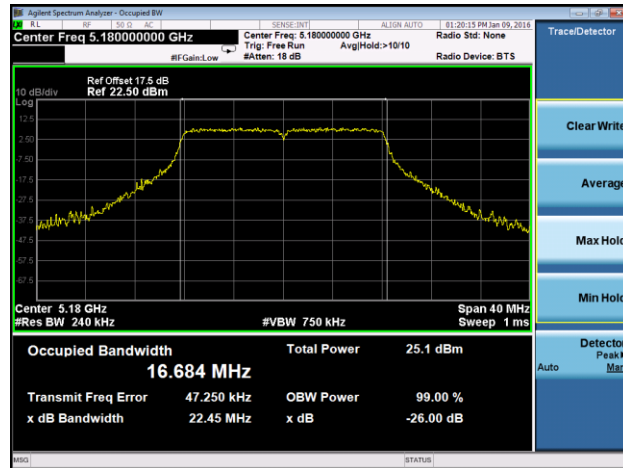


#### Channel 44 (5220MHz)

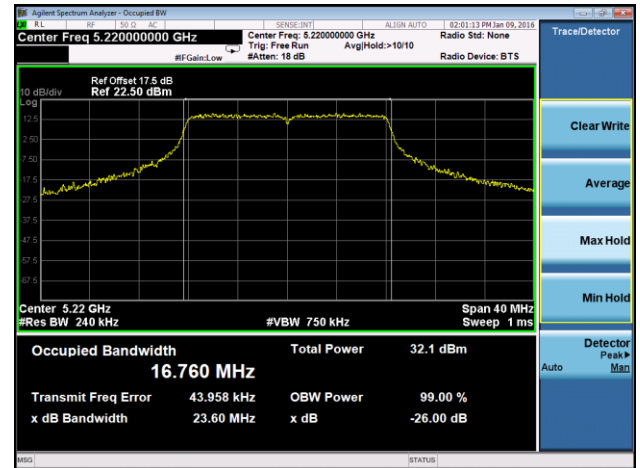


#### Channel 48 (5240MHz)

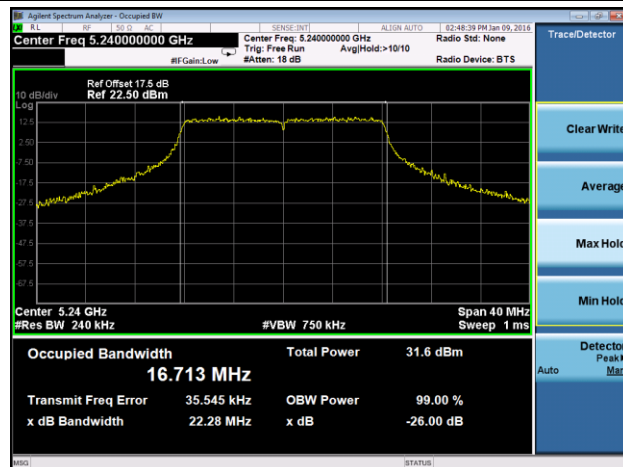


#### Channel 149 (5745MHz)

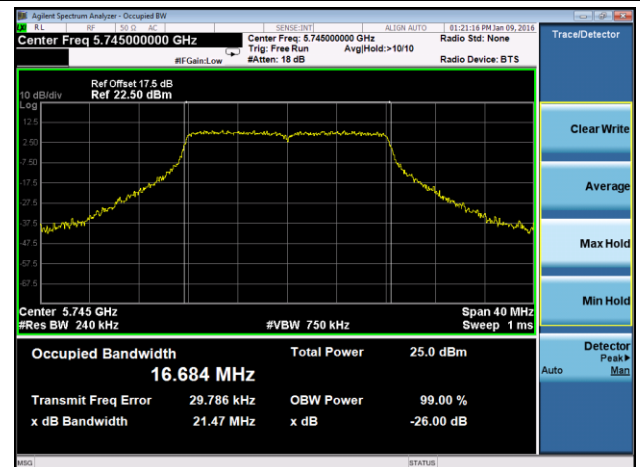

#### Channel 157 (5785MHz)

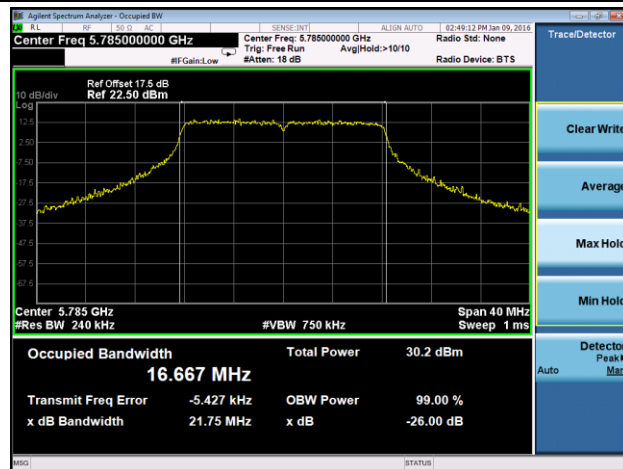


#### Channel 165 (5825MHz)

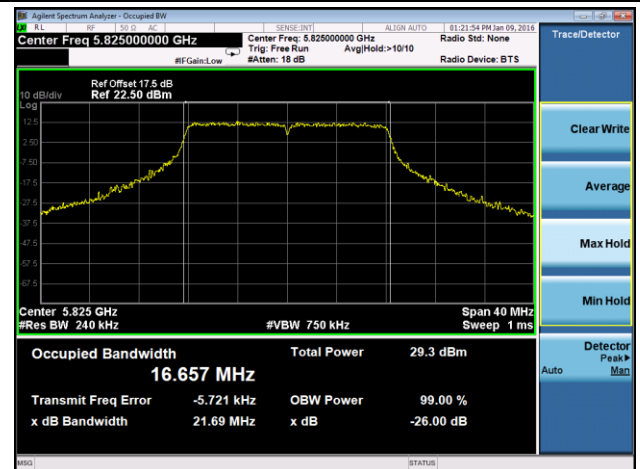


## 802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 1


### Channel 36 (5180MHz)

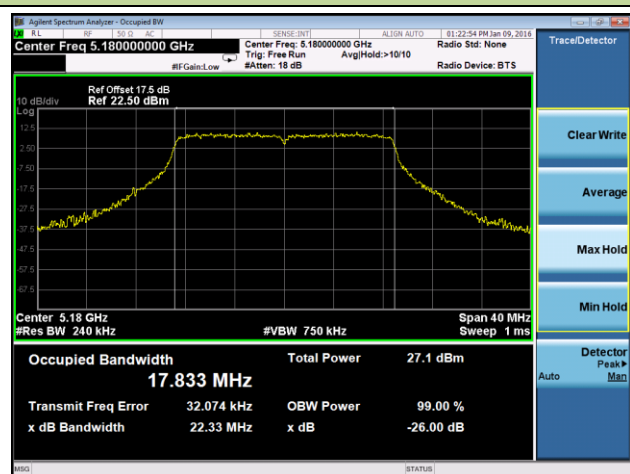


### Channel 44 (5220MHz)

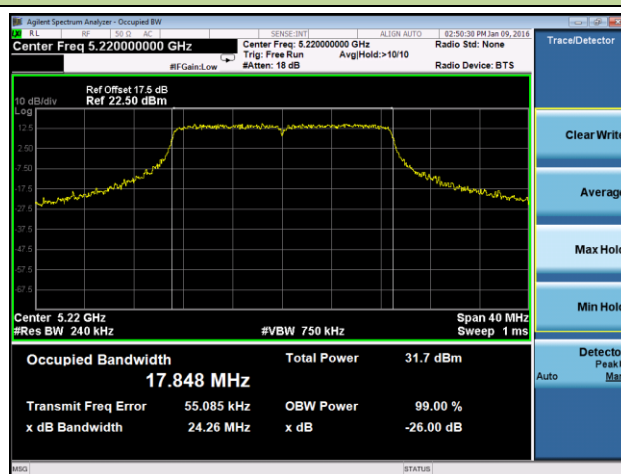


### Channel 48 (5240MHz)

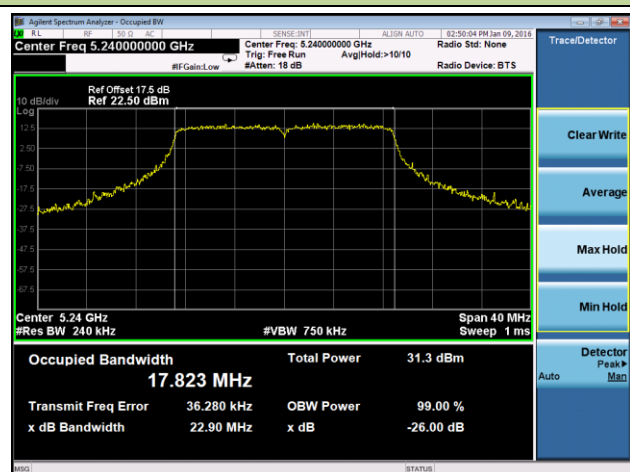


### Channel 149 (5745MHz)

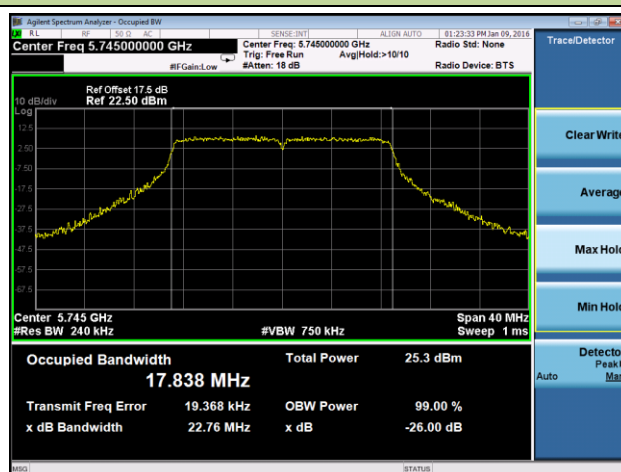

### Channel 157 (5785MHz)

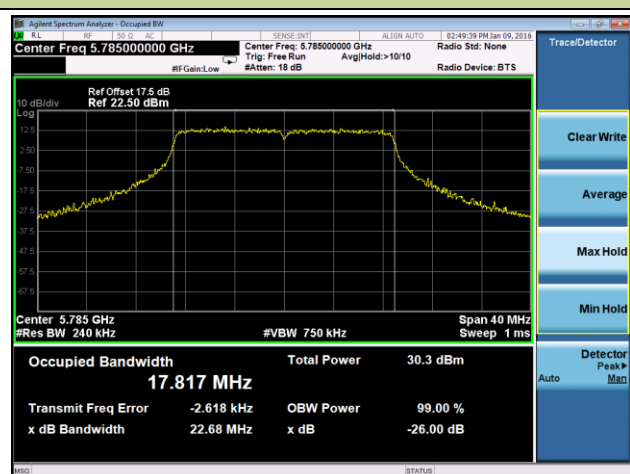


### Channel 165 (5825MHz)

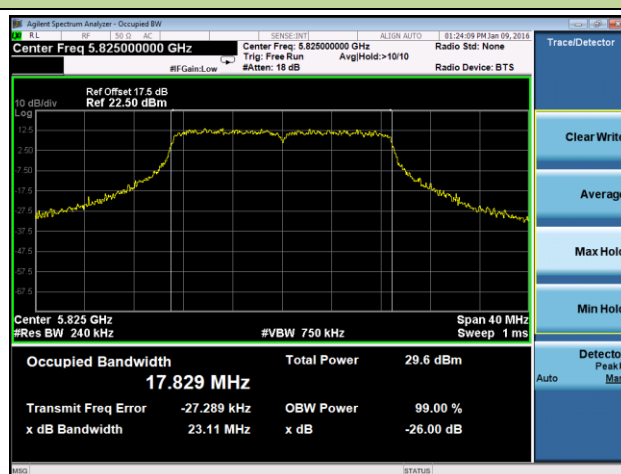




## 802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 1


### Channel 38 (5190MHz)

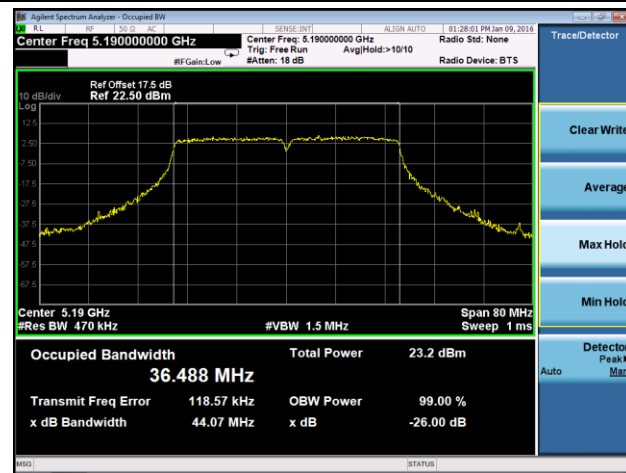


### Channel 46 (5230MHz)

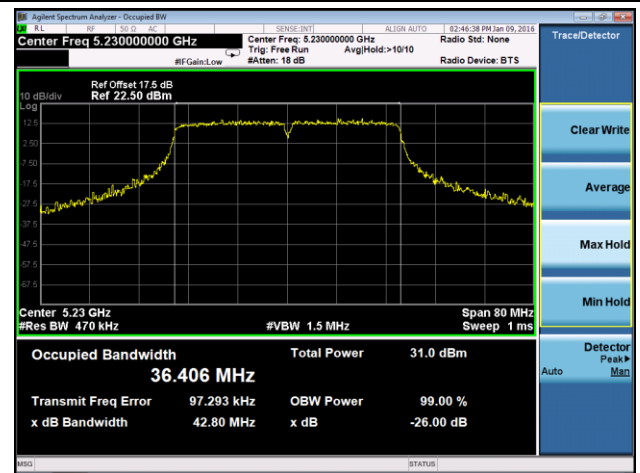

### Channel 151 (5755MHz)

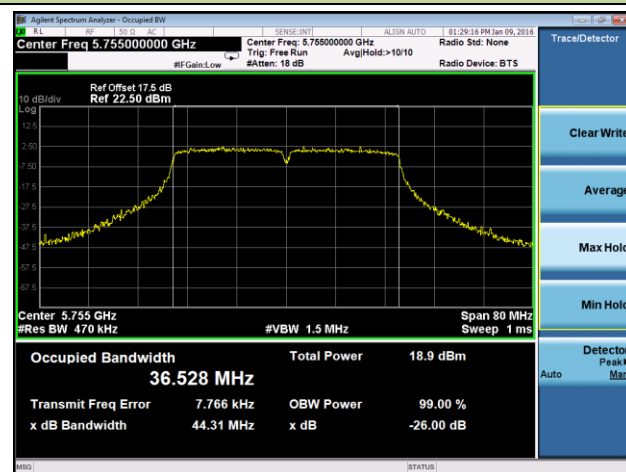


### Channel 159 (5795MHz)

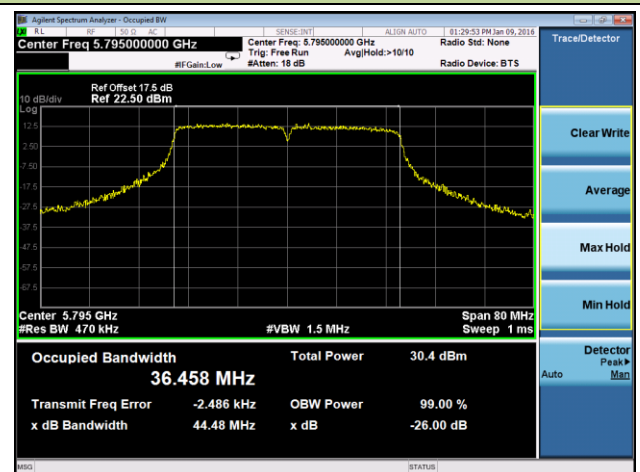


## 802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 1


### Channel 36 (5180MHz)

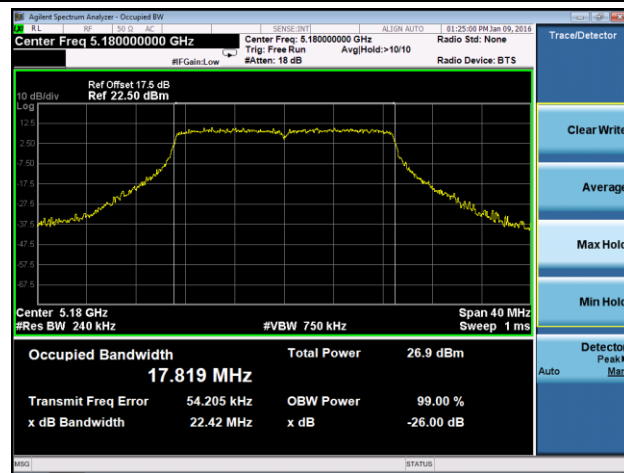


### Channel 44 (5220MHz)

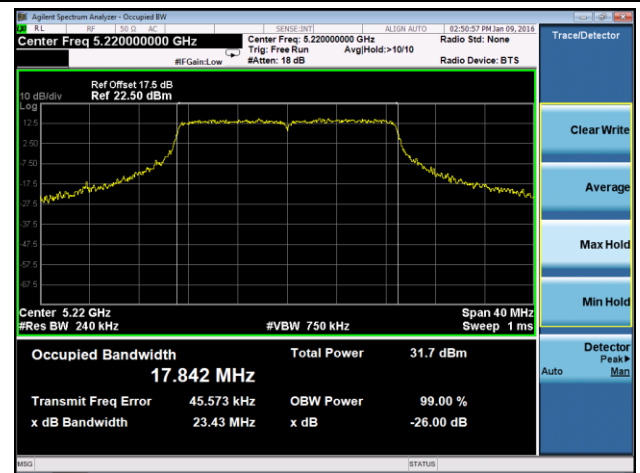


### Channel 48 (5240MHz)

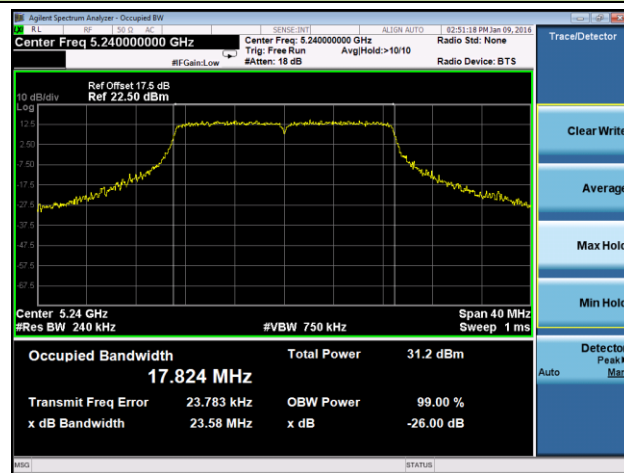


### Channel 149 (5745MHz)

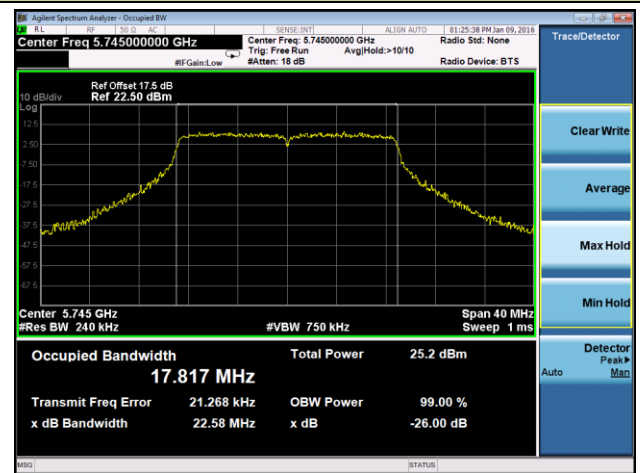

### Channel 157 (5785MHz)

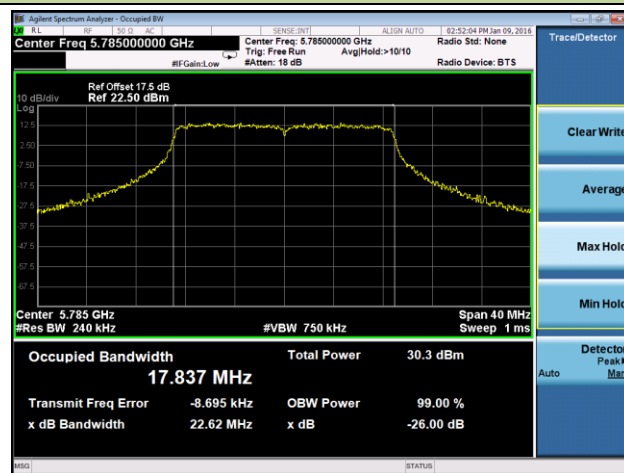


### Channel 165 (5825MHz)

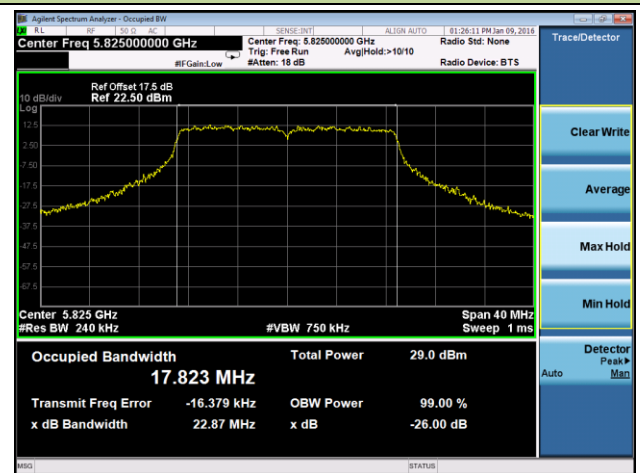


## 802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 1


### Channel 38 (5190MHz)

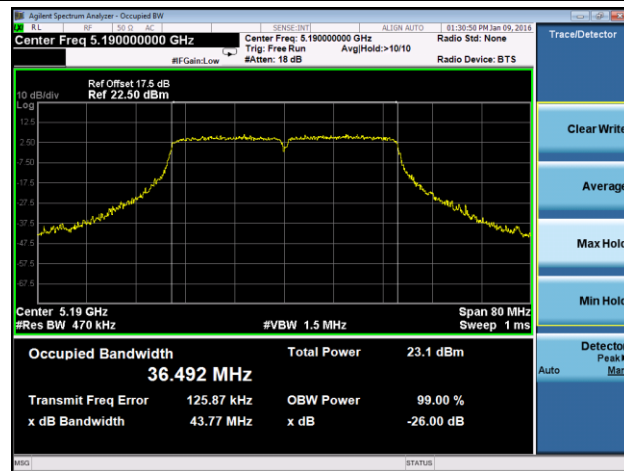


### Channel 46 (5230MHz)

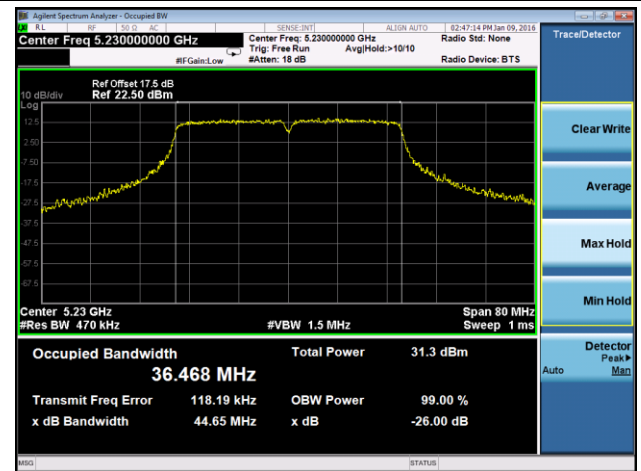

### Channel 151 (5755MHz)

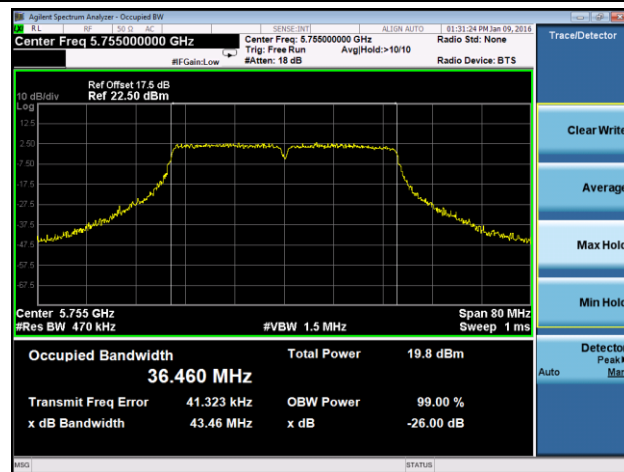


### Channel 159 (5795MHz)

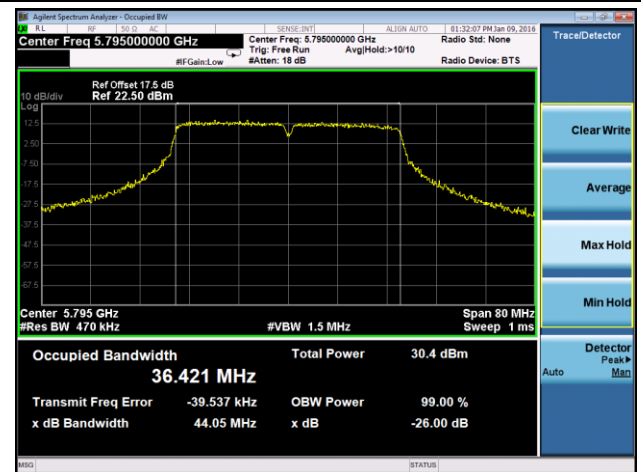


## 802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth - Ant 1

### Channel 42 (5210MHz)

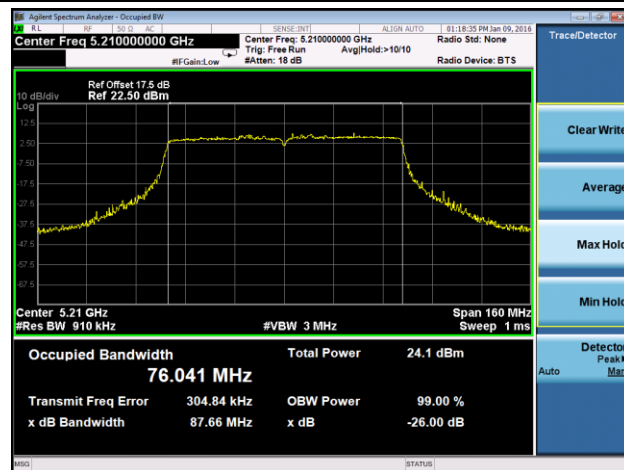


### Channel 155 (5775MHz)

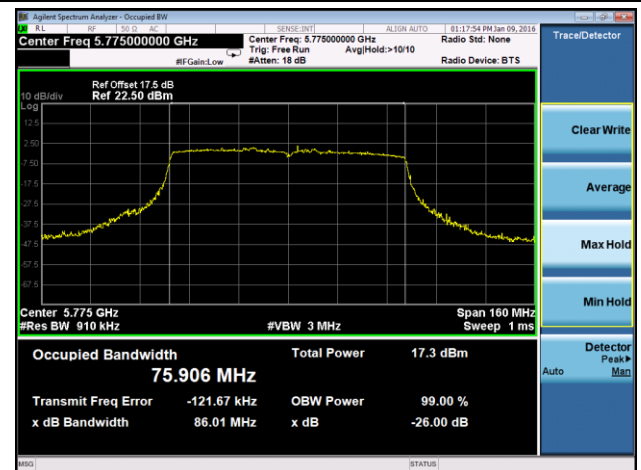


## 802.11a 26dB Bandwidth & 99% Bandwidth - Ant 2


### Channel 36 (5180MHz)

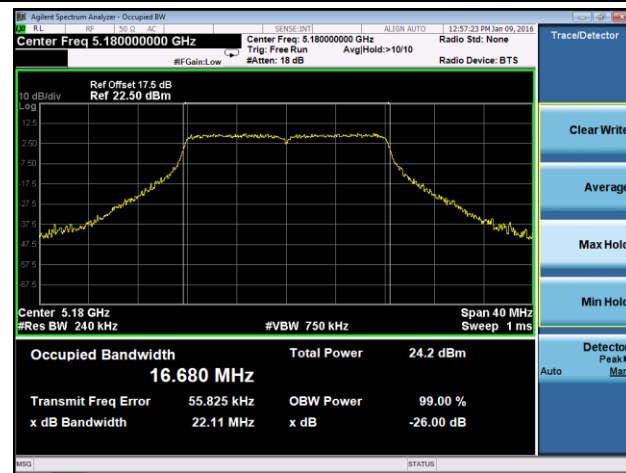


### Channel 44 (5220MHz)

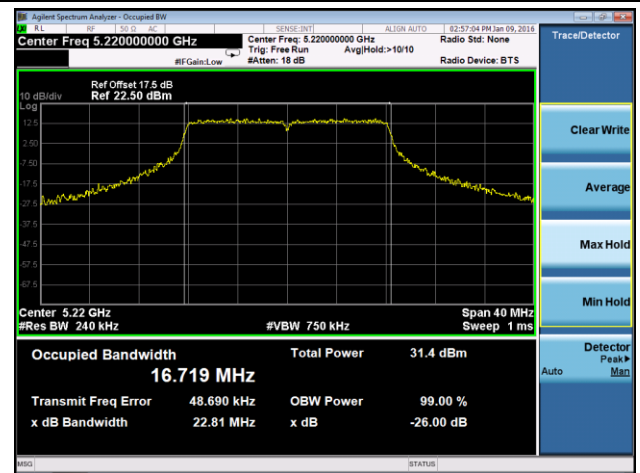


### Channel 48 (5240MHz)

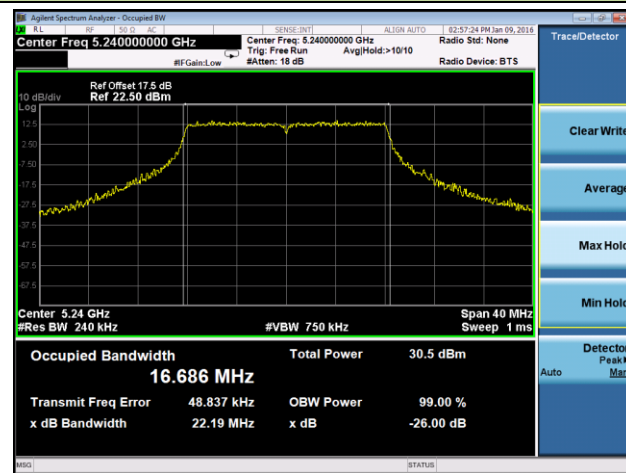


### Channel 149 (5745MHz)

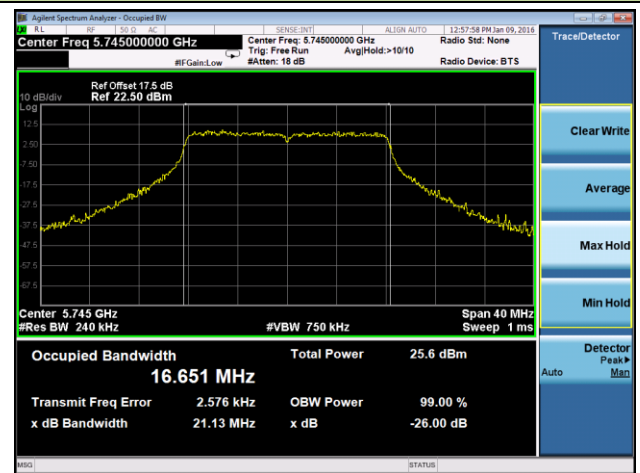

### Channel 157 (5785MHz)

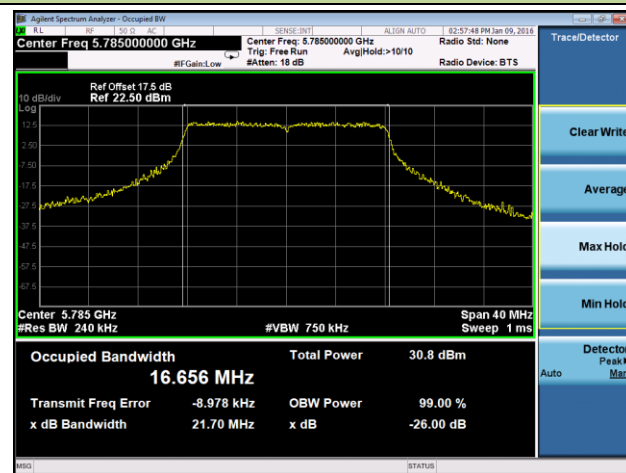


### Channel 165 (5825MHz)

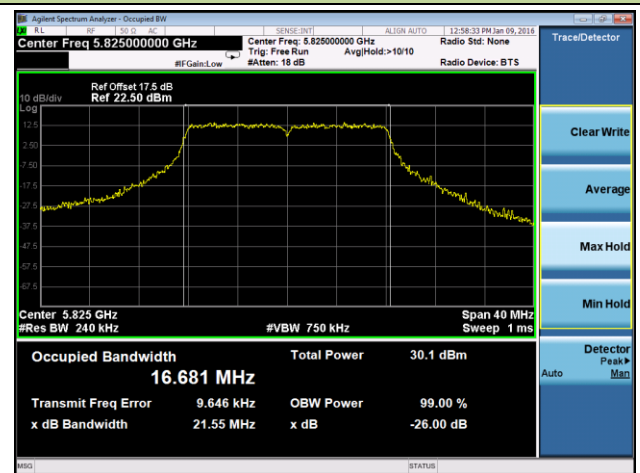


## 802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 2


### Channel 36 (5180MHz)

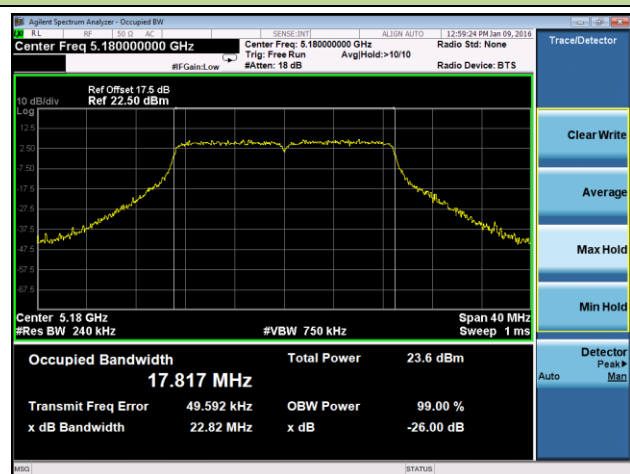


### Channel 44 (5220MHz)

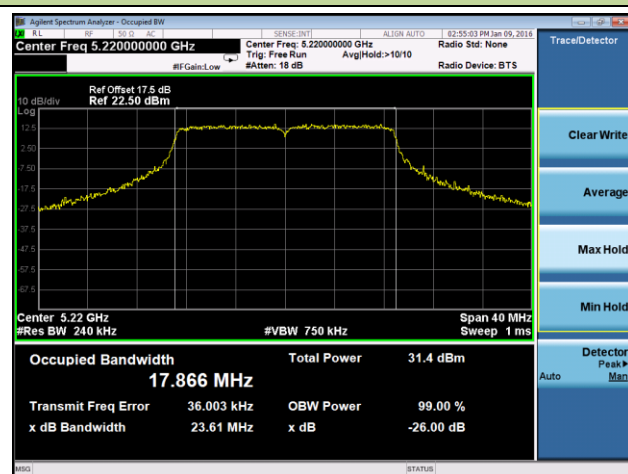


### Channel 48 (5240MHz)

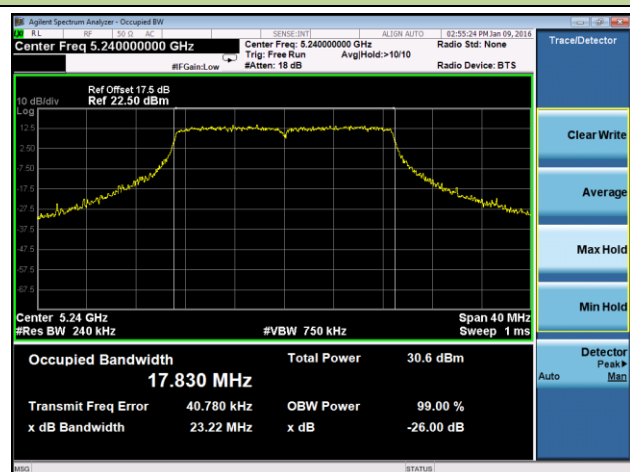

### Channel 149 (5745MHz)

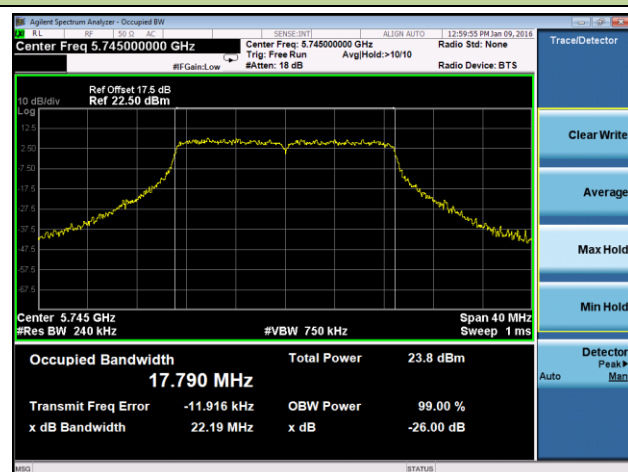

### Channel 157 (5785MHz)

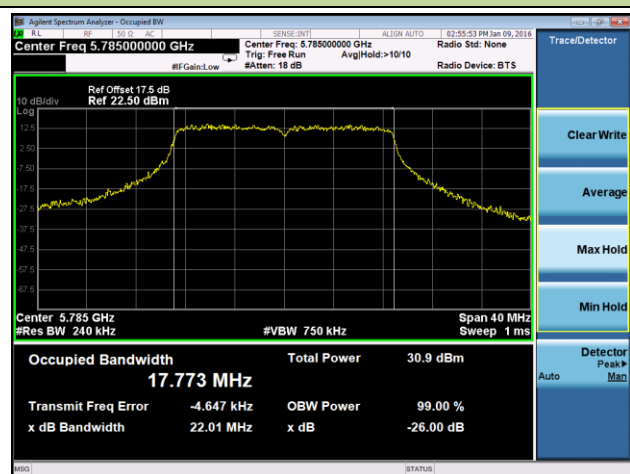

### Channel 165 (5825MHz)

