

MEASUREMENT REPORT

FCC PART 24 Subpart E & PART 27 Subpart C

FCC ID: 2AD8UAHFIH01

Application: Nokia Solutions and Networks, OY

Application Type: Certification

Product: AirScale Indoor Radio ASiR-pRRH

Model No.: AHFIH

Brand Name: Nokia

FCC Rule Part(s): Part 24 Subpart E & PART 27 Subpart C

Test Procedure(s): ANSI C63.26-2015, KDB 971168 D01v03r01

Test Date: January 24 ~ May 20, 2019

Reviewed:



(Paddy Chen)

Approved By:



(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1905TW0106-U1	Rev. 01	Initial Report	06-24-2019	Valid

Note: Here is only the different antenna between FCC ID “2AD8UAHFID01” & “2AD8UAHFIH01”, and the other circuits are the same. This report reused the conducted measurements results of FCC ID “2AD8UAHFID01”.

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION.....	6
1.1. Scope.....	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION.....	7
2.1. Equipment Description.....	7
2.2. Emission Designator	7
2.3. Description of Available Antennas	7
2.4. Test Mode and Channel Detail	8
2.5. Device Capabilities	8
2.6. Test Configuration.....	8
2.7. EMI Suppression Device(s)/Modifications.....	8
2.8. Labeling Requirements	8
3. DESCRIPTION of TEST	9
3.1. Evaluation Procedure.....	9
3.2. Radiated Emissions	9
4. TEST EQUIPMENT CALIBRATION DATE.....	11
5. MEASUREMENT UNCERTAINTY	12
6. TEST RESULT	13
6.1. Summary.....	13
6.2. Equivalent Isotropically Radiated Power Measurement.....	14
6.2.1. Test Limit	14
6.2.2. Test Procedures Used.....	14
6.2.3. Test Setting	14
6.2.4. Test Setup	15
6.2.5. Test Result	16
6.3. Frequency Stability Measurement.....	20
6.3.1. Test Limit	20
6.3.2. Test Procedures Used.....	20
6.3.3. Test Setting	20
6.3.4. Test Setup	21
6.3.5. Test Result	22
6.4. Emission Bandwidth.....	24

6.4.1.	Test Limit	24
6.4.2.	Test Procedure	24
6.4.3.	Test Setting	24
6.4.4.	Test Setup	25
6.4.5.	Test Result	26
6.5.	Band Edge Measurement	38
6.5.1.	Test Limit	38
6.5.2.	Test Procedure Used.....	38
6.5.3.	Test Setting	38
6.5.4.	Test Setup	39
6.5.5.	Test Setup	40
6.6.	Peak to Average Ratio	50
6.6.1.	Test Limit	50
6.6.2.	Test Procedure Used.....	50
6.6.3.	Test Setting	50
6.6.4.	Test Setup	50
6.6.5.	Test Result	51
6.7.	Conducted Spurious Emissions	61
6.7.1.	Test Limit	61
6.7.2.	Test Procedure Used.....	61
6.7.3.	Test Setting	61
6.7.4.	Test Setup	62
6.7.5.	Test Result	63
6.8.	Radiated Spurious Emissions Measurements.....	73
6.8.1.	Test Limit	73
6.8.2.	Test Procedure Used.....	73
6.8.3.	Test Setting	73
6.8.4.	Test Setup	74
6.8.5.	Test Result	75
7.	CONCLUSION	79

§2.1033 General Information

Applicant:	Nokia Solutions and Networks, OY
Applicant Address:	2000 W. Lucent Lane, Naperville, Illinois, United States, 60563
Manufacturer:	Nokia Solutions and Networks, OY
Manufacturer Address:	2000 W. Lucent Lane, Naperville, Illinois, United States, 60563
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Reg. No. 153292) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

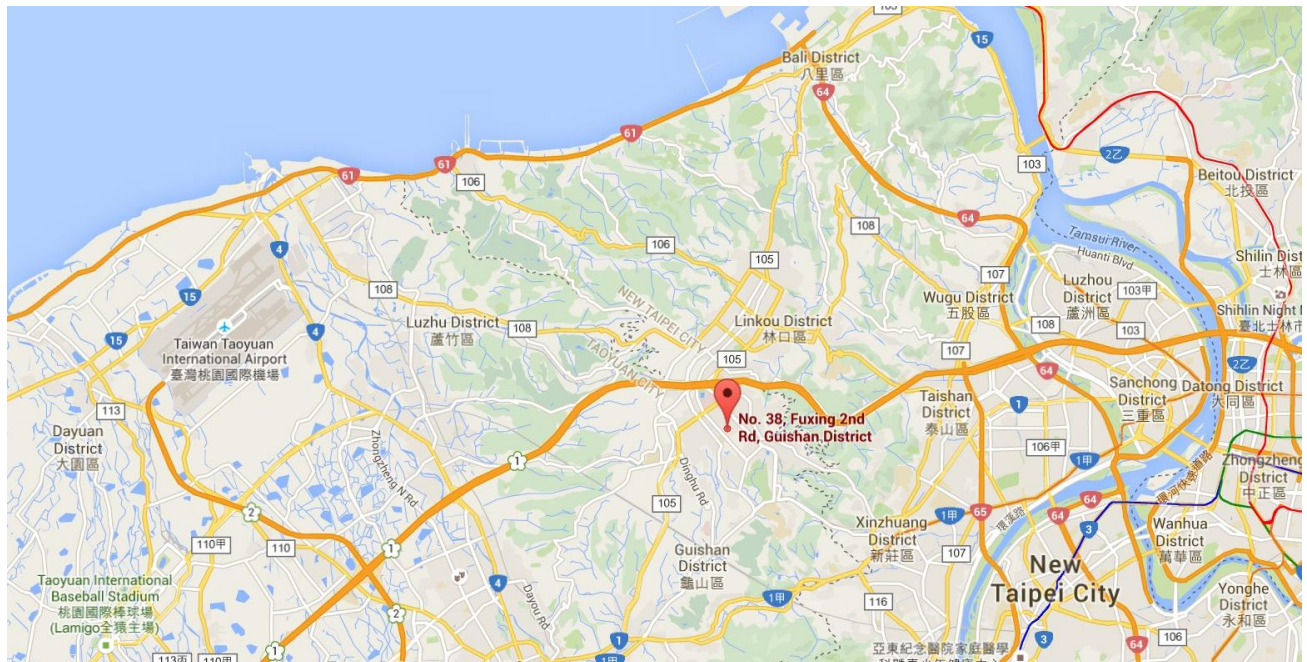

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	AirScale Indoor Radio ASiR-pRRH	
Model No.:	AHFIH	
Brand Name:	Nokia	
Test Device Serial No.:	NH191702680	
Hardware Version:	X12	
Software Version:	FL18A	
Voltage Range:	PoE: 52Vdc ~ 57Vdc	
WCDMA Operating Band (s):	Band 2 / 66	
Modulation Type:	QPSK, 16QAM	
T _x Frequency Range	Band 2: 1930 ~ 1990 MHz; Band 66: 2110 ~ 2200 MHz	
R _x Frequency Range	Band 2: 1850 ~ 1910 MHz; Band 66: 1710 ~ 1780 MHz	
Max EIRP Power:	Band 2	Channel Bandwidth 5MHz: 30.69dBm
		Channel Bandwidth 5+5+5MHz: 30.55dBm
	Band 66	Channel Bandwidth 5MHz: 31.26dBm
		Channel Bandwidth 5+5+5MHz: 31.66dBm
Emission Designator:	Refer to Section 2.2	
Antenna Specification:	Refer to Section 2.3	

2.2. Emission Designator

Bandwidth (MHz)	Modulation	Emission Designator	Bandwidth (MHz)	Modulation	Emission Designator
WCDMA Band 2					
5	QPSK	4M17G7D	5 + 5 + 5	QPSK	13M99G7D
	16QAM	4M17W7D		16QAM	14M04W7D
WCDMA Band 66					
5	QPSK	4M17G7D	5 + 5 + 5	QPSK	13M98G7D
	16QAM	4M17W7D		16QAM	14M03W7D

2.3. Description of Available Antennas

Band Support	Antenna Type	Model	Antenna Gain
WCDMA Band 2	Omni-Directional	CMQ69273P	5.7dBi
WCDMA Band 66			5.7dBi

2.4. Test Mode and Channel Detail

Test Item	Channel Bandwidth	Modulation
Equivalent Isotropically Radiated Power	5MHz, 5 + 5 + 5MHz	QPSK, 16QAM
Emission Bandwidth		QPSK, 16QAM
Band Edge Measurements		QPSK
Conducted Spurious Emissions		QPSK
Radiated Spurious Emissions		QPSK
Peak to Average Ratio	5MHz	QPSK, 16QAM
Frequency Stability	5MHz	QPSK

2.5. Device Capabilities

This device contains the following capabilities:

WCDMA Band 2 & Band 66 Base Station.

2.6. Test Configuration

The device was tested per the guidance of KDB 971168 D01v03r01. ANSI C63.26-2015 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

2.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.8. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services (ANSI C63.26-2015), and the guidance provided in KDB 971168 D01v03r01 were used in the measurement.

Deviation from measurement procedure.....None

3.2. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable

containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. TEST EQUIPMENT CALIBRATION DATE

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2020/04/23
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2020/05/21
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2020/04/23
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2020/04/22
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2020/04/23
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2020/04/22
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2020/03/19
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2020/03/18
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/07/30
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2020/05/18
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2020/05/21

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2020/04/23
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2020/03/19
Wideband Radio Communication Taster	R&S	CMW 500	MRTTWA00041	1 year	2019/12/12
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/07/30
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTSUE06457	1 year	2019/07/19
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2020/03/19
DC Power Supply	GWINSTEK	SPS-606	MRTTWA00034	Check by TRUE RMS MULTIMETER	
TRUE RMS MULTIMETER	FLUKE	117	MRTTWA00022	1 year	2020/05/22
Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2019/06/06
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2020/05/21

Software	Version	Function
EMI Software	V3	EMI Test Software

5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.65dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 30MHz: 3.92dB 30MHz ~ 1GHz: 4.25dB 1GHz ~ 18GHz: 4.40dB

6. TEST RESULT

6.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1046; 24.232(a)(2); 27.50(d)(2)	Equivalent Isotropically Radiated Power	Refer to Section 6.2	Conducted; Radiated	Pass	Section 6.2
2.1055; 24.235; 27.54	Frequency Stability	Refer to Section 6.3	Conducted	Pass	Section 6.3
2.1049; 24.238(b); 27.53(h)	Emission Bandwidth	Refer to Section 6.4		Pass	Section 6.4
24.238(a); 27.53(h)	Band Edge Measurements	Refer to Section 6.5		Pass	Section 6.5
2.1046; 24.232(d); 27.50(d)(5)	Peak to Average Ratio	Refer to Section 6.6		Pass	Section 6.6
2.1051; 24.238(a); 27.53(h)	Conducted Spurious Emissions	Refer to Section 6.7		Pass	Section 6.7
2.1053; 24.238(a); 27.53(h)	Radiated Spurious Emissions	Refer to Section 6.8	Radiated	Pass	Section 6.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports the worst case was found. Following model(s) was (were) selected for the final test as listed at section 2.4.
- 3) All supported modulation types were evaluated. The worst case emission of modulation was selected. Therefore, the EIRP power, Frequency Stability, Channel Edge, Conducted Emission and Radiated Emission were presented in the test report.
- 4) The EUT's orientation of highest EIRP refers to Test Setup Photos.

6.2. Equivalent Isotropically Radiated Power Measurement

6.2.1. Test Limit

The Radiated Equivalent Isotropically Power shall be according to the specific rule Part 24.232(a)(2) & 27.50(d)(2)(ii) that are limited to EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

6.2.2. Test Procedures Used

KDB 971168 D01v03r01 - Section 5.2.4 & 5.8

ANSI C63.26-2015 - Section 5.2.4.2 & 5.2.7

6.2.3. Test Setting

Average Power Measurement


Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

Radiated Equivalent Isotropically Power Measurement


1. $RBW \geq OBW$
2. $VBW \geq 3 \times RBW$
3. Sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})$
4. Detector = power averaging (rms)
5. Set sweep trigger to "free run"
6. If the EUT can be configured to transmit continuously, then set the trigger to free run
7. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.
To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time
8. The trace was allowed to stabilize.
9. Use the peak marker function to determine the peak amplitude level.
10. $EIRP = \text{Output Power Level of S.G} - T_x \text{ Cable Loss} + \text{Antenna Gain of Substitution Antenna}.$

6.2.4. Test Setup

Conducted Measurement of Output Power

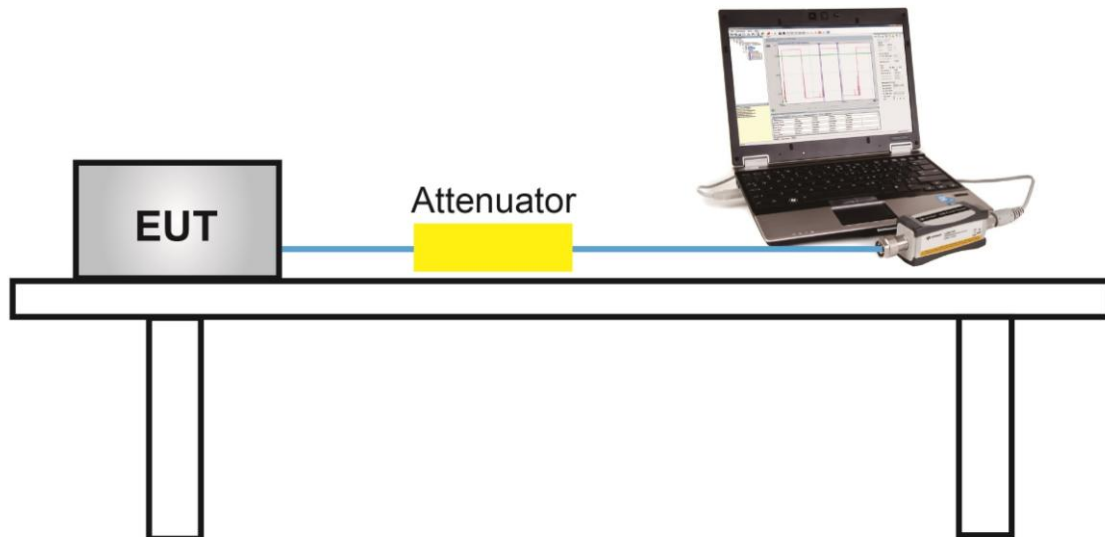

Radiated Measurement of Equivalent Isotropically Radiated Power

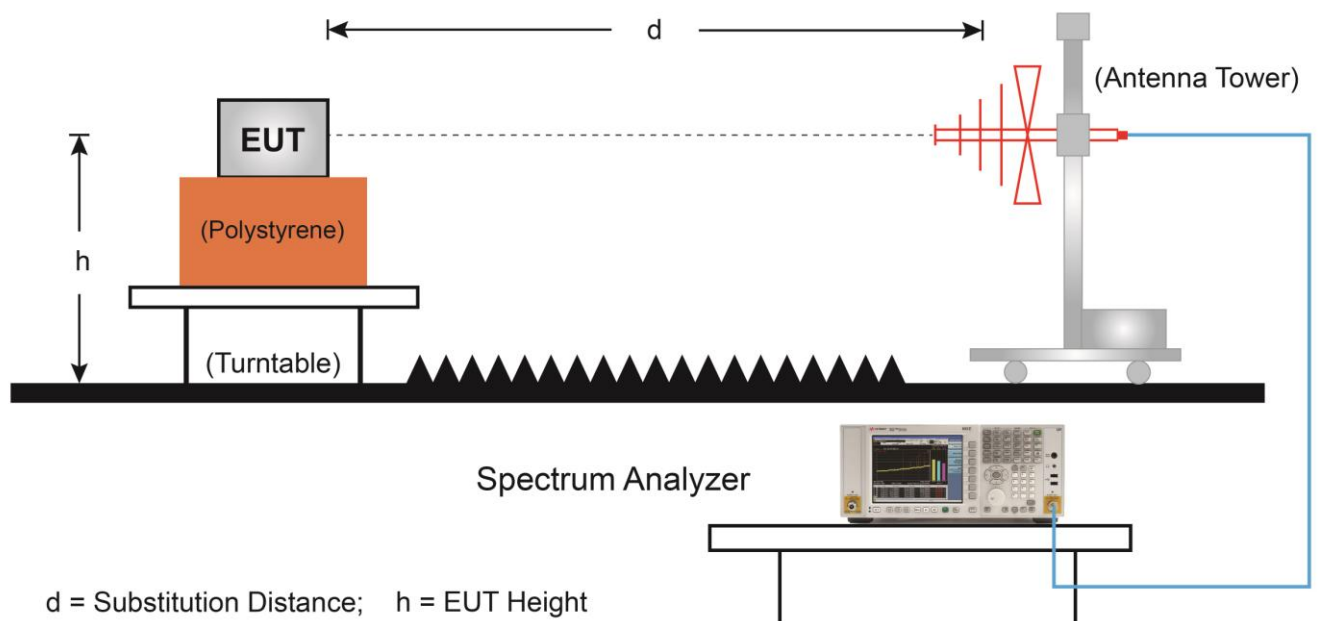

6.2.5. Test Result

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/09 ~ 2019/05/13
Test Item	Conducted Power - WCDMA Band 2 (Single Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Ant 0 Power (dBm)	Ant 1 Power (dBm)	Total Power (dBm)
QPSK				
1932.4	5	21.29	21.06	24.19
1960.0	5	20.92	21.11	24.03
1987.6	5	21.38	20.23	23.85
16QAM				
1932.4	5	21.55	21.76	24.67
1960.0	5	21.61	21.92	24.78
1987.6	5	22.36	21.32	24.88

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/13
Test Item	Conducted Power - WCDMA Band 2 (Multi Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Ant 0 Power (dBm)	Ant 1 Power (dBm)	Total Power (dBm)
QPSK				
1932.4 + 1937.4 + 1942.4	5 + 5 + 5	21.65	21.51	24.59
1955.0 + 1960.0 + 1965.0	5 + 5 + 5	21.04	21.27	24.17
1977.6 + 1982.6 + 1987.6	5 + 5 + 5	21.84	21.14	24.51
16QAM				
1932.4 + 1937.4 + 1942.4	5 + 5 + 5	22.39	22.04	25.23
1955.0 + 1960.0 + 1965.0	5 + 5 + 5	22.69	22.30	25.51
1977.6 + 1982.6 + 1987.6	5 + 5 + 5	22.03	21.33	24.70

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/15
Test Item	Conducted Power - WCDMA Band 66 (Single Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Ant 0 Power (dBm)	Ant 1 Power (dBm)	Total Power (dBm)
QPSK				
2112.5	5	21.98	22.03	25.02
2145.0	5	21.89	22.73	25.34
2177.5	5	22.02	21.97	25.01
16QAM				
2112.5	5	21.91	21.92	24.93
2145.0	5	21.82	22.69	25.29
2177.5	5	22.12	21.94	25.04

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/15
Test Item	Conducted Power - WCDMA Band 66 (Multi Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Ant 0 Power (dBm)	Ant 1 Power (dBm)	Total Power (dBm)
QPSK				
2112.5 + 2117.5 + 2122.5	5 + 5 + 5	22.06	22.18	25.13
2140.0 + 2145.0 + 2150.0	5 + 5 + 5	21.98	22.68	25.35
2167.5 + 2172.5 + 2177.5	5 + 5 + 5	22.29	22.01	25.16
16QAM				
2112.5 + 2117.5 + 2122.5	5 + 5 + 5	21.12	21.06	24.10
2140.0 + 2145.0 + 2150.0	5 + 5 + 5	21.03	21.63	24.35
2167.5 + 2172.5 + 2177.5	5 + 5 + 5	21.09	20.63	23.88

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	AC1	Test Date	2019/05/15
Test Item	EIRP - WCDMA Band 2 (Single Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Reading Level (dBm)	Factor (dB)	EIRP (dBm)	Limit (dBm)
QPSK					
1932.4	5	25.42	4.97	30.39	< 62.15
1960.0	5	25.48	4.80	30.28	< 62.15
1987.6	5	23.19	5.81	29.00	< 62.15
16QAM					
1932.4	5	25.72	4.97	30.69	< 62.15
1960.0	5	25.42	4.80	30.22	< 62.15
1987.6	5	24.07	5.81	29.88	< 62.15

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	AC1	Test Date	2019/05/15
Test Item	EIRP - WCDMA Band 2 (Multi Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Reading Level (dBm)	Factor (dB)	EIRP (dBm)	Limit (dBm)
QPSK					
1932.4 + 1937.4 + 1942.4	5 + 5 + 5	25.71	4.84	30.55	< 62.15
1955.0 + 1960.0 + 1965.0	5 + 5 + 5	25.07	4.80	29.87	< 62.15
1977.6 + 1982.6 + 1987.6	5 + 5 + 5	23.79	5.76	29.55	< 62.15
16QAM					
1932.4 + 1937.4 + 1942.4	5 + 5 + 5	25.42	4.84	30.26	< 62.15
1955.0 + 1960.0 + 1965.0	5 + 5 + 5	24.48	4.80	29.28	< 62.15
1977.6 + 1982.6 + 1987.6	5 + 5 + 5	24.11	5.76	29.87	< 62.15

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/15
Test Item	EIRP Power - WCDMA Band 66 (Single Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Reading Level (dBm)	Factor (dB)	EIRP (dBm)	Limit (dBm)
QPSK					
2112.5	5	25.03	6.01	31.04	< 62.15
2145.0	5	24.32	6.39	30.71	< 62.15
2177.5	5	23.93	6.28	30.21	< 62.15
16QAM					
2112.5	5	24.46	6.01	30.47	< 62.15
2145.0	5	24.87	6.39	31.26	< 62.15
2177.5	5	24.11	6.28	30.39	< 62.15

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/15
Test Item	EIRP Power - WCDMA Band 66 (Multi Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Reading Level (dBm)	Factor (dB)	EIRP (dBm)	Limit (dBm)
QPSK					
2112.5 + 2117.5 + 2122.5	5 + 5 + 5	24.37	6.07	30.44	< 62.15
2140.0 + 2145.0 + 2150.0	5 + 5 + 5	25.27	6.39	31.66	< 62.15
2167.5 + 2172.5 + 2177.5	5 + 5 + 5	24.13	6.32	30.45	< 62.15
16QAM					
2112.5 + 2117.5 + 2122.5	5 + 5 + 5	23.31	6.07	29.38	< 62.15
2140.0 + 2145.0 + 2150.0	5 + 5 + 5	23.65	6.39	30.04	< 62.15
2167.5 + 2172.5 + 2177.5	5 + 5 + 5	23.18	6.32	29.50	< 62.15

6.3. Frequency Stability Measurement

6.3.1. Test Limit

N/A

6.3.2. Test Procedures Used

KDB 971168 D01v03r01 - Section 9

ANSI C63.26-2015 - Section 5.6

6.3.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint (If a product is specified to operate over a range of input voltage then the -15% variation is applied to the lowermost voltage and the $+15\%$ is applied to the uppermost voltage), record the maximum frequency change.

6.3.4. Test Setup

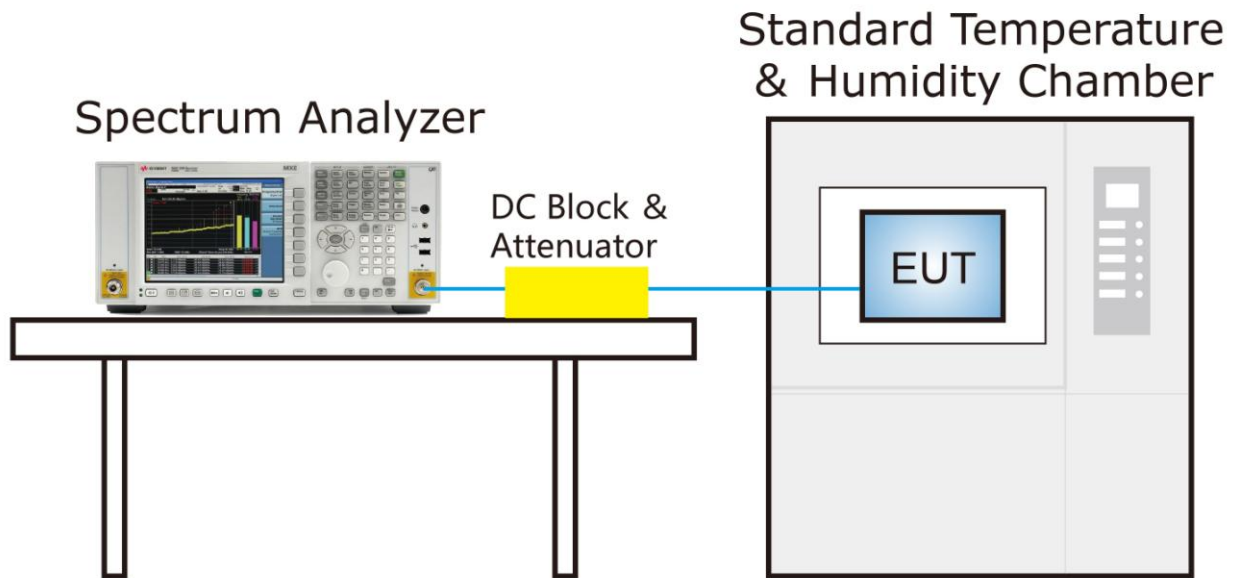

6.3.5. Test Result

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/09
Test Item	Frequency Stability - WCDMA Band 2		

Voltage (DC)	Temp (°C)	Frequency Tolerance (ppm)			
		0 minutes	2 minutes	5 minutes	10 minutes
54V	- 30	-0.04	-0.08	-0.14	-0.01
	- 20	-0.05	-0.01	-0.08	0.05
	- 10	-0.02	0.08	-0.17	0.15
	0	-0.13	0.06	-0.21	0.24
	+ 10	-0.18	0.07	-0.27	0.28
	+ 20 (Ref)	-0.16	0.03	-0.23	0.27
	+ 30	-0.14	0.10	-0.29	0.30
	+ 40	-0.15	0.13	-0.38	0.40
	+ 50	-0.08	0.07	-0.38	0.29
57V	+ 20	-0.16	0.15	-0.34	0.25
52V	+ 20	-0.24	0.08	-0.27	0.17

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/09
Test Item	Frequency Stability - WCDMA Band 66		

Voltage (DC)	Temp (°C)	Frequency Tolerance (ppm)			
		0 minutes	2 minutes	5 minutes	10 minutes
54V	- 30	-0.12	-0.14	-0.13	0.05
	- 20	-0.10	-0.05	-0.02	0.04
	- 10	-0.07	-0.06	-0.01	0.13
	0	-0.19	-0.01	-0.03	0.20
	+ 10	-0.17	-0.08	-0.05	0.28
	+ 20 (Ref)	-0.07	-0.10	-0.09	0.28
	+ 30	-0.16	0.01	-0.18	0.26
	+ 40	-0.21	-0.05	-0.13	0.27
	+ 50	-0.15	0.02	-0.12	0.29
57V	+ 20	-0.13	0.12	-0.14	0.25
52V	+ 20	-0.16	0.21	-0.20	0.31

6.4. Emission Bandwidth

6.4.1. Test Limit

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

6.4.2. Test Procedure


KDB 971168 D01v03r01 - Section 4.1 & 4.2

ANSI C63.26-2015 - Section 5.4.3 & 5.4.4

6.4.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency;
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW;
3. VBW $\geq 3 \times$ RBW;
4. Detector = Peak;
5. Trace mode = max hold;
6. Sweep = auto couple;
7. Allow the trace to stabilize;
8. The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 26 dB below the reference level

6.4.4. Test Setup

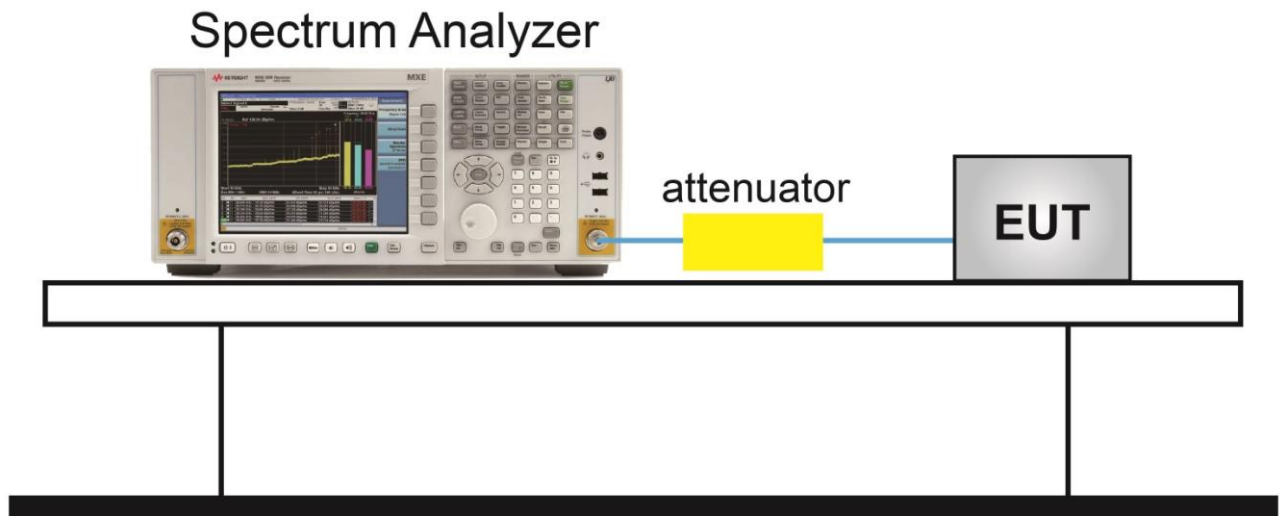

6.4.5. Test Result

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/09 ~ 2019/05/13
Test Item	Emission Bandwidth - WCDMA Band 2 (Single Carrier)		

Frequency (MHz)	Bandwidth (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK			
1932.4	5	4.67	4.15
1960.0	5	4.67	4.16
1987.6	5	4.67	4.17
16QAM			
1932.4	5	4.65	4.17
1960.0	5	4.66	4.17
1987.6	5	4.66	4.17


Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/09 ~ 2019/05/13
Test Item	Emission Bandwidth - WCDMA Band 2 (Multi Carrier)		

Frequency (MHz)	Bandwidth (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK			
1932.4 + 1937.4 + 1942.4	5 + 5 + 5	14.93	13.93
1955.0 + 1960.0 + 1965.0	5 + 5 + 5	14.96	13.98
1977.6 + 1982.6 + 1987.6	5 + 5 + 5	14.94	13.99
16QAM			
1932.4 + 1937.4 + 1942.4	5 + 5 + 5	14.93	13.98
1955.0 + 1960.0 + 1965.0	5 + 5 + 5	14.95	14.04
1977.6 + 1982.6 + 1987.6	5 + 5 + 5	14.95	14.03


26dB Bandwidth - QPSK

5MHz Channel Bandwidth


1932.4MHz

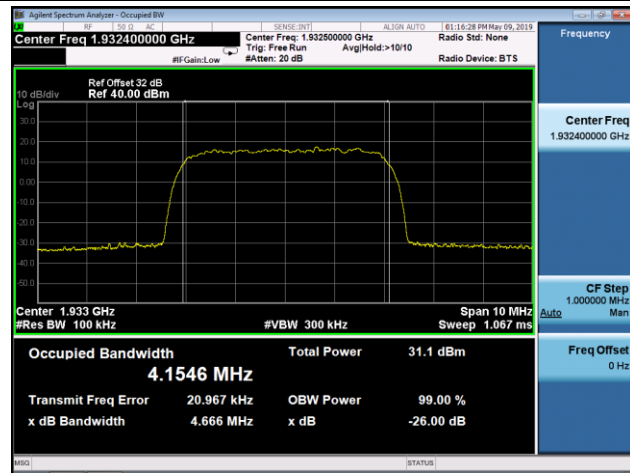

1960.0MHz

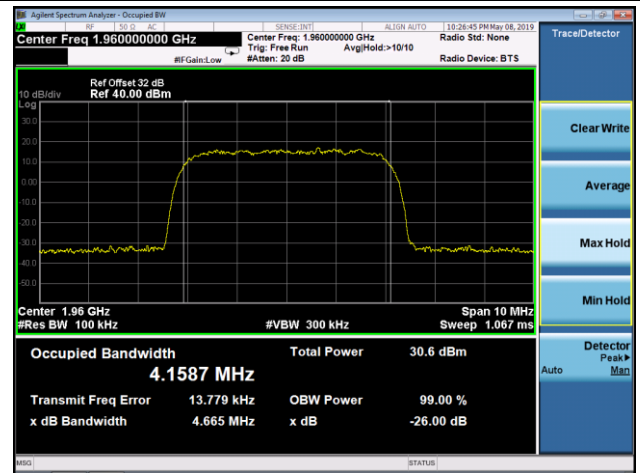


1987.6MHz

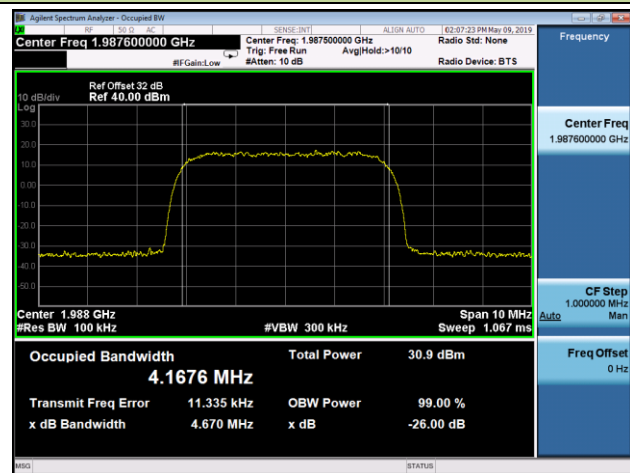


5 + 5 + 5MHz Channel Bandwidth


1932.4MHz + 1937.4MHz + 1942.4MHz

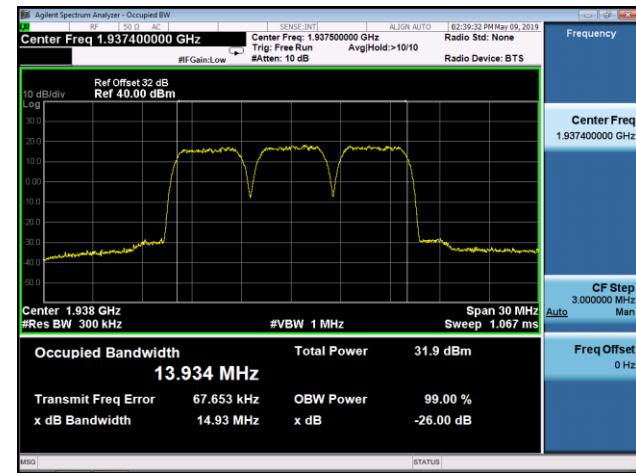

1955.0MHz + 1960.0MHz + 1965.0MHz

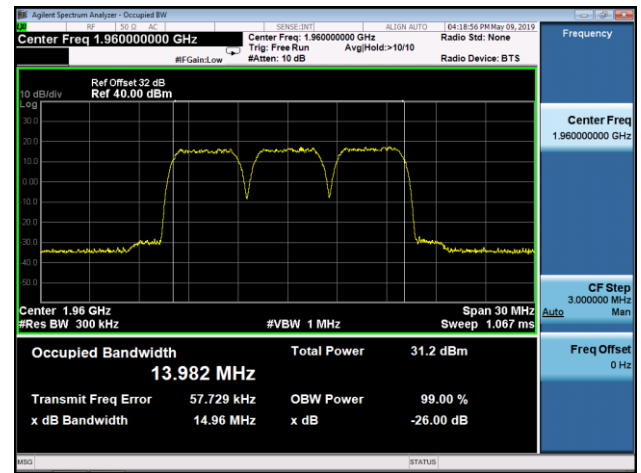


1977.6MHz + 1982.6MHz + 1987.6 MHz

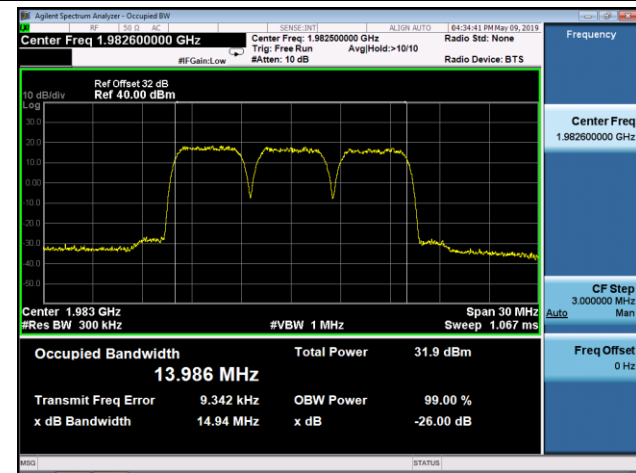


26dB Bandwidth - 16QAM

5MHz Channel Bandwidth


1932.4MHz

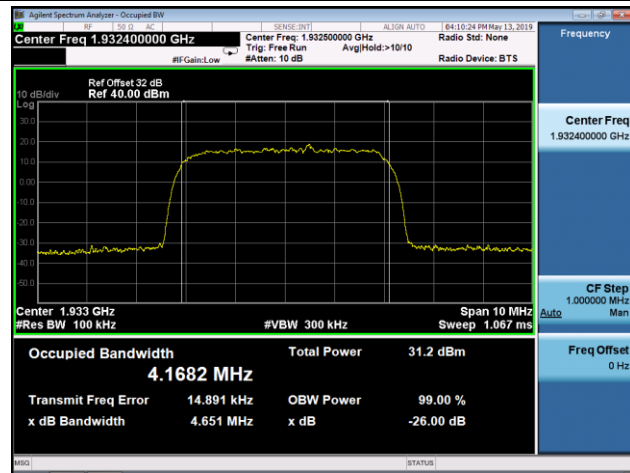

1960.0MHz

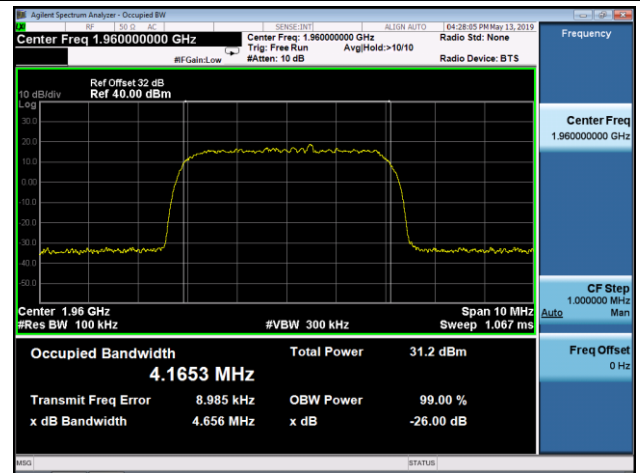


1987.6MHz

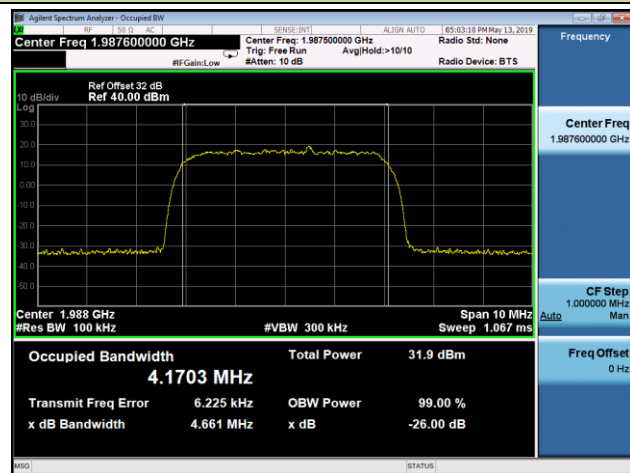


5 + 5 + 5MHz Channel Bandwidth


1932.4MHz + 1937.4MHz + 1942.4MHz

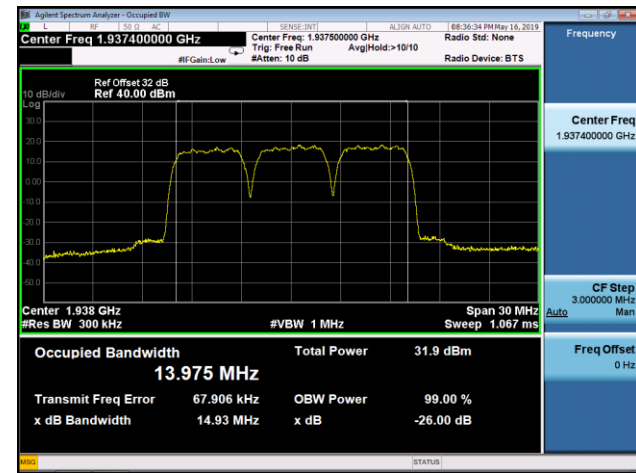

1955.0MHz + 1960.0MHz + 1965.0MHz

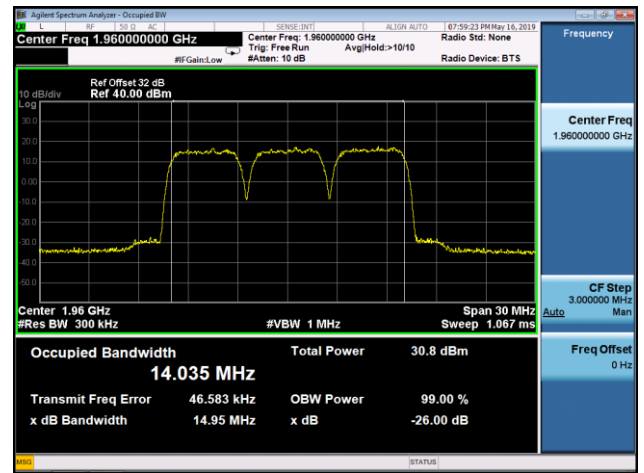

1977.6MHz + 1982.6MHz + 1987.6 MHz

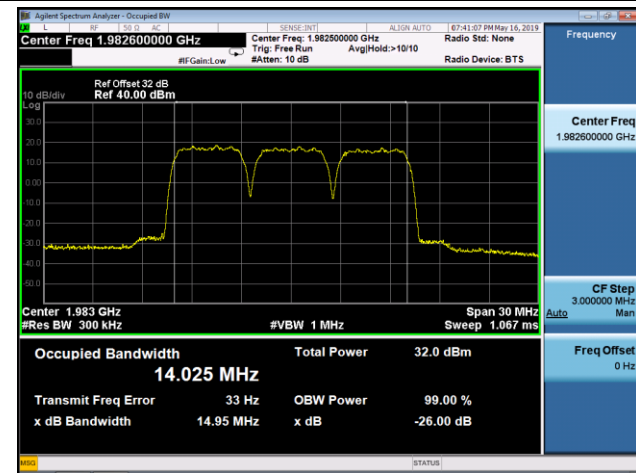

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/09 ~ 2019/05/13
Test Item	Emission Bandwidth - WCDMA Band 66 (Single Carrier)		

Frequency (MHz)	Bandwidth (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK			
2112.5	5	4.66	4.17
2145.0	5	4.66	4.17
2177.5	5	4.66	4.17
16QAM			
2112.5	5	4.66	4.16
2145.0	5	4.66	4.17
2177.5	5	4.66	4.17


Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/09 ~ 2019/05/13
Test Item	Emission Bandwidth - WCDMA Band 66 (Multi Carrier)		

Frequency (MHz)	Bandwidth (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK			
2112.5 + 2117.5 + 2122.5	5 + 5 + 5	14.95	13.96
2140.0 + 2145.0 + 2150.0	5 + 5 + 5	14.96	13.97
2167.5 + 2172.5 + 2177.5	5 + 5 + 5	14.95	13.98
16QAM			
2112.5 + 2117.5 + 2122.5	5 + 5 + 5	14.93	14.02
2140.0 + 2145.0 + 2150.0	5 + 5 + 5	14.95	14.01
2167.5 + 2172.5 + 2177.5	5 + 5 + 5	14.94	14.03


26dB Bandwidth - QPSK

5MHz Channel Bandwidth


2112.5MHz

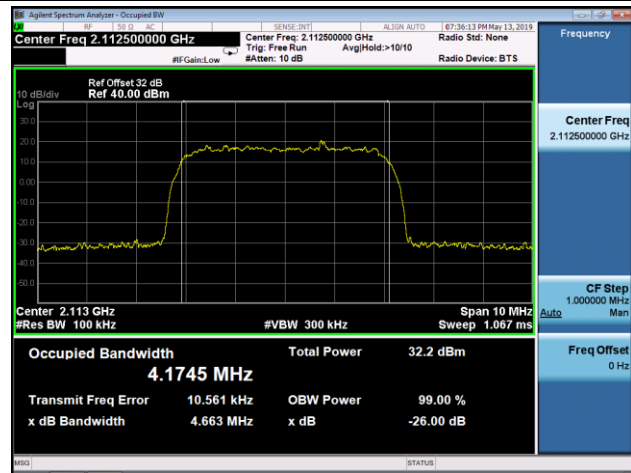

2145.0MHz

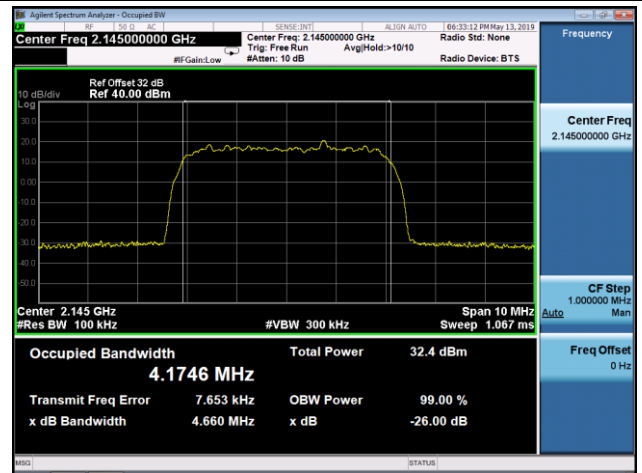


2177.5MHz

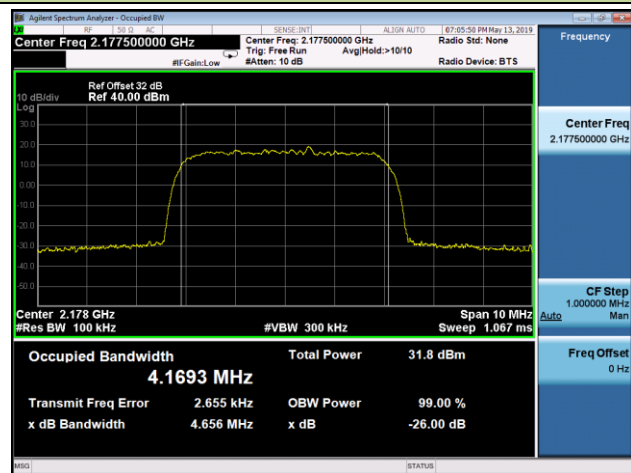


5 + 5 + 5MHz Channel Bandwidth


2112.5MHz + 2117.5MHz + 2122.5MHz

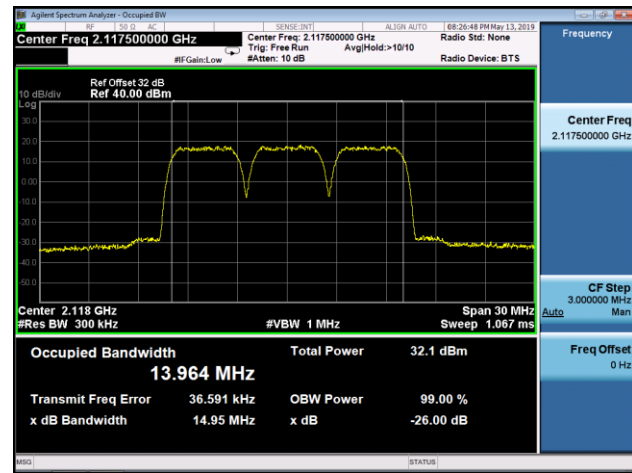

2140.0MHz + 2145.0MHz + 2150.0MHz

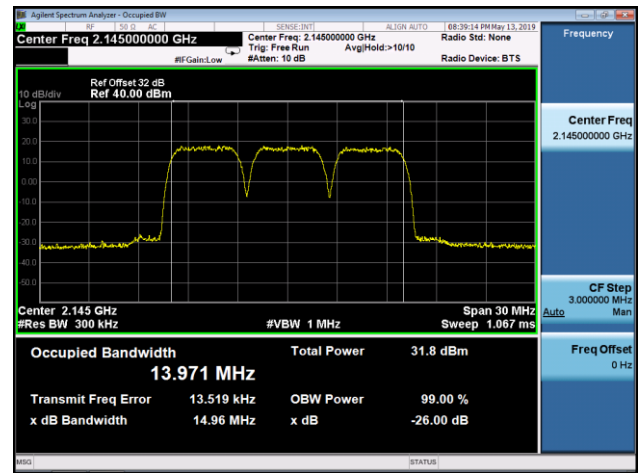


2167.5MHz + 2172.5MHz + 2177.5MHz

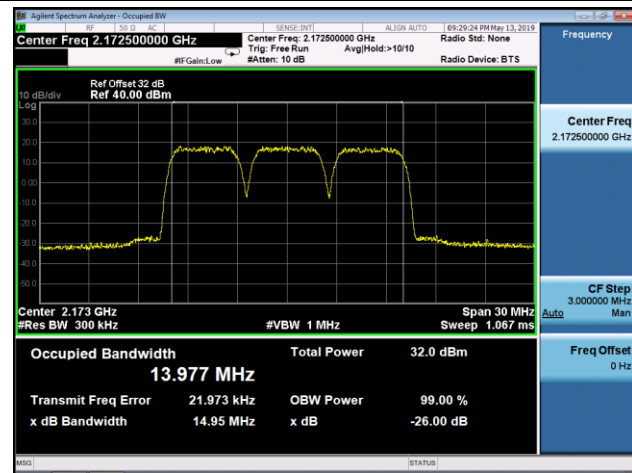


26dB Bandwidth - 16QAM

5MHz Channel Bandwidth


2112.5MHz

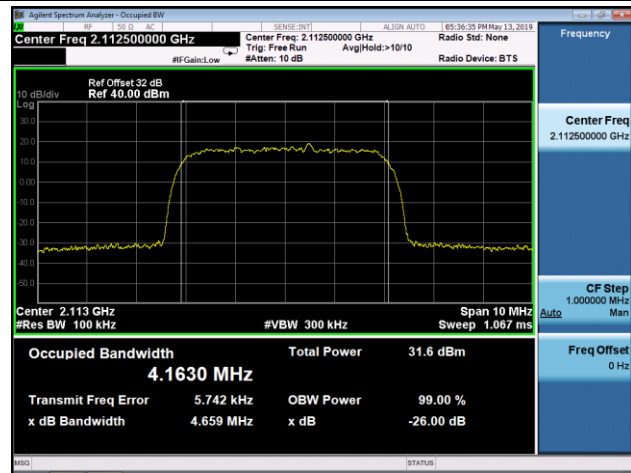

2145.0MHz

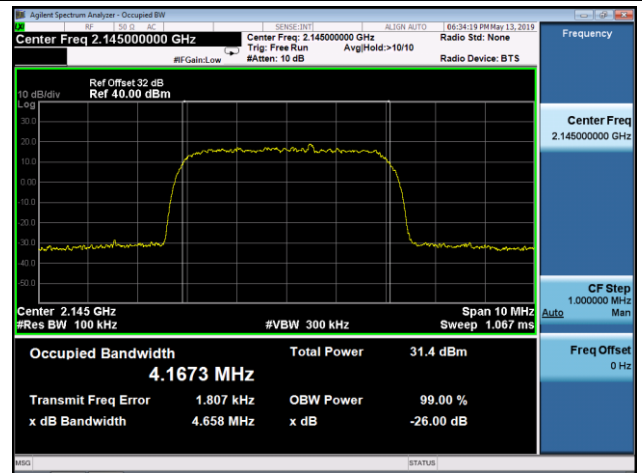


2177.5MHz

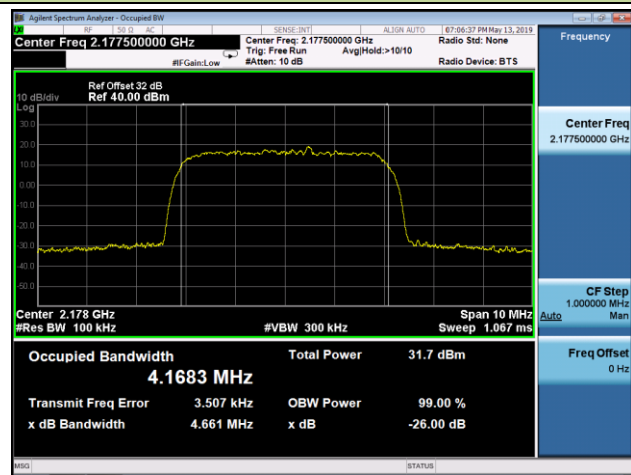


5 + 5 + 5MHz Channel Bandwidth


2112.5MHz + 2117.5MHz + 2122.5MHz

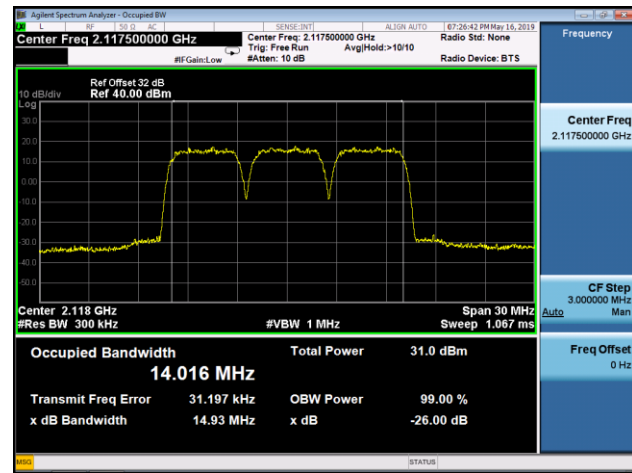

2140.0MHz + 2145.0MHz + 2150.0MHz

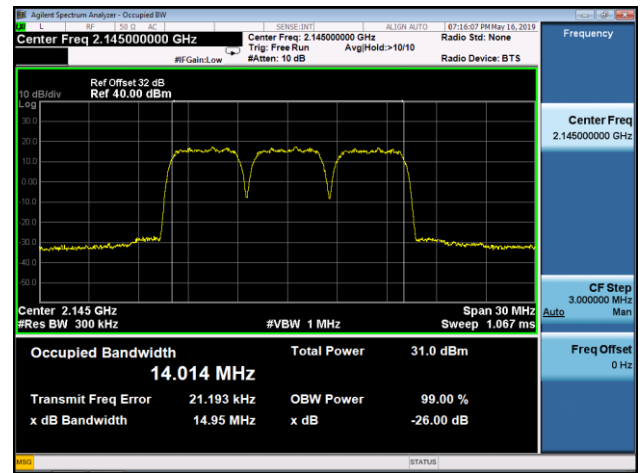

2167.5MHz + 2172.5MHz + 2177.5MHz

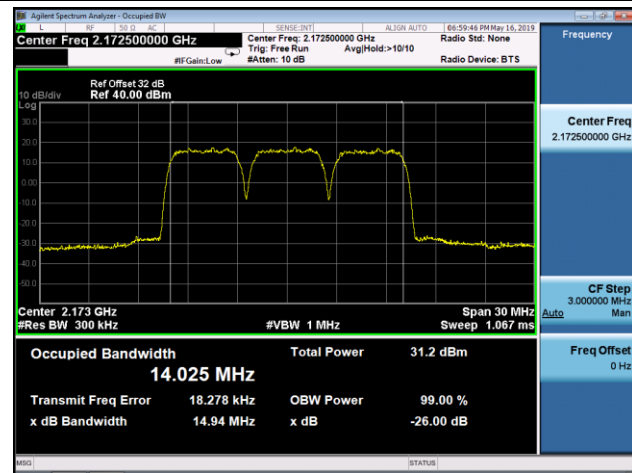

6.5. Band Edge Measurement

6.5.1. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

This device can be implement MIMO function, so the limit of spurious emissions needs to be reduced by $10 \cdot \log(\text{Numbers}_{\text{Ant}})$ according to FCC KDB 662911 D01 guidance.

The limit is adjusted to $-13 \text{ dBm} - 10 \cdot \log(2) = -16.01 \text{ dBm}$

6.5.2. Test Procedure Used

KDB 971168 D01v03r01 - Section 6.1


ANSI C63.26-2015 - Section 5.7.1

6.5.3. Test Setting

1. Set the analyzer frequency to low or high channel.
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW;
3. $\text{VBW} \geq 3 \cdot \text{RBW}$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.

To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

6.5.4.Test Setup

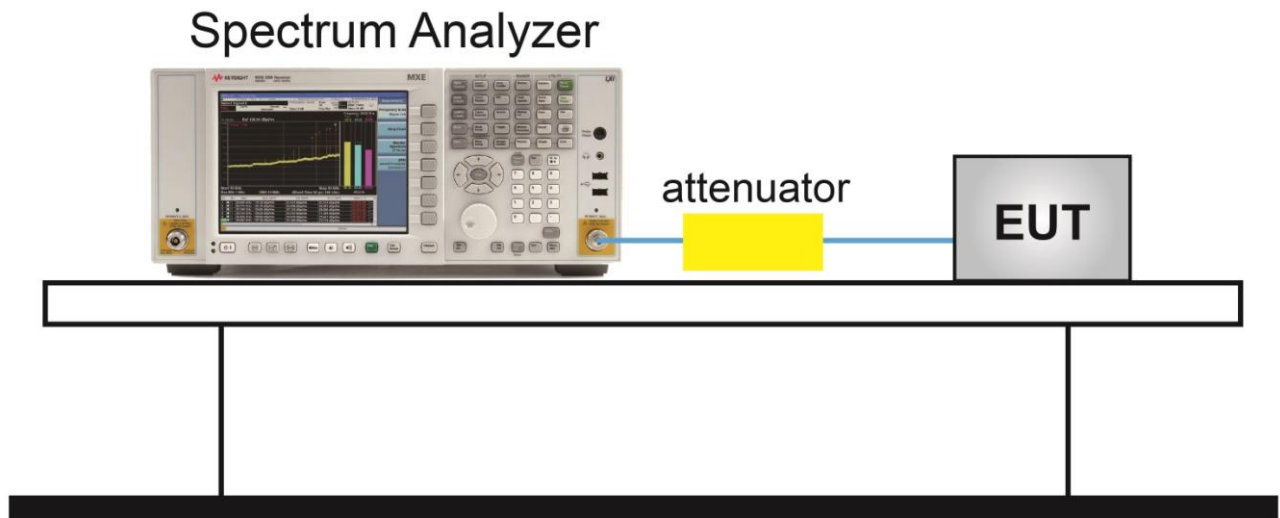

6.5.5. Test Setup

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/09
Test Item	Band Edge - WCDMA Band 2 (Single Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Max Band Edge (dBm)		Limit (dBm)	Result
		Ant 0	Ant 1		
QPSK					
1932.4	5	-41.51	-42.07	≤ -16.01	Pass
1987.6	5	-37.91	-38.29	≤ -16.01	Pass
16QAM					
1932.4	5	-41.53	-41.14	≤ -16.01	Pass
1987.6	5	-36.08	-35.52	≤ -16.01	Pass


Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/09
Test Item	Band Edge - WCDMA Band 2 (Multi Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Max Band Edge (dBm)		Limit (dBm)	Result
		Ant 0	Ant 1		
QPSK					
1932.4 + 1937.4 + 1942.4	5 + 5 + 5	-21.51	-21.51	≤ -16.01	Pass
1977.6 + 1982.6 + 1987.6	5 + 5 + 5	-19.99	-19.99	≤ -16.01	Pass
16QAM					
1932.4 + 1937.4 + 1942.4	5 + 5 + 5	-21.51	-20.89	≤ -16.01	Pass
1977.6 + 1982.6 + 1987.6	5 + 5 + 5	-19.99	-20.77	≤ -16.01	Pass

Band Edge - Ant 0 (QPSK)

5MHz Channel Bandwidth

1932.4MHz

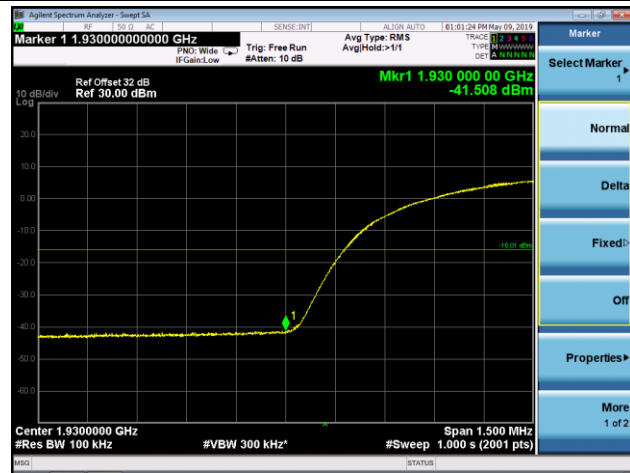

1987.6MHz



5 + 5 + 5MHz Channel Bandwidth

1932.4MHz + 1937.4MHz + 1942.4MHz




1977.6MHz + 1982.6MHz + 1987.6 MHz



Band Edge - Ant 0 (16QAM)

5MHz Channel Bandwidth

1932.4MHz

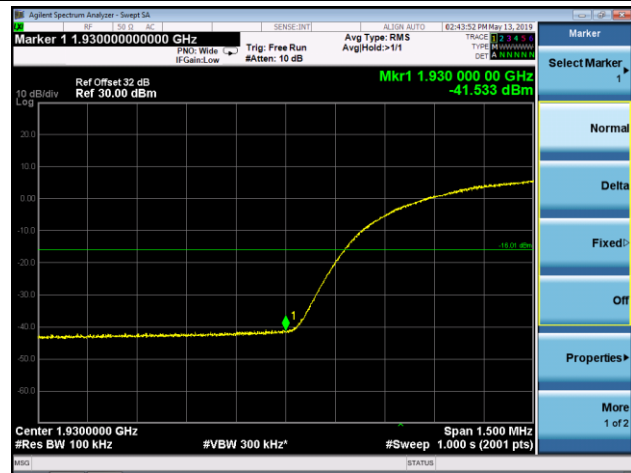

1987.6MHz



5 + 5 + 5MHz Channel Bandwidth

1932.4MHz + 1937.4MHz + 1942.4MHz




1977.6MHz + 1982.6MHz + 1987.6 MHz



Band Edge - Ant 1 (QPSK)

5MHz Channel Bandwidth

1932.4MHz

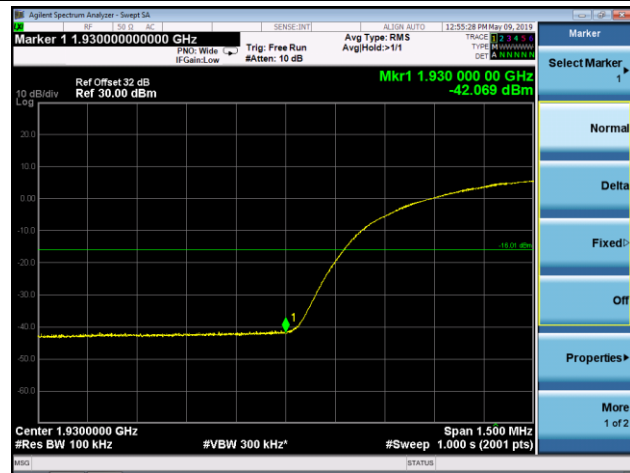

1987.6MHz



5 + 5 + 5MHz Channel Bandwidth

1932.4MHz + 1937.4MHz + 1942.4MHz



1977.6MHz + 1982.6MHz + 1987.6 MHz



Band Edge - Ant 1 (16QAM)

5MHz Channel Bandwidth

1932.4MHz

1987.6MHz



5 + 5 + 5MHz Channel Bandwidth

1932.4MHz + 1937.4MHz + 1942.4MHz

1977.6MHz + 1982.6MHz + 1987.6 MHz



Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/09
Test Item	Band Edge - WCDMA Band 66 (Single Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Max Band Edge (dBm)		Limit (dBm)	Result
		Ant 0	Ant 1		
QPSK					
1932.4	5	-39.74	-40.04	≤ -16.01	Pass
1987.6	5	-35.21	-35.98	≤ -16.01	Pass
16QAM					
1932.4	5	-39.69	-40.23	≤ -16.01	Pass
1987.6	5	-34.61	-36.41	≤ -16.01	Pass

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2019/05/09
Test Item	Band Edge - WCDMA Band 66 (Multi Carrier)		

Frequency (MHz)	Channel Bandwidth (MHz)	Max Band Edge (dBm)		Limit (dBm)	Result
		Ant 0	Ant 1		
QPSK					
1932.4 + 1937.4 + 1942.4	5 + 5 + 5	-19.42	-19.25	≤ -16.01	Pass
1977.6 + 1982.6 + 1987.6	5 + 5 + 5	-19.84	-20.00	≤ -16.01	Pass
16QAM					
1932.4 + 1937.4 + 1942.4	5 + 5 + 5	-20.54	-20.68	≤ -16.01	Pass
1977.6 + 1982.6 + 1987.6	5 + 5 + 5	-20.74	-21.03	≤ -16.01	Pass

Band Edge - Ant 0 (QPSK)

5MHz Channel Bandwidth

2112.5MHz

2177.5MHz



5 + 5 + 5MHz Channel Bandwidth

2112.5MHz + 2117.5MHz + 2122.5MHz


2167.5MHz + 2172.5MHz + 2177.5MHz



Band Edge - Ant 0 (16QAM)

5MHz Channel Bandwidth

2112.5MHz

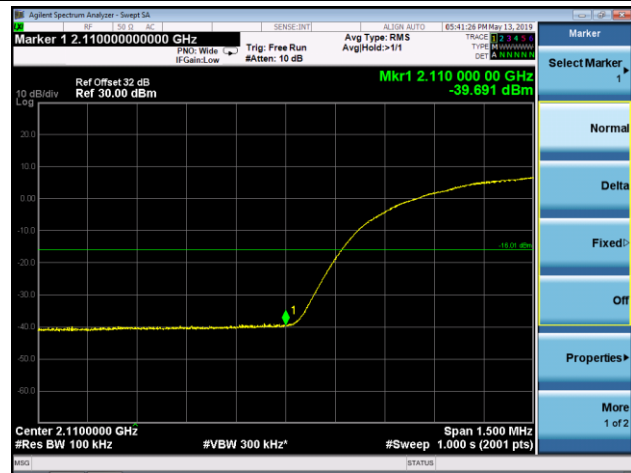

2177.5MHz



5 + 5 + 5MHz Channel Bandwidth

2112.5MHz + 2117.5MHz + 2122.5MHz



2167.5MHz + 2172.5MHz + 2177.5MHz



Band Edge - Ant 1 (QPSK)

5MHz Channel Bandwidth

2112.5MHz



2177.5MHz



5 + 5 + 5MHz Channel Bandwidth

2112.5MHz + 2117.5MHz + 2122.5MHz



2167.5MHz + 2172.5MHz + 2177.5MHz

