

FCC TEST REPORT  
FOR  
ENSAMBLADORA Y DISTRIBUIDORA DE TECNOLOGIA S.A.  
4G Smart phone Athos Pro  
Model No.: QA5616  
Additional Model No.: WF5003

Prepared for : ENSAMBLADORA Y DISTRIBUIDORA DE TECNOLOGIA S.A.  
Address : OFICINA 440, EDIFICIO TRADE BUILDING, AV. JOAQUIN  
ORRANTIA Y LEOPOLDO BENITEZ, GUAYAQUIL, Ecuador

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an  
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : [www.LCS-cert.com](http://www.LCS-cert.com)  
Mail : [webmaster@LCS-cert.com](mailto:webmaster@LCS-cert.com)

Date of receipt of test sample : June 13, 2016  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : June 13, 2016~July 02, 2016  
Date of Report : July 02, 2016

**FCC TEST REPORT****FCC CFR 47 PART 15 C(15.247): 2015****Report Reference No. .... : LCS1606141034E**

Date of Issue ..... : July 02, 2016

**Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure..... : Full application of Harmonised standards  Partial application of Harmonised standards  Other standard testing method **Applicant's Name ..... : ENSAMBLADORA Y DISTRIBUIDORA DE TECNOLOGIA S.A.**

Address ..... : OFICINA 440, EDIFICIO TRADE BUILDING, AV. JOAQUIN ORRANTIA Y LEOPOLDO BENITEZ, GUAYAQUIL, Ecuador

**Test Specification**

Standard ..... : FCC CFR 47 PART 15 C(15.247): 2015

Test Report Form No. .... : LCSEMC-1.0

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03


**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description. .... : 4G Smart phone Athos Pro**

Trade Mark ..... : QUADE

Model/ Type reference ..... : QA5616

Ratings ..... : DC 3.7V by battery(2000mAh);  
Charging Voltage: DC 5V, 1A**Result ..... : Positive****Compiled by:****Supervised by:****Approved by:**

Jacky Li/ File administrators

Glin Lu/ Technique principal

Gavin Liang/ Manager

## FCC -- TEST REPORT

Test Report No. : **LCS1606141034E**July 02, 2016  
Date of issue

Type / Model..... : QA5616

EUT..... : 4G Smart phone Athos Pro

**Applicant.....** : **ENSAMBLADORA Y DISTRIBUIDORA DE TECNOLOGIA S.A.**  
Address..... : OFICINA 440, EDIFICIO TRADE BUILDING, AV. JOAQUIN ORRANTIA Y LEOPOLDO BENITEZ, GUAYAQUIL, Ecuador  
Telephone..... : +59345103027  
Fax..... : +59342004140-104

**Manufacturer.....** : **Neway Communication Co., Limited**  
Address..... : 15/b-15/F Cheuk Nang Plaza 250 Hennessy Road, Hong Kong  
Telephone..... : 00852-21349819  
Fax..... : 00852-30697659

**Factory.....** : **Neway Communication Co., Limited**  
Address..... : 15/b-15/F Cheuk Nang Plaza 250 Hennessy Road, Hong Kong  
Telephone..... : 00852-21349819  
Fax..... : 00852-30697659

**Test Result****Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Revision History

Revision	Issue Date	Revisions	Revised By
00	2016-07-02	Initial Issue	Gavin Liang

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION</b> .....	<b>6</b>
1.1 Description of Device (EUT) .....	6
1.2 Support equipment List .....	7
1.3 External I/O Cable .....	7
1.4 Description of Test Facility .....	7
1.5 Statement of The Measurement Uncertainty .....	7
1.6 Measurement Uncertainty .....	8
1.7 Description Of Test Modes .....	8
<b>2. TEST METHODOLOGY</b> .....	<b>9</b>
2.1 EUT Configuration .....	9
2.2 EUT Exercise .....	9
2.3 General Test Procedures .....	9
<b>3. SYSTEM TEST CONFIGURATION</b> .....	<b>10</b>
3.1 Justification .....	10
3.2 EUT Exercise Software .....	10
3.3 Special Accessories .....	10
3.4 Block Diagram/Schematics .....	10
3.5 Equipment Modifications .....	10
3.6 Test Setup .....	10
<b>4. SUMMARY OF TEST RESULTS</b> .....	<b>11</b>
<b>5. SUMMARY OF TEST EQUIPMENT</b> .....	<b>12</b>
<b>6. ANTENNA PORT MEASUREMENT</b> .....	<b>13</b>
6.1 Peak Power .....	13
6.2 Frequency Separation and 20 dB Bandwidth .....	16
6.3 Number of Hopping Frequency .....	21
6.4 Time of Occupancy (Dwell Time) .....	23
6.5 Conducted Spurious Emissions and Band Edges Test .....	26
<b>7. RADIATED MEASUREMENT</b> .....	<b>30</b>
7.1 Block Diagram of Test Setup .....	30
7.2 Radiated Emission Limit .....	31
7.3 Instruments Setting .....	32
7.4 Test Procedures .....	33
7.5 Results for Radiated Emissions .....	36
7.6 Results for Band edge Testing (Radiated) .....	39
7.7. Power line conducted emissions .....	40
<b>8. ANTENNA REQUIREMENT</b> .....	<b>43</b>
8.1 Standard Applicable .....	43
8.2 Antenna Connected Construction .....	43

## 1. GENERAL INFORMATION

### 1.1 Description of Device (EUT)

Name of EUT	4G Smart phone Athos Pro
Model Number	QA5616, WF5003
Model Declaration	PCB board, structure and internal of these model(s) are the same, So no additional models were tested
Test Model	QA5616
Hardware version	1490SF MMI V01
Software version	WD_B258
Android version	5.1
GSM/EDGE/GPRS Operation Frequency Band	GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900
UMTS Operation Frequency Band	UMTS FDD Band II/V
LTE Operation Frequency Band	LTE FDD band 2, FDD band 4
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE
GSM Release Version	R99
GSM/EDGE/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GPRS/EDGE Multisport Class	GPRS/EDGE: Multi-slot Class 12
GPRS operation mode	Class B
WCDMA Release Version	R99
HSDPA Release Version	Release 10
HSUPA Release Version	Release 6
DC-HSUPA Release Version	Not Supported
LTE Release Version	R8
LTE/UMTS Power Class	Level 3
WLAN	Supported 802.11b/802.11g/802.11n
WLAN Modulation Type	GMSK for GSM/GPRS, 8-PSK for EDGE,QPSK for UMTS, QPSK, 16QAM for LTE
WLAN FCC Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz
WLAN FCC Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Bluetooth	Supported BT 4.0/BT 3.0+EDR
Bluetooth Operation frequency	2402MHz-2480MHz
Bluetooth Modulation Type	GFSK,π/4DQPSK, 8DPSK
GPS function	Supported and only RX
Antenna Type	PIFA Antenna
Antenna Gain	1.12dBi (max.) For GSM 850; 1.12dBi (max.) For PCS 1900; 1.12dBi (max.) For WCDMA Band II 1.12dBi (max.) For WCDMA Band V 1.12dBi (max.) For LTE FDD Band 2; 1.12dBi (max.) For LTE FDD Band 4 -0.5 dBi (max.) For WIFI/BT
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)

## 1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	AC Adapter	QA5616	--	VOC

## 1.3 External I/O Cable

I/O Port Description	Quantity	Cable
USB	1	Shielded, 0.8m
Earphone	1	1.2m

## 1.4 Description of Test Facility

### Site Description

EMC Lab.

- : CNAS Registration Number. is L4595.
- FCC Registration Number. is 899208.
- Industry Canada Registration Number. is 9642A-1.
- VCCI Registration Number. is C-4260 and R-3804.
- ESMD Registration Number. is ARCB0108.
- UL Registration Number. is 100571-492.
- TUV SUD Registration Number. is SCN1081.
- TUV RH Registration Number. is UA 50296516-001

There is one 3m semi-anechoic chamber and one line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10:2013, CISPR 22/EN 55022 and CISPR16-1-4:2010 SVSWR requirements.

## 1.5 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty :	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty :	150kHz~30MHz	1.63dB	(1)
Power disturbance :	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7 Description Of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With the introduction of the enhanced data rate (EDR) feature, the data rates can be up to 3 Mb/s. An increase in the peak data rate beyond the basic rate of 1 Mb/s is achieved by modulating the RF carrier using GFSK techniques, resulting in an increase of two to three times the number of bits per symbol. The 2 Mb/s EDR packets use a  $\pi/4$ -DQPSK modulation and the 3 Mb/s EDR packets use 8DPSK modulation. The EUT works in the X-axis. The following operating modes were applied for the related test items. All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
GFSK	2402	1
	2441	1
	2480	1
$\pi/4$ DQPSK	2402	2
	2441	2
	2480	2
8-DPSK	2402	3
	2441	3
	2480	3
For Conducted Emission		
Test Mode	TX Mode	
For Radiated Emission		
Test Mode	TX Mode	

Worst-case mode and channel used for 150 kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be TX (1Mbps).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX(1Mbps).

Pre-test AC conducted emission at both power adapter and charge from PC mode, recorded worst case.

Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worst case.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C.

### 2.3 General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2 EUT Exercise Software

N/A.

#### 3.3 Special Accessories

N/A.

#### 3.4 Block Diagram/Schematics

Please refer to the related document.

#### 3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6 Test Setup

Please refer to the test setup photo.

## 4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.247(b)(1)	Maximum Conducted Output Power	Compliant
§15.247(c)	Frequency Separation And 20 dB Bandwidth	Compliant
§15.247(a)(1)(ii)	Number Of Hopping Frequency	Compliant
§15.247(a)(1)(iii)	Time Of Occupancy (Dwell Time)	Compliant
§15.209, §15.205	Conducted Spurious Emissions and Band Edges Test	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant
§15.247(i)§2.1093	RF Exposure	Compliant

## 5. SUMMARY OF TEST EQUIPMENT


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Sensor	R&S	NRV-Z51	100458	2016-06-18	2017-06-17
2	Power Sensor	R&S	NRV-Z32	10057	2016-06-18	2017-06-17
3	Power Meter	R&S	NRVS	100444	2016-06-18	2017-06-17
4	DC Filter	MPE	23872C	N/A	2016-06-18	2017-06-17
5	RF Cable	Harbour Industries	1452	N/A	2016-06-18	2017-06-17
6	SMA Connector	Harbour Industries	9625	N/A	2016-06-18	2017-06-17
7	Spectrum Analyzer	Agilent	N9020A	MY50510140	2015-10-27	2016-10-26
8	Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	2016-06-16	2017-06-15
9	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2016-06-18	2017-06-17
10	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2016-06-18	2017-06-17
11	Amplifier	SCHAFFNER	COA9231A	18667	2016-06-18	2017-06-17
12	Amplifier	Agilent	8449B	3008A02120	2016-06-16	2017-06-15
13	Amplifier	MITEQ	AMF-6F-260 400	9121372	2016-06-16	2017-06-15
14	Loop Antenna	R&S	HFH2-Z2	860004/001	2016-06-18	2017-06-17
15	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2016-06-10	2017-06-09
16	Horn Antenna	EMCO	3115	6741	2016-06-10	2017-06-09
17	Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	2016-06-10	2017-06-09
18	RF Cable-R03m	Jye Bao	RG142	CB021	2016-06-18	2017-06-17
19	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2016-06-18	2017-06-17
20	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2016-06-18	2017-06-17
21	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2016-06-18	2017-06-17
22	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2016-06-18	2017-06-17
23	EMI Test Software	AUDIX	E3	N/A	2016-06-18	2017-06-17

*Note: All equipment through GRGT EST calibration*

## 6. ANTENNA PORT MEASUREMENT

### 6.1 Peak Power

#### 6.1.1 Block Diagram of Test Setup

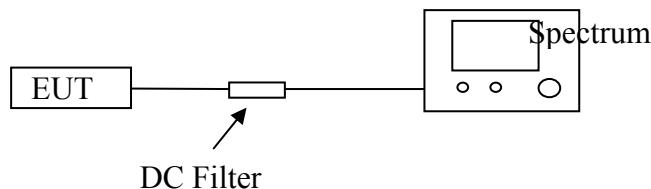

#### 6.1.2 Limit

According to §15.247(b)(1), For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

#### 6.1.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
 RBW > the 20 dB bandwidth of the emission being measured

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak



Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power


#### 6.1.4 Test Results

Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mw)	Limit (mW)	Result
GFSK	2402	4.176	2.616	1000	Pass
	2441	4.969	3.140	1000	Pass
	2480	5.541	3.582	1000	Pass
$\pi/4$ -DQPSK	2402	2.888	1.945	125	Pass
	2441	3.961	2.489	125	Pass
	2480	4.489	2.811	125	Pass
8-DPSK	2402	2.976	1.984	125	Pass
	2441	4.201	2.631	125	Pass
	2480	4.765	2.996	125	Pass


## Test Plots of Maximum Conducted Output Power Measured

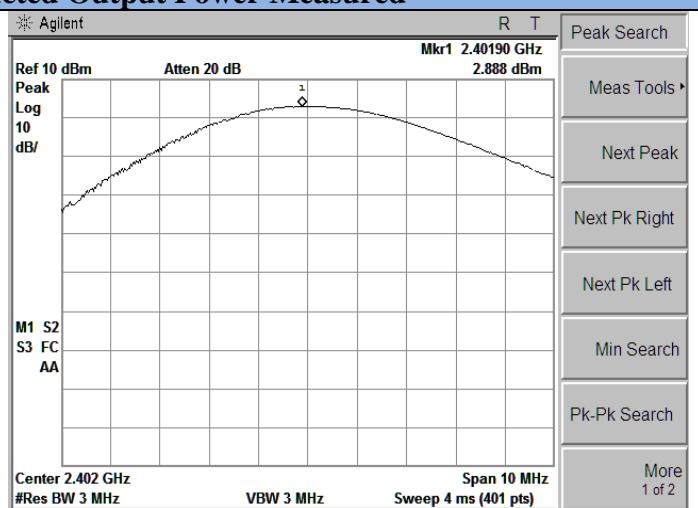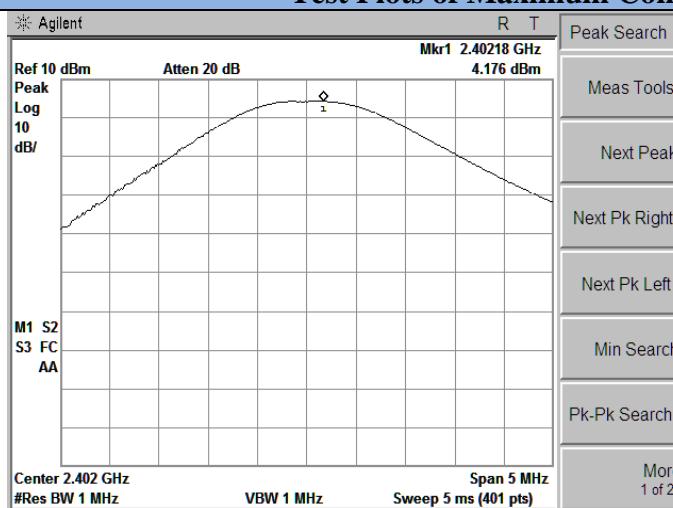


## GFSK-Low Channel, 2402MHz

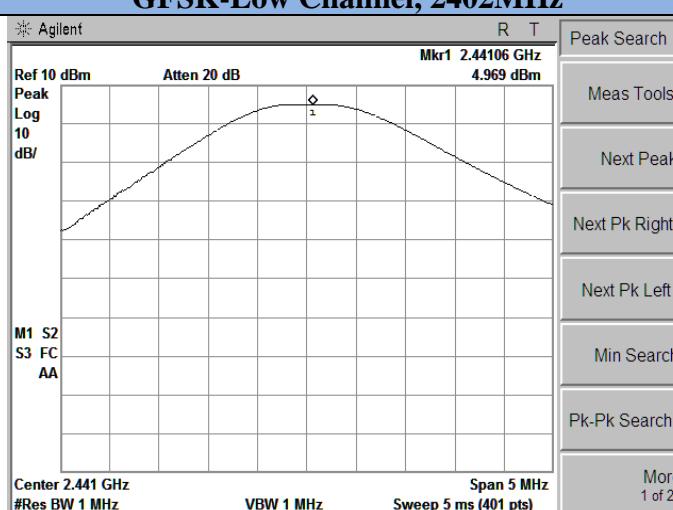


## π/4 DQPSK-Low Channel, 2402MHz

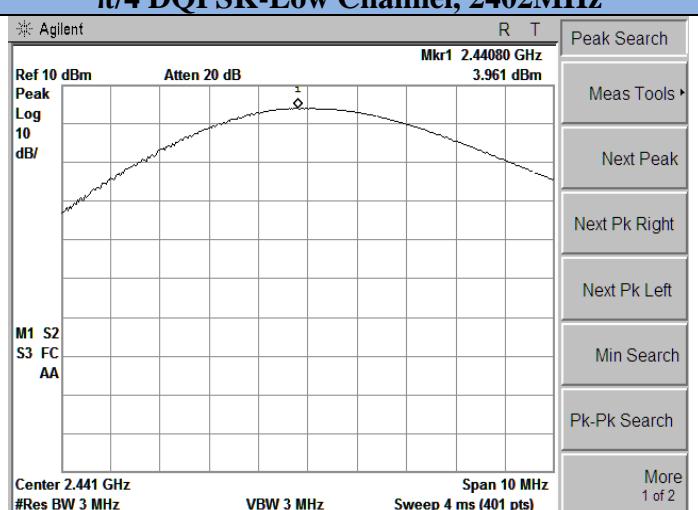

## GFSK-Middle Channel, 2441MHz

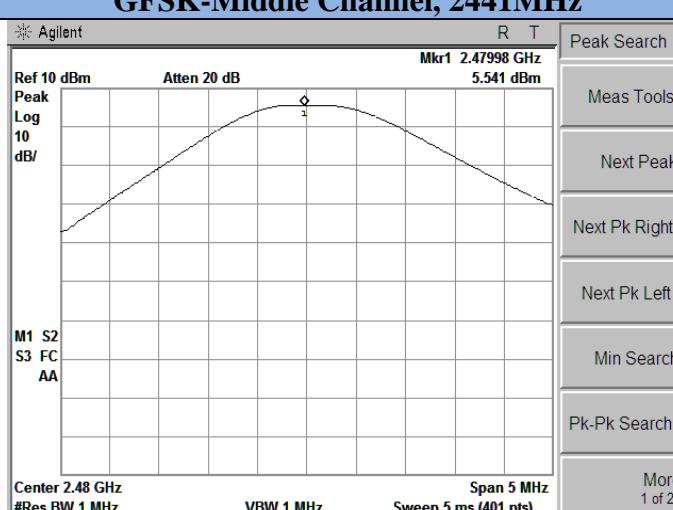

## π/4 DQPSK-Middle Channel, 2441MHz

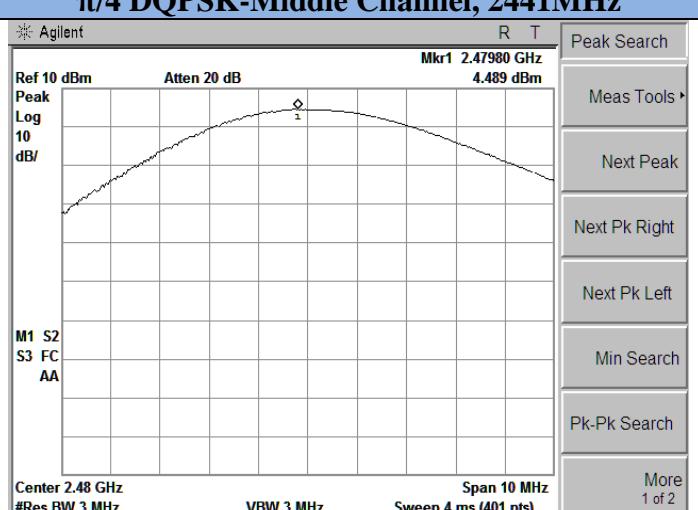

## GFSK-High Channel, 2480MHz

## π/4 DQPSK-High Channel, 2480MHz




## 6.2 Frequency Separation and 20 dB Bandwidth

### 6.2.1 Limit

According to §15.247(c) or A8.1(a), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 6.2.2 Block Diagram of Test Setup

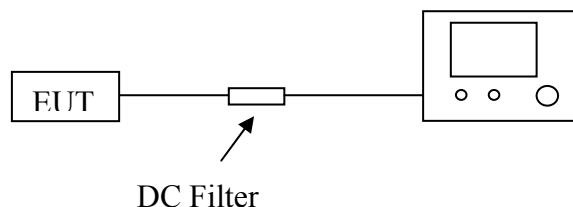

### 6.2.3 Test Procedure

Frequency separation test procedure:

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set center frequency of Spectrum Analyzer = middle of hopping channel.
- D. Set the Spectrum Analyzer as RBW = 100 kHz, VBW = 300 kHz, Span = wide enough to capture the peaks of two adjacent channels, Sweep = auto.
- E. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

20dB bandwidth test procedure:

- A. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel.
- B. RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW.
- C. Detector function = peak.
- D. Trace = max hold.



### 6.2.4 Test Results

The Measurement Result With 1Mbps For GFSK Modulation				
Channel	20dB Bandwidth (kHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	828.810	1.000	>=25 KHz or 2/3 20 dB BW	Pass
Middle	833.860		>=25 KHz or 2/3 20 dB BW	Pass
High	819.033		>=25 KHz or 2/3 20 dB BW	Pass



The Measurement Result With 2Mbps For $\pi/4$ DQPSK Modulation				
Channel	20dB Bandwidth (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	1.126	1.000	>=25 KHz or 20 dB BW	Pass
Middle	1.120		>=25 KHz or 20 dB BW	Pass
High	1.120		>=25 KHz or 20 dB BW	Pass

The Measurement Result With 3Mbps For 8-DPSK Modulation				
Channel	20dB Bandwidth (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	1.168	1.000	>=25 KHz or 20 dB BW	Pass
Middle	1.171		>=25 KHz or 20 dB BW	Pass
High	1.169		>=25 KHz or 20 dB BW	Pass



The test data refer to the following page.

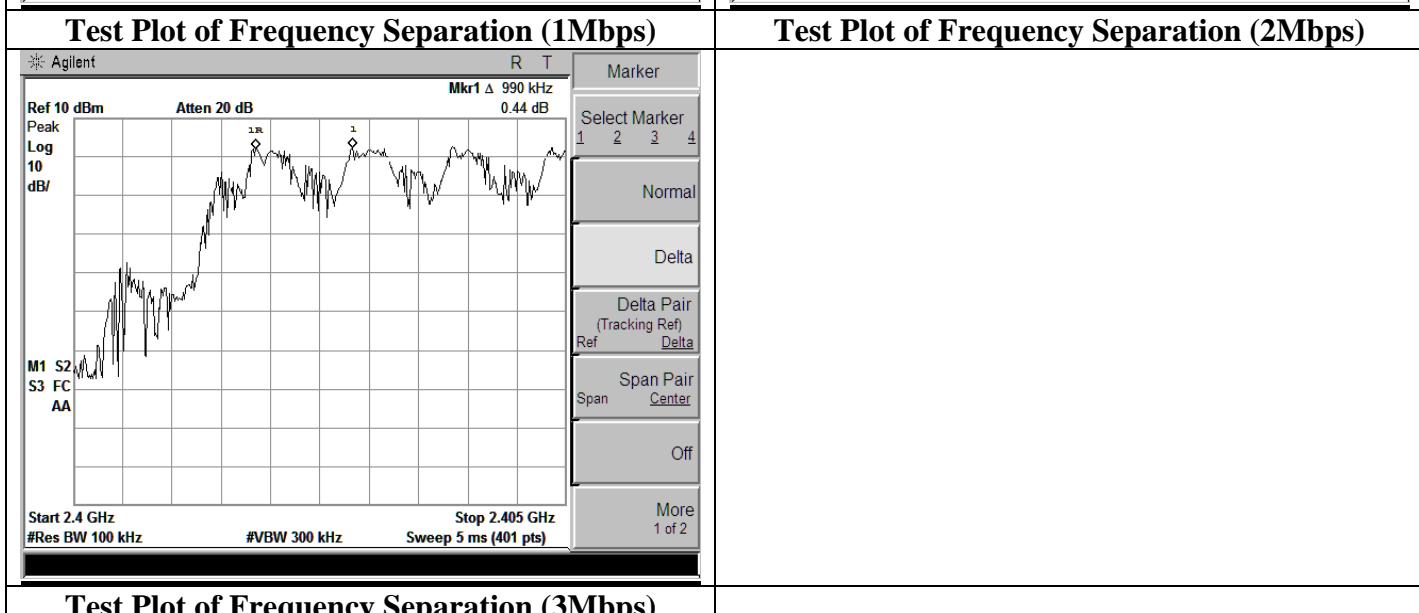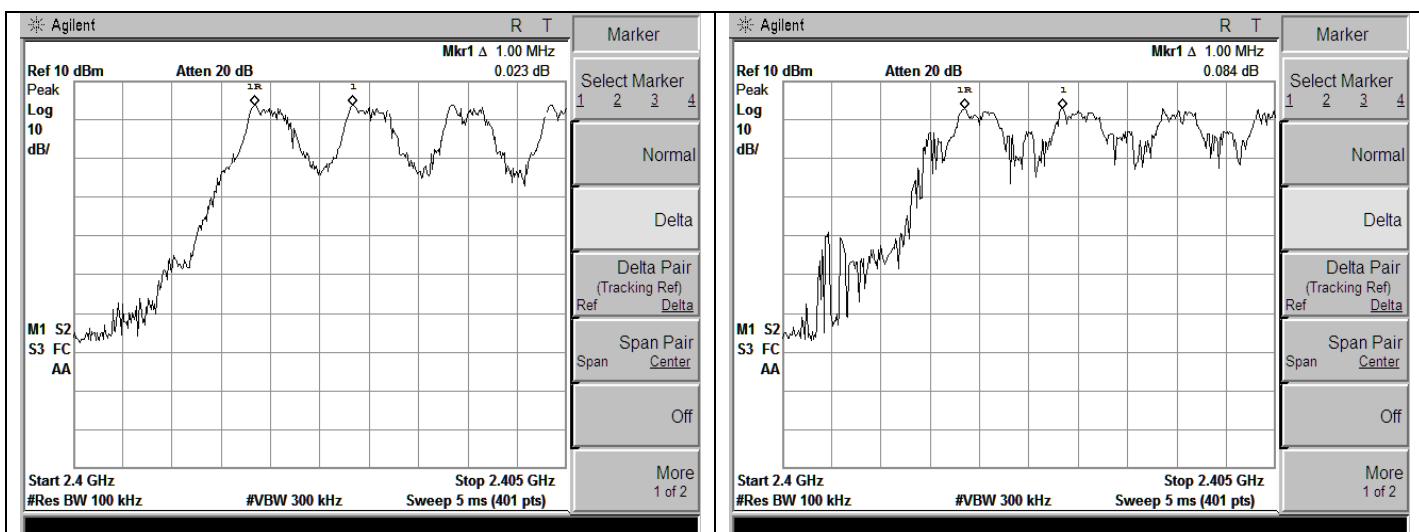



## Test Plot of 20dB Bandwidth

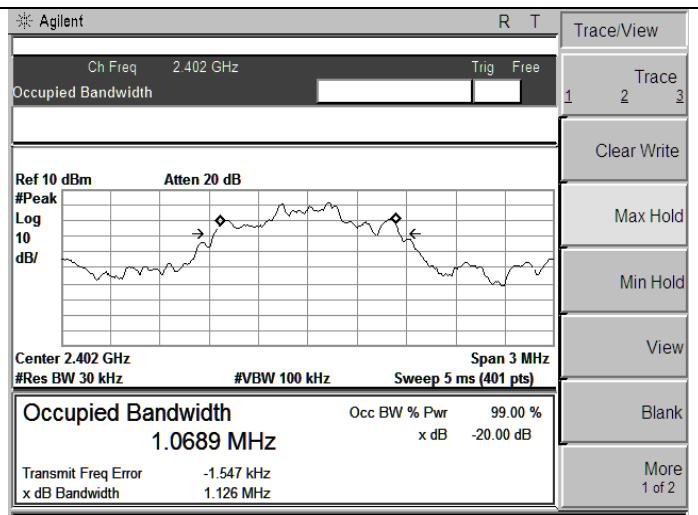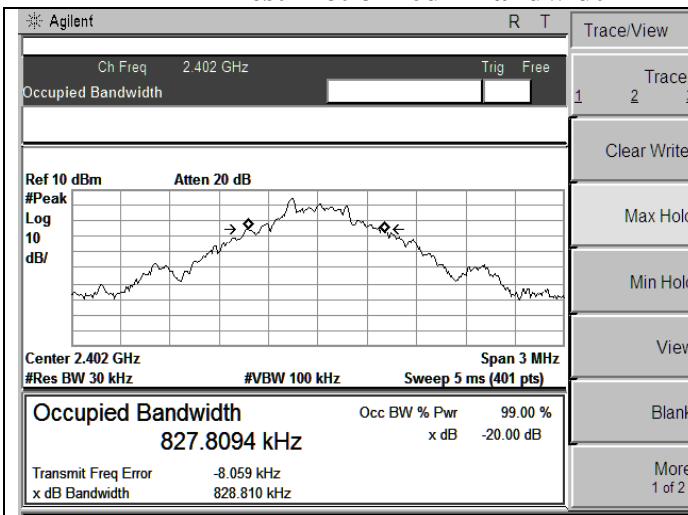

## GFSK-Low Channel, 2402MHz

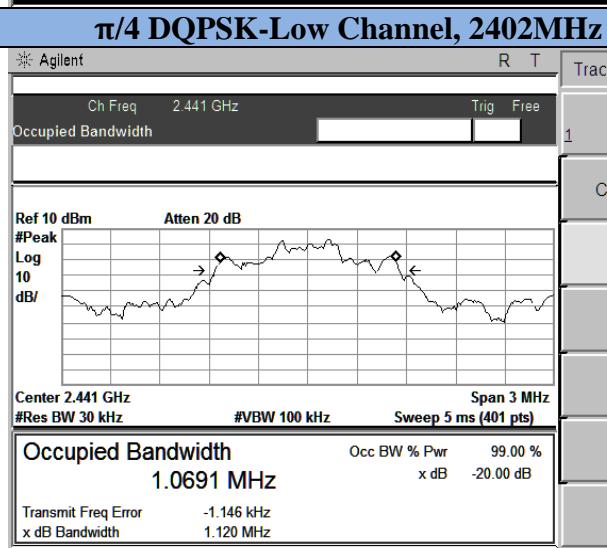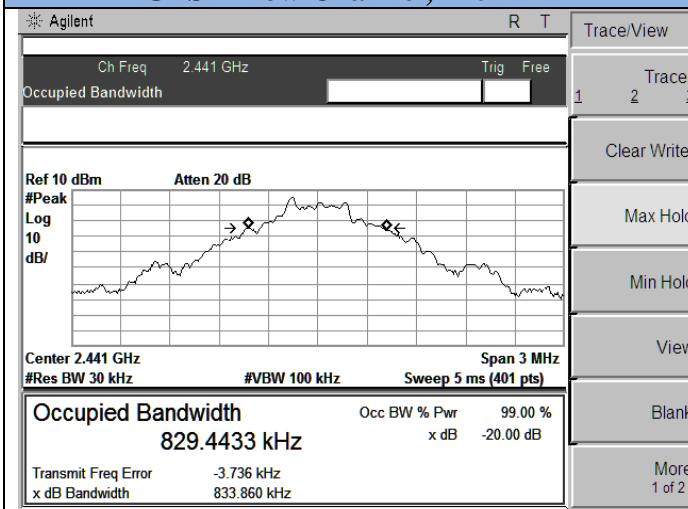

## GFSK-Middle Channel, 2441MHz

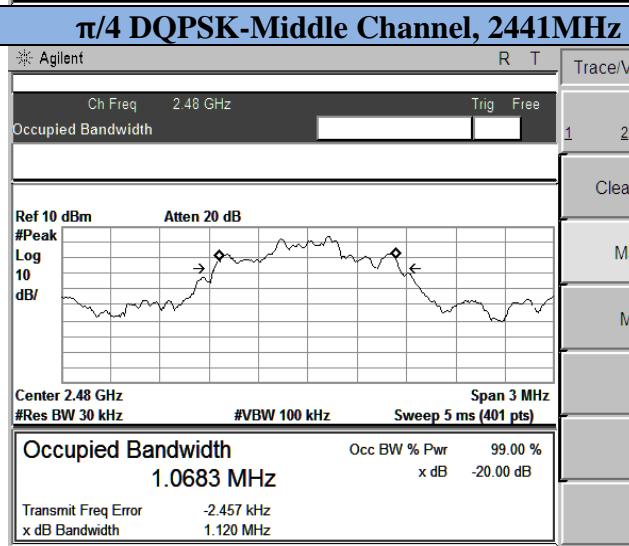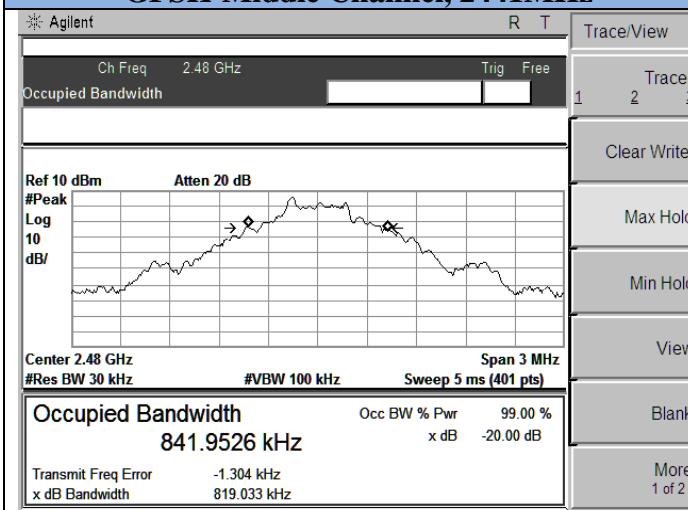

## GFSK-High Channel, 2480MHz

## π/4 DQPSK-High Channel, 2480MHz




## 6.3 Number of Hopping Frequency

### 6.3.1 Limit

According to §15.247(a)(1)(ii) or A8.1 (d), Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

### 6.3.2 Block Diagram of Test Setup

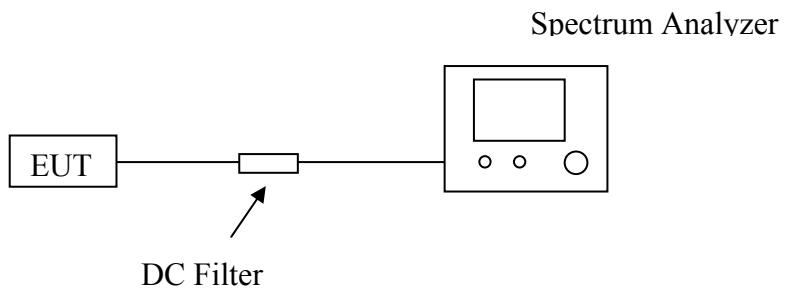


### 6.3.3 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- D. Set the Spectrum Analyzer as RBW, VBW=1MHz.
- E. Max hold, view and count how many channel in the band.

### 6.3.4 Test Results

The Measurement Result With The Worst Case of 1Mbps For GFSK Modulation			
Total No. of Hopping Channel	Measurement Result (No. of Ch)	Limit (MHz)	Result
	79	≥15	Pass

*The test data refer to the following page.*

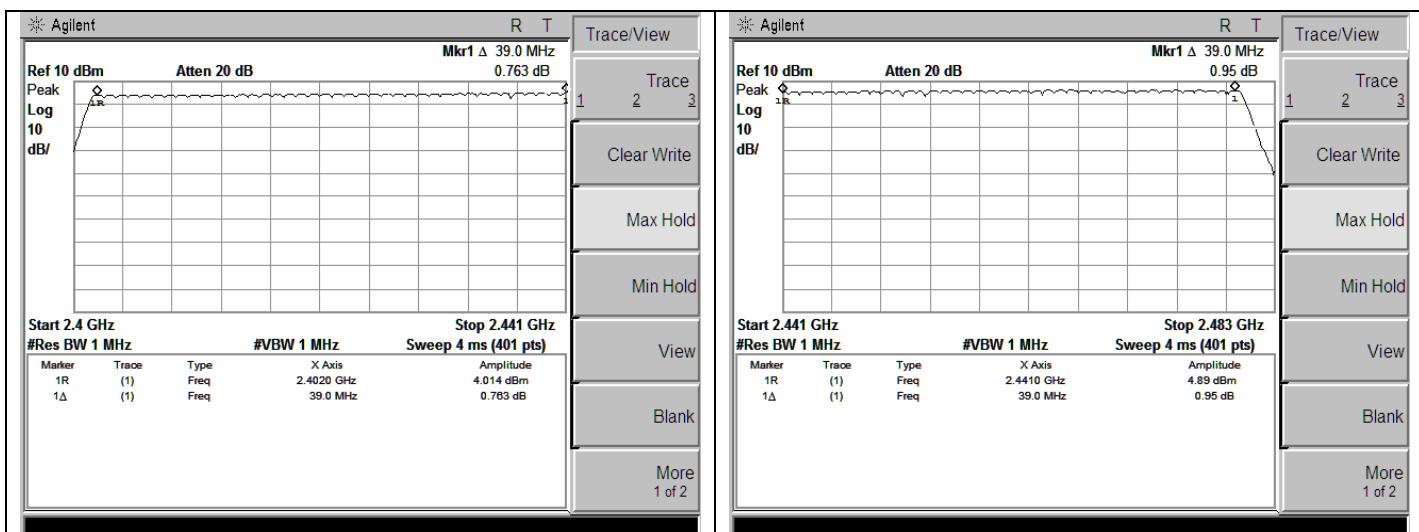

**Test Plot 1 of Number of Hopping Channel(GFSK)**


**Test Plot 2 of Number of Hopping Channel(GFSK)**

## 6.4 Time of Occupancy (Dwell Time)

### 6.4.1 Limit

According to §15.247(a)(1)(iii) or A8.1 (d), Frequency hopping systems operating in the 2400MHz- 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### 6.4.2 Block Diagram of Test Setup

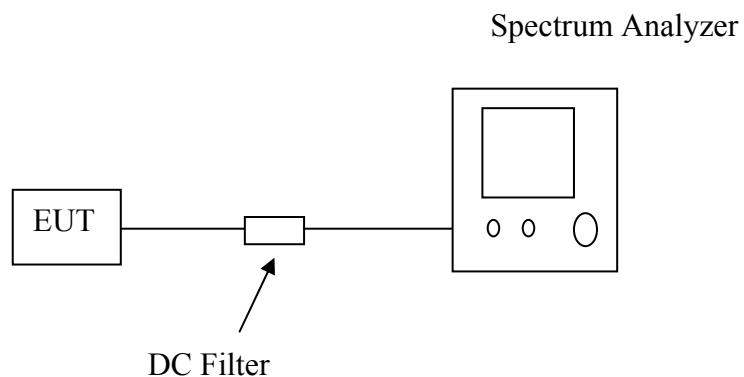

### 6.4.3 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set center frequency of Spectrum Analyzer = operating frequency.
- D. Set the Spectrum Analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- E. Repeat above procedures until all frequency measured were complete.

#### 6.4.4 Test Results

<b>The Measurement Result With The Worst Case of 3Mbps For 8-DPSK Modulation</b>				
<b>Channel</b>	<b>Time of Pulse for DH5 (ms)</b>	<b>Period Time (s)</b>	<b>Sweep Time (ms)</b>	<b>Limit (ms)</b>
Low	2.89	31.6	308.27	400
Middle	2.86	31.6	305.07	400
High	2.89	31.6	308.27	400

##### Low Channel

$$2.89 * (1600/6) / 79 * 31.6 = 308.27 \text{ms}$$


##### Middle Channel

$$2.86 * (1600/6) / 79 * 31.6 = 305.07 \text{ms}$$

##### High Channel

$$2.89 * (1600/6) / 79 * 31.6 = 308.27 \text{ms}$$

*The test data refer to the following:*

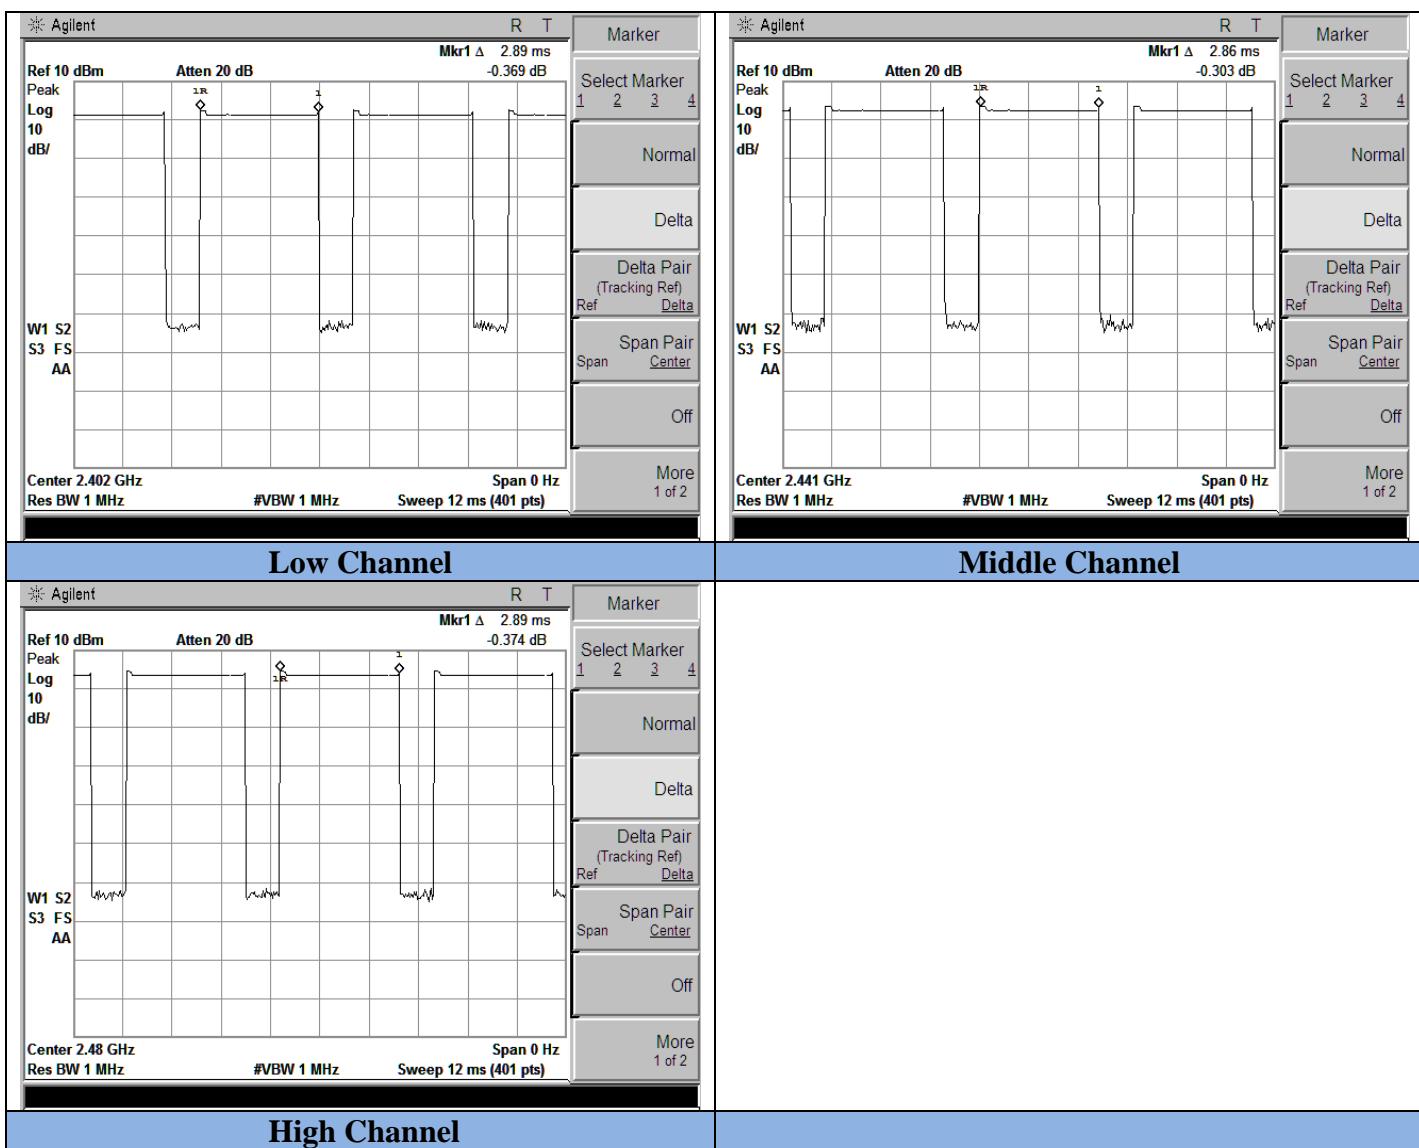


## 6.5 Conducted Spurious Emissions and Band Edges Test

### 6.5.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 6.5.2 Block Diagram of Test Setup

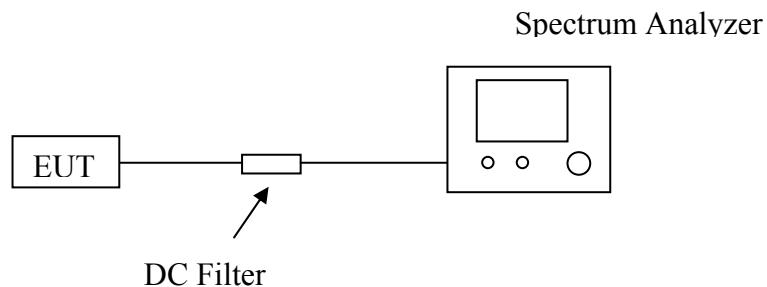

### 6.5.3 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz.

Measurements are made over the 9 kHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels

### 6.5.4 Test Results of Conducted Spurious Emissions

No non-compliance noted. Only record the worst test result (TX-GFSK) in this report. The test data refer to the following page.


## Test Plot


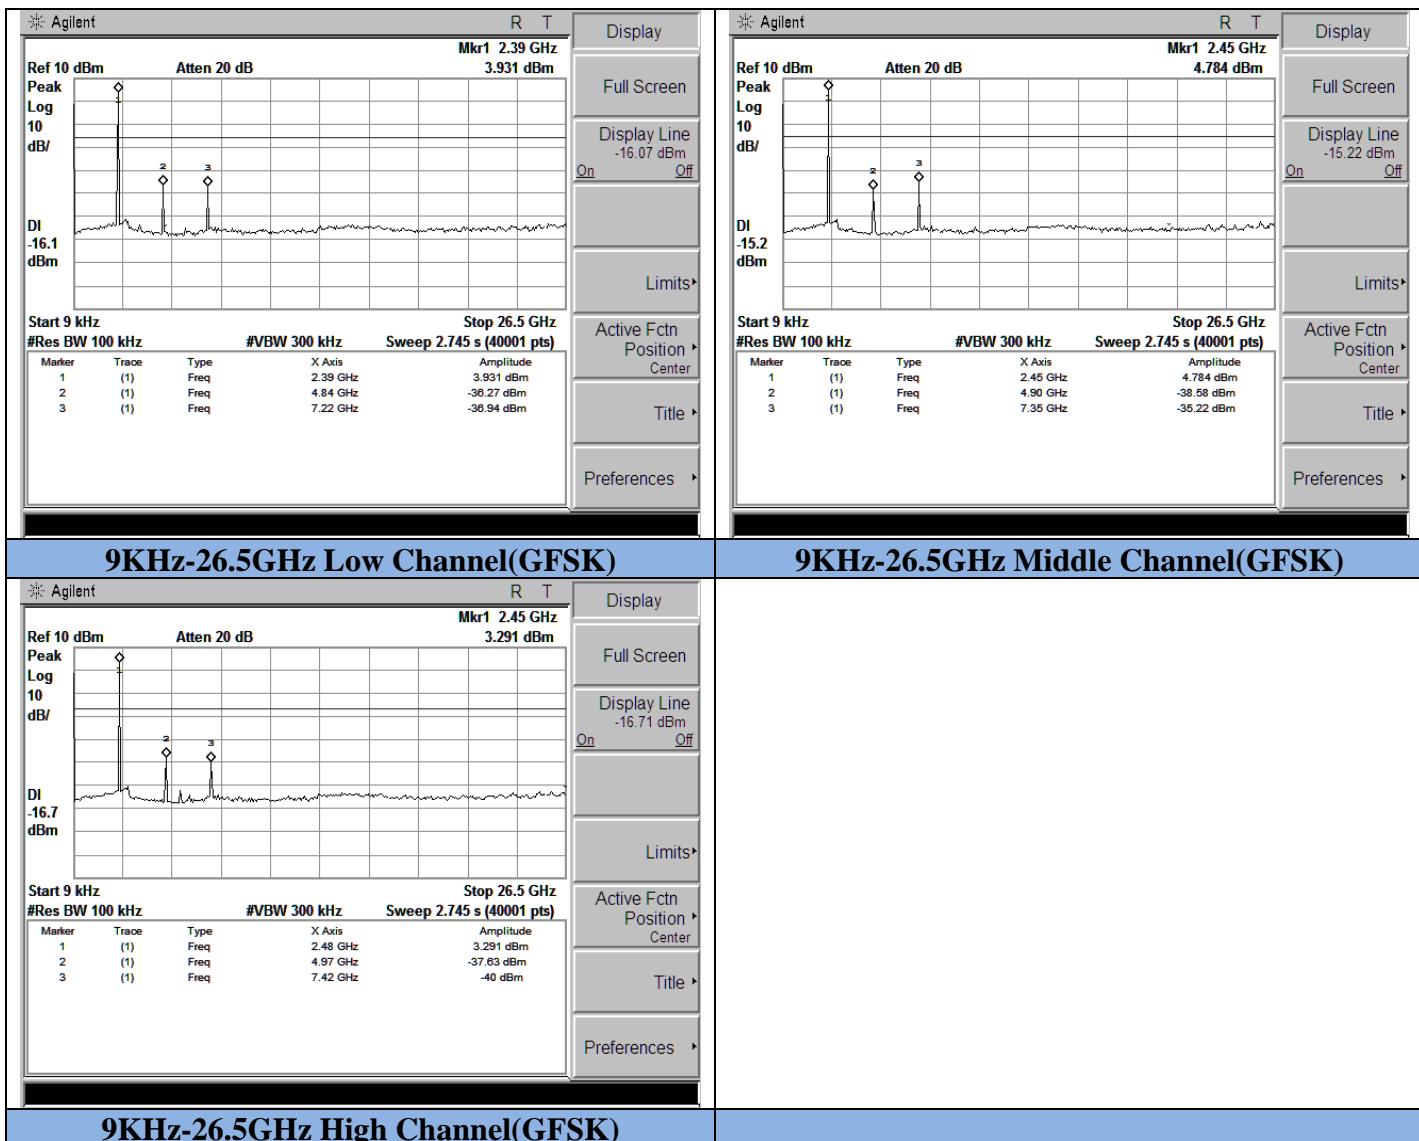


### 6.5.5 Test Results of Band Edges Test


No non-compliance noted. Only record the worst test result in this report. The test data refer to the following page.

#### Test Plot

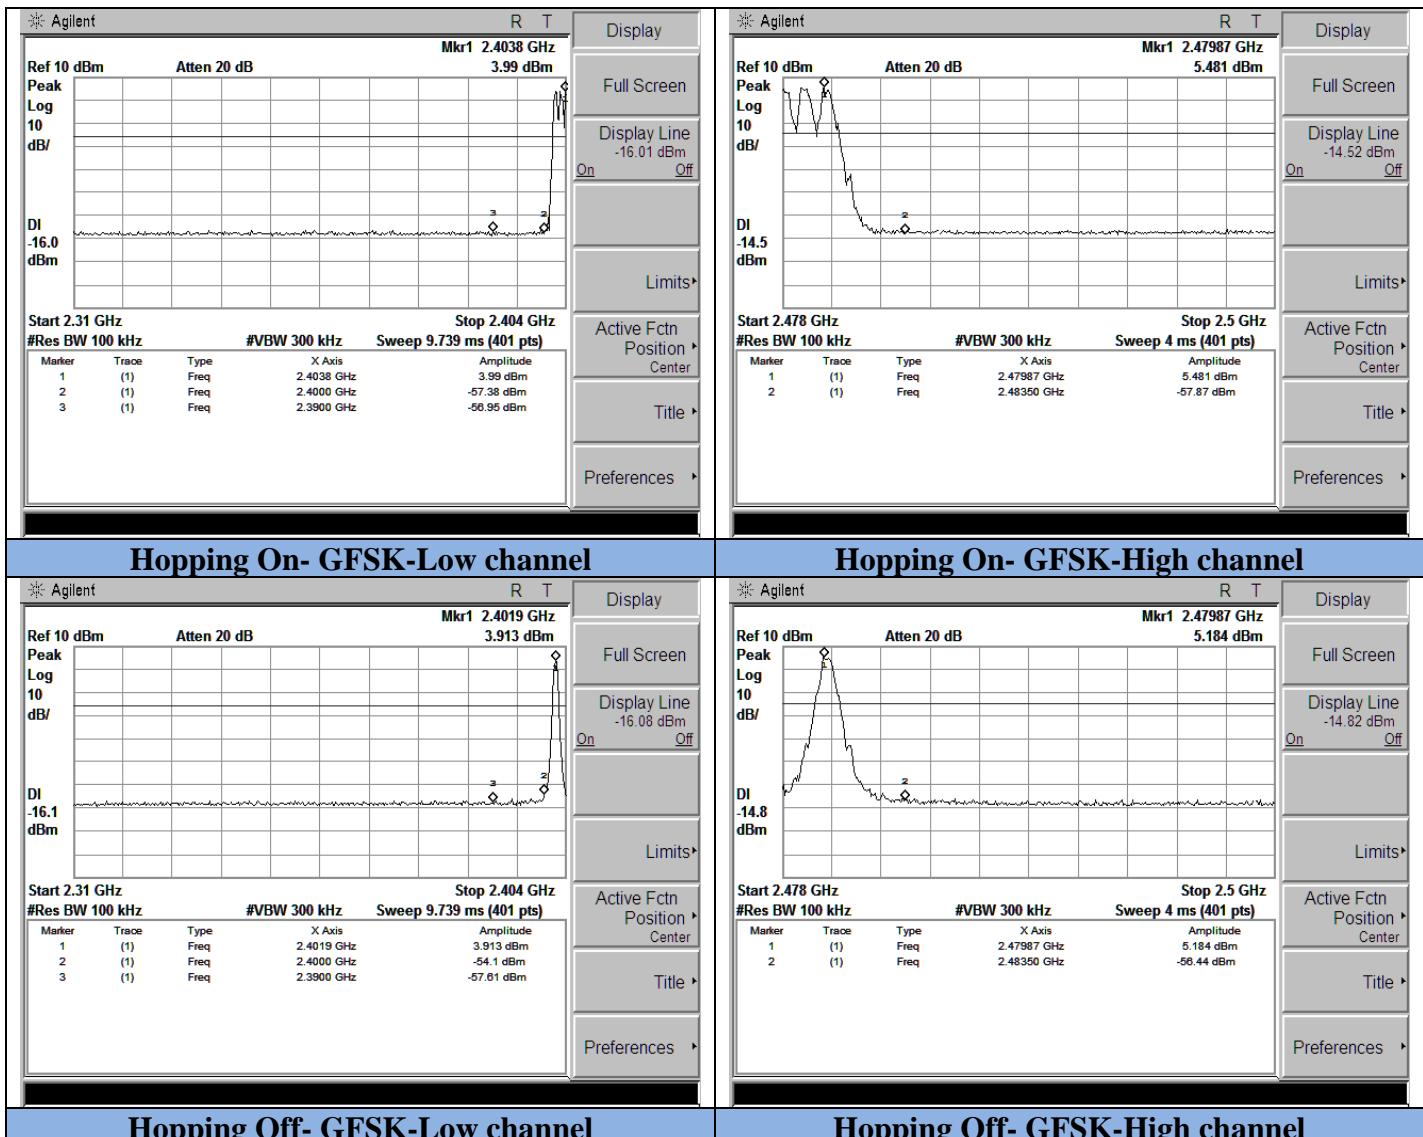


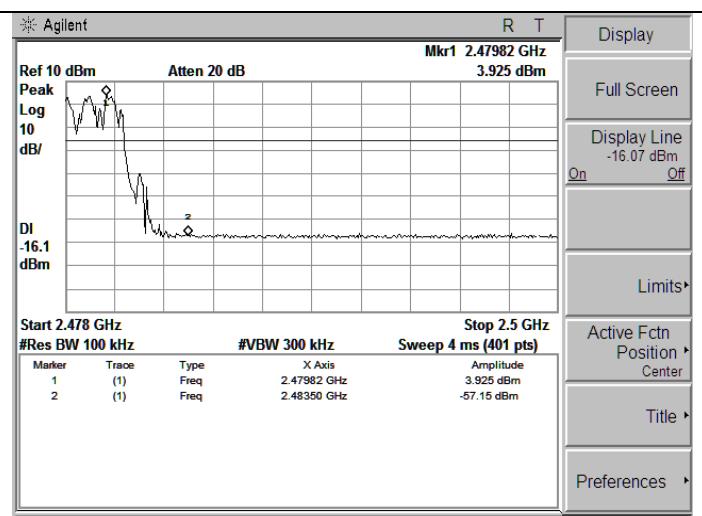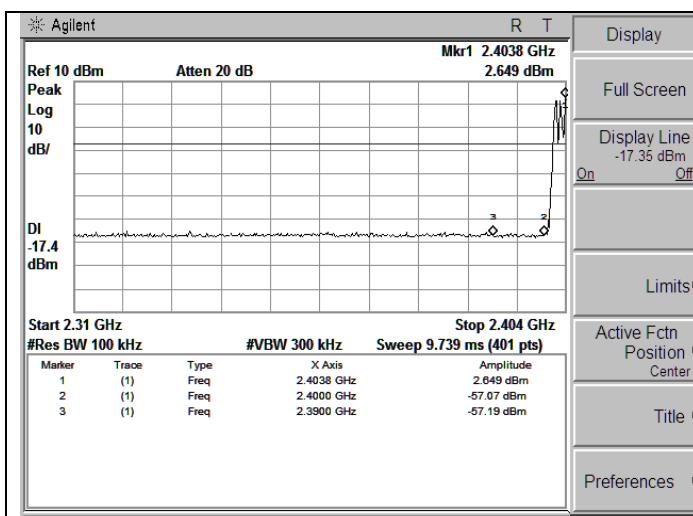

### Hopping On- 8-DPSK-Low channel

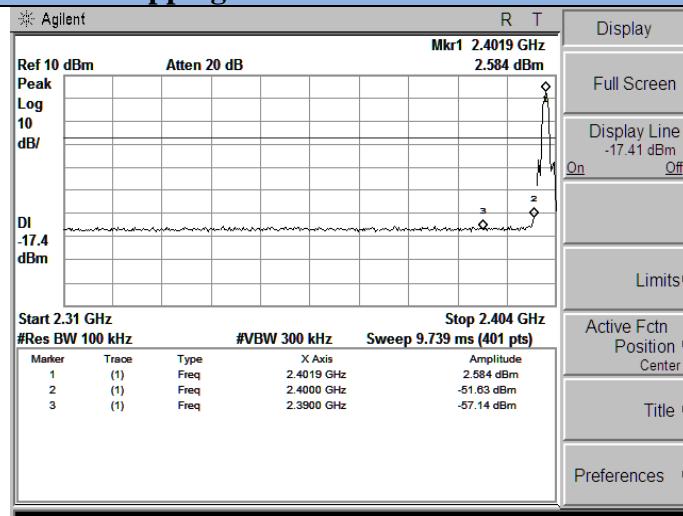

### Hopping On- 8-DPSK-High channel

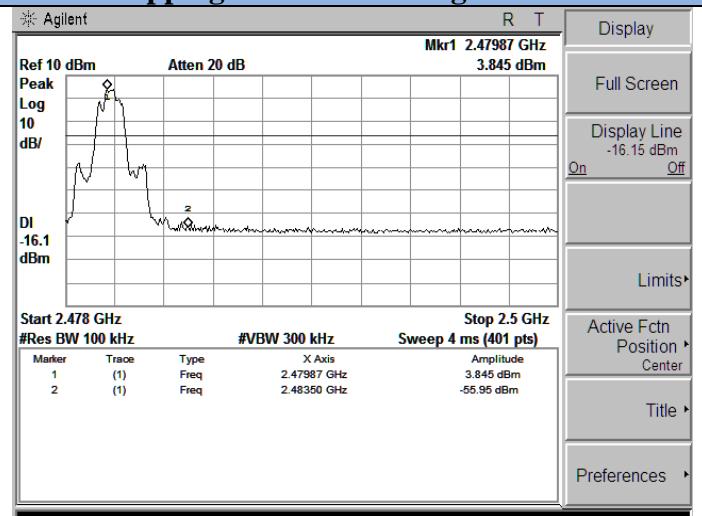


### Hopping Off- 8-DPSK-Low channel


### Hopping Off- 8-DPSK-High channel

## 7. RADIATED MEASUREMENT


### 7.1 Block Diagram of Test Setup

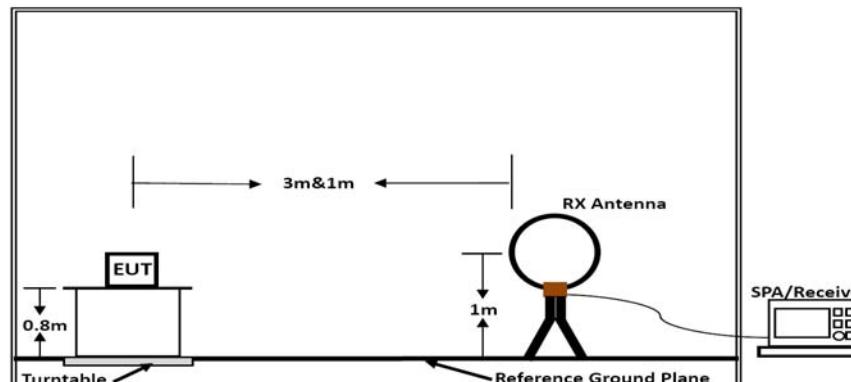

Below 30MHz

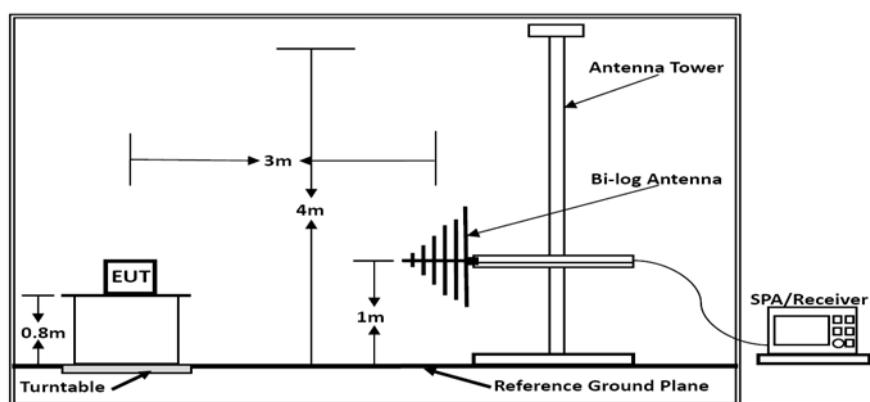

Below 1GHz

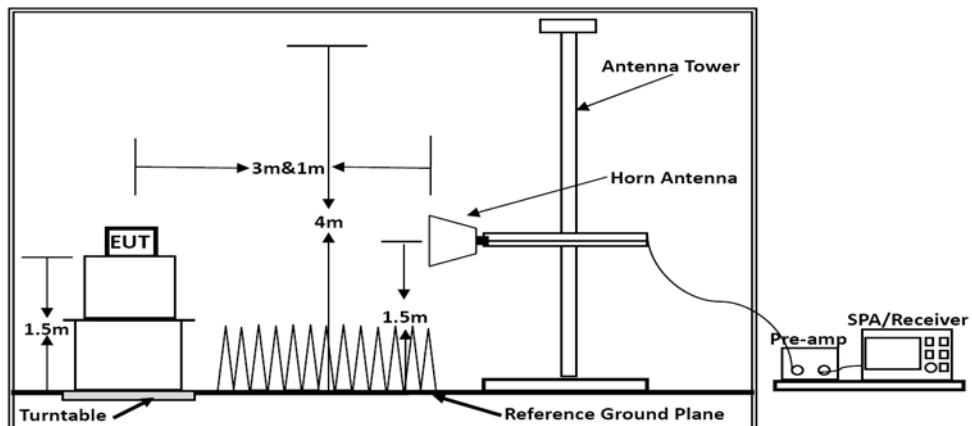

Above 1GHz

## 7.2 Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293.	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

Part 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector.

Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Part 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

### 7.3 Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

## 7.4 Test Procedures

### 1) Sequence of testing 9 kHz to 30 MHz

#### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### **Premasurement:**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

#### **Final measurement:**

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premereasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

##### **Premeasurement:**

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

##### **Final measurement:**


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

### 7.5 Results for Radiated Emissions

#### **PASS.**

*Only record the worst test result in this report.*


*The test data please refer to following page:*

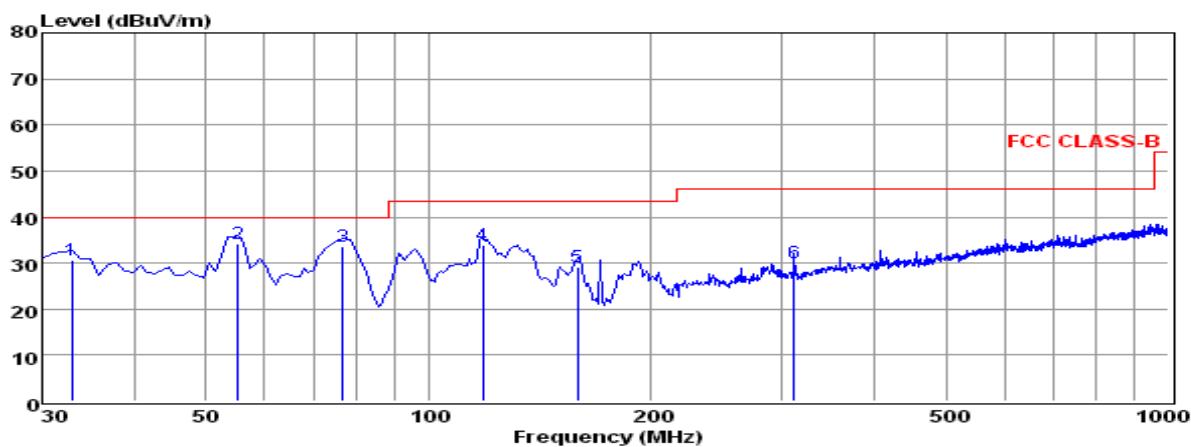**Below 1GHz (High Channel)**

Env. / Ins: 24 °C / 56%  
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	32.91	18.01	0.37	12.31	30.69	40.00	-9.31	QP
2	55.22	20.58	0.46	13.01	34.05	40.00	-5.95	QP
3	76.56	24.98	0.47	8.03	33.48	40.00	-6.52	QP
4	118.27	22.39	0.64	10.79	33.82	43.50	-9.68	QP
5	159.01	19.71	0.83	8.63	29.17	43.50	-14.33	QP
6	312.27	15.77	1.09	13.23	30.09	46.00	-15.91	QP

Note: 1. All readings are Quasi-peak values.  
2. Measured= Reading + Antenna Factor + Cable Loss  
3. The emission that ate 20db blow the offficial limit are not reported

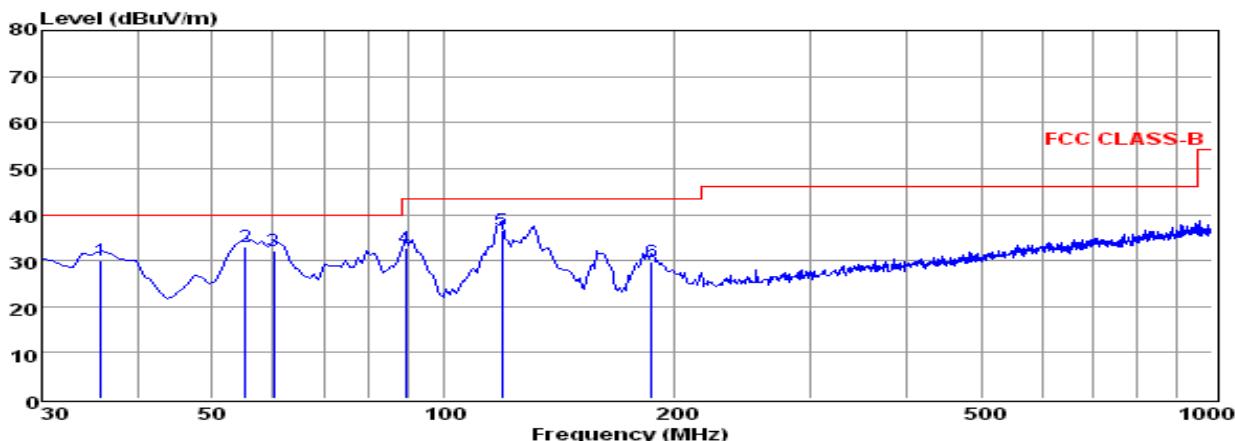

Env. / Ins: 24 °C / 56%  
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	35.82	17.10	0.41	12.51	30.02	40.00	-9.98	QP
2	55.22	19.46	0.46	13.01	32.93	40.00	-7.07	QP
3	60.07	18.91	0.49	12.66	32.06	40.00	-7.94	QP
4	89.17	20.49	0.68	11.64	32.81	43.50	-10.69	QP
5	119.24	25.31	0.64	10.61	36.56	43.50	-6.94	QP
6	186.17	18.43	0.98	10.22	29.63	43.50	-13.87	QP

Note: 1. All readings are Quasi-peak values.  
2. Measured= Reading + Antenna Factor + Cable Loss  
3. The emission that ate 20db blow the offficial limit are not reported

**Above 1GHz**

The worst test result for GFSK, Tx-Low Channel:

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4804.00	52.06	33.06	35.04	3.94	54.02	74	-19.98	Peak	Horizontal
4804.00	38.77	33.06	35.04	3.94	40.73	54	-13.27	Average	Horizontal
4804.00	51.08	33.06	35.04	3.94	53.04	74	-20.96	Peak	Vertical
4804.00	38.15	33.06	35.04	3.94	40.11	54	-13.89	Average	Vertical

The worst test result for GFSK, Tx-Middle Channel:

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4882.00	52.73	33.16	35.15	3.96	54.70	74	-19.30	Peak	Horizontal
4882.00	38.71	33.16	35.15	3.96	40.68	54	-13.32	Average	Horizontal
4882.00	52.25	33.16	35.15	3.96	54.22	74	-19.78	Peak	Vertical
4882.00	38.48	33.16	35.15	3.96	40.45	54	-13.55	Average	Vertical

The worst test result for GFSK, Tx-High Channel:

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Los dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4960.00	52.13	33.26	35.14	3.98	54.23	74	-19.77	Peak	Horizontal
4960.00	38.33	33.26	35.14	3.98	40.43	54	-13.57	Average	Horizontal
4960.00	50.91	33.26	35.14	3.98	53.01	74	-20.99	Peak	Vertical
4960.00	37.35	33.26	35.14	3.98	39.45	54	-14.55	Average	Vertical

***Notes:***

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. 18~25GHz at least have 20dB margin. No recording in the test report.
4. No recorded measured values from 9KHz to 30MHz as values lower than limit at least 20 dB.

## 7.6 Results for Band edge Testing (Radiated)

Only record the worst test case (Tx, GFSK, Non-hopping) as following:

Tx-2402, GFSK, Non-hopping

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2390.00	49.21	32.89	35.16	3.51	50.45	74	-23.55	Peak	Horizontal
2390.00	34.04	32.89	35.16	3.51	35.28	54	-18.72	Average	Horizontal
2400.00	50.48	32.92	35.16	3.54	51.78	74	-22.22	Peak	Horizontal
2400.00	35.16	32.92	35.16	3.54	36.46	54	-17.54	Average	Horizontal
2390.00	48.77	32.89	35.16	3.51	50.01	74	-23.99	Peak	Vertical
2390.00	34.39	32.89	35.16	3.51	35.63	54	-18.37	Average	Vertical
2400.00	50.45	32.92	35.16	3.54	51.75	74	-22.25	Peak	Vertical
2400.00	35.47	32.92	35.16	3.54	36.77	54	-17.23	Average	Vertical

Tx-2480, GFSK, Non-hopping

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	48.74	33.06	35.18	3.60	50.22	74	-23.78	Peak	Horizontal
2483.50	33.68	33.06	35.18	3.60	35.16	54	-18.84	Average	Horizontal
2483.50	48.97	33.06	35.18	3.60	50.45	74	-23.55	Peak	Vertical
2483.50	33.54	33.06	35.18	3.60	35.02	54	-18.98	Average	Vertical


## 7.7. Power line conducted emissions

### 7.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

### 7.7.2 Block Diagram of Test Setup

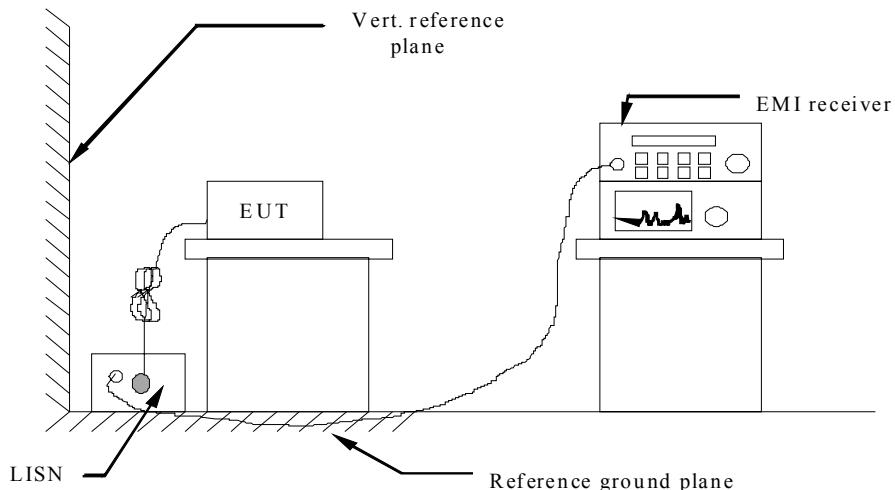


### 7.7.3 Test Results

PASS.

The test data please refer to following page.

## AC Conducted Emission of power adapter


Test result for AC 120V/60Hz

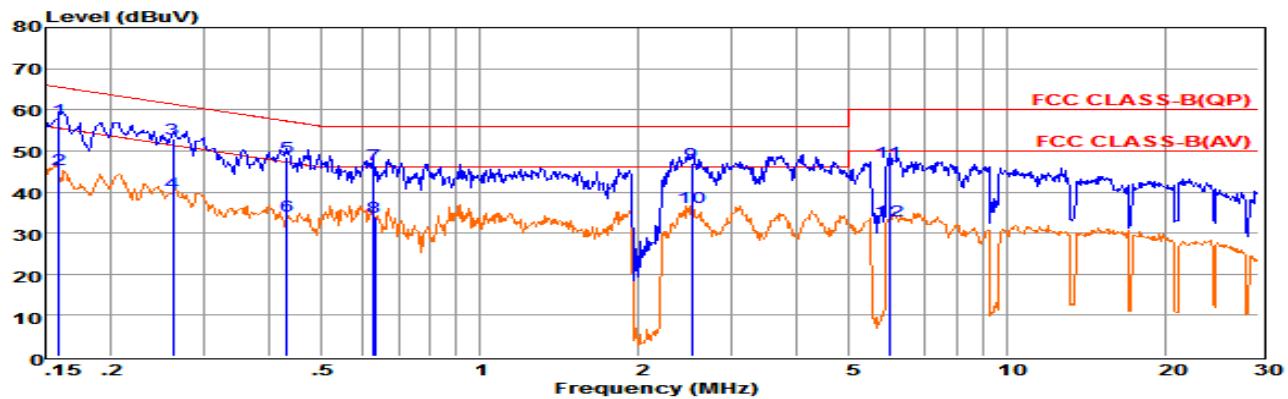

Env. Ins: 24\*/56%  
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15900	37.95	9.58	0.02	10.00	57.55	65.52	-7.97	QP
2 0.15910	25.89	9.58	0.02	10.00	45.49	55.51	-10.02	Average
3 0.26164	33.16	9.63	0.03	10.00	52.82	61.38	-8.56	QP
4 0.26174	20.28	9.63	0.03	10.00	39.94	51.38	-11.44	Average
5 0.43052	28.83	9.62	0.04	10.00	48.49	57.24	-8.75	QP
6 0.43062	14.51	9.62	0.04	10.00	34.17	47.24	-13.07	Average
7 0.63048	27.04	9.63	0.04	10.00	46.71	56.00	-9.29	QP
8 0.63058	14.22	9.63	0.04	10.00	33.89	46.00	-12.11	Average
9 2.52662	27.44	9.64	0.05	10.00	47.13	56.00	-8.87	QP
10 2.52762	16.54	9.64	0.05	10.00	36.23	46.00	-9.77	Average
11 5.96084	27.62	9.67	0.07	10.00	47.36	60.00	-12.64	QP
12 5.96184	13.15	9.67	0.07	10.00	32.89	50.00	-17.11	Average

Remarks: 1. Measured = Reading + Lisn Factor + Cable Loss + Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

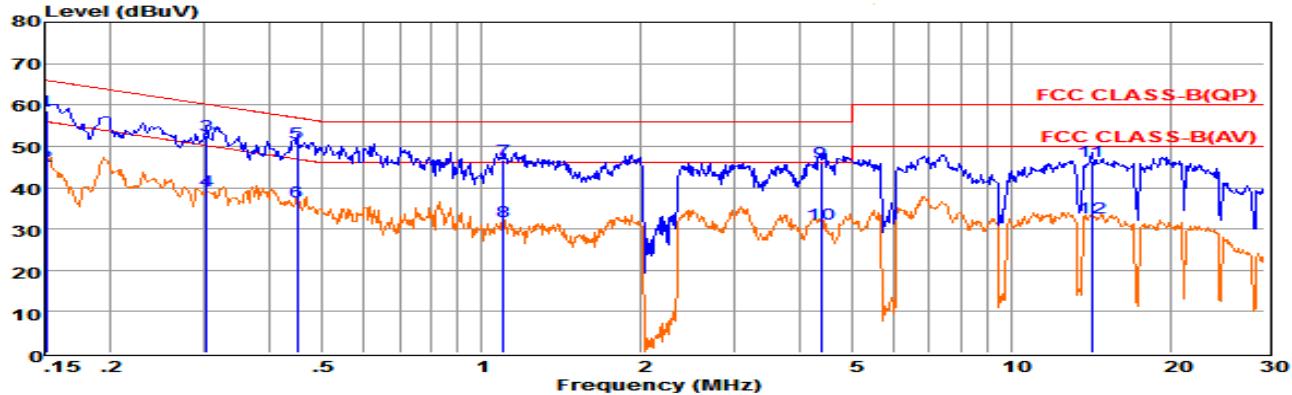


Env. Ins: 24\*/56%  
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15080	38.95	9.70	0.02	10.00	58.67	65.96	-7.29	QP
2 0.15090	25.52	9.70	0.02	10.00	45.24	55.95	-10.71	Average
3 0.30348	33.03	9.60	0.03	10.00	52.66	60.15	-7.49	QP
4 0.30358	19.52	9.60	0.03	10.00	39.15	50.14	-10.99	Average
5 0.44916	31.21	9.62	0.04	10.00	50.87	56.89	-6.02	QP
6 0.44926	17.05	9.62	0.04	10.00	36.71	46.89	-10.18	Average
7 1.09971	27.06	9.63	0.05	10.00	46.74	56.00	-9.26	QP
8 1.10071	12.29	9.63	0.05	10.00	31.97	46.00	-14.03	Average
9 4.36060	26.46	9.66	0.06	10.00	46.18	56.00	-9.82	QP
10 4.36160	11.58	9.66	0.06	10.00	31.30	46.00	-14.70	Average
11 14.13758	26.53	9.74	0.10	10.00	46.37	60.00	-13.63	QP
12 14.13858	12.99	9.74	0.10	10.00	32.83	50.00	-17.17	Average

Remarks: 1. Measured = Reading + Lisn Factor + Cable Loss + Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.


## Test result for AC 240V/50Hz

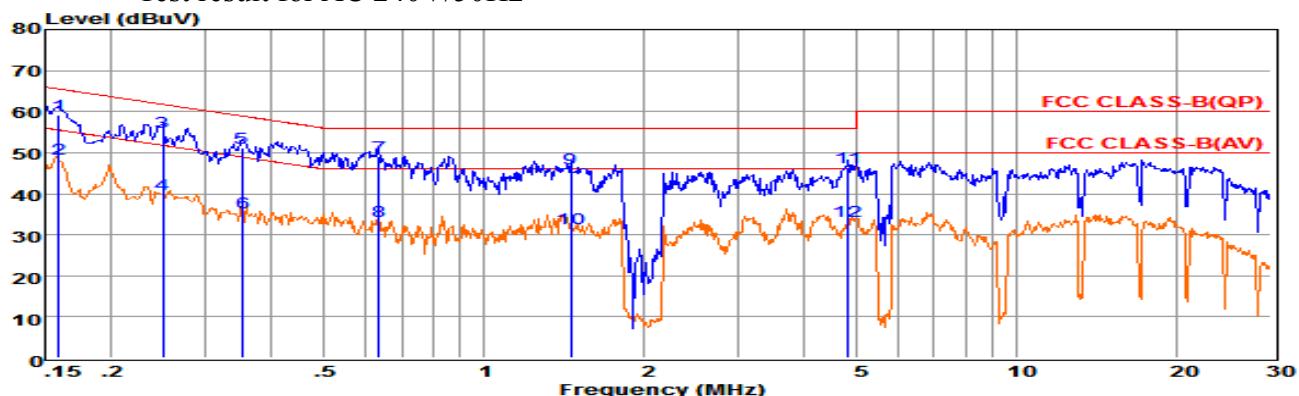

Env. Ins: 24\*/56%  
Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15900	39.61	9.68	0.02	10.00	59.31	65.52	-6.21	QP
2 0.15910	28.86	9.68	0.02	10.00	48.56	55.51	-6.95	Average
3 0.24945	35.43	9.60	0.03	10.00	55.06	61.78	-6.72	QP
4 0.24955	20.37	9.60	0.03	10.00	40.00	51.77	-11.77	Average
5 0.35201	31.45	9.61	0.03	10.00	51.09	58.91	-7.82	QP
6 0.35211	15.89	9.61	0.03	10.00	35.53	48.91	-13.38	Average
7 0.63383	29.55	9.63	0.04	10.00	49.22	56.00	-6.78	QP
8 0.63393	13.70	9.63	0.04	10.00	33.37	46.00	-12.63	Average
9 1.45624	26.30	9.63	0.05	10.00	45.98	56.00	-10.02	QP
10 1.45724	11.87	9.63	0.05	10.00	31.55	46.00	-14.45	Average
11 4.82243	26.53	9.66	0.06	10.00	46.25	56.00	-9.75	QP
12 4.82343	13.64	9.66	0.06	10.00	33.36	46.00	-12.64	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

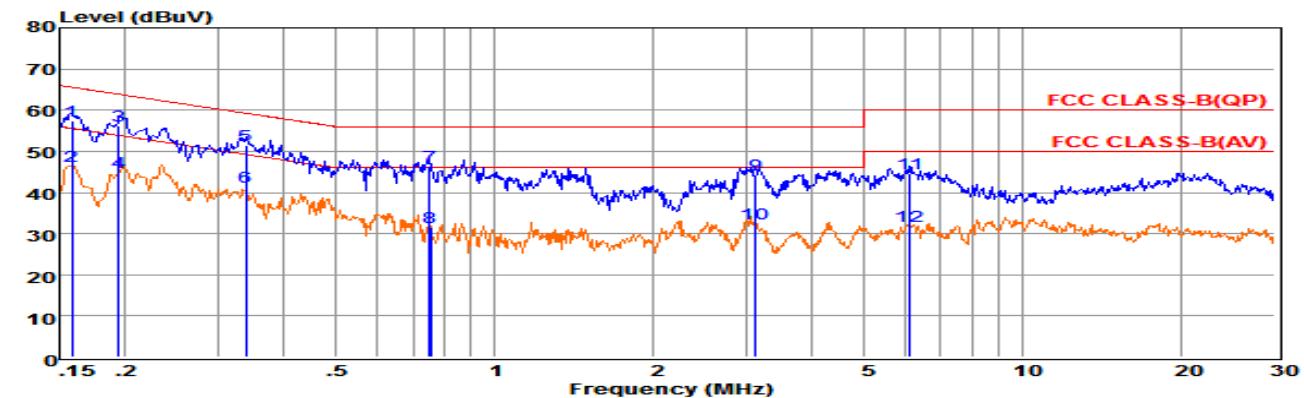

Env. Ins: 24\*/56%  
Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15816	37.71	9.58	0.02	10.00	57.31	65.56	-8.25	QP
2 0.15826	26.76	9.58	0.02	10.00	46.36	55.55	-9.19	Average
3 0.19447	36.65	9.62	0.02	10.00	56.29	63.84	-7.55	QP
4 0.19457	25.24	9.62	0.02	10.00	44.88	53.84	-8.96	Average
5 0.33740	31.85	9.62	0.03	10.00	51.50	59.27	-7.77	QP
6 0.33750	21.64	9.62	0.03	10.00	41.29	49.26	-7.97	Average
7 0.75493	26.83	9.64	0.04	10.00	46.51	56.00	-9.49	QP
8 0.75503	11.83	9.64	0.04	10.00	31.51	46.00	-14.49	Average
9 3.12307	24.63	9.64	0.06	10.00	44.33	56.00	-11.67	QP
10 3.12407	12.66	9.64	0.06	10.00	32.36	46.00	-13.64	Average
11 6.12086	24.75	9.67	0.07	10.00	44.49	60.00	-15.51	QP
12 6.12186	12.16	9.67	0.07	10.00	31.90	50.00	-18.10	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

## 8. ANTENNA REQUIREMENT

### 8.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### 8.2 Antenna Connected Construction

#### 8.2.1. Standard Applicable

According to § 15.203 & RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 8.2.2. Antenna Connector Construction

The sample use PIFA antenna and maximum antenna gain is -0.5dBi. Please see EUT photo for details.

The WLAN and Bluetooth share same modular and same antenna.

#### 8.2.3. Results: Compliance

#### Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

## Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Trace-Mode:	Max hold

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal Bluetooth devices, the GFSK mode is used.

## Limits:

FCC	IC
Antenna Gain	
6.0dBi	

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 2402 MHz	Middle channel 2441 MHz	Highest channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation	4.176	4.969	5.541	
Radiated power [dBm] Measured with GFSK modulation	3.032	4.107	4.219	
Gain [dBi] Calculated	-1.144	-0.862	-1.322	
Measurement uncertainty		± 1.6 dB (cond.) / ± 3.8 dB (rad.)		

**Result:** -/-

-----THE END OF REPORT-----