



RADIO TEST REPORT

Report No: STS1912045W01

Issued for

Prentke Romich Company

1022 Heyl Rd. Wooster, Ohio 44691, USA

Product Name:	Accent 1400
Brand Name:	Accent
Model Name:	ACN1400-30
Series Model:	N/A
FCC ID:	2AD9PA-ACN140030PRC
IC:	23408-ACN140030
Test Standard:	FCC Part 15.247
	RSS-247 Issue 2, February 2017

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.



**TEST RESULT CERTIFICATION**

Applicant's Name: Prentke Romich Company
Address.....: 1022 Heyl Rd. Wooster, Ohio 44691, USA
Manufacture's Name: Prentke Romich Company
Address.....: 1022 Heyl Rd. Wooster, Ohio 44691, USA

Product Description

Product Name: Accent 1400
Brand Name: Accent
Model Name.....: ACN1400-30
Series Model: N/A
Test Standards: FCC Part15.247
RSS-247 Issue 2, February 2017
Test Procedure: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC&IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....:

Date of receipt of test item: 12 Dec. 2019
Date (s) of performance of tests : 12 Dec. 2019 ~ 31 Dec. 2019
Date of Issue: 02 Jan. 2019
Test Result: Pass

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sunday Hu)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	10
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LIST	13
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	20
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	37
4.1 LIMIT	37
4.2 TEST PROCEDURE	37
4.3 TEST SETUP	37
4.4 EUT OPERATION CONDITIONS	37
4.5 TEST RESULTS	38
5. NUMBER OF HOPPING CHANNEL	53
5.1 LIMIT	53
5.2 TEST PROCEDURE	53
5.3 TEST SETUP	53
5.4 EUT OPERATION CONDITIONS	53
5.5 TEST RESULTS	54
6. AVERAGE TIME OF OCCUPANCY	55
6.1 LIMIT	55
6.2 TEST PROCEDURE	55
6.3 TEST SETUP	55
6.4 EUT OPERATION CONDITIONS	55
6.5 TEST RESULTS	56
7. HOPPING CHANNEL SEPARATION MEASUREMEN	62
7.1 LIMIT	62



Table of Contents	Page
7.2 TEST PROCEDURE	62
7.3 TEST SETUP	62
7.4 EUT OPERATION CONDITIONS	62
7.5 TEST RESULTS	63
8. BANDWIDTH TEST	69
8.1 LIMIT	69
8.2 TEST PROCEDURE	69
8.3 TEST SETUP	69
8.4 EUT OPERATION CONDITIONS	69
8.5 TEST RESULTS	70
9. OUTPUT POWER TEST	76
9.1 LIMIT	76
9.2 TEST PROCEDURE	76
9.3 TEST SETUP	77
9.4 EUT OPERATION CONDITIONS	77
9.5 TEST RESULTS	78
10. ANTENNA REQUIREMENT	80
10.1 STANDARD REQUIREMENT	80
10.2 EUT ANTENNA	80
11. FREQUENCY STABILITY	81
11.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	81
11.2 TEST PROCEDURE	81
11.3 TEST RESULT	81

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	02 Jan. 2019	STS1912045W01	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C RSS-247 Issue 2			
Standard Section	Test Item	Judgment	Remark
15.207 RSS-Gen Issue 5, Amendment 1, March 2019	Conducted Emission & Receiver AC power-line conducted emissions	PASS	--
15.247(a)(1) RSS-247 Issue 2, February 2017 (5.1)	Hopping Channel Separation	PASS	--
15.247(a)(1)&(b)(1) RSS-247 Issue 2, February 2017 (5.1)	Output Power	PASS	--
15.247(c) RSS-247 Issue 2, February 2017 (5.5)	Radiated Spurious Emission & Receiver radiated emissions	PASS	--
15.247(d) RSS-247 Issue 2, February 2017 (5.5)	Conducted Spurious & Band Edge Emission	PASS	--
15.247(a)(iii) RSS-247 Issue 2, February 2017 (5.1)	Number of Hopping Frequency	PASS	--
15.247(a)(iii) RSS-247 Issue 2, February 2017 (5.1)	Dwell Time	PASS	--
15.247(a)(1) RSS-247 Issue 2, February 2017 (5.1)	Bandwidth	PASS	--
15.205 RSS-Gen Issue 5, Amendment 1, March 2019	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/part 15.209(a) RSS-247 Issue 2, February 2017 (5.5)	Band Edge Emission	PASS	--
15.203 RSS-Gen Issue 5, Amendment 1, March 2019	Antenna Requirement	PASS	--
RSS-Gen Issue 5, Amendment 1, March 2019	Frequency Stability	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 30-1GHz	$\pm 6.7\text{dB}$
4	All emissions, radiated 1G-6GHz	$\pm 5.5\text{dB}$
5	All emissions, radiated >6G	$\pm 5.8\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 4.43\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 5\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Accent 1400
Trade Name	Accent
Model Name	ACN1400-30
Series Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Bluetooth	Frequency: 2402 – 2480 MHz Modulation: GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps), 8DPSK(3Mbps)
Bluetooth Version	4.2
Bluetooth Configuration	BR+EDR
Adapter	Input: AC 100~240V, 1500mA, 50/60Hz Output: DC 18V, 3330mA
Battery	Rated Voltage: 7.4V Charge Limit: 8.4V Capacity: 9200mAh
Hardware version number	A1400-30_MB_VERC
Software version number	Windows 10 Pro 64-bit
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.



2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	Accent	ACN1400-30	PIFA	N/A	0dBi	BT Antenna



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate/Modulation
Mode 1	TX CH00	1Mbps/GFSK
Mode 2	TX CH39	1Mbps/GFSK
Mode 3	TX CH78	1Mbps/GFSK
Mode 4	TX CH00	2 Mbps/ π /4-DQPSK
Mode 5	TX CH39	2 Mbps/ π /4-DQPSK
Mode 6	TX CH78	2 Mbps/ π /4-DQPSK
Mode7	TX CH00	3 Mbps/8DPSK
Mode 8	TX CH39	3 Mbps/8DPSK
Mode 9	TX CH78	3 Mbps/8DPSK

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

(2) We have be tested for all availiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 10 : Keeping BT TX

2.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS.

Test software Version	Test program: Bluetooth		
(Power control software) Parameters(1/2/3Mbps)	Power class: DH1 rate:4:27 2DH1 rate:20:54 3DH1 rate:24:83	Power class: DH3 rate:11:183 2DH3 rate:26:367 3DH3 rate:27:552	Power class: DH5 rate:15:339 2DH5 rate:30:679 3DH5 rate:31:1021




2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Emission Test

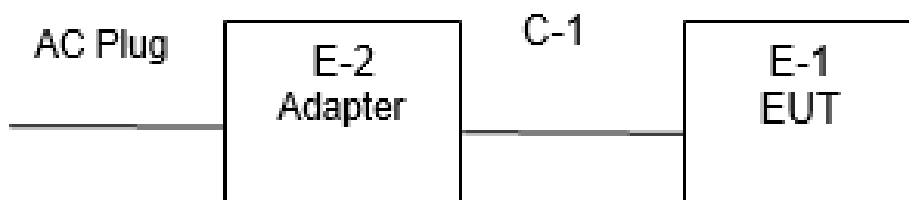



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Adapter	MEGMEET	MANGO60S-18BB-PRC	N/A	N/A
C-1	DC Cable	N/A	100cm	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2019.07.29	2020.07.28
Signal Analyzer	Agilent	N9020A	MY51110105	2019.03.02	2020.03.01
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.01
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-Amplifier(0.1M-3G Hz)	EM	EM330	060665	2019.10.09	2020.10.08
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK201808090 1	2019.10.09	2020.10.08
Temperature & Humidity	HH660	Mieo	N/A	2019.10.09	2020.10.08
turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2019.07.29	2020.07.28
LISN	R&S	ENV216	101242	2019.10.09	2020.10.08
LISN	EMCO	3810/2NM	23625	2019.10.09	2020.10.08
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2019.10.09	2020.10.08
Signal Analyzer	Agilent	N9020A	MY49100060	2019.10.09	2020.10.08
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Test SW	FARAD	LZ-RF /LzRf-3A3			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) and RSS-Gen limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “*” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

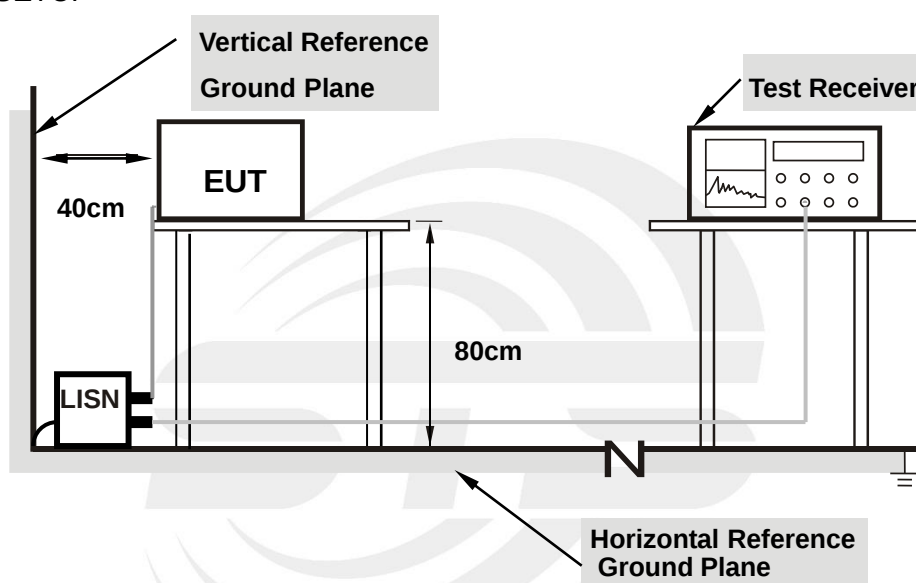

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.5 TEST RESULT

Temperature:	23.1(C)	Relative Humidity:	46%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 10(TX)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1660	32.53	19.76	52.29	65.16	-12.87	QP
2	0.1660	13.29	19.76	33.05	55.16	-22.11	AVG
3	0.6060	28.85	19.89	48.74	56.00	-7.26	QP
4	0.6060	18.72	19.89	38.61	46.00	-7.39	AVG
5	1.8060	24.05	19.73	43.78	56.00	-12.22	QP
6	1.8060	13.44	19.73	33.17	46.00	-12.83	AVG
7	3.7740	22.56	19.77	42.33	56.00	-13.67	QP
8	3.7740	11.70	19.77	31.47	46.00	-14.53	AVG
9	13.0340	20.86	20.10	40.96	60.00	-19.04	QP
10	13.0340	10.50	20.10	30.60	50.00	-19.40	AVG
11	20.6780	23.55	20.25	43.80	60.00	-16.20	QP
12	20.6780	12.98	20.25	33.23	50.00	-16.77	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor)-Limit

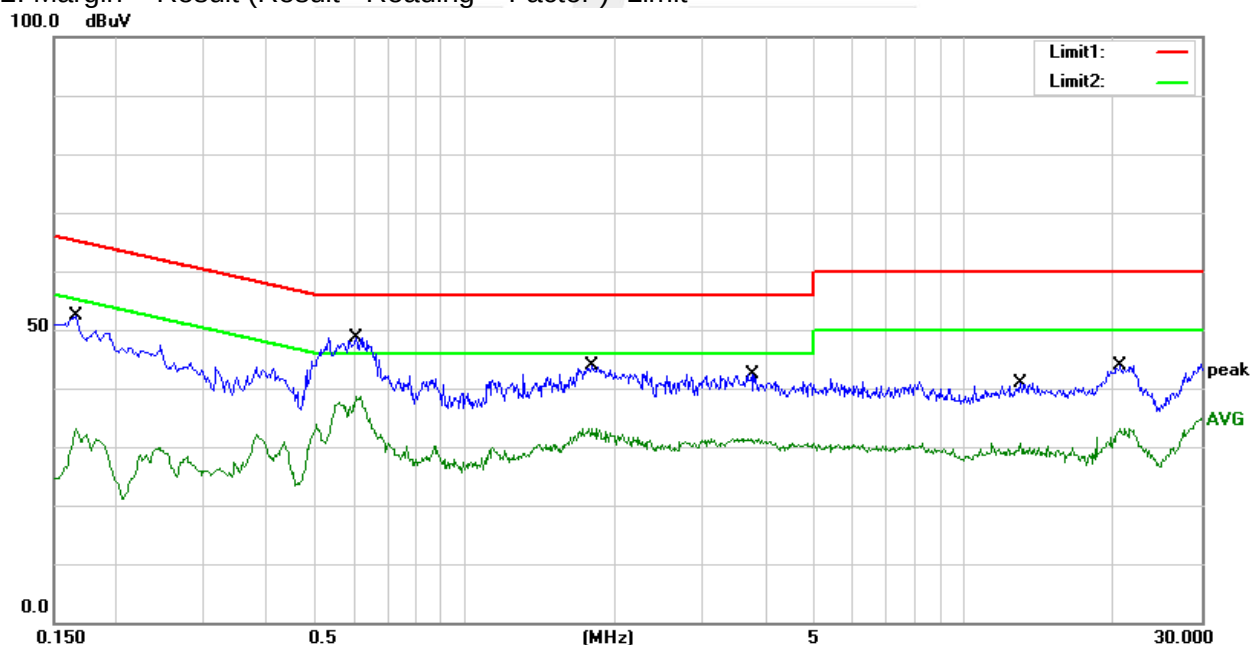




Temperature:	23.1(C)	Relative Humidity:	46%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 10(TX)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1580	29.97	19.76	49.73	65.57	-15.84	QP
2	0.1580	11.50	19.76	31.26	55.57	-24.31	AVG
3	0.5380	31.06	19.95	51.01	56.00	-4.99	QP
4	0.5380	20.20	19.95	40.15	46.00	-5.85	AVG
5	1.5620	21.85	19.74	41.59	56.00	-14.41	QP
6	1.5620	11.11	19.74	30.85	46.00	-15.15	AVG
7	4.4140	19.42	19.77	39.19	56.00	-16.81	QP
8	4.4140	10.56	19.77	30.33	46.00	-15.67	AVG
9	20.8660	22.90	20.23	43.13	60.00	-16.87	QP
10	20.8660	12.09	20.23	32.32	50.00	-17.68	AVG
11	29.3100	23.75	20.05	43.80	60.00	-16.20	QP
12	29.3100	14.72	20.05	34.77	50.00	-15.23	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

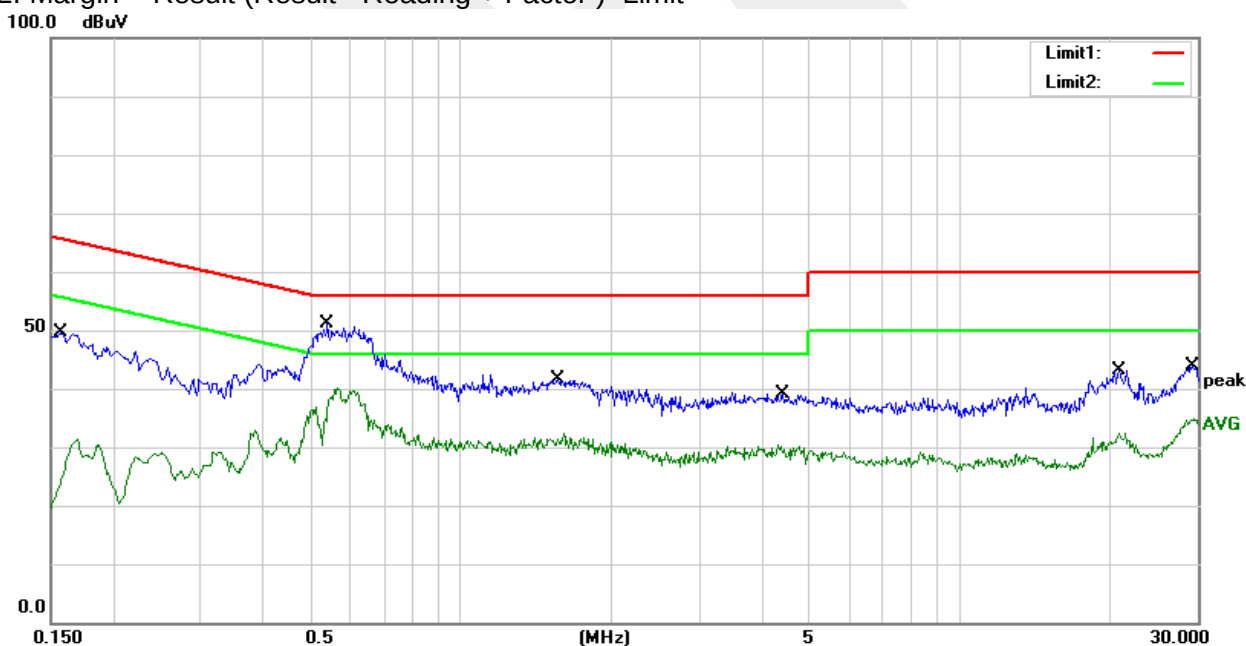




Temperature:	23.1(C)	Relative Humidity:	46%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	RX Mode		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1675	29.97	19.76	49.73	65.08	-15.35	QP
2	0.1675	11.84	19.76	31.60	55.08	-23.48	AVG
3	0.5340	28.08	19.96	48.04	56.00	-7.96	QP
4	0.5340	16.72	19.96	36.68	46.00	-9.32	AVG
5	1.8060	24.05	19.73	43.78	56.00	-12.22	QP
6	1.8060	13.44	19.73	33.17	46.00	-12.83	AVG
7	3.6860	23.07	19.76	42.83	56.00	-13.17	QP
8	3.6860	12.21	19.76	31.97	46.00	-14.03	AVG
9	8.9740	20.50	20.00	40.50	60.00	-19.50	QP
10	8.9740	10.20	20.00	30.20	50.00	-19.80	AVG
11	21.8860	23.62	20.17	43.79	60.00	-16.21	QP
12	21.8860	13.02	20.17	33.19	50.00	-16.81	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

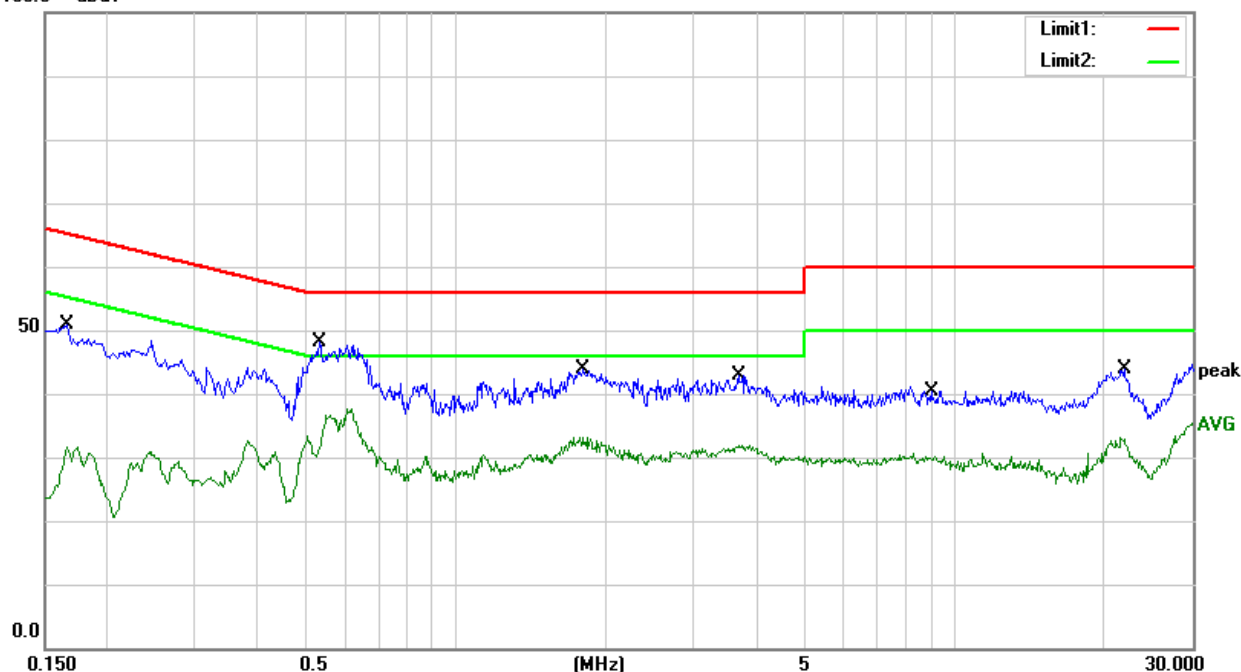




Temperature:	23.1(C)	Relative Humidity:	46%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	RX Mode		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1580	28.97	19.76	48.73	65.57	-16.84	QP
2	0.1580	10.50	19.76	30.26	55.57	-25.31	AVG
3	0.6100	30.13	19.89	50.02	56.00	-5.98	QP
4	0.6100	19.76	19.89	39.65	46.00	-6.35	AVG
5	1.4980	21.76	19.74	41.50	56.00	-14.50	QP
6	1.4980	13.02	19.74	32.76	46.00	-13.24	AVG
7	3.5060	20.05	19.76	39.81	56.00	-16.19	QP
8	3.5060	10.84	19.76	30.60	46.00	-15.40	AVG
9	9.4620	18.54	20.05	38.59	60.00	-21.41	QP
10	9.4620	9.01	20.05	29.06	50.00	-20.94	AVG
11	20.8660	23.90	20.23	44.13	60.00	-15.87	QP
12	20.8660	13.09	20.23	33.32	50.00	-16.68	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

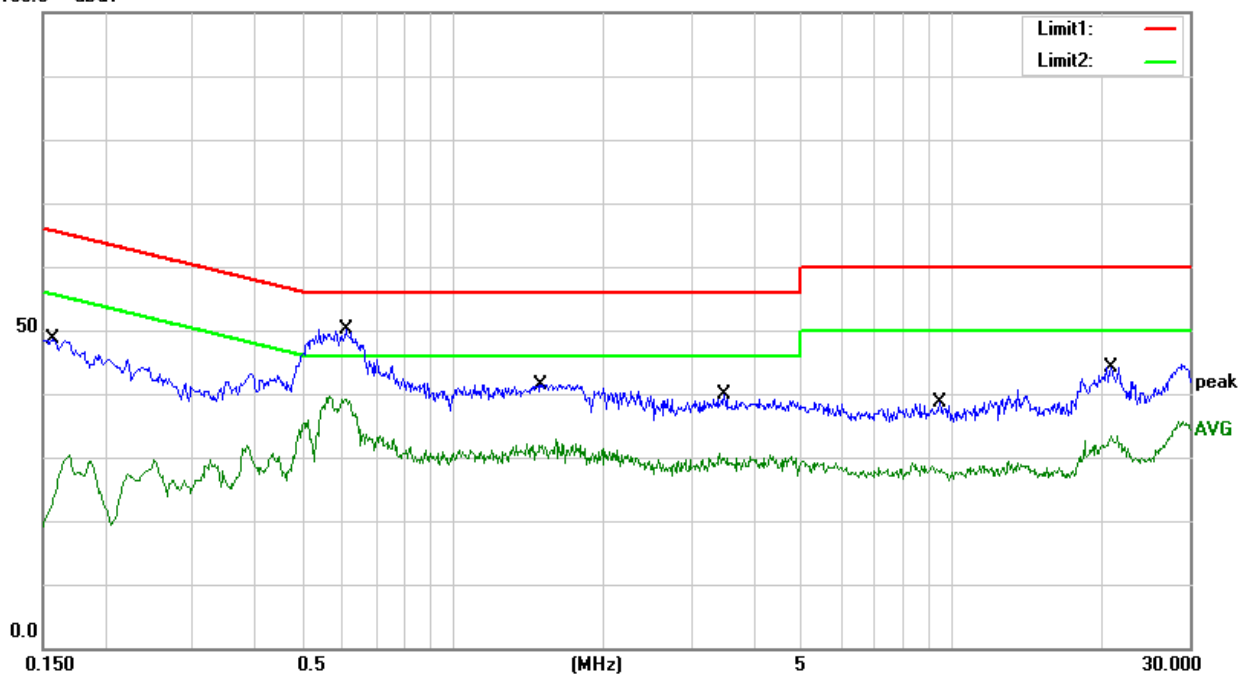



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a), RSS-Gen Issue 5, Amendment 1, March 2019 and RSS-247 Issue 2, February 2017 (5.5) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FCC:

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



IC:

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2476 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation.

3.2.4 TESTSETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

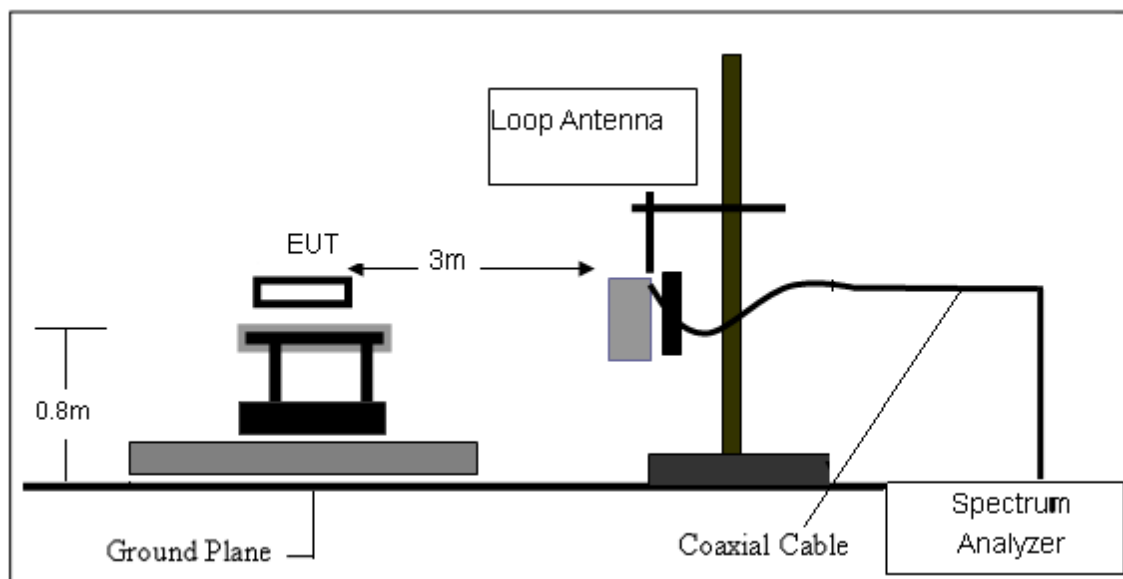

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

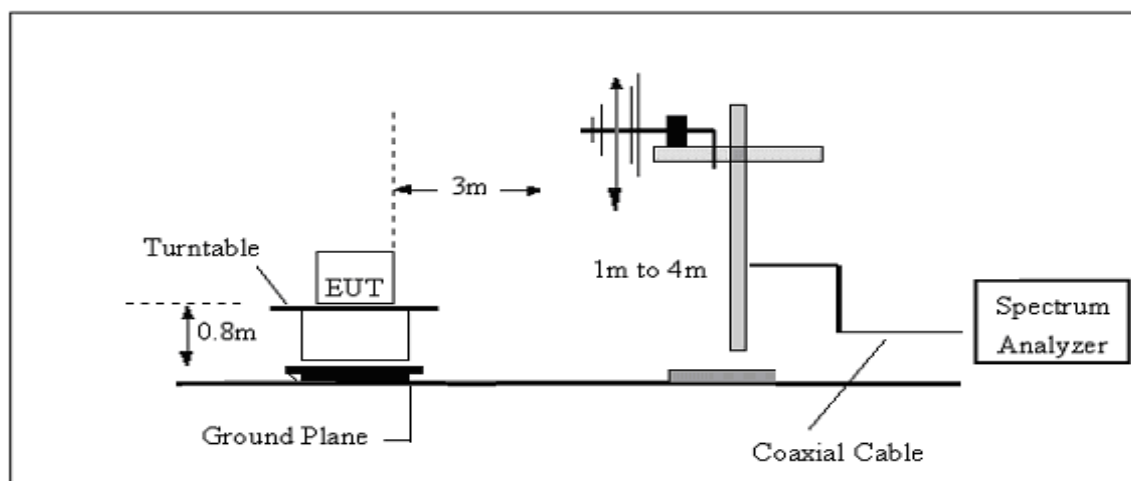

(C) Radiated Emission Test-Up Frequency Above 1GHz

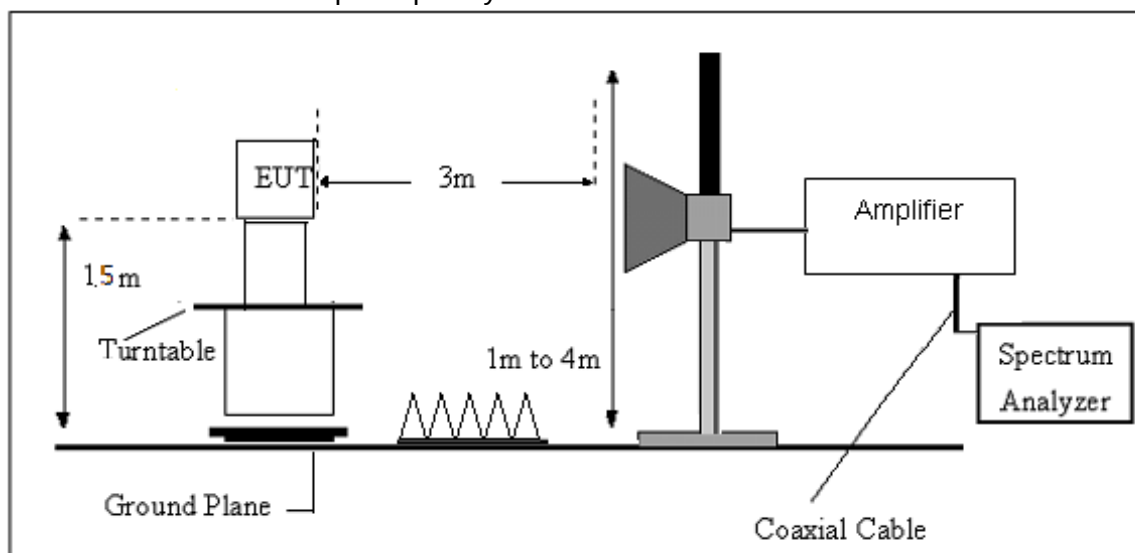

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$





3.2.7 TEST RESULTS

(9KHz-30MHz)

Temperature:	22.7(C)	Relative Humidity:	61%RH
Test Voltage:	DC 7.4V from battery	Test Mode:	TX Mode

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.




(30MHz-1000MHz)

Temperature:	22.7(C)	Relative Humidity:	61%RH
Test Voltage:	DC 7.4V from battery	Phase:	Horizontal
Test Mode:	TX Mode 1/2/3/4/5/6/7/8/9(Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	30.0000	28.34	-12.85	15.49	40.00	-24.51	QP
2	159.0100	42.80	-18.77	24.03	43.50	-19.47	QP
3	321.9700	45.10	-13.94	31.16	46.00	-14.84	QP
4	546.0400	43.13	-6.20	36.93	46.00	-9.07	QP
5	835.1000	29.46	-0.54	28.92	46.00	-17.08	QP
6	960.2300	31.67	1.76	33.43	54.00	-20.57	QP

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit

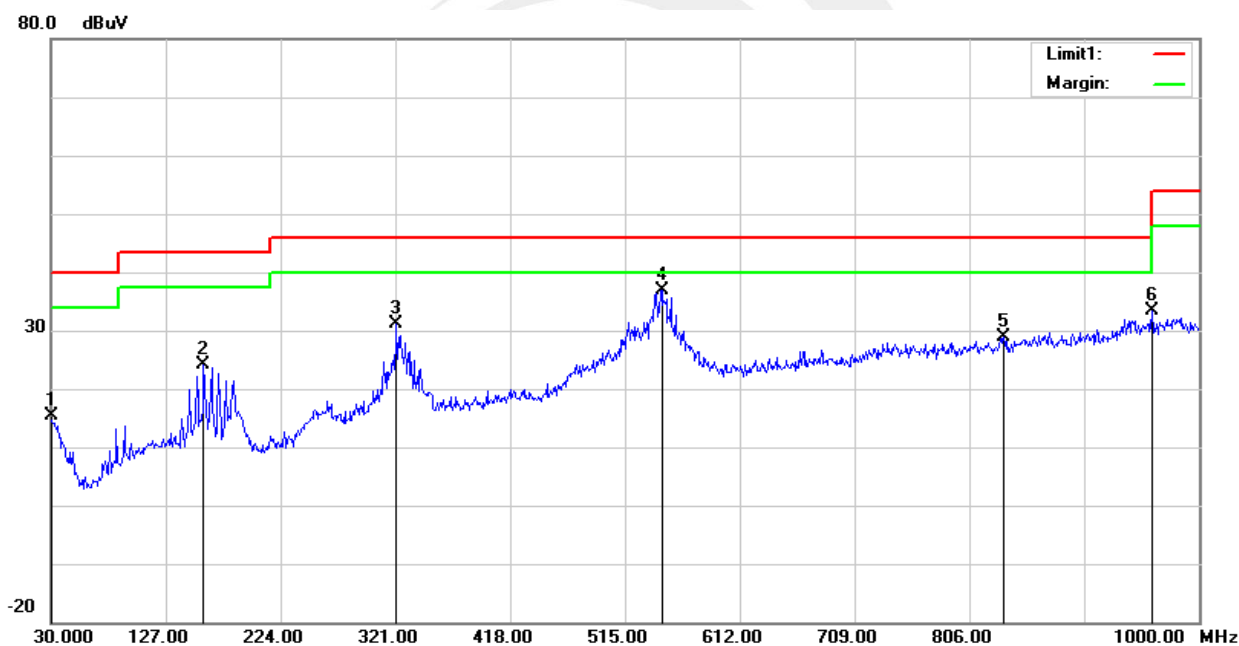



Temperature:	22.7(C)	Relative Humidity:	61%RH
Test Voltage:	DC 7.4V from battery	Phase:	Vertical
Test Mode:	TX Mode 1/2/3/4/5/6/7/8/9(Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	30.0000	28.30	-12.85	15.45	40.00	-24.55	QP
2	190.0500	39.76	-20.97	18.79	43.50	-24.71	QP
3	255.0400	35.98	-15.35	20.63	46.00	-25.37	QP
4	543.1300	38.66	-6.52	32.14	46.00	-13.86	QP
5	867.1100	29.95	-0.50	29.45	46.00	-16.55	QP
6	979.6300	29.40	2.65	32.05	54.00	-21.95	QP

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit






Temperature:	22.9(C)	Relative Humidity:	57%RH
Test Voltage:	DC 7.4V from battery	Phase:	Horizontal
Test Mode:	RX Mode 1/2/3/4/5/6/7/8/9(Mode 5 worst mode)		

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
30.727	13.26	--	--	-12.37	--	40.0	--	-26.74	Horizontal	Pass
127.970	12.85	--	--	-16.84	--	43.5	--	-30.65	Horizontal	Pass
251.645	14.09	--	--	-13.95	--	46.0	--	-31.91	Horizontal	Pass
479.353	22.57	--	--	-6.33	--	46.0	--	-23.43	Horizontal	Pass
854.015	31.45	--	--	2.59	--	46.0	--	-14.55	Horizontal	Pass
974.295	33.34	--	--	5.64	--	54.0	--	-20.66	Horizontal	Pass

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit

RE_IC Test Case_RSS 30MHz-1GHz

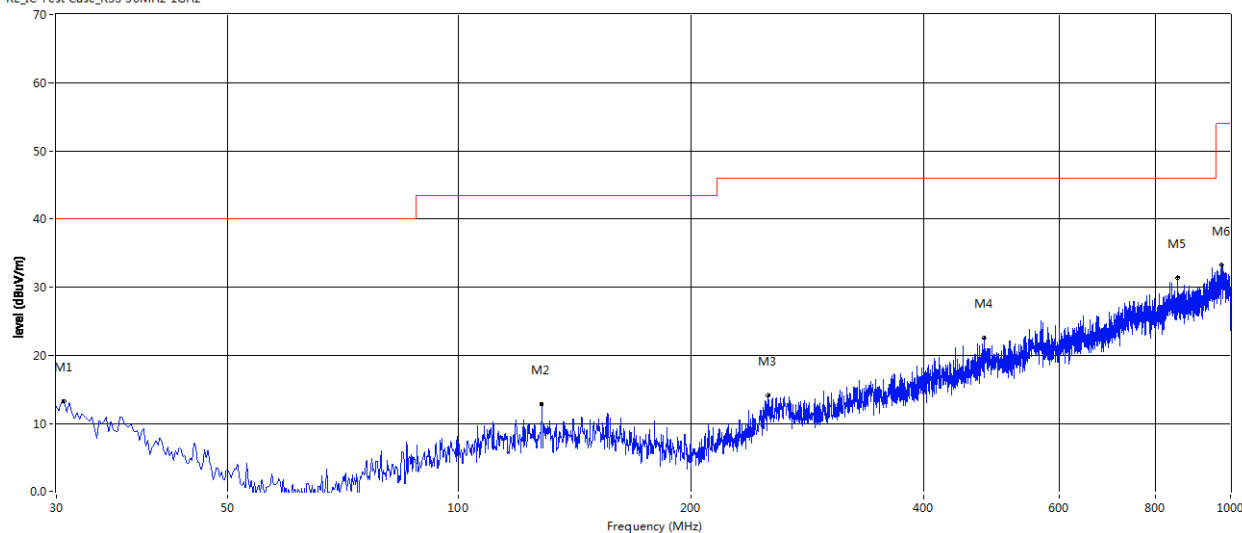




Temperature:	22.9(C)	Relative Humidity:	57%RH
Test Voltage:	DC 7.4V from battery	Phase:	Vertical
Test Mode:	RX Mode 1/2/3/4/5/6/7/8/9(Mode 5 worst mode)		

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
30.970	13.20	--	--	-12.50	--	40.0	--	-26.80	Vertical	Pass
131.365	11.09	--	--	-16.81	--	43.5	--	-32.41	Vertical	Pass
267.408	14.96	--	--	-13.06	--	46.0	--	-31.04	Vertical	Pass
559.377	25.42	--	--	-2.97	--	46.0	--	-20.58	Vertical	Pass
828.795	30.51	--	--	2.25	--	46.0	--	-15.49	Vertical	Pass
982.540	34.50	--	--	5.87	--	54.0	--	-19.50	Vertical	Pass

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit

RE_IC Test Case_RSS 30MHz-1GHz

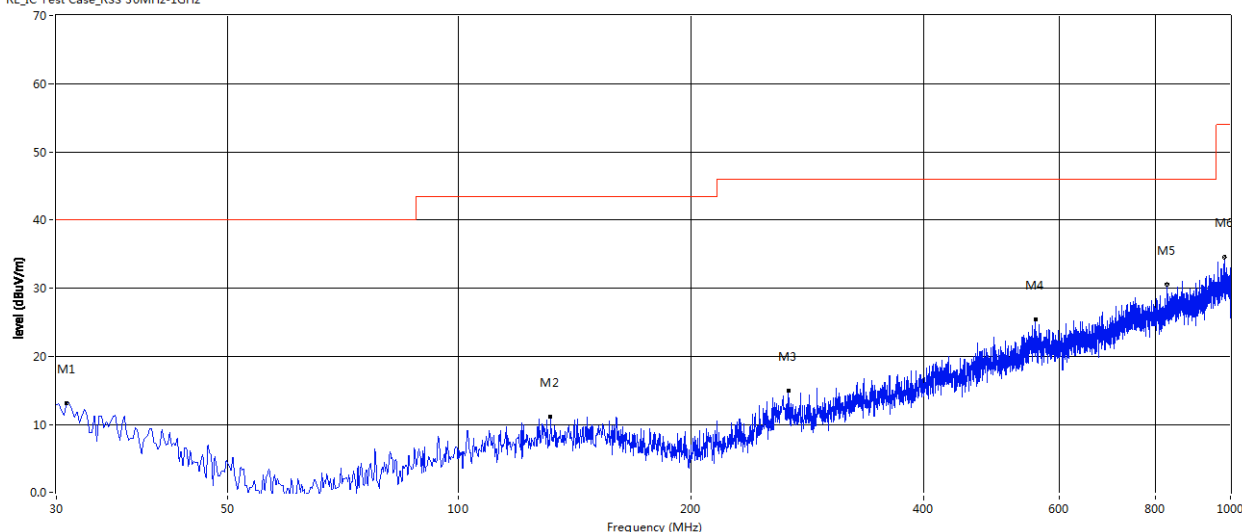



(1GHz~25GHz) Spurious emission Requirements

TX Mode

Frequency (MHz)	Meter Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (π/4-DQPSK/2402 MHz)										
3264.66	60.92	44.70	6.70	28.20	-9.80	51.12	74.00	-22.88	PK	Vertical
3264.66	49.83	44.70	6.70	28.20	-9.80	40.03	54.00	-13.97	AV	Vertical
3264.76	61.47	44.70	6.70	28.20	-9.80	51.67	74.00	-22.33	PK	Horizontal
3264.76	50.73	44.70	6.70	28.20	-9.80	40.93	54.00	-13.07	AV	Horizontal
4804.33	59.08	44.20	9.04	31.60	-3.56	55.52	74.00	-18.48	PK	Vertical
4804.33	49.95	44.20	9.04	31.60	-3.56	46.39	54.00	-7.61	AV	Vertical
4804.41	59.12	44.20	9.04	31.60	-3.56	55.56	74.00	-18.44	PK	Horizontal
4804.41	50.04	44.20	9.04	31.60	-3.56	46.48	54.00	-7.52	AV	Horizontal
5359.70	49.39	44.20	9.86	32.00	-2.34	47.05	74.00	-26.95	PK	Vertical
5359.70	39.75	44.20	9.86	32.00	-2.34	37.41	54.00	-16.59	AV	Vertical
5359.73	47.53	44.20	9.86	32.00	-2.34	45.19	74.00	-28.81	PK	Horizontal
5359.73	38.93	44.20	9.86	32.00	-2.34	36.59	54.00	-17.41	AV	Horizontal
7205.91	54.53	43.50	11.40	35.50	3.40	57.93	74.00	-16.07	PK	Vertical
7205.91	43.95	43.50	11.40	35.50	3.40	47.35	54.00	-6.65	AV	Vertical
7205.66	54.81	43.50	11.40	35.50	3.40	58.21	74.00	-15.79	PK	Horizontal
7205.66	43.64	43.50	11.40	35.50	3.40	47.04	54.00	-6.96	AV	Horizontal
Middle Channel (π/4-DQPSK/2441 MHz)										
3264.74	61.75	44.70	6.70	28.20	-9.80	51.95	74.00	-22.05	PK	Vertical
3264.74	51.70	44.70	6.70	28.20	-9.80	41.90	54.00	-12.10	AV	Vertical
3264.59	61.88	44.70	6.70	28.20	-9.80	52.08	74.00	-21.92	PK	Horizontal
3264.59	50.00	44.70	6.70	28.20	-9.80	40.20	54.00	-13.80	AV	Horizontal
4882.53	59.59	44.20	9.04	31.60	-3.56	56.03	74.00	-17.97	PK	Vertical
4882.53	50.20	44.20	9.04	31.60	-3.56	46.64	54.00	-7.36	AV	Vertical
4882.33	58.40	44.20	9.04	31.60	-3.56	54.84	74.00	-19.16	PK	Horizontal
4882.33	49.60	44.20	9.04	31.60	-3.56	46.04	54.00	-7.96	AV	Horizontal
5359.74	48.28	44.20	9.86	32.00	-2.34	45.94	74.00	-28.06	PK	Vertical
5359.74	40.07	44.20	9.86	32.00	-2.34	37.73	54.00	-16.27	AV	Vertical
5359.86	47.29	44.20	9.86	32.00	-2.34	44.95	74.00	-29.05	PK	Horizontal
5359.86	38.17	44.20	9.86	32.00	-2.34	35.83	54.00	-18.17	AV	Horizontal
7323.69	54.84	43.50	11.40	35.50	3.40	58.24	74.00	-15.76	PK	Vertical
7323.69	44.65	43.50	11.40	35.50	3.40	48.05	54.00	-5.95	AV	Vertical
7323.75	54.30	43.50	11.40	35.50	3.40	57.70	74.00	-16.30	PK	Horizontal
7323.75	43.74	43.50	11.40	35.50	3.40	47.14	54.00	-6.86	AV	Horizontal



High Channel ($\pi/4$ -DQPSK/2480 MHz)										
3264.78	61.17	44.70	6.70	28.20	-9.80	51.37	74.00	-22.63	PK	Vertical
3264.78	50.93	44.70	6.70	28.20	-9.80	41.13	54.00	-12.87	AV	Vertical
3264.60	61.62	44.70	6.70	28.20	-9.80	51.82	74.00	-22.18	PK	Horizontal
3264.60	50.60	44.70	6.70	28.20	-9.80	40.80	54.00	-13.20	AV	Horizontal
4960.43	59.01	44.20	9.04	31.60	-3.56	55.45	74.00	-18.55	PK	Vertical
4960.43	50.56	44.20	9.04	31.60	-3.56	47.00	54.00	-7.00	AV	Vertical
4960.59	59.34	44.20	9.04	31.60	-3.56	55.78	74.00	-18.22	PK	Horizontal
4960.59	49.14	44.20	9.04	31.60	-3.56	45.58	54.00	-8.42	AV	Horizontal
5359.82	48.84	44.20	9.86	32.00	-2.34	46.50	74.00	-27.50	PK	Vertical
5359.82	39.59	44.20	9.86	32.00	-2.34	37.25	54.00	-16.75	AV	Vertical
5359.80	47.87	44.20	9.86	32.00	-2.34	45.53	74.00	-28.47	PK	Horizontal
5359.80	38.59	44.20	9.86	32.00	-2.34	36.25	54.00	-17.75	AV	Horizontal
7439.87	54.16	43.50	11.40	35.50	3.40	57.56	74.00	-16.44	PK	Vertical
7439.87	44.84	43.50	11.40	35.50	3.40	48.24	54.00	-5.76	AV	Vertical
7439.67	54.12	43.50	11.40	35.50	3.40	57.52	74.00	-16.48	PK	Horizontal
7439.67	44.78	43.50	11.40	35.50	3.40	48.18	54.00	-5.82	AV	Horizontal

Note:

1) Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK, the worst case is $\pi/4$ -DQPSK Mode.

2) Factor = Antenna Factor + Cable Loss – Pre-amplifier.


Emission Level = Reading + Factor

3) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



RX Mode RSE-GFSK-H

RE_IC Test Case_RSS 1GHz-13GHz

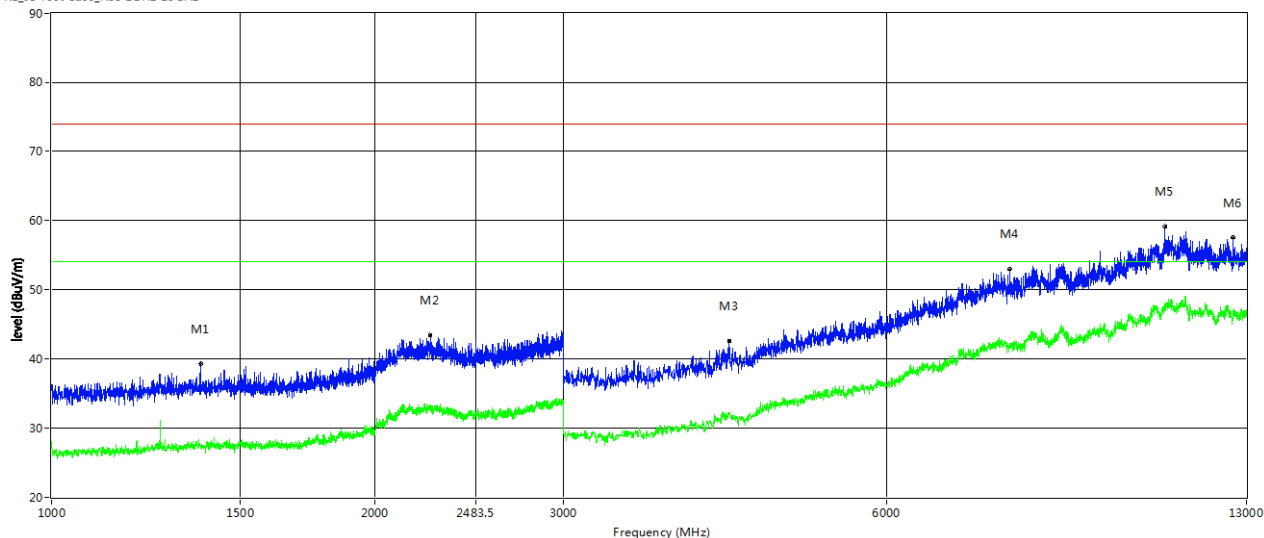


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1376.500	39.34	--	27.30	-0.72	74.0	--	54.0	-26.70	Horizontal	Pass
2253.500	43.38	--	33.23	4.64	74.0	--	54.0	-20.77	Horizontal	Pass
4280.000	42.56	--	32.24	-8.96	74.0	--	54.0	-21.76	Horizontal	Pass
7810.000	52.94	--	41.79	2.23	74.0	--	54.0	-12.21	Horizontal	Pass
10905.000	59.12	--	47.92	8.61	74.0	--	54.0	-6.08	Horizontal	Pass
12622.500	57.56	--	46.91	7.83	74.0	--	54.0	-7.09	Horizontal	Pass



RSE-GFSK-V

RE_IC Test Case_RSS 1GHz-13GHz

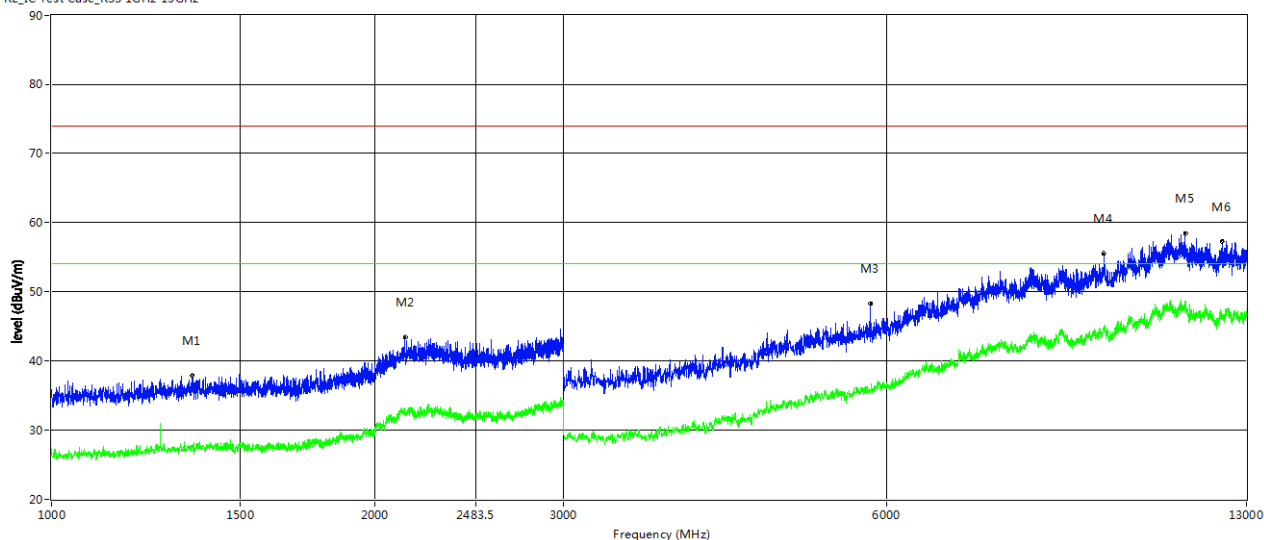


Frequency (MHz)	Peak Level (dBuV /m)	Q-peak Level (dBuV /m)	Average Level (dBuV /m)	Factor (dB)	PK Limit (dBuV /m)	QP Limit (dBuV /m)	AV Limit (dBuV /m)	Over Limit (dB)	ANT	Verdict
1350.000	37.79	--	27.40	-0.79	74.0	--	54.0	-26.60	Vertical	Pass
2134.000	43.49	--	32.12	4.36	74.0	--	54.0	-21.88	Vertical	Pass
5797.500	48.26	--	35.44	-3.87	74.0	--	54.0	-18.56	Vertical	Pass
9562.500	55.51	--	44.42	4.51	74.0	--	54.0	-9.58	Vertical	Pass
11392.500	58.40	--	48.59	8.48	74.0	--	54.0	-5.41	Vertical	Pass
12327.500	57.23	--	46.62	7.78	74.0	--	54.0	-7.38	Vertical	Pass

Note: All mode has been tested, only shown the worst case in this report.




Restricted band Requirements

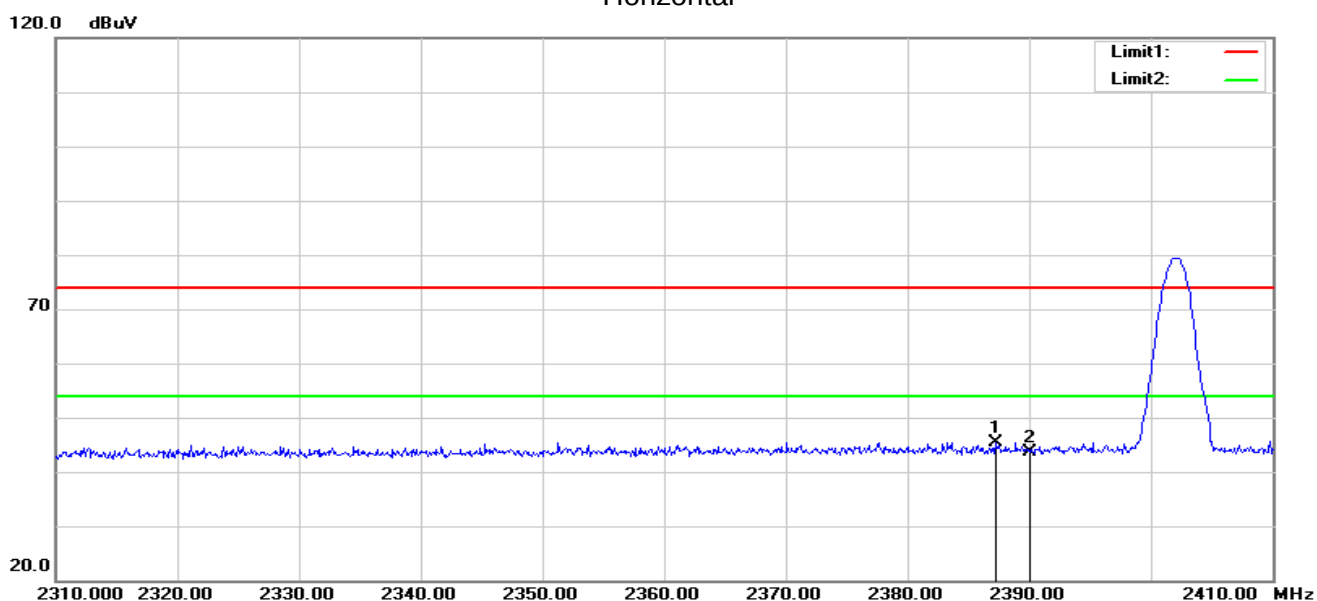 $\pi/4$ -DQPSK-Low
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2387.200	41.19	4.30	45.49	74.00	-28.51	peak
2	2390.000	39.30	4.34	43.64	74.00	-30.36	peak


Vertical

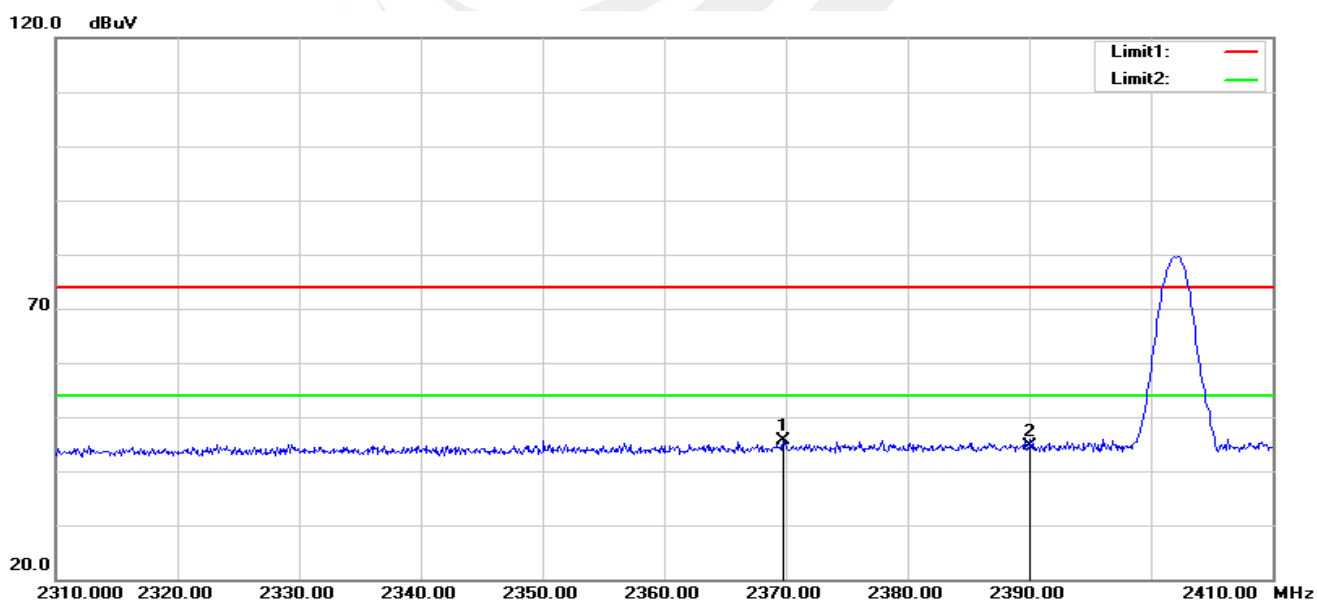

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2369.800	41.63	4.04	45.67	74.00	-28.33	peak
2	2390.000	40.40	4.34	44.74	74.00	-29.26	peak




$\pi/4$ -DQPSK-High
Horizontal

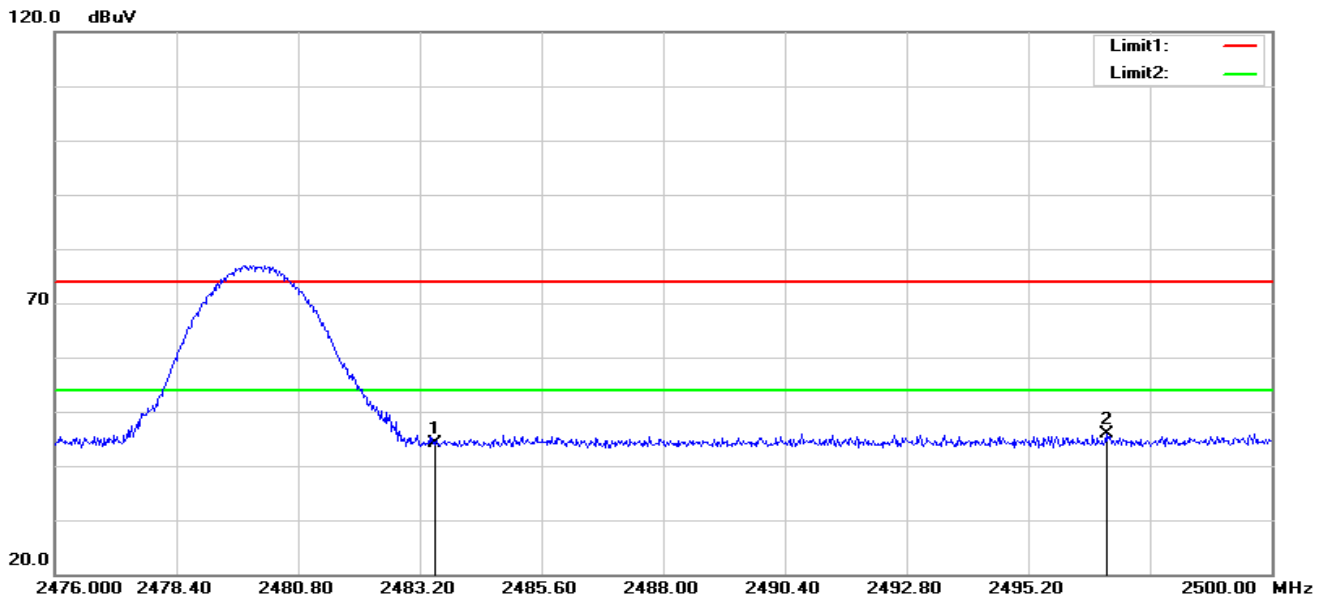

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	39.45	4.60	44.05	74.00	-29.95	peak
2	2496.736	41.25	4.64	45.89	74.00	-28.11	peak

Vertical

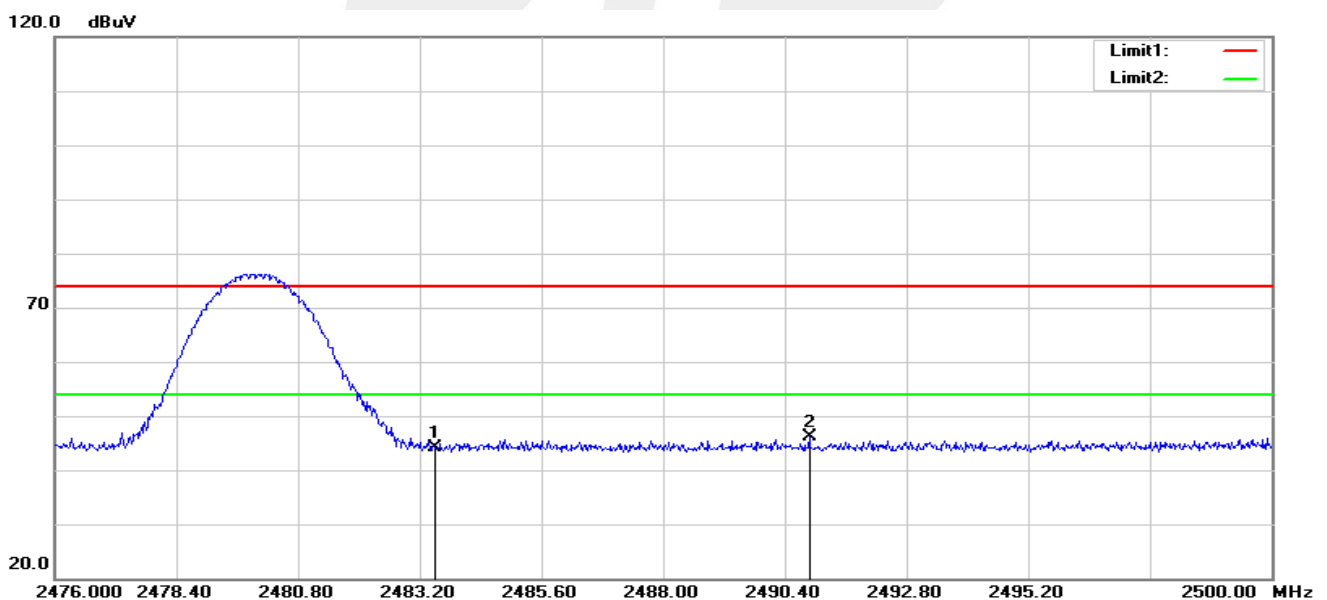

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	39.45	4.60	44.05	74.00	-29.95	peak
2	2490.880	41.43	4.63	46.06	74.00	-27.94	peak

Note: GFSK, $\pi/4$ -DQPSK, 8DPSK of the nohopping and hopping mode all have been test, the worst case is $\pi/4$ -DQPSK of the nohopping mode, this report only show the worst case.

4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d) and RSS-247 Issue 2, February 2017 (5.5), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300– 2403 MHz Upper Band Edge: 2476 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

Remark: Hopping on and Hopping off mode all have been tested, only worst case hopping off is reported.

4.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




4.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK(1Mbps)-00/39/78 CH	Test Voltage:	DC 7.4V from battery

00 CH

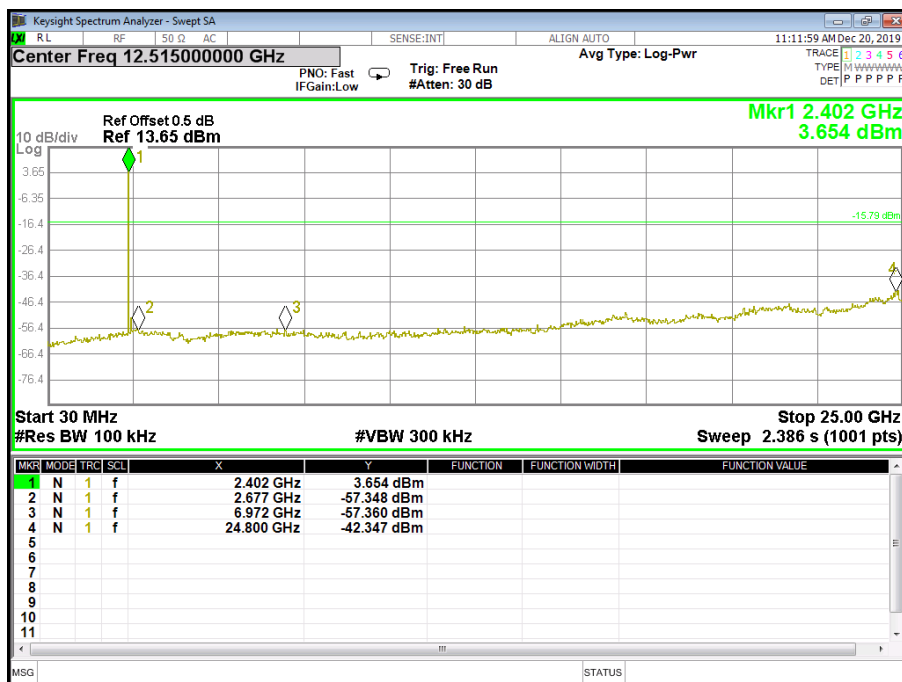


39 CH

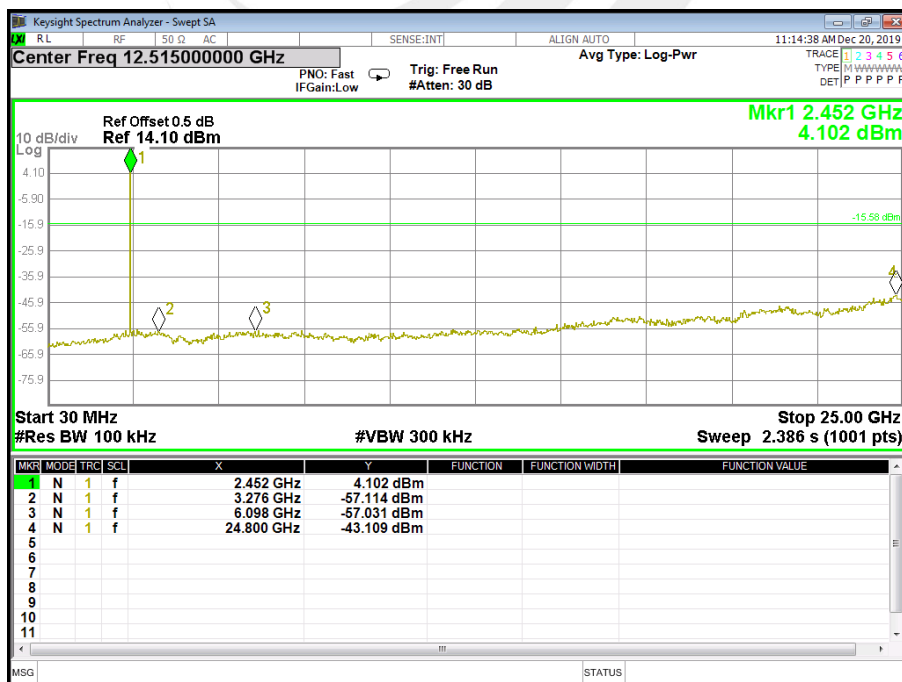




78 CH

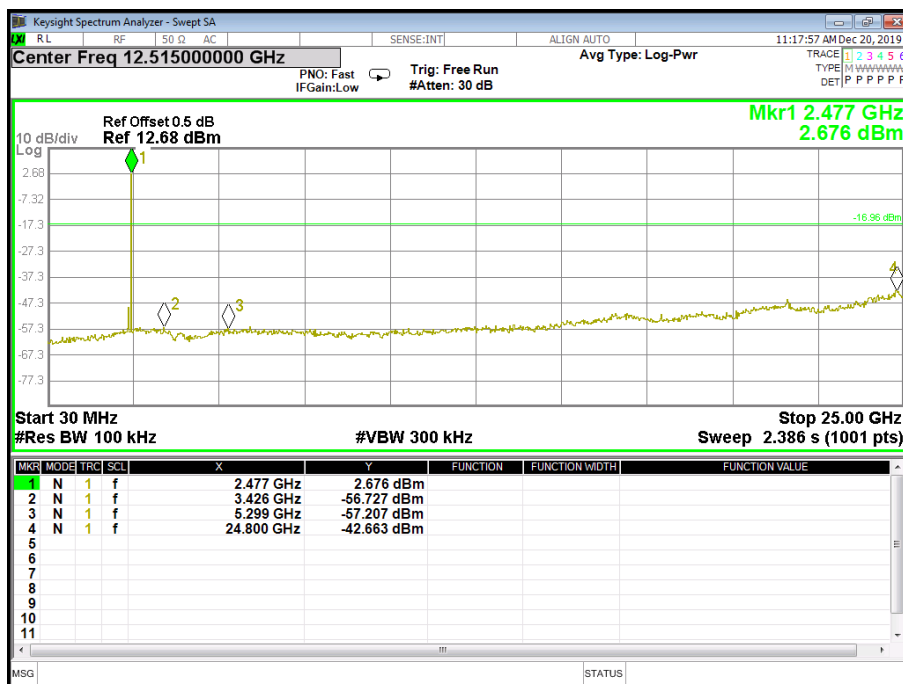




For Band edge(it's also the reference level for conducted spurious emission)

00 CH

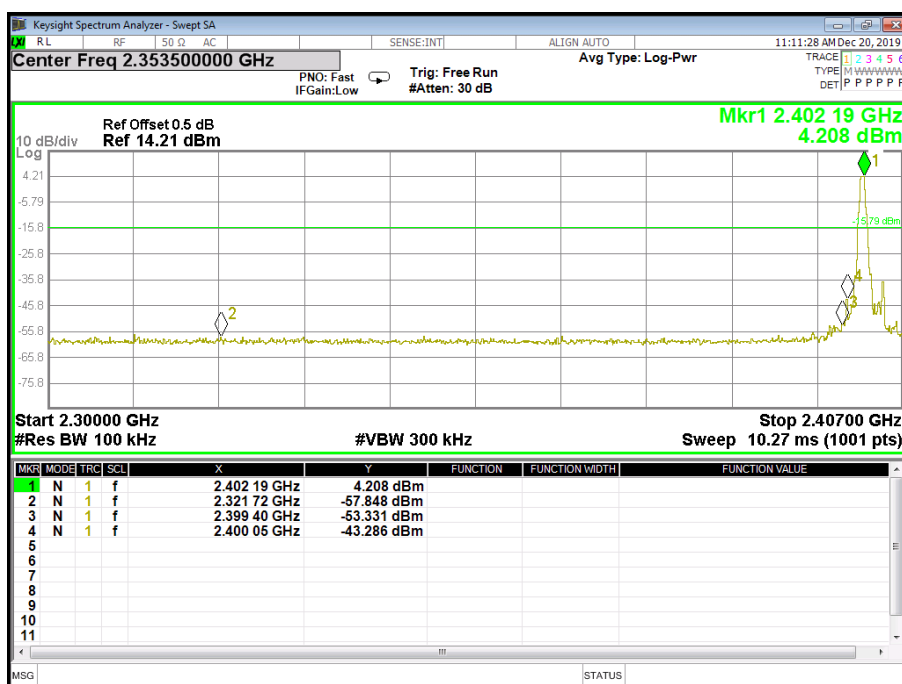


39 CH

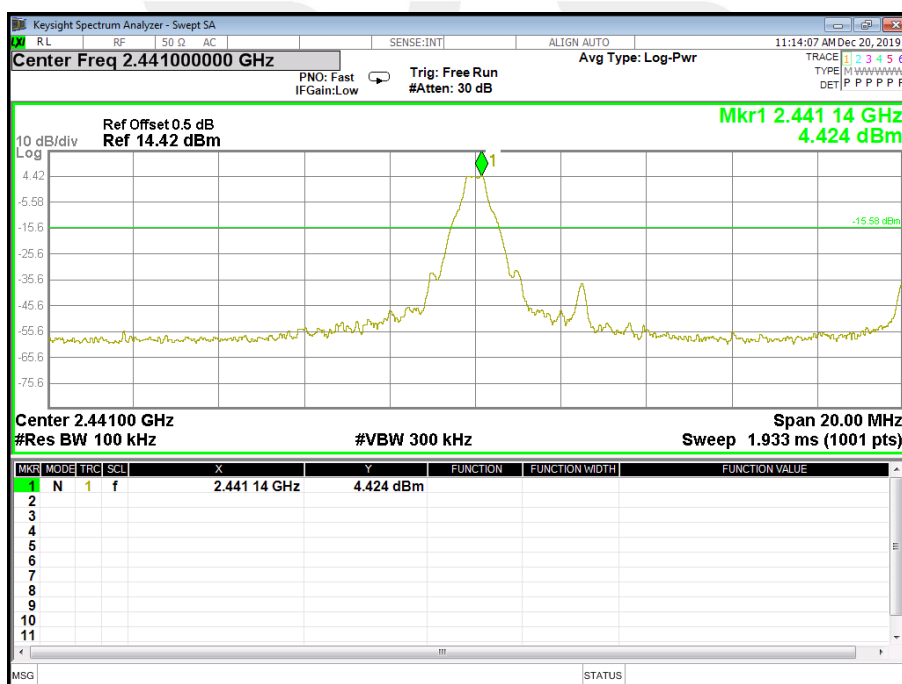




78 CH

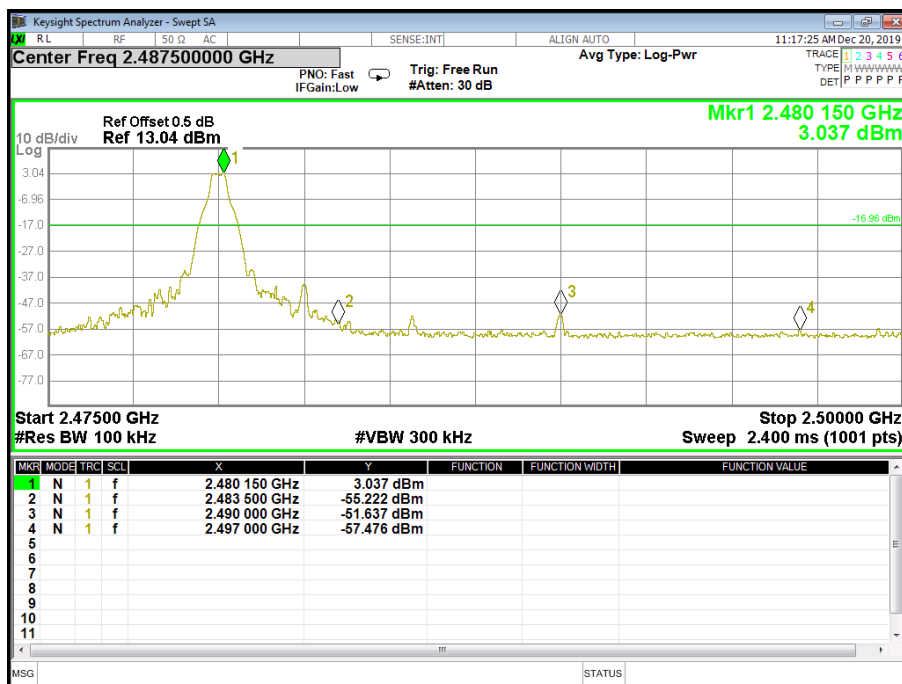




For Hopping Band edge

00 CH

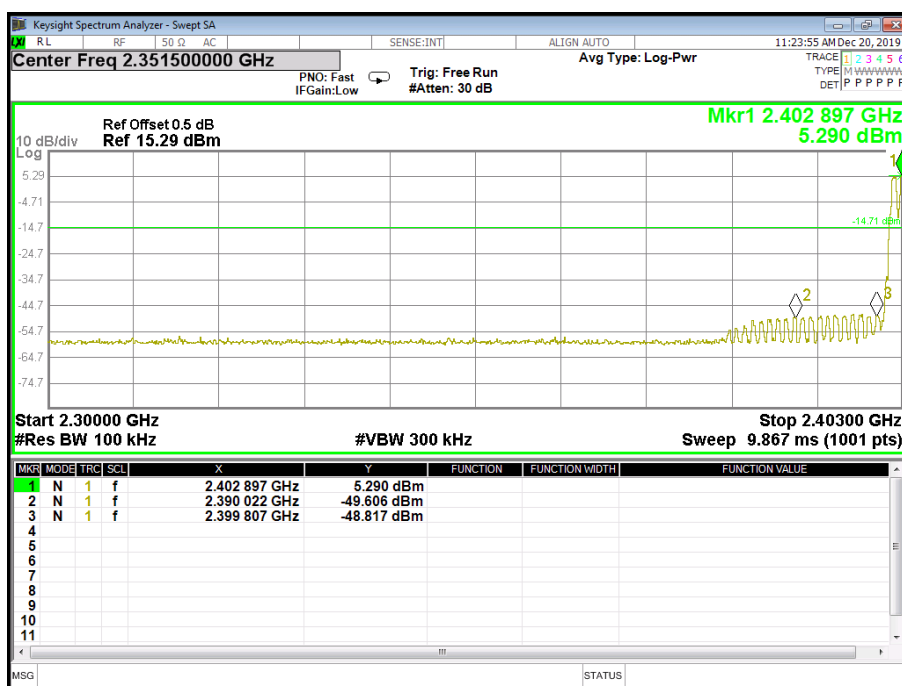


78 CH

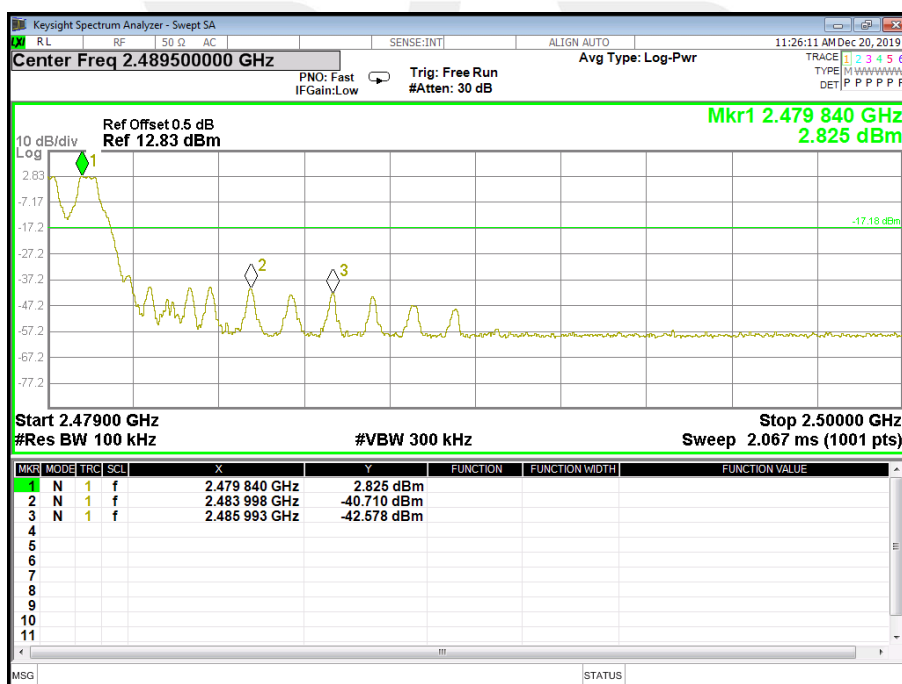




Temperature:	25°C	Relative Humidity:	50%
Test Mode:	$\pi/4$ -DQPSK(2Mbps)- 00/39/78 CH	Test Voltage:	DC 7.4V from battery

00 CH

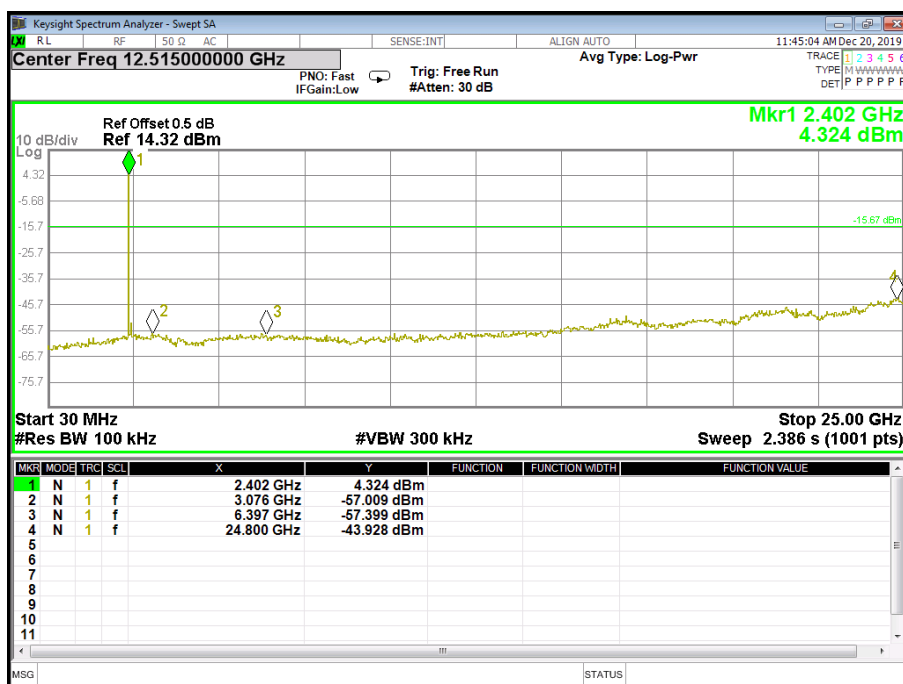


39 CH

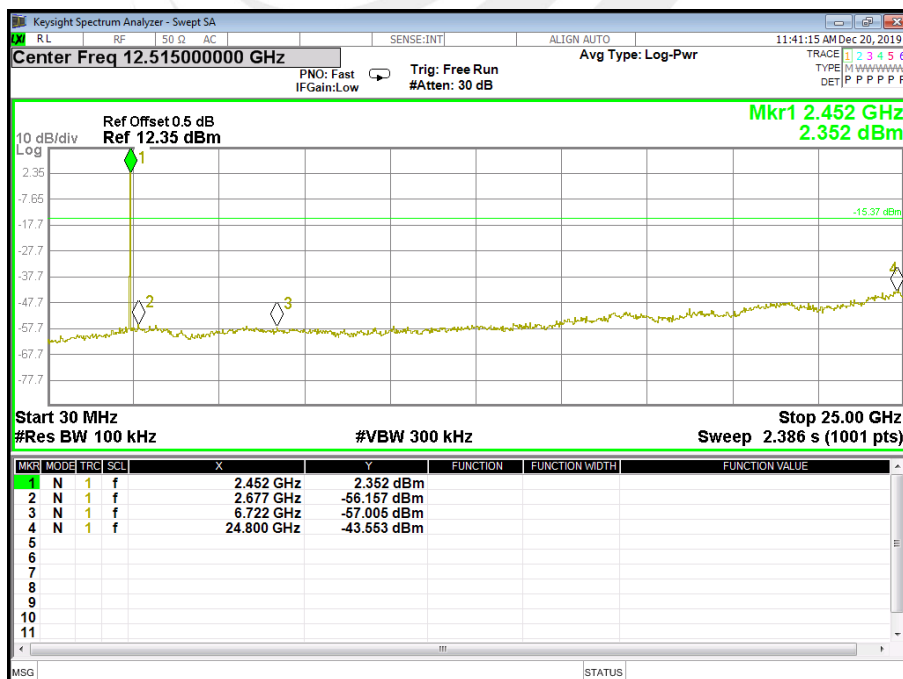




78 CH

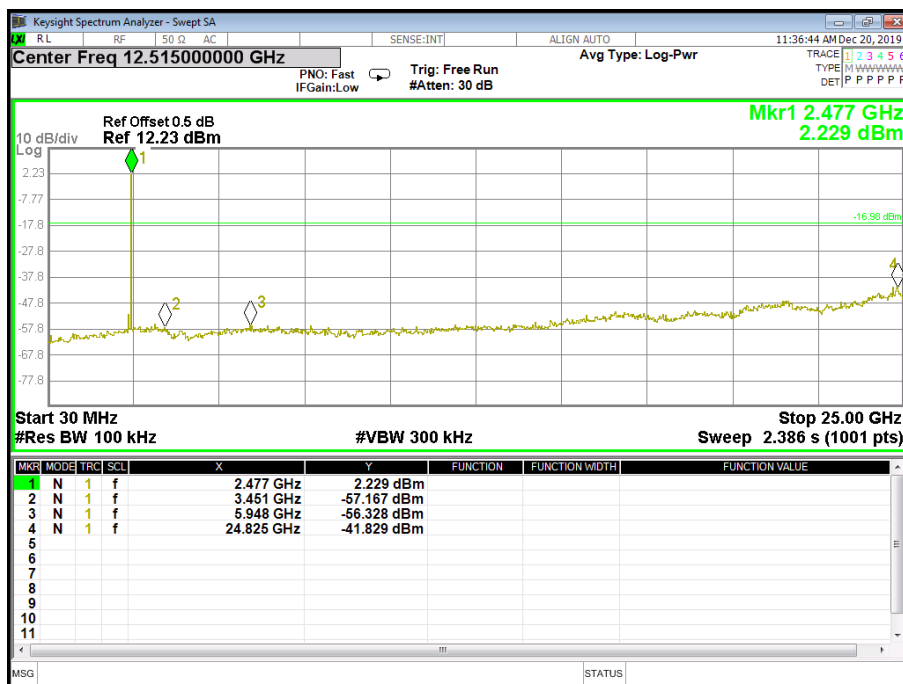




For Band edge(it's also the reference level for conducted spurious emission)

00 CH

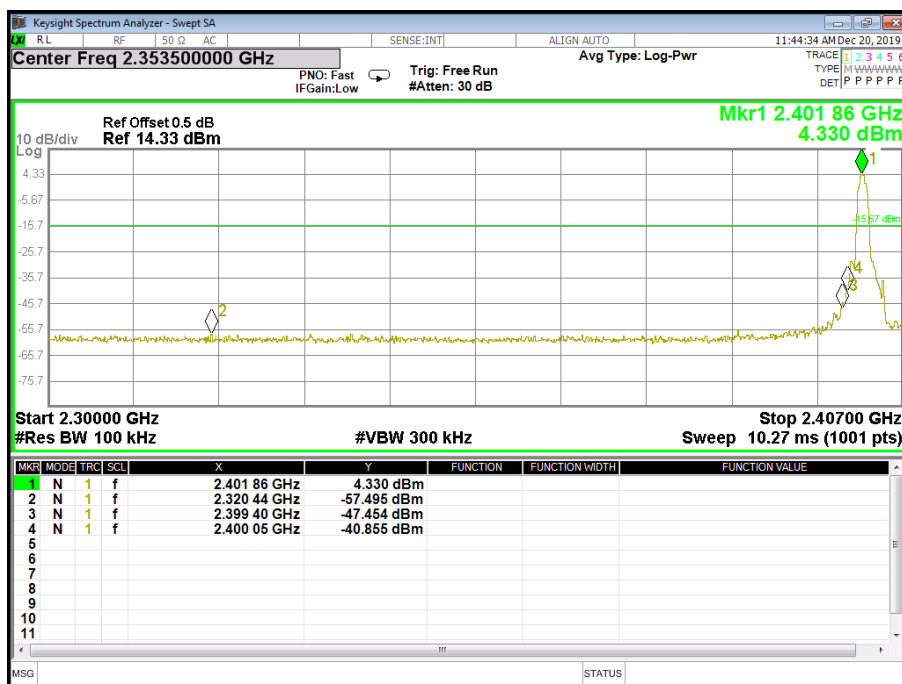


39 CH

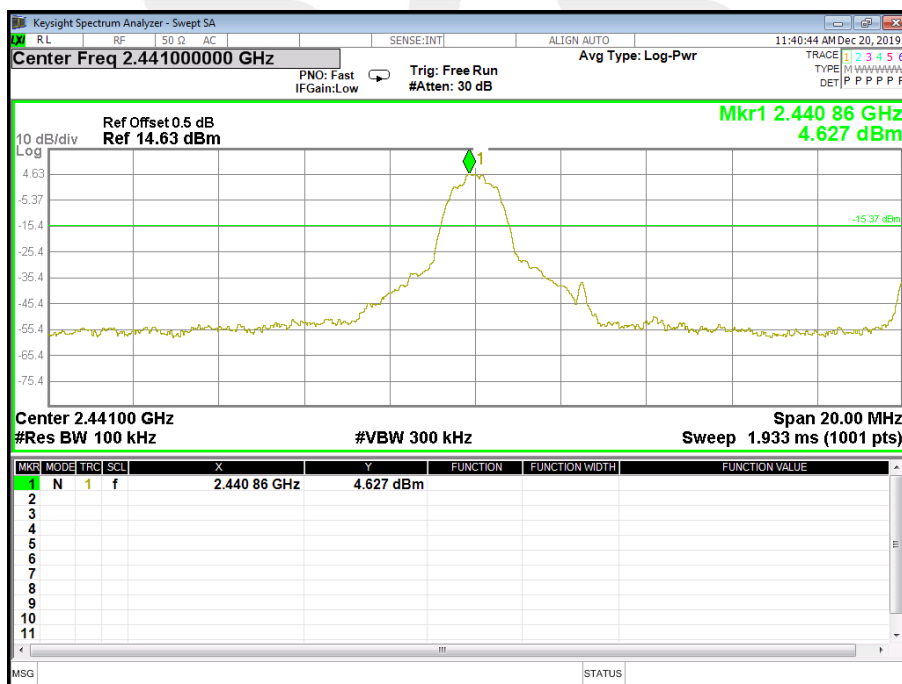




78 CH

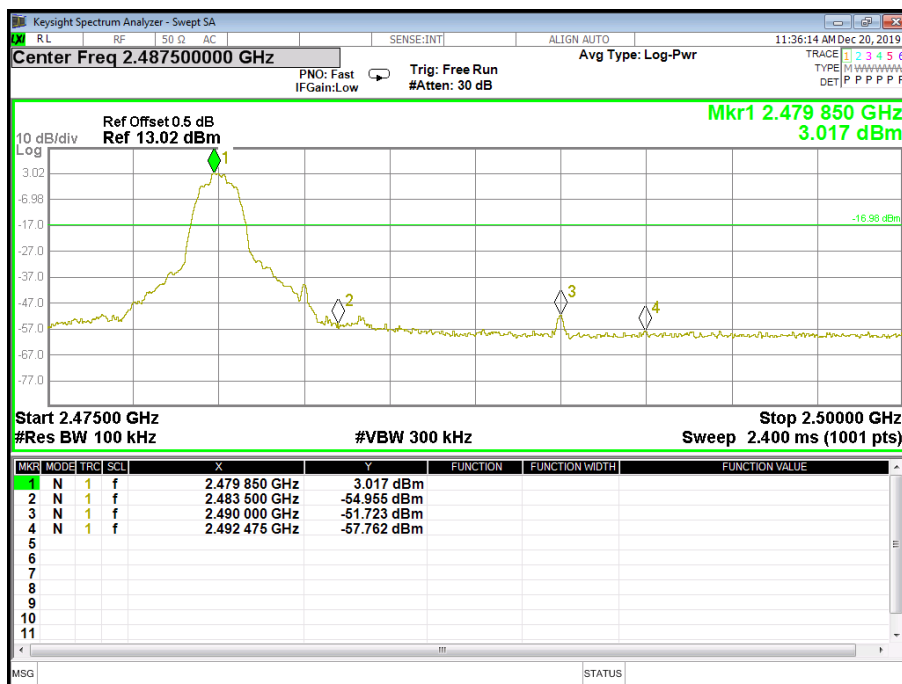




For Hopping Band edge

00 CH

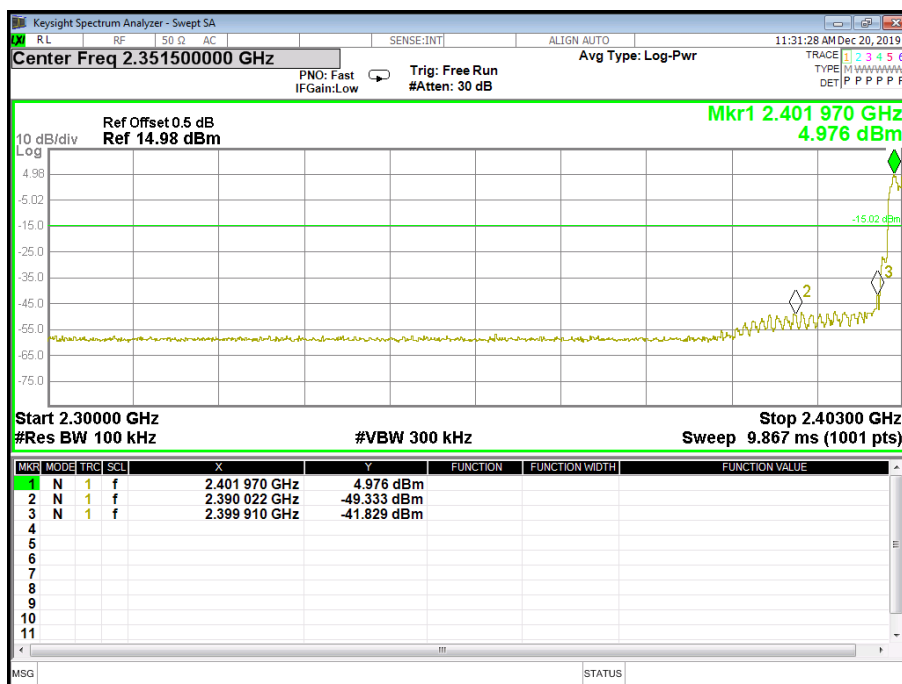


78 CH

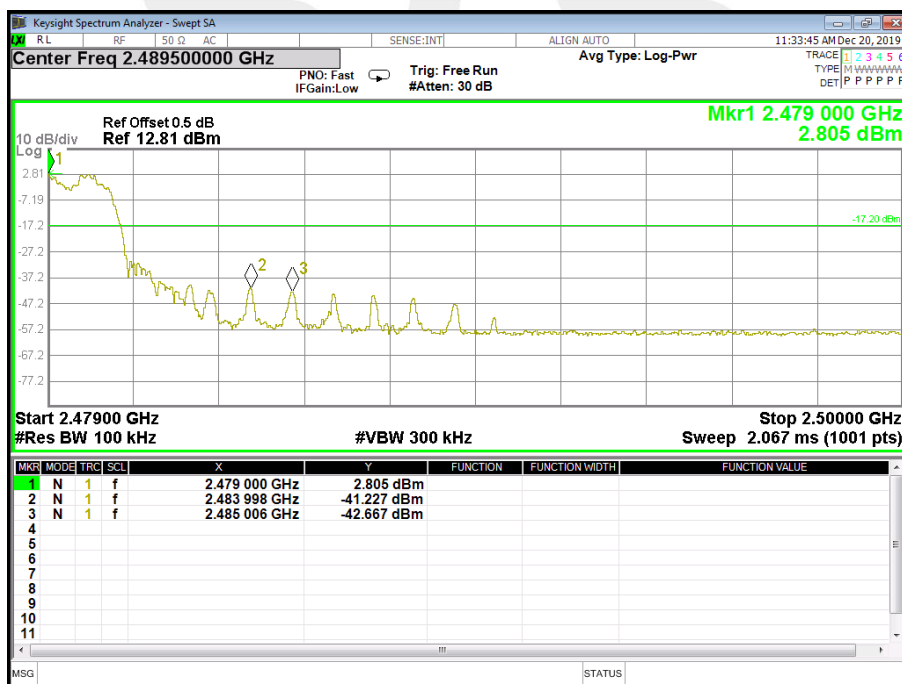




Temperature:	25°C	Relative Humidity:	50%
Test Mode:	8DPSK(3Mbps) -00/39/78 CH	Test Voltage:	DC 7.4V from battery

00 CH

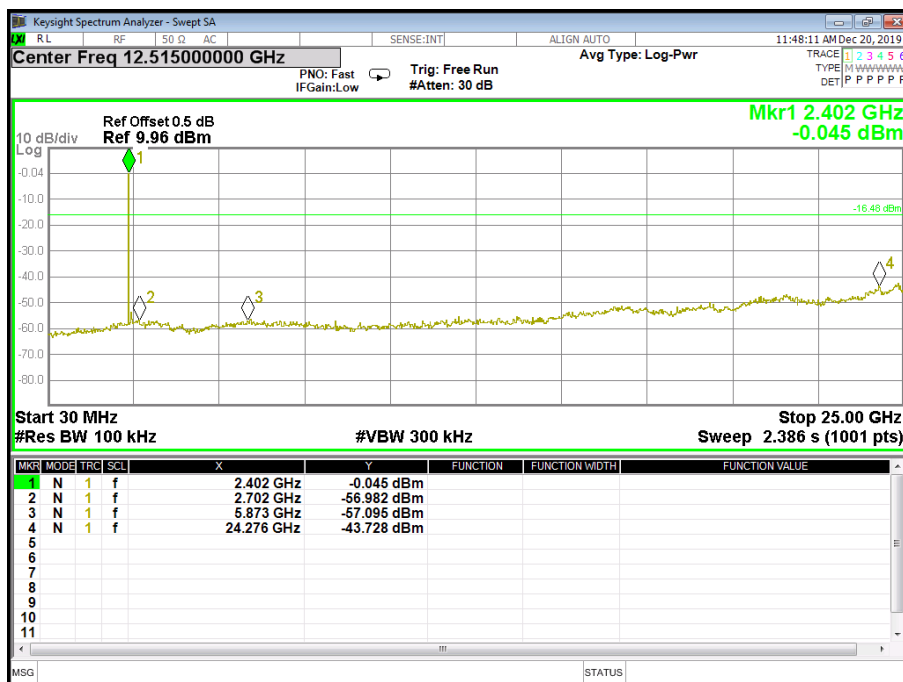


39 CH

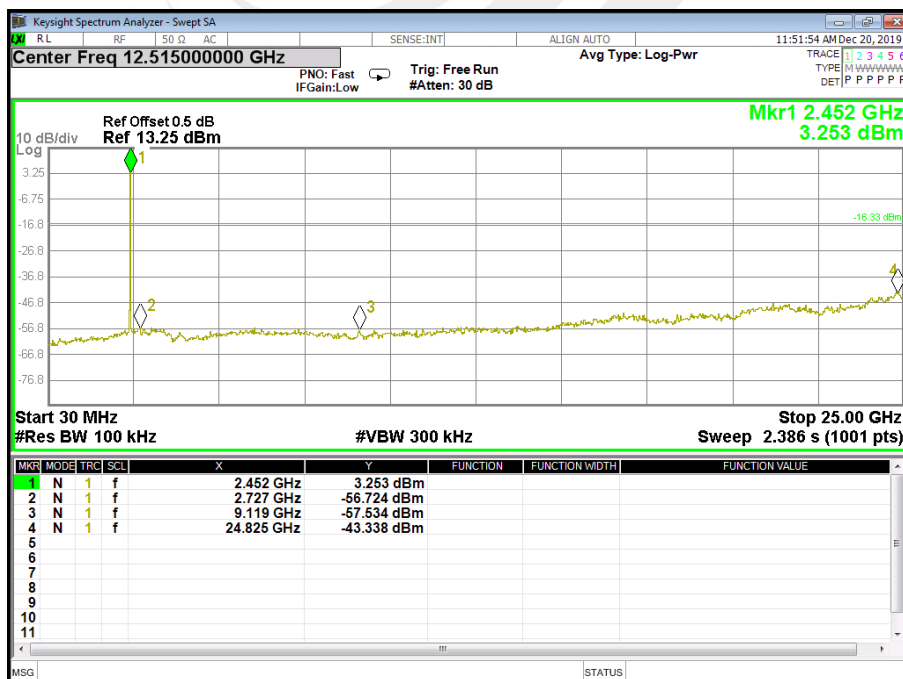




78 CH

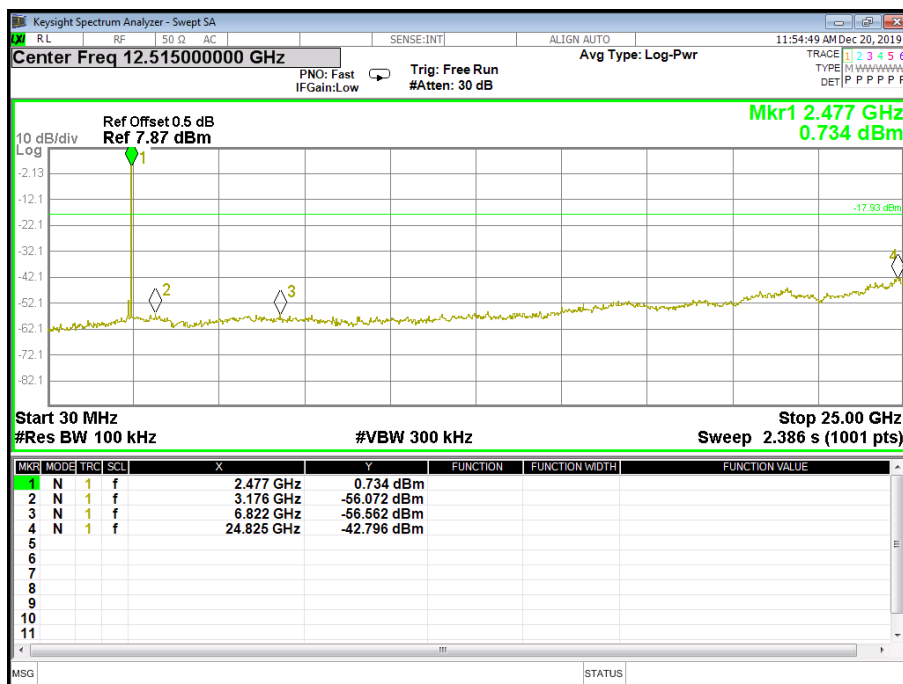




For Band edge(it's also the reference level for conducted spurious emission)

00 CH

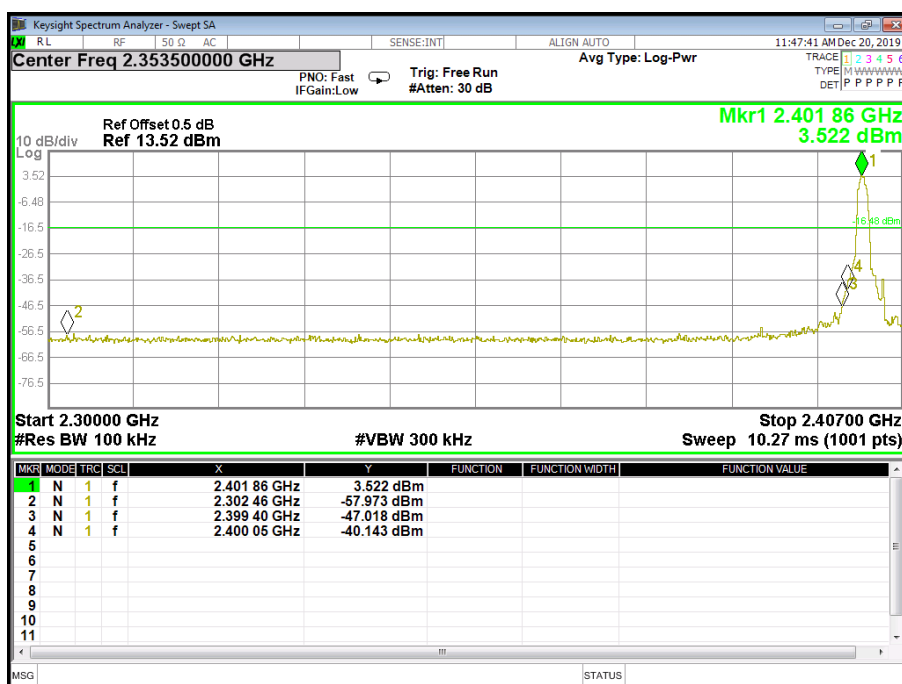


39 CH

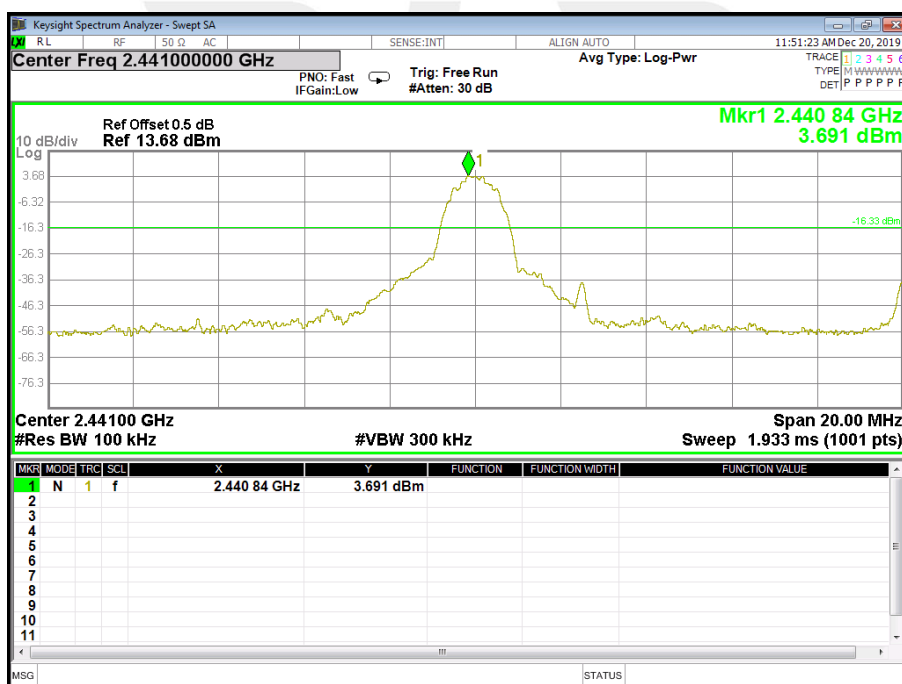




78 CH

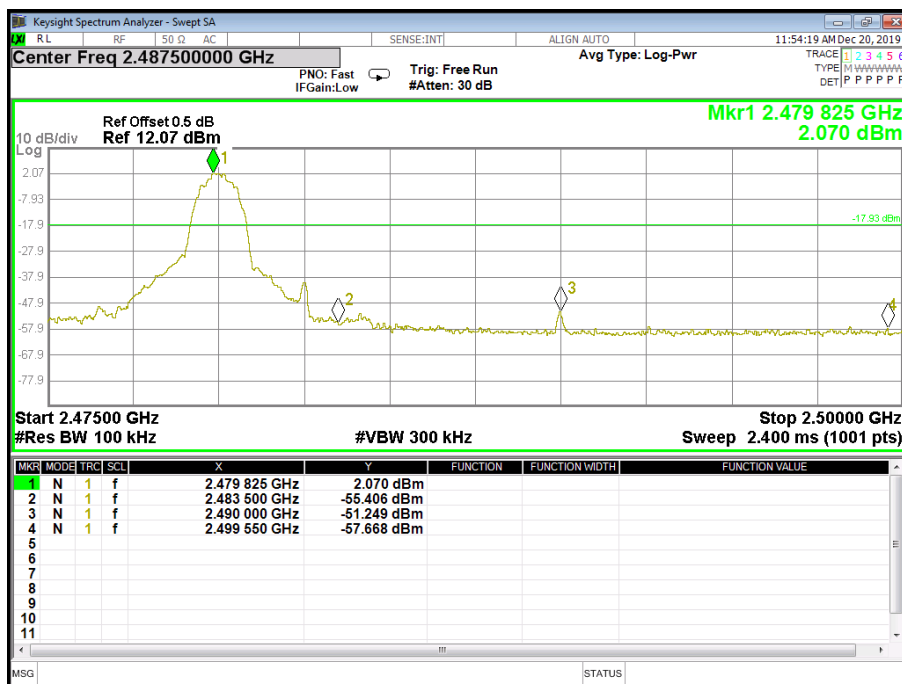




For Hopping Band edge

00 CH

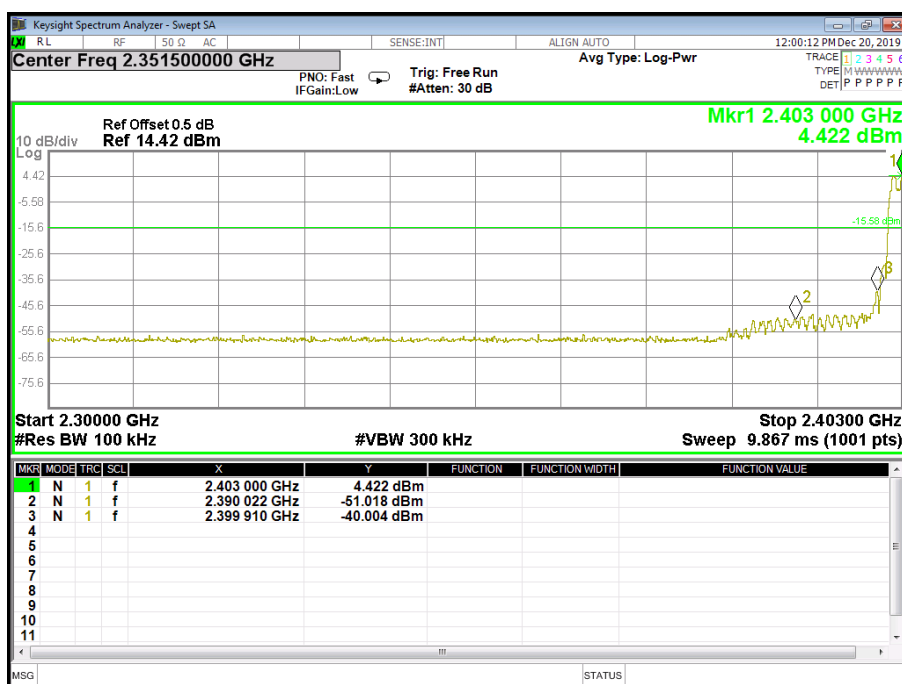

78 CH

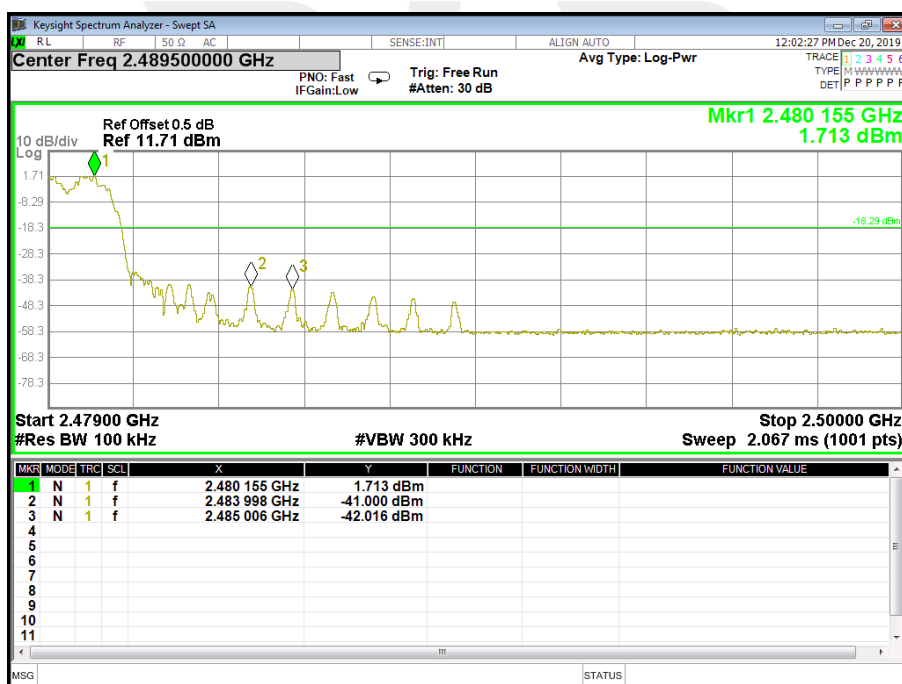



5. NUMBER OF HOPPING CHANNEL

5.1 LIMIT

FCC Part 15.247, Subpart C RSS-247 Issue 2				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii) RSS-247	Number of Hopping Channel	≥ 15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	300KHz
VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as shown in the block diagram below.
- Spectrum Setting: RBW= 300KHz, VBW=300KHz, Sweep time = Auto.

5.3 TEST SETUP



5.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




5.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	Hopping Mode -GFSK Mode	Test Voltage:	DC 7.4V from battery

Number of Hopping Channel

79

Hopping channel

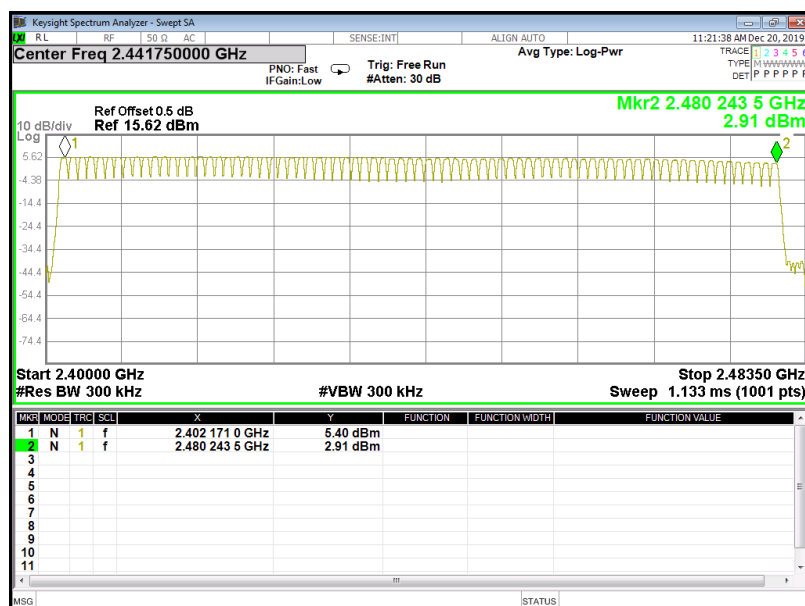



6. AVERAGE TIME OF OCCUPANCY

6.1 LIMIT

FCC Part 15.247, Subpart C RSS-247 Issue 2				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii) RSS-247	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- Set RBW = 1MHz/VBW = 3MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.5 TEST RESULTS


Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK(1Mbps)-DH1/DH3/DH5	Test Voltage:	DC 7.4V from battery

Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
DH1	middle	0.382	0.122	0.4
DH3	middle	1.644	0.263	0.4
DH5	middle	2.888	0.308	0.4







CH39-DH1

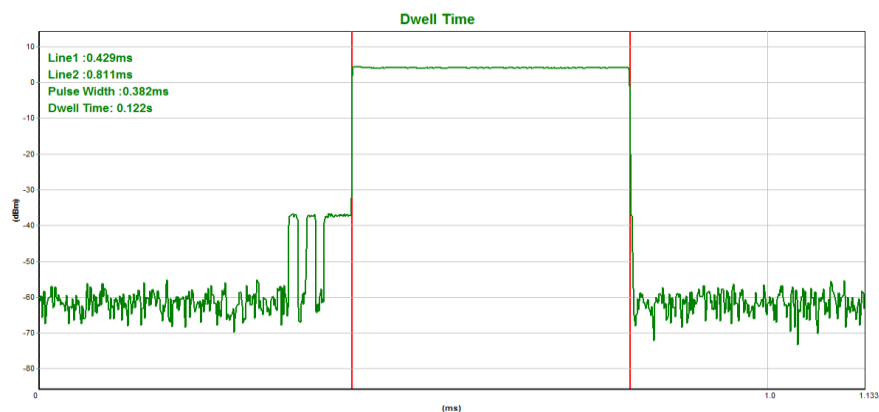

CH39-DH3

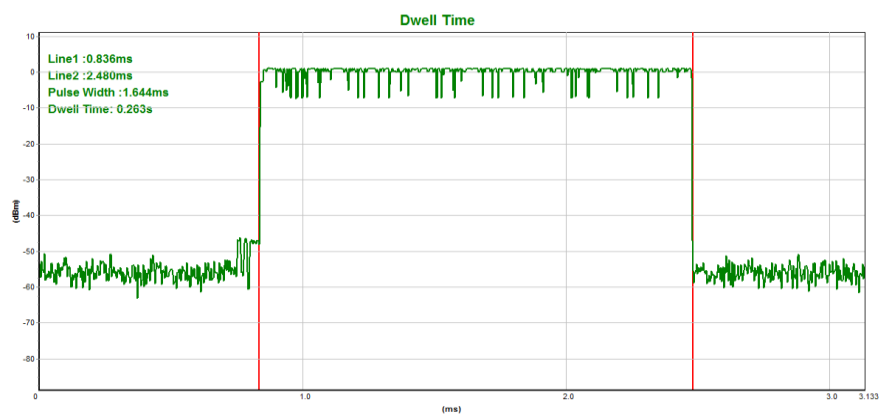

CH39-DH5

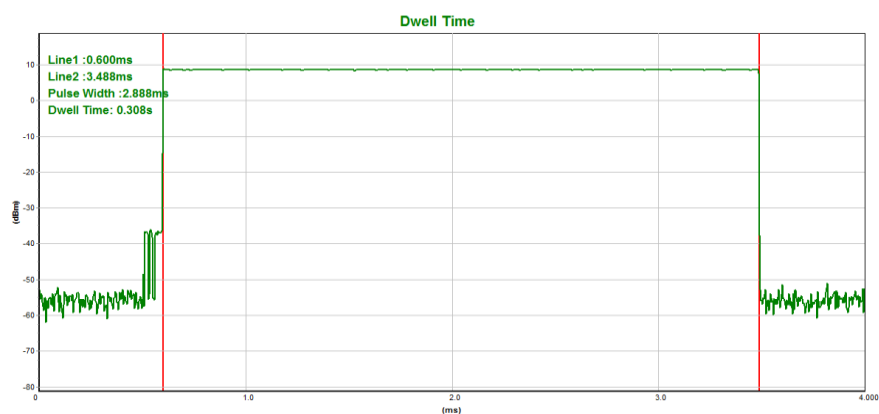



Temperature:	25°C	Relative Humidity:	50%
Test Mode:	$\pi/4$ -DQPSK(2Mbps)– 2DH1/2DH3/2DH5	Test Voltage:	DC 7.4V from battery

Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
2DH1	middle	0.391	0.125	0.4
2DH3	middle	1.646	0.263	0.4
2DH5	middle	2.898	0.309	0.4







CH39-2DH1



CH39-2DH3

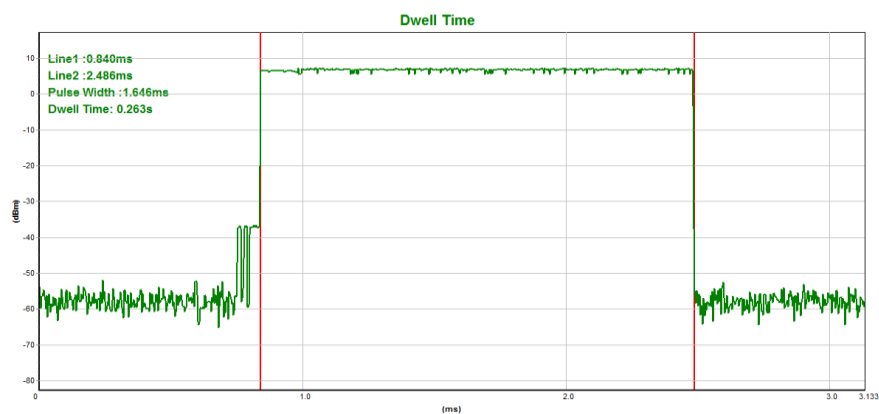

CH39-2DH5

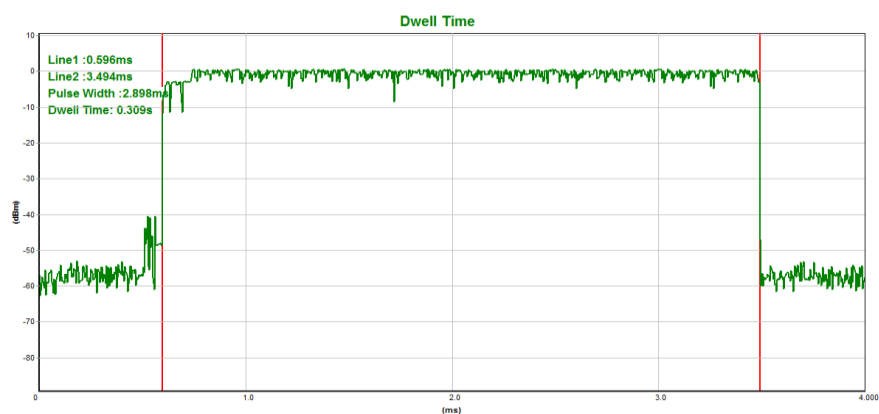




Temperature:	25°C	Relative Humidity:	50%
Test Mode:	8DPSK(3Mbps)– 3DH1/3DH3/3DH5	Test Voltage:	DC 7.4V from battery

Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
3DH1	middle	0.393	0.126	0.4
3DH3	middle	1.650	0.264	0.4
3DH5	middle	2.898	0.309	0.4






CH39-3DH1

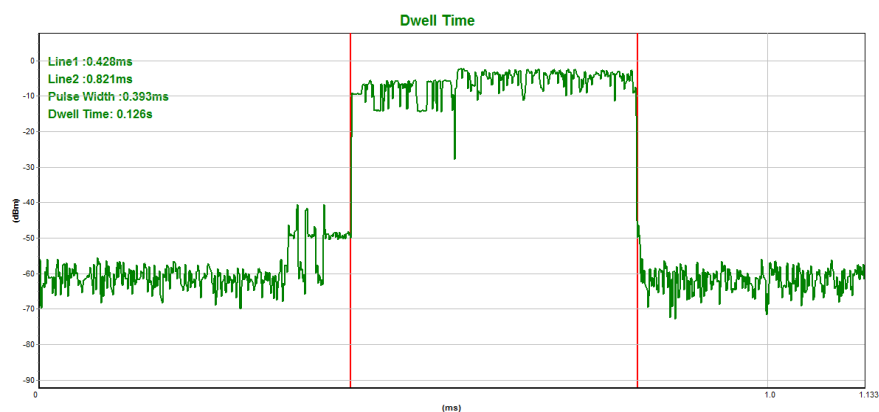

CH39-3DH3



CH39-3DH5

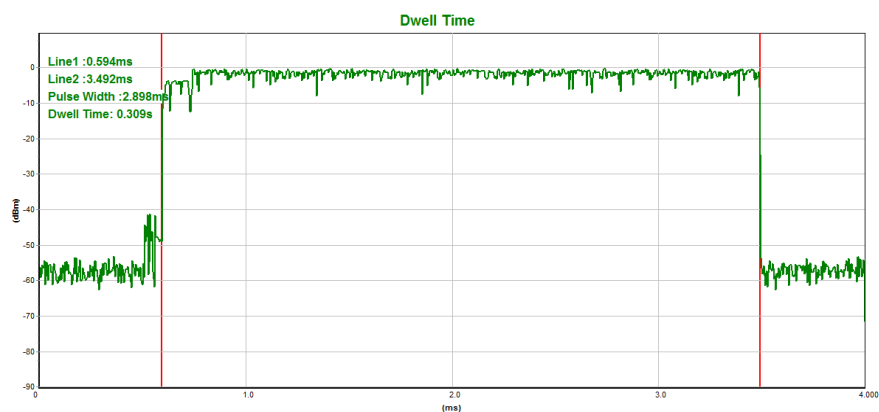

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 LIMIT


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 20 dB Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

7.3 TEST SETUP

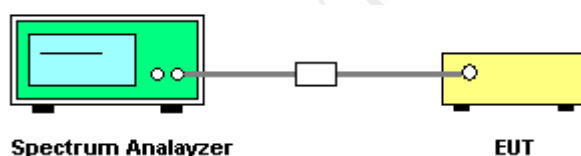

7.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.




7.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH00 / CH39 / CH78 (GFSK(1Mbps) Mode)	Test Voltage:	DC 7.4V from battery

Frequency	Mark1 Frequency (MHz)	Mark2 Frequency (MHz)	Ch. Separation (MHz)	Limit (MHz)	Result
2402 MHz	2401.981	2402.983	1.002	0.946	Complies
2441 MHz	2440.978	2441.977	0.999	0.946	Complies
2480 MHz	2478.882	2479.980	1.098	0.943	Complies


For GFSK: Ch. Separation Limits: > 20dB bandwidth

CH00 -1Mbps

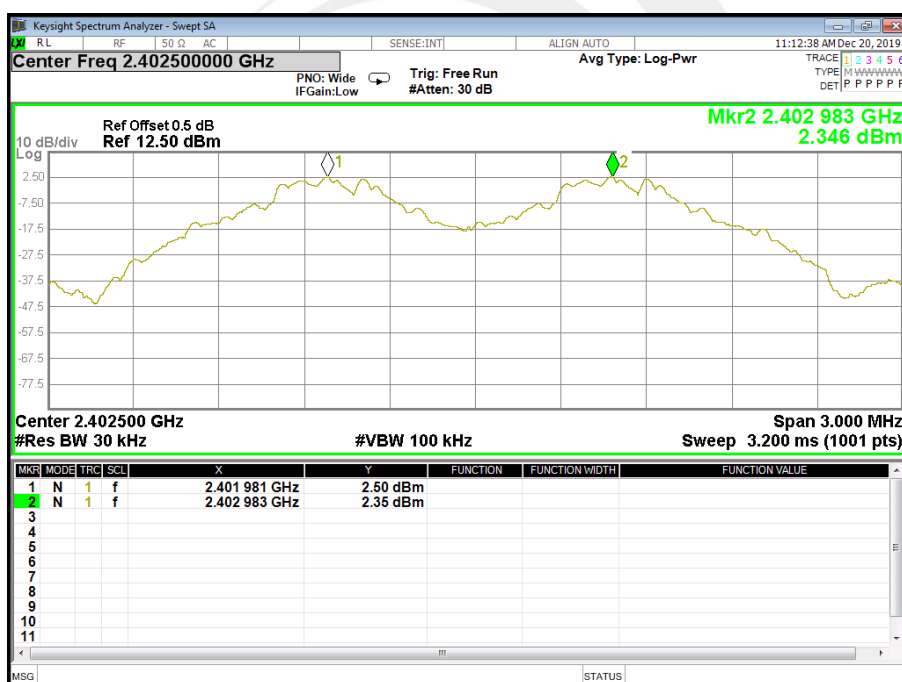




CH39 -1Mbps

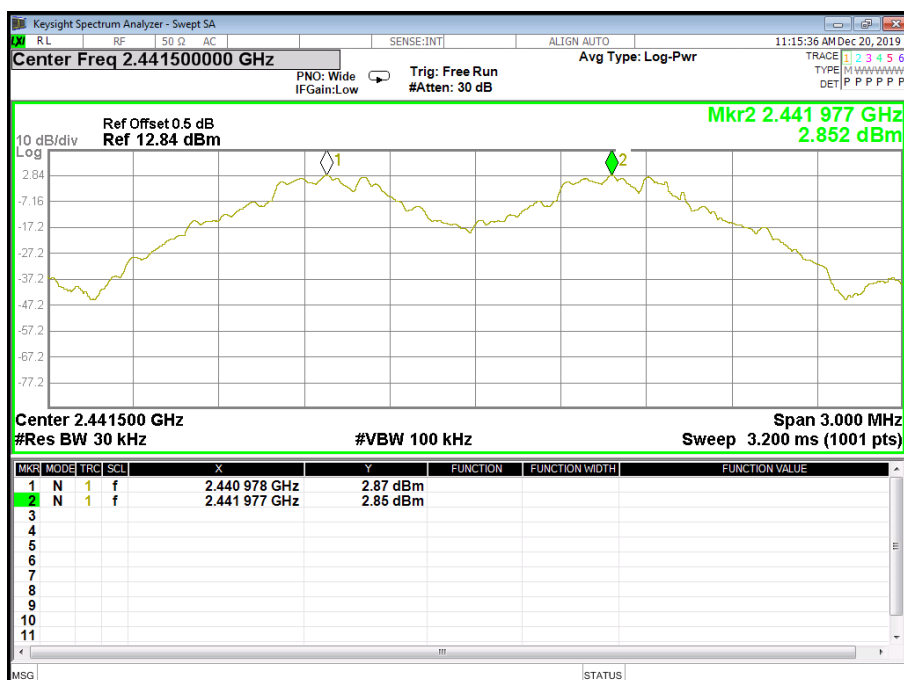

CH78 -1Mbps

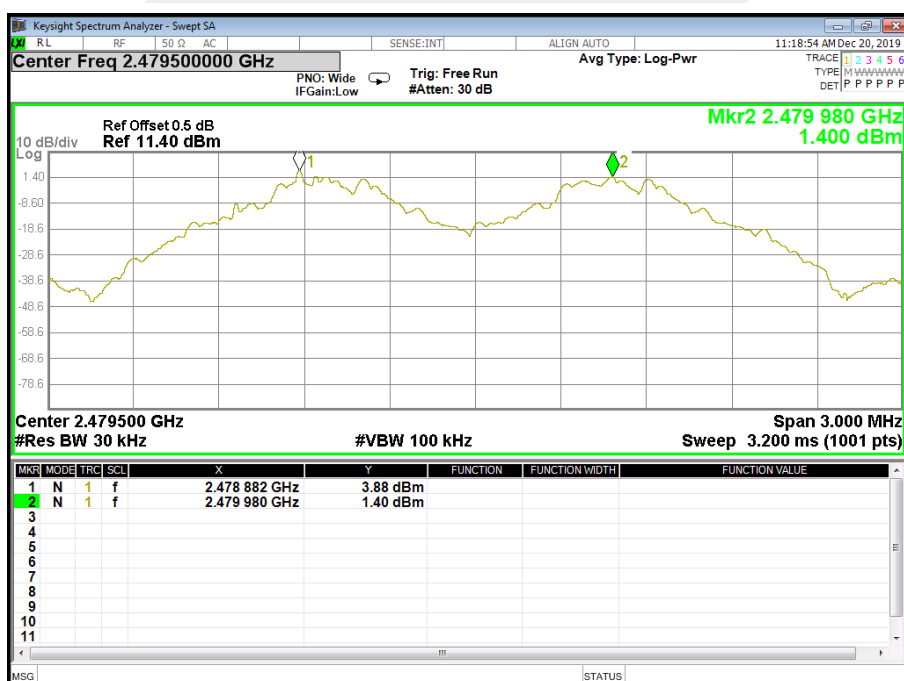




Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH00 / CH39 / CH78 ($\pi/4$ -DQPSK(2Mbps) Mode)	Test Voltage:	DC 7.4V from battery

Frequency	Mark1 Frequency (MHz)	Mark2 Frequency (MHz)	Ch. Separation (MHz)	Limit (MHz)	Result
2402 MHz	2401.978	2402.974	0.996	0.948	Complies
2441 MHz	2440.978	2441.977	0.999	0.951	Complies
2480 MHz	2478.978	2479.977	0.999	0.955	Complies


For $\pi/4$ -DQPSK(2Mbps): Ch. Separation Limits: > two-thirds 20dB bandwidth

CH00 -2Mbps

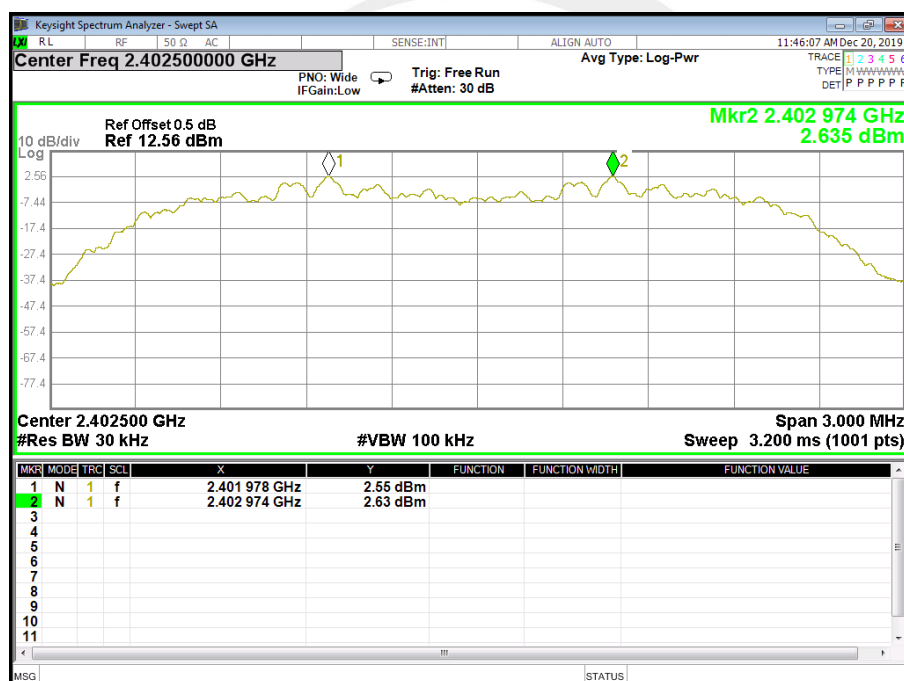




CH39 -2Mbps

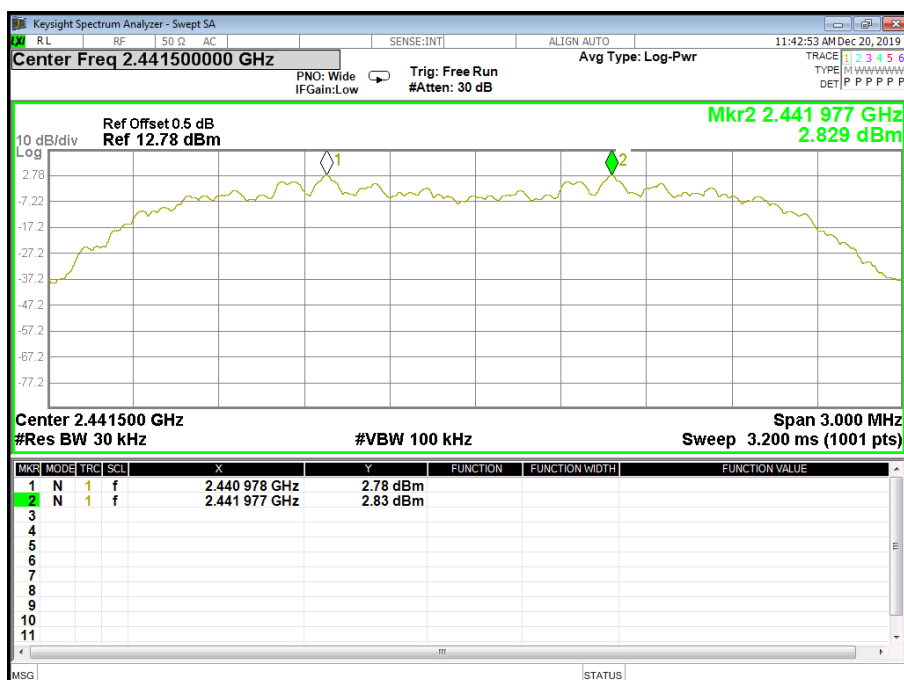

CH78 -2Mbps

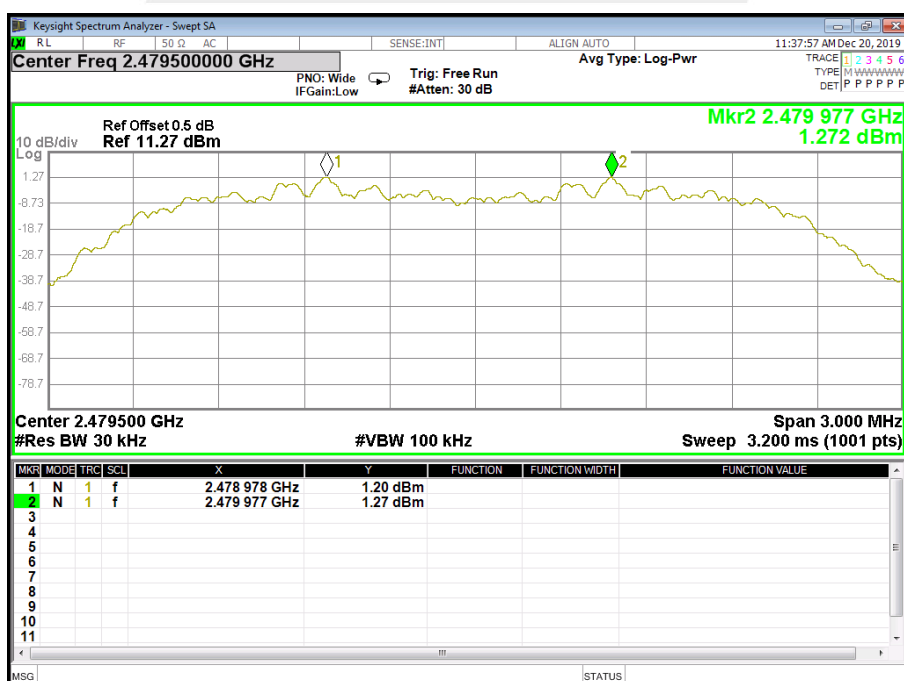




Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH00 / CH39 / CH78 (8DPSK(3Mbps)Mode)	Test Voltage:	DC 7.4V from battery

Frequency	Mark1 Frequency (MHz)	Mark2 Frequency (MHz)	Ch. Separation (MHz)	Limit (MHz)	Result
2402 MHz	2401.978	2402.977	0.999	0.962	Complies
2441 MHz	2440.978	2441.977	0.999	0.964	Complies
2480 MHz	2478.975	2479.977	1.002	0.961	Complies


For 8DPSK(3Mbps):Ch. Separation Limits: > two-thirds 20dB bandwidth

CH00 -3Mbps

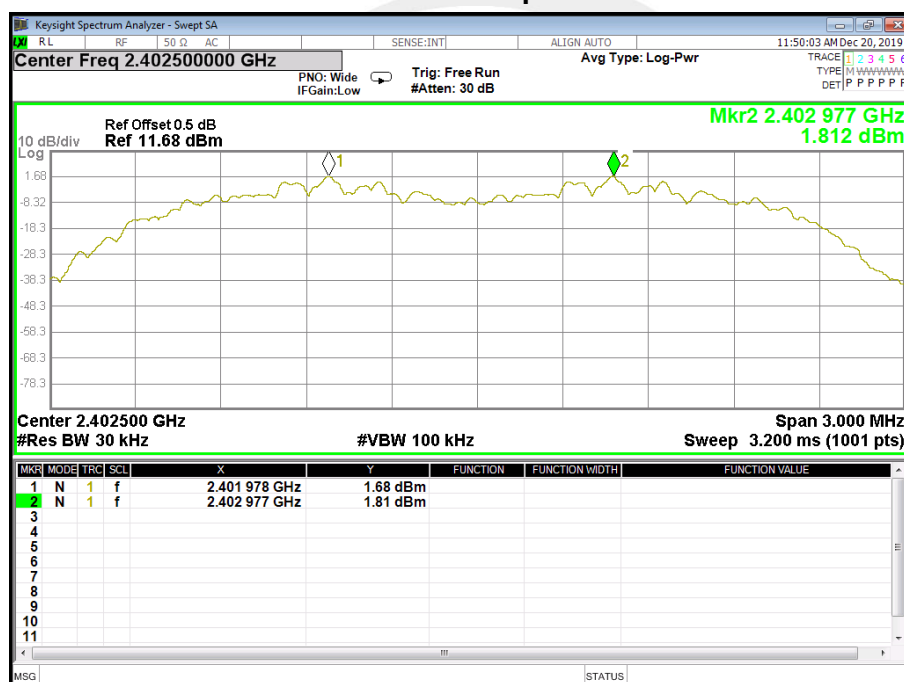




CH39 -3Mbps

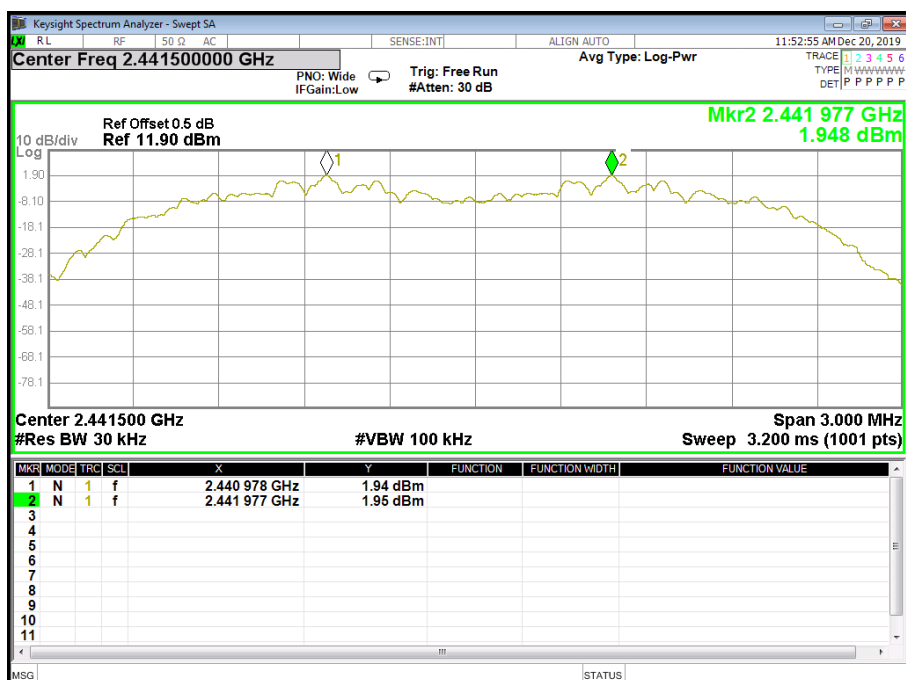

CH78 -3Mbps

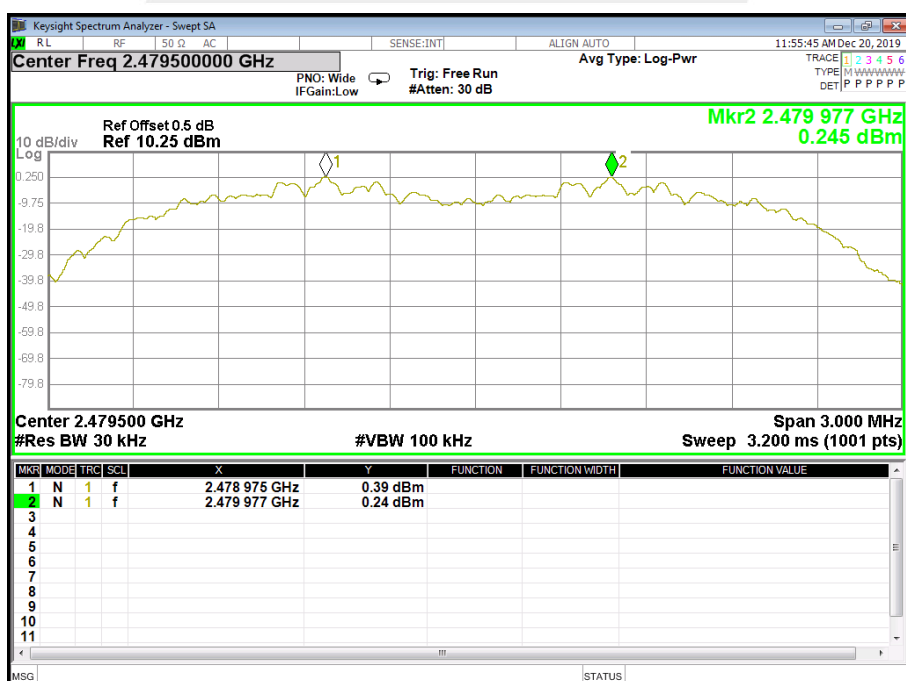



8. BANDWIDTH TEST

8.1 LIMIT


FCC Part15 15.247, Subpart C RSS-247 Issue 2				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1) RSS-247	Bandwidth	(20dB&99% bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

8.3 TEST SETUP

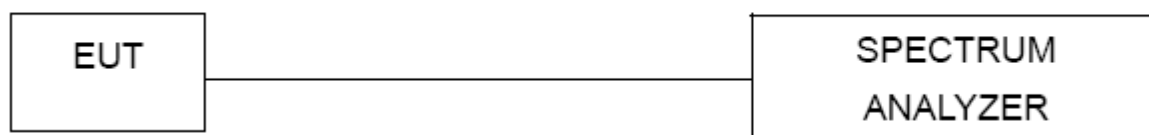

8.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




8.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK(1Mbps) CH00 / CH39 / C78	Test Voltage:	DC 7.4V from battery


Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
2402 MHz	0.9462	0.88995	PASS
2441 MHz	0.9456	0.88811	PASS
2480 MHz	0.9425	0.88793	PASS

CH00 -1Mbps

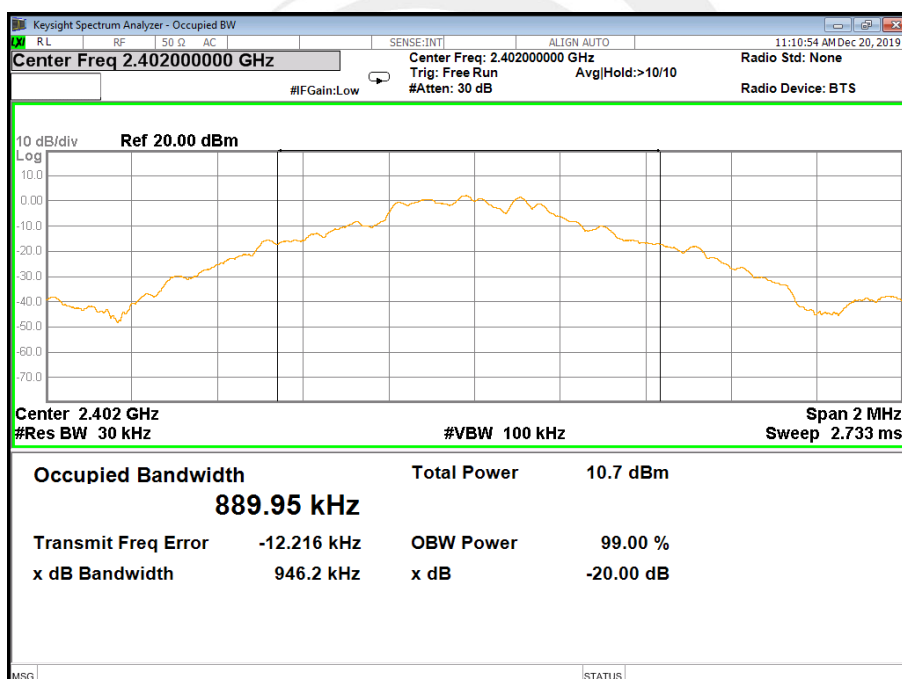




CH39 -1Mbps

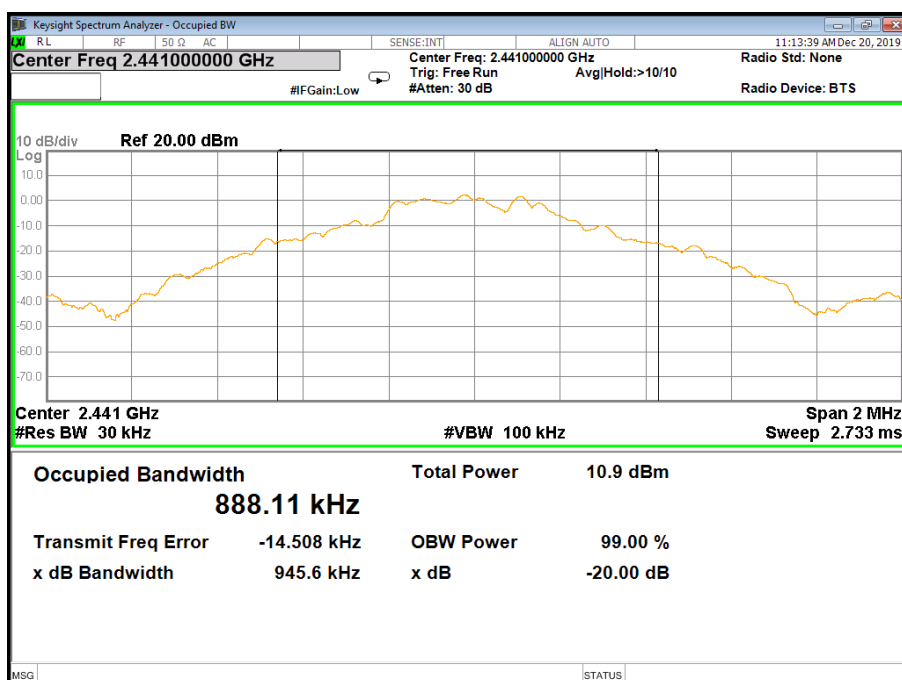

CH78 -1Mbps

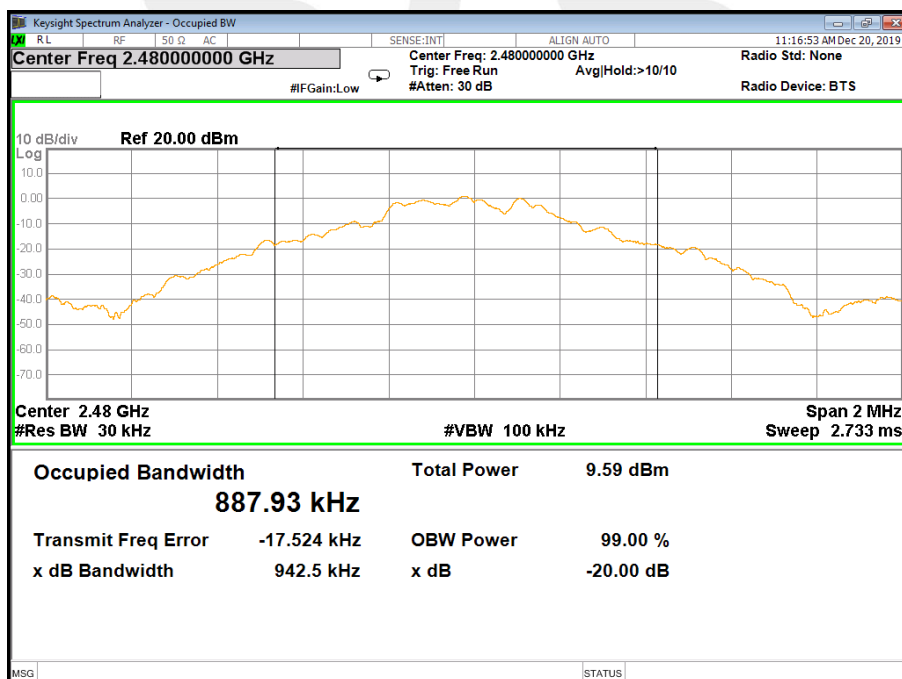




Temperature:	25°C	Relative Humidity:	50%
Test Mode:	$\pi/4$ -DQPSK(2Mbps) CH00 / CH39 / C78	Test Voltage:	DC 7.4V from battery


Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
2402 MHz	1.422	1.337	PASS
2441 MHz	1.427	1.3409	PASS
2480 MHz	1.433	1.3428	PASS

CH00 -2Mbps

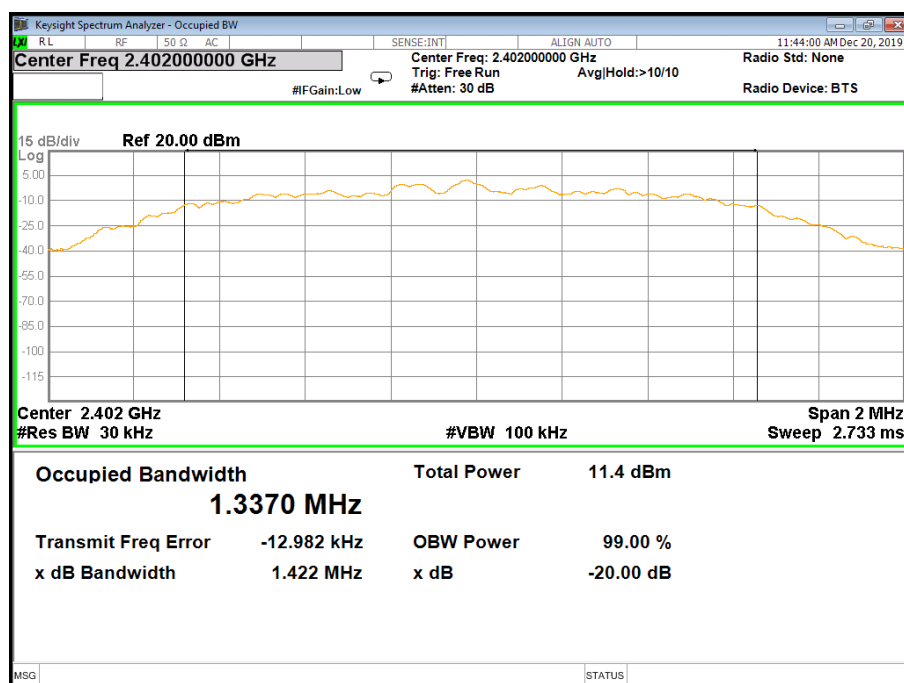




CH39 -2Mbps

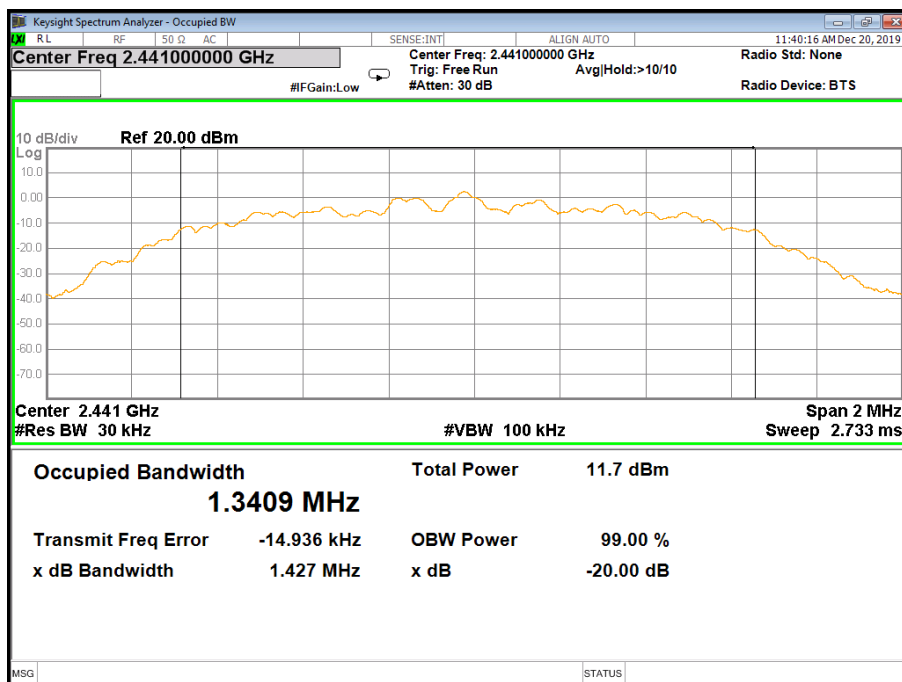

CH78 -2Mbps

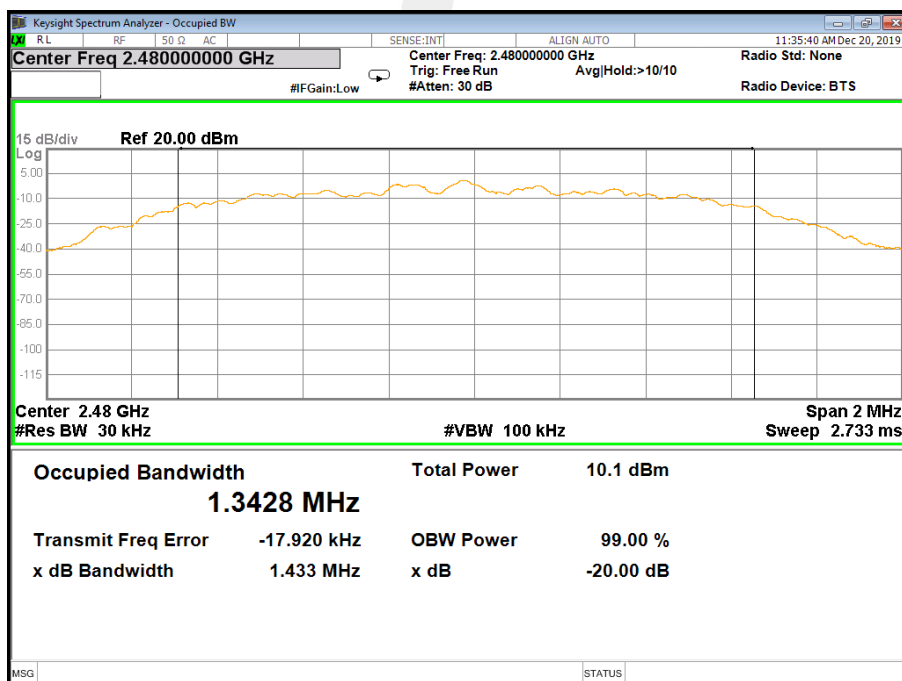




Temperature:	25°C	Relative Humidity:	50%
Test Mode:	8DPSK(3Mbps) CH00 / CH39 / CH78	Test Voltage:	DC 7.4V from battery


Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
2402 MHz	1.443	1.3416	PASS
2441 MHz	1.446	1.342	PASS
2480 MHz	1.442	1.3434	PASS

CH00 -3Mbps

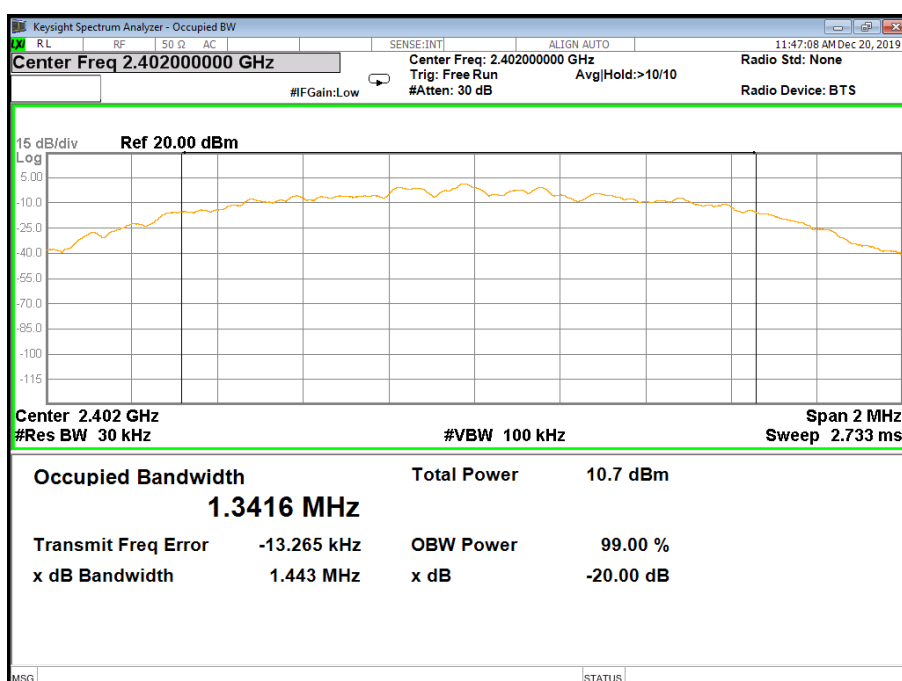




CH39 -3Mbps

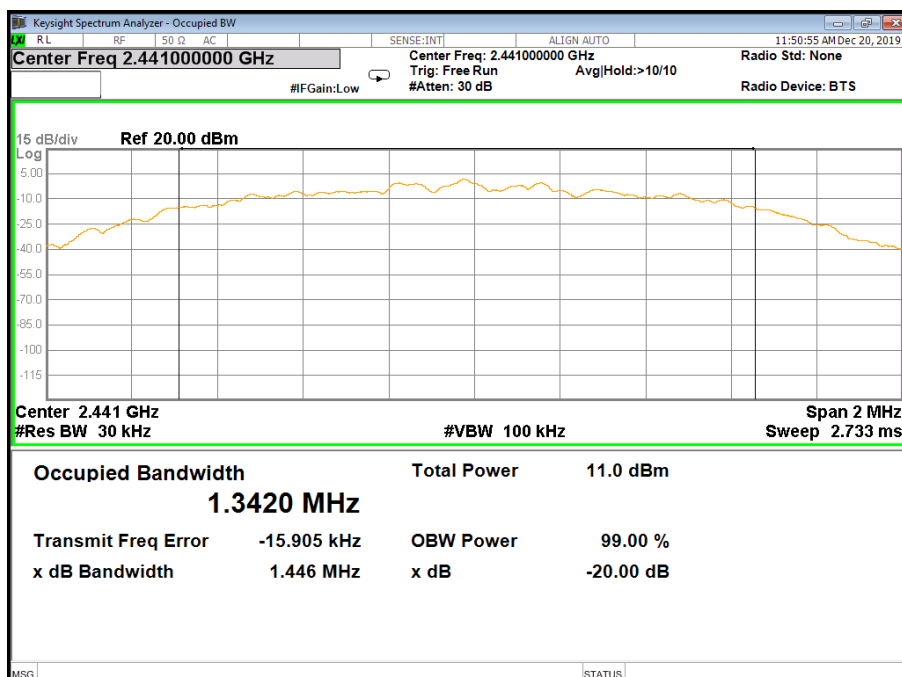

CH78 -3Mbps

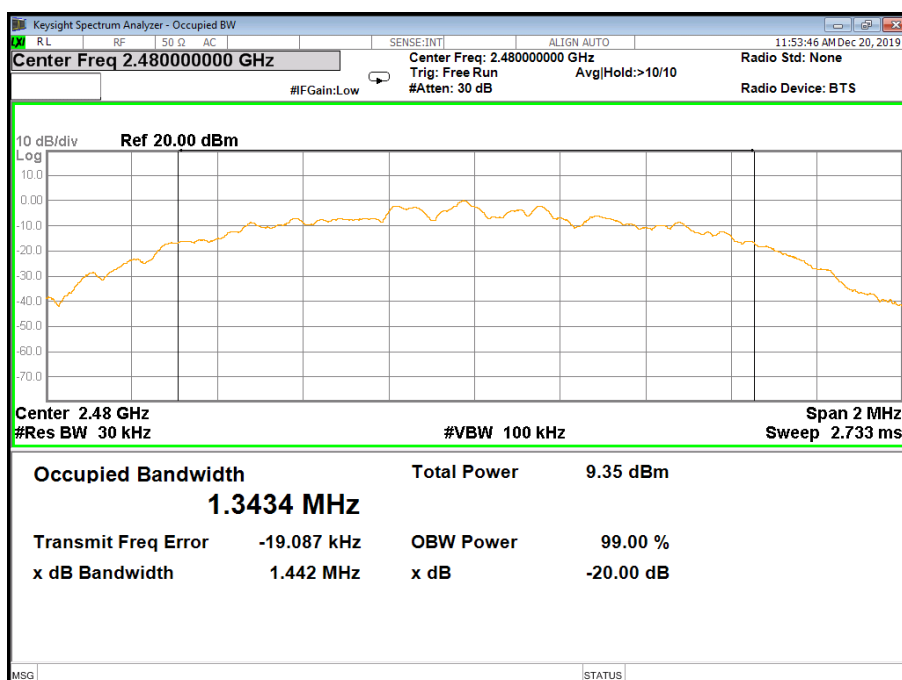



9. OUTPUT POWER TEST

9.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)&(b)(1)	Output Power	1 W or 0.125W	2400-2483.5	PASS
		if channel separation > 2/3 bandwidth provided the systems operate with an output power no greater than 125 mW (20.97 dBm)		
RSS-247	EIRP	4W	2400-2483.5	PASS

9.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Set span $\geq [3 \times \text{RBW}]$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.


h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.



9.3 TEST SETUP



9.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





9.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 7.4V from battery		

Mode	Channel Number	Frequency (MHz)	Peak Power	Average Power	Limit
			(dBm)	(dBm)	(dBm)
GFSK(1M)	0	2402	4.73	3.58	30.00
	39	2441	4.69	3.56	30.00
	78	2480	3.59	2.42	30.00

Note: the channel separation >20dB bandwidth

Mode	Channel Number	Frequency (MHz)	Peak Power	Average Power	Limit
			(dBm)	(dBm)	(dBm)
$\pi/4$ -DQPSK(2M)	0	2402	6.82	3.61	20.97
	39	2441	7.04	3.65	20.97
	78	2480	6.00	2.54	20.97

Note: the channel separation >2/3 20dB bandwidth

Mode	Channel Number	Frequency (MHz)	Peak Power	Average Power	Limit
			(dBm)	(dBm)	(dBm)
8-DPSK(3M)	0	2402	6.31	2.77	20.97
	39	2441	6.44	2.73	20.97
	78	2480	5.33	1.64	20.97

Note: the channel separation >2/3 20dB bandwidth



EIRP Power

Mode	Channel Number	Frequency (MHz)	AV Power	Antenna Gain	EIRP Power	Limit
			(dBm)	(dBi)	(dBm)	(dBm)
GFSK(1M)	0	2402	3.58	0.00	3.58	36.00
	39	2441	3.56	0.00	3.56	36.00
	78	2480	2.42	0.00	2.42	36.00

Mode	Channel Number	Frequency (MHz)	AV Power	Antenna Gain	EIRP Power	Limit
			(dBm)	(dBi)	(dBm)	(dBm)
$\pi/4$ -DQPSK(2M)	0	2402	3.61	0.00	3.61	36.00
	39	2441	3.65	0.00	3.65	36.00
	78	2480	2.54	0.00	2.54	36.00

Mode	Channel Number	Frequency (MHz)	AV Power	Antenna Gain	EIRP Power	Limit
			(dBm)	(dBi)	(dBm)	(dBm)
8-DPSK(3M)	0	2402	2.77	0.00	2.77	36.00
	39	2441	2.73	0.00	2.73	36.00
	78	2480	1.64	0.00	1.64	36.00



10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 and RSS-Gen Issue 5 requirement: For intentional device, according to 15.203 and RSS-Gen Issue 5: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is PIFA Antenna. It comply with the standard requirement.





11. FREQUENCY STABILITY

11.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.02\%$ of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees.

11.2 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

11.3 TEST RESULT

Channel 39 (2441MHz)

Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency(MHz)
8.51	2441.0023
7.4	2441.0017
6.29	2441.0022
Max.Deviation(MHz)	0.0023
Max.Deviation(ppm)	0.94

Rated working voltage: DC 7.4V

Temperature vs. Frequency Stability

Temperature($^{\circ}$ C)	Measurement Frequency(MHz)
-30	2441.0032
-20	2441.0030
-10	2441.0025
0	2441.0032
10	2441.0027
20	2441.0029
30	2441.0023
40	2441.0023
50	2441.0029
Max.Deviation(MHz)	0.0032
Max.Deviation(ppm)	1.31



APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※

