

Testing Tomorrow's Technology

Application

For

Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.247

And

**Part 2, Subpart J, Section 2.902, Verification
Per**

Part 15, Subpart B, for Unintentional Radiators, section 15.101, 15.107 and 15.109

For the

Controlant EHF

Model: CO 13.01

FCC ID: 2AD9R-CO1301

**UST Project: 15-0021
Issue Date: February 13, 2015**

Total Pages in This Report: 65

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



Testing Tomorrow's Technology

I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: Alan Ghasiani

Title: Compliance Engineer – President

Date February 13, 2015



NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

MEASUREMENT TECHNICAL REPORT

COMPANY NAME: Controlant EHF

MODEL: CO 13.01

FCC ID: 2AD9R-CO1301

DATE: February 13, 2015

This report concerns (check one): Original grant Class II change

Equipment type: 903-927 MHz Transmitter Module

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes No

If yes, defer until: N/A
date

agrees to notify the Commission by N/A
date
of the intended date of announcement of the product so that the grant can be
issued on that date.

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

Table of Contents

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1	General Information.....	8
1.1	Purpose of this Report	8
1.2	Characterization of Test Sample.....	8
1.3	Product Description	8
1.4	Configuration of Tested System.....	9
1.5	Test Facility.....	9
2	Tests and Measurements	11
2.1	Test Equipment.....	11
2.2	Modifications to EUT Hardware	12
2.3	Number of Measurements for Intentional Radiators (15.31(m))	12
2.4	Frequency Range of Radiated Measurements (Part 15.33)	13
2.4.1	Intentional Radiator.....	13
2.4.2	Unintentional Radiator	13
2.5	Measurement Detector Function and Bandwidth (CFR 15.35)	13
2.5.1	Detector Function and Associated Bandwidth	13
2.5.2	Corresponding Peak and Average Requirements.....	13
2.6	EUT Antenna Requirements (CFR 15.203)	14
2.7	Restricted Bands of Operation (Part 15.205)	16
2.8	Transmitter Duty Cycle (CFR 15.35 (c)).....	16
2.9	Intentional Radiator, Power Line Conducted Emissions (CFR 15.207).....	18
2.10	Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d))	18
2.11	Band Edge Measurements – (CFR 15.247 (d))	31
2.11.1	GFSK Modulation	32
2.11.2	2-FSK Modulation	36
2.12	Six (6) dB Bandwidth per CFR 15.247(a)(2).....	38
2.13	20 dB Bandwidth (CFR 15.247 (a) (1))	42
2.14	Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))	46
2.15	Power Spectral Density (CFR 15.247(f))	50
2.16	Number of Hopping Frequencies (CFR 15.247 (a)(1)) (CFR 15.247(b)(1)) 54	
2.17	Frequency Separation (CRF 15.247(a)(1))	57
2.18	Average Time of Occupancy (CFR 15.247(f))	59
2.19	Unintentional and Intentional Radiator, Powerline Emissions (CFR 15.107/15.207)	61
2.20	Unintentional and Intentional Radiator, Radiated Emissions (CFR 15.109, 15.209) 62	
2.21	Measurement Uncertainty	65
2.21.1	Conducted Emissions Measurement Uncertainty	65

2.21.2 Radiated Emissions Measurement Uncertainty 65

List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Test Configuration	15
Figure 2.	Transmitter Pulse Width in 1 sec period	16
Figure 3.	Antenna Conducted Emissions Low, Part 1 GFSK modulation.....	22
Figure 4.	Antenna Conducted Emissions Low, Part 2 GFSK modulation.....	23
Figure 5.	Antenna Conducted Emissions Low, Part 3 GFSK modulation.....	24
Figure 6.	Antenna Conducted Emissions Mid, Part 1 GFSK modulation	25
Figure 7.	Antenna Conducted Emissions Mid, Part 2 GFSK modulation	26
Figure 8.	Antenna Conducted Emissions Mid, Part 3 GFSK modulation	27
Figure 9.	Antenna Conducted Emissions High, Part 1 GFSK modulation.....	28
Figure 10.	Antenna Conducted Emissions High, Part 2 GFSK modulation.....	29
Figure 11.	Antenna Conducted Emissions High, Part 3 GFSK modulation.....	30
Figure 12.	Band Edge Compliance, Low Channel Delta – Continuous Transmission GFSK modulation.....	32
Figure 13.	Band Edge Compliance, Low Channel Delta – Channel Hopping GFSK modulation	33
Figure 14.	Band Edge Compliance, High Channel Delta – Continuous Transmission GFSK modulation.....	34
Figure 15.	Band Edge Compliance, High Channel Delta – Channel Hopping GFSK modulation	35
Figure 16.	Band Edge Compliance, Low Channel Delta – Peak 2-FSK modulation	36
Figure 17.	Band Edge Compliance, High Channel Delta – Peak 2-FSK modulation	37
Figure 18.	Six dB Bandwidth - 15.247 - Low Channel.....	39
Figure 19.	Six dB Bandwidth - 15.247 - Mid Channel	40
Figure 20.	Six dB Bandwidth - 15.247 - High Channel.....	41
Figure 21.	Twenty dB Bandwidth – Low Channel	43
Figure 22.	Twenty dB Bandwidth – Mid Channel	44
Figure 23.	Twenty dB Bandwidth – High Channel.....	45
Figure 24.	Peak Antenna Conducted Output Power, Low Channel	47
Figure 25.	Peak Antenna Conducted Output Power, Mid Channel	48
Figure 26.	Peak Antenna Conducted Output Power, High Channel	49
Figure 27.	Peak Power Spectral Density, Low Channel.....	51
Figure 28.	Peak Power Spectral Density, Mid Channel	52
Figure 29.	Peak Power Spectral Density, High Channel.....	53
Figure 30.	Hopping Channels 0 through 32	54
Figure 31.	Hopping Channels 33 through 82	55
Figure 32.	Hopping Channels 83 through 120	56

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

Figure 33. Channel Separation	58
Figure 34. Time On	59
Figure 35. Time between Occupancy	60

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals.....	10
Table 2.	Test Instruments	11
Table 3.	Number of Test Frequencies for Intentional Radiators.....	12
Table 4.	Allowed Antenna(s)	14
Table 5.	Intentional Radiator, Spurious Radiated Emissions (CFR 15.209),.....	19
Table 6.	Average Radiated Fundamental & Harmonic Emissions	20
Table 7.	Peak Radiated Fundamental & Harmonic Emissions.....	21
Table 8.	Six (6) dB Bandwidth	38
Table 9.	20 dB Bandwidth.....	42
Table 10.	Peak Antenna Conducted Output Power per Part 15.247 (b) (3)	46
Table 11.	Power Spectral Density for Low, Mid and High Bands	50
Table 12.	Power Line Conducted Emissions Test Data, Part 15.107, 15.207	61
Table 13.	Unintentional and Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 30 MHz to 1000 MHz	63
Table 14.	Unintentional and Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 1 GHz to 6 GHz.....	64

List of Attachments

Agency Agreement
Application Forms
Letter of Confidentiality
Equipment Label(s)
Block Diagram(s)
Schematic(s)
Test Configuration Photographs
Internal Photographs
External Photographs
Antenna Photographs
Theory of Operation
RF Exposure
User's Manual

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to the FCC Rules and Regulations Part 15, Section 247.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on February 2, 2015 in good operating condition.

1.3 Product Description

The Equipment Under Test (EUT) is the Controlant EHF Model CO 13.01. The CO 13.01 is a wireless logger with a built in ambient temperature sensor. The logger transmits its data to a local transceiver which then collects the data to an online central database. The CO 13.01 is a hybrid system where both Frequency Hopping and Digital Modulation occur and is a wireless transmitter operating in the 900 MHz band. When trying to synch with a gateway/receiver the EUT will send a single packet out every 20 or more seconds. If the EUT receives an ACK, then it goes into frequency hopping mode, i.e. normal operation mode.

Antenna: Dipole (3 dBi Gain)

Modulation: GFSK (FHSS) and 2-FSK (DTS)

Maximum Output Power: 11 dBm (FHSS)

Symbol rate: 4.75 kbps (FHSS) and 475 bps (DTS)

Bit Rate: 38 kbps (FHSS) and 4 kbps (DTS)

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.4:2009, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* (2009) for FCC subpart A Digital equipment Verification requirements and per FCC KDB Publication number 558074 for Digital Transmission Systems Operating Under section 15.247. Also, FCC, KDB Publication No. 558074 and FCC Public Notice DA 00-705 was used as a test procedure guide.

A list of EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs are provided in separate Appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is 186022. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

1.6 Related Submittals

1.6.1 The EUT is subject to the following FCC authorizations:

- a) Certification under section 15.247 as a transmitter.
- b) Verification under 15.101 as a digital device and receiver.

1.6.2 Verification of the Digital apparatus

The Verification requirement shares many common report elements with the Certification report. Therefore, though this report is mostly intended to provide data for the Certification process, the Verification authorization report (part 15.107 and 15.109) for the EUT is included herein.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

Table 1. EUT and Peripherals

PERIPHERAL MANUFACTURER.	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
EUT Controlant EHF	CO 13.01	Engineering Sample	2AD9R-CO1301 (Pending)	None
Antenna See antenna details	--	--	--	--

U= Unshielded

S= Shielded

P= Power

D= Data

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2 Tests and Measurements

2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

Table 2. Test Instruments

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	DATE OF LAST CALIBRATION
SPECTRUM ANALYZER	8566B	HEWLETT-PACKARD	2410A00109	2/03/2014 Extended 90 days
SPECTRUM ANALYZER	E4407B	Agilent	US41442935	1/28/2015
PREAMP	8449B	HEWLETT-PACKARD	3008A00480	12/05/2014
PREAMP	8447D	HEWLETT-PACKARD	1145A00307	11/21/2014
PREAMP	8447D	HEWLETT-PACKARD	1937A02980	12/04/2014
LOOP ANTENNA	SAS-200/562	A. H. Systems	142	9/12/2013 2 yr
BICONICAL ANTENNA	3110B	EMCO	9306-1708	11/24/2014 2 yr
BICONICAL ANTENNA	3110B	EMCO	9307-1431	2/11/2014 2 yr
LOG PERIODIC ANTENNA	3146	EMCO	9110-3236	11/19/2014 2 yr
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	7/11/2014 2 yr
HORN ANTENNA	SAS-571	A. H. Systems	605	7/23/2013 2 yr
HORN ANTENNA	3115	EMCO	9107-3723	7/8/2014 2 yr

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.2 Modifications to EUT Hardware

No physical modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 below.

Table 3. Number of Test Frequencies for Intentional Radiators

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates at 903 MHz to 927 MHz, 3 test frequencies were used.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.4 Frequency Range of Radiated Measurements (Part 15.33)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to 5 times the highest internal clock frequency.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the following:

2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.5.3 Pulsed Transmitter Averaging

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may be expressed logarithmically in dB.

NOTE: If the transmitter was programmed to transmit at >98% duty cycle, then, wherever applicable (where the detection mode was AVG) the duty cycle factor calculated will be applied.

2.6 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

Table 4. Allowed Antenna(s)

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB _i	TYPE OF CONNECTOR
Antenna 1	Asian Creation Communication CO., LTD	External Dipole	Q868-X AP	3	SMA reverse sex
Antenna 2	Asian Creation Communication CO., LTD	External Dipole	Q8019-900LW	2.5	SMA reverse sex

Note: Because both antennas can be operated in the 868/900 MHz band, the antenna with the highest gain (Q868-X- AP) was used for all testing.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

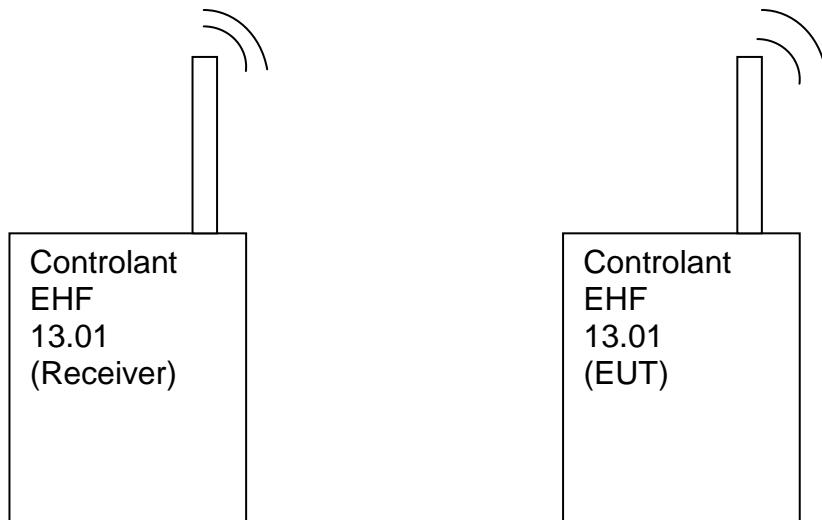


Figure 1. Test Configuration

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.7 Restricted Bands of Operation (Part 15.205)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other Spurious are examined for this requirement see paragraph 2.10 of the test report.

2.8 Transmitter Duty Cycle (CFR 15.35 (c))

Measurements of the duty cycle and transmission duration were performed using the zero span method per KDB 558074. The spectrum analyzer was set to the center frequency of the transmission. The RBW and VBW was set to the largest available value. The method was used because the RBW and VBW were $> 50/T$.

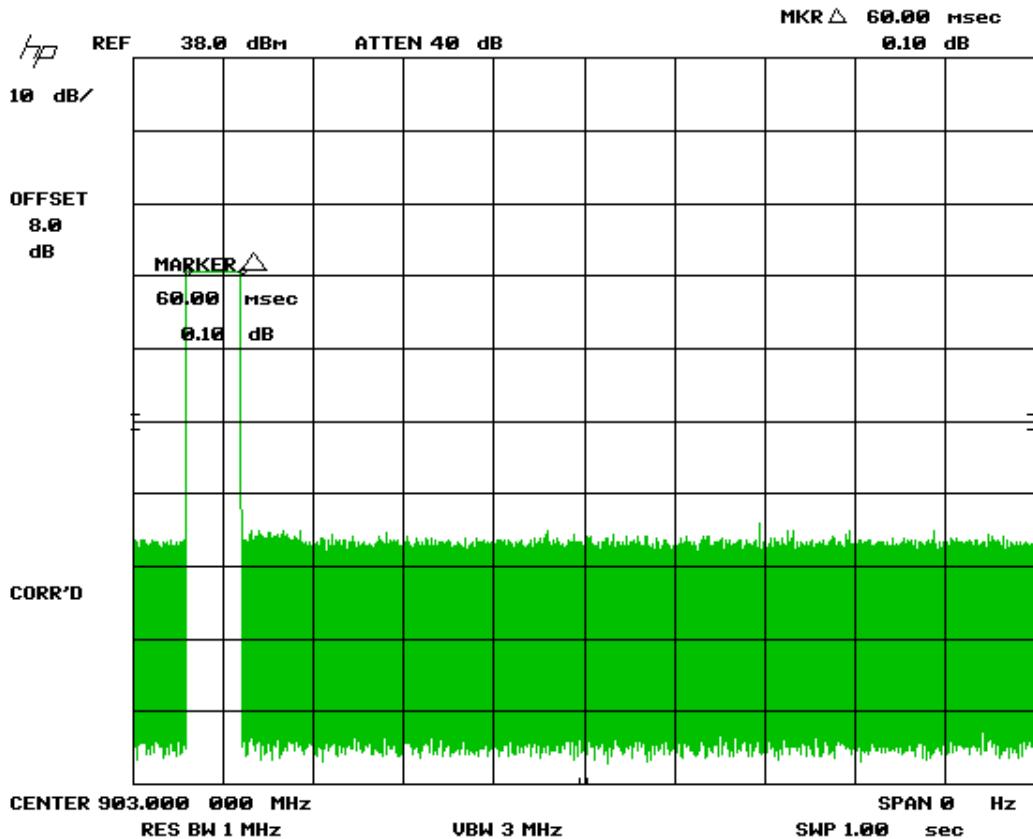


Figure 2. Transmitter Pulse Width in 1 Sec Period

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

Total Time On from Figure 2 = 60.0 ms (Transmitter Pulse Width)

$$(0.06 \text{ s Total Time On}) / (0.100 \text{ s Time period}) = 0.60 \text{ Numeric Duty Cycle}$$
$$\text{Duty Cycle} = 20 \log (0.60) = \boxed{-4.4 \text{ dB}}$$

Duty Cycle reported in this test report is -4.4 dB.

Manufacturers note regarding EUT standard operation:

Synching with gateway/receiver: Once every period (>20 sec) it transmits a single package and the transmit duration is less than 40 msec. The package includes at what channel it will start listening on. After transmitting package it goes into Rx mode and waits for ack.

If no answer it will wait for more than 20 sec to transmit another package on the same channel. The waiting period has some random effect, i.e.

$$T_{\text{waiting}} = 20 + \text{random} (>0) \text{ [seconds]}$$

If the logger gets an ACK from a gateway it goes into frequency hopping mode and starts communicating in a periodic manner. The ACK includes clock information, when the logger can transmit again, and at what channel the logger can transmit. The gateway uses a pseudo random ordered channel list.

Periodic transmission: Logger wakes up at a time decided by the gateway and transmits a package on the channel indicated by the gateway and waits for an ACK. If ACK is received the periodic transmissions continues.

If no ACK is received the logger can try to resend the package or retry synching with a gateway.

Burst transmission (log dump): Logger can log measurements into memory and send up to 40 packages in a burst mode. When logger sends burst transmission it uses the appropriate channel in the pseudo random sequence controlled by the gateway.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207)

The EUT is powered by a 3.6 VDC Lithium battery. Since the EUT is battery powered, this test was not applicable.

2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d))

Radiated Spurious measurements: The EUT was placed into a continuous transmit mode of operation (>98% duty cycle) and tested per ANSI C63.10:2013. A preliminary scan was performed on the EUT to find signal frequencies that were caused by the transmitter part of the device. A preliminary scan was performed on the EUT to find the worse case results the EUT was tested in X, Y, and Z axes or in the orientation of normal operation if the device is designed to operate in a fixed position. The EUT was placed in the FHSS modulation because the output power of the FHSS modulation was larger than the DTS modulation output power and the normal mode of operation is when the EUT is frequency hopping.

Radiated measurements were then conducted between the frequency range of 9 kHz (or lowest frequency used/generated by the device) up to the tenth harmonic of the device (not greater than 40 GHz). In the band below 30 MHz, a resolution bandwidth (RBW) of 9 kHz was used; emissions below 1 GHz were tested with a RBW of 100/120 kHz and emissions above 1 GHz were tested with a RBW of 1 MHz. All video bandwidth settings were at least three times the RBW value.

The EUT was investigated per CFR 15.209, General requirements for unwanted spurious emissions. The conducted spurious method as described below was used to investigate all other emissions emanating from the antenna port.

Conducted Spurious measurements: The EUT was put into a continuous-transmit mode of operation (>98% duty cycle) and tested per FCC Public Notice DA 00-705 for conducted out of band emissions emanating from the antenna port over the frequency range of 30 MHz to 25 GHz. A conducted scan was performed on the EUT to identify and record the spurious signals that were related to the transmitter. The EUT was placed in the FHSS modulation because the output power of the FHSS modulation was larger than the DTS modulation output power and the normal mode of operation is when the EUT is frequency hopping.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

**Table 5. Intentional Radiator, Spurious Radiated Emissions (CFR 15.209),
9 kHz to 30 MHz**


9 kHz to 30 MHz							
Test: Radiated Emissions				Client: Controlant EHF			
Project: 15-0021				Model: CO 13.01			
Frequency (MHz)	Test Data (dB _{UV})	AF+CA-AMP (dB/m)	Results (dB _{UV} /m)	QP Limits (dB _{UV} /m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or QP
All emissions seen were 20 dB or more from the limit.							

Tested from 9 kHz to 30 MHz

SAMPLE CALCULATION: N/A

Test Date: February 11, 2015

Tested By

Signature:  Name: Carrie Fincannon

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AD9R-CO1301
 15-0021
 February 13, 2015
 Controlant EHF
 CO 13.01

Table 6. Average Radiated Fundamental & Harmonic Emissions

Test: FCC Part 15, Para 15.209, 15.247(d)				Client: Controlant EHF			
Project: 15-0021				Model: CO 13.01			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector Mode
Low Channel – AVERAGE							
903	78.74	24.26	103.00		3 m/VERT		AVG
1806	64.13	-7.57	48.06	83.00	1 m/VERT	34.9	AVG
2709	53.93	-2.66	42.77	54.00	1 m/VERT	11.2	AVG
3612	42.00	-1.13	32.37	54.00	1 m/VERT	21.6	AVG
Mid Channel – AVERAGE							
915	77.44	24.26	101.70		3 m/VERT		AVG
1830	64.62	-7.33	48.79	81.70	1 m/VERT	32.9	AVG
2745	51.72	-2.66	40.56	54.0	1 m/VERT	13.4	AVG
3660	42.27	-1.13	32.64	54.0	1 m/VERT	21.4	AVG
High Channel – AVERAGE							
927	80.54	24.19	104.73		3 m./VERT		AVG
1854	68.65	-7.27	52.88	84.7	1 m/VERT	31.9	AVG
2781	52.12	-2.38	41.24	54.0	1 m/VERT	12.8	AVG

- 1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation for peak measurements of CFR 15.35.
- 2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
- 3. (~) Measurements taken at 1 meter were extrapolated to 3 meters using a factor of (-9.5 dB).
- 4. The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 903 MHz:

Magnitude of Measured Frequency	78.74 dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	24.26 dB/m
Corrected Result	103.00 dBuV/m

Test Date: February 4, 2015

Tested By

Signature: 

Name: Carrie Fincannon

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AD9R-CO1301
 15-0021
 February 13, 2015
 Controlant EHF
 CO 13.01

Table 7. Peak Radiated Fundamental & Harmonic Emissions

Test: FCC Part 15, Para 15.209, 15.247(d)				Client: Controlant EHF			
Project: 15-0021				Model: CO 13.01			
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector Mode
Low Channel – AVERAGE							
903	79.40	24.26	103.66		3m /VERT		PK
1806	66.32	-7.57	50.25	83.7	1 m /VERT	33.4	PK
2709	58.86	-2.66	47.70	74.0	1 m/VERT	26.3	PK
3612	52.99	-1.13	43.36	74.0	1 m /VERT	30.6	PK
Mid Channel – AVERAGE							
915	78.29	24.26	102.55		3 m/VERT		PK
1830	66.51	-7.33	50.68	82.6	1 m/VERT	31.9	PK
2745	57.16	-2.66	46.00	74.0	1 m/VERT	28.0	PK
3660	52.79	-1.13	43.16	74.0	1 m/VERT	30.8	PK
High Channel - AVERAGE							
927	81.32	24.19	105.51		3 m /VERT		PK
1854	70.53	-7.27	54.76	85.5	1 m/VERT	30.8	PK
2781	57.94	-2.38	47.06	74.0	1 m/VERT	26.9	PK

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation for **peak** measurements of CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. (~)Measurements taken at 1 meter were extrapolated to 3 meters using a factor of (-9.5 dB).
4. The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 903 MHz:

Magnitude of Measured Frequency	79.40	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	24.26	dB/m
Corrected Result	103.66	dBuV/m

Test Date: February 4, 2015

Tested By

Signature: 

Name: Carrie Fincannon

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

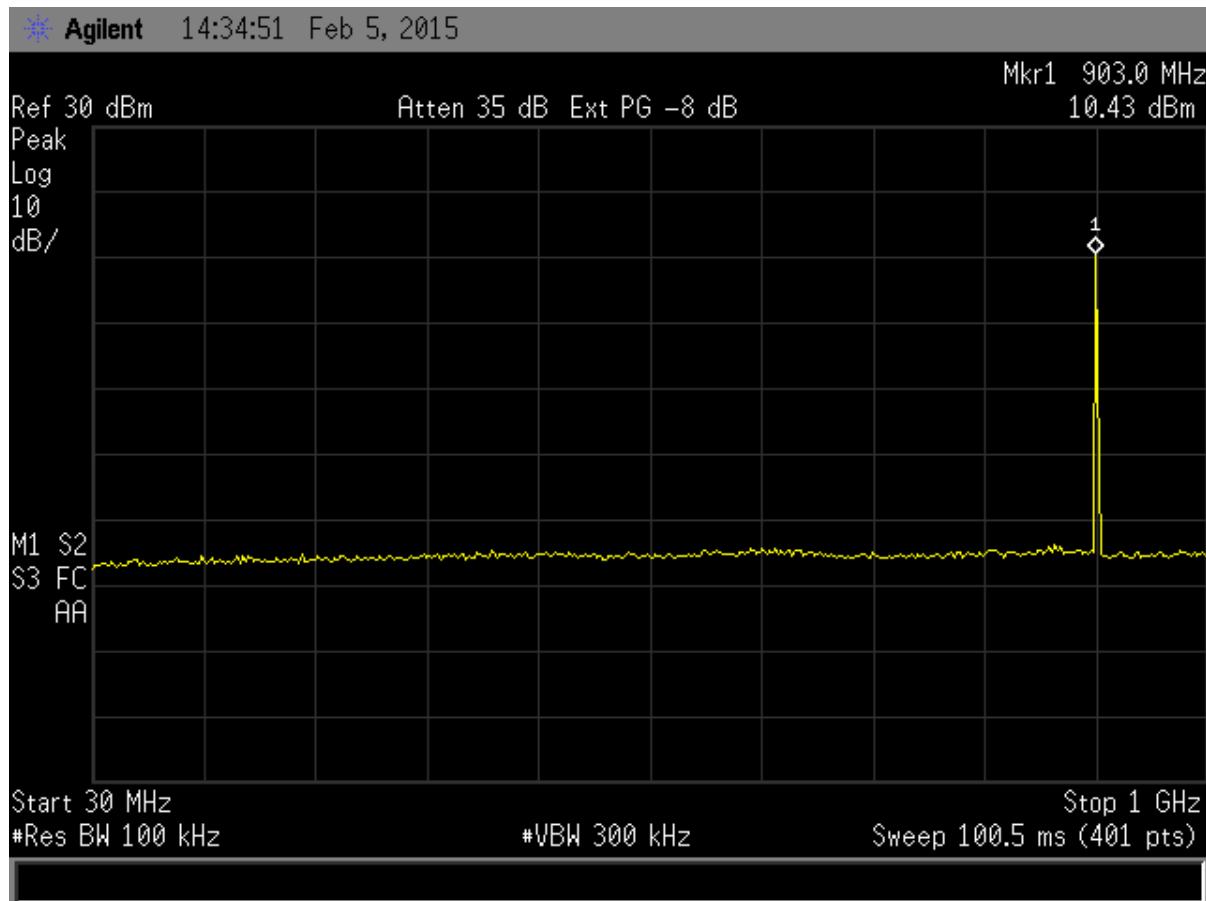


Figure 3. Antenna Conducted Emissions Low, Part 1 GFSK Modulation

Note: Large emission seen is the fundamental emission.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

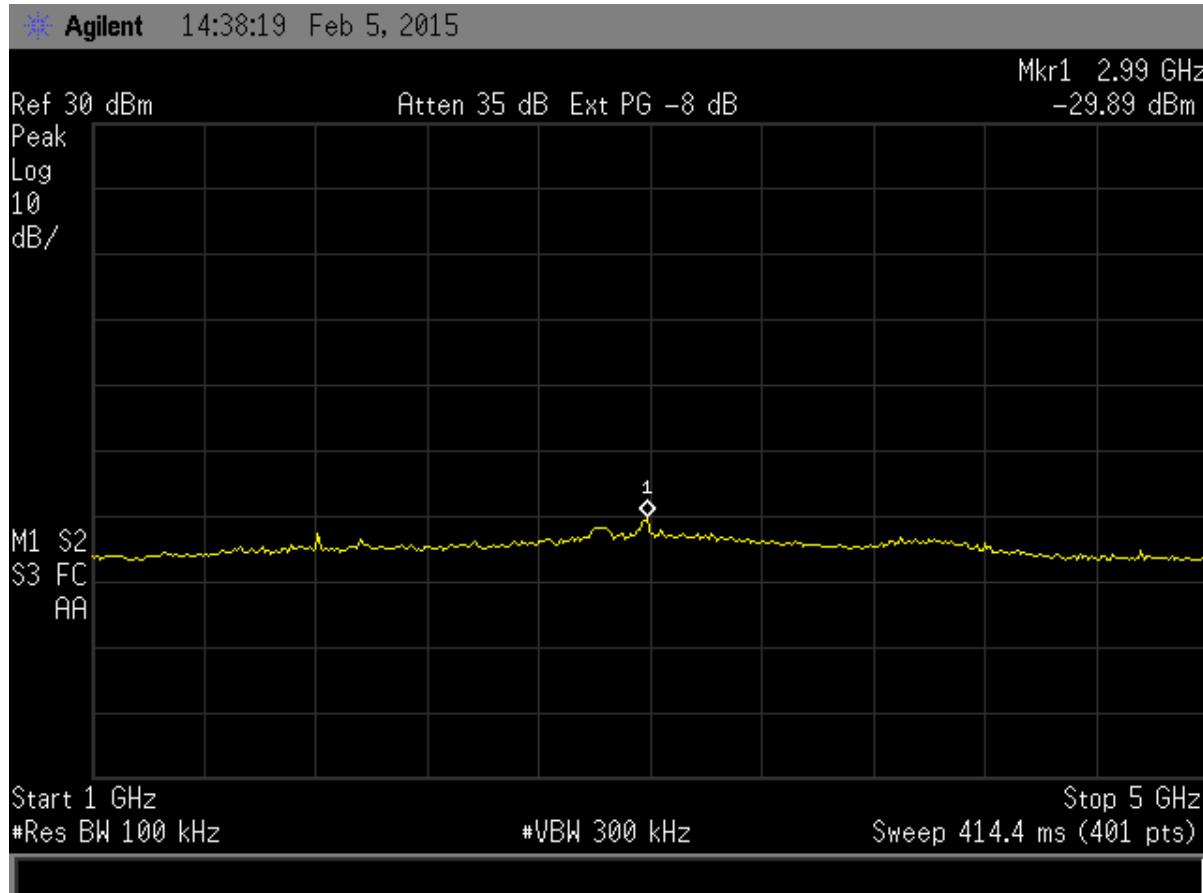


Figure 4. Antenna Conducted Emissions Low, Part 2 GFSK modulation

Fundamental (from Figure 3)	10.43	dBm
<u>Peak Spurious (from figure 4)</u>	(-29.89)	dBm
Difference	40.32	dBm
Difference from Fundamental	40.32	dBm
<u>Limit</u>	20.00	dBm
Margin	20.32	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

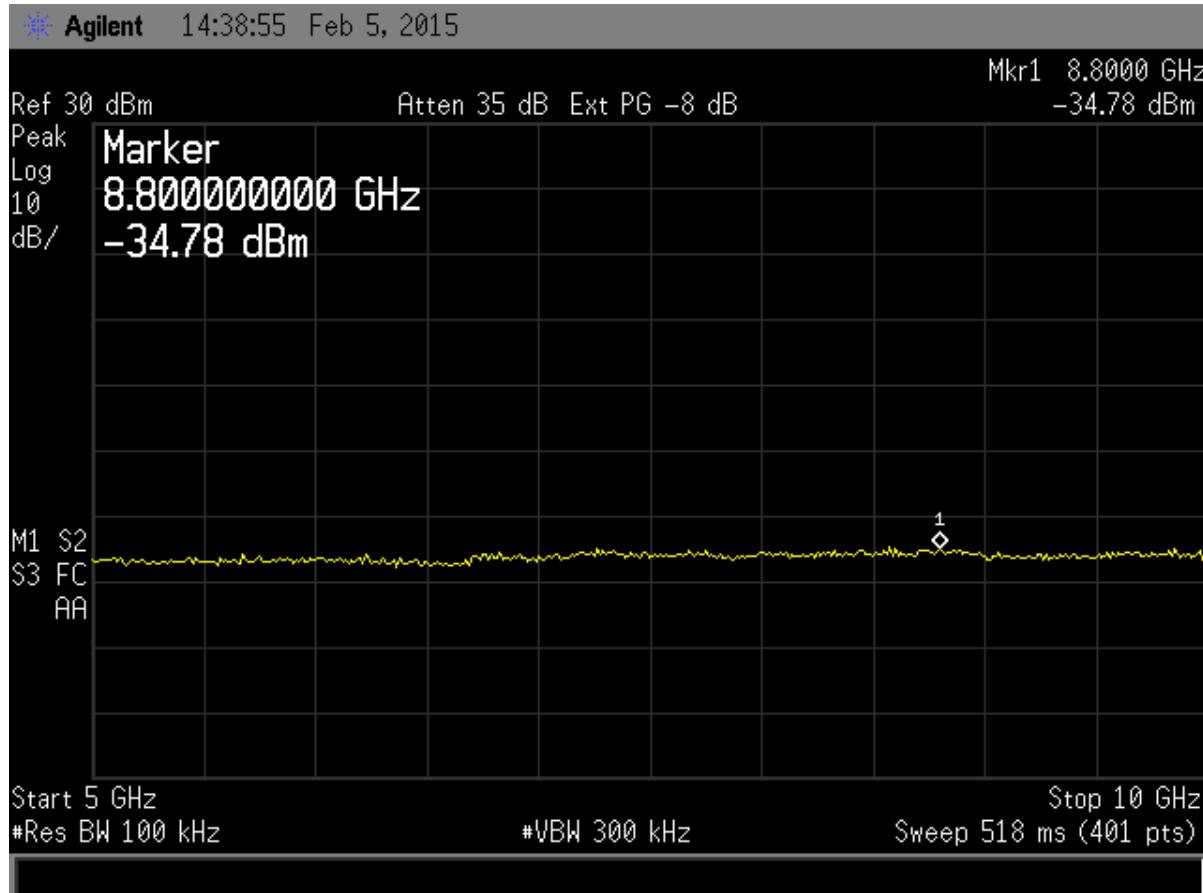


Figure 5. Antenna Conducted Emissions Low, Part 3 GFSK Modulation

Fundamental (from Figure 3)	10.43	dBm
Peak Spurious (from figure 5)	(-34.79)	dBm
Difference	45.22	dBm
Difference from Fundamental	45.22	dBm
Limit	20.00	dBm
Margin	25.22	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

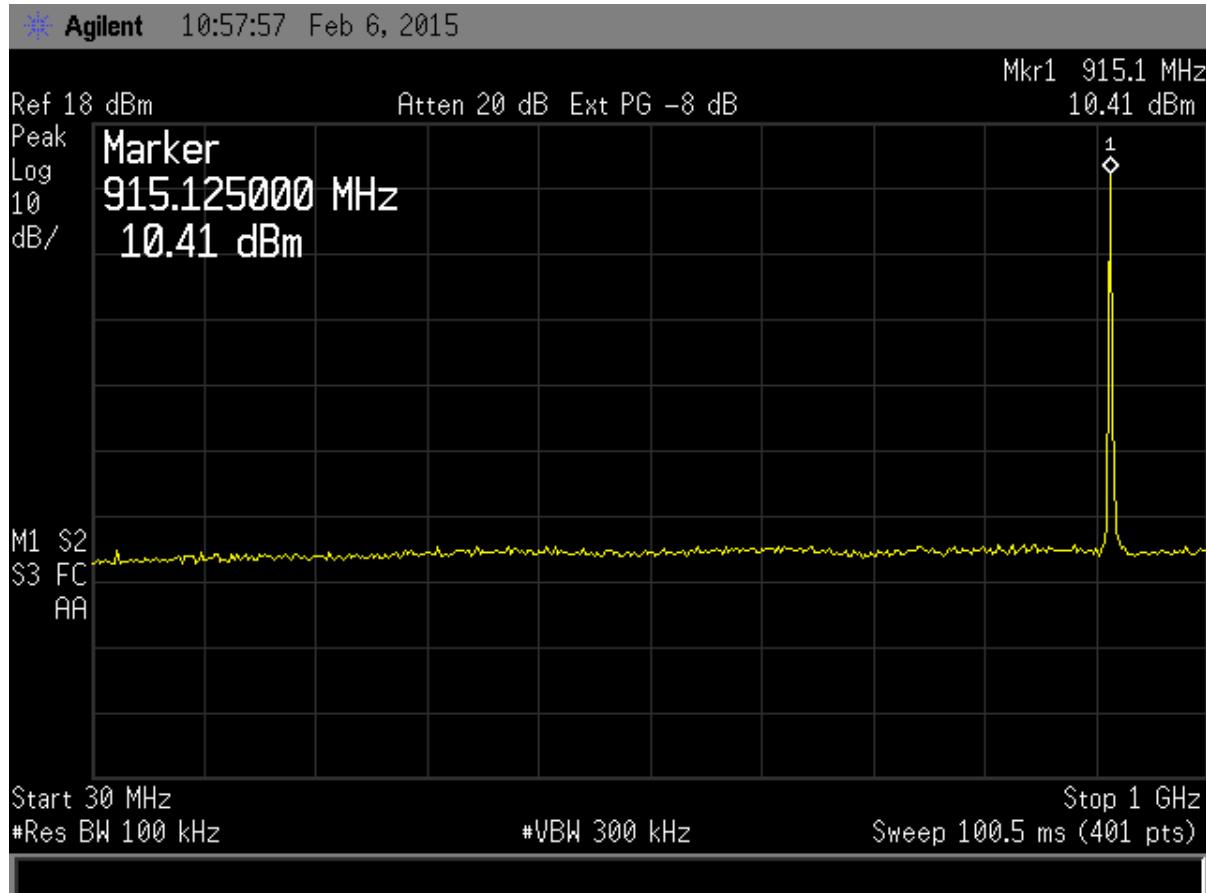


Figure 6. Antenna Conducted Emissions Mid, Part 1 GFSK Modulation

Note: Large emission seen is the fundamental emission.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

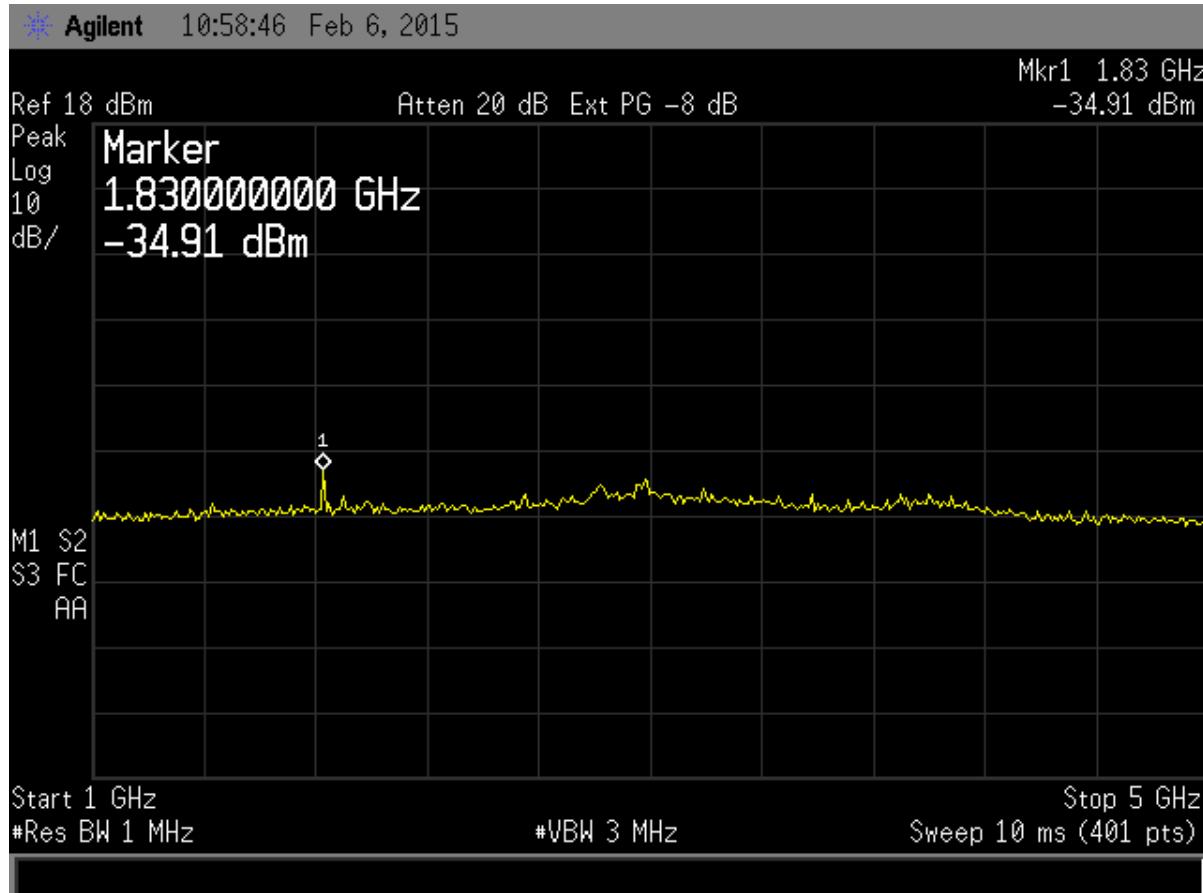


Figure 7. Antenna Conducted Emissions Mid, Part 2 GFSK modulation

Fundamental (from Figure 6)	10.41	dBm
Peak Spurious (from Figure 7)	(-34.91)	dBm
Difference	45.32	dBm
Difference from Fundamental	45.32	dBm
Limit	20.00	dBm
Margin	25.32	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

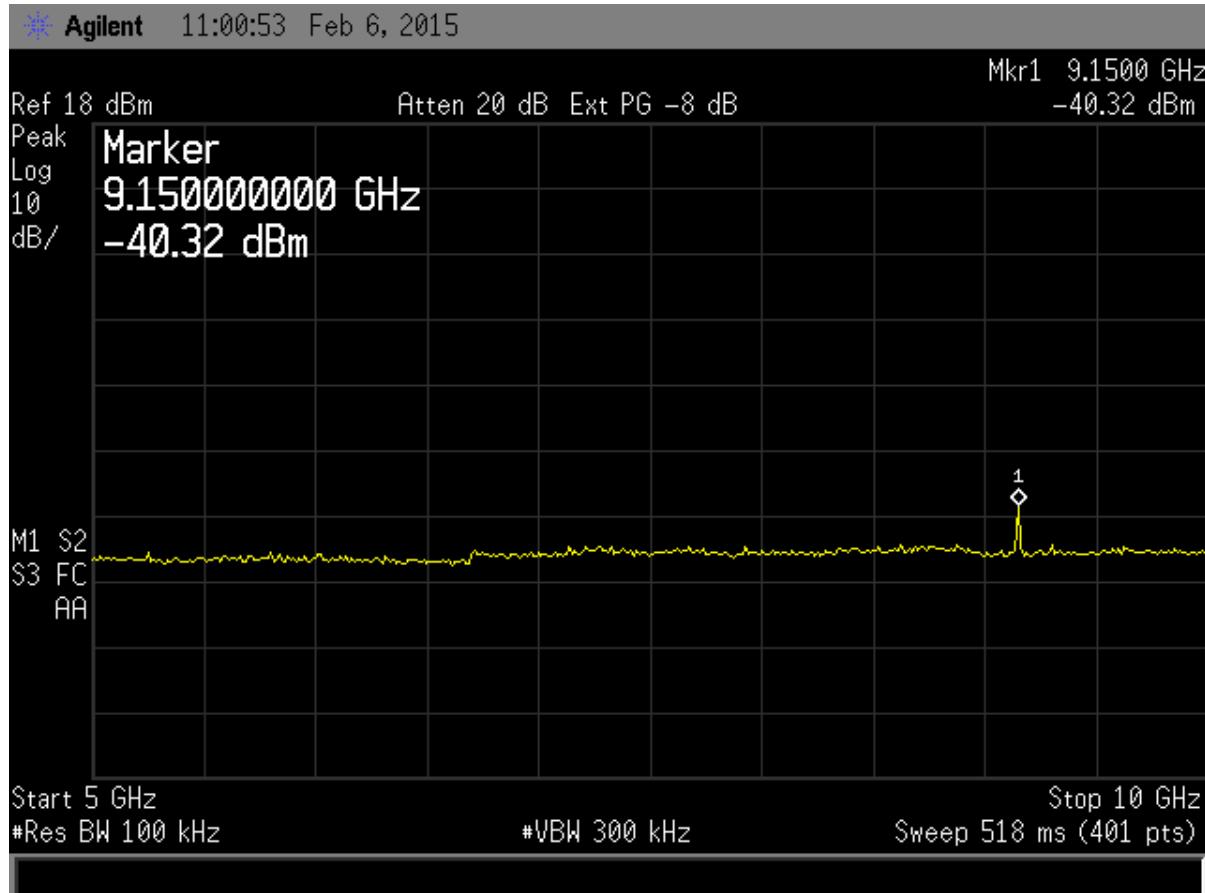


Figure 8. Antenna Conducted Emissions Mid, Part 3 GFSK Modulation

Fundamental (from Figure 6)	10.41	dBm
Peak Spurious (from Figure 8)	(-40.32)	dBm
Difference	50.73	dBm
Difference from Fundamental	50.73	dBm
Limit	20.00	dBm
Margin	30.73	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

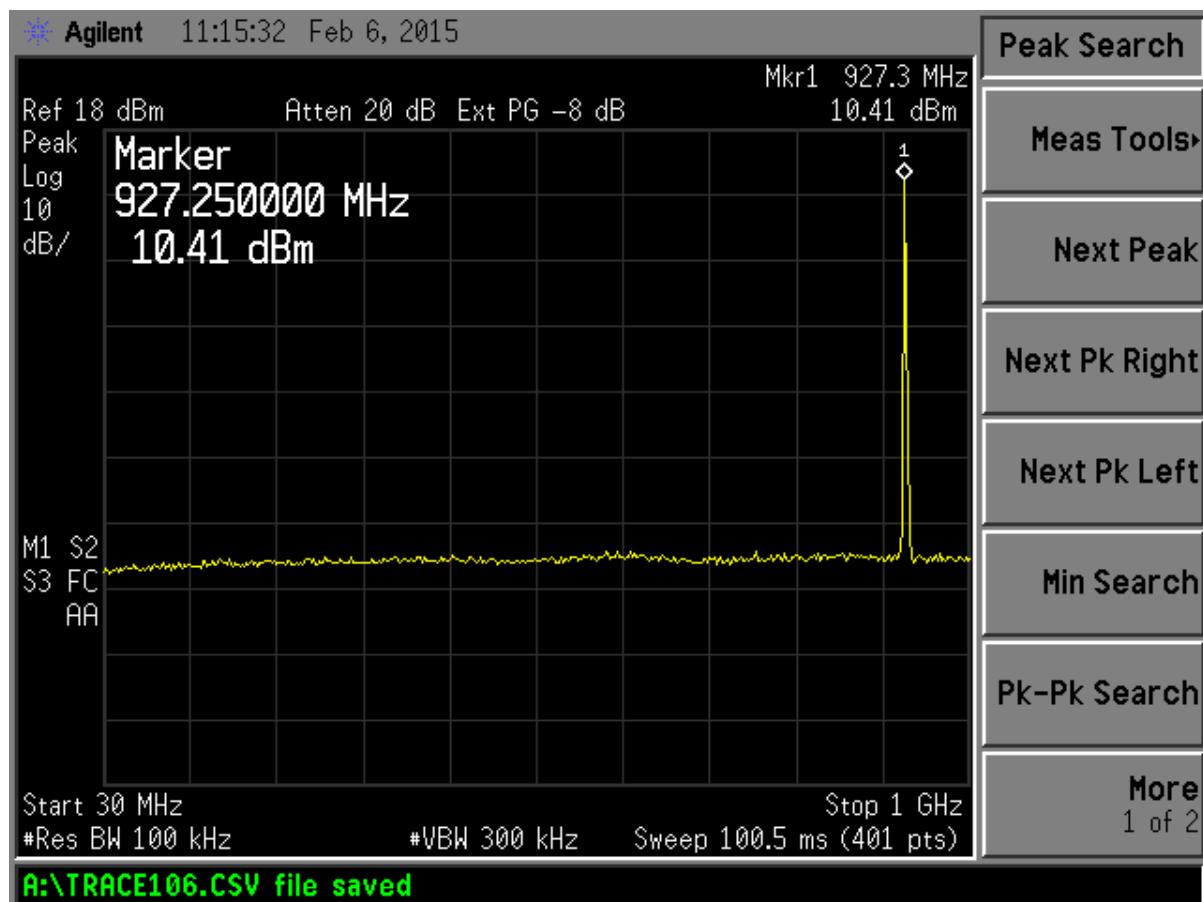


Figure 9. Antenna Conducted Emissions High, Part 1 GFSK modulation

Note: Large emission seen is the fundamental emission.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

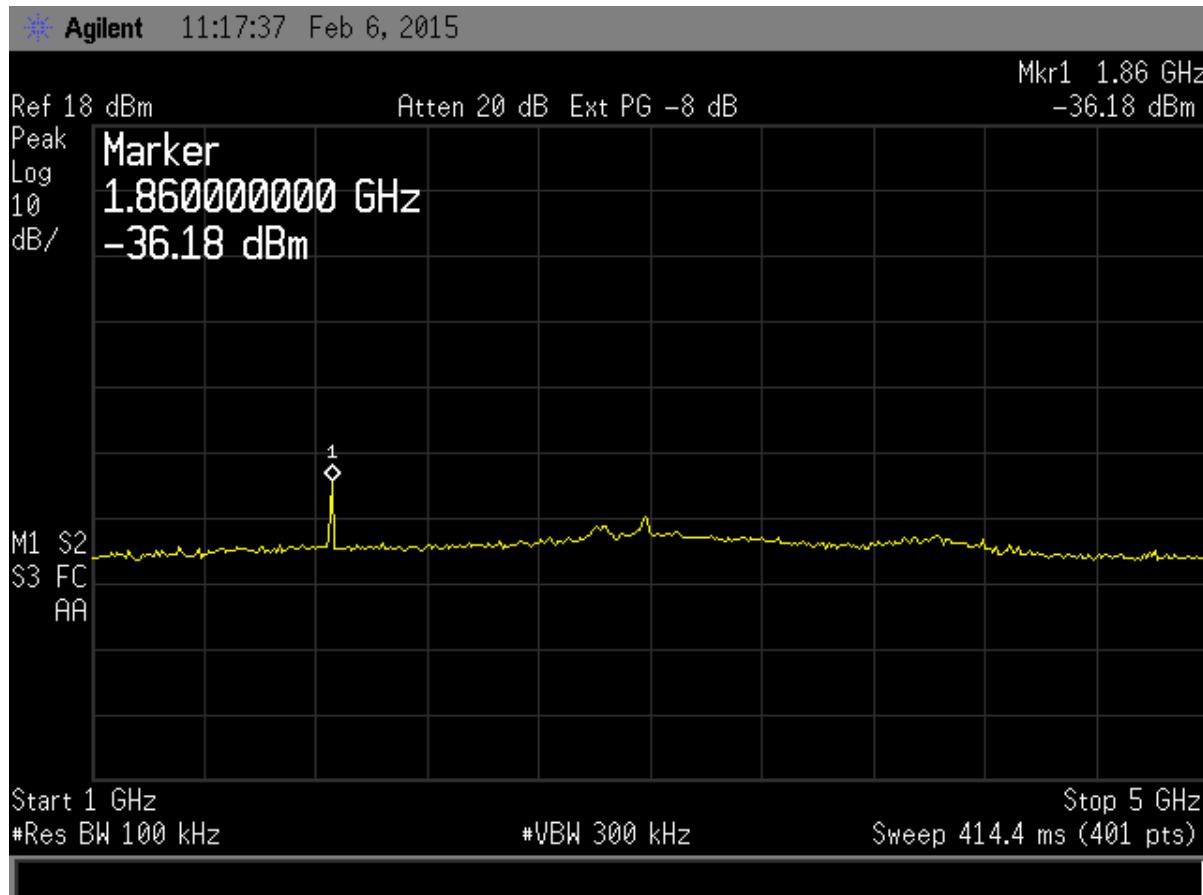


Figure 10. Antenna Conducted Emissions High, Part 2 GFSK modulation

Fundamental (from Figure 9)	10.41	dBm
<u>Peak Spurious (from Figure 10)</u>	(-36.18)	dBm
Difference	46.59	dBm
Difference from Fundamental	46.59	dBm
<u>Limit</u>	20.00	dBm
Margin	26.59	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

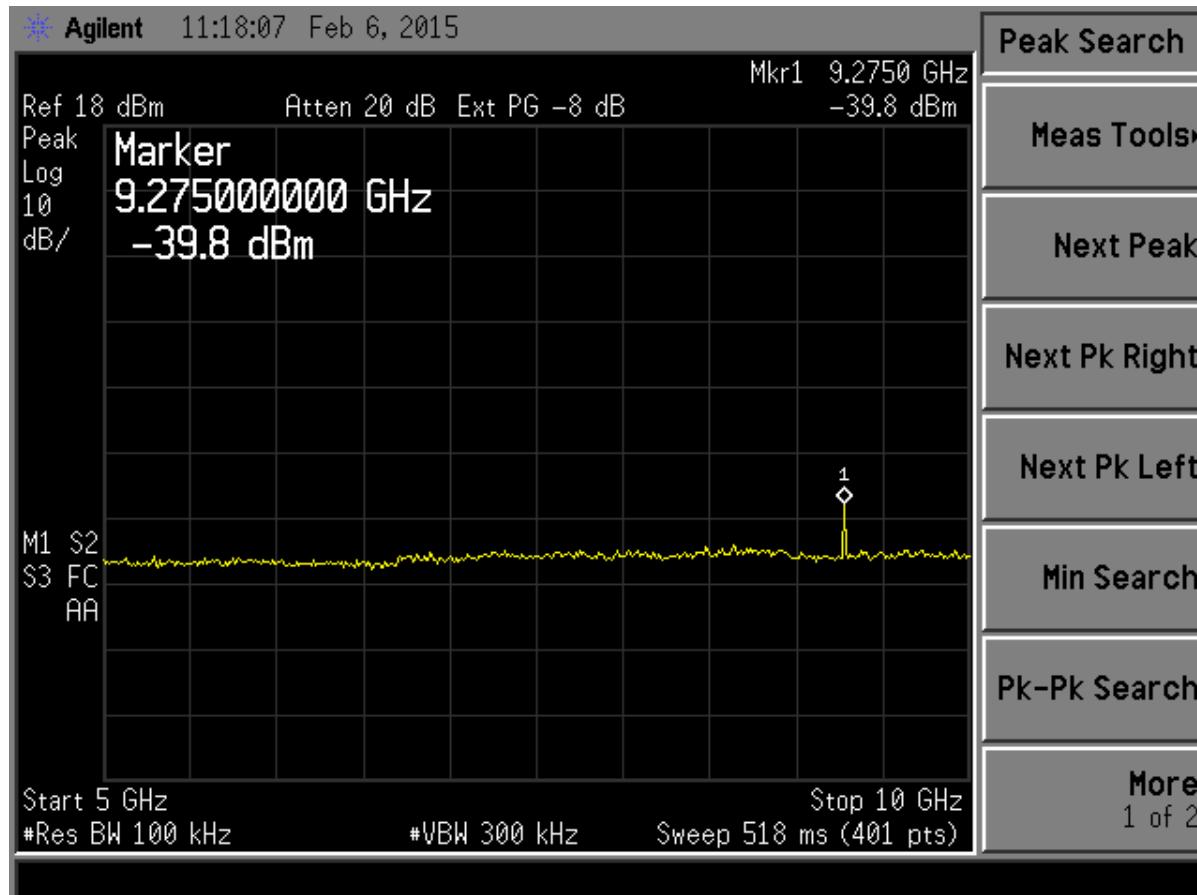


Figure 11. Antenna Conducted Emissions High, Part 3 GFSK modulation

Fundamental (from Figure 9)	10.41	dBm
<u>Peak Spurious (from Figure 11)</u>	(-39.80)	dBm
Difference	50.21	dBm
Difference from Fundamental	50.21	dBm
<u>Limit</u>	20.00	dBm
Margin	30.21	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.11 Band Edge Measurements – (CFR 15.247 (d))

Band Edge measurements are made, following the guidelines in FCC KDB Publication No. 558074 for the DTS modulation and FCC Publication DA 00-705 for the FHSS modulation, with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Antenna port conducted measurements are performed to demonstrate compliance with the requirement of 15.247(d) that all emissions outside of the band edges be attenuated by at least 20 dB when compared to its highest in-band value (contained in a 100 kHz band).

To capture the band edge, set the Spectrum Analyzer frequency span large enough (usually around 2 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. Conducted measurements are performed with $RBW = 100\text{kHz}$ for measurements of the DTS modulation and with $RBW \geq 1\%$ of the span for measurements of the FHSS modulation. In all cases, the VBW is set $\geq RBW$. See figure and calculations below for more detail.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.11.1 GFSK Modulation

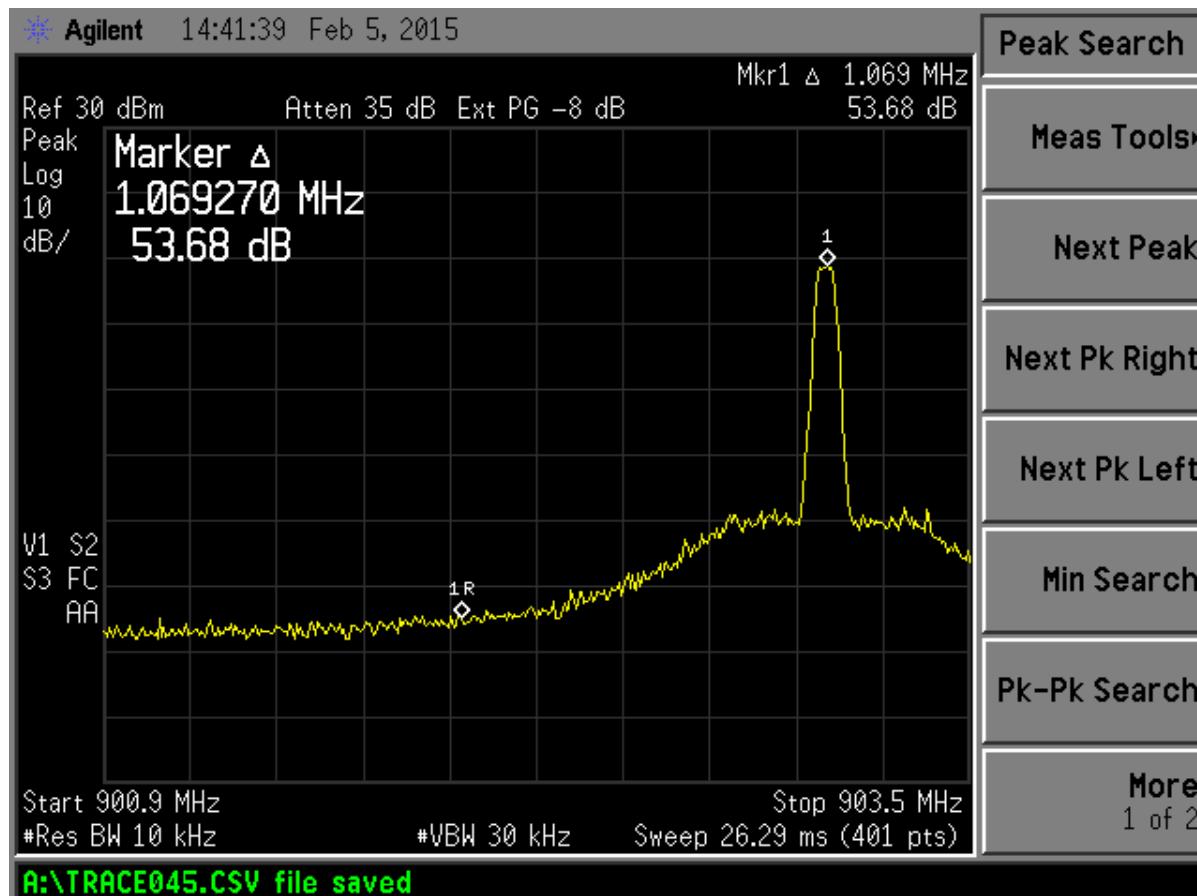


Figure 12. Band Edge Compliance, Low Channel Delta – Continuous Transmission GFSK modulation

Measured Delta (from Figure 14)	53.68	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	33.68	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

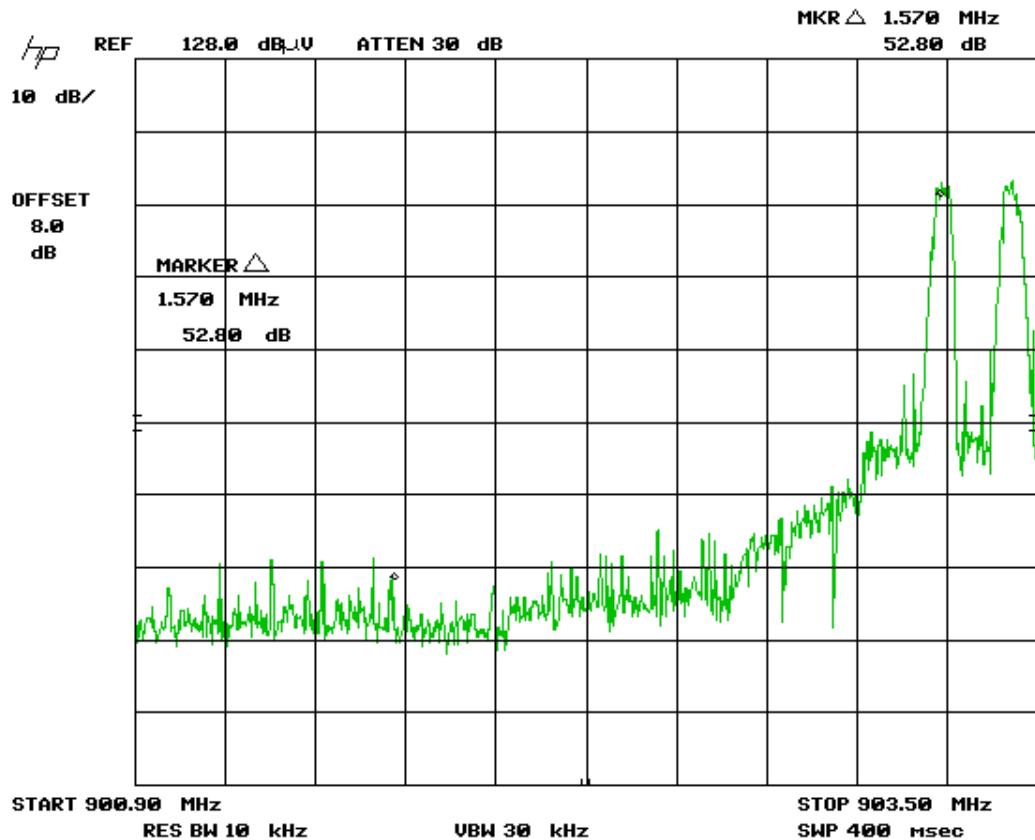


Figure 13. Band Edge Compliance, Low Channel Delta – Channel Hopping GFSK modulation

Measured Delta (from Figure 15)	52.80	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	32.80	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

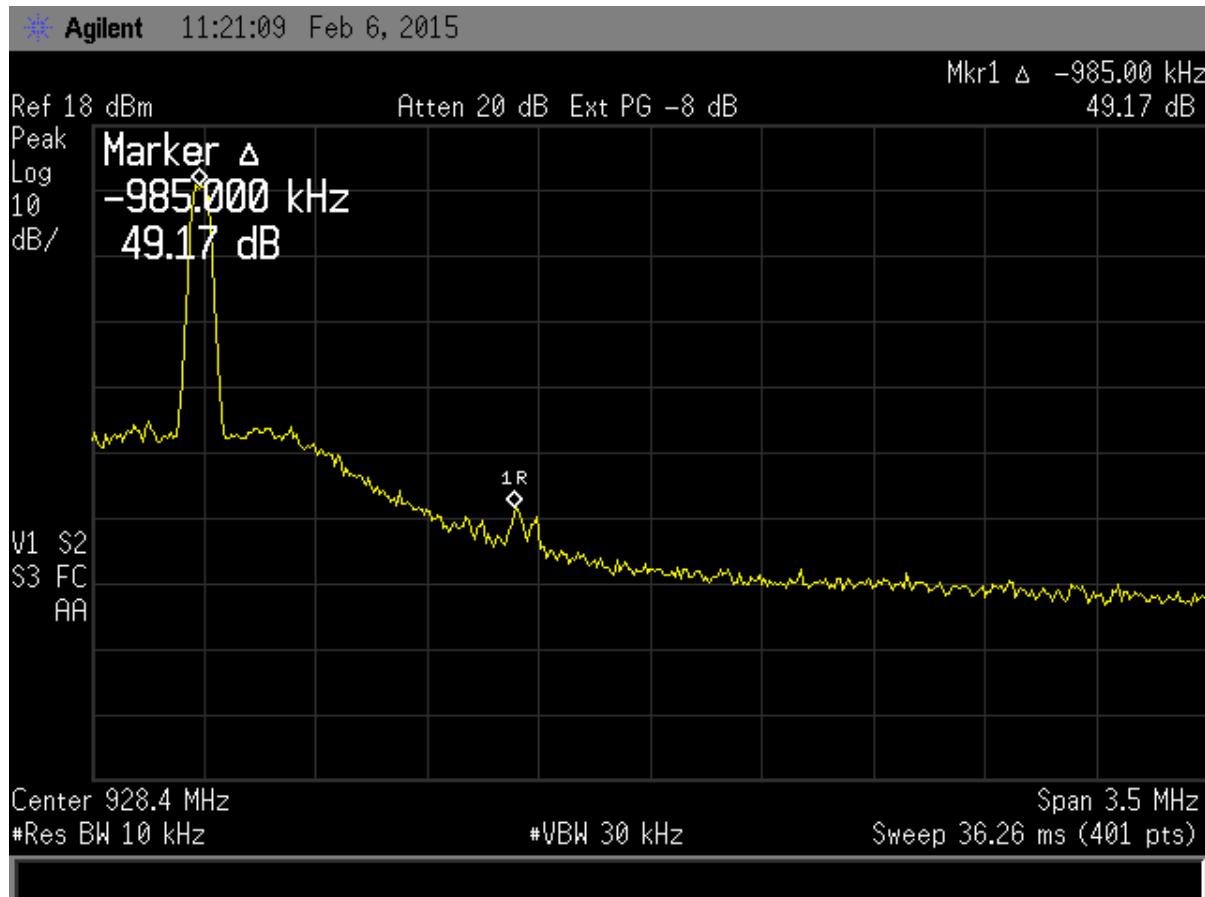


Figure 14. Band Edge Compliance, High Channel Delta – Continuous Transmission GFSK modulation

Measured Delta (from Figure 16)	49.17	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	29.17	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

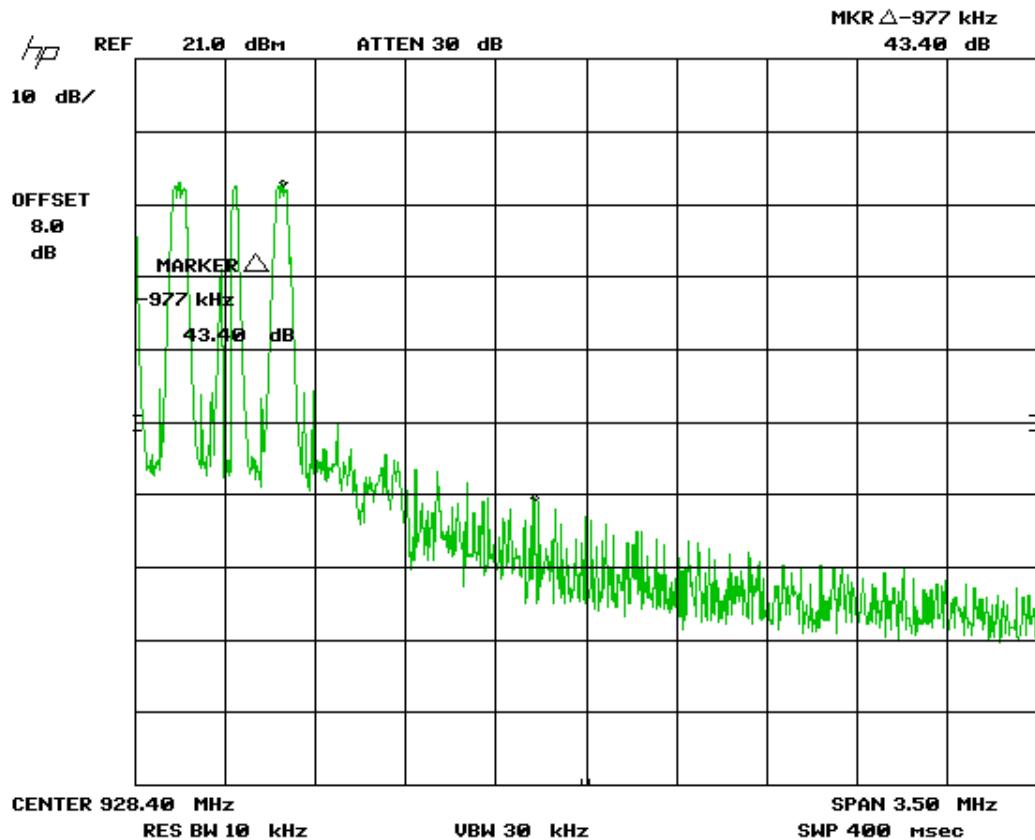


Figure 15. Band Edge Compliance, High Channel Delta – Channel Hopping GFSK modulation

Measured Delta (from Figure 17)	43.40	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	23.40	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.11.2 2-FSK Modulation

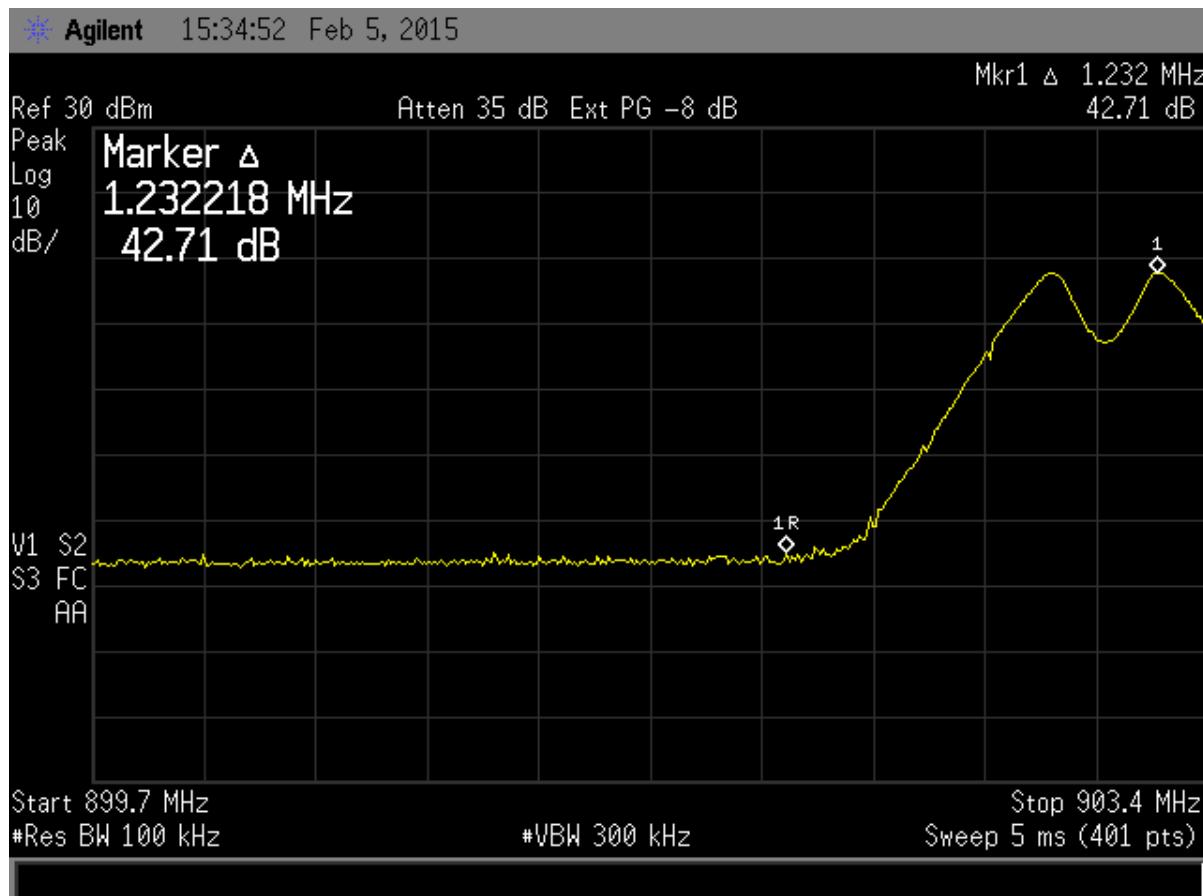


Figure 16. Band Edge Compliance, Low Channel Delta – Peak 2-FSK modulation

Measured Delta (from Figure 18)	42.71	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	22.71	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

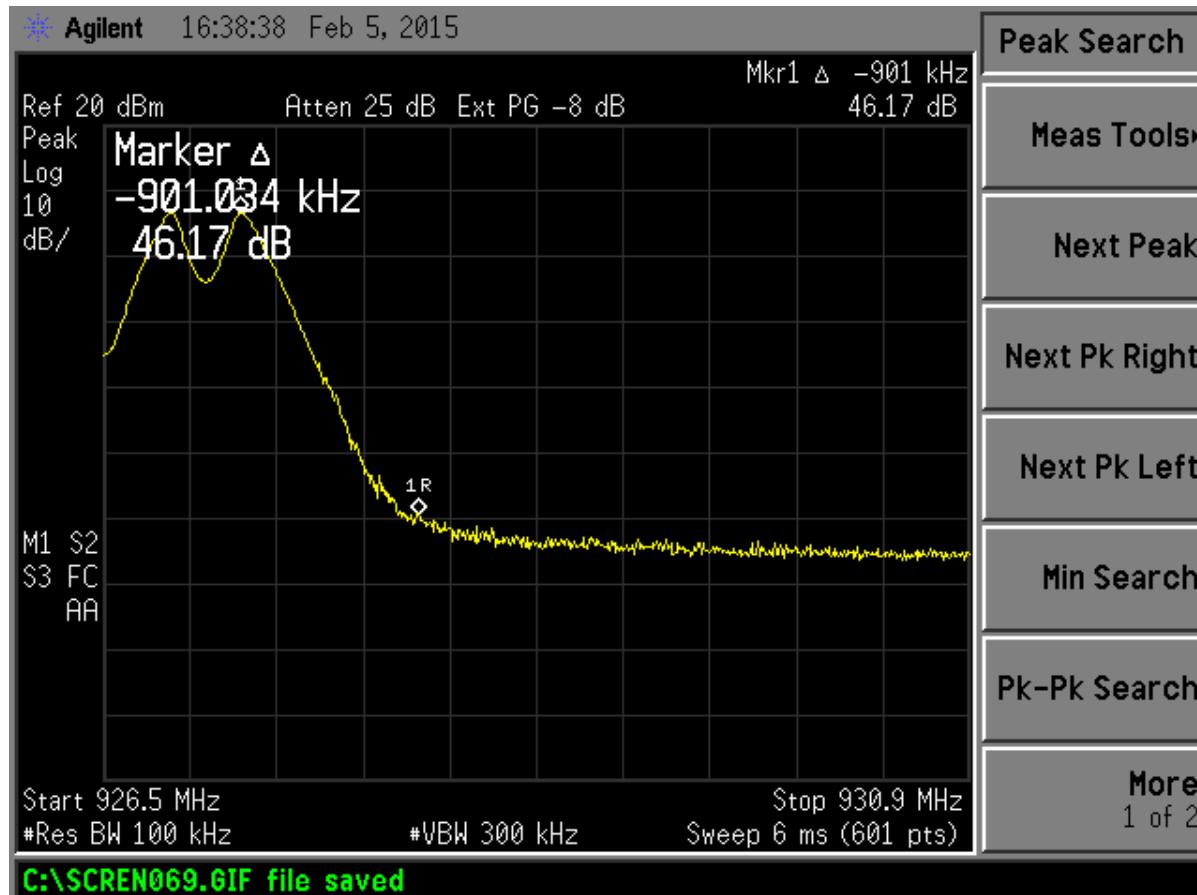


Figure 17. Band Edge Compliance, High Channel Delta – Peak 2-FSK Modulation

Measured Delta (from Figure 19)	46.17	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	26.17	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.12 Six (6) dB Bandwidth per CFR 15.247(a)(2)

The EUT antenna port was connected to a spectrum analyzer having a 50Ω input impedance. Measurements were performed similar to the method of FCC, KDB Publication No. 558074 for a bandwidth of 6 dB. The RBW was set to 100 kHz and with the VBW \geq RBW. The results of this test are given in the table below and Figures below.

Table 8. Six (6) dB Bandwidth

Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum FCC Bandwidth (MHz)
903	.604	0.500
915	.592	0.500
927	.602	0.500

Test Date: February 5, 2015

Tested By

Signature:  Name: Carrie Fincannon

NOTE: EUT placed into DTS mode of operation.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

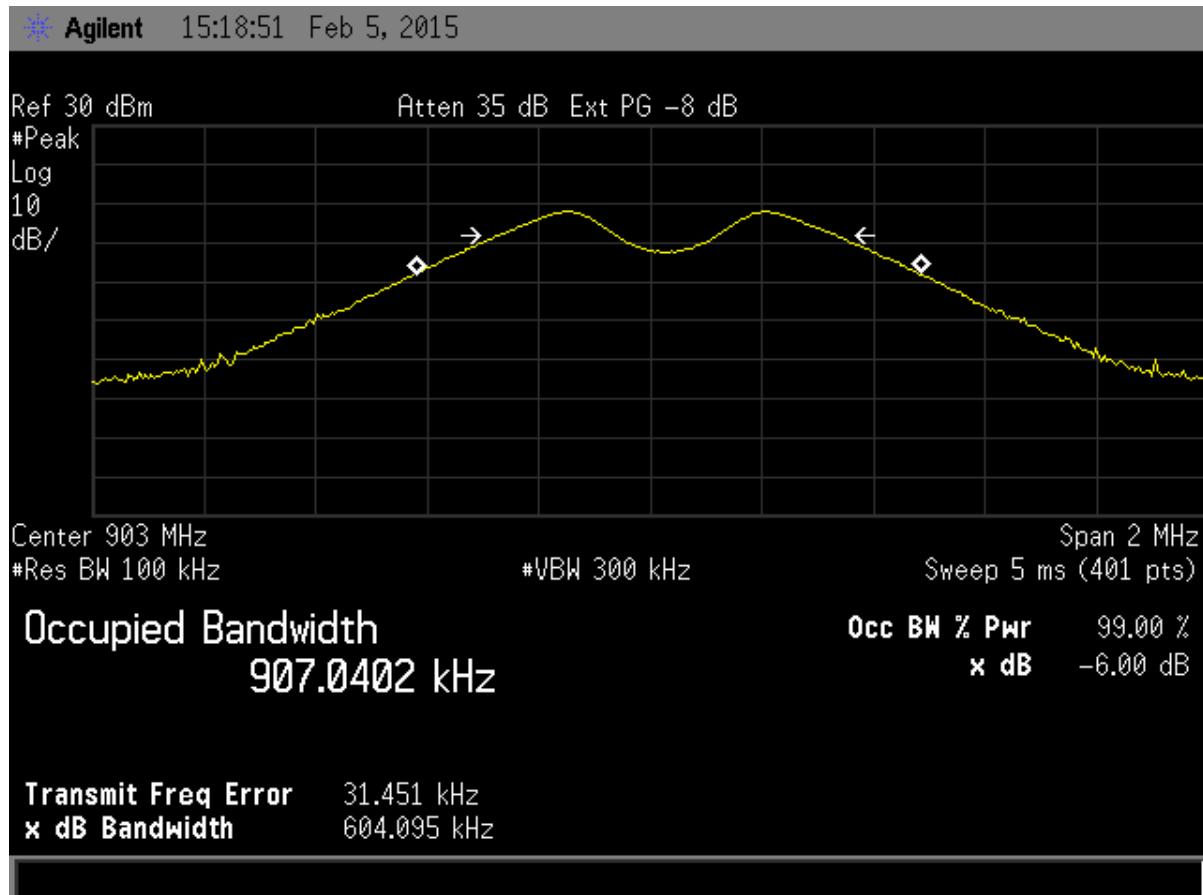


Figure 18. Six dB Bandwidth - 15.247 - Low Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

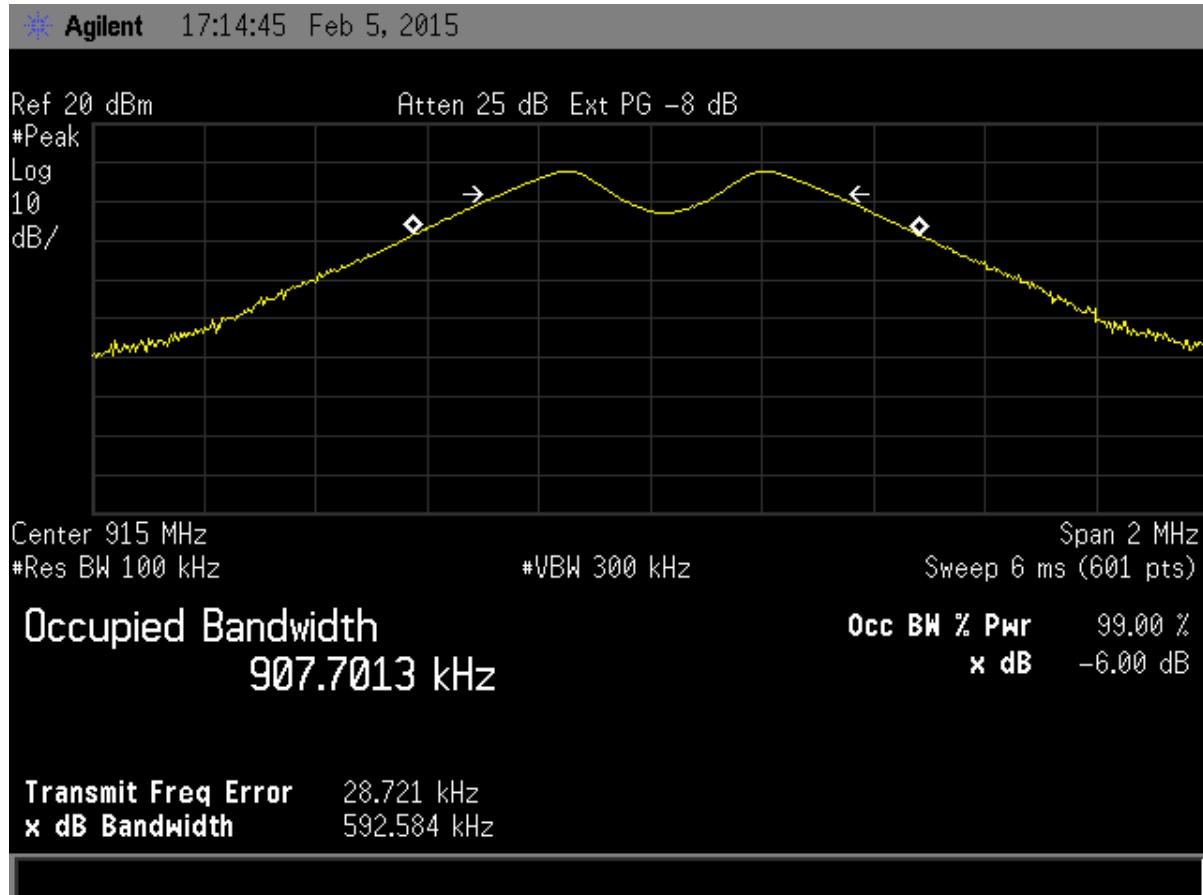


Figure 19. Six dB Bandwidth - 15.247 - Mid Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

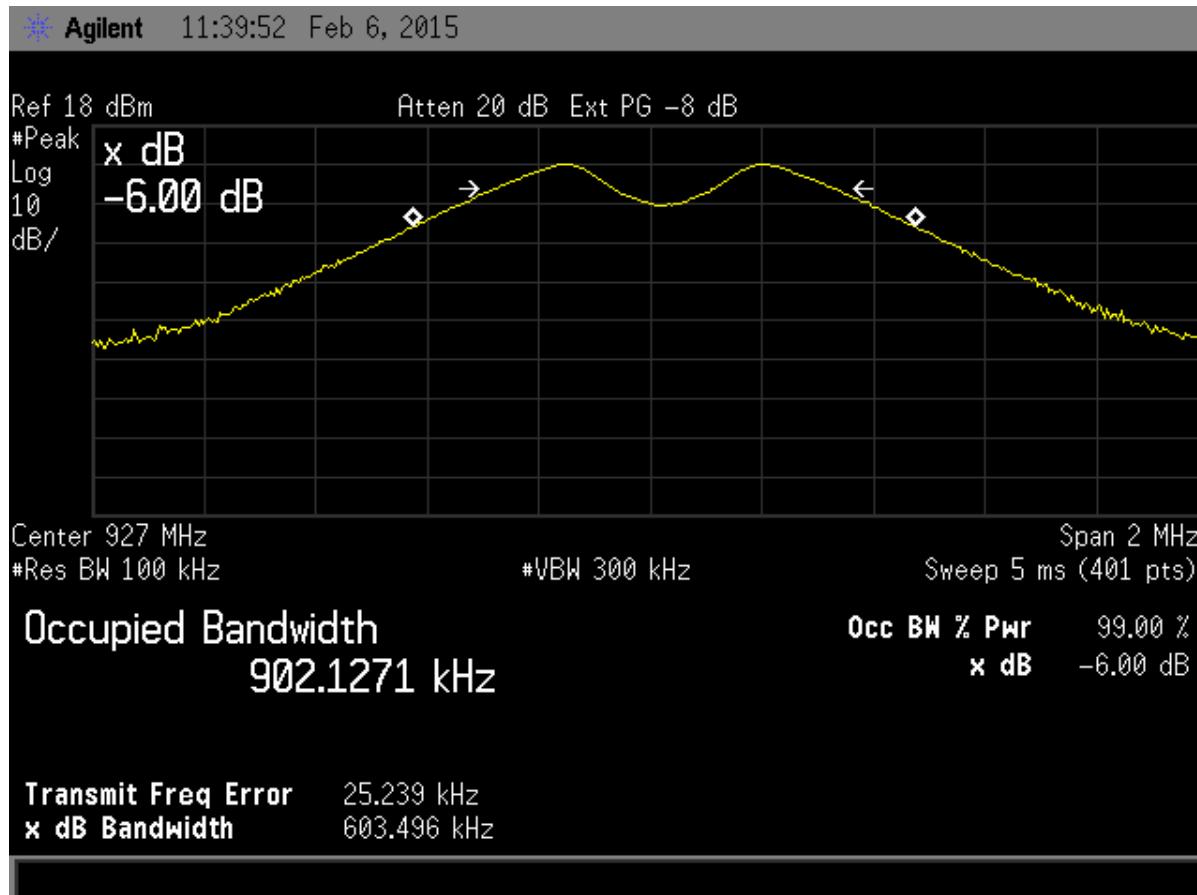


Figure 20. Six dB Bandwidth - 15.247 - High Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.13 20 dB Bandwidth (CFR 15.247 (a) (1))

For frequency hopping systems operating in the 902-928 MHz band the maximum allowed 20 dB bandwidth is 500 kHz.

These measurements were performed while the EUT was in a constant transmit mode. A method similar to the marker delta method was used to capture the points. The RBW was set to approximately 1 % of the manufacturers claimed RBW and with the VBW \geq RBW. The results of this test are given in Table 12 and Figures 23-25.

Table 9. 20 dB Bandwidth

Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)
903	76.49	500
915	76.03	500
927	76.00	500

Test Date: February 5, 2015

Tested By

Signature:  Name: Carrie Fincannon

NOTE: EUT placed into FHSS mode of operation.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

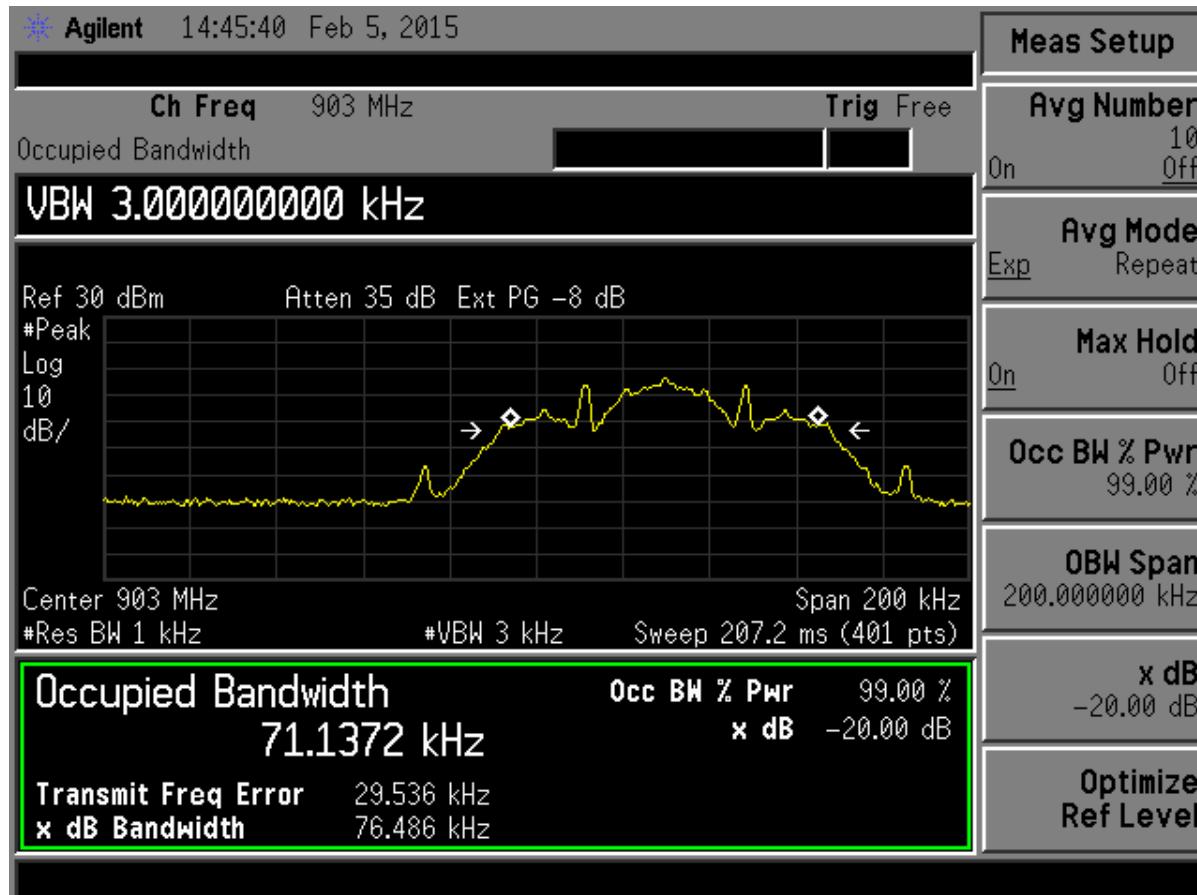


Figure 21. Twenty dB Bandwidth – Low Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

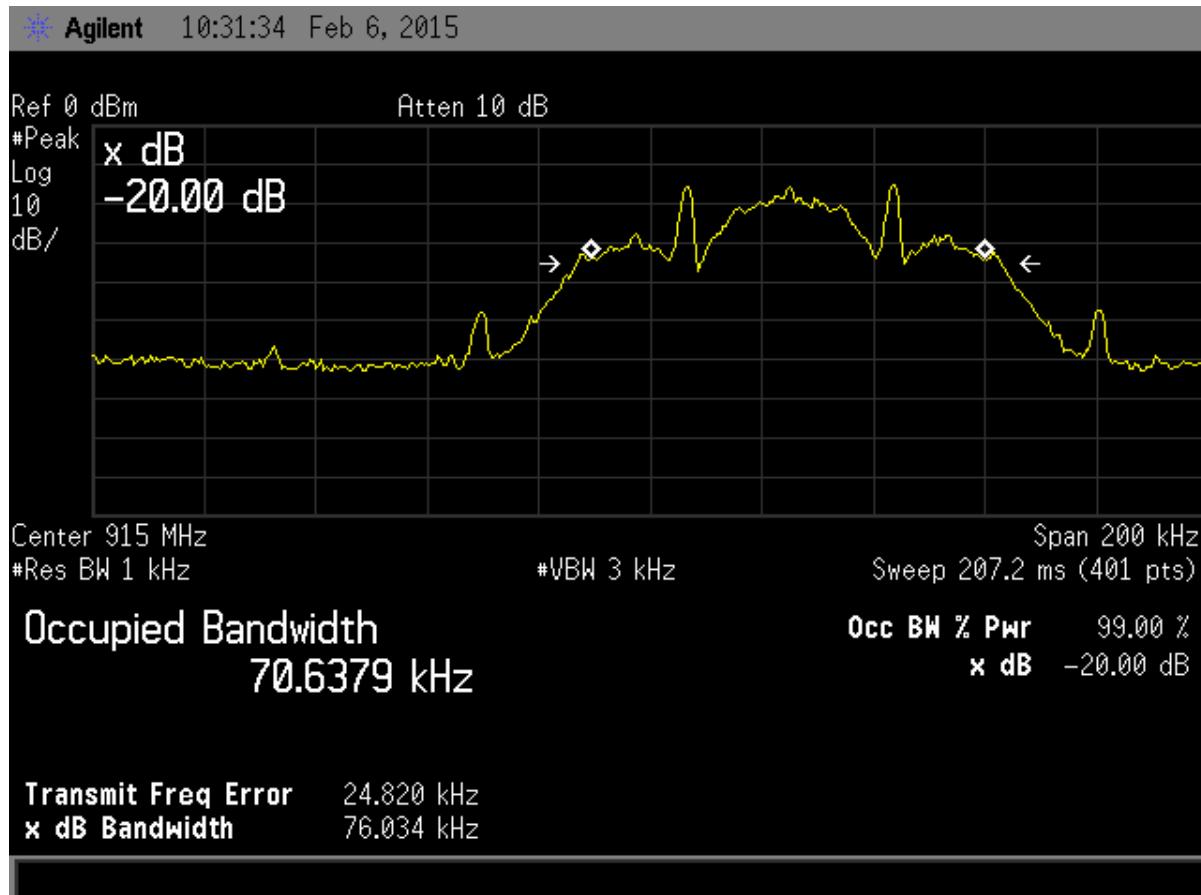


Figure 22. Twenty dB Bandwidth – Mid Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

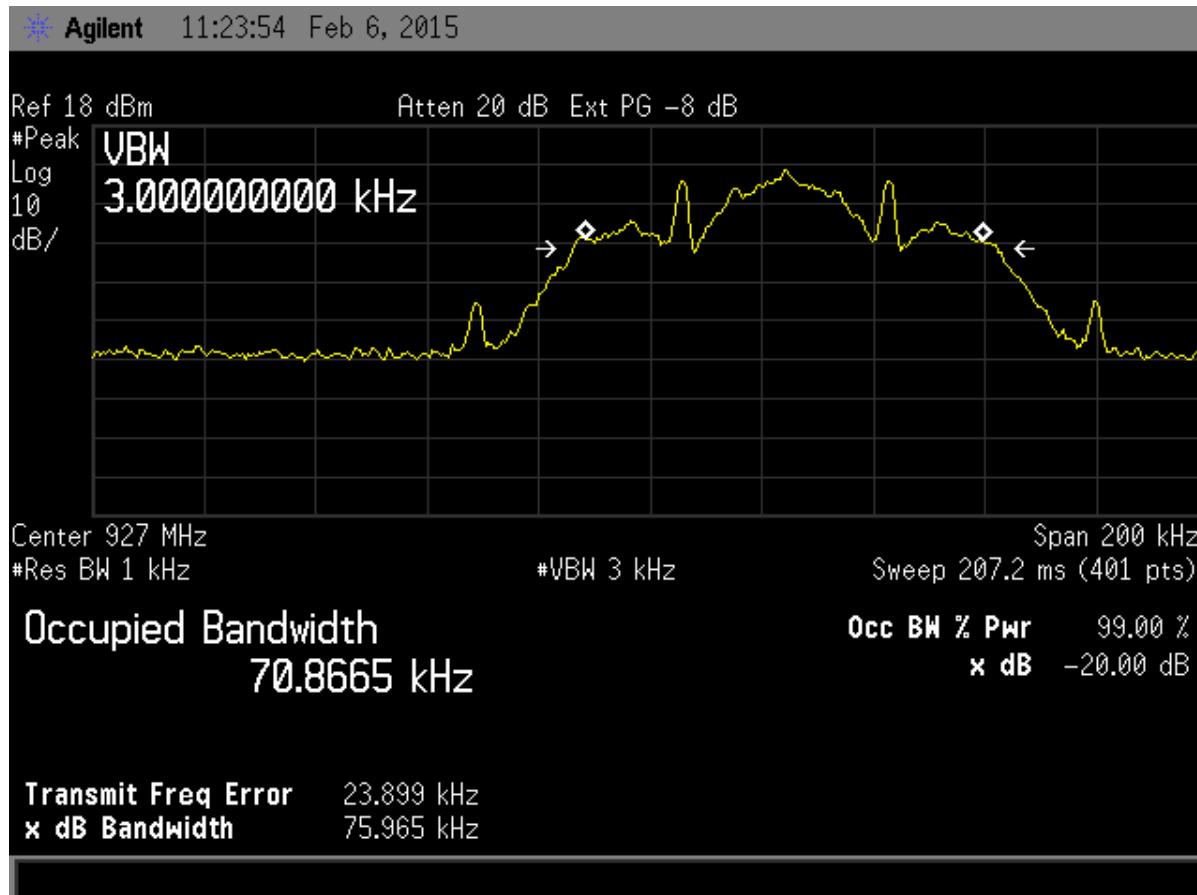


Figure 23. Twenty dB Bandwidth – High Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.14 Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))

For frequency hopping systems in the 902-928 MHz band with at least 50 hopping channels, the maximum peak conducted output power of the intentional radiator shall not exceed 1 watt. Systems with less than 50 hopping channels, but at least 25 hopping channels, the maximum peak conducted output power of the intentional radiator shall not exceed .25 watts. Since the EUT has 121 hopping channels, the maximum peak conducted output power shall not exceed 1 watt.

Peak power within the band 902 MHz to 927 MHz was measured per FCC KDB Publication DA 00-705 as an Antenna Conducted test with a spectrum analyzer by connecting the spectrum analyzer directly, via a short RF cable, and attenuators to the antenna output terminals on the EUT. The spectrum analyzer was set for an impedance of 50Ω with the RBW set greater than the 6 dB bandwidth of the EUT, and the $VBW \geq RBW$. Peak antenna conducted output power is tabulated in the table below.

Table 10. Peak Antenna Conducted Output Power per Part 15.247 (b) (3)

Frequency of Fundamental (MHz)	Raw Test Data dBm	Converted Data (mW)	FCC Limit (mW Maximum)
903	10.32	10.76	1000
915	10.56	11.38	1000
927	10.40	10.96	1000

Test Date: February 5, 2015

Tested By

Signature: 

Name: Carrie Fincannon

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

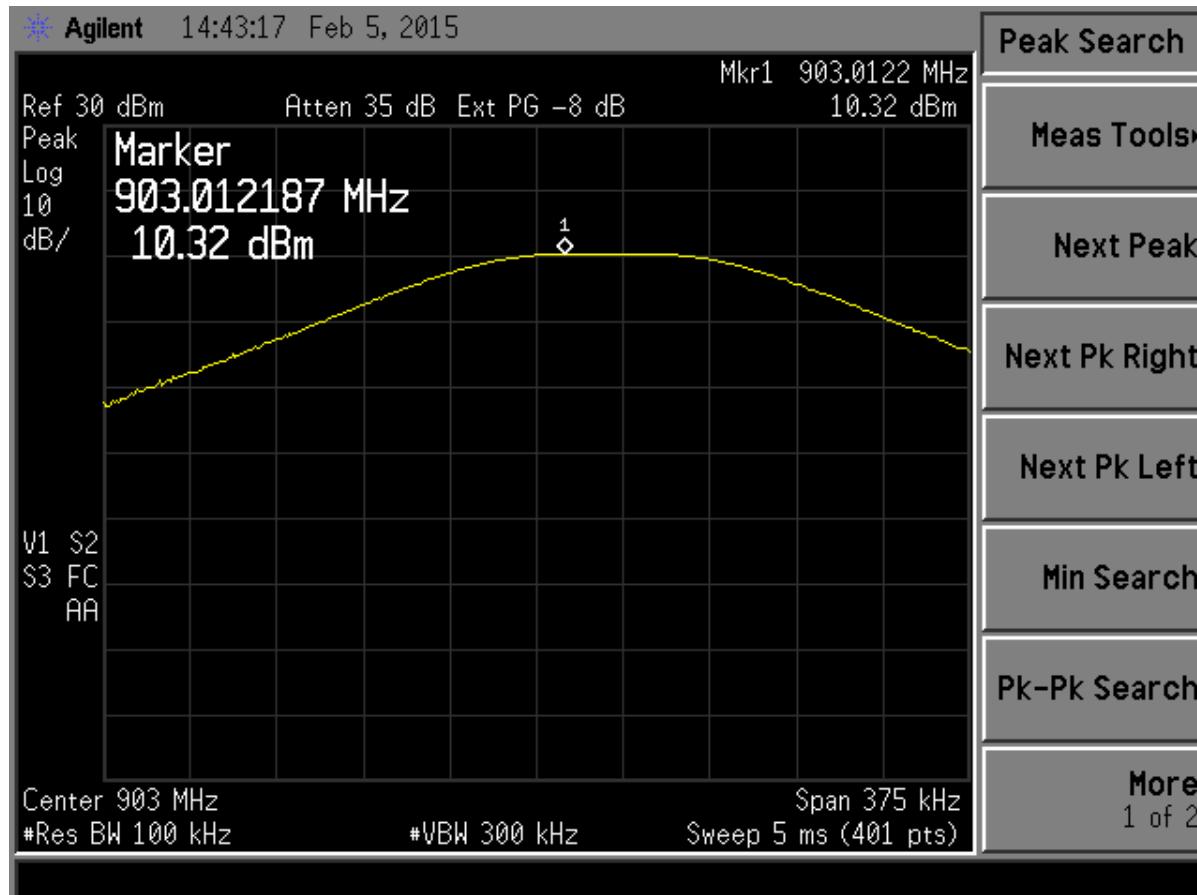


Figure 24. Peak Antenna Conducted Output Power, Low Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

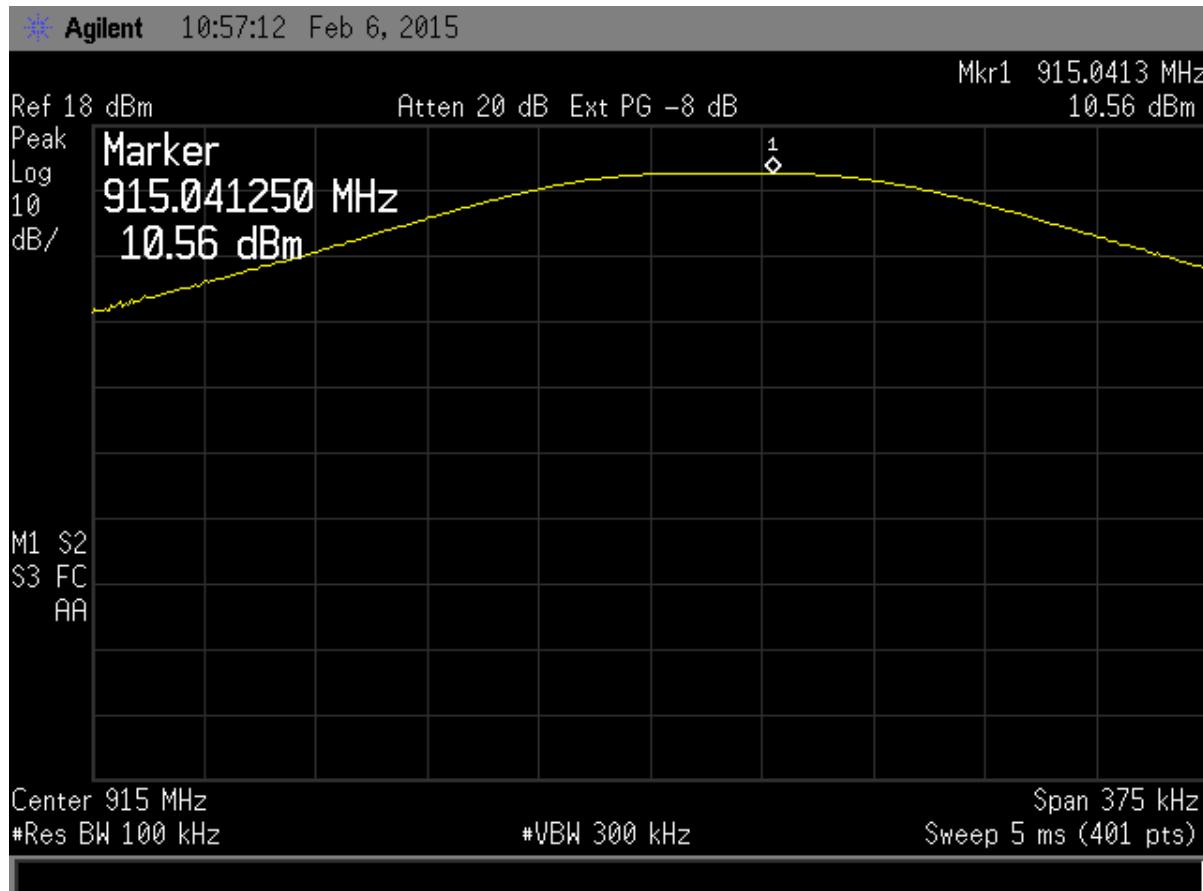


Figure 25. Peak Antenna Conducted Output Power, Mid Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

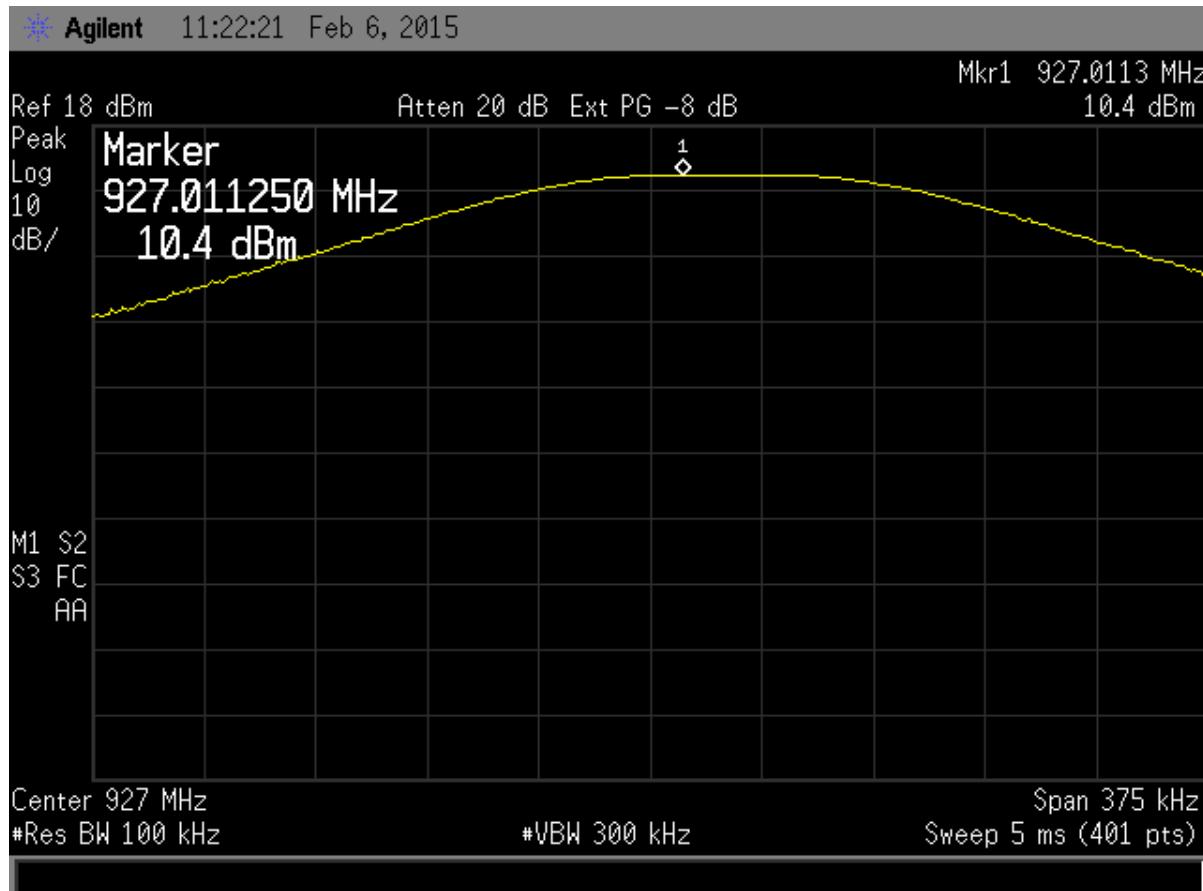


Figure 26. Peak Antenna Conducted Output Power, High Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.15 Power Spectral Density (CFR 15.247(f))

The transmitter was placed into a continuous mode of operation at all applicable frequencies. The measurements were performed per the procedures of FCC KDB Procedure 558074. The RBW was set to 3 kHz and the Video Bandwidth was set to \geq RBW. The span was set to 1.5 times the OBW.

In accordance with 15.247 (e), the power spectral density shall be no greater than +8 dBm per any 3 kHz band.


The following results show that all are less than +8 dBm per 3 kHz band.

Table 11. Power Spectral Density for Low, Mid and High Bands

Frequency (MHz)	Test Data (dBm/3 kHz)	FCC Limit (dBm/3 kHz)
903	-1.20	+8.0
915	-1.22	+8.0
927	-1.22	+8.0

Test Date: February 5, 2015

Tested By

Signature:  Name: Carrie Fincannon

NOTE: EUT placed into DTS mode of operation, FHSS mode turned OFF.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

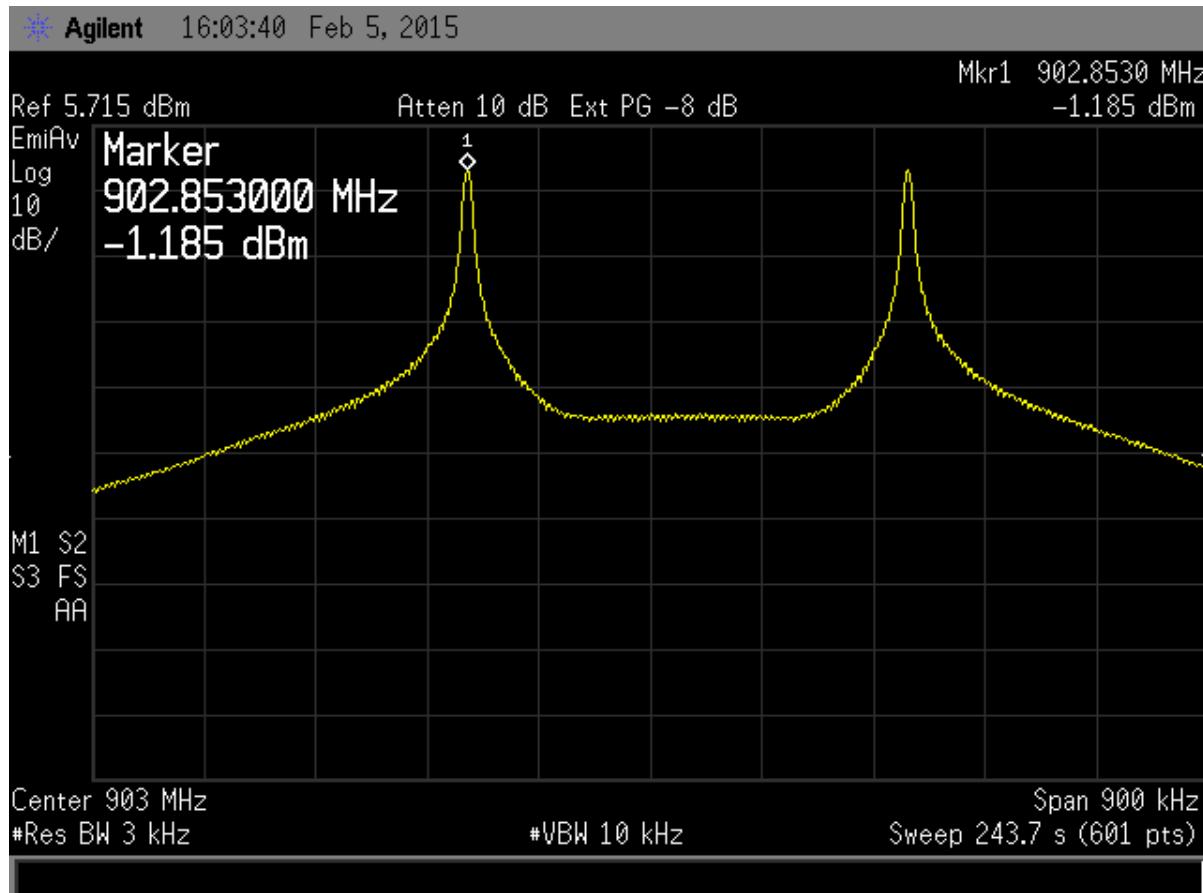


Figure 27. Peak Power Spectral Density, Low Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

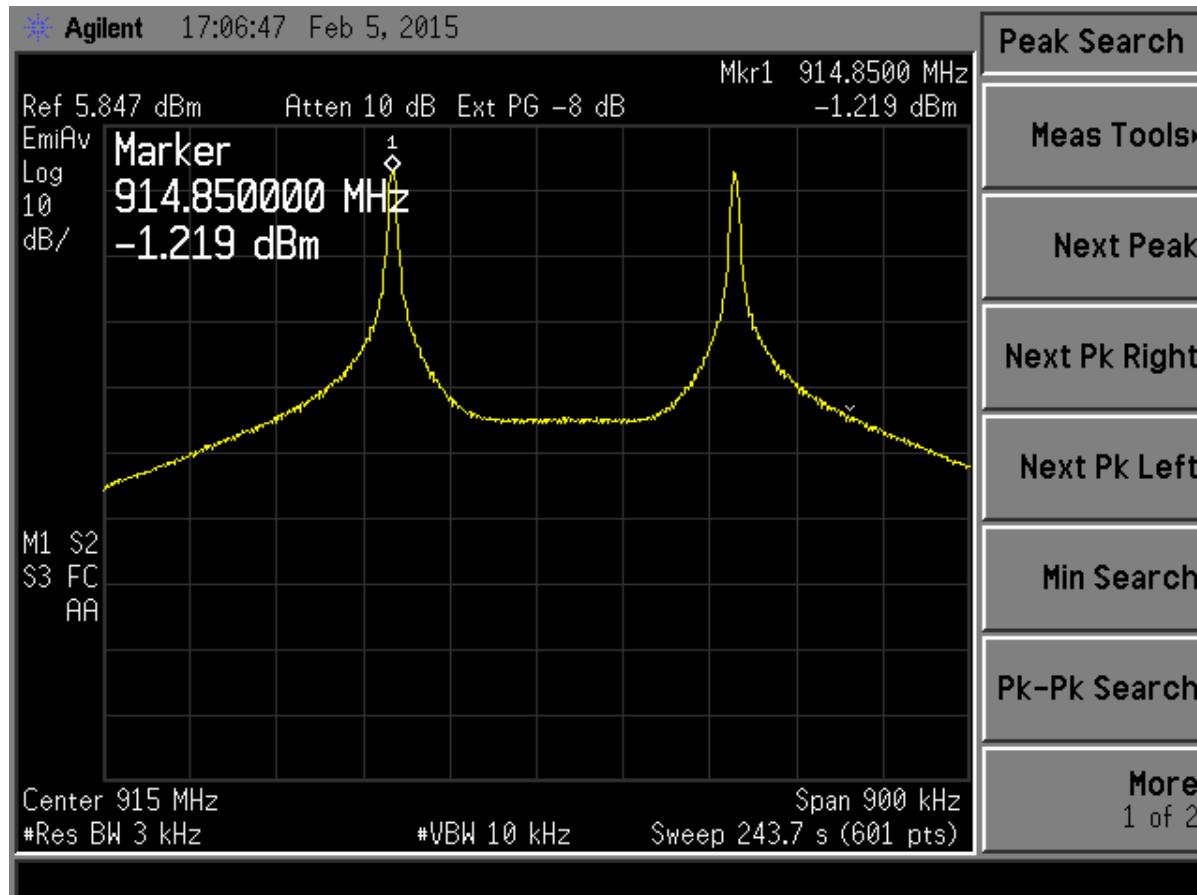


Figure 28. Peak Power Spectral Density, Mid Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

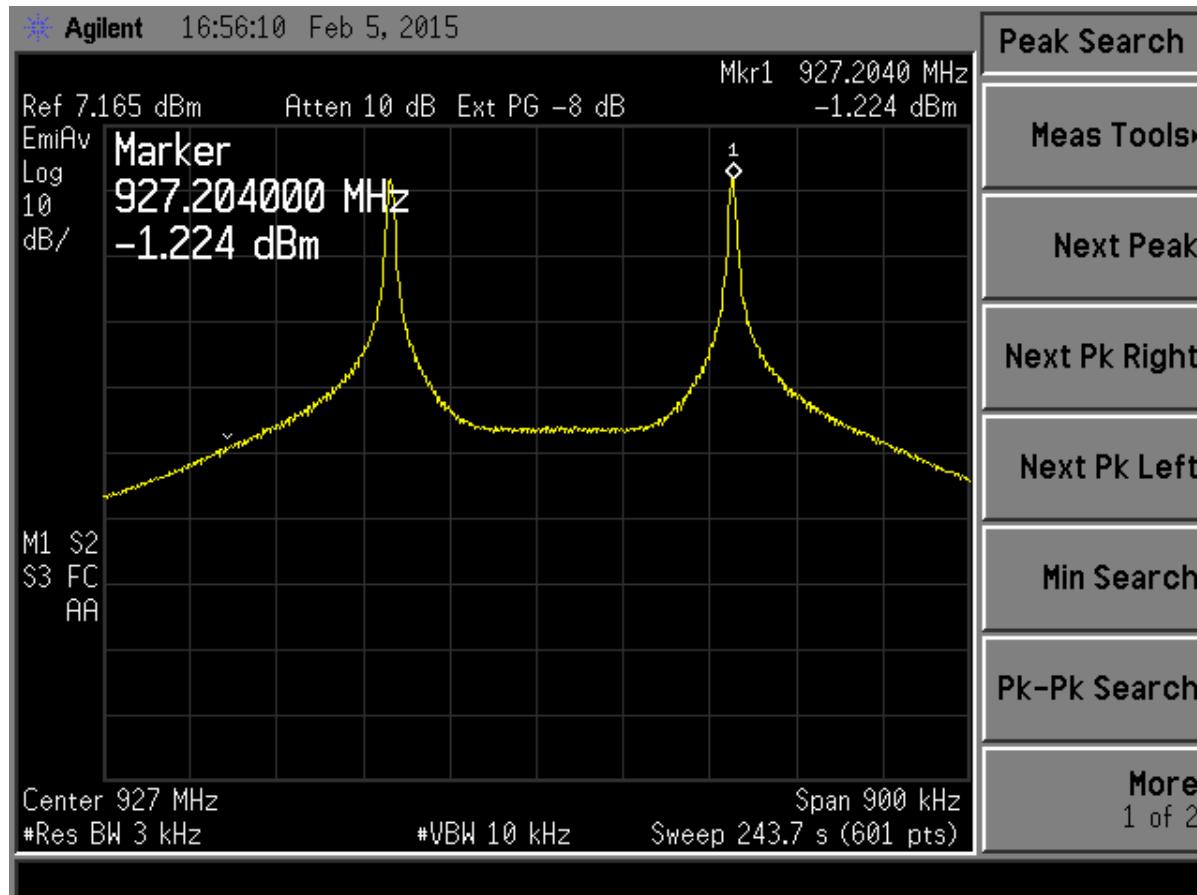


Figure 29. Peak Power Spectral Density, High Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.16 Number of Hopping Frequencies (CFR 15.247 (a)(1)) (CRF 15.247(b)(1))

Frequency hopping systems in the 902-928 MHz band shall have at least 50 hopping frequencies if the 20 dB bandwidth is less than 250 kHz. If the 20 dB bandwidth is 250 kHz or greater, then the system shall have at least 25 hopping frequencies. Since the EUT has a 20 dB bandwidth less than 250 kHz, then at least 25 hopping frequencies shall be used.

The test procedures outlined in FCC Public Notice DA 00-705 were used to conduct measurements.

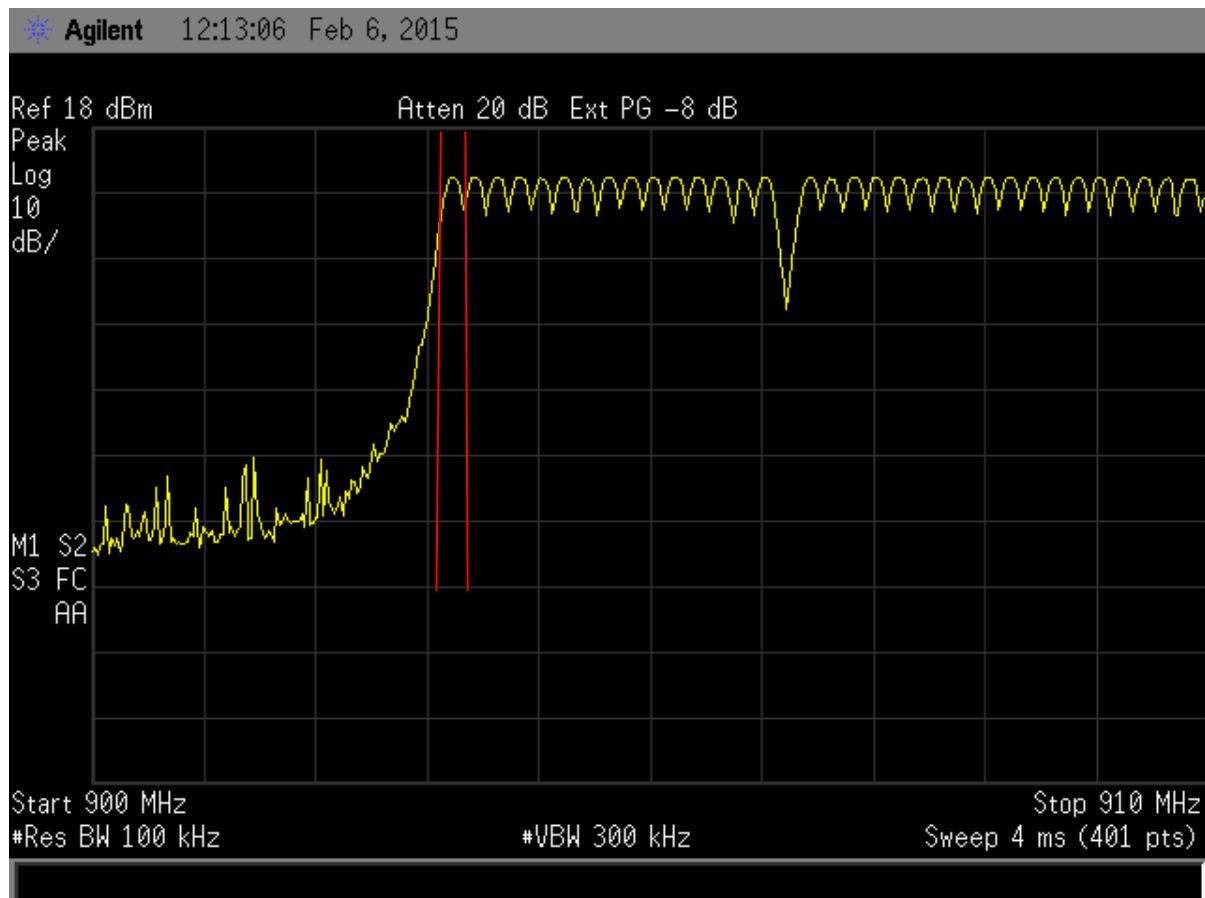


Figure 30. Hopping Channels 0 through 32

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

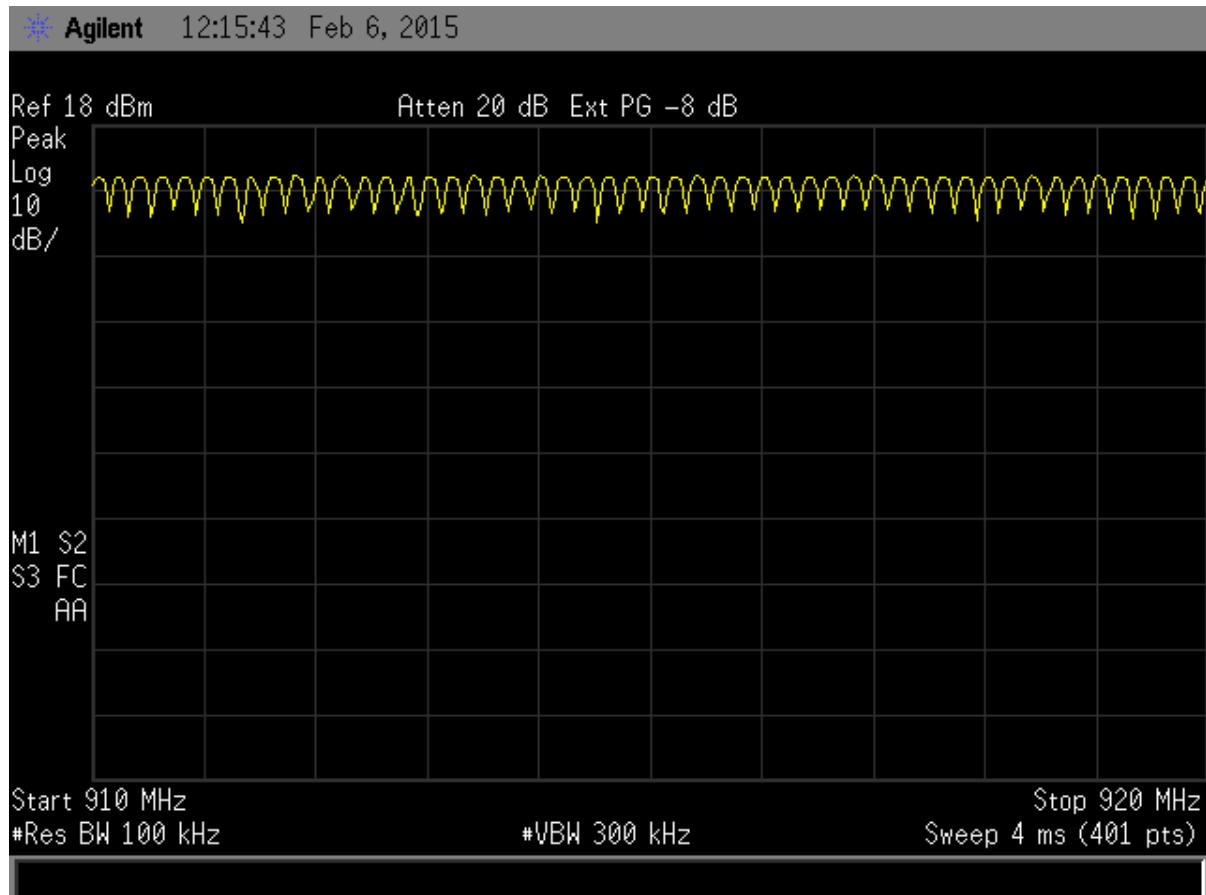


Figure 31. Hopping Channels 33 through 82

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

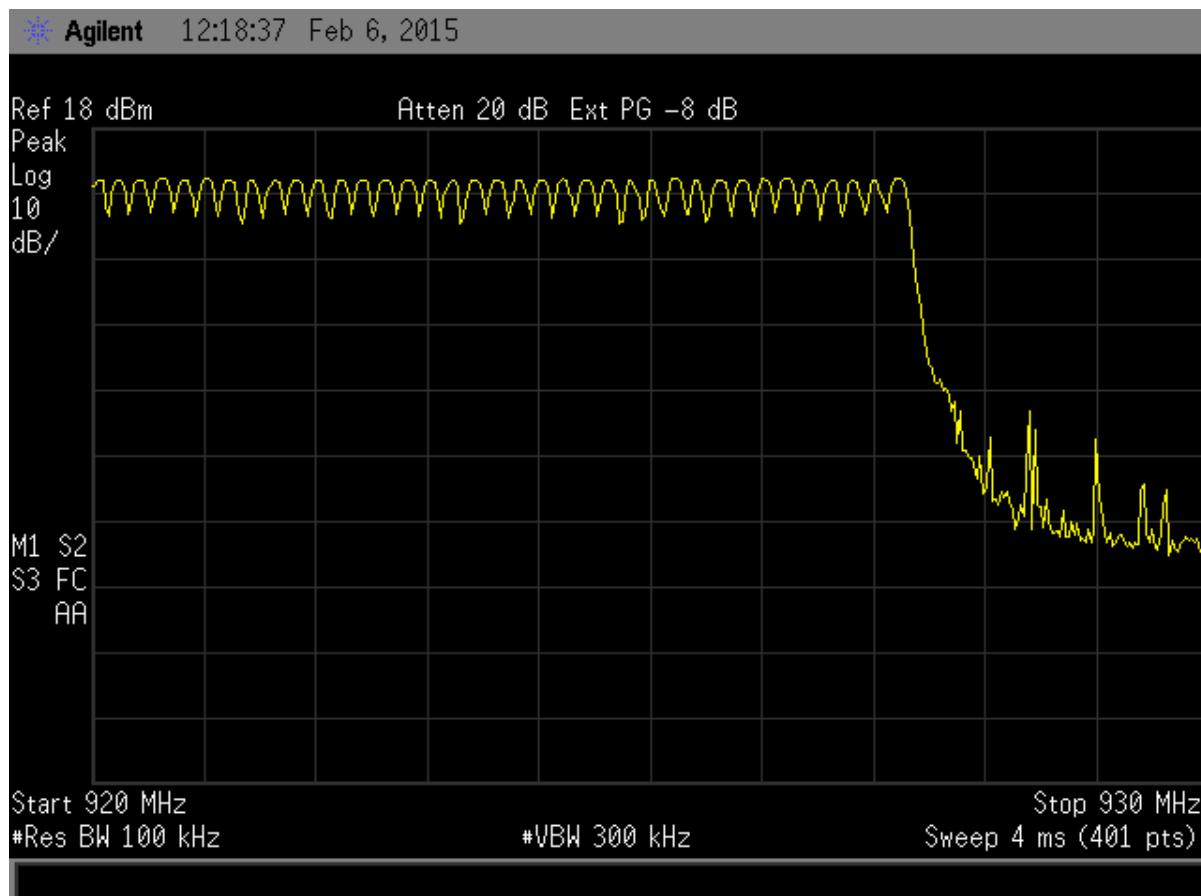


Figure 32. Hopping Channels 83 through 120

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.17 Frequency Separation (CRF 15.247(a)(1))

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. In this case, the 20 dB bandwidth of the Frequency hopping system is greater than 25 kHz, so the minimum requirement used was 76 kHz. Therefore the frequency separation must be greater than 76 kHz.

The EUT meets the frequency separation requirement.

The test procedures outlined in FCC Public Notice DA 00-705 were used to conduct measurements. The EUT hopping function was enabled during the testing.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

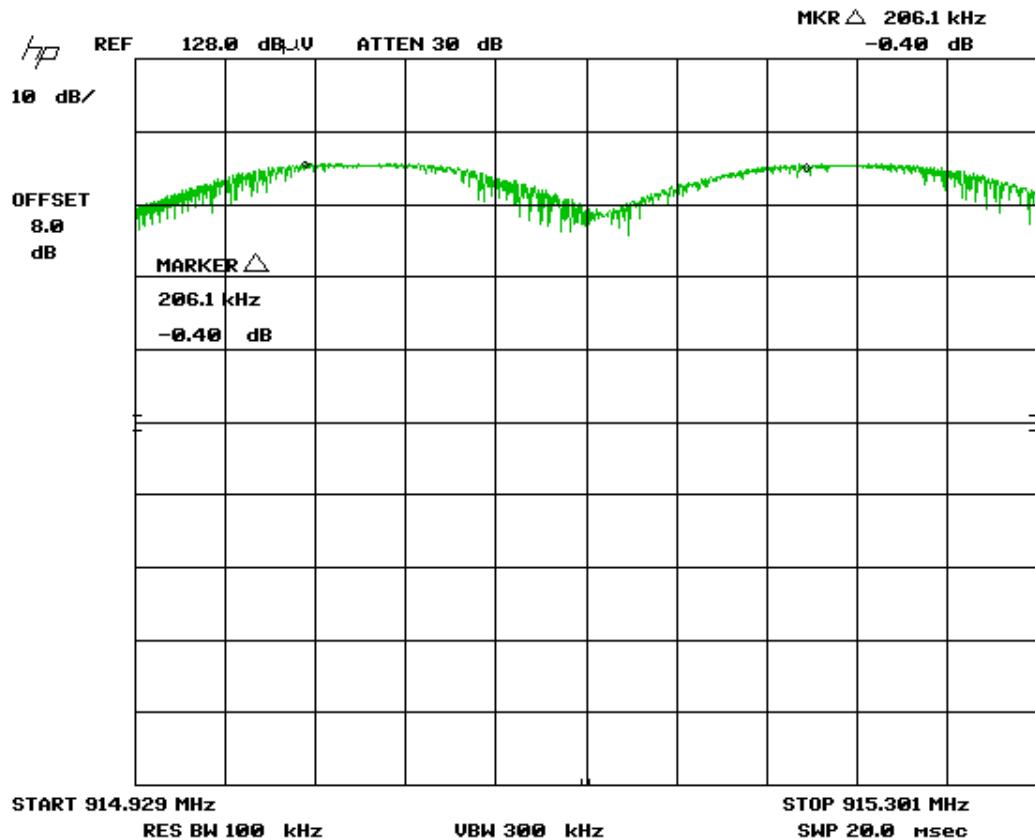


Figure 33. Channel Separation

Measured Delta (Figure 33 above)	286.1 kHz
-Limit (20 dB Bandwidth)	77.00 kHz
Margin	209.1 kHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.18 Average Time of Occupancy (CFR 15.247(f))

The frequency hopping operation of the hybrid system shall have an average time on any frequency not exceeding 0.4 s within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. Since the EUT employs 121 channels in the frequency hopping mode, the average time on shall not exceed 0.4 s within 48.4 s

The test procedures outline in the FCC Public Notice DA 00-705 was used to conduct measurements. The EUT was set to normal use mode, i.e. frequency hopping mode.

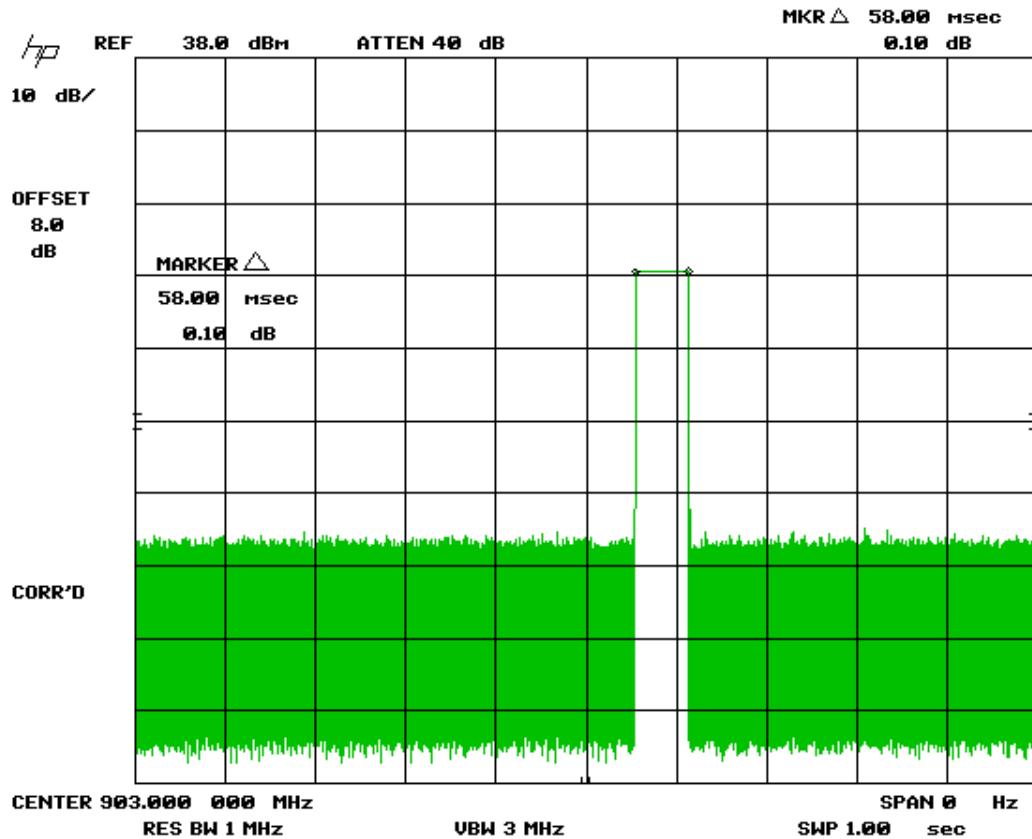


Figure 34. Time On

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

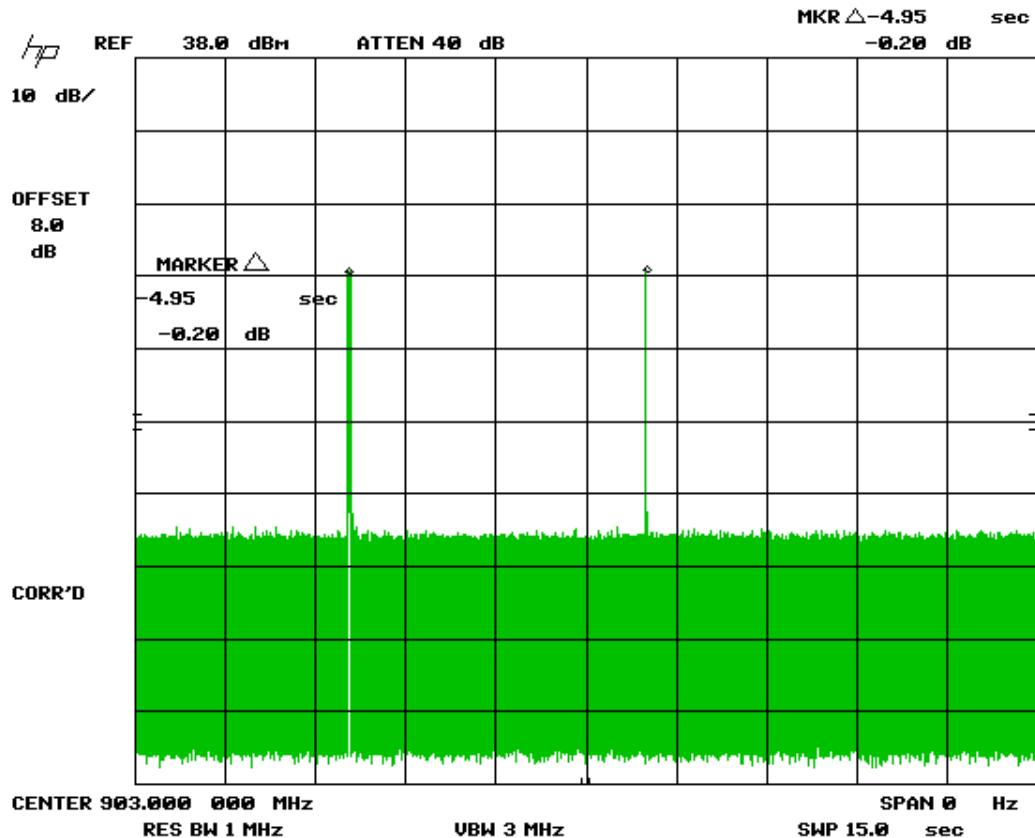


Figure 35. Time between Occupancy

Limit = 0.400 s within 48.4 s

Average time of Occupancy = 0.348 s = 0.058 s x 2 x 3 (2 pulse per 15 secs)

Limit	400	ms
-Average Time of Occupancy	348	ms
Margin	52	ms

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.19 Unintentional and Intentional Radiator, Powerline Emissions (CFR 15.107/15.207)

The power line conducted voltage emission measurements have been carried out in accordance with CFR 15.107, per ANSI C63.4:2009, Paragraph 7, with a spectrum analyzer connected to a LISN and the EUT placed into a continuous mode of transmission. Additionally the transmitter was turned ON and the test was repeated with the intentional transmitter circuit ON. The worst case mode of operation is with the transmitter circuit ON. That test data is presented below to show compliance to both parts.

The EUT was battery powered; therefore this test was not applicable.

Table 12. Power Line Conducted Emissions Test Data, Part 15.107, 15.207

150KHz to 30 MHz with Class B Limits						
Test: Power Line Conducted Emissions				Client: Controlant EHF		
Project: 15-0021				Model: CO 13.01		
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Results (dBuV)	AVG Limits (dBuV)	Margin (dB)	Detector PK, QP, or AVG
The EUT is battery powered therefore this test was not applicable.						

SAMPLE CALCULATION: N/A

Test Date: February 5, 2015

Tested By

Signature: 

Name: Carrie Fincannon

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.20 Unintentional and Intentional Radiator, Radiated Emissions (CFR 15.109, 15.209)

Radiated emissions disturbance measurements were performed with the transmitter turned OFF and the test was repeated with the intentional transmitter circuit ON. The worst case mode of operation is with the transmitter circuit ON. That test data is presented below to show compliance to both parts.

An instrument having both peak and quasi-peak detectors was used to perform the test over the frequency range of 30 MHz to five times the highest clock frequency. Measurements of the radiated emissions were made with the receiver antenna at a distance of 3 m from the boundary of the test unit.

The test antenna was varied from 1 m to 4 m in height while watching the analyzers' display for the maximum magnitude of the signal at the test frequency. The antenna polarization (horizontal or vertical) and test sample azimuth were varied during the measurements to find the maximum field strength readings to record.

The worst-case radiated emission in the range of 30 MHz to 1 GHz was 9.2 dB below the limit at 388.32 MHz. This signal is found in Table 13. All other radiated emissions were 9.9 dB or more below the limit.

The worst-case radiated emission in the range of 1 GHz to 6 GHz was 5.8 dB below the limit at 2339 MHz. This signal is found in Table 14. All other radiated emissions were 7.0 dB or more below the limit.

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AD9R-CO1301
 15-0021
 February 13, 2015
 Controlant EHF
 CO 13.01

Table 13. Unintentional and Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 30 MHz to 1000 MHz

30 MHz to 1000 MHz with Class B Limits							
Test: Radiated Emissions				Client: Controlant EHF			
Project: 15-0021				Model: CO 13.01			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or QP
71.72	48.03	-18.20	29.83	40.0	3m /VERT	10.2	PK
80.29	47.86	-17.79	30.07	40.0	3m /VERT	9.9	QP
224.21	44.09	-13.80	30.29	46.0	3 m/VERT	15.7	PK
388.32	45.20	-8.37	36.83	46.0	3 m/VERT	9.2	PK
136.72	43.76	-13.76	30.00	43.5	3m /HORZ	13.5	PK
224.16	44.79	-13.30	31.49	46.0	3m /HORZ	13.5	PK
588.59	37.23	-3.01	34.22	46.0	2m /HORZ	11.8	QP

Tested from 30 MHz to 1 GHz

SAMPLE CALCULATION at 71.72 MHz:

Magnitude of Measured Frequency	48.03	dBuV
+ Cable Loss+Antenna Factor-Amp Gain	-18.02	dB
=Corrected Result	29.83	dBuV
Limit	40.00	dBuV
-Corrected Result	29.83	dBuV
Margin	10.20	dB

Test Date: February 11, 2015

Tested By

Signature:



Name: Carrie Fincannon

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

Table 14. Unintentional and Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 1 GHz to 6 GHz

1 GHz to 6 GHz with Class B Limits							
Test: Radiated Emissions				Client: Controlant EHF			
Project: 15-0021				Model: CO 13.01			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
2337	52.57	-5.61	46.96	54.0	3m /HORZ	7.0	PK
2339	53.66	-5.48	48.18	54.0	3m /HORZ	5.8	PK

Tested from 1 GHz to 6 GHz

SAMPLE CALCULATION at 2337 MHz:

Magnitude of Measured Frequency	52.57	dBuV
+ Cable Loss+ LISN Loss	-5.61	dB
=Corrected Result	46.96	dBuV
Limit	54.00	dBuV
-Corrected Result	46.96	dBuV
Margin	7.00	dB

Test Date: February 11, 2015

Tested By

Signature:



Name: Carrie Fincannon

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AD9R-CO1301
15-0021
February 13, 2015
Controlant EHF
CO 13.01

2.21 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

2.21.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.78 dB.

The data listed in this test report does have sufficient margin to negate the effects of uncertainty. Therefore, the EUT unconditionally meets this requirement.

2.21.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.39 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.18 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.21 dB.

The data listed in this test report does have sufficient margin to negate the effects of uncertainty. Therefore, the EUT unconditionally meets this requirement.