SAR TEST REPORT



Report No.: 16071000-FCC-H Supersede Report No.: N/A

· · · · · · · · · · · · · · · · · · ·				
Applicant	MOBIWIRE N	MOBIWIRE MOBILES (NINGBO) CO.,LTD.		
Product Name		Mobile phone		
Model No.	A400			
		Part2(2.1093)		
Standards	ANSI/IEEE C		Duna and duna	
		013 & Published RF Exposure KDB I	Procedures	
Test Date	Aug 22 to Au	<u> </u>		
Issue Date	Sep 18, 2016	5		
Test Result	PASS			
Equipment complie	d with the spe	cification		
Equipment did not	comply with th	e specification		
		·		
Wiky.	Jam	David Huang		
Wiky Ja	ım	David Huang		
Test Engi	neer	Checked By		
			Enter the Barb Call.	
	Thic t	est report may be reproduced in full on	alv.	
_				
Test re	esult presented	in this test report is applicable to the to	ested sample only	

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report	16071000-FCC-H
Page	2 of 123

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report	16071000-FCC-H
Page	3 of 123

This page has been left blank intentionally.



Test Report	16071000-FCC-H
Page	4 of 123

CONTENTS EUT INFORMATION......5 TEST INSTRUMENT35 ANNEX B SAR SYSTEM PHOTOGRAPHS......118

ANNEX C SETUP PHOTOGRAPHS119



Test Report	16071000-FCC-H
Page	5 of 123

1 **EUT INFORMATION**

EUT Information		
EUT Description	Mobile phone	
Model No	A400	
Input Power	Model:365897P Spec: 3.8V,3000mAh(11.4Wh) Charge limited voltage: 4.35V	
Maximum Conducted Output Power to Antenna	GSM 850 Voice :32.34 dBm PCS1900 Voice:29.68dBm WCDMA Band V (Class 3):22.89dBm WCDMA Band IV (Class 3): 23.21dBm WCDMA Band II (Class 3): 22.67dBm 2.4G Wifi: IEEE 802.11b: 14.31dBm; IEEE 802.11g: 13.33 dBm; IEEE 802.11n20: 111.26 dBm IEEE 802.11n40: 10.39 dBm	
Highest Reported SAR Level(s)	1.32W/Kg 1g Head Tissue 1.39W/Kg 1g Body Tissue	
Classification Per Stipulated Test Standard	Portable Device, Class B, No DTM Mode	
Multi-SIM	Support dual-SIM, dual standby, the multiple SIM card with two lines cannot transmitting at the same time.	
Co-located TX	WWAN can transmit simultaneously with Bluetooth WIFI cannot transmit simultaneously with Bluetooth WWAN can transmit simultaneously with WiFi	
Antenna Separation distances	8.5cm - WWAN antenna-to-WIFI/Bluetooth antenna	
Antenna Type(s)	PIFA Antenna(WWAN)	
Accessorv	N/A	

SAR Test Result

O/III TOST NOSUIT						
	Equipment Frequency Class Band		Highest 1g SAR Summary			
			Head (Separation 0mm)	Body (Separation 10mm)	Hotspot (Separation 10mm)	Highest Simultaneous Transmission 1g
			1g SAR(W/kg)			SAR(W/kg)
	GSM	GSM850	0.68	1.38	1.38	
	GSIVI	GSM1900	0.37	0.75	0.75	
Licensed		WCDMA II	0.83	0.81	0.81	1.50
	WCDMA	WCDMA V	0.66	0.77	0.77	
		WCDMA IV	1.32	1.39	1.39	
DTS	2.4G WIFI	802.11b	0.18	0.11	0.11	
Date of Testing:			Aug 22th , 20	16~ Aug 29th, 2016		



Test Report	16071000-FCC-H
Page	6 of 123

Purpose Compliance testing of Mobile phone m with stipulated	
	Staridard
Applicant / Client MOBIWIRE MOBILES (NINGBO) No.999,Dacheng East Road,Fenghua City	
Manufacturer MOBIWIRE MOBILES (NINGBO No.999, Dacheng East Road, Fenghua City	
SIEMIC(Shenzhen-China) Lal Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, Sout Zhoushi Road, Bao'an District, Shenzhen 518108, Guangdor Tel: +(86) 0755 VIP Line:950-	th Side of ng, P.R.C. 5-26014629
Test report reference number 160710	000-FCC-H
Date EUT received Aug	17th, 2016
Standard applied Se	ee Page 50
Dates of test (from – to) Aug 22th , 2016~ Aug 2	29th, 2016
No of Units:	1
Equipment Category:	PCE
Trade Name:	N/A
Model Name:	A400
GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1 UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ UMTS-FDD Band IV TX:1712.4 ~ 17: RX: 2112.4 ~ 2 RF Operating Frequency (ies) UMTS-FDD Band II TX:1852.4 ~ 19: RX: 1932.4 ~ 1	989.8 MHz 891.6 MHz 52.6 MHz; 152.6 MHz 07.6 MHz;
WIFI: 802.11b/g/n(20M): 2412 WIFI: 802.11n(40M): 2422 Bluetooth& BLE: 2402 GPS: 15	-2462 MHz -2452 MHz -2480 MHz 75.42 MHz
EGPI UMTS-F Modulation: 802.11b/g/n: DS Bluetooth: GFSK, π/4-DQPS B	
GPRS/EGPRS Multi-slot class	8/10/12
	ADA4A400



Test Report	16071000-FCC-H
Page	7 of 123

3 INTRODUCTION

Introduction

This measurement report shows compliance of the EUT with ANSI/IEEE C95.1-1999 and FCC 47 CFR Part2 (2.1093)

The test procedures, as described in IEEE 1528-2013 Standard for IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques(300MHz~6GHz) and Published RF Exposure KDB Procedures

SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma \mid E \mid^2}{\rho}$$

where:

 σ = conductivity of the tissue (S/m) ρ = mass density of the tissue (kg/m3)

E = rms electric field strength (V/m)



Test Report	16071000-FCC-H
Page	8 of 123


4 SAR MEASUREMENT SETUP

Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than \pm 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than ±10%. The spherical isotropy was evaluated with the procedure described in SAR starndard and found to be better than ±0.25 dB. The phantom used was the SAM Phantom as described in FCC supplement C, IEEE P1528 and CENELEC EN62209-1.

Measurement System Diagram

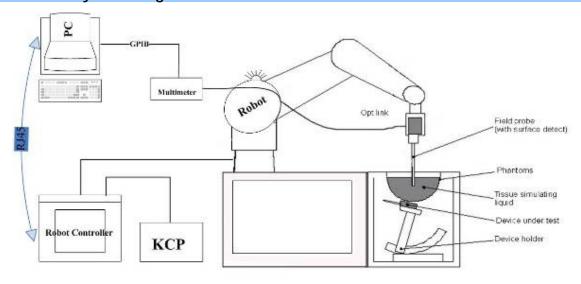

The OPENSAR system for performing compliance tests consist of the following items:

- 1. A standard high precision 6-axis robot (KUKA) with controller and software.
- 2. KUKA Control Panel (KCP).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- 4. The functions of the PC plug-in card are to perform the time critical task such as signal filtering, surveillance of the robot operation fast movement interrupts.



Test Report	16071000-FCC-H
Page	9 of 123

- 5. A computer operating Windows XP.
- 6. OPENSAR software.
- 7. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
- 8. The SAM phantom enabling testing left-hand right-hand and body usage.
- 9. The Position device for handheld EUT.
- 10. Tissue simulating liquid mixed according to the given recipes (see Application Note).
- 11. System validation dipoles to validate the proper functioning of the system.



Test Report	16071000-FCC-H
Page	10 of 123

EP100 Probe





Construction Symmetrical design with triangular Core. Built-in shielding against static charges Calibration in air from 100 MHz to 2.5 GHz. In brain and muscle simulating tissue at frequencies from 800 to 6000 MHz (accuracy of 8%).

Frequency 100 MHz to 6 GHz;

Linearity; 0.25 dB (100 MHz to 6 GHz),

Directivity: 0.25 dB in brain tissue (rotation around probe axis) 0.5 dB in brain tissue (rotation normal probe axis)

Dynamic: 0.001W/kg to > 100W/kg;

Range Linearity: 0.25 dB

Surface: 0.2 mm repeatability in air and liquids

Dimensions Overall length: 330 mm

Tip length: 16 mm

Body diameter: 8 mm

Tip diameter: 2.6 mm

Distance from probe tip to dipole centers: <1.5 mm

Application General dosimetric up to 6 GHz

Compliance tests of GSM 5.0' LTE Mobile phones

Fast automatic scanning in arbitrary phantoms

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique, with printed resistive lines on ceramic substrates.




Test Report	16071000-FCC-H
Page	11 of 123

It is connected to the KRC box on the robot arm and provides an automatic detection of the phantom surface. The 3D file of the phantom is include in OpenSAR software. The Video Positioning System allow the system to take the automatic reference and to move the probe safely and accurately on the phantom.

E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN50361; CEI/IEC 62209 and IEEE 1528 std, with CALISAR, SATIMO proprietary calibration system. The calibration is performed with the technique using reference waveguide.

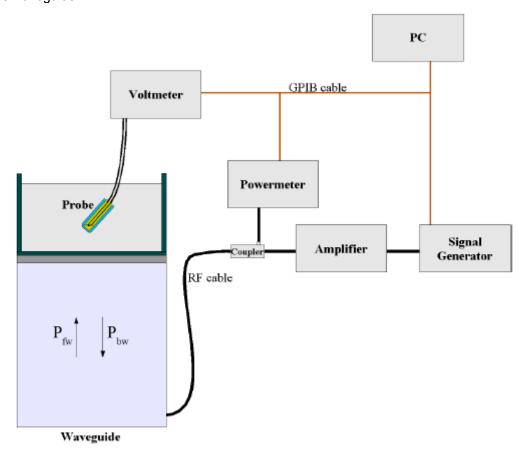

 $SAR = \frac{4\left(P_{fw} - P_{bw}\right)}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$

Where:

P_{fw} = Forward Power P_{bw} = Backward Power

a and b = Waveguide dimensions

 δ = Skin depth

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.



Test Report	16071000-FCC-H
Page	12 of 123

Each probe is calibrated according to a dosimetric assessment procedure described in SAR standard with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 0.8 GHz, and in a waveguide above 0.8 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. E-field correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue.

SAM Phantom

The SAM Phantom SAM29 is constructed of a fiberglass shell ntegrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE 1528 and CENELEC EN62209-1, IEC62209-2.

The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region.

A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness: 2 0.2 mm Filling Volume: Approx. 25 liters

Dimensions (H x L x W): 810 x 1000 x 500 mm

Liquid is filled to at least 15mm from the bottom of Phantom.





Test Report	16071000-FCC-H
Page	13 of 123

Device Holder

In combination with the Generic Twin Phantom V3.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations [10]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Data Evaluation

The OPENSAR software automatically executes the following procedure to calculate the field units from the microvolt readings at the probe connector. The parameters used in the valuation are stored in the configuration modules of the software:

Probe Parameters	- Sensitivity	Norm _i
	- Conversion factor	ConvFi
	- Diode compression point Dcpi	
Device Parameter	- Frequency	f
	- Crest factor	cf
Media Parametrs	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can either be found in the component documents or be imported into the software from the configuration files issued for the OPENSAR components.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Where V_i = Compensated signal of channel i (i = x, y, z)

 U_i = Input signal of channel i (i = x, y, z)

cf = Crest factor of exciting field(DASY parameter)

dcp_i = Diode compression point (DASY parameter)



Test Report	16071000-FCC-H
Page	14 of 123

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$

H-field probes: $H_i = \sqrt{Vi} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$

Where V_i = Compensated signal of channel i (i = x, y, z)

 $Norm_i$ = Sensor sensitivity of channel i (i = x, y, z)

μV/(V/m)2 for E0field Probes

ConvF= Sensitivity enhancement in solution

a_{ii} = Sensor sensitivity factors for H-field probes

f = Carrier frequency (GHz)

E_i = Electric field strength of channel i in V/m
 H_i = Magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{ss} - \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

 $SAR = E_{tot}^2 - \frac{\sigma}{\rho \cdot 1000}$

where SAR = local specific absorption rate in mW/g

 E_{tot} = total field strength in V/m

 σ = conductivity in [mho/m] or [siemens/m]

 ρ = equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

 $P_{pus} = \frac{E_{ss}^2}{3770}$ or $P_{pus} = H_{ss}^2 \cdot 37.7$

where P_{pwe} = Equivalent power density of a plane wave in mW/cm2

 E_{tot} = total electric field strength in V/m H_{tot} = total magnetic field strength in A/m



Test Report	16071000-FCC-H
Page	15 of 123

SAR Evaluation - Peak Spatial - Average

The procedure for assessing the peak spatial-average SAR value consists of the following steps

Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in OPENSAR software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

· Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more then one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

· Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

SAR Evaluation – Peak SAR

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1529 standard. It can be conducted for 1 g and 10 g. The OPENSAR system allows evaluations that combine measured data and robot positions, such

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maximum searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.



Test Report	16071000-FCC-H
Page	16 of 123

Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the fourth order least square polynomial method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

Definition of Reference Points

Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 6.1 Close-up side view of ERP's



Figure 6.2 Front, back and side view of SAM

Device Reference Points

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Fig. 6.3). The "test device reference point" is than located at the same level as the center of the ear reference point. The test device is positioned so that the "vertical centerline" is bisecting the front surface of the device at it's top and bottom edges, positioning the "ear reference point" on the outer surface of both the left and right head phantoms on the ear reference point [5].




Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points



Test Report	16071000-FCC-H
Page	17 of 123

Test Configuration – Positioning for Cheek / Touch

1. Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure below), such that the plane defined by the vertical center line and the horizontal line of the device is approximately parallel to the sagittal plane of the phantom



Figure 7.1 Front, Side and Top View of Cheek/Touch Position

- 2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
- 3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- 4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
- 5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure below.




Figure 7.2 Side view w/ relevant markings



Test Report	16071000-FCC-H
Page	18 of 123

Test Configuration - Positioning for Ear / 15° Tilt

With the test device aligned in the Cheek/Touch Position":

- 1. While maintaining the orientation of the device, retracted the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
- 2. Rotate the device around the horizontal line by 15 degrees.
- 3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure below).

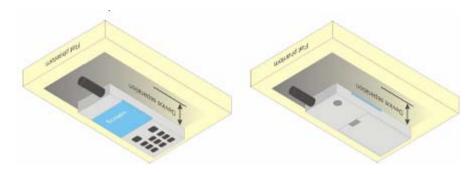


Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position

Test Position – Body Configurations

Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.0 cm or holster surface and the flat phantom to 0 cm.





Test Report	16071000-FCC-H
Page	19 of 123

5 ANSI/IEEE C95.1 – 1999 RF EXPOSURE LIMIT

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1 Human Exposure Limits

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIROMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Brain	1.60	8.00
SPATIAL AVERAGE SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00

¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.



Test Report	16071000-FCC-H
Page	20 of 123

6 SYSTEM AND LIQUID VERIFICATION

Basic SAR system validation requirements

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components. Reference dipoles are used with the required tissue-equivalent media for system validation,

The detailed system validation results are maintained by each test laboratory, which are normally not required for equipment approval. Only a tabulated summary of the system validation status, according to the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters is required in the SAR report.

System Setup

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

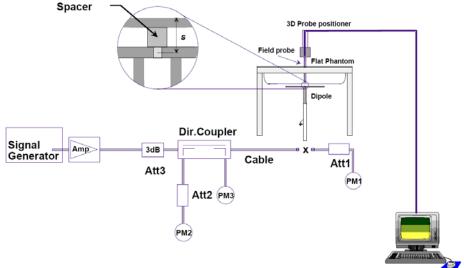


Fig 8.1 System Setup for System Evaluation

- 1. Signal Generator
- 2. Amplifier
- 3. Directional Coupler
- 4. Power Meter
- 5. Calibrated Dipole

Note: The output power on dipole port must be calibrated to 30 dBm (1000 mW) before dipole is connected.



Test Report	16071000-FCC-H
Page	21 of 123

System Verification Results

Prior to SAR assessment, the system is verified to 10% of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in ANNEX A

Target and measurement SAR after Normalized (1W):

Measurement Date	Frequency (MHz)	Liquid Type (head/body)	Target SAR1g (W/kg)	Measured SAR1g (W/kg)	Normalized SAR1g (W/kg)	Deviation (%)
Aug 22th,2016	835	head	9.65	0.0962	9.62	-0.31
Aug 22th,2016	835	body	9.98	0.0995	9.95	-0.30
Aug 24th,2016	1800	head	38.44	0.3848	38.48	0.10
Aug 24th,2016	1800	body	39.59	0.3961	39.61	0.05
Aug 26th,2016	1900	head	39.52	0.3957	39.57	0.13
Aug 26th,2016	1900	body	42.88	0.4292	42.92	0.09
Aug 29th,2016	2450	head	24.17	0.248	24.8	2.61
Aug 29th,2016	2450	body	56.05	0.551	55.1	-0.95

Note: system check input power 10mW



Test Report	16071000-FCC-H
Page	22 of 123

Liquid Verification

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

KDB 865664 recommended Tissue Dielectric Parameters

The head and body tissue parameters given in this below table should be used to measure the SAR of transmitters operating in 100 MHz to 6 GHz frequency range. The tissue dielectric parameters of the tissue medium at the test frequency should be within the tolerance required in this document. The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

The head tissue dielectric parameters recommended by IEEE Std 1528-2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in 1528 are derived from tissue dielectric parameters computed from the 4-Cole-Cole equations described above and extrapolated according to the head parameters specified in 1528.



Test Report	16071000-FCC-H
Page	23 of 123

Liquid Confirmation Result:

1. Measured Head liquid Properties

Date	Freq.(MHz)	Liquid Parameters	Measured	Target	Delta (%)	Limit±(%)
A 001 0040 005	Relative Permittivity (εr):	41.2	41.5	-0.72	5	
Aug 22th,2016	835	Conductivity (o):	0.91	0.90	1.11	5
Aug 24th,2016 1800	Relative Permittivity (εr):	39.96	40.0	-0.10	5	
	Conductivity (σ):	1.42	1.40	1.43	5	
		Relative Permittivity (εr):	40.02	40.0	0.05	5
Aug 26th,2016 1900	Conductivity (o):	1.37	1.40	-2.14	5	
Aug 29th,2016 2450	Relative Permittivity (εr):	40.42	39.2	0.26	5	
	Conductivity (σ):	1.77	1.80	0.51	5	

2. Measured Body liquid Properties

Date	Freq.(MHz)	Liquid Parameters	Measured	Target	Delta (%)	Limit±(%)
4 004 0040	Relative Permittivity (εr):	55.17	55.20	-0.05	5	
Aug 22th,2016	835	Conductivity (σ):	0.99	0.97	2.06	5
		Relative Permittivity (εr):	53.26	53.3	-0.08	5
Aug 24th,2016 1800	Conductivity (o):	1.55	1.52	1.97	5	
		Relative Permittivity (εr):	53.29	53.3	-0.02	5
Aug 26th,2016 1900	Conductivity (σ):	1.51	1.52	-0.66	5	
Aug 29th,2016 2450	Relative Permittivity (εr):	52.78	52.70	0.31	5	
	Conductivity (o):	1.97	1.95	-0.91	5	





Test Report	16071000-FCC-H
Page	24 of 123


System Verification Plots Product Description: Dipole Model: SID835

Test Date: Aug 22th,2016

Medium(liquid type)	HSL_835
Frequency (MHz)	835.000000
Relative permittivity (real part)	41.2
Conductivity (S/m)	0.91
Input power	10mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.90
Sensor-surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.470000
SAR 10g (W/Kg)	0.070343
SAR 1g (W/Kg)	0.096232





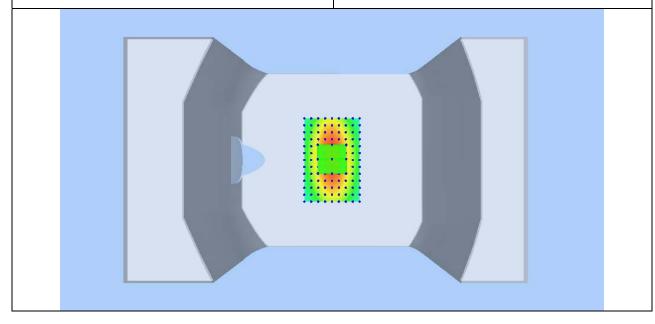



Test Report	16071000-FCC-H
Page	25 of 123

Product Description: Dipole

Model: SID835

Z = 4.0

SAVE Cancel


Test Date: Aug 22th, 2016


1031 Dato: 11ag 22tii, 2010	
Medium(liquid type)	MSL_835
Frequency (MHz)	835.000000
Relative permittivity (real part)	55.17
Conductivity (S/m)	0.99
Input power	10mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.97
Sensor-surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.60000
SAR 10g (W/Kg)	0.074246
SAR 1g (W/Kg)	0.099501

SAR 1g (W/Kg)

0 X (mm) 0 Y (mm)





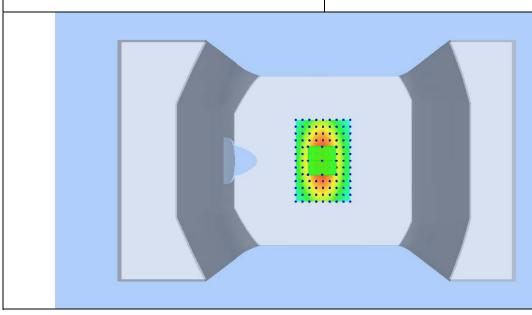


Zoom In/Out





Test Report	16071000-FCC-H
Page	26 of 123

Test Date: Aug 24th,2016

165t Bato. Mag 2 Itilizo 16	
Medium(liquid type)	HSL_1800
Frequency (MHz)	1800.000
Relative permittivity (real part)	39.96
Conductivity (S/m)	1.42
Input power	10mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.01
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.060000
SAR 10g (W/Kg)	0.114834
SAR 1g (W/Kg)	0.384827





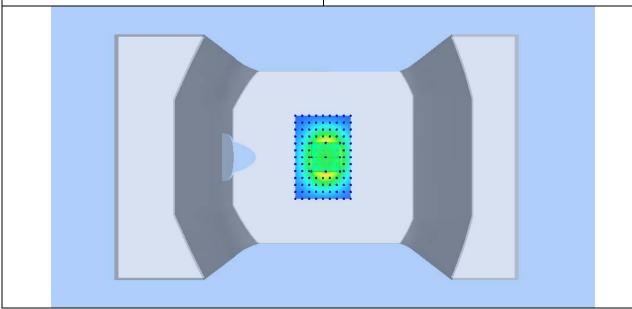






Test Report	16071000-FCC-H
Page	27 of 123

Test Date: Aug 24th,2016

103t Buto. Mag 2 Itilizo 10	
Medium(liquid type)	MSL_1800
Frequency (MHz)	1800.000
Relative permittivity (real part)	53.26
Conductivity (S/m)	1.55
Input power	10mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.05
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.66000
SAR 10g (W/Kg)	0.154652
SAR 1g (W/Kg)	0.396102





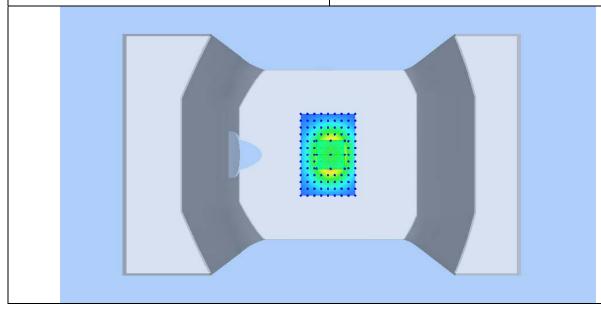






Test Report	16071000-FCC-H
Page	28 of 123

Test Date: Aug 26th,2016

rest bate. Mag 20th/2010	
Medium(liquid type)	HSL_1900
Frequency (MHz)	1900.000
Relative permittivity (real part)	40.02
Conductivity (S/m)	1.37
Input power	10mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.26
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.510000
SAR 10g (W/Kg)	0.202548
SAR 1g (W/Kg)	0.395702





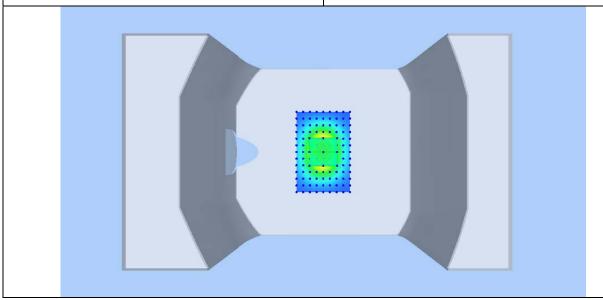






Test Report	16071000-FCC-H
Page	29 of 123

Test Date: Aug 26th,2016

105t Bato. Mag 20th 2010	
Medium(liquid type)	MSL_1900
Frequency (MHz)	1900.000
Relative permittivity (real part)	53.29
Conductivity (S/m)	1.51
Input power	10mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.32
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.200000
SAR 10g (W/Kg)	0.235675
SAR 1g (W/Kg)	0.429242





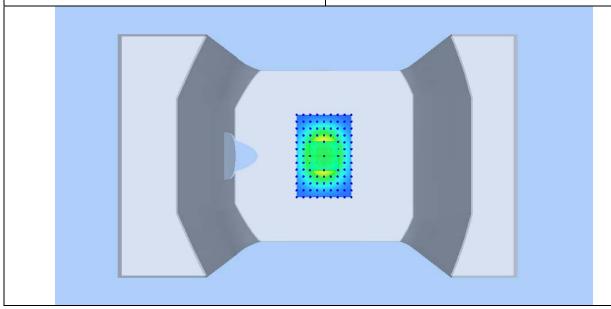




Test Report	16071000-FCC-H
Page	30 of 123


Test mode : 2450MHz


Product Description: Validation

Model: Dipole SID2400 Test Date: Aug 29, 2016

Test Date. Aug 29, 2010	
Medium(liquid type)	HSL_2450
Frequency (MHz)	2450.000
Relative permittivity (real part)	40.42
Conductivity (S/m)	1.77
Input power	10mW
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	2.22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-2.60000
SAR 10g (W/Kg)	0.248317
SAR 1g (W/Kg)	0.451674





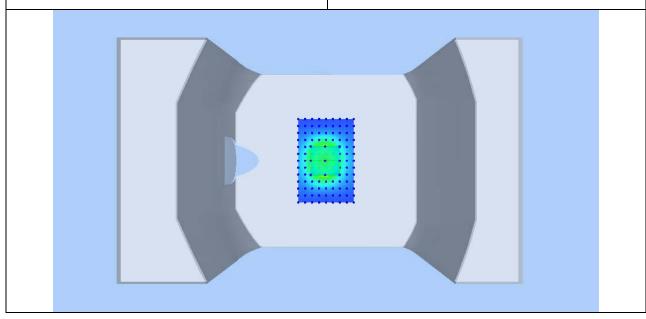





Test Report	16071000-FCC-H
Page	31 of 123


Product Description: Dipole

Model: SID2450 Test Date: Aug 29, 2016

103t Date. Aug 27, 2010	
Medium(liquid type)	MSL_2450
Frequency (MHz)	2450.00
Relative permittivity (real part)	52.78
Conductivity (S/m)	1.97
Input power	10mW
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	2.29
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	3.300000
SAR 10g (W/Kg)	0.320642
SAR 1g (W/Kg)	0.551273





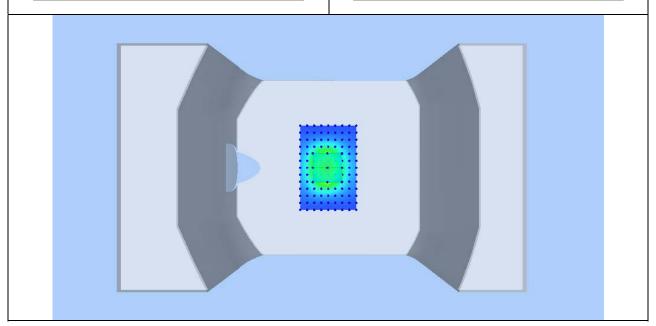



Test Report	16071000-FCC-H
Page	32 of 123

7 <u>UNCERTAINTY ASSESSMENT</u>

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table below:

Uncertainty Distribution	Normal	Rectangle	Triangular	U Shape
Multi-plying Factor ^(a)	1/k ^(b)	1 / √3	1 / √6	1 / √2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type -sum-by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The COMOSAR Uncertainty Budget is show in below table:

The following table includes the uncertainty table of the IEEE 1528 from 300MHz to 3GHz and KDB865664 to 6GHZ too, The values are determined by Satimo.



Test Report	16071000-FCC-H
Page	33 of 123

UNCERTAINTY F	OR S	YST	EM F	PERF	ORMA	ANCE	CHEC	K		
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	ci (1 g)	ci (10 g)	1 g ui (± %)	10 g ui (± %)	Vi		
	Measurement System									
Probe Calibration	5,8	N	1	1	1	5,8	5,8	∞		
Axial Isotropy	3,5	R	√3	(1- cp)1/2	(1- cp)1/2	1,42887	1,42887	∞		
Hemispherical Isotropy	5,9	R	√3	√Ср	√Ср	2,40866	2,40866	∞		
Boundary Effect	1	R	√3	1	1	0,57735	0,57735	∞		
Linearity	4,7	R	√3	1	1	2,71355	2,71355	∞		
System Detection Limits	1	R	√3	1	1	0,57735	0,57735	∞		
Readout Electronics	0,5	N	1	1	1	0,5	0,5	∞		
Response Time	0	R	√3	1	1	0	0	∞		
Integration Time	1,4	R	√3	1	1	0,80829	0,80829	∞		
RF Ambient Conditions	3	R	√3	1	1	1,73205	1,73205	∞		
Probe Positioner Mechanical Tolerance	1,4	R	√3	1	1	0,80829	0,80829	∞		
Probe Positioning with respect to Phantom Shell	1,4	R	√3	1	1	0,80829	0,80829	∞		
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	2,3	R	√3	1	1	1,32791	1,32791	_∞		
Dipole										
Dipole Axis to Liquid Distance	2	N	√3	1	1	1,1547	1,1547	N-1		
Input Power and SAR drift measurement	5	R	√3	1	1	2,88675	2,88675	∞		
Phantom and Tissue Parameters										
Phantom Uncertainty (shape and thickness tolerances)	4	R	√3	1	1	2,3094	2,3094	∞		
Liquid Conductivity - deviation from target values	5	R	√3	0,64	0,43	1,84752	1,2413	∞		
Liquid Conductivity - measurement uncertainty	4	N	1	0,64	0,43	2,56	1,72	М		
Liquid Permittivity - deviation from target values	5	R	√3	0,6	0,49	1,73205	1,41451	∞		
Liquid Permittivity - measurement uncertainty	5	N	1	0,6	0,49	3	2,45	М		
Combined Standard Uncertainty		RSS				9,6671	9,1645			
Expanded Uncertainty (95% CONFIDENCE INTERVAL)		k				19,3342	18,3290			



Test Report	16071000-FCC-H
Page	34 of 123

UNCERTAINTY EVALUATION FOR HANDSET SAR TEST								
Uncontainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i (1 g)	c _i (10 g)	1 g u _i (± %)	10 g u _i (± %)	Vi
Uncertainty Component								
Probe Calibration	5,8	N	1	1	1	5,8	5,8	∞
	3,5	R	√3	$(1-c_p)^{1/2}$		1,43	1,43	∞
Axial Isotropy	-	R	√3	√C _p				∞
Hemispherical Isotropy	5,9				√C _p	2,41	2,41	
Boundary Effect	1	R	√3	1	1	0,58	0,58	∞ -
Linearity	4,7	R	√3	1	1	2,71	2,71	∞
System Detection Limits	1	R	√3	1	1	0,58	0,58	∞
Readout Electronics	0,5	N	1	1	1	0,50	0,50	∞
Response Time	0	R	√3	1	1	0,00	0,00	∞
Integration Time	1,4	R	√3	1	1	0,81	0,81	∞
RF Ambient Conditions	3	R	√3	1	1	1,73	1,73	∞
Probe Positioner Mechanical Tolerance	1,4	R	√3	1	1	0,81	0,81	8
Probe Positioning with respect to Phantom Shell	1,4	R	√3	1	1	0,81	0,81	8
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	2,3	R	√3	1	1	1,33	1,33	∞
Test sample Related				•				
Test Sample Positioning	2,6	N	1	1	1	2,60	2,60	N-1
Device Holder Uncertainty	3	N	1	1	1	3,00	3,00	N-1
Output Power Variation - SAR drift measurement	5	R	√3	1	1	2,89	2,89	8
Phantom and Tissue Parameters								
Phantom Uncertainty (shape and thickness tolerances)	4	R	√3	1	1	2,31	2,31	8
Liquid Conductivity - deviation from target values	5	R	√3	0,64	0,43	1,85	1,24	8
Liquid Conductivity - measurement uncertainty	4	N	1	0,64	0,43	2,56	1,72	М
Liquid Permittivity - deviation from target values	5	R	√3	0,6	0,49	1,73	1,41	8
Liquid Permittivity - measurement uncertainty	5	N	1	0,6	0,49	3,00	2,45	М
Combined Standard Uncertainty		RSS				10,39	9,92	
Expanded Uncertainty (95% CONFIDENCE INTERVAL)		k				20,78	19,84	



Test Report	16071000-FCC-H
Page	35 of 123

8 TEST INSTRUMENT

TEST INSTRUMENT	TATION				
Name of	Manufacturer	Type/Model	Serial Number	Calibration	Calibration
Equipment		31		Date	Due
PC	Compaq	PV 3.06GHz	375052-AA1	N/A	N/A
Signal Generator	Agilent	8665B-008	3744A10293	05/15/2016	05/15/2017
MultiMeter	Keithley	MiltiMeter 2000	1259033	06/21/2016	06/21/2017
S-Parameter Network Analyzer	Agilent	8753ES	US39173518	08/04/2016	08/04/2017
Wireless Communication Test Set	R&S	CMU200	111078	07/22/2016	07/22/2017
Power Meter	HP	437B	3038A03648	05/17/2016	05/17/2017
E-field PROBE	MVG	SSE2	SN 27/15 EPGO262	07/09/2016	07/09/2017
DIPOLE 835	SATIMO	SID 835	SN 18/11 DIPC 150	06/24/2016	06/18/2017
DIPOLE 1800	SATIMO	SID 1800	SN 18/11 DIPF 152	06/24/2016	06/18/2017
DIPOLE 1900	SATIMO	SID 1900	SN 18/11 DIPG 153	06/24/2016	06/18/2017
DIPOLE 2450	SATIMO	SID 2450	SN 31/10 DIPJ138	06/24/2016	06/18/2017
Communication Antenna	SATIMO	ANTA3	SN 20/11 ANTA 3	06/21/2016	06/20/2017
Laptop POSITIONING DEVICE	SATIMO	LSH15	SN 24/11 LSH15	N/A	N/A
e\POSITIONING DEVICE	SATIMO	MSH73	SN 24/11 MSH73	N/A	N/A
DUMMY PROBE	ANTENNESSA		DP41	N/A	N/A
SAM PHANTOM	SATIMO	SAM87	SN 24/11 SAM87	N/A	N/A
Elliptic Phantom	SATIMO	ELLI20	SN 20/11ELLI20	N/A	N/A
PHANTOM TABLE	SATIMO	N/A	N/A	N/A	N/A
6 AXIS ROBOT	KUKA	KR5	949272	N/A	N/A
high Power Solid State Amplifier (80MHz~1000MHz)	Instruments for Industry	CMC150	M631-0408	05/16/2016	05/16/2017
Medium Power Solid State Amplifier (0.8~4.2GHz)	Instruments for Industry	S41-25	M629-0408	06/28/2016	06/28/2017
Wave Tube Amplifier 4- 8 GHz at 20Watt	Hughes Aircraft Company	1277H02F000	81	08/22/2016	08/22/2017



Test Report	16071000-FCC-H
Page	36 of 123

9 OUTPUT POWER VERIFICATION

Test Condition:

Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power.

The base station simulator was connected to the antenna terminal.

2 Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz - 40GHz is $\pm 1.5dB$.

3 Environmental Conditions

Temperature 23°C
Relative Humidity 53%
Atmospheric Pressure 1019mbar

4 Test Date : Aug 22th,2016 Tested By : Wiky Jam

Test Procedures:

Mobile Phone radio output power measurement

- 1. The transmitter output port was connected to base station emulator.
- 2. Establish communication link between emulator and EUT and set EUT to operate at maximum output power all the time.
- 3. Select lowest, middle, and highest channels for each band and different possible test mode.
- 4. Measure the conducted peak burst power and conducted average burst power from EUT antenna port.

Other radio output power measurement

The output power was measured using power meter at low, mid, and hi channels.

Source-based Time Averaged Burst Power Calculation:

For TDMA, the following duty cycle factor was used to calculate the source-based time average power

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Duty cycle factor	-9.03 dB	-6.02 dB	-4.26 dB	-3.01 dB
Crest Factor	8	4	2.66	2

Remark: <u>Time slot duty cycle factor = 10 * log (1 / Time Slot Duty Cycle)</u>

Source based time averaged power = Maximum burst averaged power (1 Uplink) – 9.03 dB Source based time averaged power = Maximum burst averaged power (2 Uplink) – 6.02 dB Source based time averaged power = Maximum burst averaged power (4 Uplink) – 3.01 dB



Test Report	16071000-FCC-H
Page	37 of 123

Test Result:

GSM:

Burst Average Power (dBm);								
Band		GSN	1850		PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	1	1850.2	1880	1909.8	1
GSM Voice (1 uplink),GMSK	31.76	32.08	32.34	32±1	29.55	29.46	29.6	29±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	31.75	32.07	32.32	32±1	29.38	29.30	29.41	29±1
GPRS Multi-Slot Class 10 (2 uplink),GMSK	30.92	31.27	31.66	31±1	27.62	28.53	28.63	28±1
GPRS Multi-Slot Class 12 (4 uplink),GMSK	27.95	28.26	28.12	28±1	25.52	25.54	25.64	25±1
EGPRS Multi-Slot Class 8 (1 uplink) GMSK MCS1	31.69	32.01	32.25	32±1	29.13	29.04	29.1	29±1
EGPRS Multi-Slot Class 10 (2 uplink) GMSK MCS1	30.85	31.21	31.61	31±1	28.29	28.21	28.34	28±1
EGPRS Multi-Slot Class 12 (4 uplink) GMSK MCS1	27.89	28.19	28.57	28±1	25.23	25.04	25.17	25±1

Remark:

GPRS, CS1 coding scheme.
EGPRS, MCS1 coding scheme.
Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link
Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link
Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link



Test Report	16071000-FCC-H
Page	38 of 123

Source Based time Average Power (dBm)								
Band		G	SM850			ı	PCS1900	
Channel	128	190	251	Time Average factor	512	661	810	Time Average factor
Frequency (MHz)	824.2	836.6	848.8	1	1850.2	1880	1909.8	1
GSM Voice (1 uplink),GMSK	22.73	23.05	23.31	-9.03	20.52	20.43	20.57	-9.03
GPRS Multi-Slot Class 8 (1 uplink),GMSK	22.72	23.04	23.29	-9.03	20.35	20.27	20.38	-9.03
GPRS Multi-Slot Class 10 (2 uplink),GMSK	24.90	25.25	25.64	-6.02	21.60	22.51	22.61	-6.02
GPRS Multi-Slot Class 12 (4 uplink),GMSK	24.94	25.27	25.65	-3.01	22.51	22.53	22.63	-3.01
EGPRS Multi-Slot Class 8 (1 uplink) GMSK MCS1	22.66	22.98	23.22	-9.03	20.10	20.01	20.07	-9.03
EGPRS Multi-Slot Class 10 (2 uplink) GMSK MCS1	24.83	25.19	25.59	-6.02	22.27	22.19	22.32	-6.02
EGPRS Multi-Slot Class 12 (4 uplink) GMSK MCS1	24.88	25.18	25.56	-3.01	22.22	22.03	22.16	-3.01

Remark

Time average factor = 1 uplink , $10*\log(1/8)=-9.03dB$, 2 uplink , $10*\log(2/8)=-6.02dB$, 4 uplink , $10*\log(4/8)=-3.01dB$ Source based time average power = Burst Average power + Time Average factor

Note: 1. due to the source based time average power; Body SAR was performed at GPRS Multi-slot class 12.



Test Report	16071000-FCC-H
Page	39 of 123

WCDMA BAND V

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
Configuration	4132	826.4	22.76	23±1
RMC	4175	835	22.89	23±1 23±1
12.2kbps	4233	846.6	22.86	23±1 23±1
	4132	826.4	21.59	21.5±1
HSDPA	4175	835	21.57	21.5±1
Subtest1	4233	846.6	21.59	21.5±1
	4132	826.4	21.56	21.5 ± 1
HSDPA	4175	835	21.59	21.5±1 21.5±1
Subtest2	4233	846.6	21.54	21.5±1
	4132	826.4	21.47	21.5±1
HSDPA	4175	835	21.32	21.5 ± 1
Subtest3	4233	846.6	21.63	21.5 ± 1
	4132	826.4	21.6	21.5±1 21.5±1
HSDPA	4132	835	21.63	21.5±1 21.5±1
Subtest4	4233	846.6	21.69	21.5 ± 1
	4132	826.4	21.61	21.5±1 21.5±1
HSUPA	4175	835	21.04	21.5±1 21.5±1
Subtest1	4233	846.6	21.59	21.5±1 21.5±1
	4132	826.4	21.52	21.5±1 21.5±1
HSUPA	4175	835	21.68	21.5±1 21.5±1
Subtest2	4233	846.6	21.47	21.5±1 21.5±1
	4132	826.4	21.63	21.5±1 21.5±1
HSUPA	4175	835	21.59	21.5±1 21.5±1
Subtest3	4233	846.6	21.49	21.5±1 21.5±1
	4132	826.4	21.49	21.5±1 21.5±1
HSUPA	4132	835	21.62	21.5±1 21.5±1
Subtest4	4175	846.6	21.66	21.5±1 21.5±1
				21.5±1 21.5±1
HSUPA	4132	826.4	21.55 21.53	
Subtest5	4175	835	+	21.5±1
	4233	846.6	21.61	21.5±1

Note: 1.Due to the maximum SAR for 12.2kbps RMC<75% of the SAR limit, SAR was performed at RMC 12.2kbps.



Test Report	16071000-FCC-H
Page	40 of 123

WCDMA Band II:

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
DNAC	9262	1852.4	22.57	22±1
RMC 12.2kbps	9400	1880	22.67	22±1
12.28005	9538	1907.6	22.57	22±1
LICDDA	9262	1852.4	21.85	21.5±1
HSDPA Subtest1	9400	1880	21.86	21.5±1
Subtest1	9538	1907.6	21.79	21.5±1
LICDDA	9262	1852.4	21.81	21.5±1
HSDPA Subtest2	9400	1880	21.89	21.5±1
Subtest2	9538	1907.6	21.85	21.5±1
LICDDA	9262	1852.4	21.86	21.5±1
HSDPA Subtest3	9400	1880	21.88	21.5±1
Subtests	9538	1907.6	21.82	21.5±1
LICEDA	9262	1852.4	21.81	21.5±1
HSDPA Subtest4	9400	1880	21.8	21.5±1
Subtest4	9538	1907.6	21.86	21.5±1
LICLIDA	9262	1852.4	21.79	21.5±1
HSUPA Subtest1	9400	1880	21.75	21.5±1
Subtest1	9538	1907.6	21.73	21.5±1
LICLIDA	9262	1852.4	21.83	21.5±1
HSUPA Subtest2	9400	1880	21.82	21.5±1
Subtest2	9538	1907.6	21.84	21.5±1
LICLIDA	9262	1852.4	21.73	21.5±1
HSUPA Subtest3	9400	1880	21.71	21.5±1
Subtests	9538	1907.6	21.71	21.5±1
LICLIDA	9262	1852.4	21.73	21.5±1
HSUPA Subtest4	9400	1880	21.72	21.5±1
Jubite314	9538	1907.6	21.73	21.5±1
LICLIDA	9262	1852.4	21.75	21.5±1
HSUPA Subtest5	9400	1880	21.76	21.5±1
Juniesis	9538	1907.6	21.78	21.5±1

Note: 1.Due to the maximum SAR for 12.2kbps RMC<75% of the SAR limit, SAR was performed at RMC 12.2kbps.



Test Report	16071000-FCC-H
Page	41 of 123

WCDMA Band \overline{IV} :

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
	1313	1712.6	23.21	23±1
RMC	1413	1732.6	23.18	23±1
12.2kbps	1512	1752.4	23.20	23±1
LICE DA	1313	1712.6	22.15	22.3±1
HSDPA Subtest1	1413	1732.6	22.16	22.3±1
Subtest1	1512	1752.4	22.31	22.3±1
LICERA	1313	1712.6	22.26	22.3±1
HSDPA Subtest2	1413	1732.6	22.28	22.3±1
Sublestz	1512	1752.4	22.16	22.3±1
LICERA	1313	1712.6	22.35	22.3±1
HSDPA Subtest3	1413	1732.6	22.18	22.3±1
Subtests	1512	1752.4	22.24	22.3±1
LICERA	1313	1712.6	22.26	22.3±1
HSDPA Subtest4	1413	1732.6	22.15	22.3±1
Sublest4	1512	1752.4	22.15	22.3±1
LICLIDA	1313	1712.6	22.16	22.3±1
HSUPA Subtest1	1413	1732.6	22.35	22.3±1
Subtest1	1512	1752.4	22.29	22.3±1
LICLIDA	1313	1712.6	22.34	22.3±1
HSUPA Subtest2	1413	1732.6	22.35	22.3±1
Subtest2	1512	1752.4	22.16	22.3±1
LICLIDA	1313	1712.6	22.25	22.3±1
HSUPA Subtest3	1413	1732.6	22.18	22.3±1
Subtests	1512	1752.4	22.35	22.3±1
LICLIDA	1313	1712.6	22.36	22.3±1
HSUPA Subtest4	1413	1732.6	22.38	22.3±1
Juniesi4	1512	1752.4	22.25	22.3±1
LICLIDA	1313	1712.6	22.34	22.3±1
HSUPA Subtest5	1413	1732.6	22.36	22.3±1
Subtests	1512	1752.4	22.39	22.3±1

Note: 1.Due to the maximum SAR for 12.2kbps RMC<75% of the SAR limit, SAR was performed at RMC 12.2kbps.



Test Report	16071000-FCC-H
Page	42 of 123

WIFI Mode (2.4G)

Mode	Channel number	Frequency (MHz)	Data rate(Mbps)	Average Output Power(dBm)	Average Tune up Iimited(dBm)
	1	2412	1	14.31	13.5±1
802.11b	6	2437	1	13.77	13.5±1
	11	2462	1	14.13	13.5±1
	1	2412	6	11.10	10.5±1
802.11g	6	2437	6	12.80	13.5±1
	11	2462	6	13.33	13.5±1
	1	2412	MCS0	10.83	10.5±1
802.11n(HT20)	6	2437	MCS0	11.01	10.5±1
	11	2462	MCS0	11.26	10.5±1
	3	2422	MCS0	10.37	10.5±1
802.11n(HT40)	6	2437	MCS0	10.39	10.5±1
	9	2452	MCS0	10.04	10.5±1

Bluetooth Measurement Result

Mode	Frequency (MHz)	Output Power(dBm)	Tune up limited(dBm)	
	2402	4.454	4±1	
GFSK	2441	4.165	4±1	
	2480	3.695	3.5±1	
	2402	3.605	3.5±1	
π /4DQPSK	2441	3.979	3.5±1	
	2480	3.505	3.5±1	
	2402	3.65	3.5±1	
8DPSK	2441	3.987	3.5±1	
	2480	3.563	3.5±1	

BLE Measurement Result

Channel number	Frequency (MHz)	Output Power(dBm)	Tune up limited(dBm)
0	2402	-3.681	-3±1
19	2440	-3.093	-3±1
39	2480	-3.473	-3±1


Note: 1. Both WIFI and BT power was test and only Maximum Power was provide here.

2. SAR Test Exclusion Threshold for WIFI&BT is about 9.6mW, the maximum tune up power of WIFI is 14.5dBm=28.18mW, BT is 5dBm=3.16mW, no stand-alone SAR is required for BT.



Test Report	16071000-FCC-H
Page	43 of 123

Antenna Separation Information:

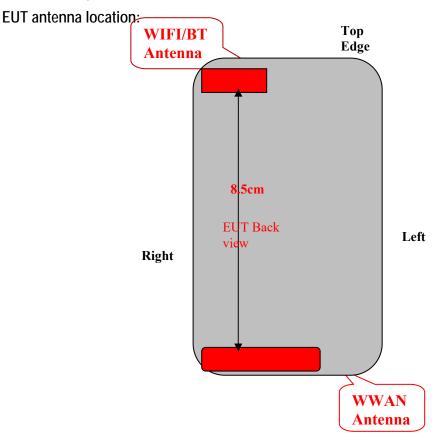

Test position consideration:

Test position	rest position consideration.								
	Distance of EUT antenna-to-edge/surface(mm),								
			est distance:10mr	n					
Antennas	Antennas Back side Front side Left Edge Right Edge Top Edge Bottom Edge								
WWAN	2	2	2	2	98	2			
WLAN	2	2	43	2	2	100			
Bluetooth	2	2	43	2	2	100			

	Test distance:10mm								
Antennas	Back side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge			
WWAN	YES	YES	YES	YES	NO	YES			
WLAN	YES	YES	NO	YES	YES	NO			
Bluetooth	NO	NO	NO	NO	NO	NO			

Note:

- 1. Head/Body-worn/Hotspot mode SAR assessments are required.
- 2. Referring to KDB 941225 D06v02, when the overall device length and width are \geq 9cm * 5cm, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
- 3. Per KDB 447498 D01v05r02, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for head SAR, 10 mm for hotspot SAR, and 10 mm for body-worn SAR.
- 4. BT SAR is not required due to the low power.



Test Report	16071000-FCC-H
Page	44 of 123

10 SAR TEST RESULTS

Test Condition:

1.	SAR Measurement		
	The distance between the EUT a	and the antenna of the emulator is more	than 50 cm and the output power radiated from
		30 dB less than the output power of EU	
2	Measurement Uncertainty: See	page 34 for detail	
3	Environmental Conditions	Temperature	23°C
		Relative Humidity	53%
		Atmospheric Pressure	1019mbar
4	Test Date :Aug 22th,2016~ Aug	29th,2016	

Generally Test Procedures:

- 1. Establish communication link between EUT and base station emulation by air link.
- 2. Place the EUT in the selected test position. (Cheek, tilt or flat)
- 3. Perform SAR testing at middle or highest output power channel under the selected test mode. If the measured 1-g SAR is ≤ 0.8 W/kg, then testing for the other channel will not be performed.
- 4. When SAR is<0.8W/kg, no repeated SAR measurement is required

For WCDMA test:

- 1. KDB941225 D01-Body SAR is not required for HSDPA when the average output of each RF channel with HSDPA active is less than 0.25dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC<75% of the SAR limit.
- KDB941225 D01-Body SAR is not required for handset with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 0.25dB higher than that measure without HSUPA/HSDPA using 12.2kbps RMC AND THE maximum SAR for 12.2kbps RMC is<75% of the SAR limit



Test Report	16071000-FCC-H
Page	45 of 123

SAR Summary Test Result:

GSM850

Date of Measur	Date of Measured : Aug 22th,2016 Body /Hotspot Separation Distance:1.0cm							
	g 		SAR	Limit	Power Drift	Maximum Turn-up	measured output power	Scaled Maximum
Position	Channel	Mode	1g(W/kg)	(W/kg)	(%)	Power(dBm)	(dBm)	SAR(W/kg)
Right Head Cheek	Mid	GSM voice	0.552	1.6	3.62	33	32.08	0.68
Right Head Tilt	Mid	GSM voice	0.283	1.6	-0.45	33	32.08	0.35
Left Head Cheek	Mid	GSM voice	0.521	1.6	-0.40	33	32.08	0.64
Left Head Tilt	Mid	GSM voice	0.235	1.6	0.33	33	32.08	0.29
Body Front-side	Mid	EGPRS Class12	0.797	1.6	0.80	29	28.26	0.95
Body Back-edge	Low	EGPRS Class12	1.059	1.6	-0.37	29	27.95	1.35
Body Back-edge	Mid	EGPRS Class12	1.145	1.6	-0.98	29	28.26	1.36
Body Back-edge	Mid	EGPRS Class12	1.133	1.6	-2.37	29	28.26	1.34
Body Back-edge	High	EGPRS Class12	1.129	1.6	4.10	29	28.12	1.38
Body Right-edge	Mid	EGPRS Class12	0.362	1.6	0.19	29	28.26	0.43
Body Left-edge	Mid	EGPRS Class12	0.302	1.6	-0.95	29	28.26	0.36
Body Bottom-edge	Mid	EGPRS Class12	0.221	1.6	-2.69	29	28.26	0.26

WCDMA BAND V (850)

Date of Measured : Aug 23th,2016 Body /Hotspot Separation D						t Separation D	istance:1.0cm	
Position	Channel	Mode	SAR 1g(W/kg)	Limit (W/kg)	Power Drift (%)	Maximum Turn-up Power(dBm)	measured output power (dBm)	Scaled Maximum SAR(W/kg)
Right Head Cheek	Mid	RMC 12.2kbps	0.515	1.6	1.29	24	22.89	0.66
Right Head Tilt	Mid	RMC 12.2kbps	0.222	1.6	-1.02	24	22.89	0.29
Left Head Cheek	Mid	RMC 12.2kbps	0.489	1.6	-0.65	24	22.89	0.63
Left Head Tilt	Mid	RMC 12.2kbps	0.210	1.6	-0.33	24	22.89	0.27
Body Front-edge	Mid	RMC 12.2kbps	0.408	1.6	-1.30	24	22.89	0.53
Body Back-side	Mid	RMC 12.2kbps	0.599	1.6	-0.78	24	22.89	0.77
Body Right-side	Mid	RMC 12.2kbps	0.190	1.6	0.11	24	22.89	0.25
Body Left-edge	Mid	RMC 12.2kbps	0.163	1.6	-0.60	24	22.89	0.21
Body Bottom-edge	Mid	RMC 12.2kbps	0.101	1.6	-0.37	24	22.89	0.13



Test Report	16071000-FCC-H
Page	46 of 123

PCS1900:

Date of Measure	d : Aug 25th,	2016		Body	/Hotspot	Separation Di	stance:1.0cm	
Position	Channel	Mode	SAR 1g(W/kg)	Limit (W/kg)	Power Drift (%)	Maximum Turn-up Power(dBm)	measured output power (dBm)	Scaled Maximum SAR(W/kg)
Right Head Cheek	Mid	GSM voice	0.323	1.6	0.68	30	29.46	0.37
Right Head Tilt	Mid	GSM voice	0.162	1.6	1.51	30	29.46	0.18
Left Head Cheek	Mid	GSM voice	0.164	1.6	-1.96	30	29.46	0.19
Left Head Tilt	Mid	GSM voice	0.086	1.6	-2.14	30	29.46	0.10
Body Front-edge	Mid	EGPRS Class12	0.545	1.6	0.31	26	25.54	0.61
Body Back-side	Mid	EGPRS Class12	0.671	1.6	0.27	26	25.54	0.75
Body Right-side	Mid	EGPRS Class12	0.121	1.6	-1.54	26	25.54	0.13
Body Left-edge	Mid	EGPRS Class12	0.071	1.6	-1.63	26	25.54	0.08
Body Bottom-edge	Mid	EGPRS Class12	0.396	1.6	-2.50	26	25.54	0.44

WCDMA BAND II (1900):

	<u> </u>							
Date of Measure	d : Aug 26th,2	2016		Body /Hotspot Separation Distance:1.0cm				
Position	Channel	Mode	SAR 1a(\M/kg)	Limit	Power Drift (%)	Maximum Turn-up Power(dBm)	measured output power (dBm)	Scaled Maximum
Right Head Cheek	Mid	RMC 12.2kbps	1g(W/kg) 0.765	(W/kg) 1.6	-1.58	23	22.67	0.83
Right Head Tilt	Mid	RMC 12.2kbps	0.321	1.6	0.22	23	22.67	0.35
Left Head Cheek	Mid	RMC 12.2kbps	0.530	1.6	0.47	23	22.67	0.57
Left Head Tilt	Mid	RMC 12.2kbps	0.266	1.6	0.07	23	22.67	0.29
Body Front-edge	Mid	RMC 12.2kbps	0.576	1.6	-0.76	23	22.67	0.62
Body Back-side	Mid	RMC 12.2kbps	0.748	1.6	-2.00	23	22.67	0.81
Body Right-side	Mid	RMC 12.2kbps	0.123	1.6	0.42	23	22.67	0.13
Body Left-edge	Mid	RMC 12.2kbps	0.119	1.6	-1.32	23	22.67	0.13
Body Bottom-edge	Mid	RMC 12.2kbps	0.108	1.6	-1.06	23	22.67	0.12



Test Report	16071000-FCC-H
Page	47 of 123

WCDMA BANDIV(1700):

WCDMA BANDIV (1700):								
Date of Measure	d : Aug 24th,	2016		Body /H	lotspot Se	paration Dista	nce: 1.0cm	
Position	Channel	Mode	SAR 1g(W/kg)	Limit (W/kg)	Power Drift (%)	Maximum Turn-up Power(dBm)	measured output power (dBm)	Scaled Maximum SAR(W/kg)
Right Head Cheek	Low	RMC 12.2kbps	0.994	1.6	1.45	24	23.21	1.19
Right Head Cheek	Mid	RMC 12.2kbps	1.095	1.6	1.45	24	23.18	1.32
Right Head Cheek	Mid	RMC 12.2kbps	1.097	1.6	1.45	24	23.18	1.32
Right Head Cheek	High	RMC 12.2kbps	1.087	1.6	1.45	24	23.20	1.31
Right Head Tilt	Mid	RMC 12.2kbps	0.825	1.6	1.38	24	23.18	1.00
Left Head Cheek	Mid	RMC 12.2kbps	0.807	1.6	0.67	24	23.18	0.97
Left Head Tilt	Mid	RMC 12.2kbps	0.414	1.6	0.28	24	23.18	0.50
Body Front-edge	Mid	RMC 12.2kbps	0.936	1.6	0.24	24	23.18	1.13
Body Back-side	Low	RMC 12.2kbps	1.062	1.6	-1.42	24	23.21	1.27
Body Back-side	Mid	RMC 12.2kbps	1.153	1.6	0.77	24	23.18	1.39
Body Back-side	Mid	RMC 12.2kbps	1.132	1.6	-1.39	24	23.18	1.37
Body Back-side	High	RMC 12.2kbps	1.137	1.6	-1.51	24	23.20	1.37
Body Right-side	Mid	RMC 12.2kbps	0.405	1.6	-0.80	24	23.18	0.49
Body Left-edge	Mid	RMC 12.2kbps	0.204	1.6	-1.28	24	23.18	0.25
Body Bottom-edge	Mid	RMC 12.2kbps	0.481	1.6	0.17	24	23.18	0.58

2.4 G (802.11b)

(802.110)							
Position	Channel	SAR 1g(W/kg)	Limit (W/kg)	Power Drift (%)	Maximum Turn-up Power(dBm)	measured output power (dBm)	Scaled Maximum SAR(W/kg)
Right Head Cheek	Mid	0.050	1.6	-1.58	14.5	13.77	0.06
Right Head Tilt	Mid	0.029	1.6	0.22	14.5	13.77	0.03
Left Head Cheek	Mid	0.156	1.6	0.47	14.5	13.77	0.18
Left Head Tilt	Mid	0.076	1.6	0.07	14.5	13.77	0.09
Body Front-edge	Mid	0.030	1.6	-0.76	14.5	13.77	0.04
Body Back-side	Mid	0.093	1.6	-2.00	14.5	13.77	0.11
Body Right-side	Mid	0.023	1.6	0.42	14.5	13.77	0.03
Body Top-edge	Mid	0.020	1.6	-1.06	14.5	13.77	0.02



Test Report	16071000-FCC-H
Page	48 of 123

Measurement variability consideration

According to KDB 865664 D01v01 section 2.8.1, repeated measurements are required following the procedures as below:

- 1. Repeated measurement is not required when the original highest measured SAR is < 0.80W/kg; steps 2) through 4) do not apply.
- 2. When the original highest measured SAR is \geq 0.80 W/kg, repeat that measurement once.
- 3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20. Measured SAR (W/Kg)

Repeated SAR:

Band					measure	ed SAR(W/kg)	
	Position	Channel	Mode	Original	1st Rep	peated	2r Repe	
					Value	Ratio	Value	Ratio
GSM850	Body Back-side	Mid	GPRS Class12	1.145	1.133	1.00	NA	NA
WCDMA BANDIV	Right Head Cheek	Mid	RMC 12.2kbps	1.095	1.097	1.01	NA	NA
WCDMA BANDIV	Body Back-side	Mid	RMC 12.2kbps	1.153	1.132	1.01	NA	NA

Simultaneous Transmission SAR Analysis.

No.	Applicable Simultaneous Transmission Combination		
1.	WWAN+BT		
2.	WWAN+WIFI		

Note:

- 1. For simultaneous transmission analysis, WiFi and Bluetooth SAR is estimated per KDB 447498 D01 v06 base on the formula below:
 - (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[$\sqrt{f_{(GHz)}}/x$] W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the *test separation distances* is > 50 mm.²¹
- 2. If the test separation distances is≤5mm, 5mm is used for estimated SAR calculation.
- 3. WIFI maximum tune up power is 14.5dBm, BT's maximum tune up power is 5dBm and the estimated SAR is listed below.



Test Report	16071000-FCC-H
Page	49 of 123

Test position	Head(0.0cm)	Body (1.0cm)
WIFI SAR(W/kg)	0.18	0.11
BT Estimated SAR(W/kg)	0.13	0.07

Maximum Summation:

	WWAN	WIFI	BT	WWAN+WIFI	WWAN+BT
position	Max. Scaled SAR	Max. Scaled SAR	Max. Scaled SAR	VVVVAIV+VVIFI	WWWAIN+DI
Head 0cm	1.32	0.18	0.13	1.50	1.45
Body 1.0cm	1.39	0.11	0.07	1.50	1.46

Note: 1g-SAR scalar summation<1.6W/kg, so no simultaneous SAR is required.



Test Report	16071000-FCC-H
Page	50 of 123

11 SAR MEASUREMENT REFERENCES

References

- FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- IEEE Std. C95.1-1999, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz", 1999
- IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- 4. IEC 62209-2, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices—Human models, instrumentation, and procedures Part 2: Procedure to determine the specific absorption rate(SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30MHz to 6GHz)", March 2010
- 5. FCC KDB 447498 D01 v06, "RF Exposure Procedures and Equipment Authorization Policies For Mobile and Portable Device", October 23, 2015
- 6. FCC KDB 941225 D01 v03r01, "3G SAR Measurement Procedures", October 23, 2015
- 7. FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements For 100MHz to 6GHz", August 7, 2015
- 8. FCC KDB648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets". October 23, 2015
- 9. FCC KDB 941225 D06 v02r01, Hot Spot SAR ,October 23, 2015
- 10. FCC KDB 248227 D01 v02r02, 802.11 Wi-Fi SAR, October 23, 2015



Test Report	16071000-FCC-H
Page	51 of 123

Maximum SAR measurement Plots

Test mode: GSM850, Middle channel (Right Head Cheek)


Product Description: Mobile phone


Model: A400


Test Date: Aug 22th,2016

Test Date. Aug 22til,2010	
Medium(liquid type)	HSL_835
Frequency (MHz)	836.6000
Relative permittivity (real part)	41.2
Conductivity (S/m)	0.91
E-Field Probe	SN 27/15 EPGO262
Crest factor	8.0
Conversion Factor	1.90
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	3.100000
SAR 10g (W/Kg)	0.239193
SAR 1g (W/Kg)	0.591208

SURFACE SAR





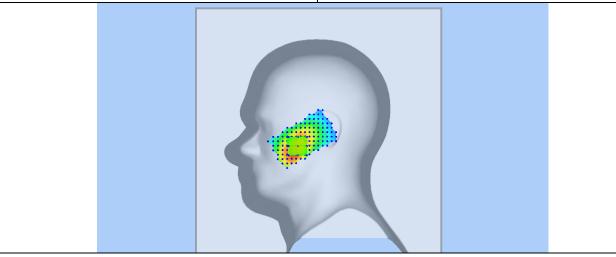



Test Report	16071000-FCC-H
Page	52 of 123


Test mode: GPRS850, Middle channel (Body Back Side)


Product Description: Mobile phone Model: A400


Test Date: Aug 22th,2016

Test bate. Aug 22th,2010	
Medium(liquid type)	MSL_835
Frequency (MHz)	836.6000
Relative permittivity (real part)	55.17
Conductivity (S/m)	0.99
E-Field Probe	SN 27/15 EPGO262
Crest factor	2.0
Conversion Factor	1.97
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	2.070000
SAR 10g (W/Kg)	0.466330
SAR 1g (W/Kg)	0.891194

SURFACE SAR





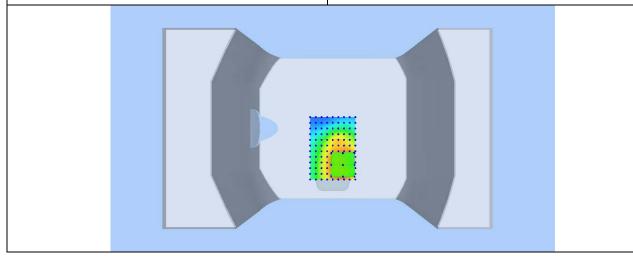



Test Report	16071000-FCC-H
Page	53 of 123


Test mode: WCDMA Band V, Middle channel (Right Head Cheek)


Product Description: Mobile phone Model: A400


Test Date: Aug 23th,2016

Medium(liquid type)	HSL_835
Frequency (MHz)	836.600
Relative permittivity (real part)	41.2
Conductivity (S/m)	0.91
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.90
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	4.170000
SAR 10g (W/Kg)	0.291925
SAR 1g (W/Kg)	0.489332

SURFACE SAR





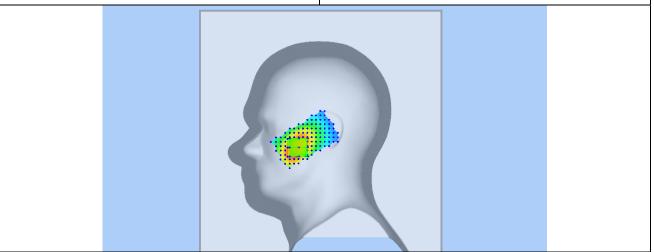



Test Report	16071000-FCC-H
Page	54 of 123

Test mode: WCDMA Band V, Middle channel (Body Back Side)


Product Description: Mobile phone


Model: A400


Test Date: Aug 23th,2016

Test Date. Aug 25th,2016	
Medium(liquid type)	MSL_835
Frequency (MHz)	835.0000
Relative permittivity (real part)	55.17
Conductivity (S/m)	0.99
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.97
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	2.580000
SAR 10g (W/Kg)	0.229379
SAR 1g (W/Kg)	0.428803

SURFACE SAR





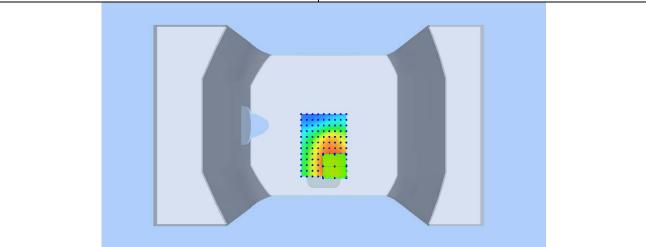



Test Report	16071000-FCC-H
Page	55 of 123

Test mode: PCS1900, Middle channel (Right Head Cheek)


Product Description: Mobile phone


Model: A400


Test Date: Aug 25th,2016

Test Date. Aug 2011,2010	
Medium(liquid type)	HSL_1900
Frequency (MHz)	1880.000
Relative permittivity (real part)	40.02
Conductivity (S/m)	1.37
E-Field Probe	SN 27/15 EPGO262
Crest factor	8.0
Conversion Factor	2.26
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.210000
SAR 10g (W/Kg)	0.104271
SAR 1g (W/Kg)	0.199114

SURFACE SAR





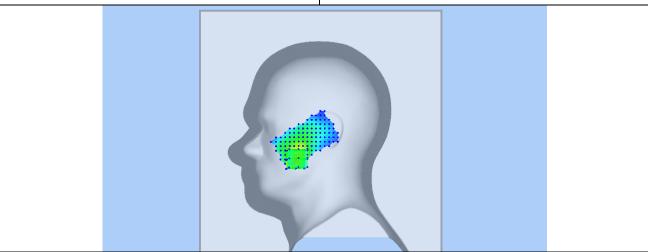



Test Report	16071000-FCC-H
Page	56 of 123


Test mode: GPRS1900, Middle channel (Body Back Side)


Product Description: Mobile phone Model: A400


Test Date: Aug 25th,2016

rest bate. Aug zstri, zo ro	
Medium(liquid type)	MSL_1900
Frequency (MHz)	1850.200
Relative permittivity (real part)	53.29
Conductivity (S/m)	1.51
E-Field Probe	SN 27/15 EPGO262
Crest factor	2.0
Conversion Factor	2.32
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-2.00000
SAR 10g (W/Kg)	0.153461
SAR 1g (W/Kg)	0.387754

SURFACE SAR





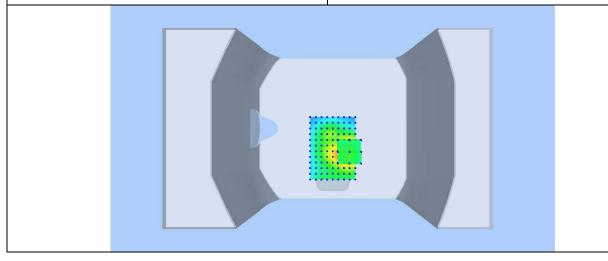



Test Report	16071000-FCC-H
Page	57 of 123

Test mode: WCDMA Band II, Middle channel (Right Head Cheek)


Product Description: Mobile phone


Model: A400 Test Date: Aug 26th,2016

Test Date. Aug Zutti, Zutu	
Medium(liquid type)	HSL_1900
Frequency (MHz)	1880.000
Relative permittivity (real part)	40.02
Conductivity (S/m)	1.37
E-Field Probe SN 27/15 EPGO262	
Crest factor	1.0
Conversion Factor 2.26	
Sensor-Surface 4mm	
Area Scan dx=8mm dy=8mm	
Zoom Scan 5x5x7,dx=8mm dy=8mm dz=5mm	
Variation (%) 1.330000	
SAR 10g (W/Kg)	0.146172
SAR 1g (W/Kg)	0.274264

SURFACE SAR

SAVE Cancel 48 X (mm) 48 Y (mm)



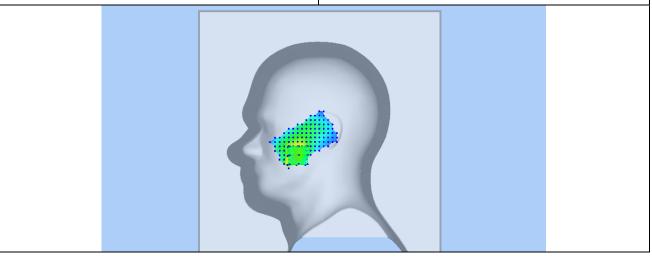



Test Report	16071000-FCC-H
Page	58 of 123

Test mode: WCDMA Band II, Middle channel (Body Back Side)

Product Description: Mobile phone


Model: A400 Test Date: Aug 26th,2016


rest bate. Aug 20th,2010	
Medium(liquid type)	MSL_1900
Frequency (MHz)	1880.000
Relative permittivity (real part)	53.29
Conductivity (S/m)	1.51
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.32
Sensor-Surface	4mm
Area Scan dx=8mm dy=8mm	
Zoom Scan 5x5x7,dx=8mm dy=8mm dz=5mm	
Variation (%) -0.76000	
SAR 10g (W/Kg)	0.122100
SAR 1g (W/Kg)	0.376214

SURFACE SAR

SAVE Cancel

24 X (mm) 32 Y (mm)



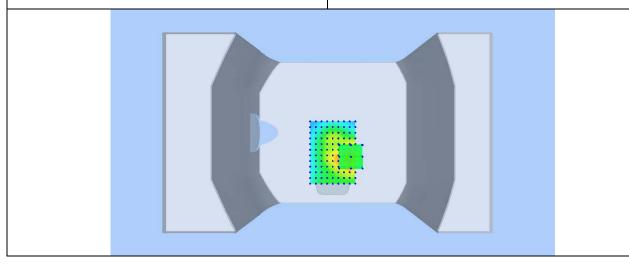



Test Report	16071000-FCC-H
Page	59 of 123


Test mode: WCDMA Band IV, Middle channel (Right Head Cheek)


Product Description: Mobile phone Model: A400


Test Date: Aug 24th,2016

Medium(liquid type)	HSL_1800
Frequency (MHz)	1732.600
Relative permittivity (real part)	39. 96
Conductivity (S/m)	1.42
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.01
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%) -4.86000	
SAR 10g (W/Kg)	0.370458
SAR 1g (W/Kg)	0.794126

SURFACE SAR





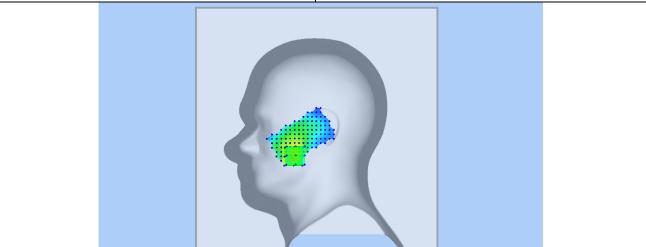



Test Report	16071000-FCC-H
Page	60 of 123

Test mode: WCDMA Band IV, Mid channel (Body Back Side)


Product Description: Mobile phone


Model: A400 Test Date: Aug 24th,2016

Test Date. Aug 24til,2010	
Medium(liquid type)	MSL_1800
Frequency (MHz)	1712.600
Relative permittivity (real part)	53.26
Conductivity (S/m)	1.55
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.05
Sensor-Surface 4mm	
Area Scan dx=8mm dy=8mm	
Zoom Scan 5x5x7,dx=8mm dy=8mm dz=5mm	
Variation (%) 0.220000	
SAR 10g (W/Kg)	0.863251
SAR 1g (W/Kg)	1.102828

SURFACE SAR

SAVE Cancel 8 X (mm) 32 Y (mm)



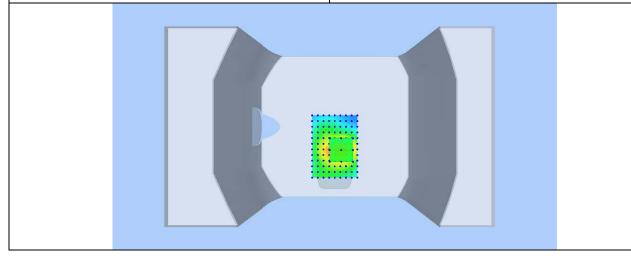



Test Report	16071000-FCC-H
Page	61 of 123

Test mode: 802.11b, Middle channel (Left Head Cheek)


Product Description: Mobile phone


Model: A400 Test Date: Aug 29th,2016

rest bate. Aug 27th,2010		
Medium(liquid type)	HL_2450	
Frequency (MHz)	2437.000	
Relative permittivity (real part)	40.42	
Conductivity (S/m)	1.77	
E-Field Probe	SN 27/15 EPGO262	
Crest factor	1.0	
Conversion Factor	2.22	
Sensor-Surface	4mm	
Area Scan	dx=8mm dy=8mm	
Zoom Scan 5x5x7,dx=8mm dy=8mm dz=5mm		
Variation (%) -1.700000		
SAR 10g (W/Kg)	0.071391	
SAR 1g (W/Kg)	0.156237	

SURFACE SAR

SAVE Cancel 8 X (mm) 24 Y (mm)



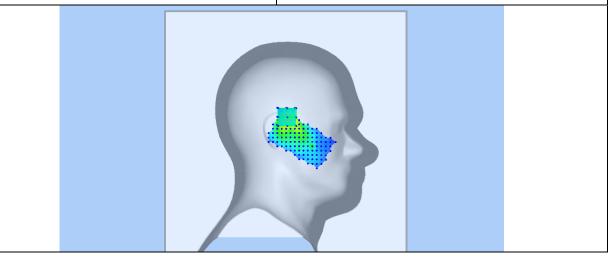



Test Report	16071000-FCC-H
Page	62 of 123


Test mode: 802.11b, Mid channel (Body Back Side)


Product Description: Mobile phone Model: A400


Test Date: Aug 29th,2016

ML_2450
2442.000
52.78
1.97
SN 27/15 EPGO262
1.0
2.29
4mm
dx=8mm dy=8mm
5x5x7,dx=8mm dy=8mm dz=5mm
3.570000
0.042855
0.093015

SURFACE SAR





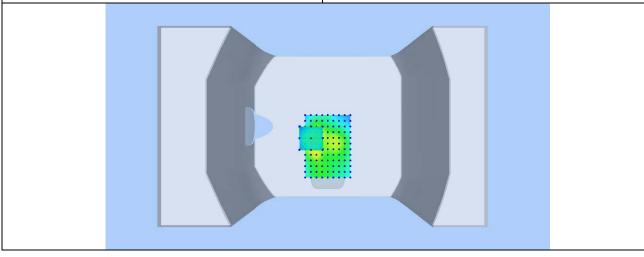



Test Report	16071000-FCC-H
Page	63 of 123


Annex A CALIBRATION REPORTS


SARTIMO Calibration Certificate-Extended Dipole Calibrations

According to KDB865664 D01, Dipoles must be recalibrated at least once every three years; however, immediate re-calibration is required for following conditions. The test laboratory must ensure that the required supporting information and documentation have been included in the SAR report to qualify for extended 3-year calibration interval.


- 1) When the most recent return-loss, measured at least annually, deviates by more than 20% from the previous measurement (i.e. 0.2 of the dB value) or not meeting the required -20 dB return-loss specification
- 2) When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5Ω from the previous measurement


Dipole Verification plot: SID 835 SN 18/11 DIPC150 835MHz for Head:



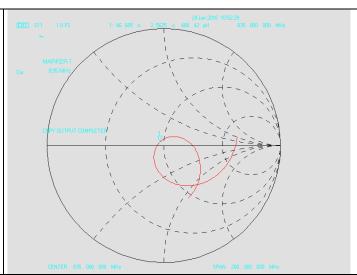

835MHz for Body:




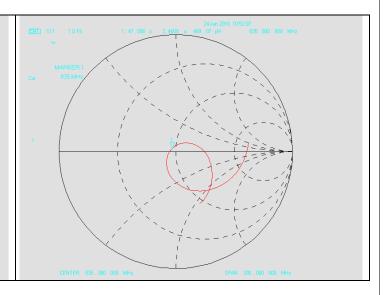





Test Report	16071000-FCC-H
Page	64 of 123


Dipole Verification plot: SID 1800 SN 18/11 DIPF152 1800MHz for Head:



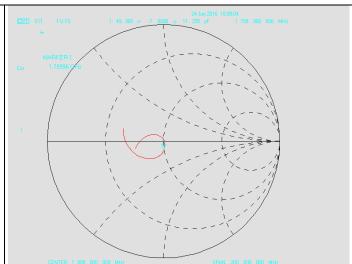



1800MHz for Body:



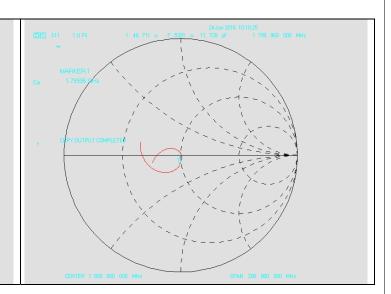

Dipole Verification plot: SID 1900 SN 18/11 DIPG153 1900MHz for Head:




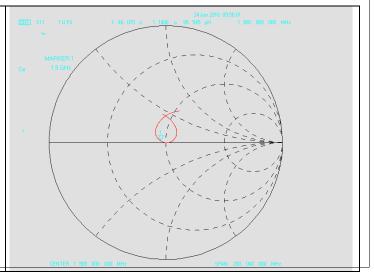





Test Report	16071000-FCC-H
Page	65 of 123


1900MHz for Body:



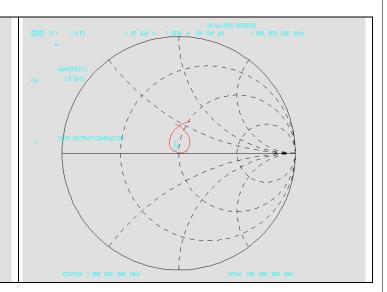

Dipole Verification plot: SID 2450 SN 18/11 DIPJ155 2450MHz for Head:



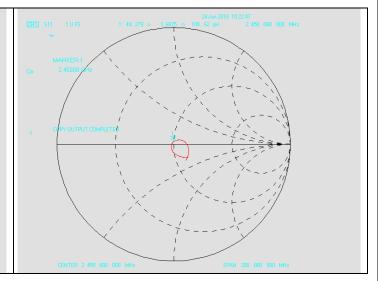

Dipole Verification plot: SID 2450 SN 18/11 DIPJ155 2450MHz for Body:

