

# RF TEST REPORT



Report No.: 16070480-FCC-R3

Supersede Report No.: N/A

Applicant	MOBIWIRE MOBILES (NINGBO) CO.,LTD	
Product Name	Mobile phone	
Model No.	öwn SMART VALUE	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2015, ANSI C63.10: 2013	
Test Date	April 28 to May 10, 2016	
Issue Date	May 20, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Winnie.Zhang	David Huang	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only		
Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	16070480-FCC-R3
Page	3 of 55

This page has been left blank intentionally.

## CONTENTS

1. REPORT REVISION HISTORY .....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	10
6.1 ANTENNA REQUIREMENT.....	10
6.2 DTS (6 DB&20 DB) CHANNEL BANDWIDTH.....	11
6.3 MAXIMUM OUTPUT POWER .....	17
6.4 POWER SPECTRAL DENSITY.....	21
6.5 BAND-EDGE & UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS .....	25
6.6 AC POWER LINE CONDUCTED EMISSIONS.....	31
6.7 RADIATED SPURIOUS EMISSIONS & RESTRICTED BAND .....	37
ANNEX A. TEST INSTRUMENT.....	43
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	44
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	50
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	54
ANNEX E. DECLARATION OF SIMILARITY .....	55

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070480-FCC-R3	NONE	Original	May 11, 2016
16070480-FCC-R3	V1	Update trademark	May 20, 2016

## 2. Customer information

Applicant Name	MOBIWIRE MOBILES (NINGBO) CO.,LTD
Applicant Add	No.999,Dacheng East Road,Fenghua City,Zhejiang
Manufacturer	MOBIWIRE MOBILES (NINGBO) CO.,LTD
Manufacturer Add	No.999,Dacheng East Road,Fenghua City,Zhejiang

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

#### **4. Equipment under Test (EUT) Information**

Description of EUT: Mobile phone

Main Model: 

Serial Model: N/A

Date EUT received: April 27, 2016

Test Date(s): April 28 to May 10, 2016

Equipment Category : DTS

GSM850: -3dBi

PCS1900: -1dBi

UMTS-FDD Band V: -3dBi

UMTS-FDD Band II: -1dBi

Bluetooth/BLE/WIFI: -2dBi

LTE Band IV: -3dBi

LTE Band VII: -2dBi

GPS:-2dBi

GSM / GPRS: GMSK

EGPRS: GMSK,8PSK

UMTS-FDD: QPSK, 16QAM

802.11b/g/n: DSSS, OFDM

Antenna Gain: Bluetooth: GFSK, π /4DQPSK, 8DPSK

BLE: GFSK

LTE Band: QPSK, 16QAM

GPS:BPSK

Type of Modulation:

Test Report No.	16070480-FCC-R3
Page	7 of 55

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz  
 PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz  
 UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz  
 UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;  
 RX: 1932.4 ~ 1987.6 MHz

RF Operating Frequency (ies):  
 WIFI: 802.11b/g/n(20M): 2412-2462 MHz  
 WIFI: 802.11n(40M): 2422-2452 MHz  
 Bluetooth & BLE: 2402-2480 MHz  
 LTE Band IV TX: 1712.5 ~ 1752.5 MHz; RX: 2112.5 ~ 2152.5 MHz  
 LTE Band VII TX: 2502.5 ~ 2567.5 MHz; RX: 2622.5 ~ 2687.5 MHz  
 GPS RX: 1575.42 MHz

Max. Output Power:  
 802.11b: 9.41 dBm  
 802.11g: 9.64 dBm  
 802.11n(20M): 8.90 dBm  
 802.11n(40M): 9.21 dBm

Number of Channels:  
 GSM 850: 124CH  
 PCS1900: 299CH  
 UMTS-FDD Band V: 102CH  
 UMTS-FDD Band II: 277CH  
 WIFI: 802.11b/g/n(20M): 11CH  
 WIFI: 802.11n(40M): 7CH  
 Bluetooth: 79CH  
 BLE: 40CH  
 GPS: 1CH

Port: Power Port, Earphone Port, USB Port

Adapter:  
 Model: OWN SMART VALUE  
 Input: AC 100-240V; 50/60Hz; 0.2A  
 Output: DC 5.0V, 1A  
 Battery:  
 Model: OWN SMART VALUE  
 Spec: 3.8V, 2100mAh, 7.98Wh  
 Limited charger voltage: 4.35V

Test Report No.	16070480-FCC-R3
Page	8 of 55

Trade Name :

**öwn**

GRPS/EGPRS Multi-slot class 8/10/12

FCC ID: 2ADA4VALUE

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB&20 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

## **6. Measurements, Examination And Derived Results**

### **6.1 Antenna Requirement**

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI/GPS, the gain is -2dBi for Bluetooth/BLE/WIFI/GPS.

A permanently attached PIFA antenna for GSM/PCS and UMTS, the gain is -3dBi for GSM850, -1dBi for PCS1900,-3dBi for UMTS-FDD Band V,-1dBi for UMTS-FDD Band II.


A permanently attached PIFA antenna for LTE, the gain is -3dBi for LTE Band IV, -2dBi for LTE Band VII.

**The antenna meets up with the ANTENNA REQUIREMENT.**

**Result:** Compliance.

## 6.2 DTS (6 dB&20 dB) Channel Bandwidth

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	April 28, 2016
Tested By :	Winnie Zhang

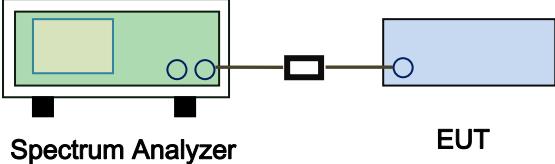Spec	Item	Requirement	Applicable
§ 15.247(a)(2) RSS Gen(4.6.1)	a)	6dB BW $\geq$ 500kHz; 20dB BW $\geq$ 500kHz;	<input checked="" type="checkbox"/>
	b)	99% BW: For FCC reference only; required by IC.	<input checked="" type="checkbox"/>
Test Setup	 <b>Spectrum Analyzer</b> <b>EUT</b>		
Test Procedure	<p>558074 D01 DTS MEAS Guidance v03r03, 8.1 DTS bandwidth</p> <p><u>6dB bandwidth</u></p> <ol style="list-style-type: none"> <li>Set RBW = 100 kHz.</li> <li>Set the video bandwidth (VBW) <math>\geq</math> 3 <math>\times</math> RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold.</li> <li>Sweep = auto couple.</li> <li>Allow the trace to stabilize.</li> <li>Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</li> </ol> <p><u>20dB bandwidth</u></p> <p>C63.10 Occupied Bandwidth (OBW=20dB bandwidth)</p> <ol style="list-style-type: none"> <li>Set RBW = 1%-5% OBW.</li> <li>Set the video bandwidth (VBW) <math>\geq</math> 3 x RBW.</li> <li>Set the span range between 2 times and 5 times of the OBW.</li> <li>Sweep time=Auto, Detector=PK, Trace=Max hold.</li> <li>Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst-</li> </ol>		

	case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the 20 dB levels with respect to the reference level.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A


#### Measurement result

Test mode	CH	Freq (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.607	16.826	$\geq 0.5$
	Mid	2437	10.089	16.280	$\geq 0.5$
	High	2462	7.568	14.774	$\geq 0.5$
802.11g	Low	2412	15.819	18.922	$\geq 0.5$
	Mid	2437	10.724	18.415	$\geq 0.5$
	High	2462	12.566	18.040	$\geq 0.5$
802.11n (20M)	Low	2412	16.419	19.508	$\geq 0.5$
	Mid	2437	13.858	19.185	$\geq 0.5$
	High	2462	12.556	18.938	$\geq 0.5$
802.11n (40M)	Low	2422	35.302	38.943	$\geq 0.5$
	Mid	2437	35.475	43.408	$\geq 0.5$
	High	2452	33.292	39.457	$\geq 0.5$


## Test Plots


### 6dB Bandwidth measurement result

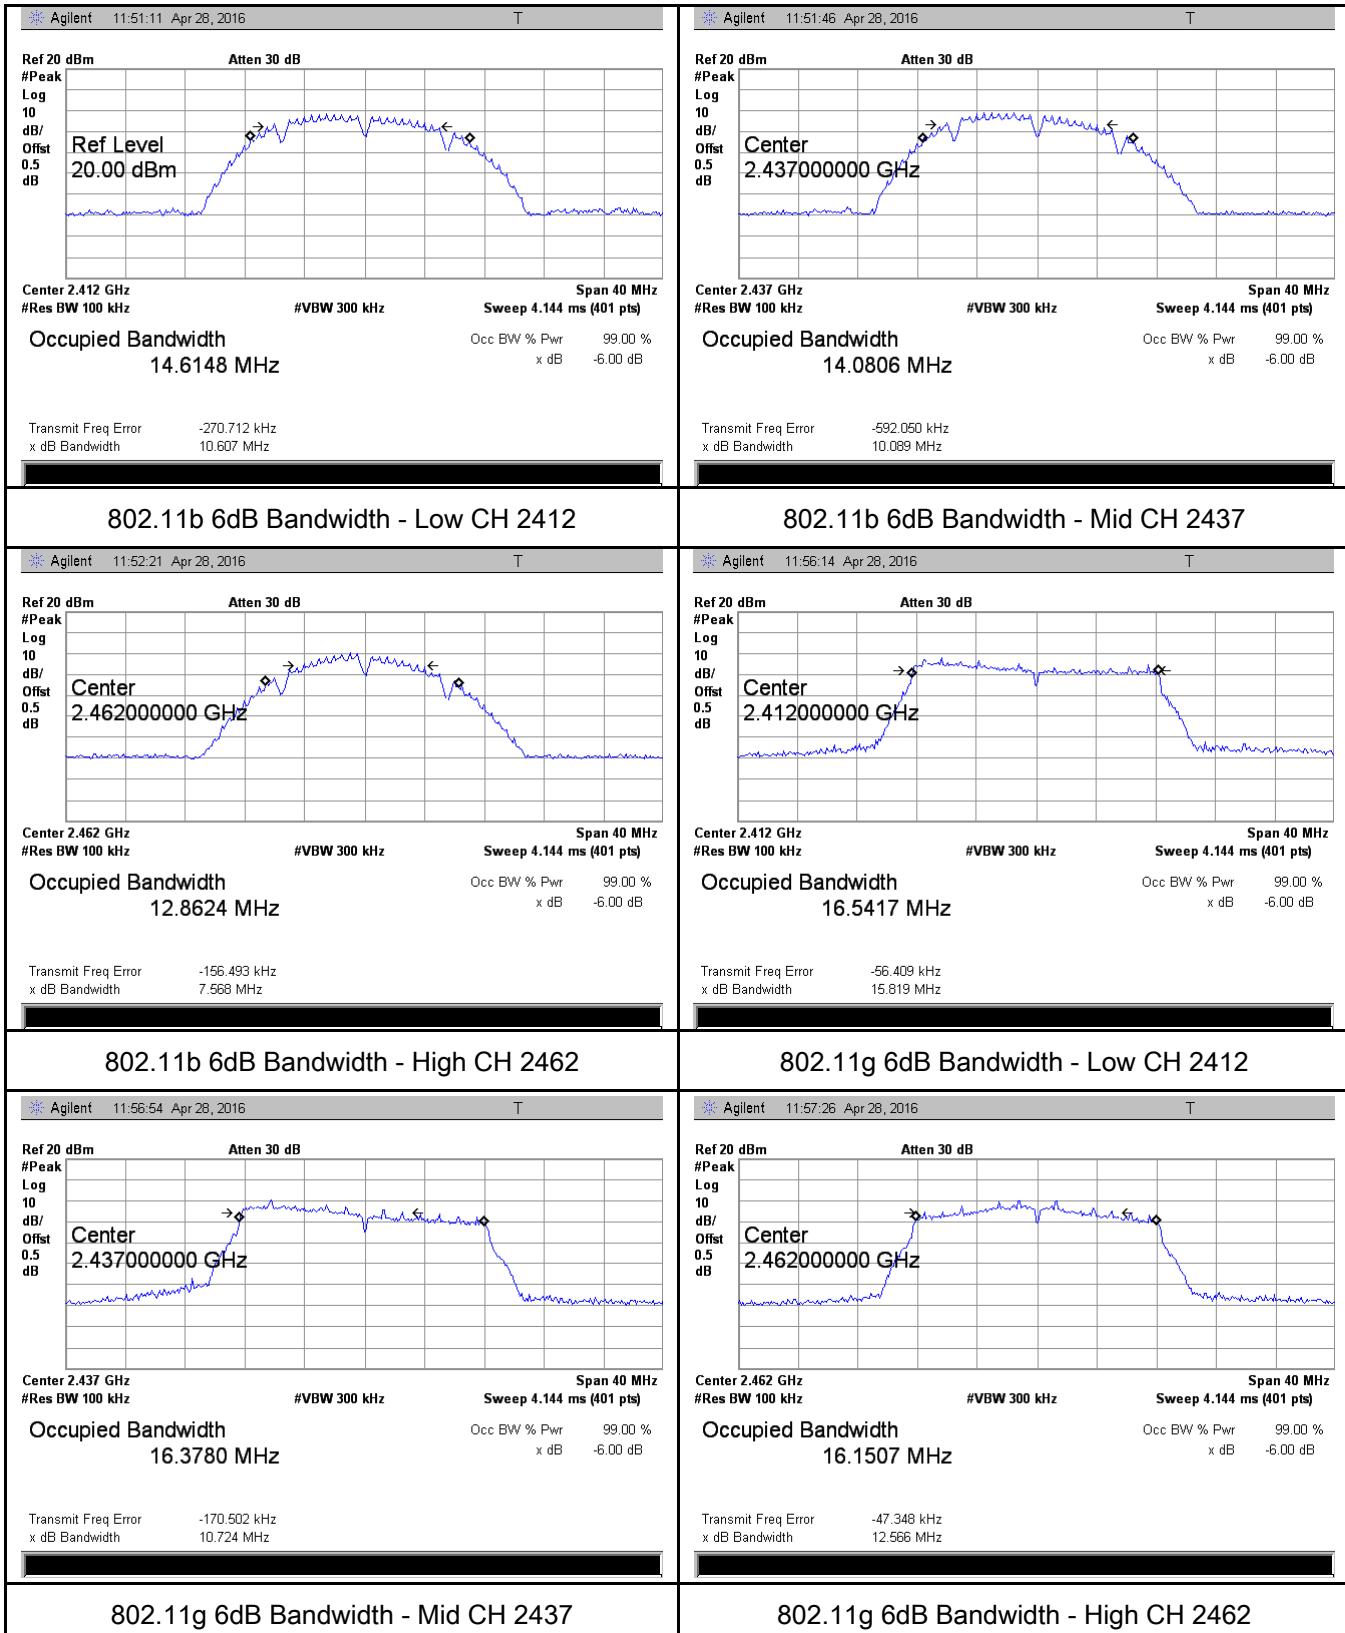

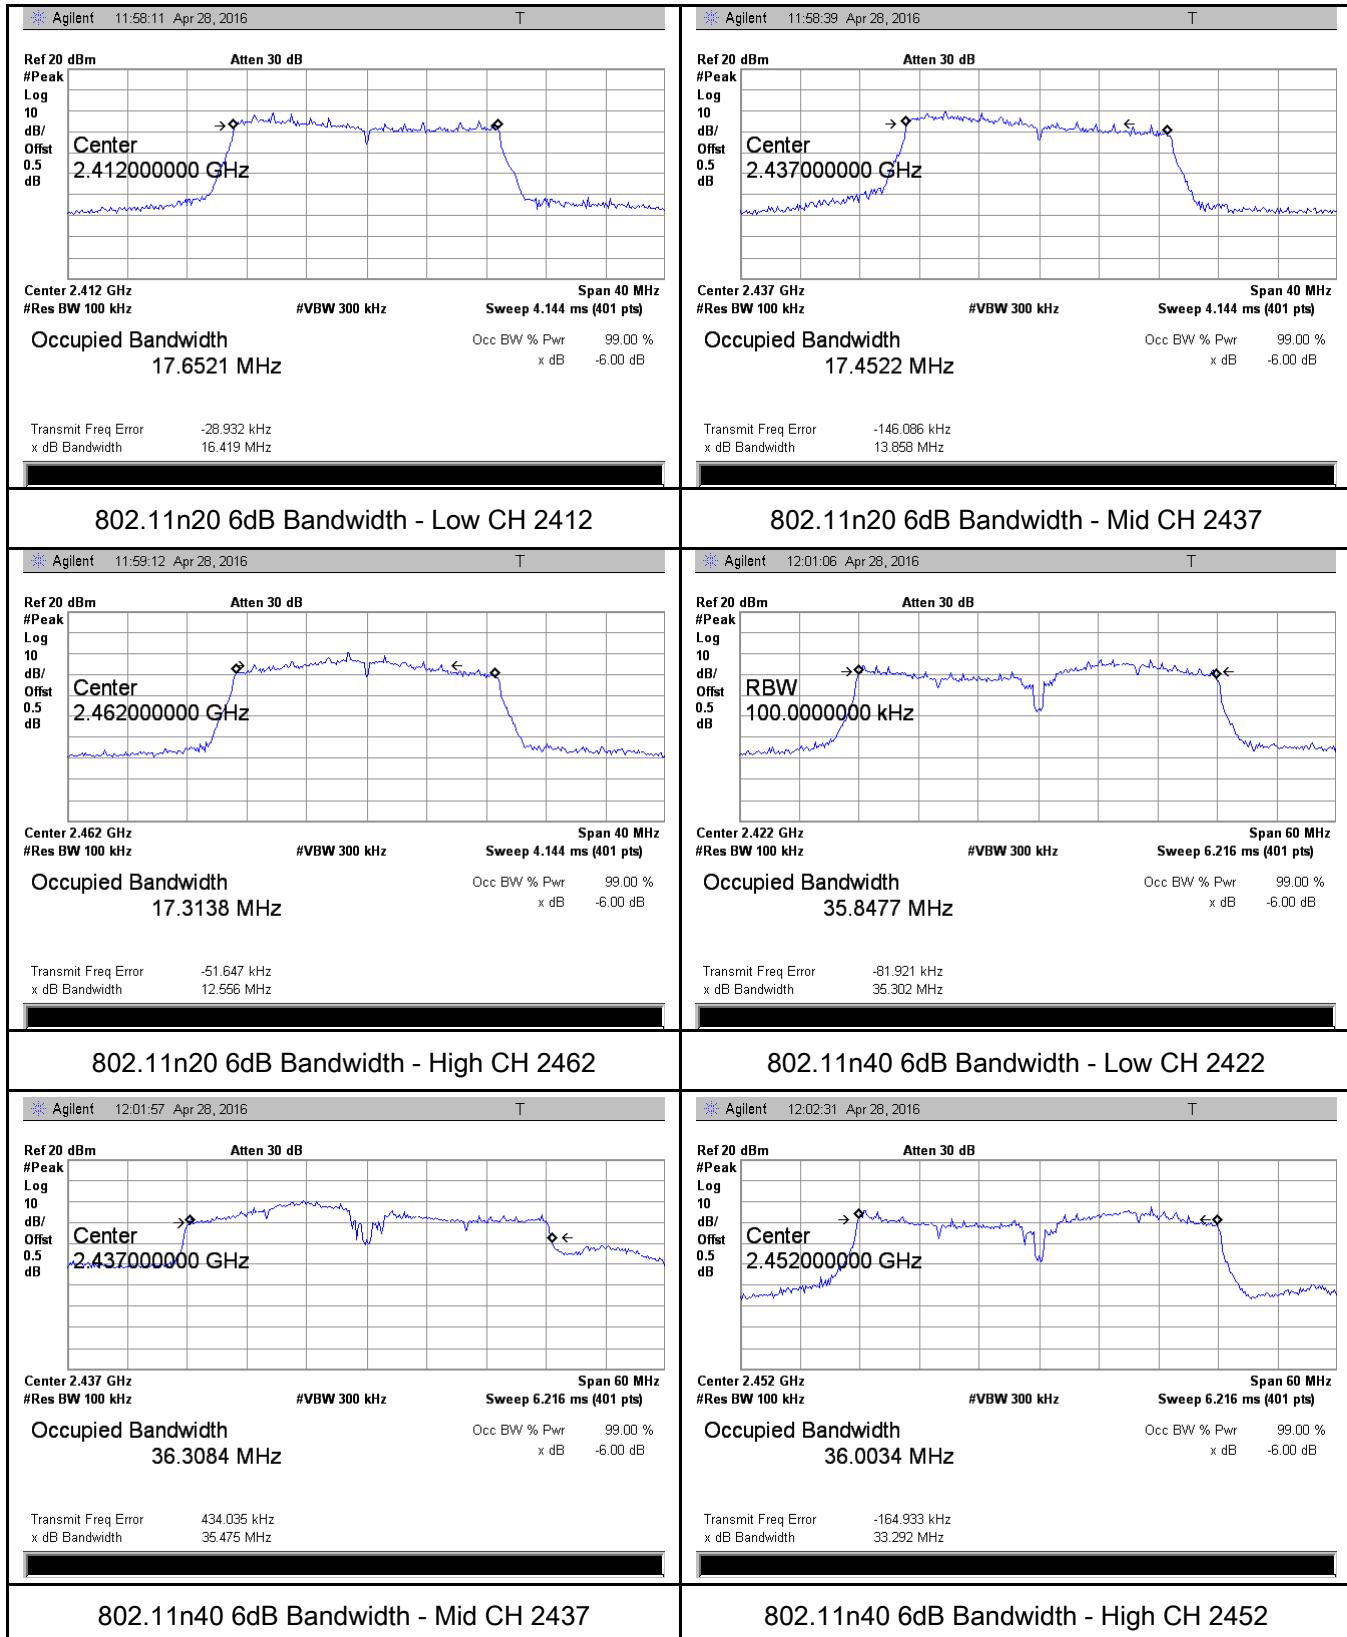

## 20 dB Bandwidth measurement result

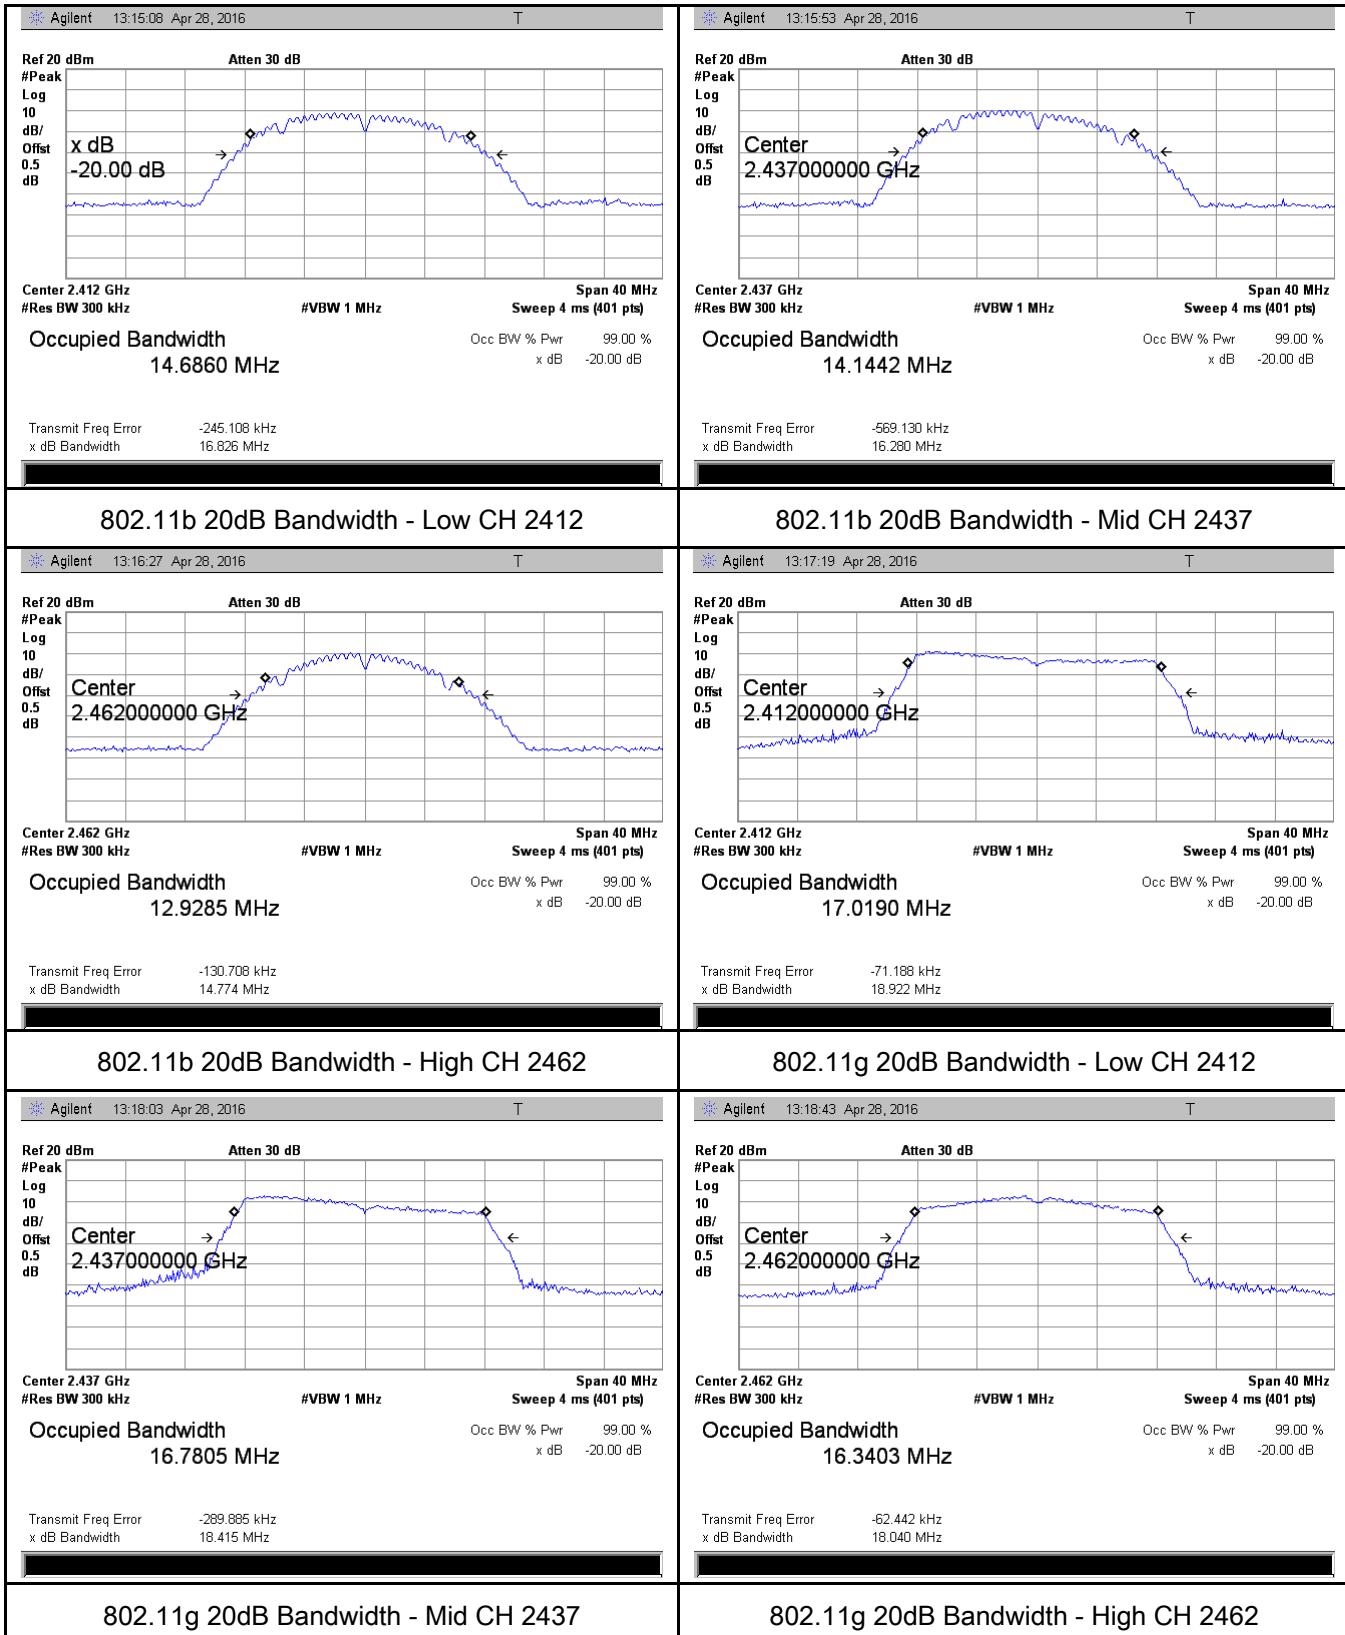


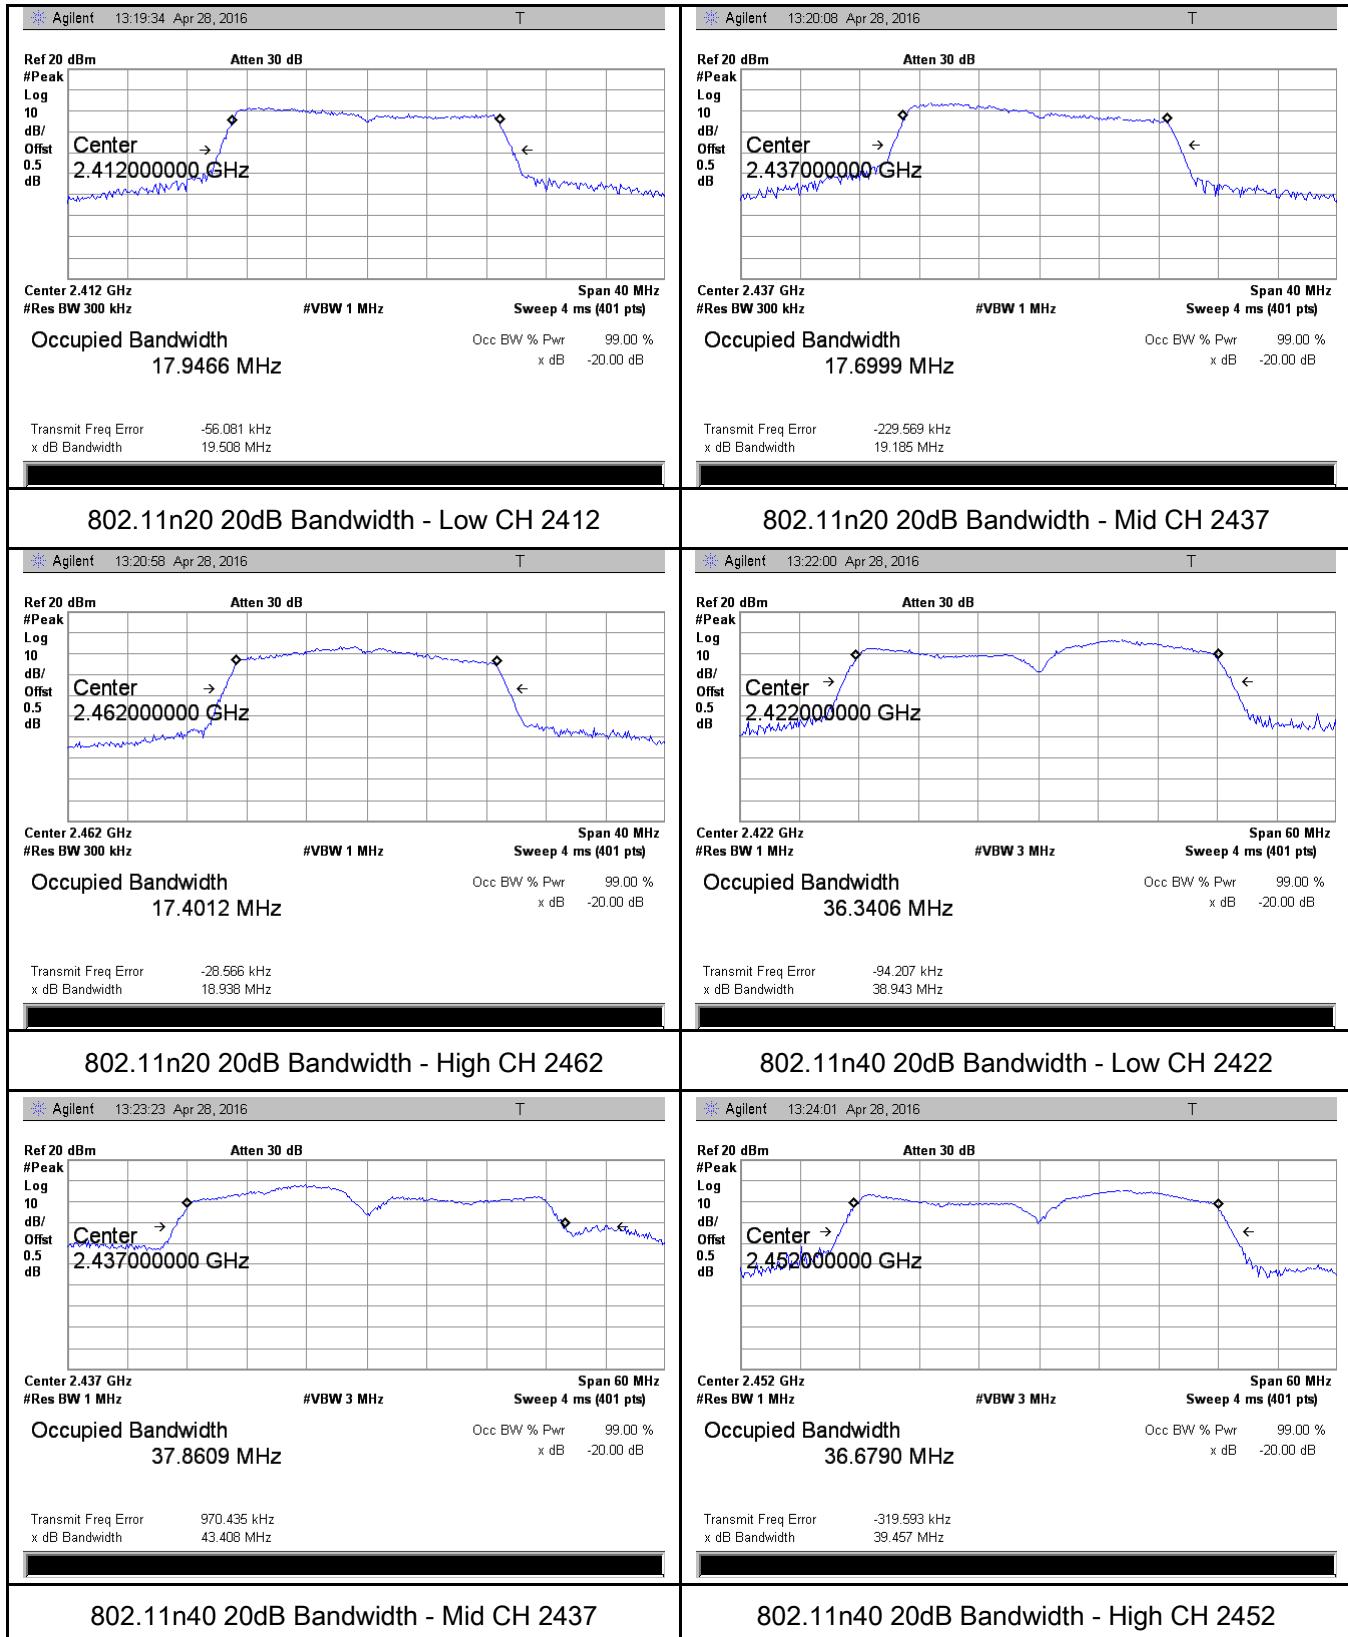

### 6.3 Maximum Output Power

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	April 28, 2016
Tested By :	Winnie Zhang

#### Requirement(s):

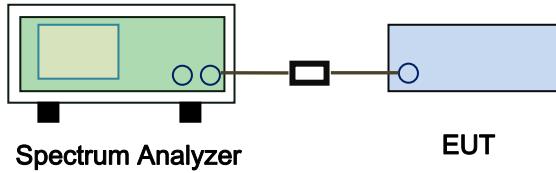Spec	Item	Requirement	Applicable
§15.247(b) (3), RSS210 (A8.4)	a)	FHSS in 2400-2483.5MHz with $\geq$ 75 channels: $\leq$ 1 Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: $\leq$ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: $\leq$ 0.125 Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with $\geq$ 50 channels: $\leq$ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with $\geq$ 25 & $< 50$ channels: $\leq$ 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: $\leq$ 1 Watt	<input checked="" type="checkbox"/>
Test Setup		 <b>Spectrum Analyzer</b> <b>EUT</b>	
Test Procedure		<p>558074 D01 DTS MEAS Guidance v03r03, 9.1.2 Integrated band power method</p> <p>Maximum output power measurement procedure</p> <ul style="list-style-type: none"> <li>- a) Set span to at least 1.5 times the OBW.</li> <li>- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.</li> <li>- c) Set VBW <math>\geq</math> 3 x RBW.</li> <li>- d) Number of points in sweep <math>\geq</math> 2 x span / RBW. (This gives bin-to-bin spacing <math>\leq</math> RBW/2, so that narrowband signals are not lost between frequency bins.)</li> <li>- e) Sweep time = auto.</li> <li>- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.</li> <li>- g) If transmit duty cycle <math>&lt;</math> 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum</li> </ul>	

	<p>power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle <math>\geq 98\%</math>, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “ free run” .</p> <ul style="list-style-type: none"> <li>- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.</li> <li>- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’ s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A


#### Output Power measurement result

Type	Test mode	CH	Freq (MHz)	Conducted Power (dBm)	Limit (dBm)	Result
Output power	802.11b	Low	2412	8.23	30	Pass
		Mid	2437	9.08	30	Pass
		High	2462	<b>9.41</b>	30	Pass
	802.11g	Low	2412	9.18	30	Pass
		Mid	2437	<b>9.64</b>	30	Pass
		High	2462	9.29	30	Pass
	802.11n (20M)	Low	2412	<b>8.90</b>	30	Pass
		Mid	2437	8.87	30	Pass
		High	2462	8.72	30	Pass
	802.11n (40M)	Low	2422	7.65	30	Pass
		Mid	2437	<b>9.21</b>	30	Pass
		High	2452	7.43	30	Pass

## Test Plots


### The Average Power

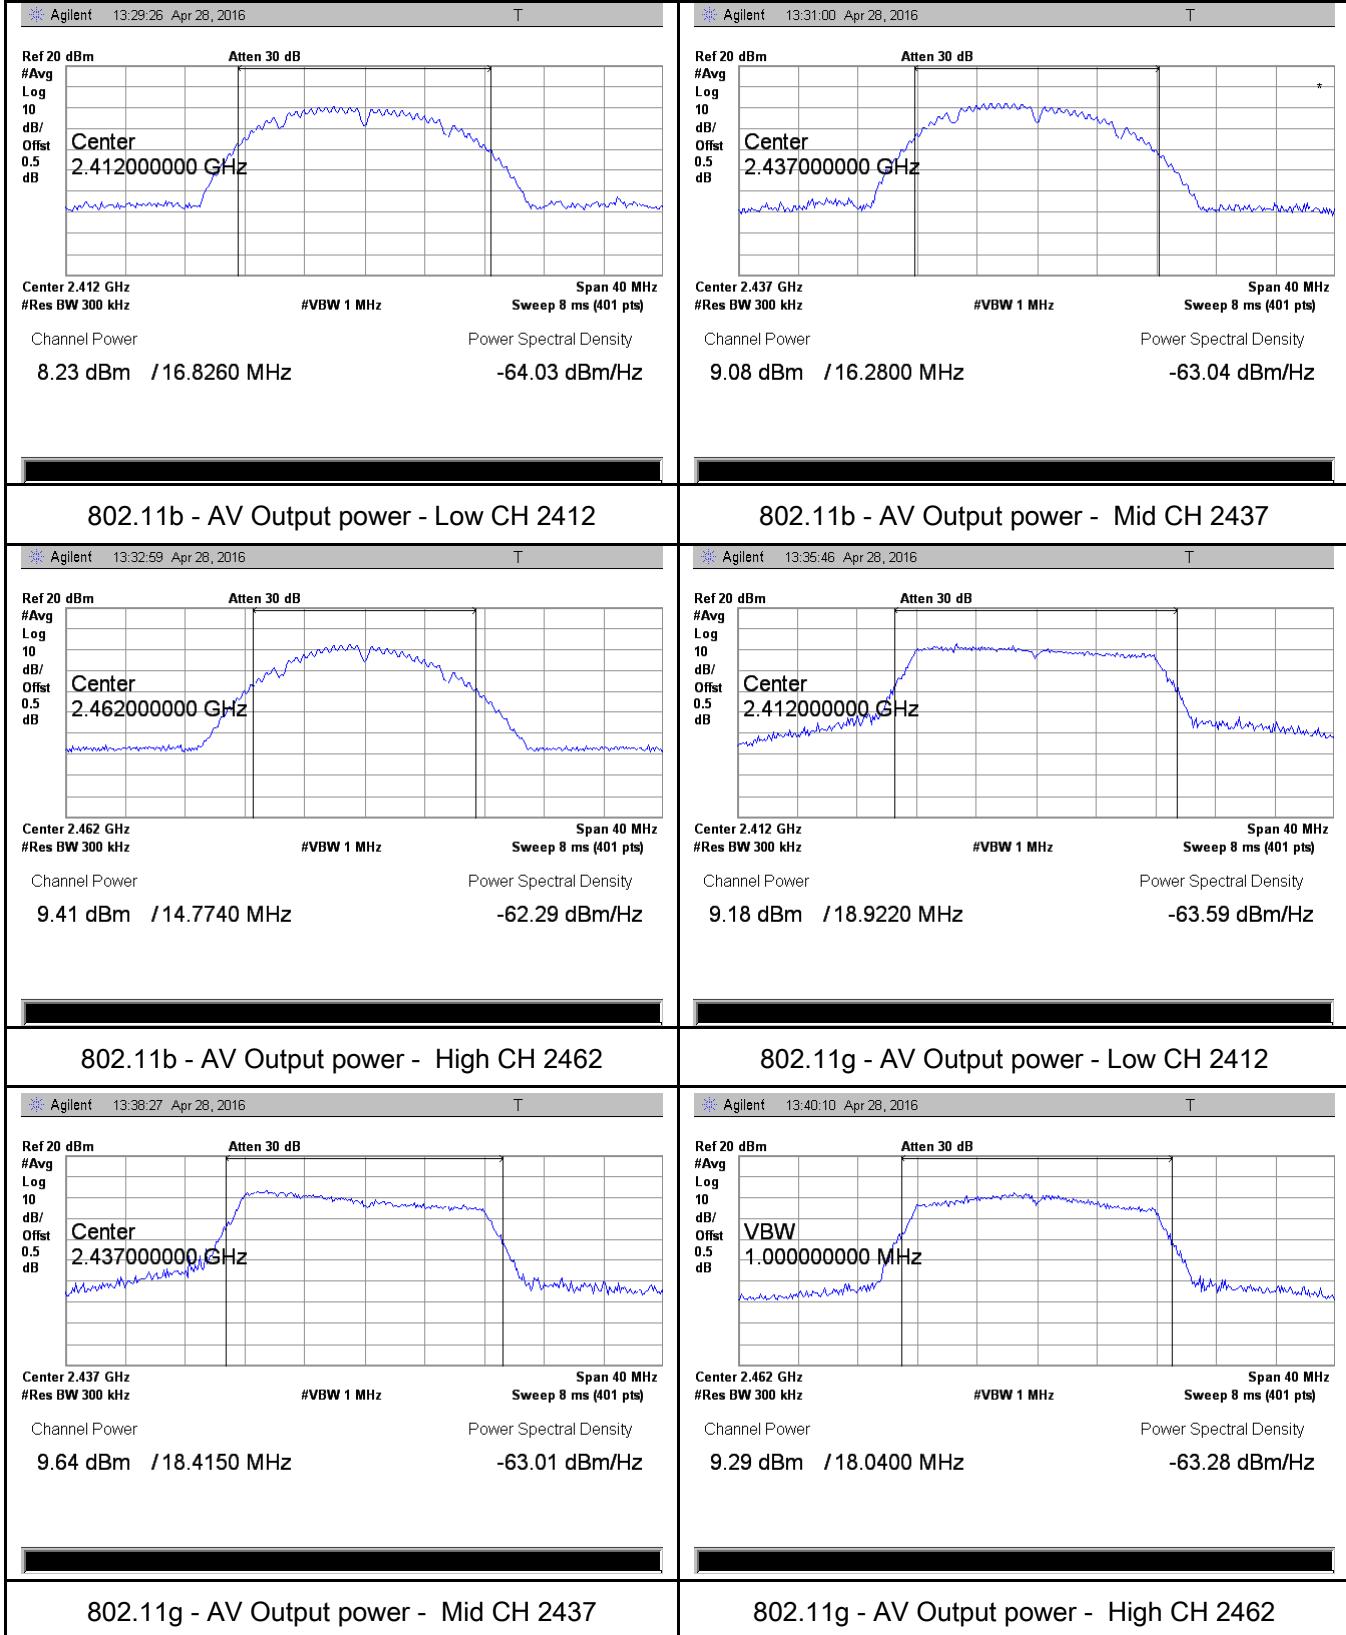

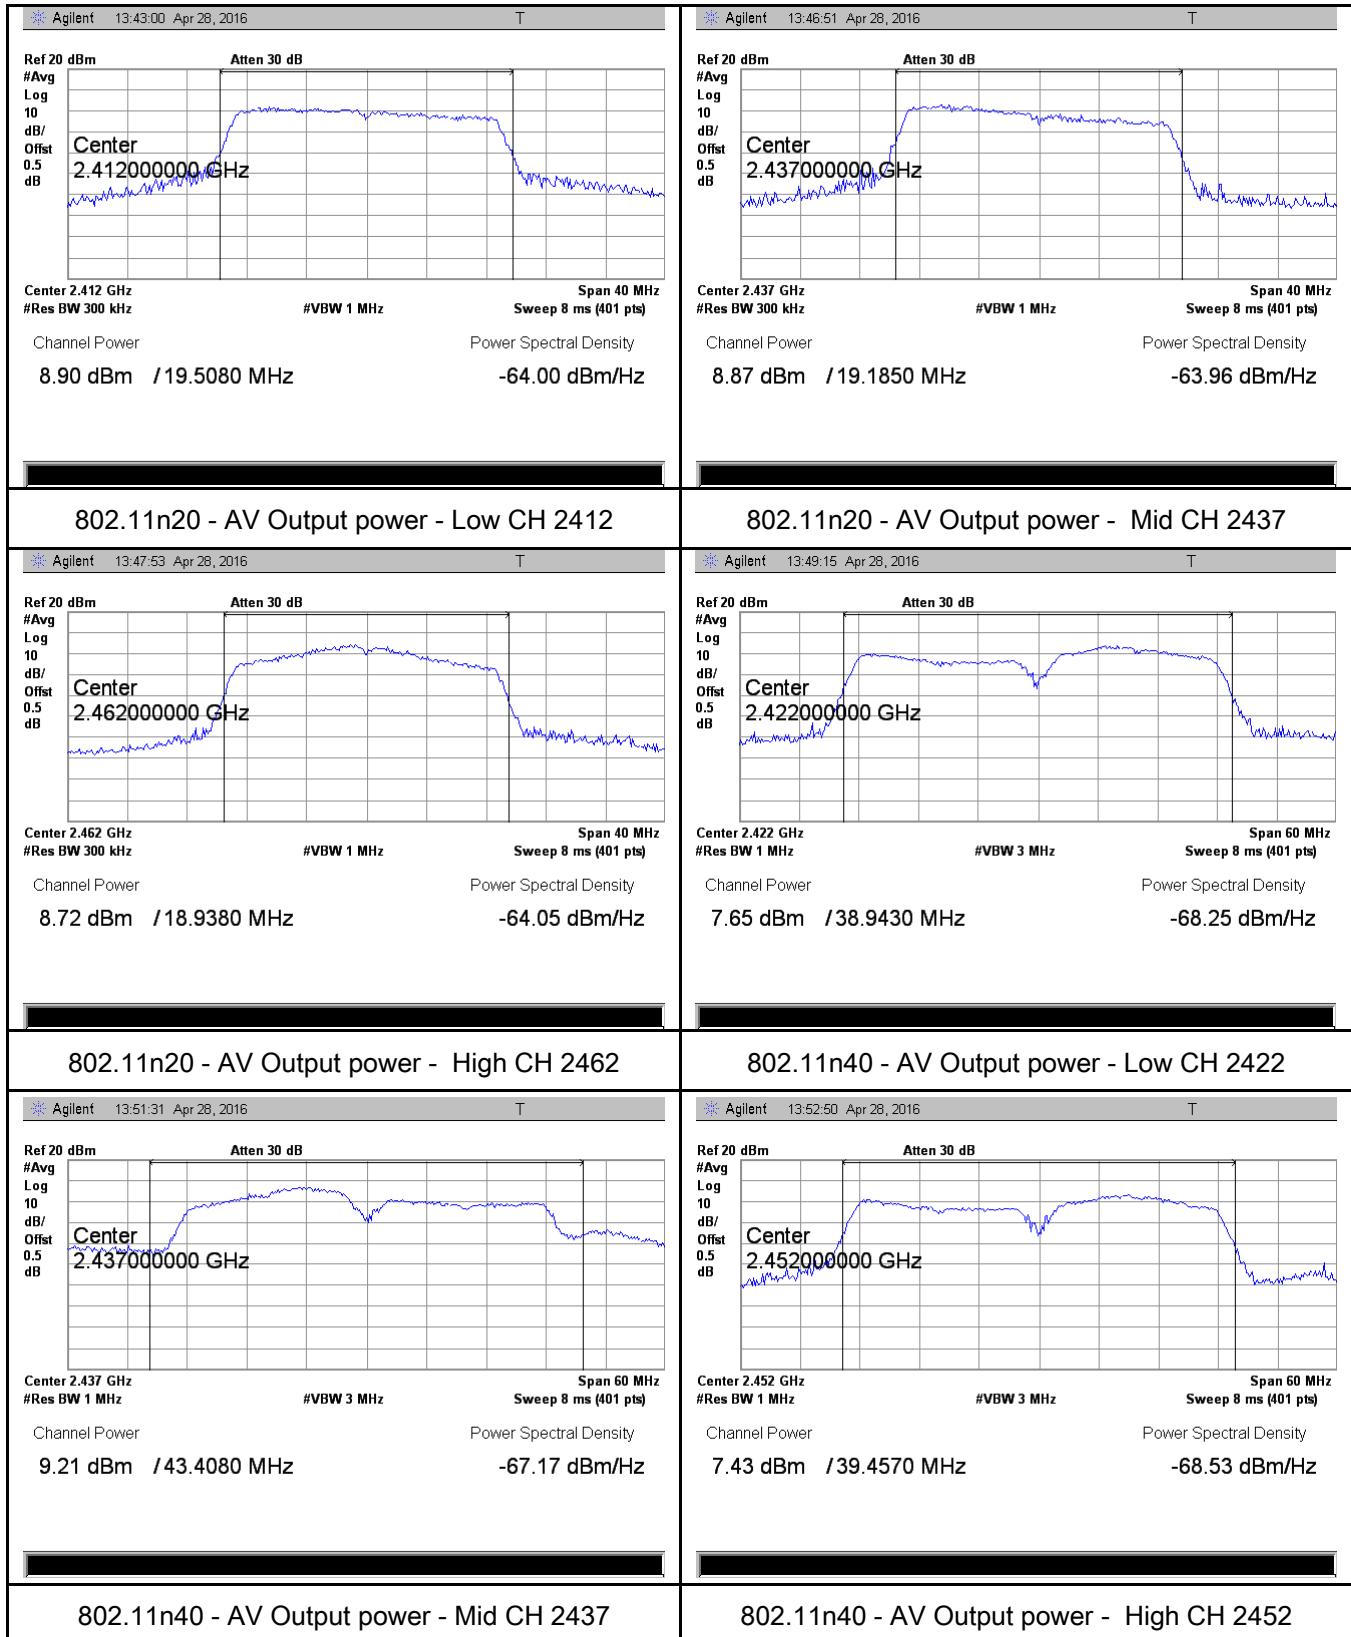

## 6.4 Power Spectral Density

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	April 28, 2016
Tested By :	Winnie Zhang

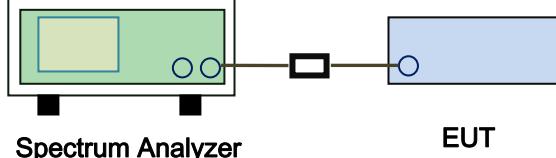Spec	Item	Requirement	Applicable
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS MEAS Guidance v03r03, 10.2 power spectral density method power spectral density measurement procedure</p> <ul style="list-style-type: none"> <li>- a) Set analyzer center frequency to DTS channel center frequency.</li> <li>- b) Set the span to 1.5 times the DTS bandwidth.</li> <li>- c) Set the RBW to: <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>.</li> <li>- d) Set the VBW <math>\geq 3 \times \text{RBW}</math>.</li> <li>- e) Detector = peak.</li> <li>- f) Sweep time = auto couple.</li> <li>- g) Trace mode = max hold.</li> <li>- h) Allow trace to fully stabilize.</li> <li>- i) Use the peak marker function to determine the maximum amplitude level within the RBW.</li> <li>- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A


### Power Spectral Density measurement result

Type	Test mode	CH	Freq (MHz)	PSD (dBm)	Limit (dBm)	Result
PSD	802.11b	Low	2412	-13.00	8	Pass
		Mid	2437	-12.89	8	Pass
		High	2462	-3.573	8	Pass
	802.11g	Low	2412	-15.05	8	Pass
		Mid	2437	-11.10	8	Pass
		High	2462	-12.02	8	Pass
	802.11n (20M)	Low	2412	-15.00	8	Pass
		Mid	2437	-10.35	8	Pass
		High	2462	-12.16	8	Pass
	802.11n (40M)	Low	2422	-16.15	8	Pass
		Mid	2437	-11.93	8	Pass
		High	2452	-15.64	8	Pass

## Test Plots

### Power Spectral Density measurement result

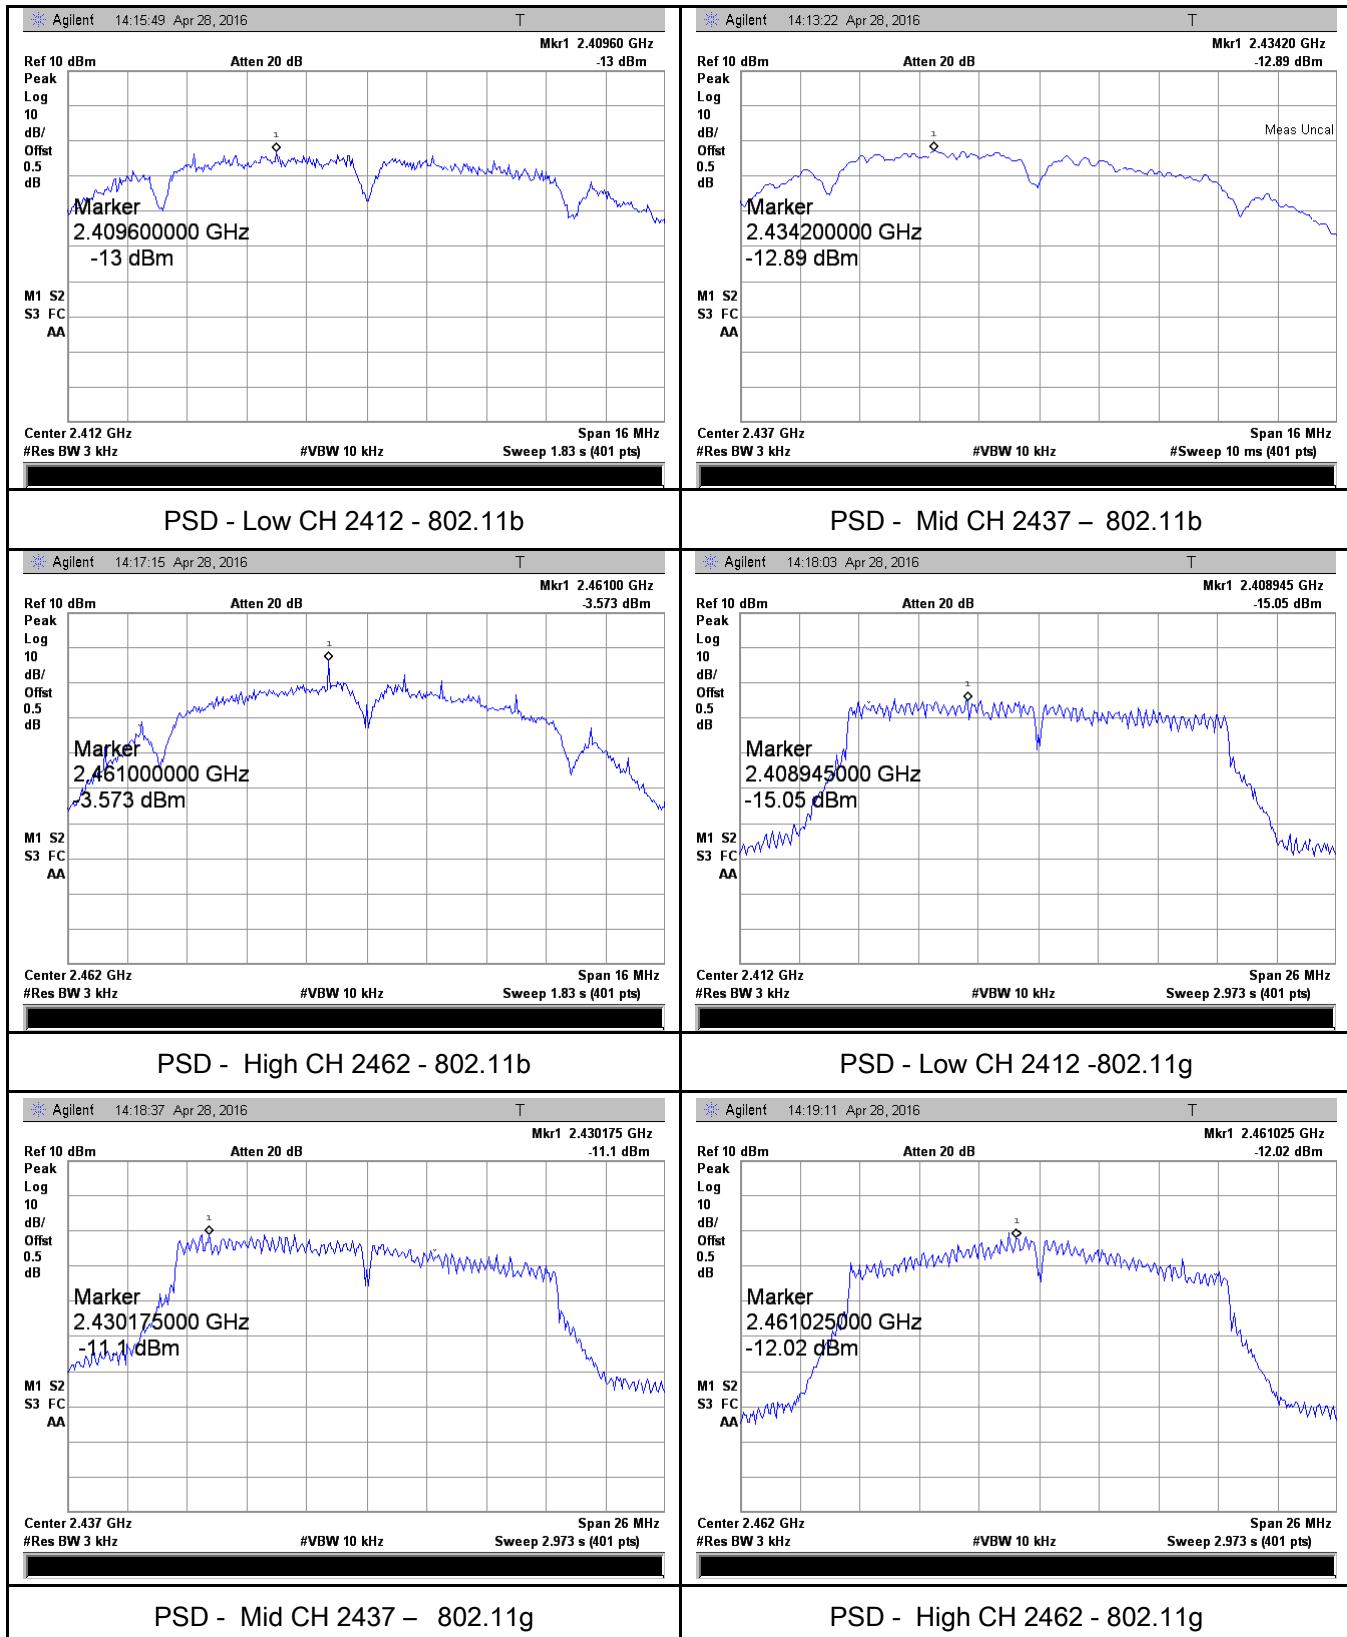


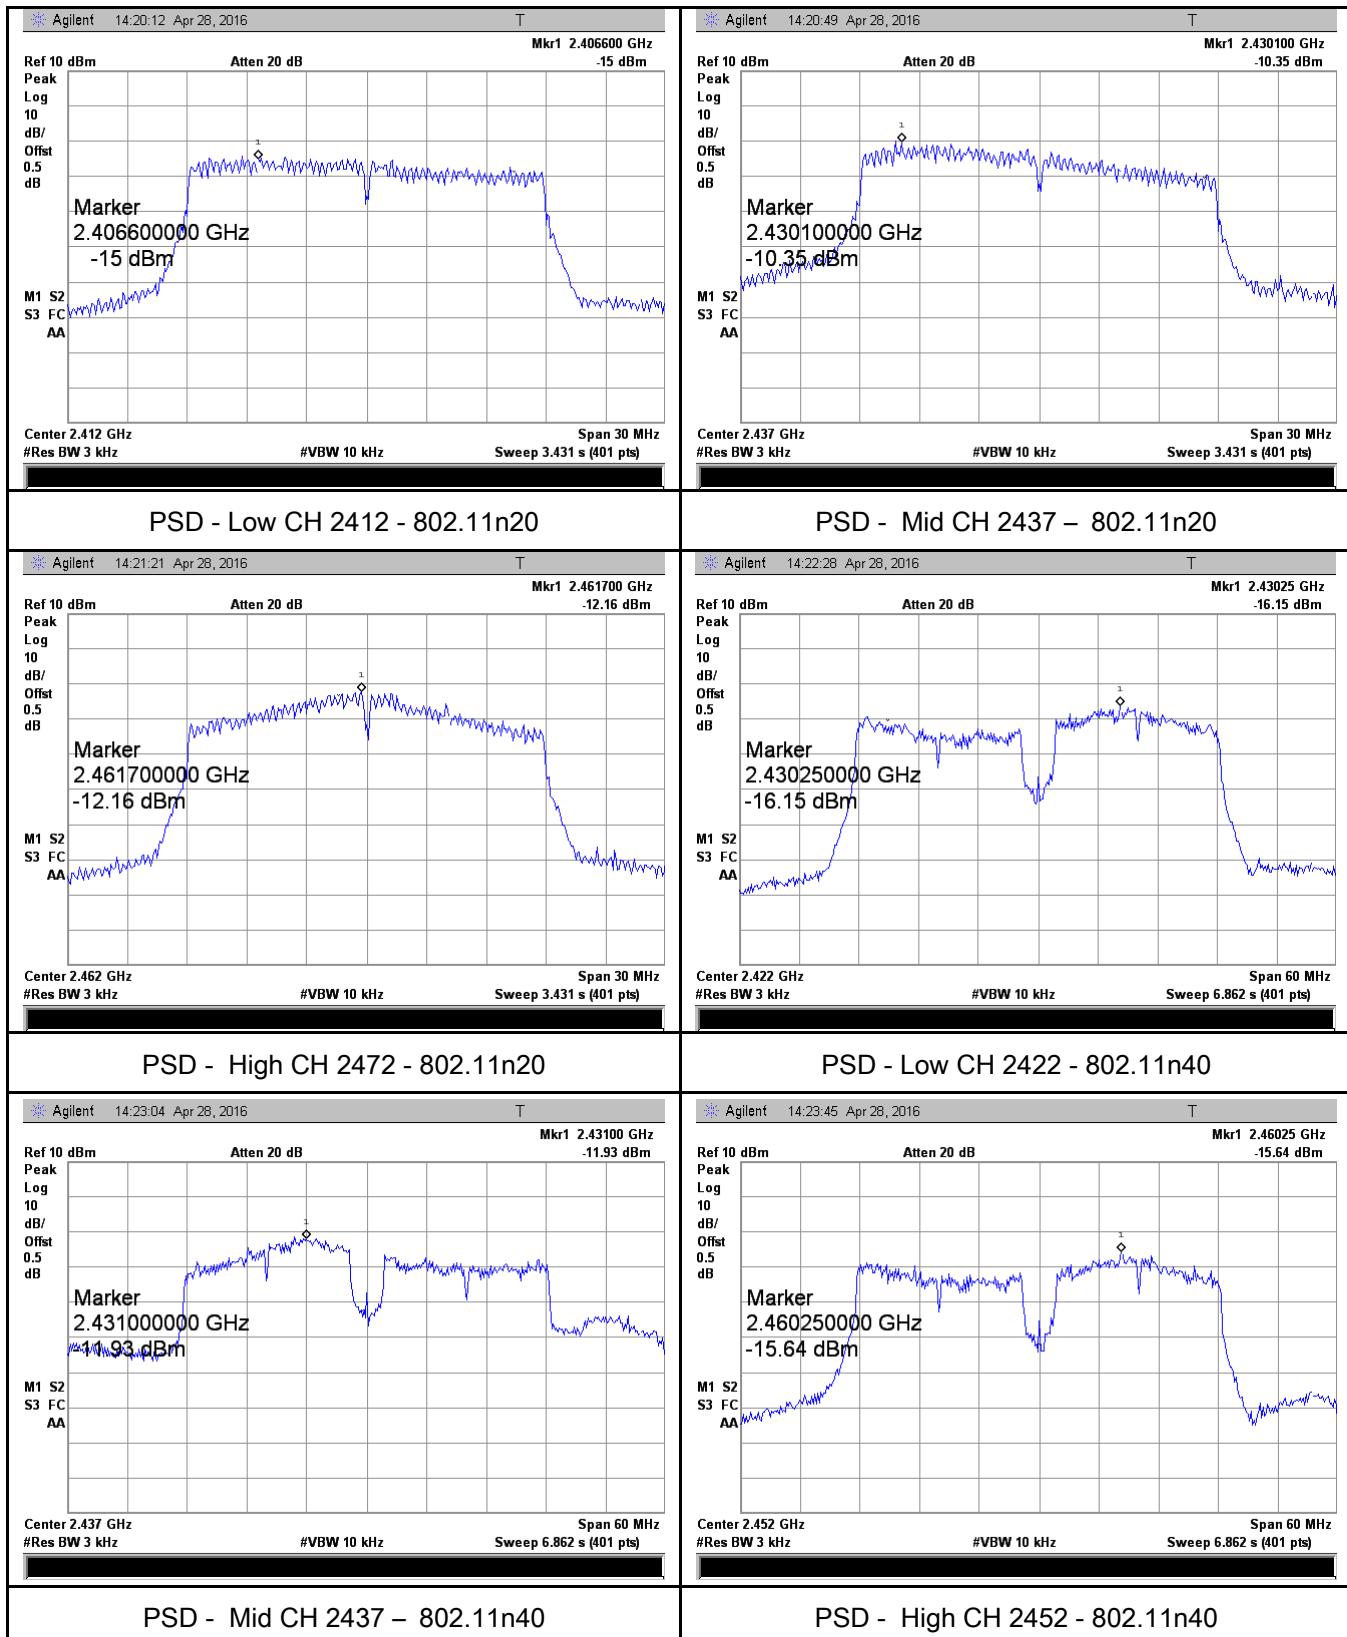

## 6.5 Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	May 06, 2016
Tested By :	Winnie Zhang

### Requirement(s):

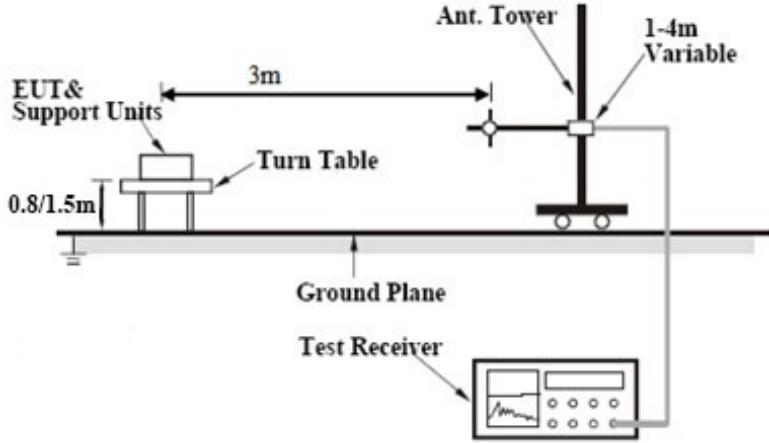Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. An 'EUT &amp; Support Units' is positioned on a 'Turn Table' at a height of '0.8/1.5m' above a 'Ground Plane'. A 'Test Receiver' is connected to the EUT. A '1-4m Variable' length 'Ant. Tower' is mounted on the turn table, extending vertically upwards. A horizontal line labeled '3m' connects the center of the EUT to the base of the Ant. Tower.</p>		
Test Procedure	<p>Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.</li> </ul>		


	<ul style="list-style-type: none"> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:           <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail



Test Data  Yes  N/A



Test Plot  Yes (See below)  N/A




## Test Plots

### Band Edge measurement result

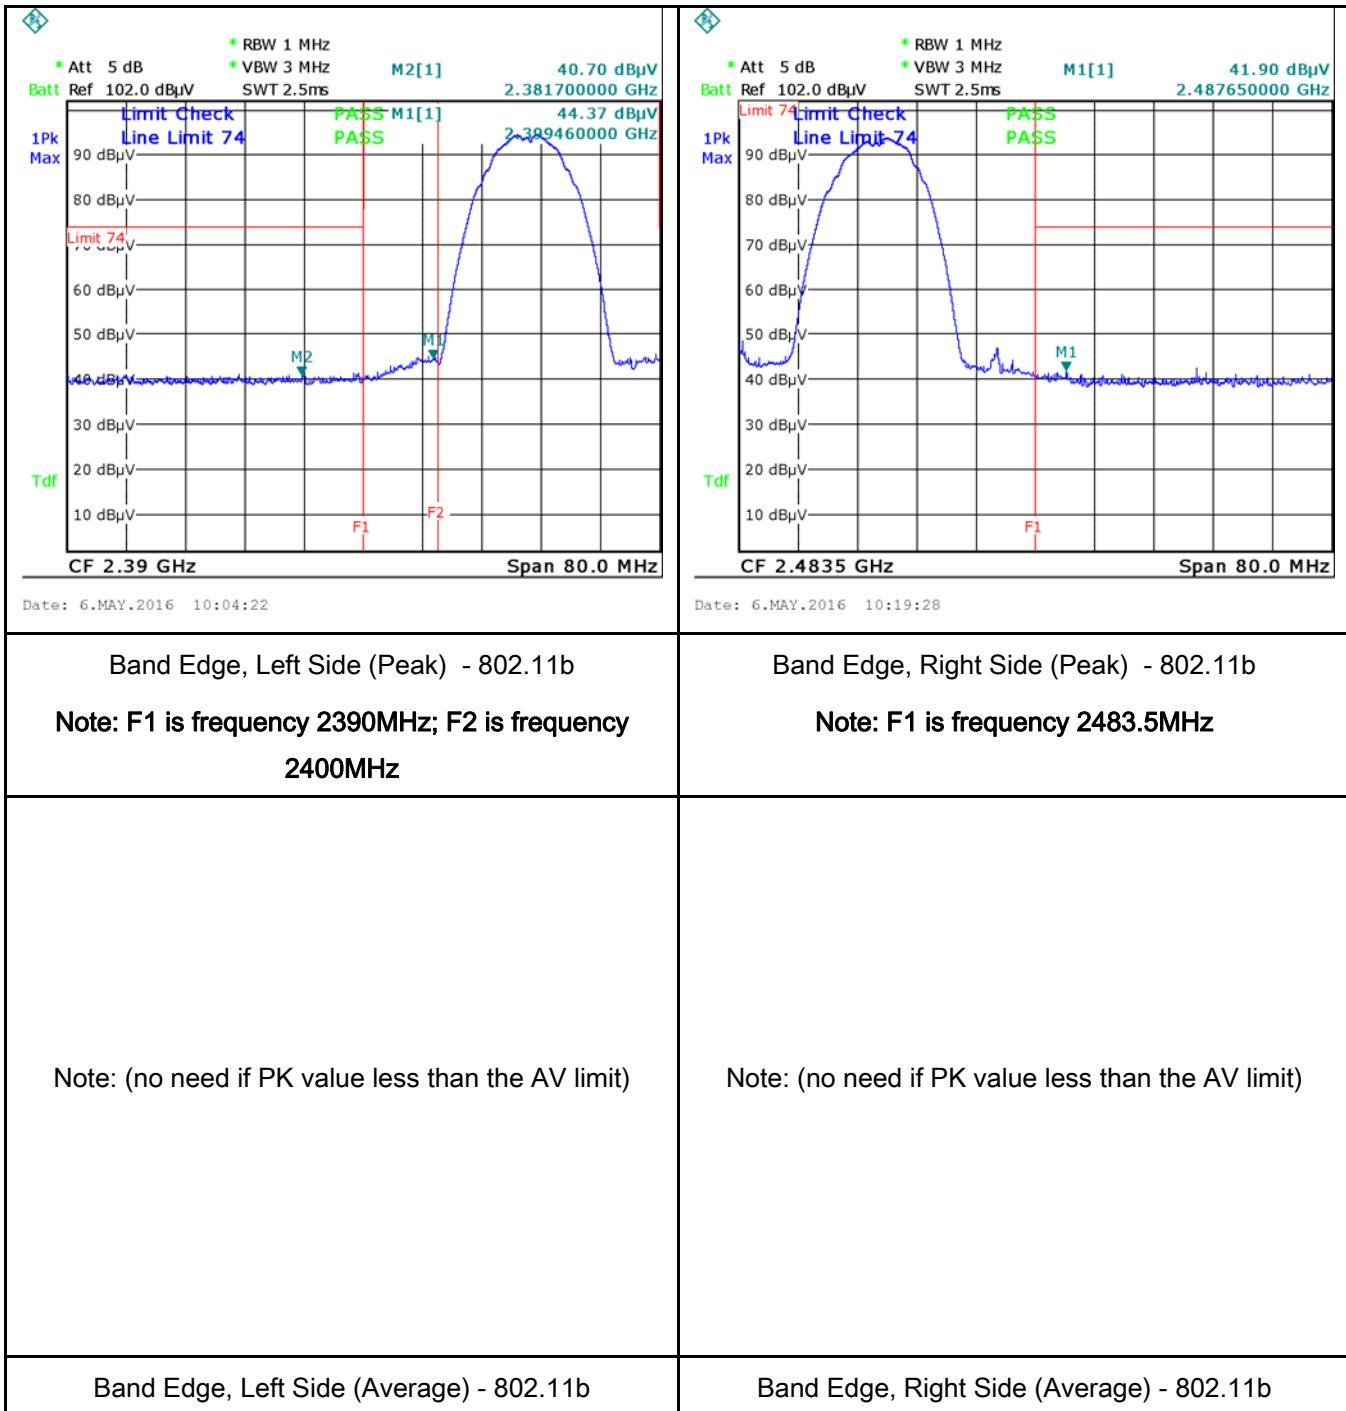

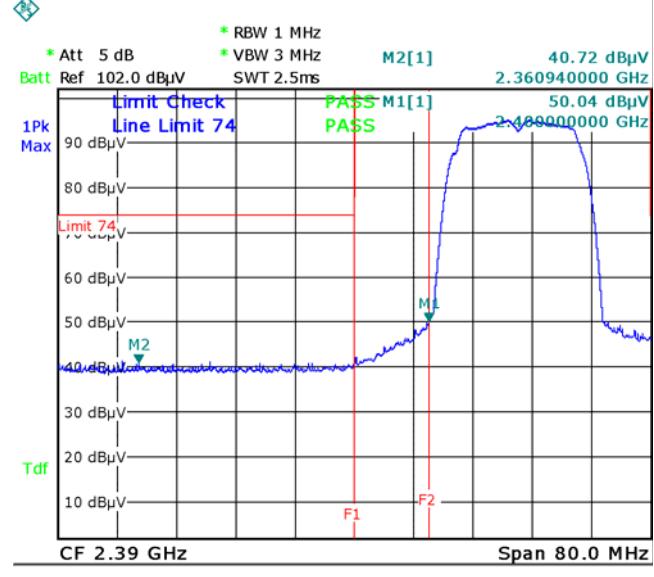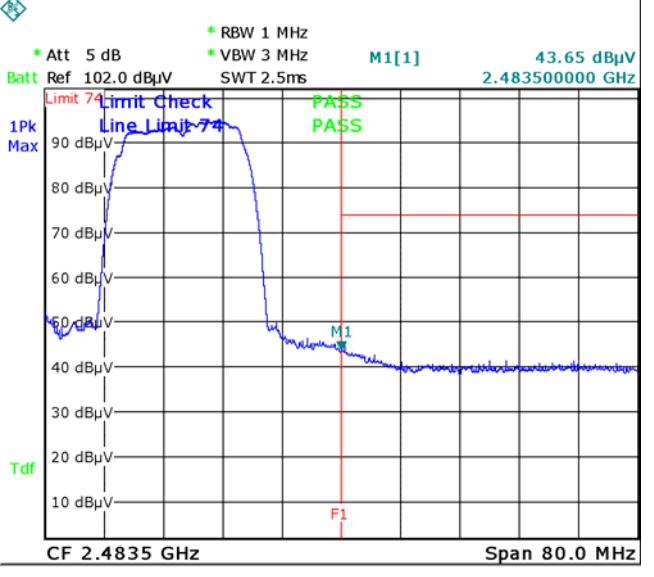 <p><b>Test Report No. 16070480-FCC-R3</b></p> <p><b>Test Parameters:</b></p> <ul style="list-style-type: none"> <li>* Att 5 dB</li> <li>* RBW 1 MHz</li> <li>* VBW 3 MHz</li> <li>SWT 2.5ms</li> <li>Batt Ref 102.0 dB<math>\mu</math>V</li> </ul> <p><b>Results:</b></p> <ul style="list-style-type: none"> <li>1Pk Max: 50.04 dB<math>\mu</math>V at 2.360940000 GHz</li> <li>Line Limit 74: PASS</li> <li>Limit 74: PASS</li> <li>M1[1]: 40.72 dB<math>\mu</math>V at 2.360940000 GHz</li> <li>M2[1]: 50.04 dB<math>\mu</math>V at 2.360940000 GHz</li> <li>F1: 2390 MHz</li> <li>F2: 2400 MHz</li> </ul> <p><b>Date:</b> 6.MAY.2016 10:06:36</p>	 <p><b>Test Report No. 16070480-FCC-R3</b></p> <p><b>Test Parameters:</b></p> <ul style="list-style-type: none"> <li>* Att 5 dB</li> <li>* RBW 1 MHz</li> <li>* VBW 3 MHz</li> <li>SWT 2.5ms</li> <li>Batt Ref 102.0 dB<math>\mu</math>V</li> </ul> <p><b>Results:</b></p> <ul style="list-style-type: none"> <li>1Pk Max: 43.65 dB<math>\mu</math>V at 2.483500000 GHz</li> <li>Line Limit 74: PASS</li> <li>Limit 74: PASS</li> <li>M1[1]: 43.65 dB<math>\mu</math>V at 2.483500000 GHz</li> <li>F1: 2483.5 MHz</li> </ul> <p><b>Date:</b> 6.MAY.2016 10:18:07</p>
<p><b>Band Edge, Left Side (Peak) - 802.11g</b></p> <p><b>Note:</b> F1 is frequency 2390MHz; F2 is frequency 2400MHz</p> <p>Note: (no need if PK value less than the AV limit)</p>	<p><b>Band Edge, Right Side (Peak) - 802.11g</b></p> <p><b>Note:</b> F1 is frequency 2483.5MHz</p> <p>Note: (no need if PK value less than the AV limit)</p>
<p><b>Band Edge, Left Side (Average) - 802.11g</b></p> <p><b>Note:</b> F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p><b>Band Edge, Right Side (Average) - 802.11g</b></p> <p><b>Note:</b> F1 is frequency 2483.5MHz</p>

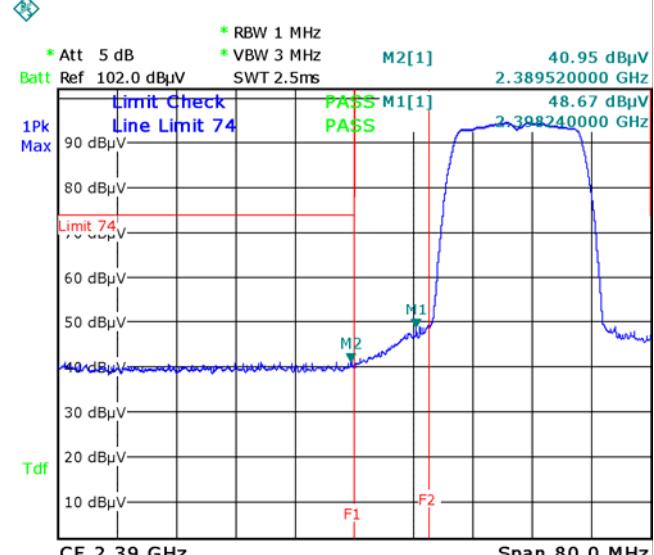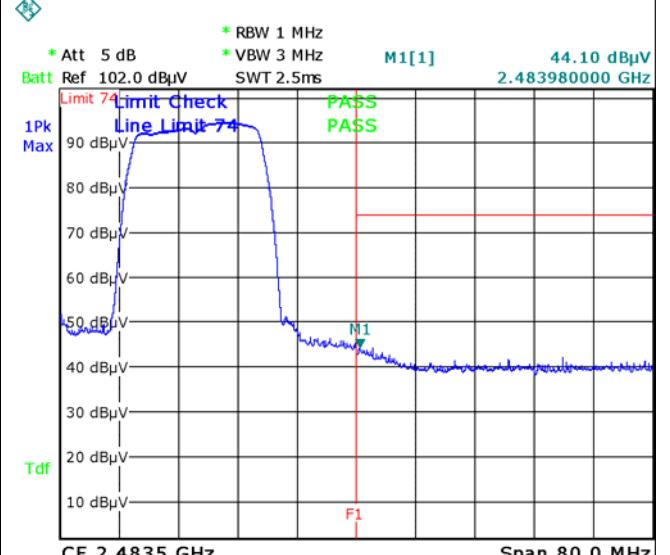
 <p>* RBW 1 MHz    * Att 5 dB    * VBW 3 MHz    Ref 102.0 dB<math>\mu</math>V    Batt 2.389520000 GHz    M2[1] 40.95 dB<math>\mu</math>V    SWT 2.5ms</p> <p>1Pk Max    Tdf</p> <p>Limit Check    Line Limit 74    90 dB<math>\mu</math>V    80 dB<math>\mu</math>V    Limit 74    60 dB<math>\mu</math>V    50 dB<math>\mu</math>V    40 dB<math>\mu</math>V    30 dB<math>\mu</math>V    20 dB<math>\mu</math>V    10 dB<math>\mu</math>V</p> <p>PASS M1[1]    M2    F1    F2</p> <p>CF 2.39 GHz Span 80.0 MHz</p>	 <p>* RBW 1 MHz    * Att 5 dB    * VBW 3 MHz    Ref 102.0 dB<math>\mu</math>V    Batt 2.483980000 GHz    M1[1] 44.10 dB<math>\mu</math>V    SWT 2.5ms</p> <p>1Pk Max    Tdf</p> <p>Limit 74    Line Limit 74    90 dB<math>\mu</math>V    80 dB<math>\mu</math>V    70 dB<math>\mu</math>V    60 dB<math>\mu</math>V    50 dB<math>\mu</math>V    40 dB<math>\mu</math>V    30 dB<math>\mu</math>V    20 dB<math>\mu</math>V    10 dB<math>\mu</math>V</p> <p>PASS    M1    F1</p> <p>CF 2.4835 GHz Span 80.0 MHz</p>
<p>Date: 6.MAY.2016 10:08:38</p> <p>Band Edge, Left Side (Peak) - 802.11n20</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Date: 6.MAY.2016 10:16:44</p> <p>Band Edge, Right Side (Peak) - 802.11n20</p> <p>Note: F1 is frequency 2483.5MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>Band Edge, Left Side (Average) - 802.11n20</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side (Average) - 802.11n20</p> <p>Note: F1 is frequency 2483.5MHz</p>

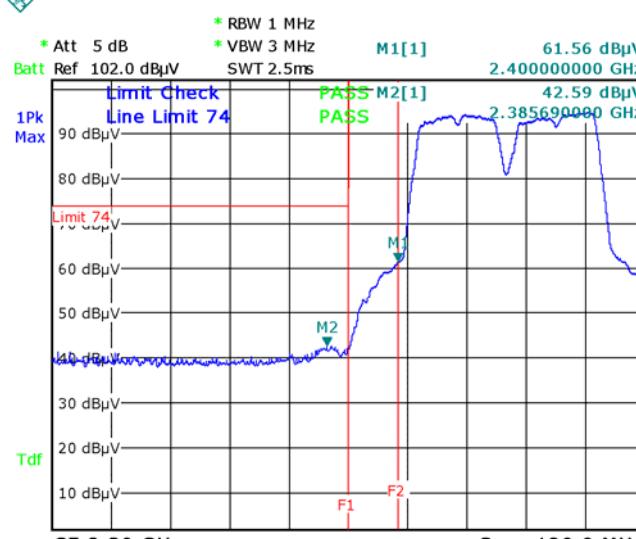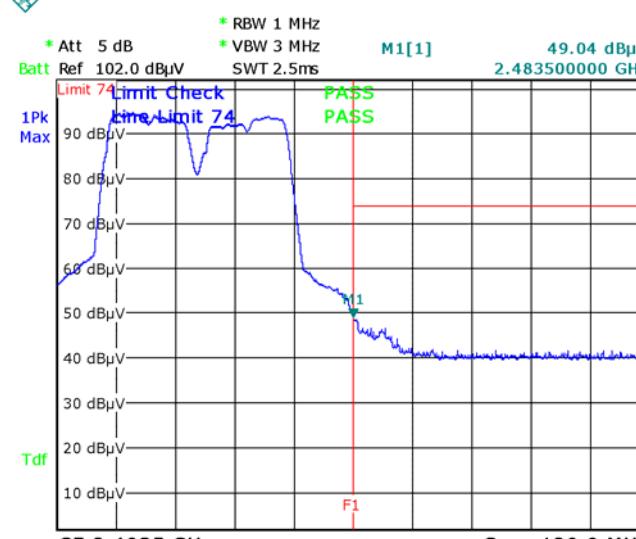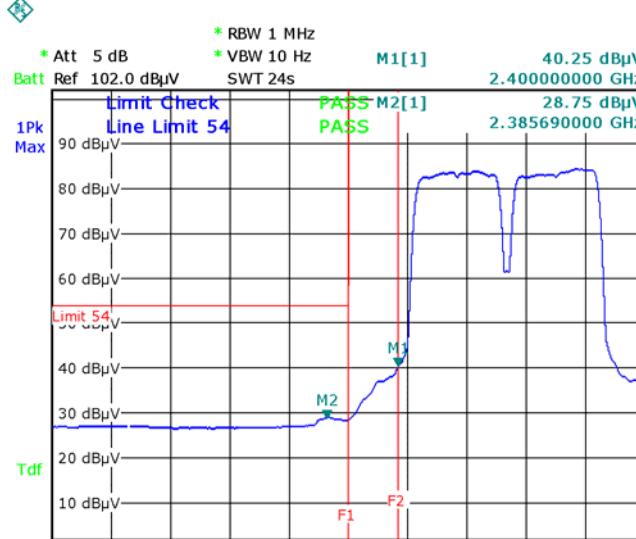 <p>* RBW 1 MHz    * Att 5 dB    Batt Ref 102.0 dB<math>\mu</math>V    1Pk Max    Tdf</p> <p>Limit Check    Line Limit 74    90 dB<math>\mu</math>V    80 dB<math>\mu</math>V    Limit 74    60 dB<math>\mu</math>V    50 dB<math>\mu</math>V    40 dB<math>\mu</math>V    30 dB<math>\mu</math>V    20 dB<math>\mu</math>V    10 dB<math>\mu</math>V    F1    F2    M1    M2    M1[1] 61.56 dB<math>\mu</math>V    2.40000000 GHz    42.59 dB<math>\mu</math>V    2.385690000 GHz</p> <p>CF 2.39 GHz Span 120.0 MHz</p>	 <p>* RBW 1 MHz    * Att 5 dB    Batt Ref 102.0 dB<math>\mu</math>V    1Pk Max    Tdf</p> <p>Limit 74    Limit Check    Line Limit 74    90 dB<math>\mu</math>V    80 dB<math>\mu</math>V    70 dB<math>\mu</math>V    60 dB<math>\mu</math>V    50 dB<math>\mu</math>V    40 dB<math>\mu</math>V    30 dB<math>\mu</math>V    20 dB<math>\mu</math>V    10 dB<math>\mu</math>V    F1    M1    M1[1] 49.04 dB<math>\mu</math>V    2.483500000 GHz    42.59 dB<math>\mu</math>V    2.385690000 GHz</p> <p>CF 2.4835 GHz Span 120.0 MHz</p>
<p>Date: 6.MAY.2016 10:10:26</p> <p>Band Edge, Left Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Date: 6.MAY.2016 10:15:04</p> <p>Band Edge, Right Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>
 <p>* RBW 1 MHz    * Att 5 dB    Batt Ref 102.0 dB<math>\mu</math>V    1Pk Max    Tdf</p> <p>Limit Check    Line Limit 54    90 dB<math>\mu</math>V    80 dB<math>\mu</math>V    70 dB<math>\mu</math>V    60 dB<math>\mu</math>V    Limit 54    50 dB<math>\mu</math>V    40 dB<math>\mu</math>V    30 dB<math>\mu</math>V    20 dB<math>\mu</math>V    10 dB<math>\mu</math>V    F1    F2    M1    M2    M1[1] 40.25 dB<math>\mu</math>V    2.40000000 GHz    28.75 dB<math>\mu</math>V    2.385690000 GHz</p> <p>CF 2.39 GHz Span 120.0 MHz</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>Date: 6.MAY.2016 10:12:21</p> <p>Band Edge, Left Side (Average) - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side (Average) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>

## 6.6 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	May 06, 2016
Tested By :	Winnie Zhang

### Requirement(s):

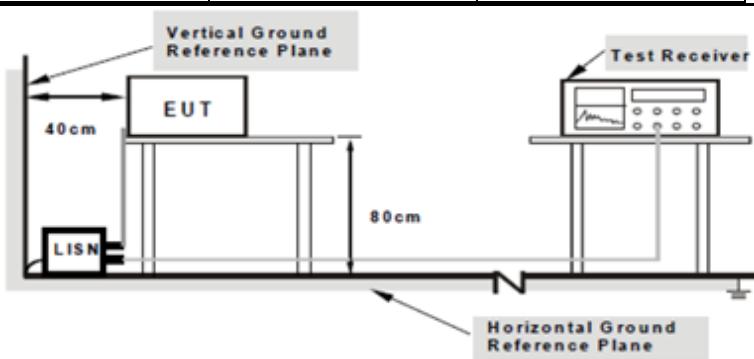
Spec	Item	Requirement	Applicable															
47CFR§15.207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th>Frequency ranges (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th></th> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB $\mu$ V)			QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB $\mu$ V)																	
	QP	Average																
0.15 ~ 0.5	66 – 56	56 – 46																
0.5 ~ 5	56	46																
5 ~ 30	60	50																
Test Setup	 <p><b>Note:</b> 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																	
Procedure	<ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol>																	

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A


Test Mode: Transmitting Mode

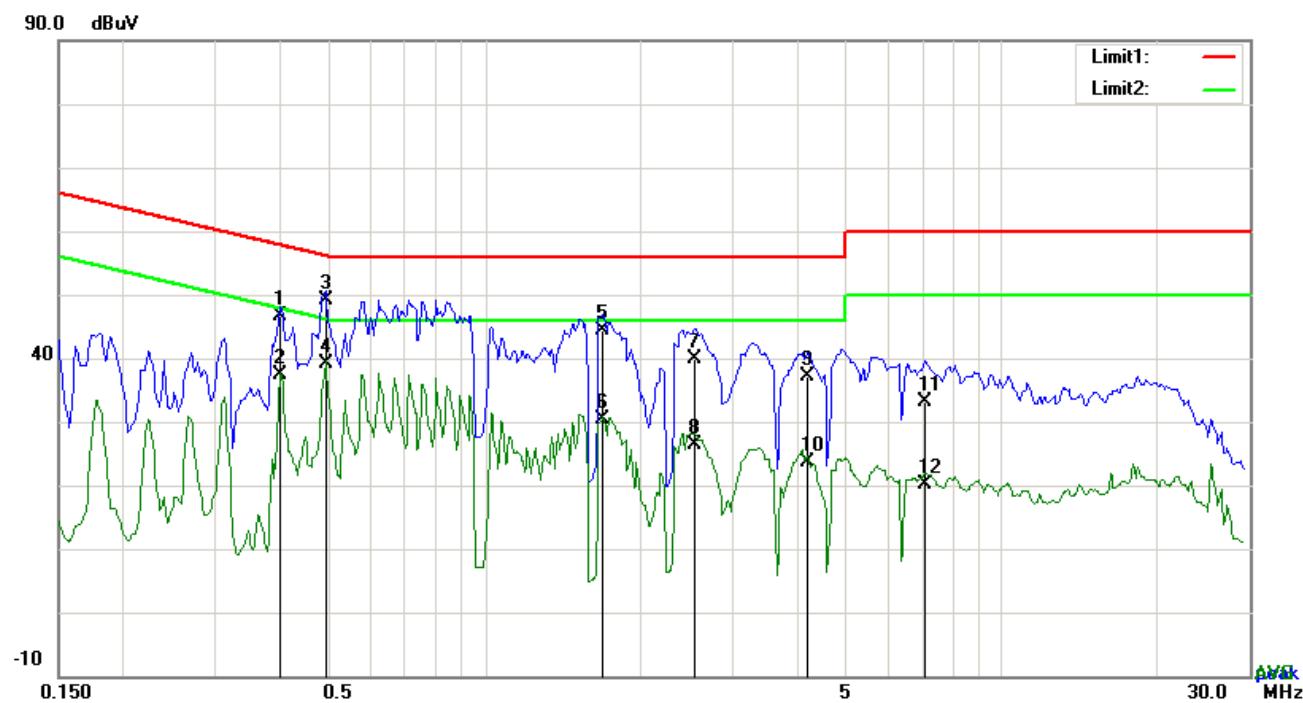
*Test Data*

## Phase Line Plot at 120Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
1	L1	0.4035	36.63	QP	10.03	46.66	57.78	-11.12
2	L1	0.4035	27.38	AVG	10.03	37.41	47.78	-10.37
3	L1	0.4932	39.09	QP	10.03	49.12	56.11	-6.99
4	L1	0.4932	29.17	AVG	10.03	39.20	46.11	-6.91
5	L1	1.6944	34.22	QP	10.04	44.26	56.00	-11.74
6	L1	1.6944	20.41	AVG	10.04	30.45	46.00	-15.55
7	L1	2.5524	29.90	QP	10.05	39.95	56.00	-16.05
8	L1	2.5524	16.27	AVG	10.05	26.32	46.00	-19.68
9	L1	4.2012	26.99	QP	10.07	37.06	56.00	-18.94
10	L1	4.2012	13.63	AVG	10.07	23.70	46.00	-22.30
11	L1	7.0833	23.13	QP	10.11	33.24	60.00	-26.76
12	L1	7.0833	9.91	AVG	10.11	20.02	50.00	-29.98

Test Mode: Transmitting Mode

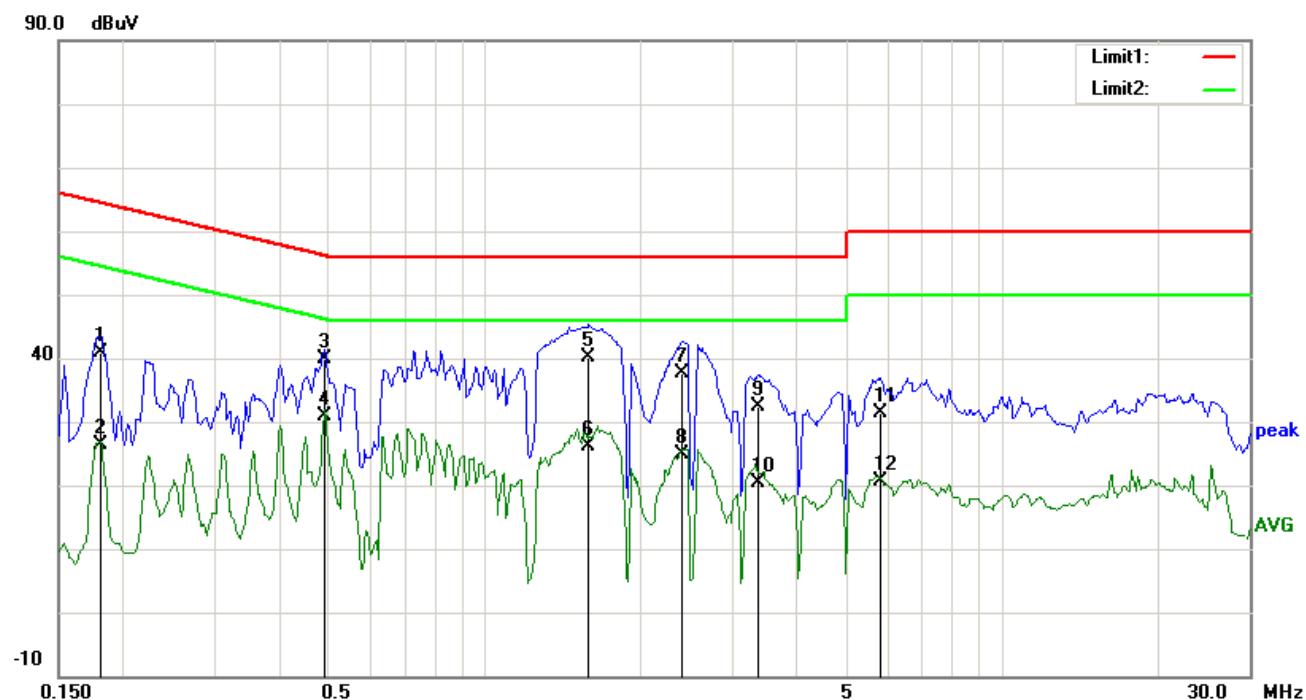
**Test Data**
**Phase Neutral Plot at 120Vac, 60Hz**

No.	P/L	Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
1	N	0.1812	30.89	QP	10.02	40.91	64.43	-23.52
2	N	0.1812	16.40	AVG	10.02	26.42	54.43	-28.01
3	N	0.4893	29.94	QP	10.02	39.96	56.18	-16.22
4	N	0.4893	20.87	AVG	10.02	30.89	46.18	-15.29
5	N	1.5852	30.12	QP	10.04	40.16	56.00	-15.84
6	N	1.5852	15.98	AVG	10.04	26.02	46.00	-19.98
7	N	2.4042	27.71	QP	10.04	37.75	56.00	-18.25
8	N	2.4042	14.94	AVG	10.04	24.98	46.00	-21.02
9	N	3.3783	22.29	QP	10.05	32.34	56.00	-23.66
10	N	3.3783	10.34	AVG	10.05	20.39	46.00	-25.61
11	N	5.8080	21.39	QP	10.08	31.47	60.00	-28.53
12	N	5.8080	10.46	AVG	10.08	20.54	50.00	-29.46

Test Mode:	Transmitting Mode
------------	-------------------

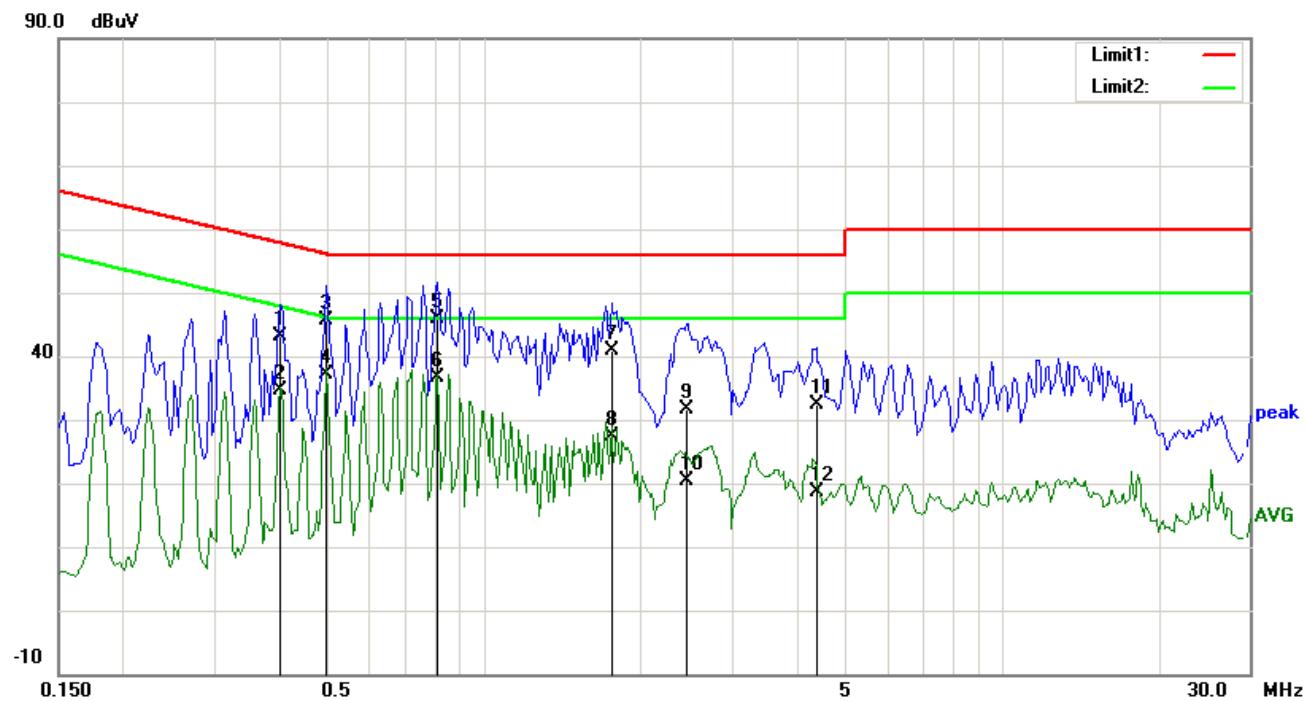


### Test Data

#### Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
1	L1	0.4035	33.09	QP	10.03	43.12	57.78	-14.66
2	L1	0.4035	24.58	AVG	10.03	34.61	47.78	-13.17
3	L1	0.4932	35.65	QP	10.03	45.68	56.11	-10.43
4	L1	0.4932	27.10	AVG	10.03	37.13	46.11	-8.98
5	L1	0.8091	35.92	QP	10.03	45.95	56.00	-10.05
6	L1	0.8091	26.61	AVG	10.03	36.64	46.00	-9.36
7	L1	1.7529	30.87	QP	10.04	40.91	56.00	-15.09
8	L1	1.7529	17.37	AVG	10.04	27.41	46.00	-18.59
9	L1	2.4588	21.53	QP	10.05	31.58	56.00	-24.42
10	L1	2.4588	10.33	AVG	10.05	20.38	46.00	-25.62
11	L1	4.3689	22.31	QP	10.07	32.38	56.00	-23.62
12	L1	4.3689	8.47	AVG	10.07	18.54	46.00	-27.46

Test Mode: Transmitting Mode

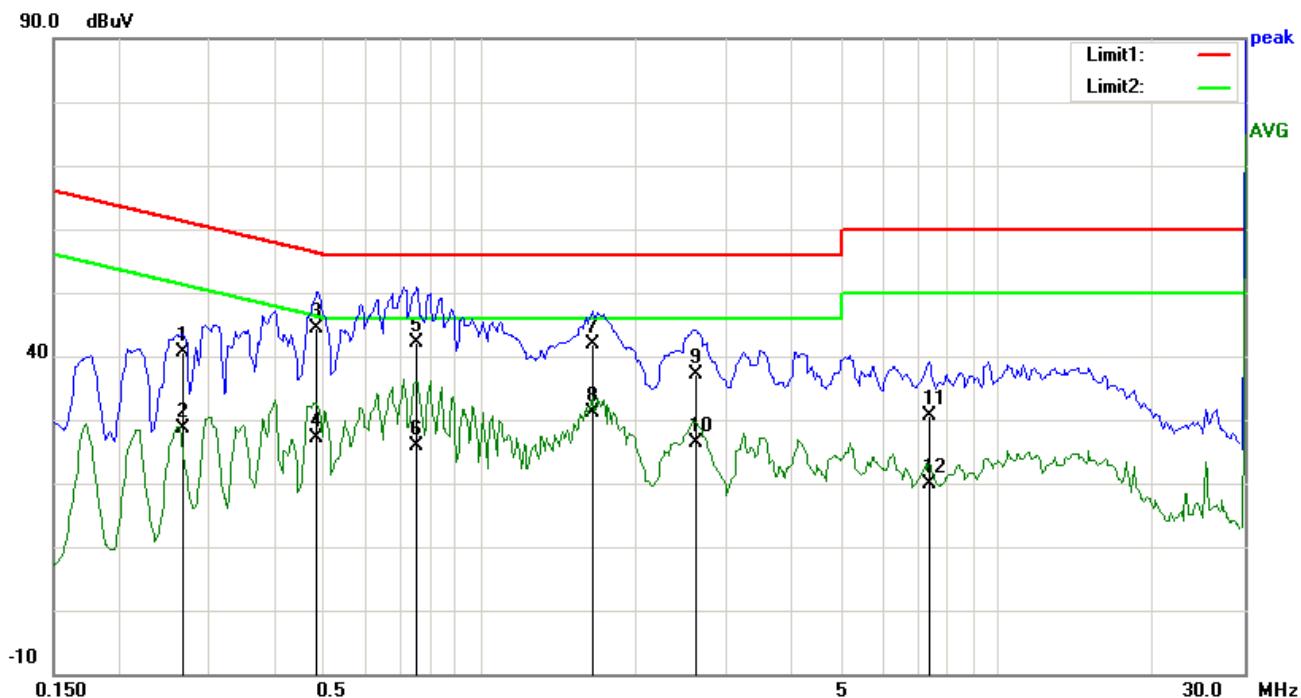
*Test Data*

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
1	N	0.2670	30.60	QP	10.02	40.62	61.21	-20.59
2	N	0.2670	18.64	AVG	10.02	28.66	51.21	-22.55
3	N	0.4854	34.40	QP	10.02	44.42	56.25	-11.83
4	N	0.4854	17.04	AVG	10.02	27.06	46.25	-19.19
5	N	0.7584	32.16	QP	10.03	42.19	56.00	-13.81
6	N	0.7584	15.74	AVG	10.03	25.77	46.00	-20.23
7	N	1.6476	31.83	QP	10.04	41.87	56.00	-14.13
8	N	1.6476	21.18	AVG	10.04	31.22	46.00	-14.78
9	N	2.6187	27.16	QP	10.05	37.21	56.00	-18.79
10	N	2.6187	16.25	AVG	10.05	26.30	46.00	-19.70
11	N	7.3836	20.59	QP	10.10	30.69	60.00	-29.31
12	N	7.3836	9.90	AVG	10.10	20.00	50.00	-30.00

## 6.7 Radiated Spurious Emissions & Restricted Band

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	May 06, 2016
Tested By :	Winnie Zhang

### Requirement(s):

Spec	Item	Requirement	Applicable							
47CFR§15. 247(d), RSS210 (A8.5)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>							
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu</math>V/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength ( $\mu$ V/m)	30 – 88	100	88 – 216	150	216 – 960
Frequency range (MHz)	Field Strength ( $\mu$ V/m)									
30 – 88	100									
88 – 216	150									
216 – 960	200									
Above 960	500									
b)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>								
c)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>								

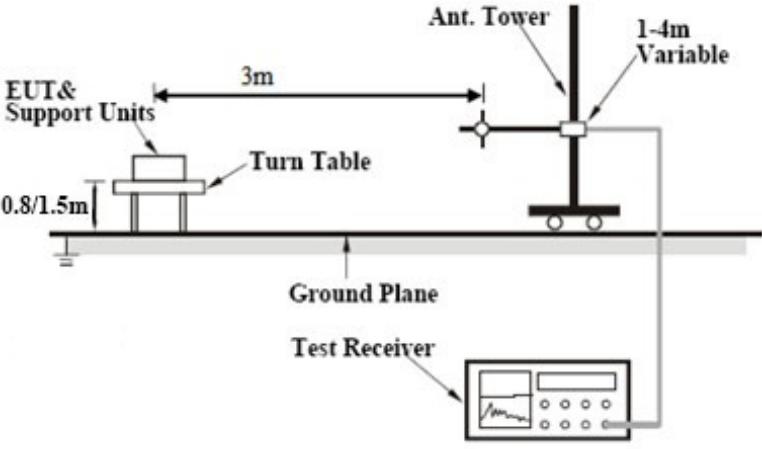
Test Setup	 <p>The diagram illustrates the test setup. An EUT &amp; Support Units assembly is mounted on a Turn Table, which is positioned on a Ground Plane. The Turn Table is 0.8/1.5m from the ground plane. A vertical Ant. Tower is connected to the turn table via a horizontal crossbar. The tower has a height of 1-4m Variable. A Test Receiver is connected to the tower and is shown with a waveform display.</p>
Procedure	<ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:       <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.            The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> <li>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>
Remark	<p>Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n – HT20-2437MHz mode.</p>
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes       N/A

Test Plot     Yes (See below)       N/A

**Test Mode:** Transmitting Mode

(Below 1GHz)

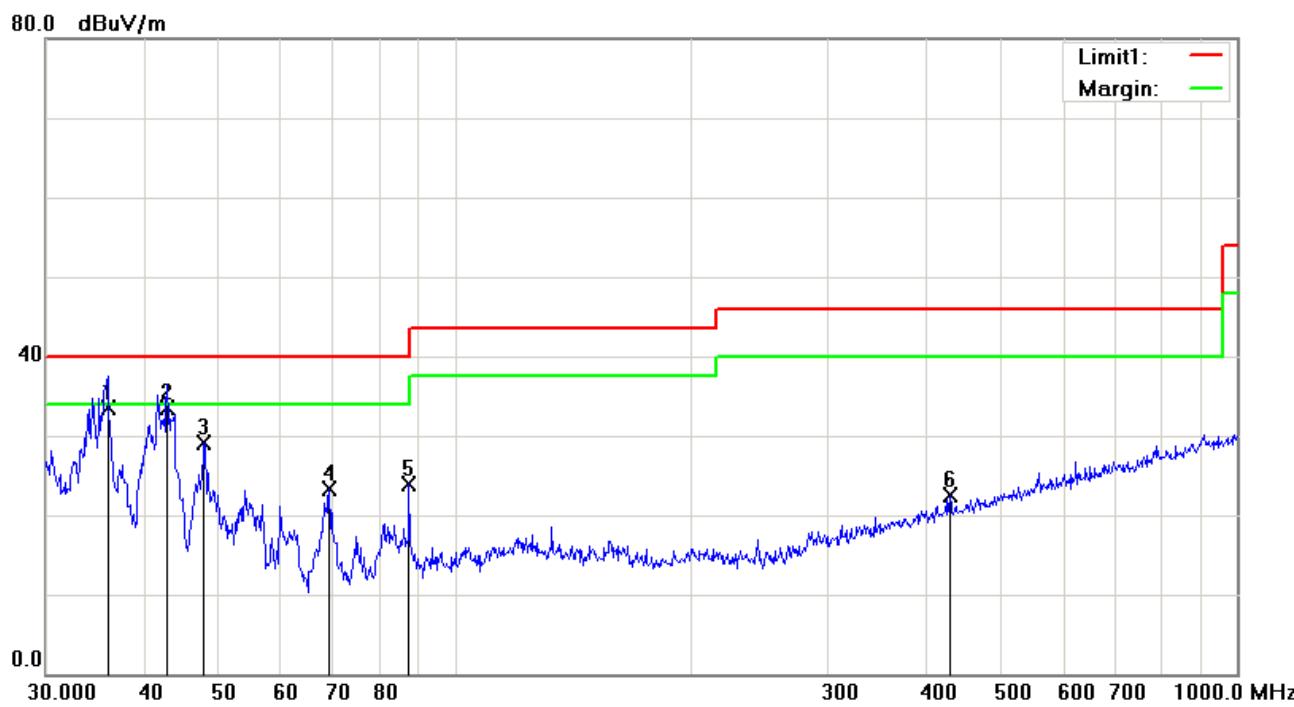


### Test Data

Vertical Polarity Plot @3m

No	P/L	Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Height	Degree
1	H	36.0007	38.12	QP	-4.67	33.45	40.00	-6.55	100	53
2	H	42.8998	42.95	QP	-9.53	33.42	40.00	-6.58	100	237
3	H	47.8260	41.24	peak	-12.20	29.04	40.00	-10.96	100	289
4	H	69.1141	36.92	peak	-13.66	23.26	40.00	-16.74	100	334
5	H	87.4177	37.25	peak	-13.44	23.81	40.00	-16.19	100	139
6	H	429.5228	26.09	peak	-3.58	22.51	46.00	-23.49	100	195

(Below 1GHz)

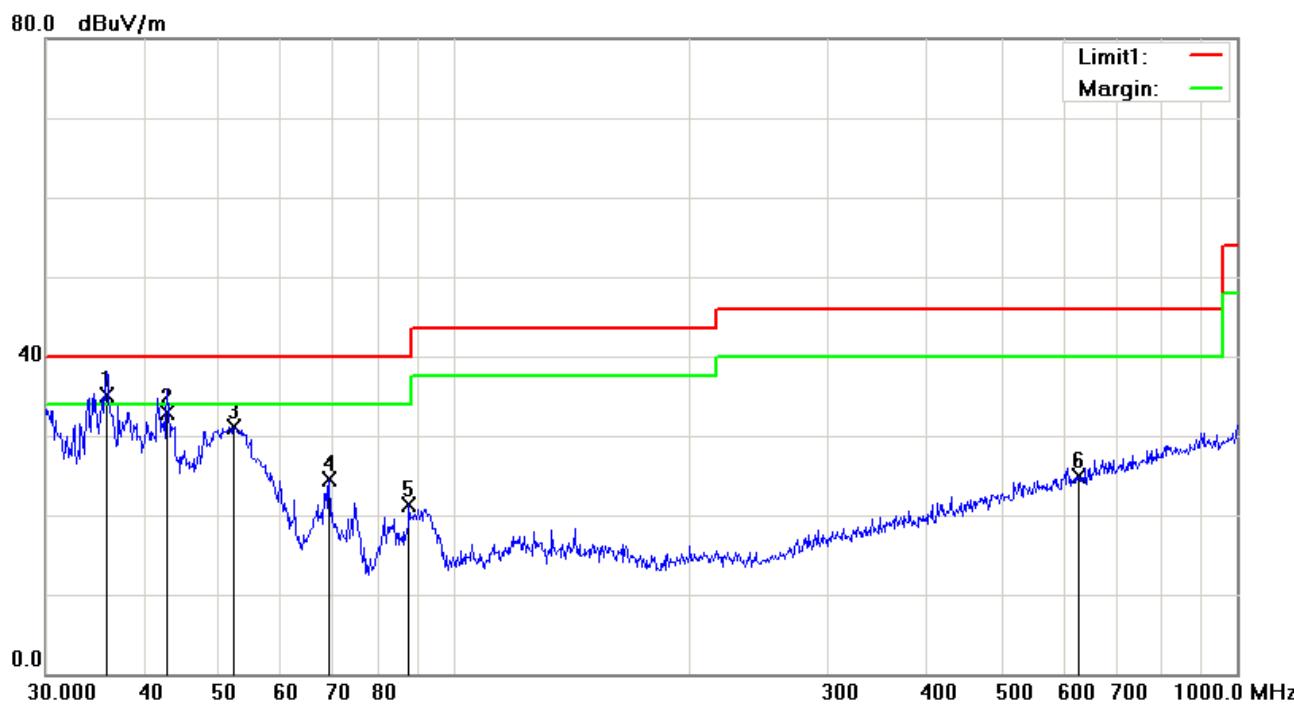

*Test Data*

Horizontal Polarity Plot @3m

No	P/L	Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Height	Degree
1	V	35.8747	39.65	QP	-4.58	35.07	40.00	-4.93	100	207
2	V	42.8998	42.45	QP	-9.53	32.92	40.00	-7.08	100	199
3	V	52.2079	44.51	peak	-13.44	31.07	40.00	-8.93	100	173
4	V	69.1141	38.10	peak	-13.66	24.44	40.00	-15.56	100	203
5	V	87.4177	34.66	peak	-13.44	21.22	40.00	-18.78	100	233
6	V	627.2738	24.44	peak	0.45	24.89	46.00	-21.11	100	17

**Above 1GHz**

Test Mode:	Transmitting Mode
------------	-------------------

**802.11g (Worst Case): Low Channel (2412 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4824	38.95	AV	V	34	6.86	31.72	48.09	54	-5.91
4824	38.68	AV	H	33.8	6.86	31.72	47.62	54	-6.38
4824	47.22	PK	V	34	6.86	31.72	56.36	74	-17.64
4824	47.59	PK	H	33.8	6.86	31.72	56.53	74	-17.47
17857	26.81	AV	V	45.29	11.73	34.54	49.29	54	-4.71
17857	26.58	AV	H	45.29	11.73	34.54	49.06	54	-4.94
17857	43.15	PK	V	45.29	11.73	34.54	65.63	74	-8.37
17857	43.62	PK	H	45.29	11.73	34.54	66.1	74	-7.90

**802.11g (Worst Case): Middle Channel (2437 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4874	38.95	AV	V	33.6	6.82	31.82	47.55	54	-6.45
4874	38.68	AV	H	33.8	6.82	31.82	47.48	54	-6.52
4874	47.22	PK	V	33.6	6.82	31.82	55.82	74	-18.18
4874	47.59	PK	H	33.8	6.82	31.82	56.39	74	-17.61
17871	26.45	AV	V	45.33	11.57	34.61	48.74	54	-5.26
17871	26.13	AV	H	45.33	11.57	34.61	48.42	54	-5.58
17871	43.07	PK	V	45.33	11.57	34.61	65.36	74	-8.64
17871	42.91	PK	H	45.33	11.57	34.61	65.2	74	-8.80

## 802.11b (Worst Case): High Channel (2462 MHz)

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4924	38.82	AV	V	34.6	6.76	31.92	48.26	54	-5.74
4924	38.77	AV	H	34.7	6.76	31.92	48.31	54	-5.69
4924	47.48	PK	V	34.6	6.76	31.92	56.92	74	-17.08
4924	47.52	PK	H	34.7	6.76	31.92	57.06	74	-16.94
17863	26.45	AV	V	45.28	11.54	34.53	48.74	54	-5.26
17863	26.11	AV	H	45.28	11.54	34.53	48.4	54	-5.60
17863	43.28	PK	V	45.28	11.54	34.53	65.57	74	-8.43
17863	43.56	PK	H	45.28	11.54	34.53	65.85	74	-8.15

**Note:**

- 1, The testing has been conformed to  $10*2462\text{MHz}=24,620\text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, GSM voice , GPRS and EGPRS mode were investigating. The results above show only the worse cases.

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted</b>					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
<b>RF conducted test</b>					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>

## Annex B. EUT and Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo





EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View


**Annex B.ii. Photograph: EUT Internal Photo**





Mainboard with Shielding - Rear View

Mainboard without Shielding – Rear View

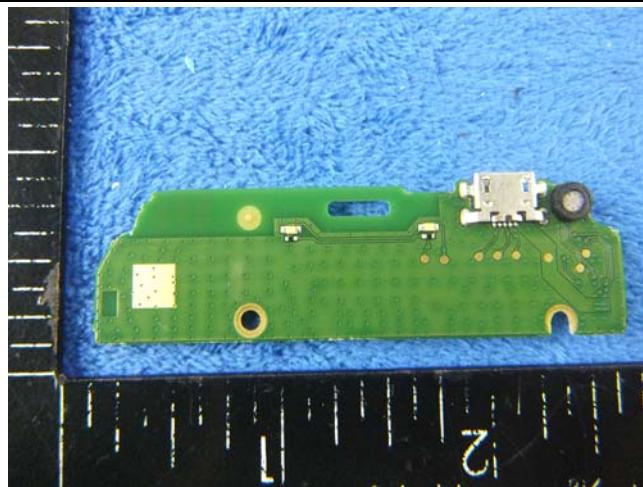

Small Mainboard - Front View

Small Mainboard - Rear View



LCD – Front View

LCD – Rear View




GSM/PCS/UMTS-FDD Antenna View

WIFI/BT/BLE/GPS - Antenna View



LTE - Antenna View


**Annex B.iii. Photograph: Test Setup Photo**

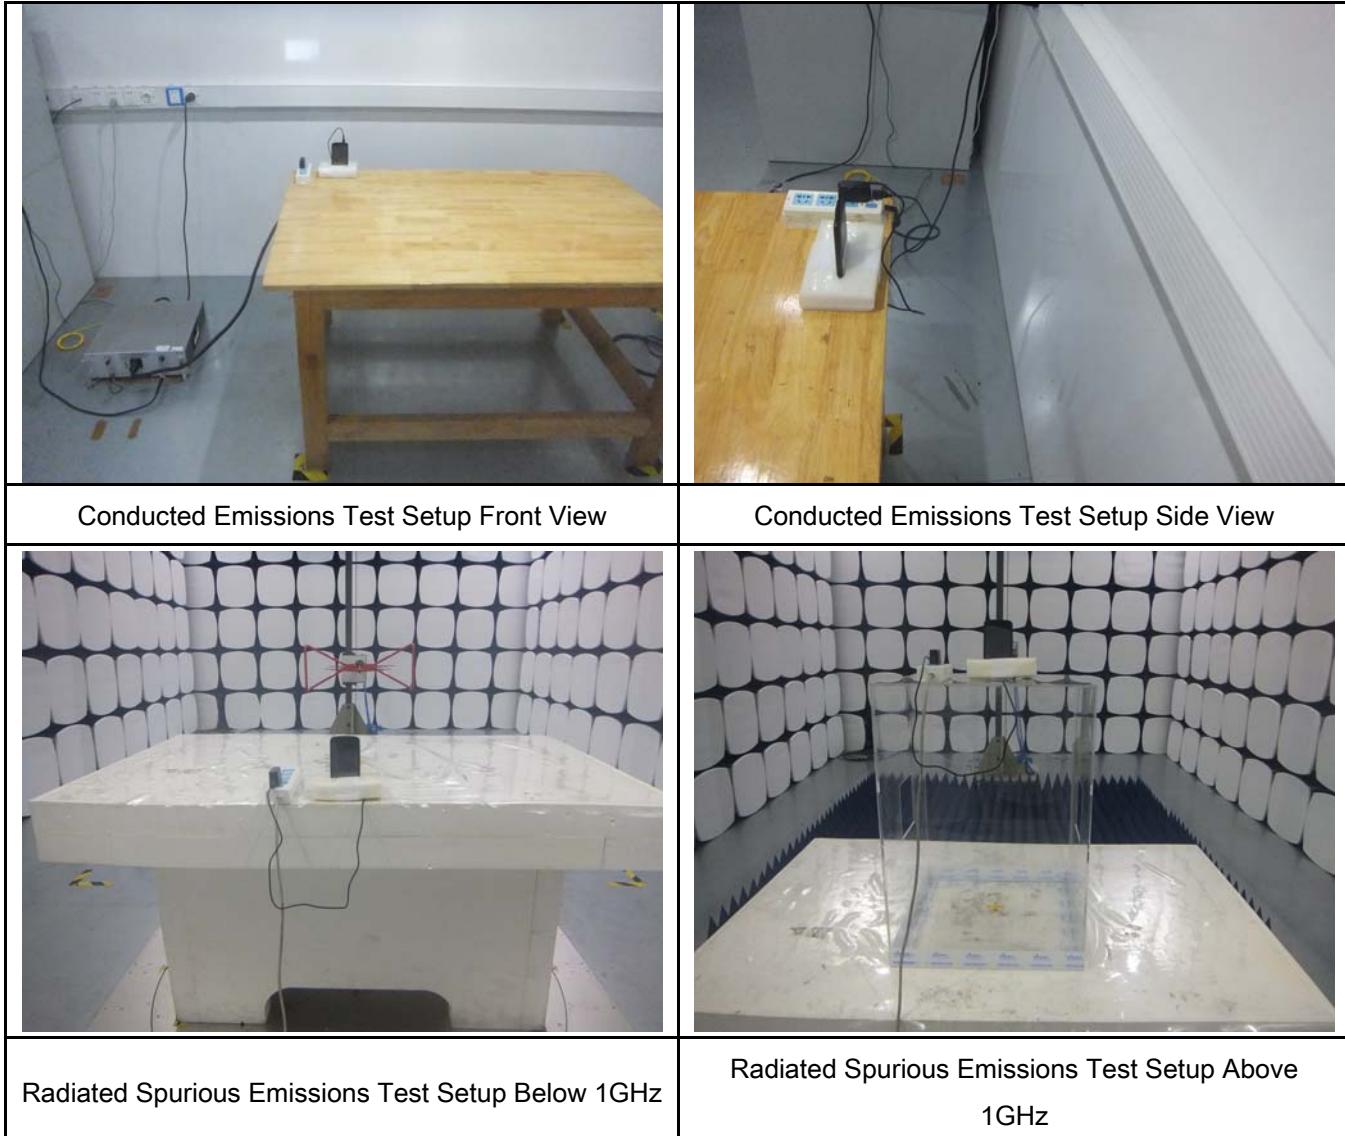


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

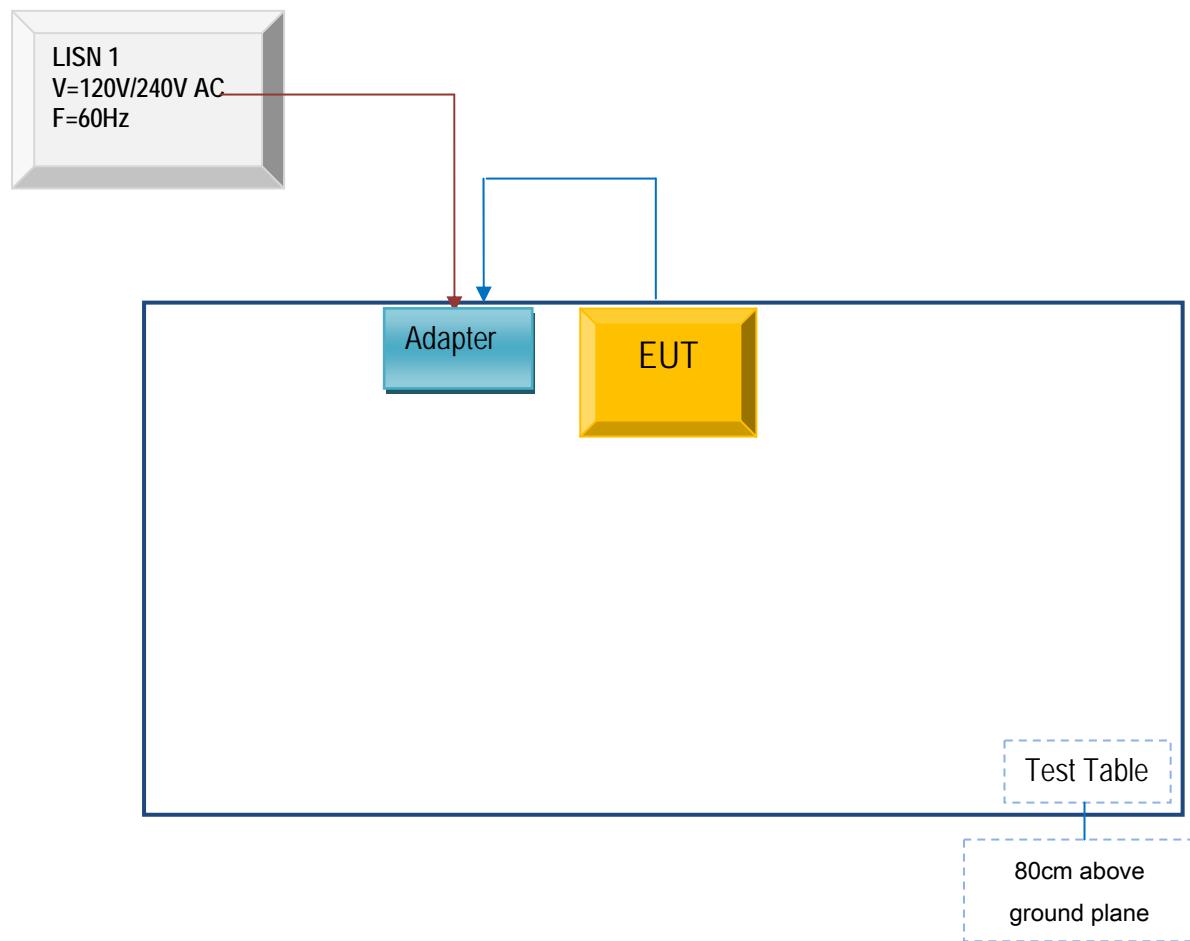

**Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .**

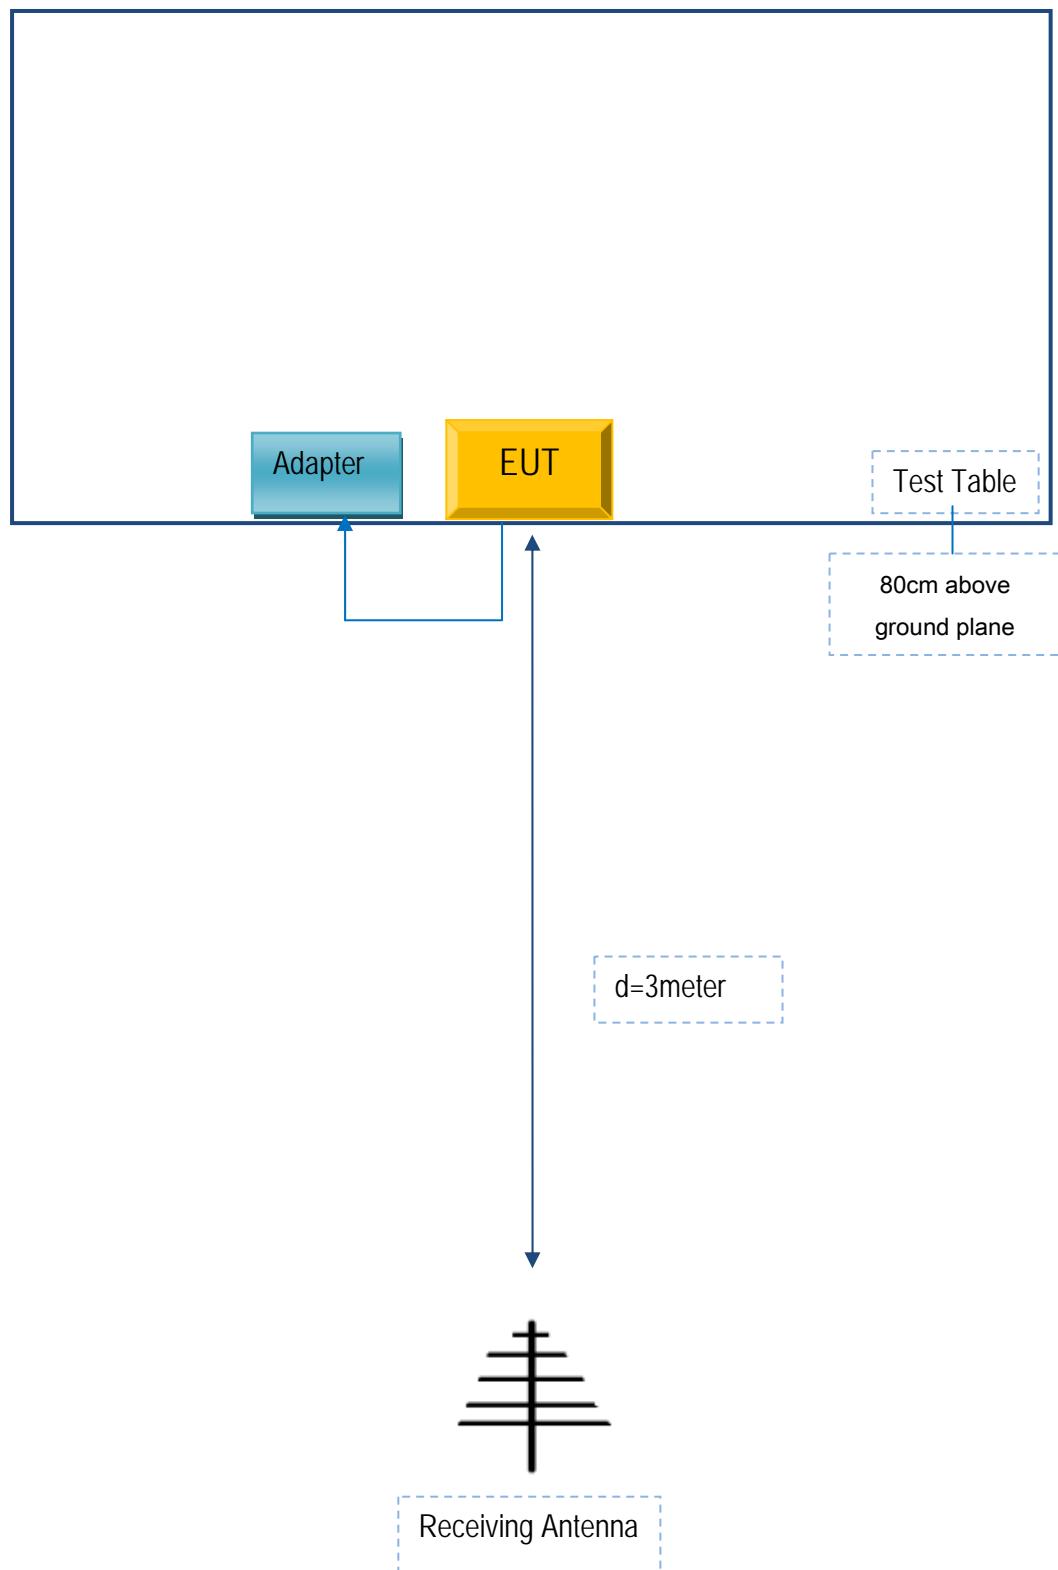

Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .

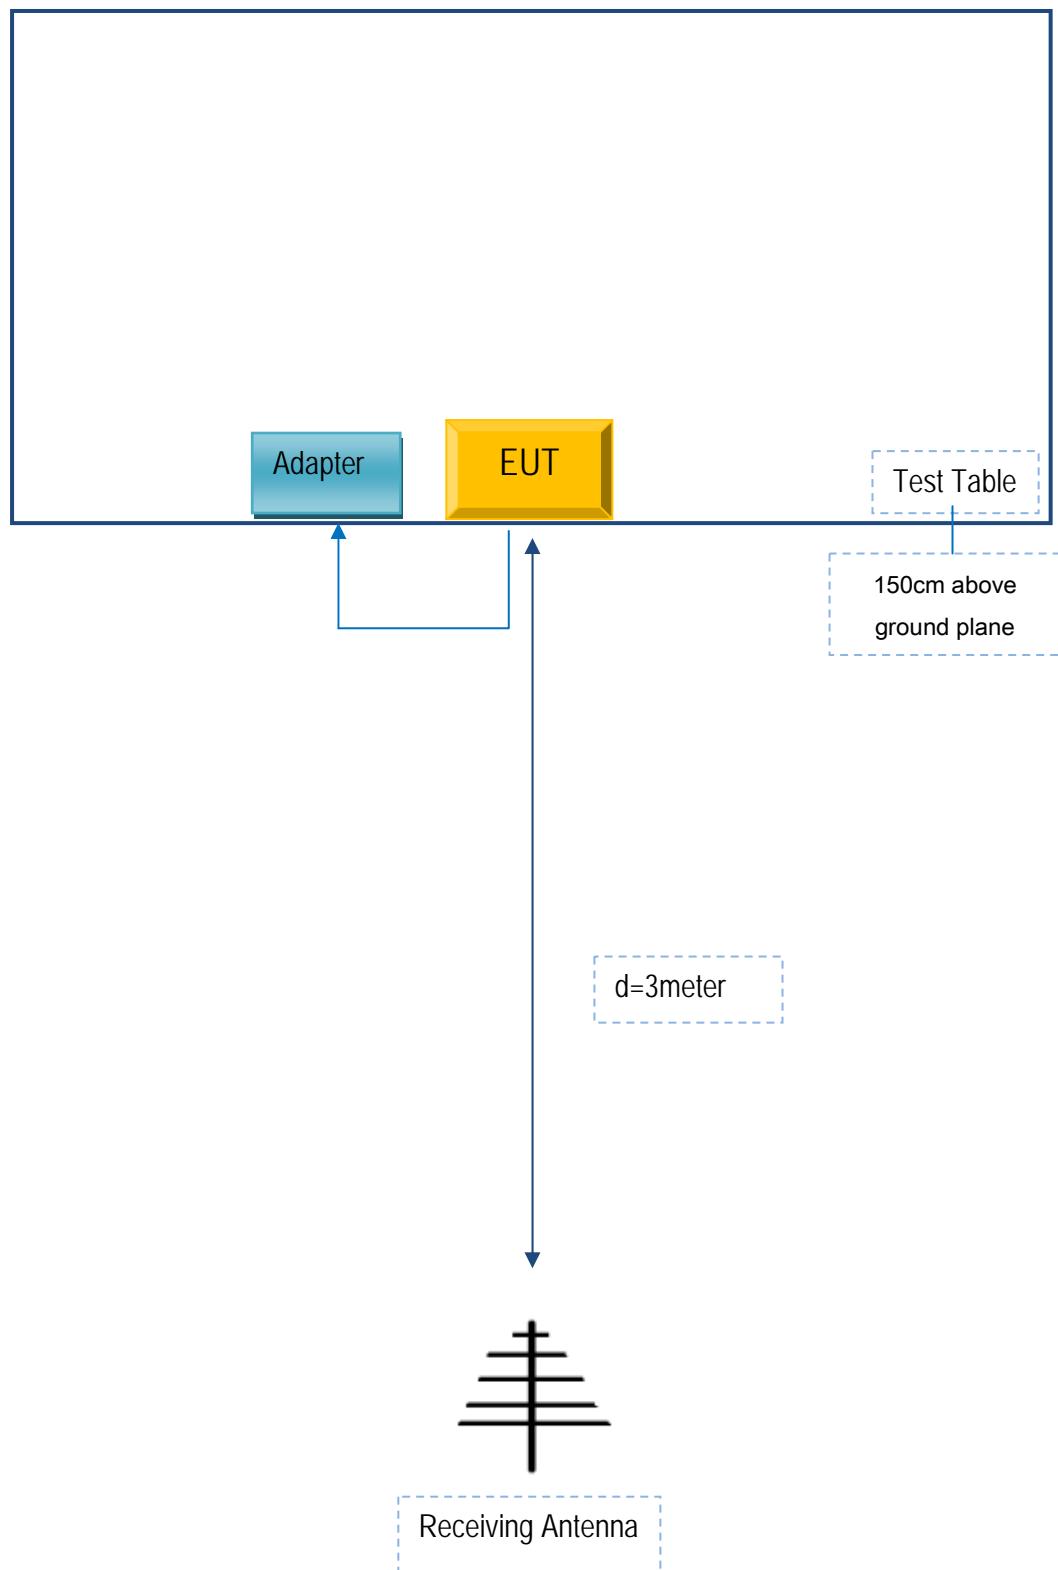

## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

### Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
MOBIWIRE MOBILES (NINGBO) CO.,LTD	Adapter	OWN SMART VALUE	C20160122

### Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	C20160122

Test Report No.	16070480-FCC-R3
Page	54 of 55

## Annex D. User Manual / Block Diagram / Schematics / Partlist

N/A

Test Report No.	16070480-FCC-R3
Page	55 of 55

## Annex E. DECLARATION OF SIMILARITY

N/A