

EMC TEST REPORT

**FCC 47 CFR Part 15B
Industry Canada RSS-Gen**

Electromagnetic compatibility - Unintentional radiators

Report Reference No. : G0M-1409-4154-EF0615B-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name : Amor Gummiwaren GmbH

Address : August-Rost-Straße 4
99310 Arnstadt
GERMANY

Test specification:

Standard : 47 CFR Part 15 Subpart B
RSS-Gen, Issue 3, 2010-12
ANSI C63.4:2009

Equipment under test (EUT):

Product description : electric device

Model No. : Uno

Additional Models : None

Hardware version : V2.0

Firmware / Software version : BLE-Stack SD110 V6.0.0

FCC-ID: 2ADAR504001 : IC: 12372A-504001

Test result : **Passed**

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement: P (Pass)
- test object does not meet the requirement: F (Fail)

Testing:

Date of receipt of test item: 2014-12-05

Date (s) of performance of tests: 2014-12-23

Compiled by: Marcus Klein

Tested by (+ signature): Jens Marquardt



Approved by (+ signature): Marcus Klein



Date of issue: 2015-02-12

Total number of pages: 17

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Additional comments:

EUT is identical to model Duo tested in Report G0M-1409-4154-EF0715B-V01 but instead of two motors, just one motor is used. Power supply and PCB are the same.

The radiated emission results from the Duo-Report are valid for representing the model Uno too.

Version History

Version	Issue Date	Remarks	Revised by
V01	2014-12-29	Initial Release	



REPORT INDEX

1 EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1 Photos – Equipment external	6
1.2 Photos – Equipment internal	7
1.3 Photos – Test setup	8
1.4 Supporting Equipment Used During Testing	9
1.5 Input / Output Ports	9
1.6 Operating Modes and Configurations	10
1.7 Test Equipment Used During Testing	11
1.8 Sample emission level calculation	12
2 RESULT SUMMARY	13
3 TEST CONDITIONS AND RESULTS	14
3.1 Test Conditions and Results – AC power line conducted emissions	14


1 Equipment (Test item) Description

Description	electric device
Model	Uno
Additional Models	None
Serial number	None
Hardware version	V2.0
Software / Firmware version	BLE-Stack SD110 V6.0.0
FCC-ID	2ADAR504001
IC-ID	12372A-504001
Power supply	3.7 V rechargeable Lilon battery
AC/DC-Adaptor	Model : FW7713 Manufacturer : FRIWO Gerätebau GmbH Input : 100-240VAC / 50-60Hz Output : 5VDC / 1.0A
Manufacturer	Amor Gummiwaren GmbH August-Rost-Straße 4 99310 Arnstadt GERMANY
Highest emission frequency	Fmax [MHz] = 2540
Device classification	Class B
Equipment type	Tabletop
Number of tested samples	1


1.1 Photos – Equipment external

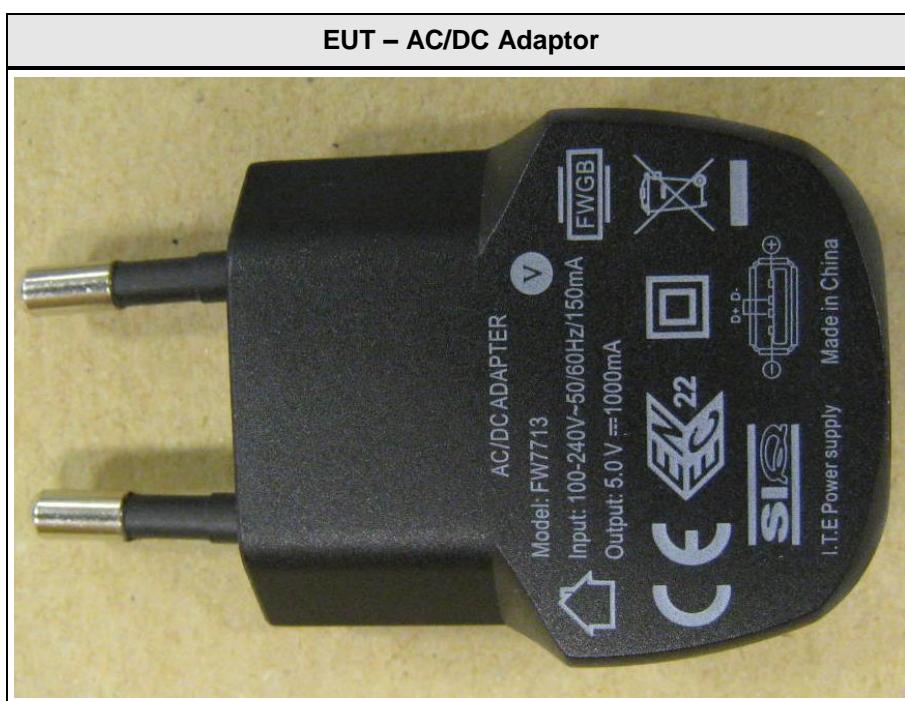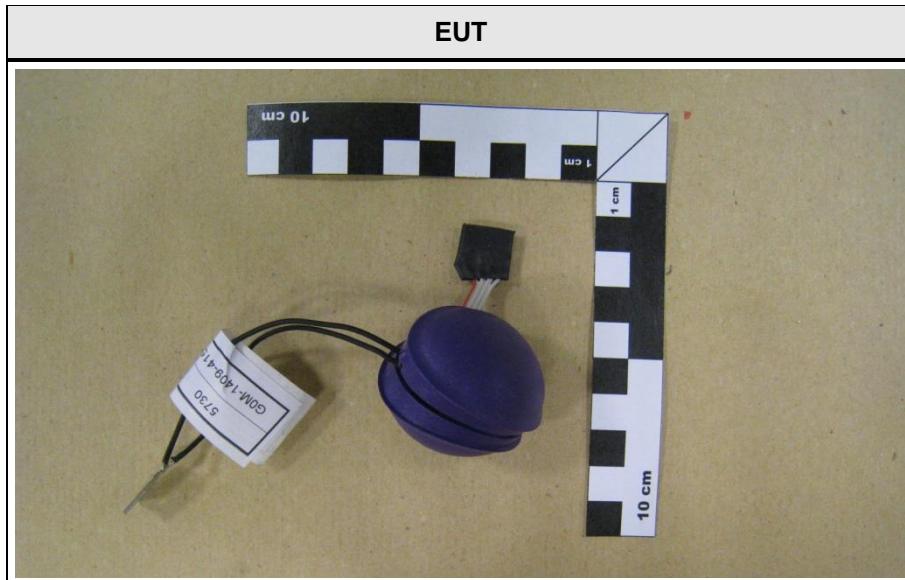

1.2 Photos – Equipment internal

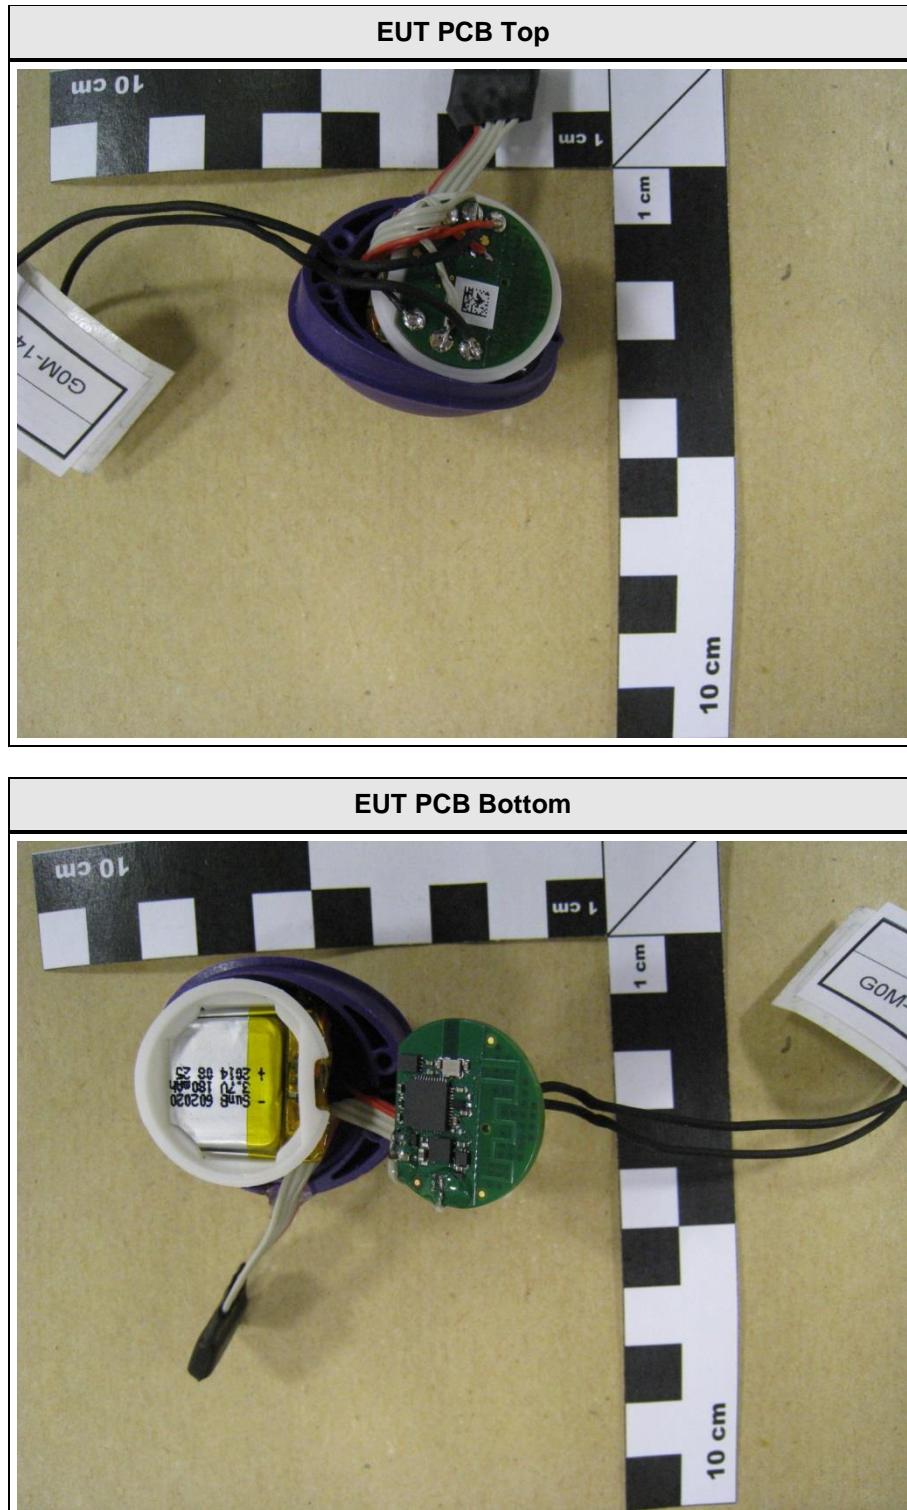

1.3 Photos – Test setup

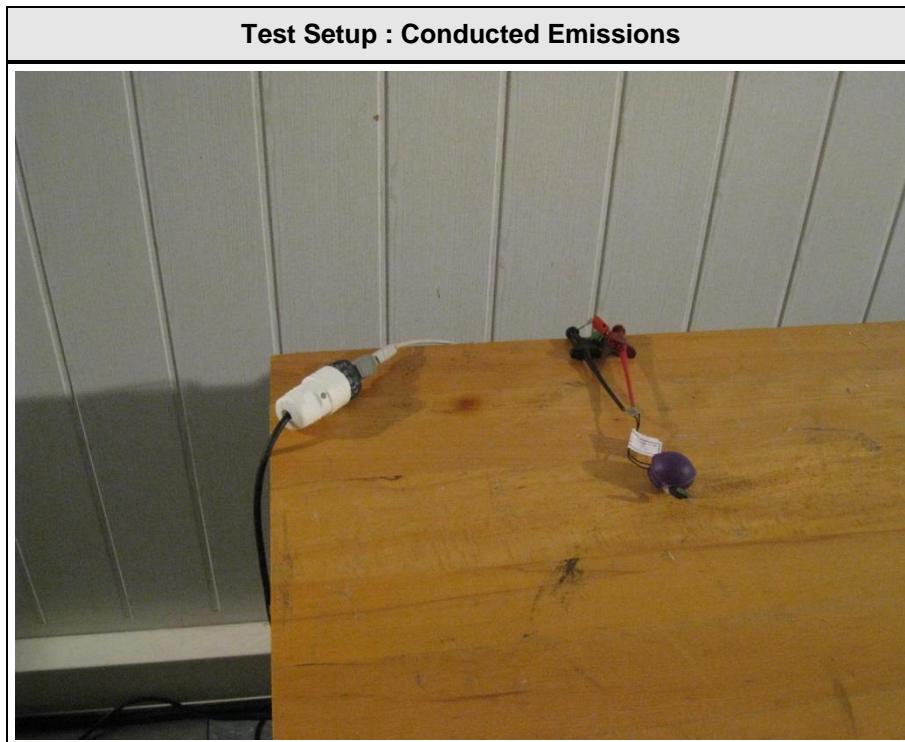

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	smart phone	LG	G2	

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Input / Output Ports

No ports available

1.6 Operating Modes and Configurations

Mode #	Description
1	vibrating + Bluetooth communication
2	charging

Configuration #	EUT Configuration
1	EUT in normal operation mode
2	EUT connected to Charger

1.7 Test Equipment Used During Testing

Measurement Software					
Description		Manufacturer	Name		Version
EMC Test Software		Dare Instruments	Radimation		2014.1.15

Conducted emissions					
Description		Manufacturer	Model	Identifier	Cal. Date
Current probe	R&S		EZ-17	EF00215	2013-11
Absorbing Clamp	R&S		MDS 21	EF00035	2014-10
ISN	R&S		ENY41	EF00255	2014-04
AMN	R&S		ESH2-Z5	EF00182	2014-11
CDN	Teseq		ST08AS	EF00411	2013-10
EMI Test Receiver	R&S		ESCS 30	EF00295	2014-10

Radiated emissions					
Description		Manufacturer	Model	Identifier	Cal. Date
Biconical Antenna	R&S		HK 116	EF00030	2014-03
LPD Antenna	R&S		HL 223	EF00187	2014-03
Horn antenna	Schwarzbeck		BBHA 9120D	EF00018	2013-09
EMI Test Receiver	R&S		ESU26	EF00887	2014-01

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{lll} \text{Reading} + \text{AF} = & \text{Net Reading} : & \text{Net reading} - \text{FCC limit} = \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} + 26 \text{ dB} = & 47.5 \text{ dB}\mu\text{V/m} : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} = -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 4.9 & 4.10	Radiated emissions	ANSI C 63.4	PASS	See Report G0M-1409-4154-EF0715B-V01
47 CFR 15.107 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	-
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. FCC 47 CFR 15.107 / IC RSS-Gen			Verdict: PASS	
Laboratory Parameters:	Required prior to the test	During the test		
Ambient Temperature	15 to 35 °C	23°C		
Relative Humidity	30 to 60 %	34%		
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Sample is tested with respect to the requirements of the equipment class	Equipment class			
	Class B			
Points of Application	Application Interface			
AC Mains	LISN			
Operating mode and configuration	2 / 2			
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dB μ V]	Result	Average [dB μ V]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: * Limit decreases linearly with the logarithm of the frequency.				

Test Procedure:


- 1) The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2009 item 7.3.1)
- 2) The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- 3) The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- 4) The LISN measurement port was connected to a measurement receiver
- 5) I/O cables were bundled not longer than 0.4 m
- 6) Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1409-4154

Manufacturer: Amor Gummiwaren GmbH
EUT Name: electric device
Model: Uno
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom}: 24^{\circ}\text{C}$, $U_{nom}: 3.0\text{VDC}$ battery
LISN: ESH2-Z5 N
Mode: charging
Test Date: 2014-12-02
Note:

Index 180

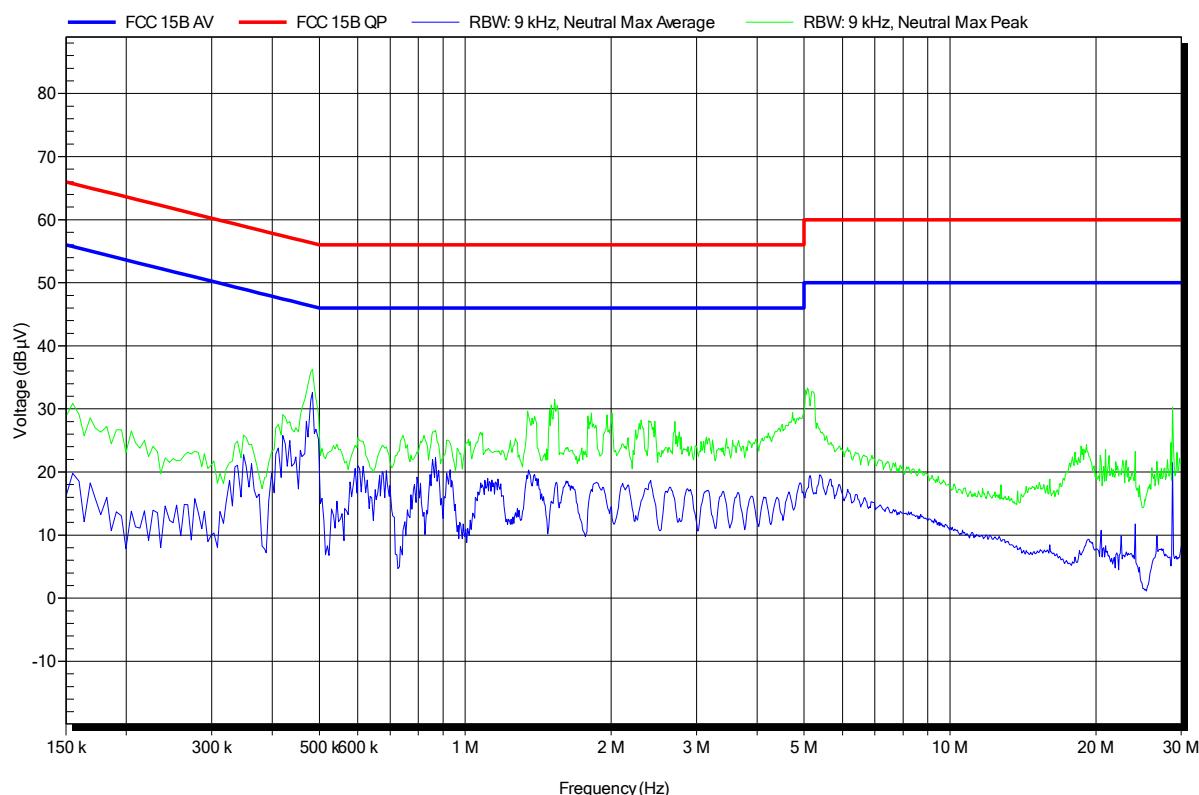

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1409-4154

Manufacturer: Amor Gummiwaren GmbH
EUT Name: electric device
Model: Uno
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom}: 24^{\circ}\text{C}$, $U_{nom}: 3.0\text{VDC}$ battery
LISN: ESH2-Z5 L
Mode: charging
Test Date: 2014-12-02
Note:

Index 179

