

FCC REPORT

(WIFI)

Applicant: Libre Wireless Technologies, Inc.
Address of Applicant: 2100 Geng Road, Suite 210, Palo Alto, CA 94303, USA

Equipment Under Test (EUT)

Product Name: WiFi Media Streaming Module
Model No.: LS9X-AC11DBT-C, LS9X-AC11DBT-AC
Trade mark:



FCC ID: 2ADBM-LS9X-AC11DBT
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of sample receipt: 17 Jan., 2020
Date of Test: 17 Jan., to 14 Mar., 2020
Date of report issued: 21 May, 2020
Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	21 May, 2020	Original

Tested by:

Mike.ou
Test Engineer

Date:

21 May, 2020

Reviewed by:

Winner Zhang
Project Engineer

Date:

21 May, 2020

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND TEST MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD.....	6
5.7 LABORATORY FACILITY.....	7
5.8 LABORATORY LOCATION	7
5.9 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT	9
6.2 CONDUCTED EMISSION	10
6.3 CONDUCTED OUTPUT POWER	15
6.4 OCCUPY BANDWIDTH	18
6.5 POWER SPECTRAL DENSITY	23
6.6 BAND EDGE	26
6.6.1 Conducted Emission Method.....	26
6.6.2 Radiated Emission Method.....	29
6.7 SPURIOUS EMISSION.....	62
6.7.1 Conducted Emission Method.....	62
6.7.2 Radiated Emission Method.....	65
7 TEST SETUP PHOTO	79
8 EUT CONSTRUCTIONAL DETAILS	80

4 Test Summary

Test Items	Section in CFR 47	Result
Antenna requirement	15.203 & 15.247 (b)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247 (d)	Pass
Spurious Emission	15.205 & 15.209	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).		
Test Method:	ANSI C63.4-2014 ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02	

5 General Information

5.1 Client Information

Applicant:	Libre Wireless Technologies, Inc.
Address:	2100 Geng Road, Suite 210, Palo Alto, CA 94303, USA
Manufacturer:	Libre Wireless Technologies, Inc.
Address:	2100 Geng Road, Suite 210, Palo Alto, CA 94303, USA

5.2 General Description of E.U.T.

Product Name:	WiFi Media Streaming Module
Model No.:	LS9X-AC11DBT-C, LS9X-AC11DBT-AC
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2452MHz (802.11n(HT40))
Channel numbers:	11 for 802.11b/802.11g/802.11(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	Rod Antenna, PCB Antenna
Antenna gain:	Rod antenna: 3.0 dBi PCB antenna: 1.5 dBi
Power supply:	DC 3.3V
Remark:	WiFi Media Streaming Module part number LS9X-AC11DBT-AC is a variant product of LS9X-AC11DBT-C. The difference between the variant models is DDR3 memory size, LS9X-AC11DBT-C DDR3 memory size is 256MB while the LS9X-AC11DBT-AC DDR3 memory size is 512MB. The circuit principle and all remaining components are the same.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel for 802.11b/g/n(HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Note: 1. For 802.11n-HT40 mode, the channel number is from 3 to 9; 2. Channel 1, 6 & 11 selected for 802.11b/g/n-HT20 as Lowest, Middle and Highest channel. Channel 3, 6 & 9 selected for 802.11n-HT40 as Lowest, Middle and Highest Channel.							

5.3 Test environment and test mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
Remark:	Conducted Emission and Radiated Emission below 1GHz pre-scan PCB Antenna and Rod Antenna, found Rod Antenna was worse case mode, the report only reflects the worst mode.
Radiated Emission: The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate, the follow list were the worst case.	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13.5Mbps

5.4 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
LENOVO	Laptop	SL510	2847A65	DoC
MERCURY	Wireless router	MW150R	12922104015	FCC ID
Libre	Test suite	WL-AM01B-7620A-TEST-V3.0	/	/

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.38 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

5.6 Additions to, deviations, or exclusions from the method

No

5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.8 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>


5.9 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
Loop Antenna	SCHWARZBECK	FMZB1519B	044	03-07-2019	03-06-2020
				03-07-2020	03-06-2021
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2019	03-06-2020
				03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2019	03-06-2020
				03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2019	11-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2019	03-06-2020
				03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2019	03-06-2020
				03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2019	03-04-2020
				03-05-2020	03-04-2021
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2019	11-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2019	03-04-2020
				03-05-2020	03-04-2021
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2019	03-06-2020
				03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2019	03-06-2020
				03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2019	03-06-2020
				03-07-2020	03-06-2021
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		


Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-05-2019	03-04-2020
				03-05-2020	03-04-2021
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-05-2019	03-04-2020
				03-05-2020	03-04-2021
LISN	CHASE	MN2050D	1447	03-05-2019	03-04-2020
				03-05-2020	03-04-2021
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2017	07-20-2020
Cable	HP	10503A	N/A	03-05-2019	03-04-2020
				03-05-2020	03-04-2021
EMI Test Software	AUDIX	E3	Version: 6.110919b		

6 Test results and Measurement Data

6.1 Antenna requirement

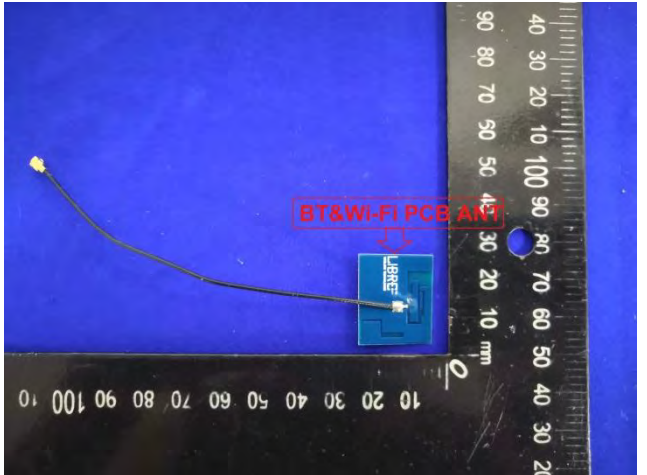
Standard requirement:	FCC Part 15 C Section 15.203 /247(b)						
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.							
E.U.T Antenna:							
The product is a professionally installed device which has two types of antennas for the application. The antennas information as below table: <table border="1"> <thead> <tr> <th>Antenna Type</th><th>Antenna Gain(dBi)</th></tr> </thead> <tbody> <tr> <td>Rod Antenna</td><td>3.00</td></tr> <tr> <td>PCB Antenna</td><td>1.50</td></tr> </tbody> </table> According to above information, the antennas meet the requirements of this section		Antenna Type	Antenna Gain(dBi)	Rod Antenna	3.00	PCB Antenna	1.50
Antenna Type	Antenna Gain(dBi)						
Rod Antenna	3.00						
PCB Antenna	1.50						
Rod Antenna	PCB Antenna						
							

6.2 Conducted Emission

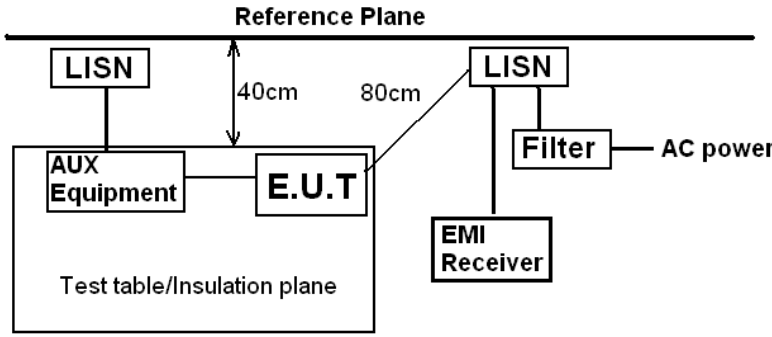Test Requirement:	FCC Part 15 C Section 15.207		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10(latest version) on conducted measurement.		
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.9 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

Measurement Data:

Product name:	WiFi Media Streaming Module	Product model:	LS9X-AC11DBT-C
Test by:	Mike	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5℃ Humi: 55%

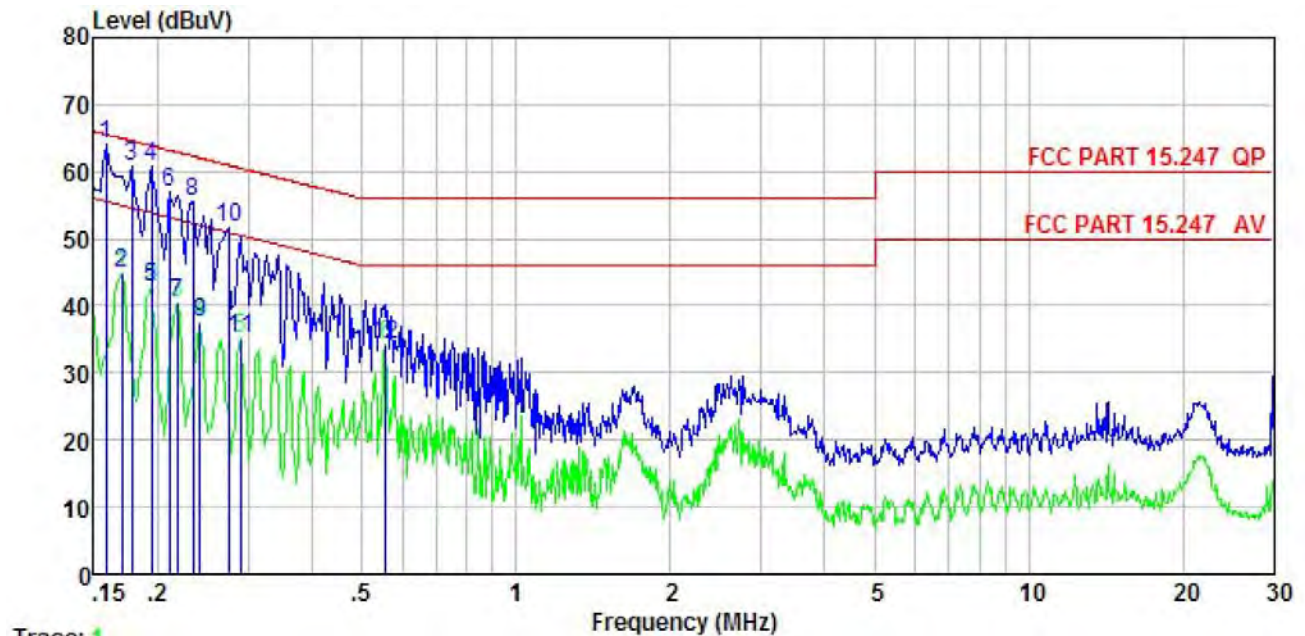


	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.158	53.91	-0.57	-0.07	10.77	64.04	65.56	-1.52	QP
2	0.170	34.87	-0.58	-0.10	10.77	44.96	54.94	-9.98	Average
3	0.178	50.89	-0.58	-0.12	10.77	60.96	64.59	-3.63	QP
4	0.194	50.70	-0.59	-0.15	10.76	60.72	63.84	-3.12	QP
5	0.194	32.82	-0.59	-0.15	10.76	42.84	53.84	-11.00	Average
6	0.211	46.95	-0.58	-0.17	10.76	56.96	63.18	-6.22	QP
7	0.219	30.41	-0.58	-0.18	10.76	40.41	52.88	-12.47	Average
8	0.234	45.56	-0.57	-0.20	10.75	55.54	62.30	-6.76	QP
9	0.242	27.60	-0.57	-0.21	10.75	37.57	52.04	-14.47	Average
10	0.274	41.71	-0.56	-0.24	10.74	51.65	60.98	-9.33	QP
11	0.289	25.33	-0.55	-0.25	10.74	35.27	50.54	-15.27	Average
12	0.555	24.23	-0.46	-0.37	10.76	34.16	46.00	-11.84	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	WiFi Media Streaming Module	Product model:	LS9X-AC11DBT-C
Test by:	Mike	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5℃ Humi: 55%

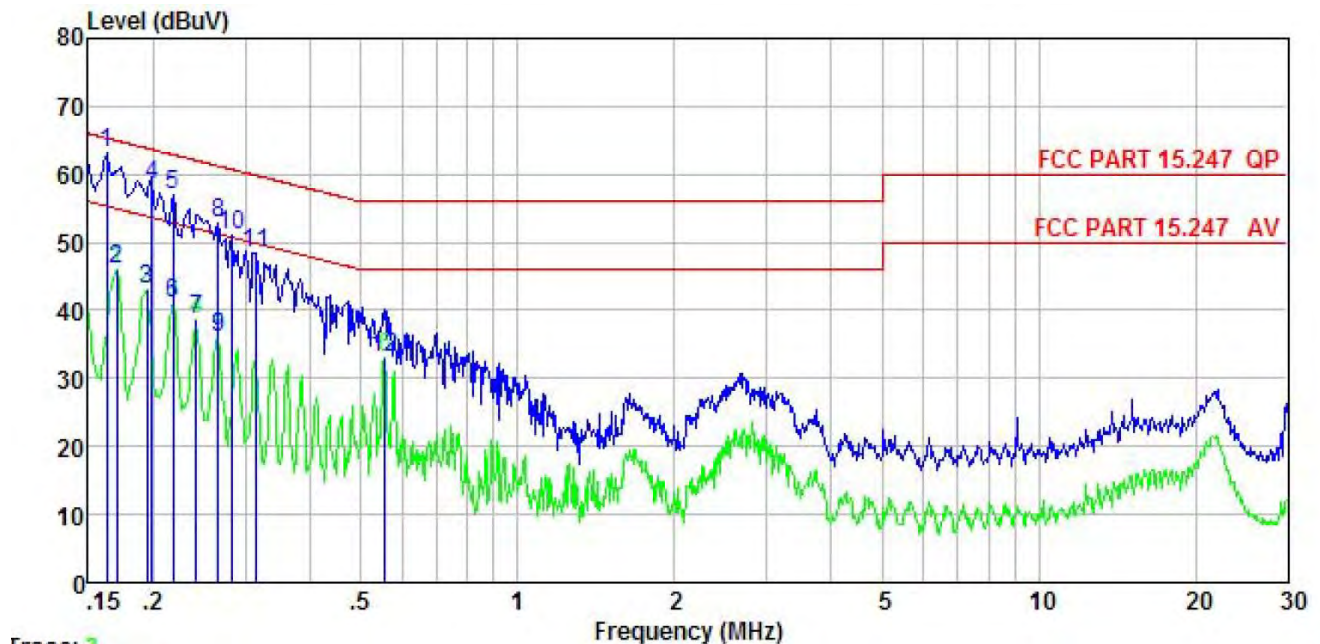


	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	52.99	-0.68	0.01	10.77	63.09	65.34	-2.25	QP
2	0.170	36.05	-0.68	0.01	10.77	46.15	54.94	-8.79	Average
3	0.194	32.94	-0.67	0.00	10.76	43.03	53.84	-10.81	Average
4	0.199	48.37	-0.67	0.00	10.76	58.46	63.67	-5.21	QP
5	0.219	46.93	-0.67	0.00	10.76	57.02	62.88	-5.86	QP
6	0.219	31.05	-0.67	0.00	10.76	41.14	52.88	-11.74	Average
7	0.242	28.46	-0.67	0.00	10.75	38.54	52.04	-13.50	Average
8	0.266	42.71	-0.67	0.01	10.75	52.80	61.25	-8.45	QP
9	0.266	26.02	-0.67	0.01	10.75	36.11	51.25	-15.14	Average
10	0.282	41.13	-0.67	0.01	10.74	51.21	60.76	-9.55	QP
11	0.313	38.28	-0.66	0.00	10.74	48.36	59.88	-11.52	QP
12	0.555	22.98	-0.65	0.03	10.76	33.12	46.00	-12.88	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	WiFi Media Streaming Module	Product model:	LS9X-AC11DBT-C
Test by:	Mike	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

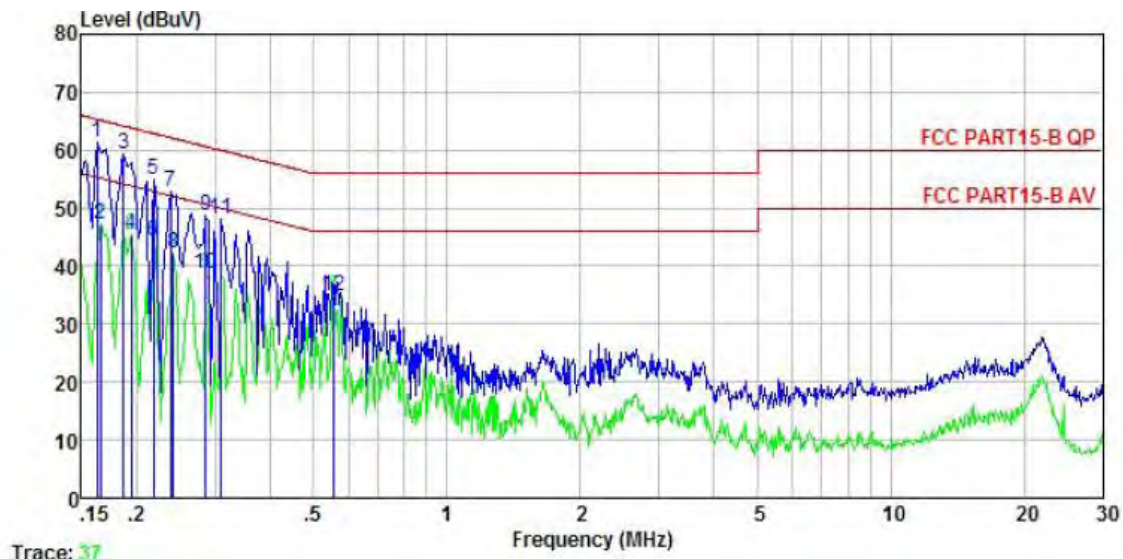


	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	51.23	-0.58	-0.08	10.77	61.34	65.34	-4.00	QP
2	0.166	37.00	-0.58	-0.09	10.77	47.10	55.16	-8.06	Average
3	0.186	49.24	-0.59	-0.13	10.76	59.28	64.20	-4.92	QP
4	0.194	35.58	-0.59	-0.15	10.76	45.60	53.84	-8.24	Average
5	0.219	45.02	-0.58	-0.18	10.76	55.02	62.88	-7.86	QP
6	0.219	34.21	-0.58	-0.18	10.76	44.21	52.88	-8.67	Average
7	0.238	42.95	-0.57	-0.20	10.75	52.93	62.17	-9.24	QP
8	0.242	32.21	-0.57	-0.21	10.75	42.18	52.04	-9.86	Average
9	0.286	38.74	-0.55	-0.25	10.74	48.68	60.63	-11.95	QP
10	0.286	28.63	-0.55	-0.25	10.74	38.57	50.63	-12.06	Average
11	0.310	38.11	-0.54	-0.18	10.74	48.13	59.97	-11.84	QP
12	0.555	25.00	-0.46	-0.37	10.76	34.93	46.00	-11.07	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	WiFi Media Streaming Module	Product model:	LS9X-AC11DBT-C
Test by:	Mike	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

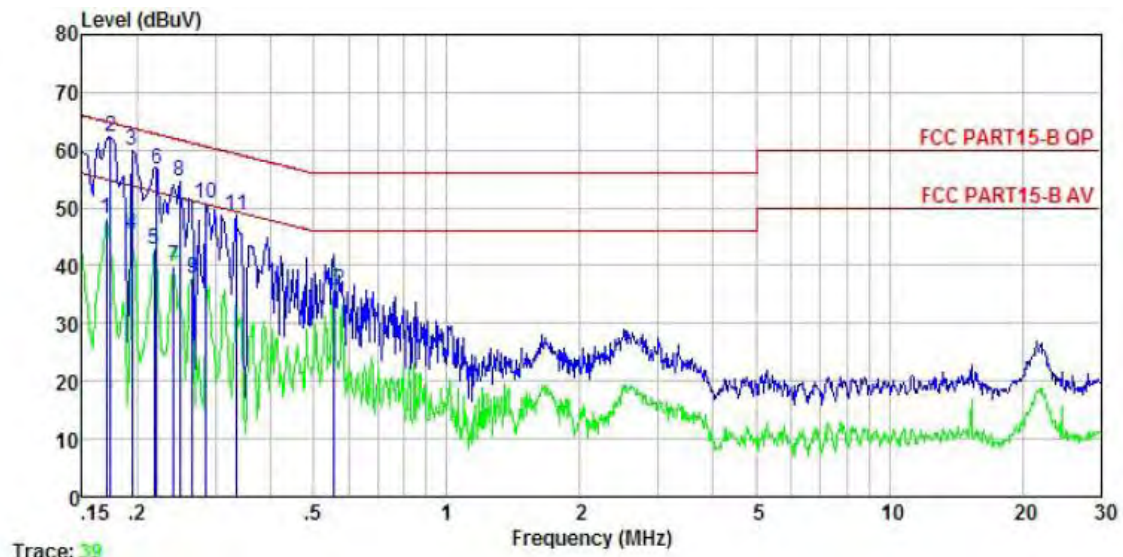


Trace: 39

	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.170	38.08	-0.68	0.01	10.77	48.18	54.94	-6.76	Average
2	0.174	52.35	-0.68	0.00	10.77	62.44	64.77	-2.33	QP
3	0.194	49.92	-0.67	0.00	10.76	60.01	63.84	-3.83	QP
4	0.194	35.24	-0.67	0.00	10.76	45.33	53.84	-8.51	Average
5	0.219	32.76	-0.67	0.00	10.76	42.85	52.88	-10.03	Average
6	0.221	46.69	-0.67	0.00	10.76	56.78	62.79	-6.01	QP
7	0.242	29.87	-0.67	0.00	10.75	39.95	52.04	-12.09	Average
8	0.249	44.48	-0.67	0.01	10.75	54.57	61.78	-7.21	QP
9	0.266	27.68	-0.67	0.01	10.75	37.77	51.25	-13.48	Average
10	0.286	40.73	-0.67	0.01	10.74	50.81	60.63	-9.82	QP
11	0.334	38.70	-0.66	-0.02	10.73	48.75	59.35	-10.60	QP
12	0.555	25.58	-0.65	0.03	10.76	35.72	46.00	-10.28	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.


6.3 Conducted Output Power

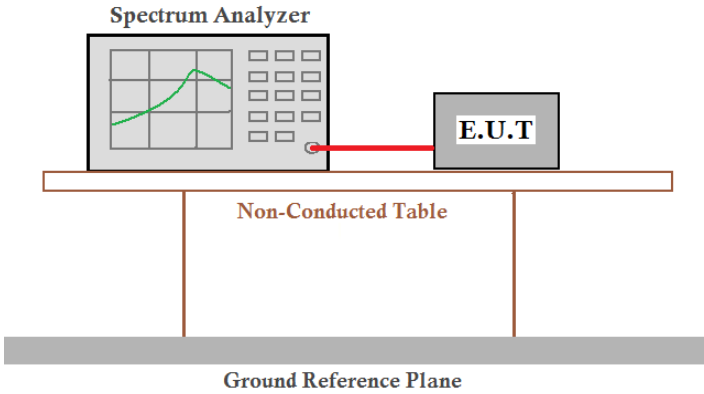Test Requirement:	FCC Part 15 C Section 15.247 (b)(3)
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

Test CH	Maximum Conducted Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	16.30	14.59	13.67	12.24	30.00	Pass
Middle	15.98	14.53	13.42	12.28		
Highest	15.38	14.42	13.50	12.34		

Test plot as follows:

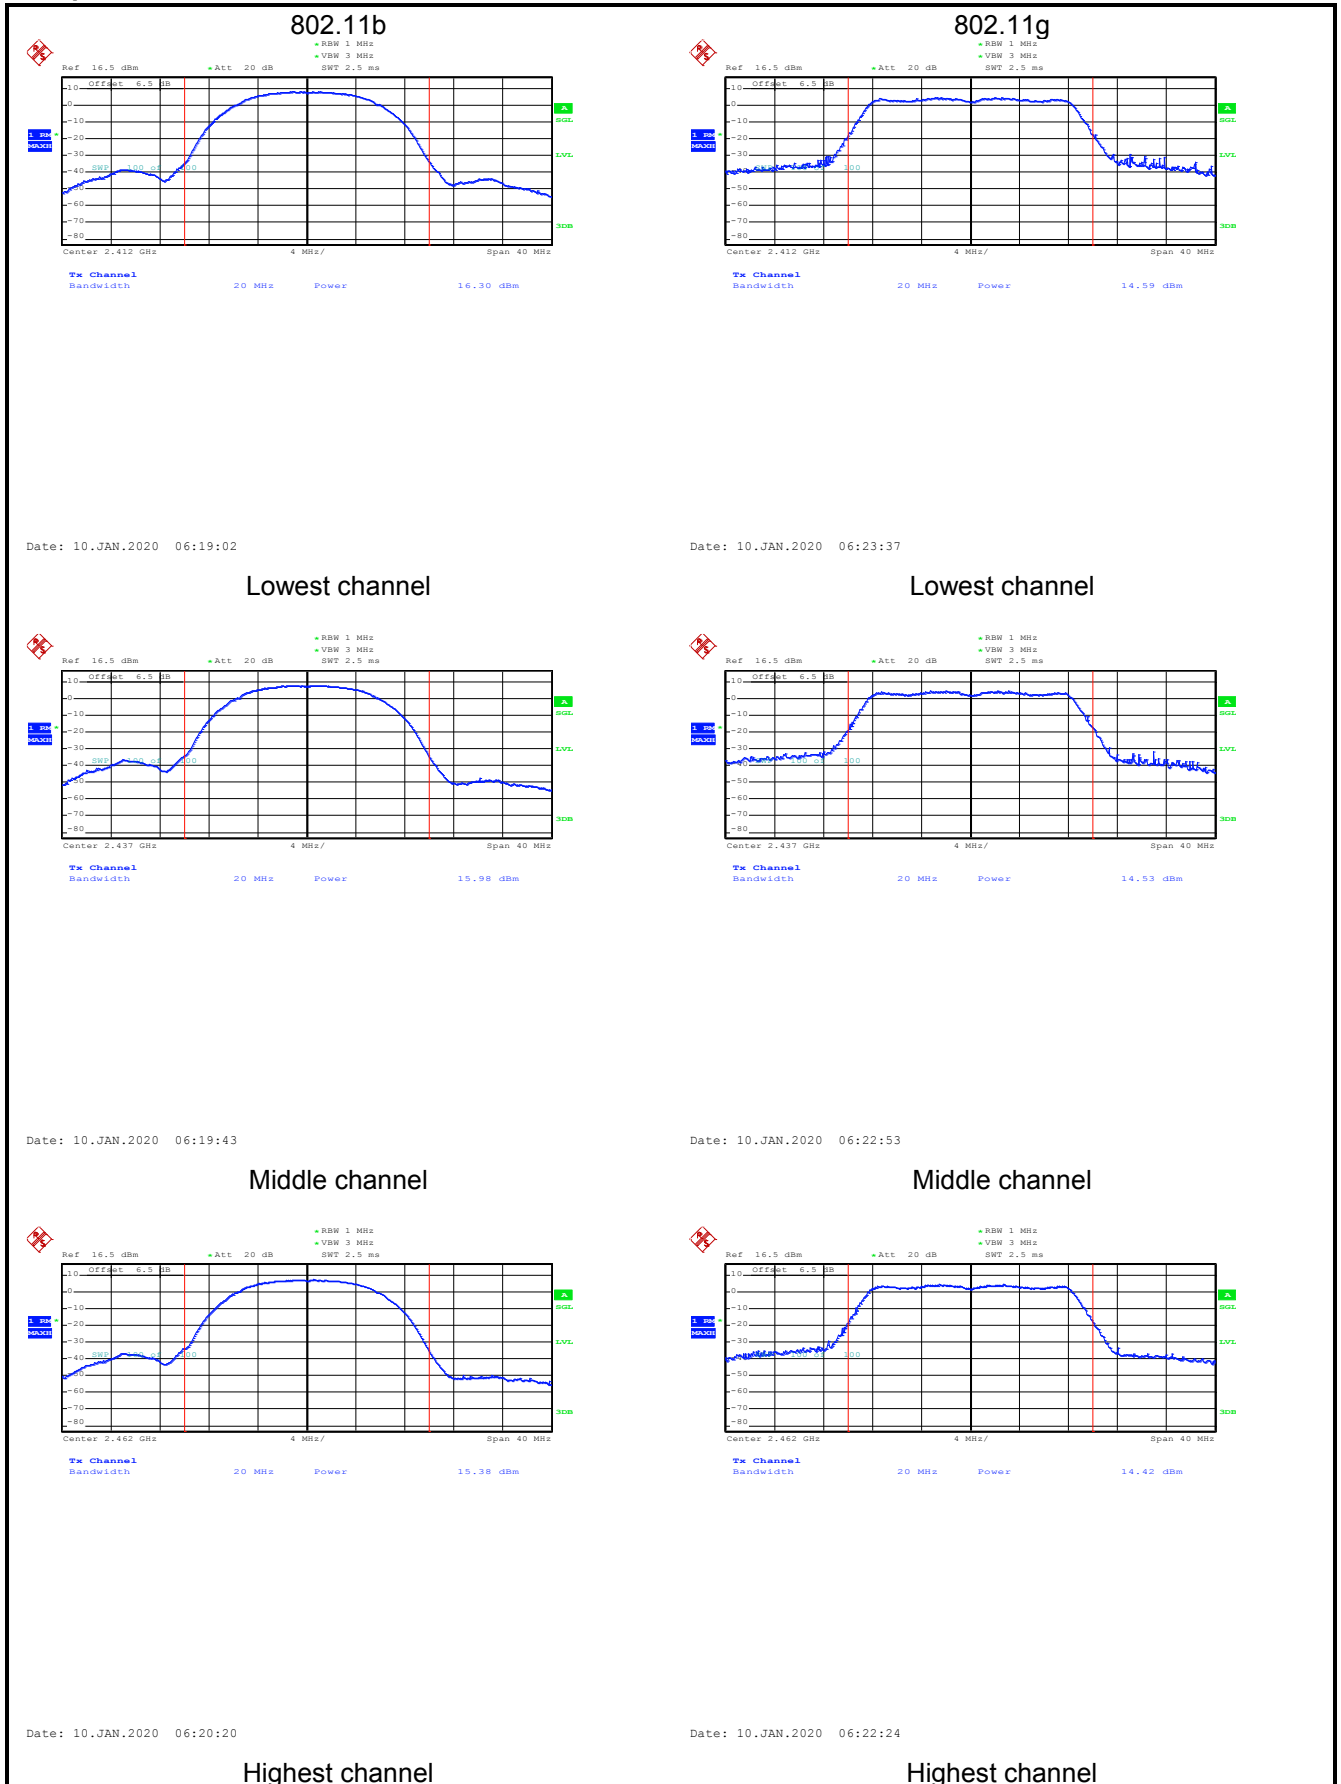


802.11n(HT20)

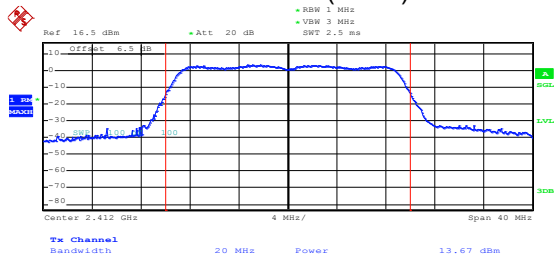


Date: 10.JAN.2020 07:05:36

802.11n(HT40)

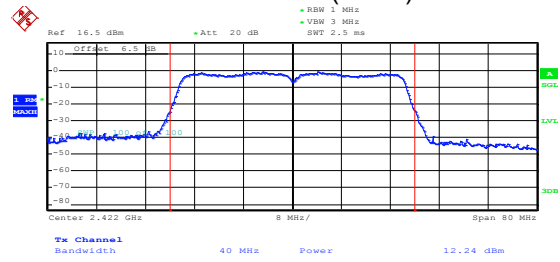


Date: 10.JAN.2020 07:08:52

Lowest channel

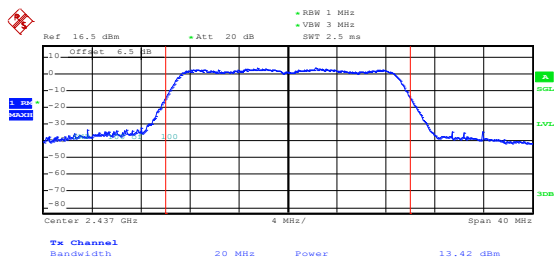


Date: 10.JAN.2020 07:06:06

Lowest channel

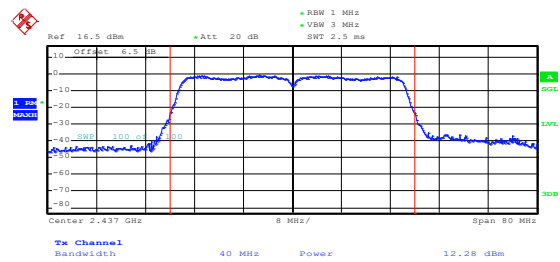


Date: 10.JAN.2020 07:10:08

Middle channel

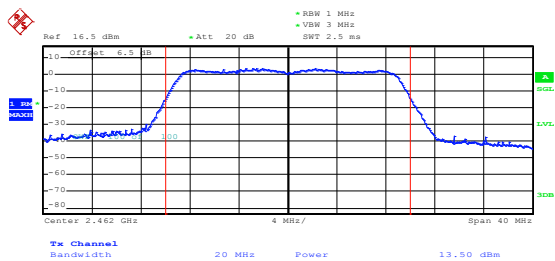

Date: 10.JAN.2020 07:06:27


Middle channel

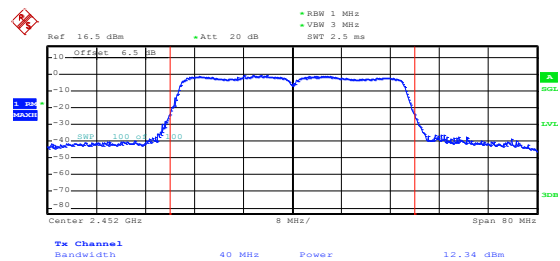

Date: 10.JAN.2020 07:11:43

Highest channel


6.4 Occupy Bandwidth

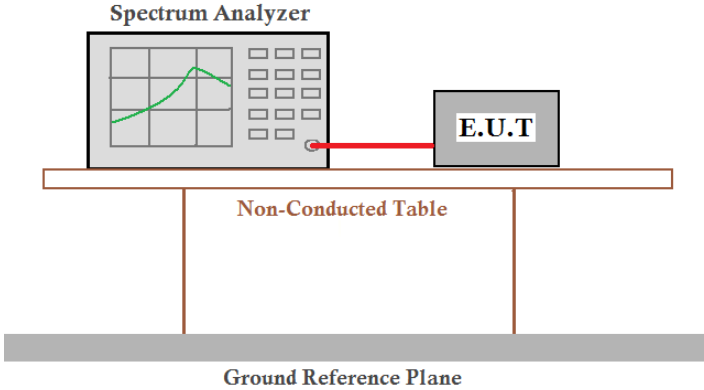Test Requirement:	FCC Part 15 C Section 15.247 (a)(2)
Limit:	>500kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:


Test CH	6dB Emission Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	11.12	16.56	17.76	36.32	>500	Pass
Middle	10.24	16.48	17.76	36.48		
Highest	10.24	16.56	17.76	36.48		
Test CH	99% Occupy Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	13.28	16.80	17.76	36.48	N/A	N/A
Middle	13.28	16.88	17.76	36.48		
Highest	13.28	16.88	17.76	36.64		

Test plot as follows:

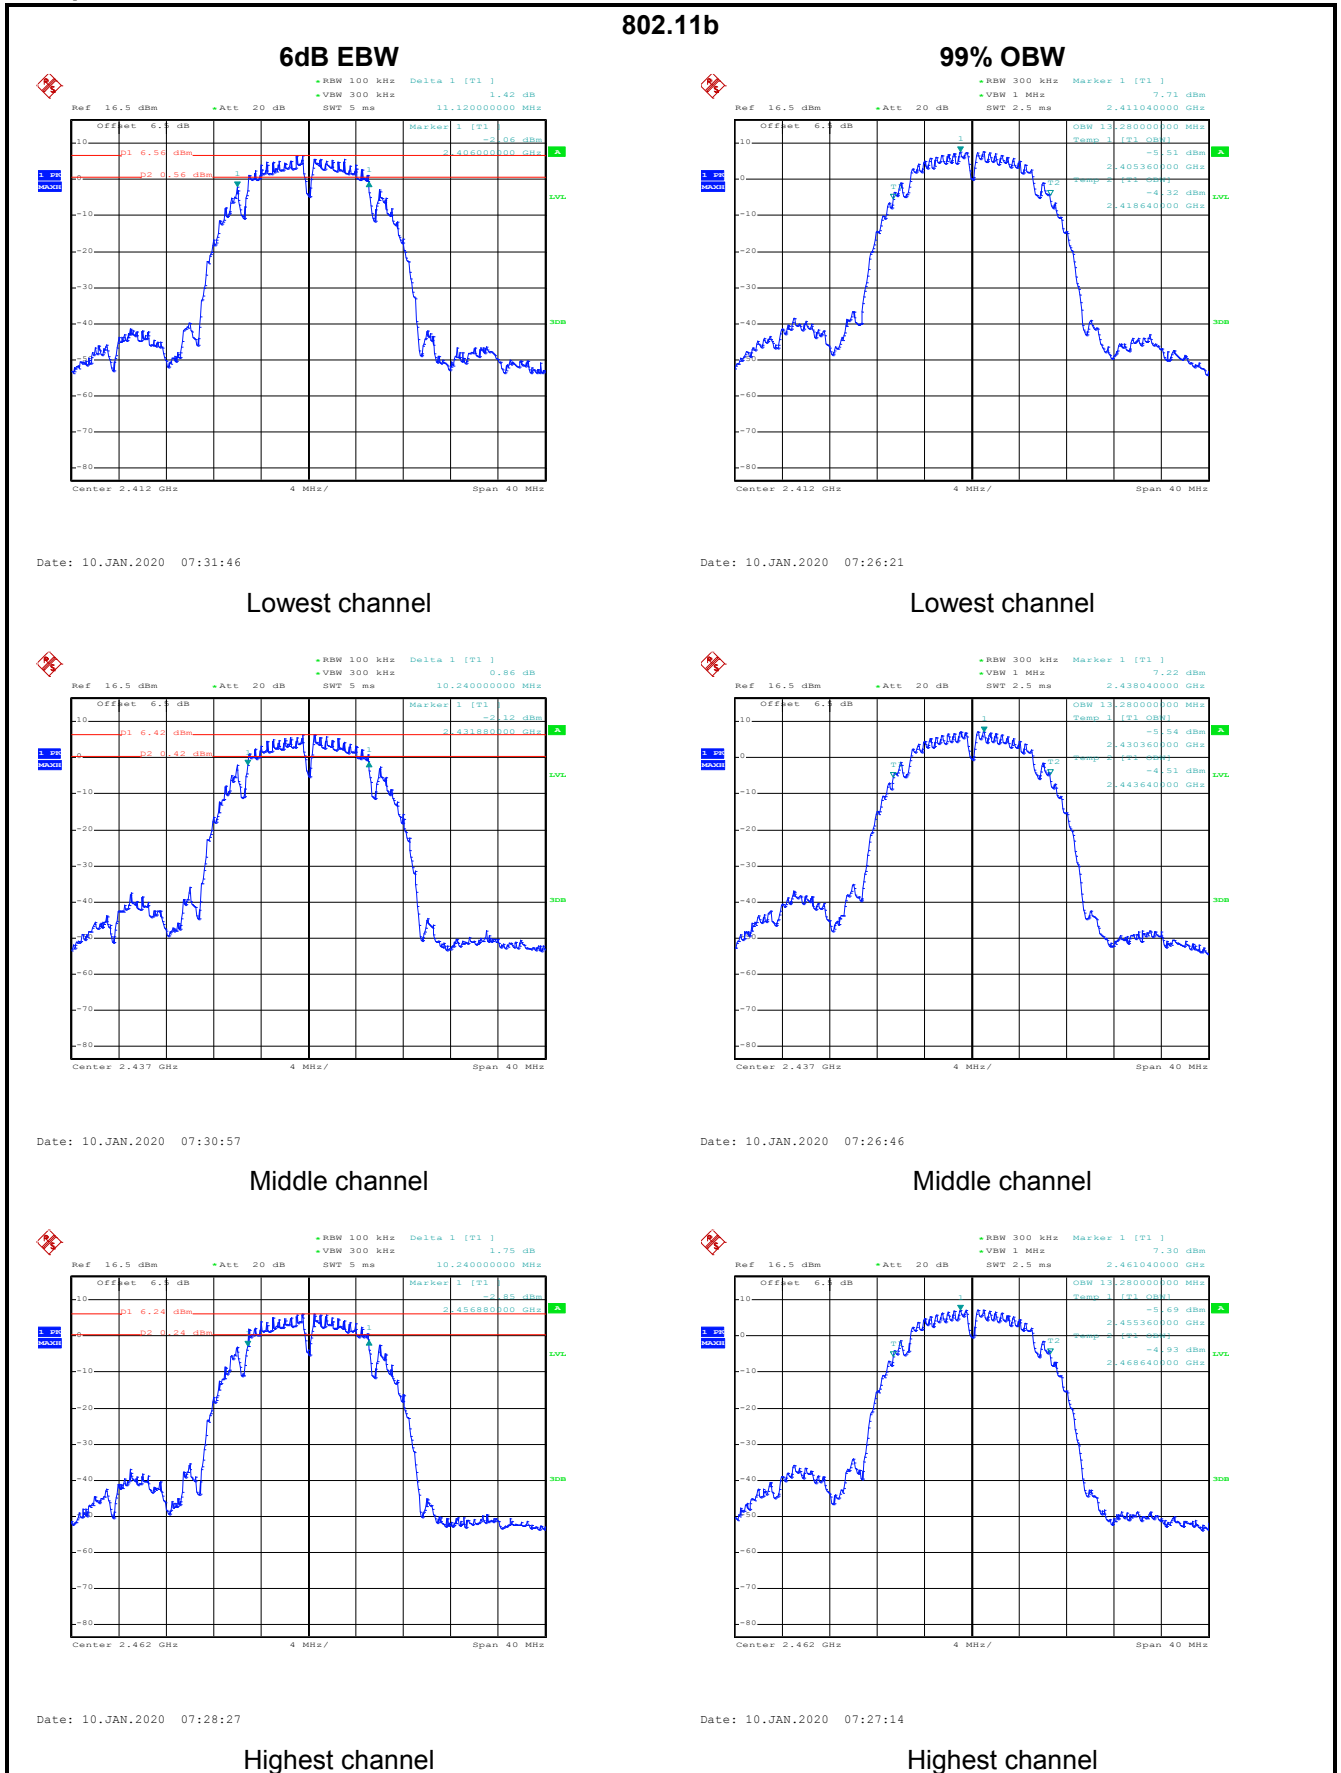


802.11g

6dB EBW

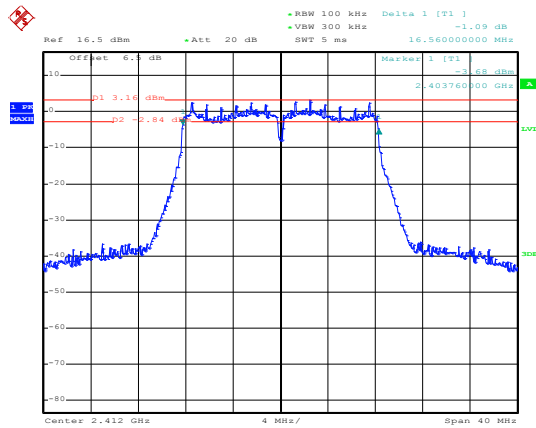


Date: 10.JAN.2020 07:34:02

99% OBW

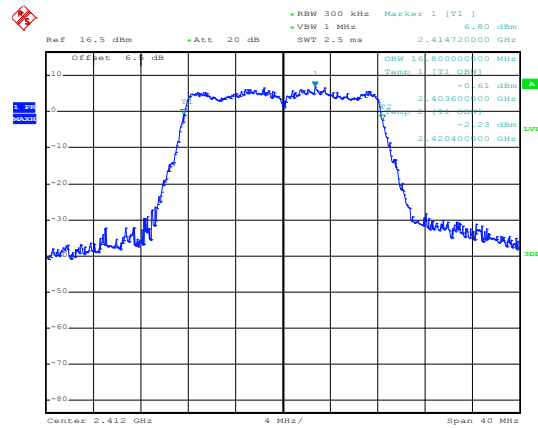


Date: 10.JAN.2020 07:19:25

Lowest channel

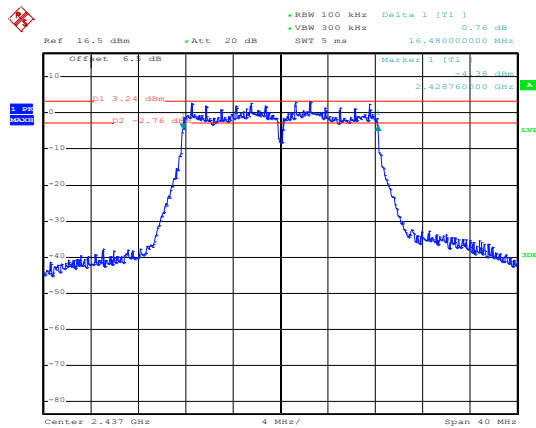


Date: 10.JAN.2020 07:36:15

Lowest channel

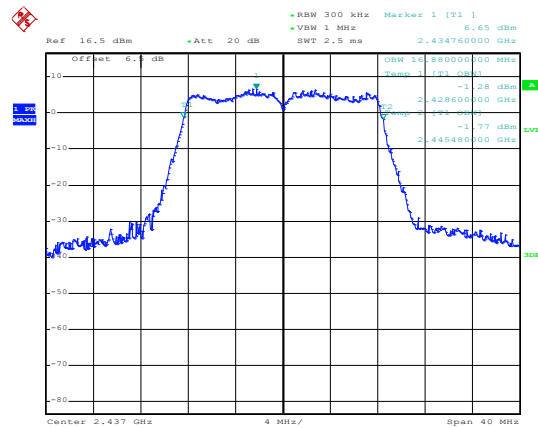


Date: 10.JAN.2020 07:19:05

Middle channel

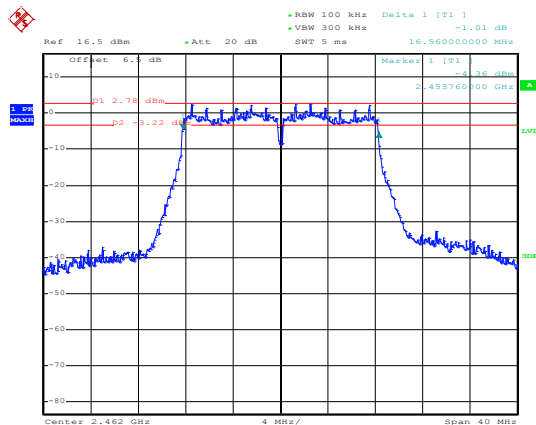

Date: 10.JAN.2020 07:37:56

Middle channel

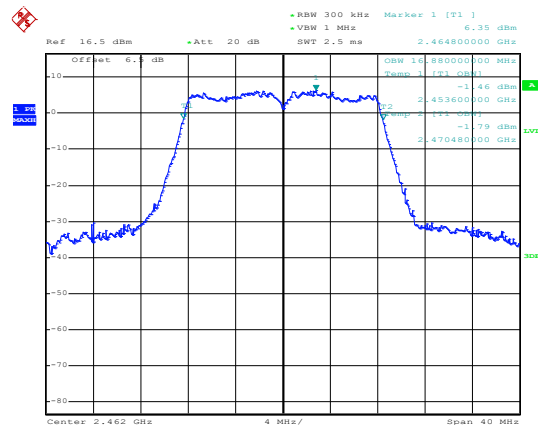


Date: 10.JAN.2020 07:18:43

Highest channel

Highest channel


802.11n(HT20)

6dB EBW

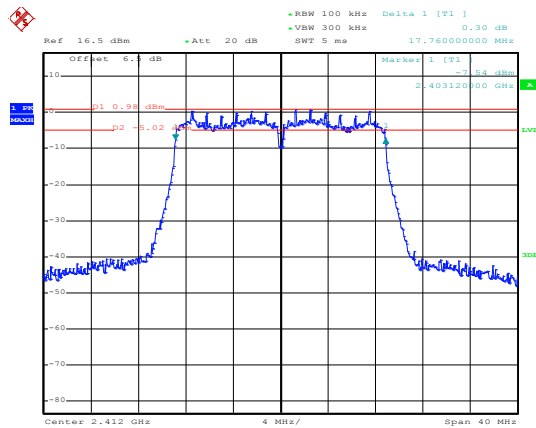


Date: 10.JAN.2020 07:43:04

99% OBW

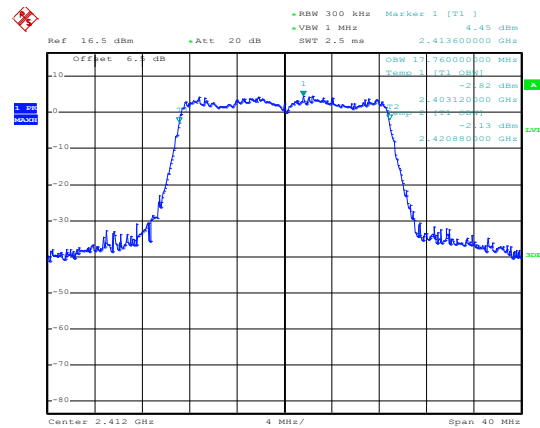


Date: 10.JAN.2020 07:16:32

Lowest channel

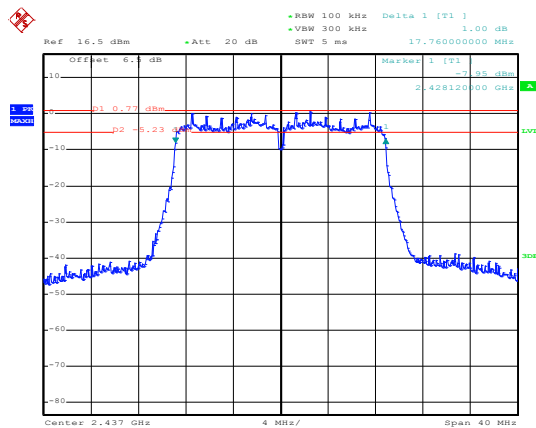


Date: 10.JAN.2020 07:41:48

Lowest channel

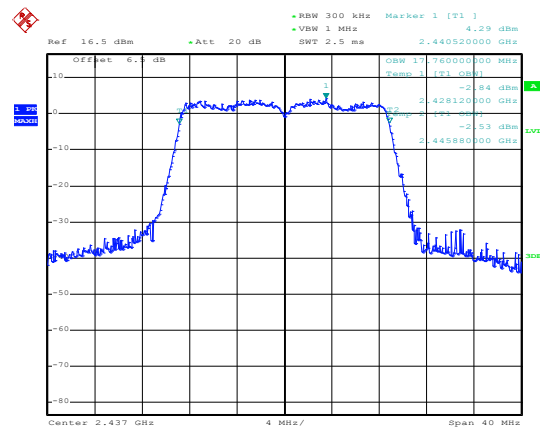


Date: 10.JAN.2020 07:17:01

Middle channel

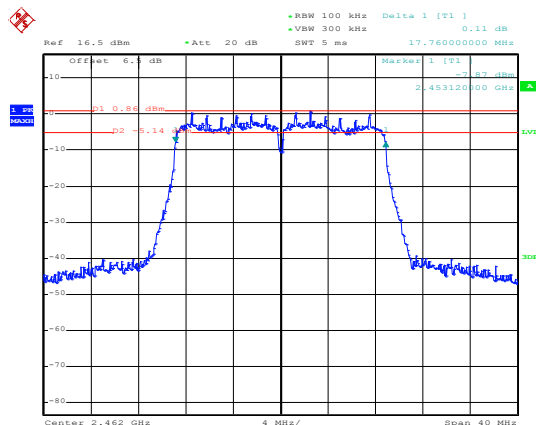

Date: 10.JAN.2020 07:39:44


Middle channel

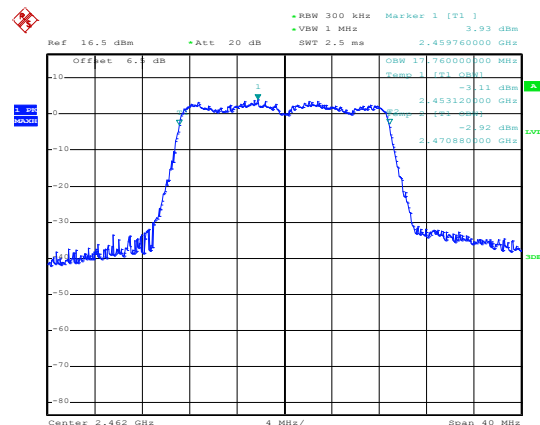


Date: 10.JAN.2020 07:17:22

Highest channel

Highest channel

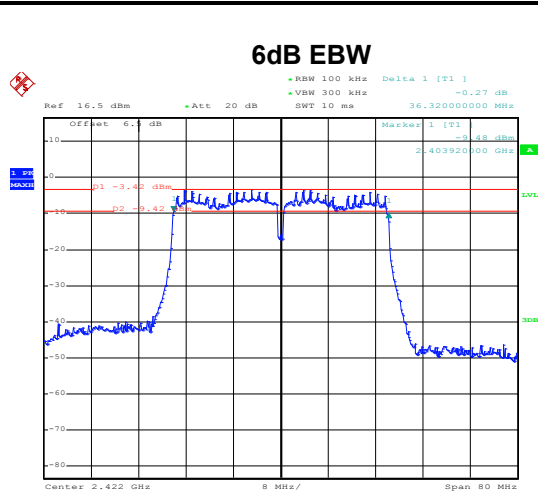


Date: 10.JAN.2020 07:45:05

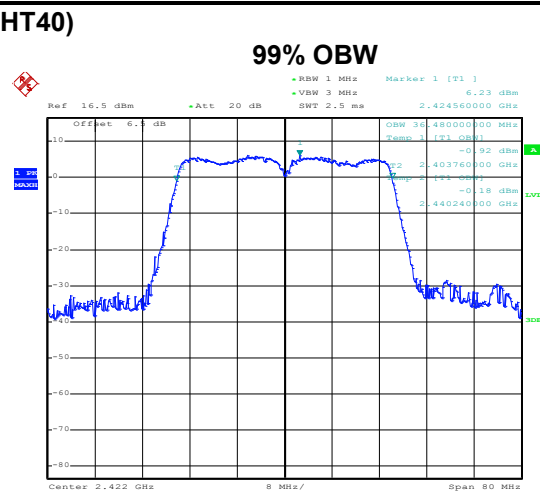


Date: 10.JAN.2020 07:14:03

Lowest channel

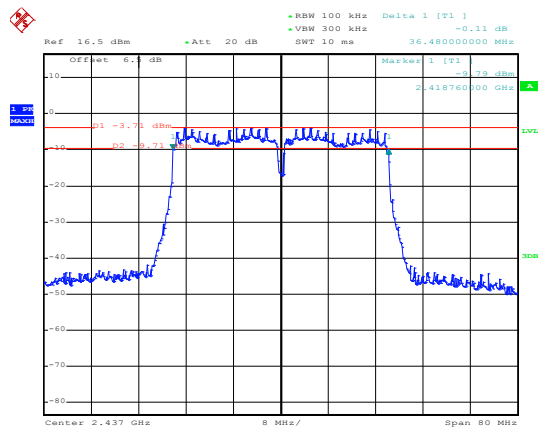


Date: 10.JAN.2020 07:46:12

Lowest channel

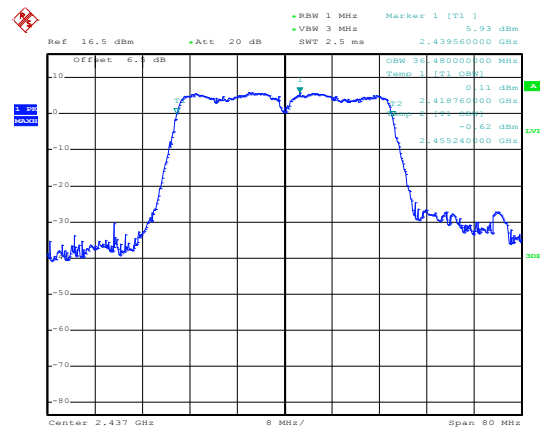


Date: 10.JAN.2020 07:13:37

Middle channel

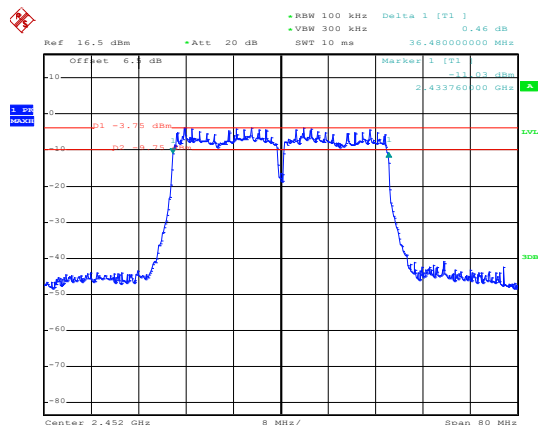

Date: 10.JAN.2020 07:47:31

Middle channel

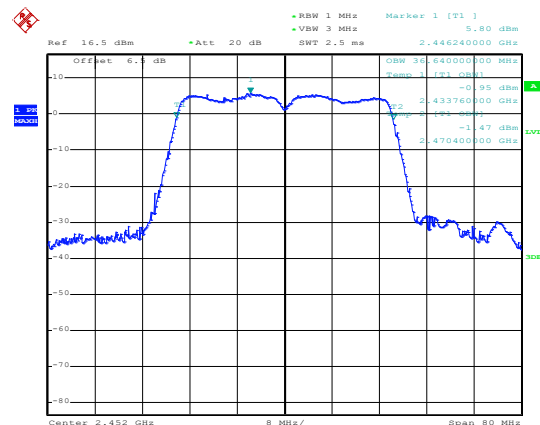


Date: 10.JAN.2020 07:13:08

Highest channel

Highest channel


6.5 Power Spectral Density

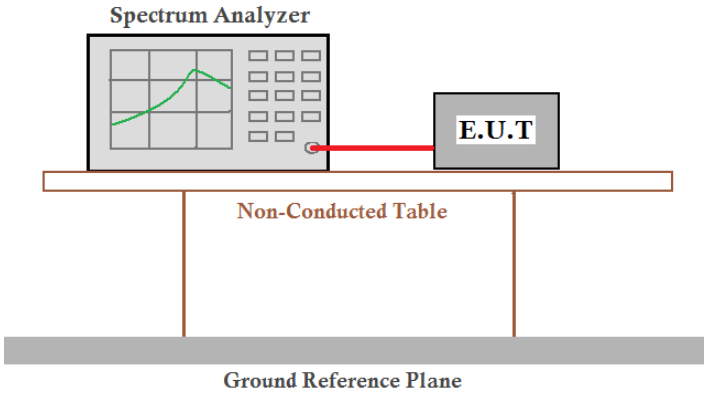Test Requirement:	FCC Part 15 C Section 15.247 (e)
Limit:	8dBm/3kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

Test CH	Power Spectral Density (dBm/3kHz)				Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-8.71	-12.33	-14.09	-18.83	8.00	Pass
Middle	-8.84	-11.61	-14.91	-18.09		
Highest	-9.13	-12.16	-14.18	-18.11		

Test plot as follows:

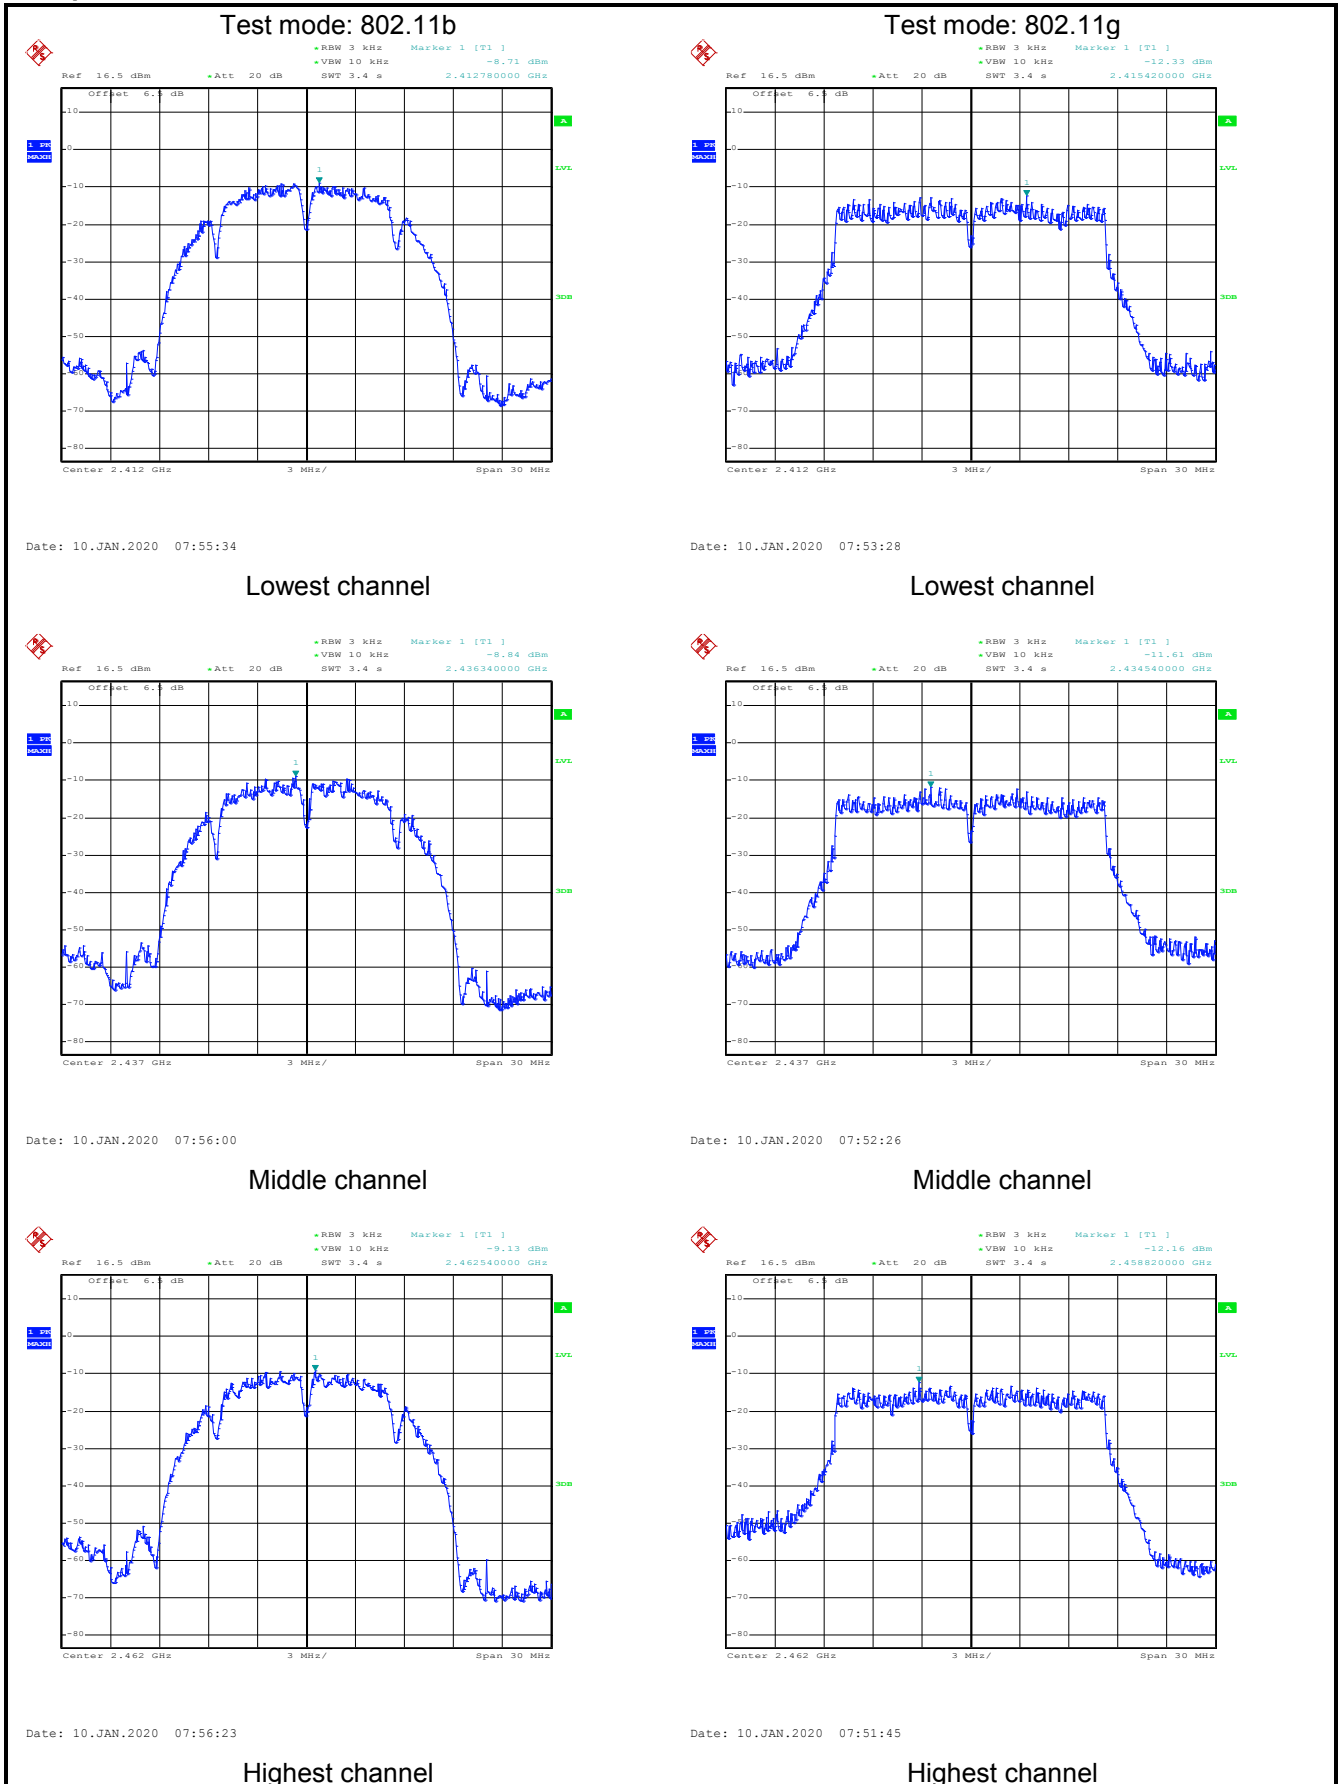


Test mode: 802.11n(HT20)

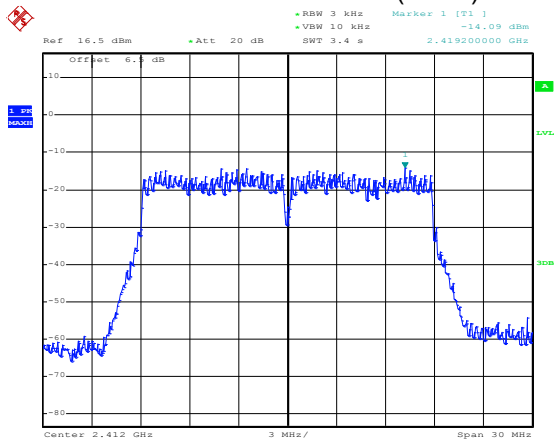


Date: 10.JAN.2020 07:50:23

Test mode: 802.11n(HT40)

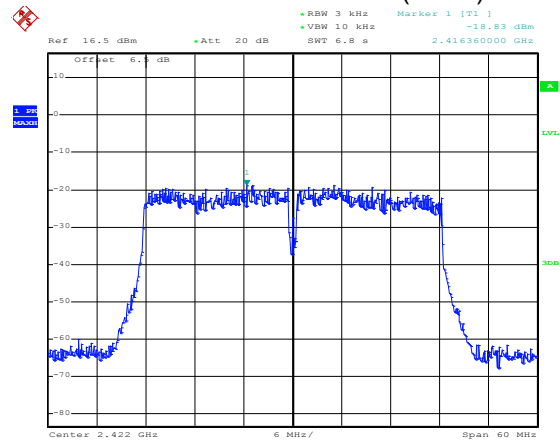


Date: 10.JAN.2020 07:49:40

Lowest channel

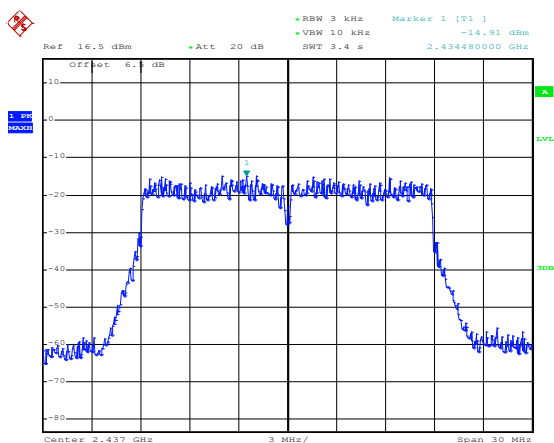


Date: 10.JAN.2020 07:50:51

Lowest channel

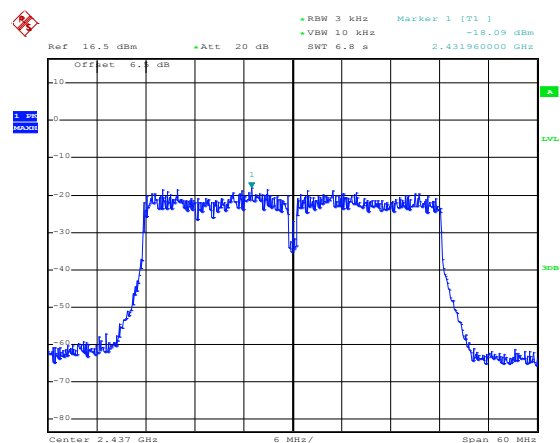


Date: 10.JAN.2020 07:49:05

Middle channel

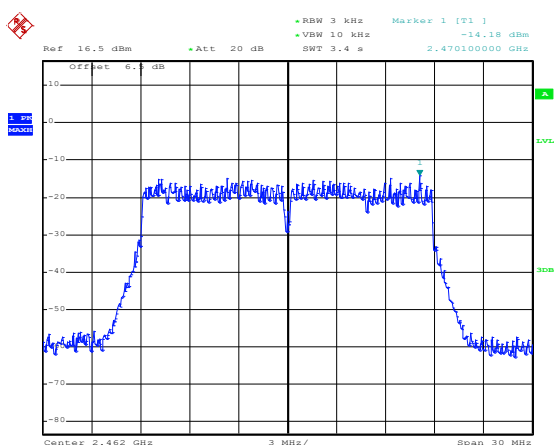

Date: 10.JAN.2020 07:51:14

Middle channel

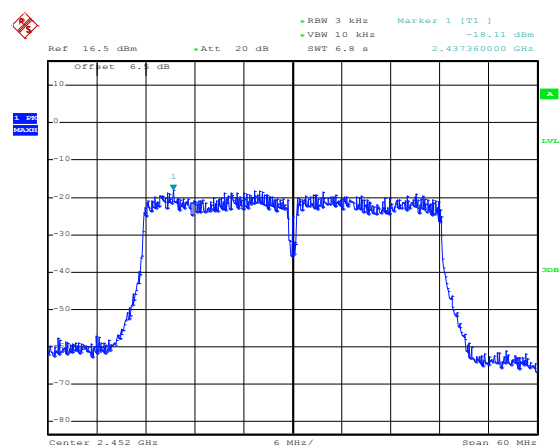


Date: 10.JAN.2020 07:48:34

Highest channel


Highest channel

6.6 Band Edge


6.6.1 Conducted Emission Method

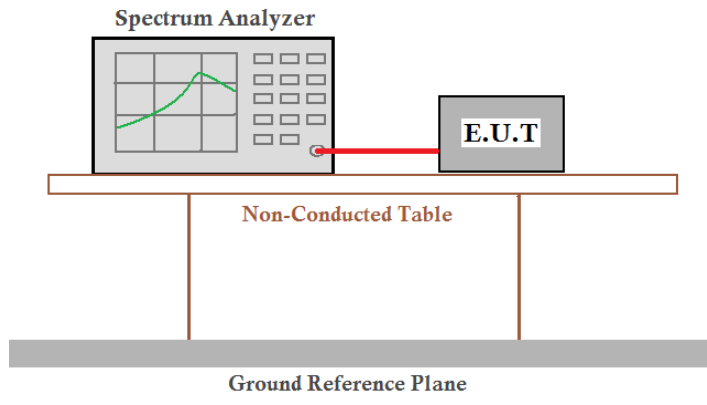Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

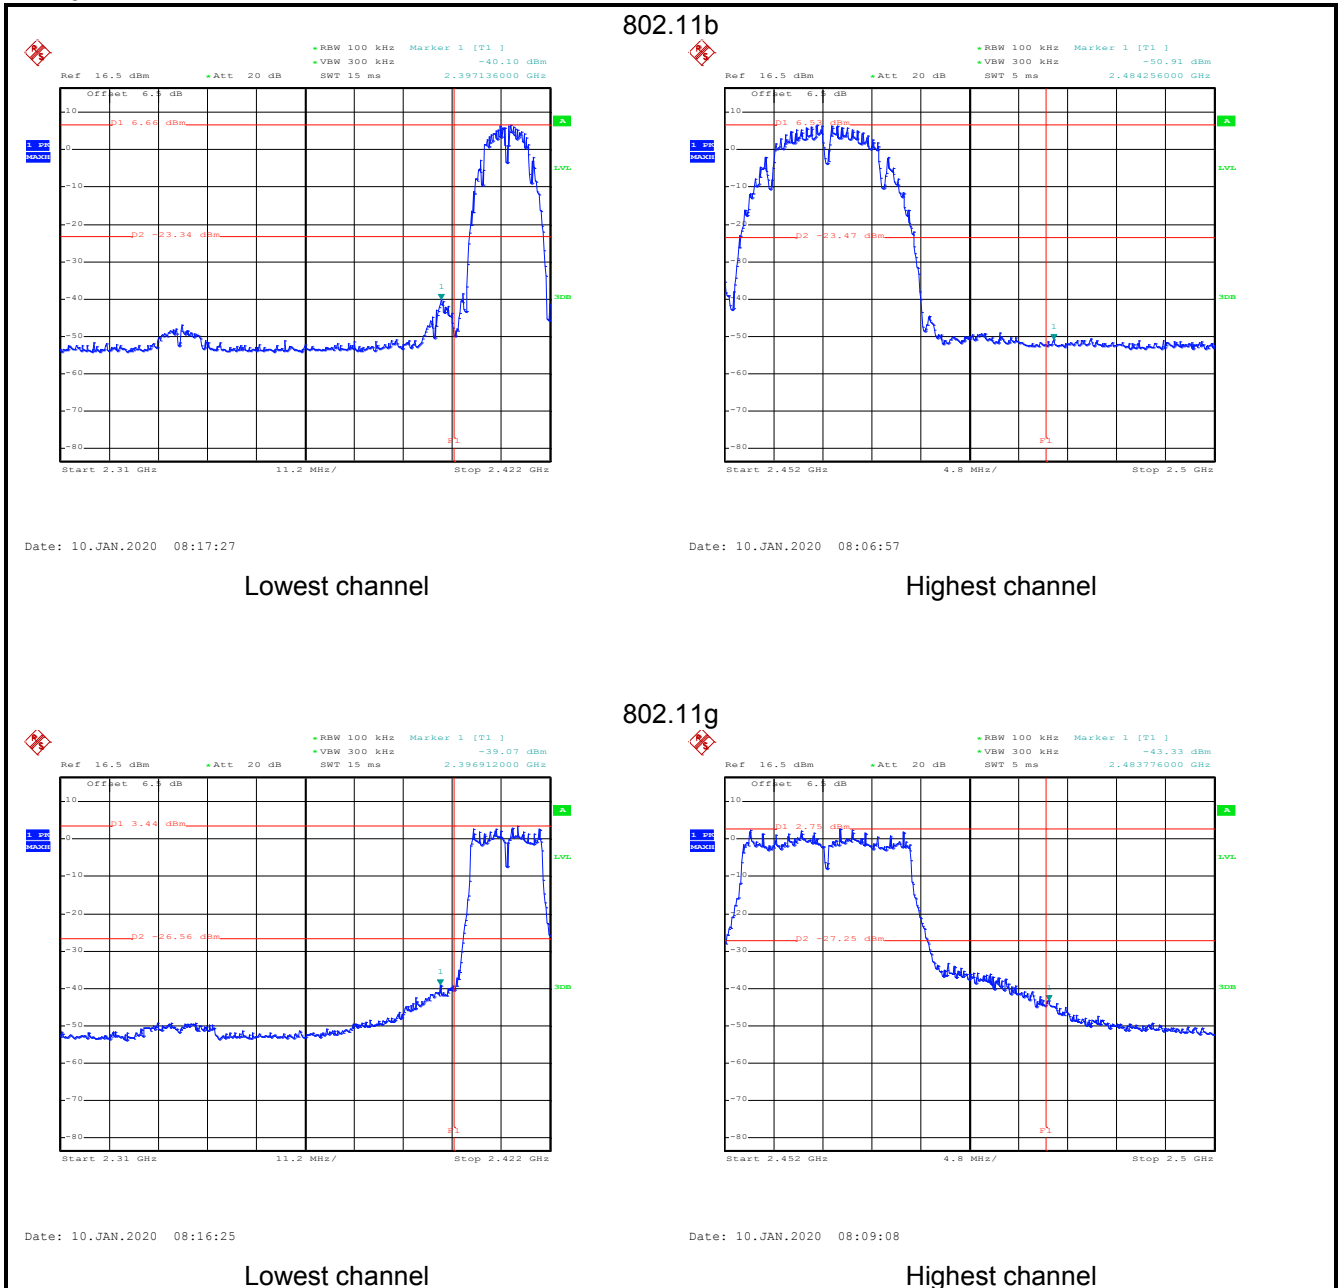


802.11n(HT20)

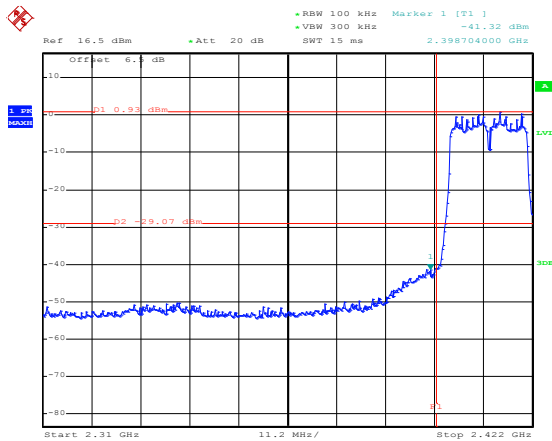

Date: 10.JAN.2020 08:14:15


Lowest channel

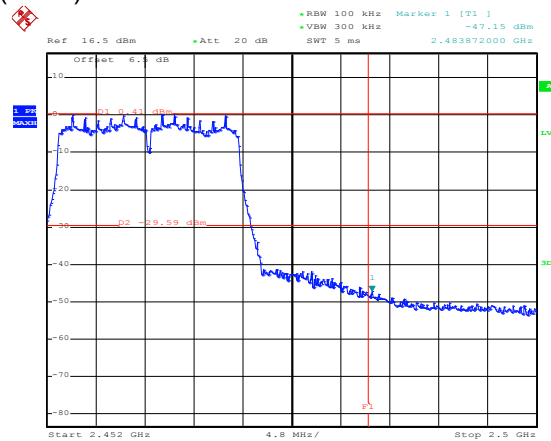

Date: 10.JAN.2020 08:10:29


Highest channel

802.11n(HT40)

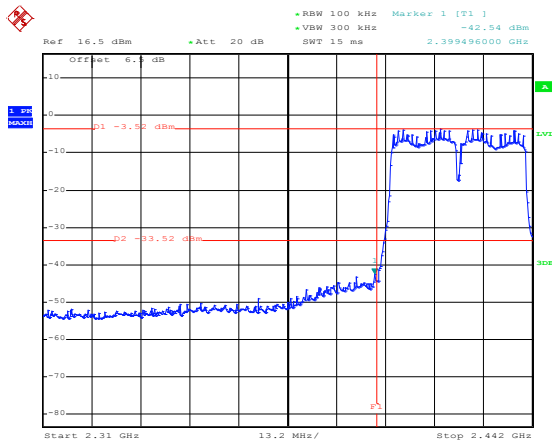

Date: 10.JAN.2020 08:12:51


Lowest channel

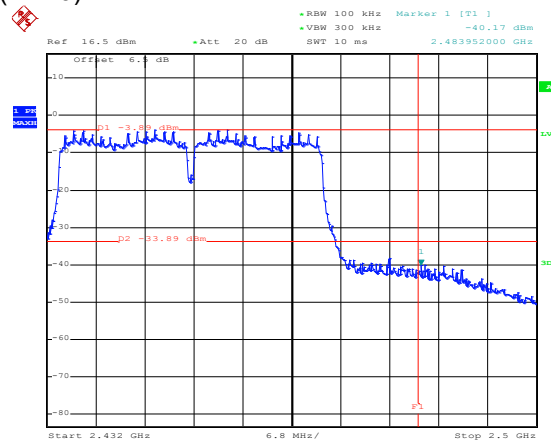

Date: 10.JAN.2020 08:12:02

Highest channel


6.6.2 Radiated Emission Method

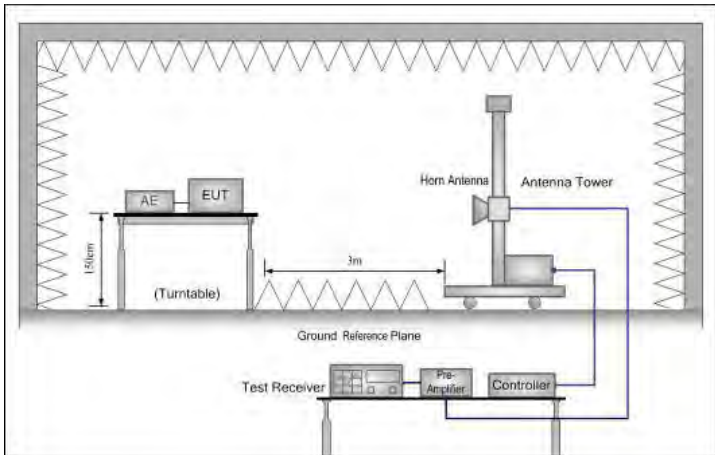Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	2310 MHz to 2390 MHz and 2483.5 MHz to 2500 MHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	Above 1GHz	54.00		Average Value	
		74.00		Peak Value	
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:					
Test Instruments:	Refer to section 5.9 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Passed				

PCB antenna:

802.11b mode:

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

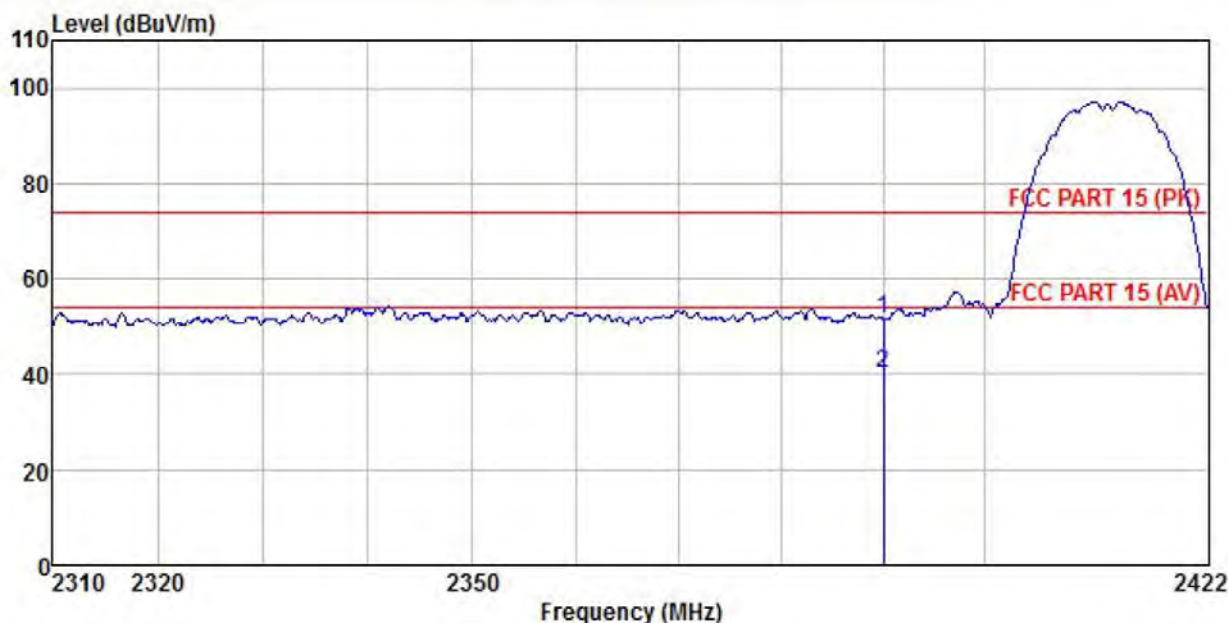


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.65	27.07	4.69	0.00	0.00	51.41	74.00	-22.59	Peak
2	2390.000	8.52	27.07	4.69	0.00	0.00	40.28	54.00	-13.72	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

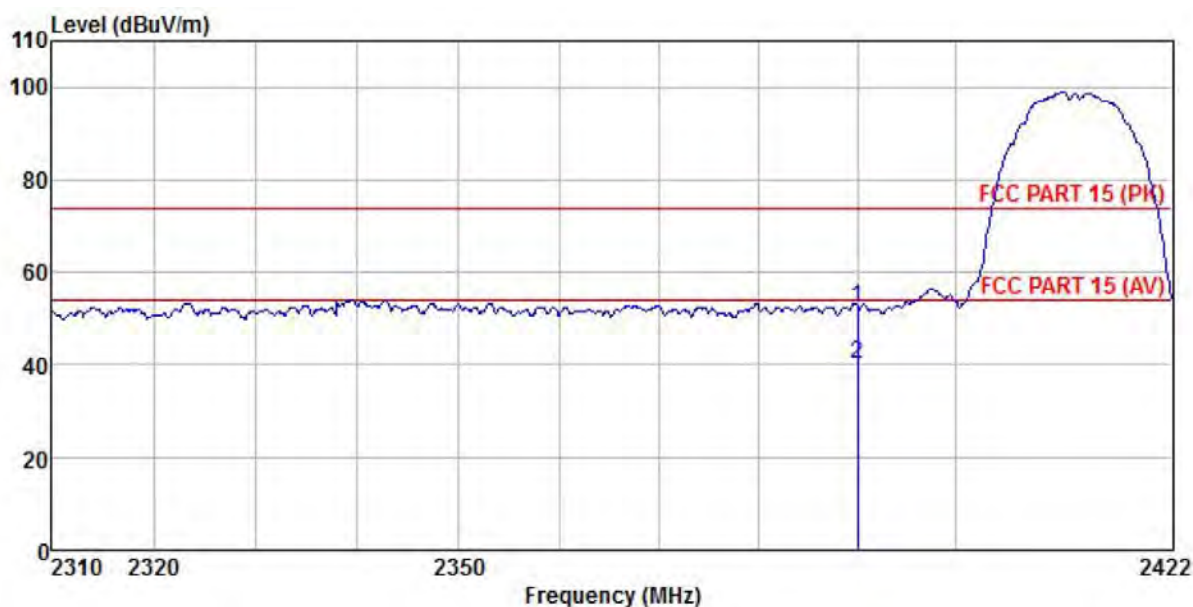


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	20.67	27.08	4.69	0.00	0.00	52.44	74.00	-21.56	Peak
2	2390.000	8.50	27.08	4.69	0.00	0.00	40.27	54.00	-13.73	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

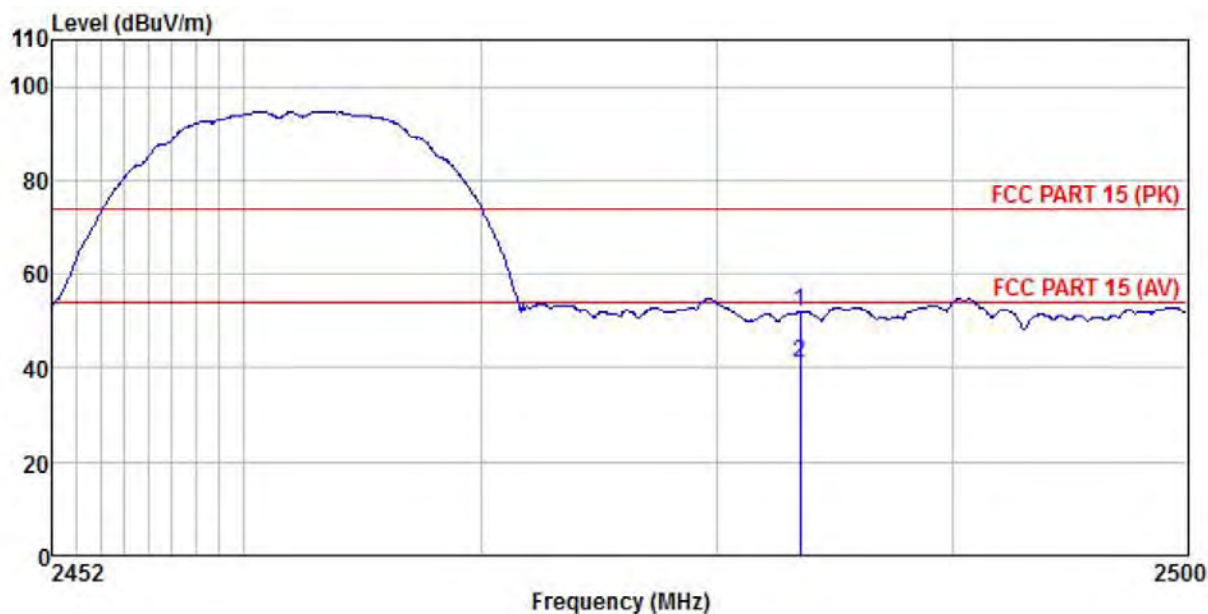


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	
	MHz	Level	Loss	Factor	Factor	dBuV/m	dBuV/m	Limit	Remark
		dBuV	dB/m					dB	
1	2483.500	19.92	27.36	4.81	0.00	0.00	52.09	74.00	-21.91 Peak
2	2483.500	9.01	27.36	4.81	0.00	0.00	41.18	54.00	-12.82 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

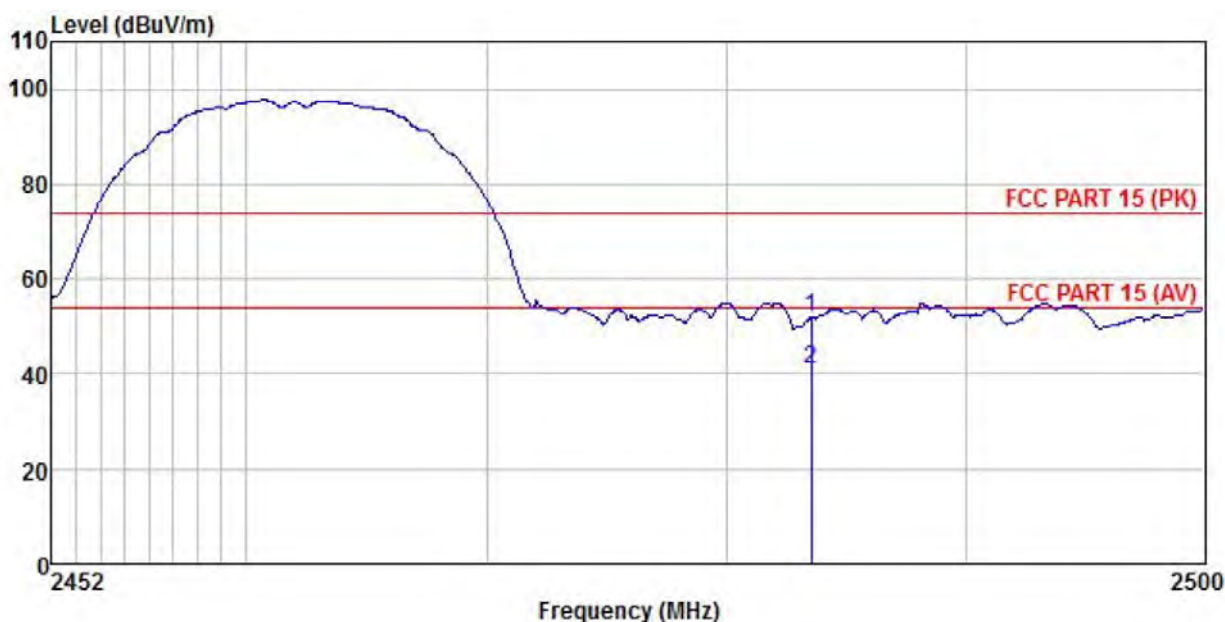


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	19.71	27.35	4.81	0.00	0.00	51.87	74.00	-22.13 Peak
2	2483.500	9.03	27.35	4.81	0.00	0.00	41.19	54.00	-12.81 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g mode:

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

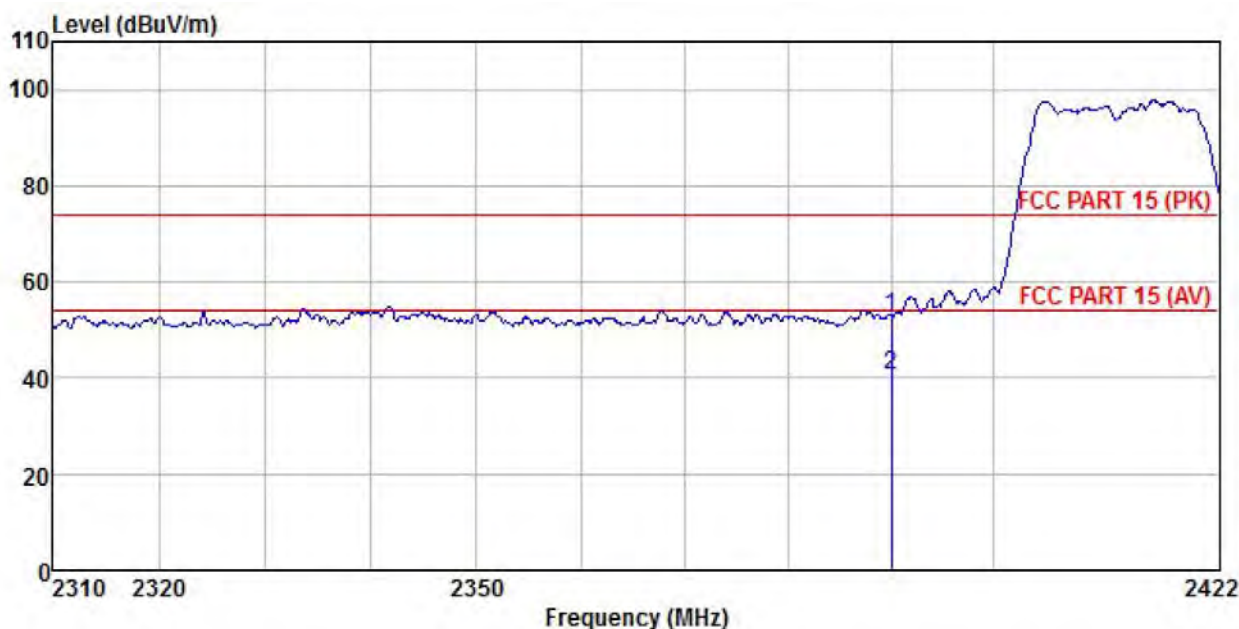


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	21.15	27.07	4.69	0.00	0.00	52.91	74.00	-21.09	Peak
2	2390.000	8.94	27.07	4.69	0.00	0.00	40.70	54.00	-13.30	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

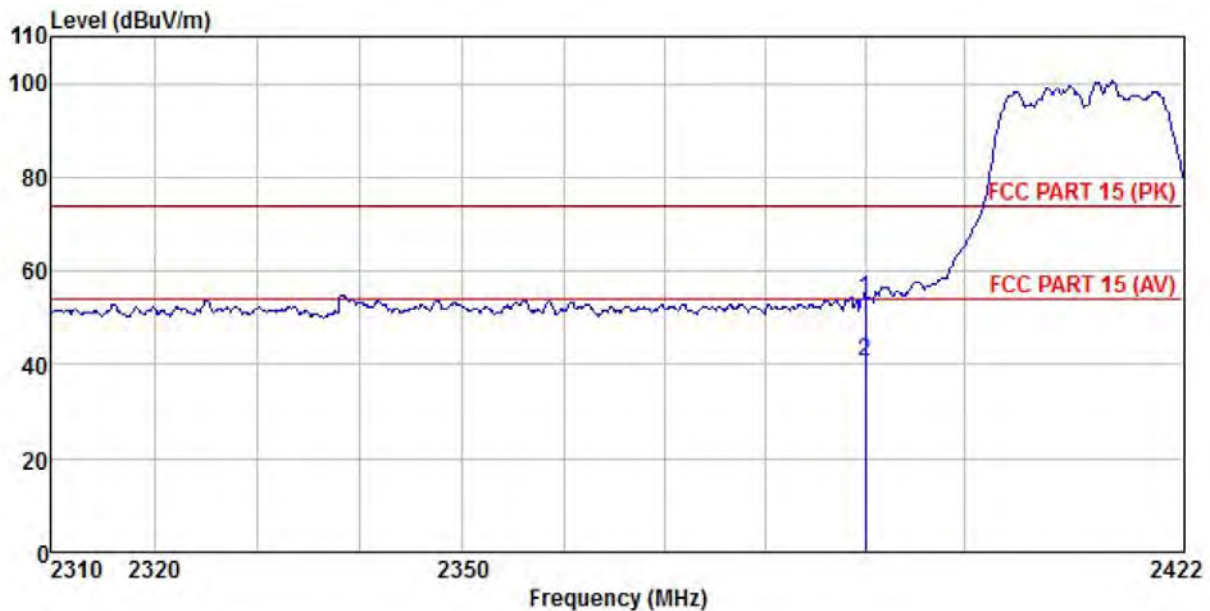


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.14	27.08	4.69	0.00	0.00	53.91	74.00	-20.09	Peak
2	2390.000	8.96	27.08	4.69	0.00	0.00	40.73	54.00	-13.27	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamp Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

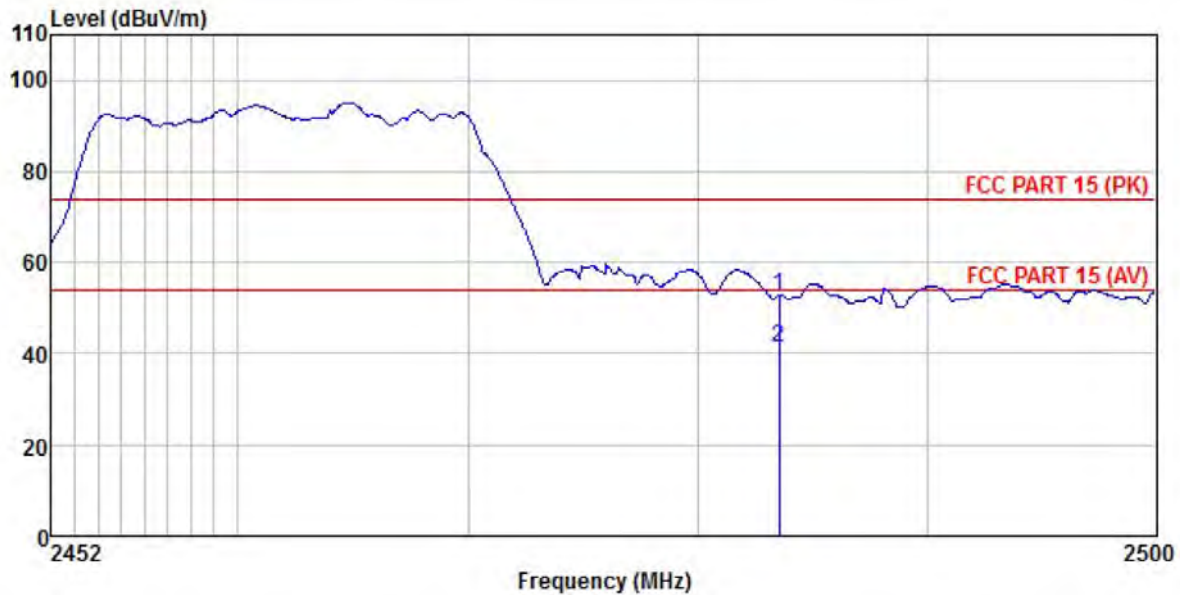


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	Remark
		dBuV	dB/m	dB		dB	dBuV/m	dBuV/m	dB
1	2483.500	20.60	27.36	4.81	0.00	0.00	52.77	74.00	-21.23 Peak
2	2483.500	9.05	27.36	4.81	0.00	0.00	41.22	54.00	-12.78 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

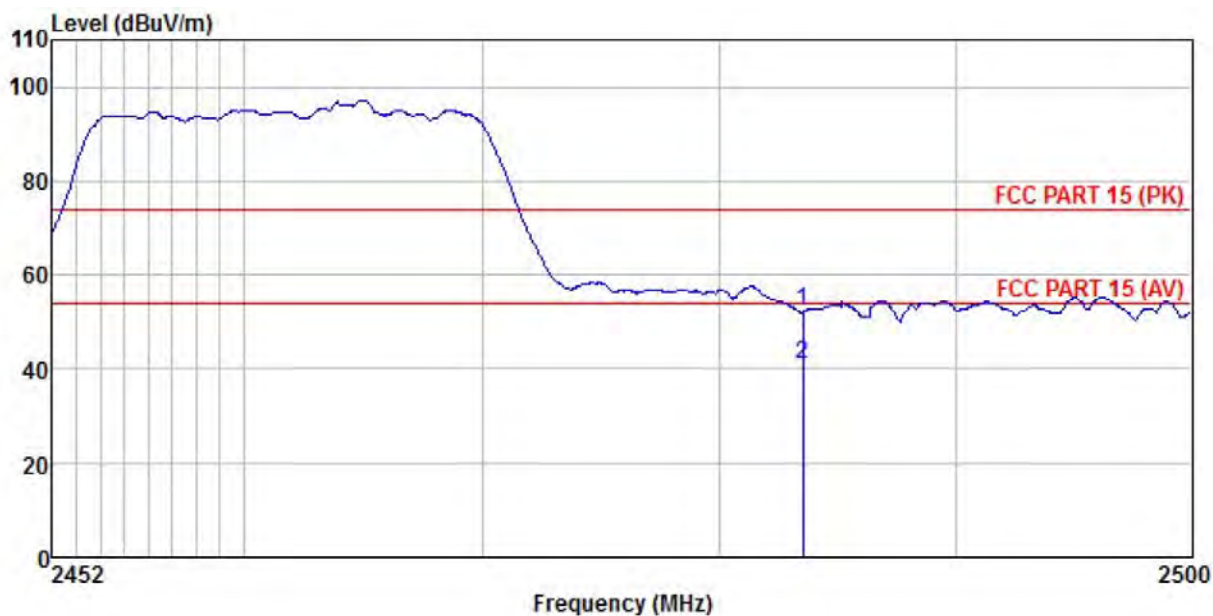


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.17	27.35	4.81	0.00	0.00	52.33	74.00	-21.67	Peak
2	2483.500	9.02	27.35	4.81	0.00	0.00	41.18	54.00	-12.82	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT20):

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

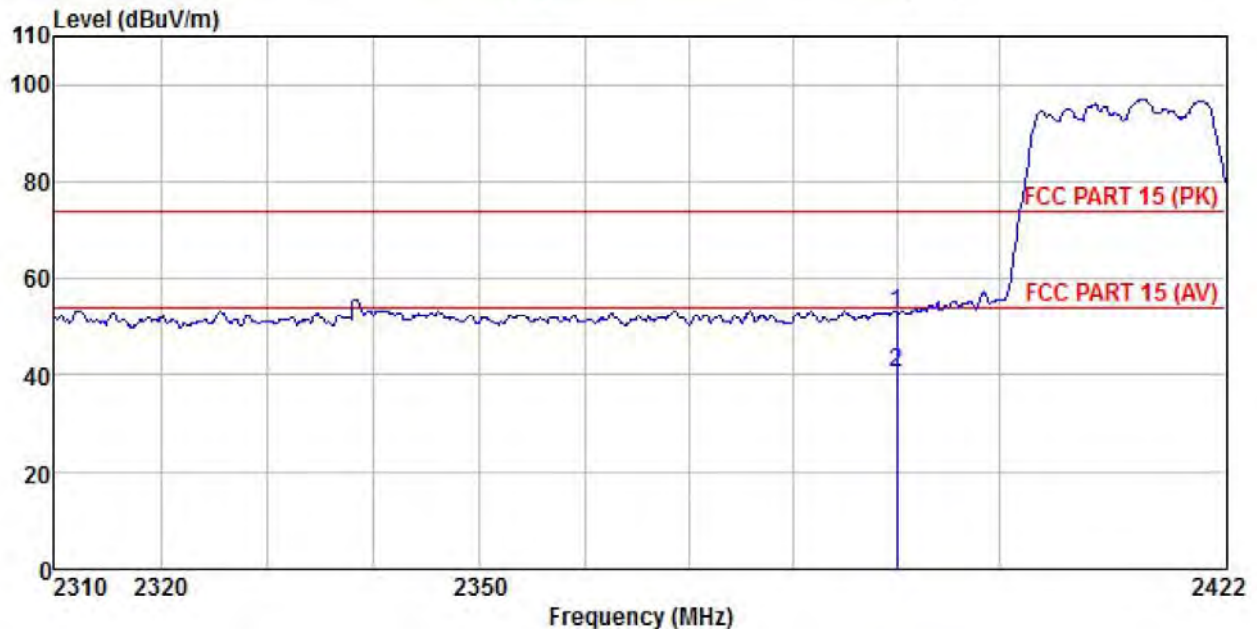


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	21.12	27.07	4.69	0.00	0.00	52.88	74.00	-21.12	Peak
2	2390.000	8.97	27.07	4.69	0.00	0.00	40.73	54.00	-13.27	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

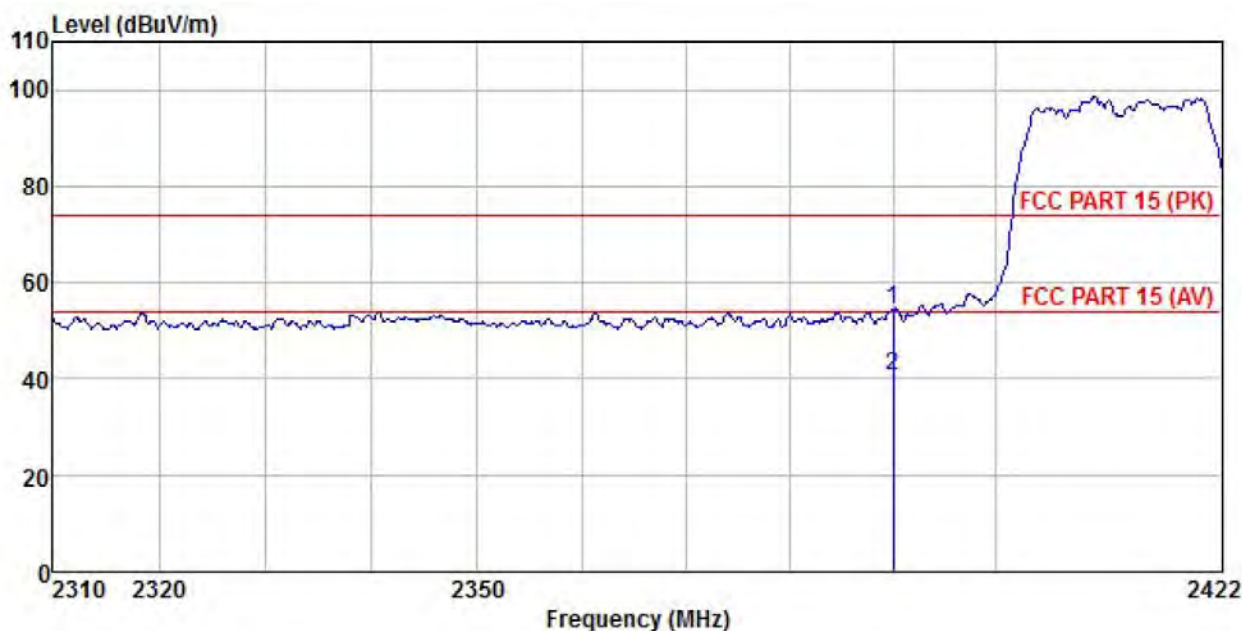


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.71	27.08	4.69	0.00	0.00	54.48	74.00	-19.52	Peak
2	2390.000	8.95	27.08	4.69	0.00	0.00	40.72	54.00	-13.28	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

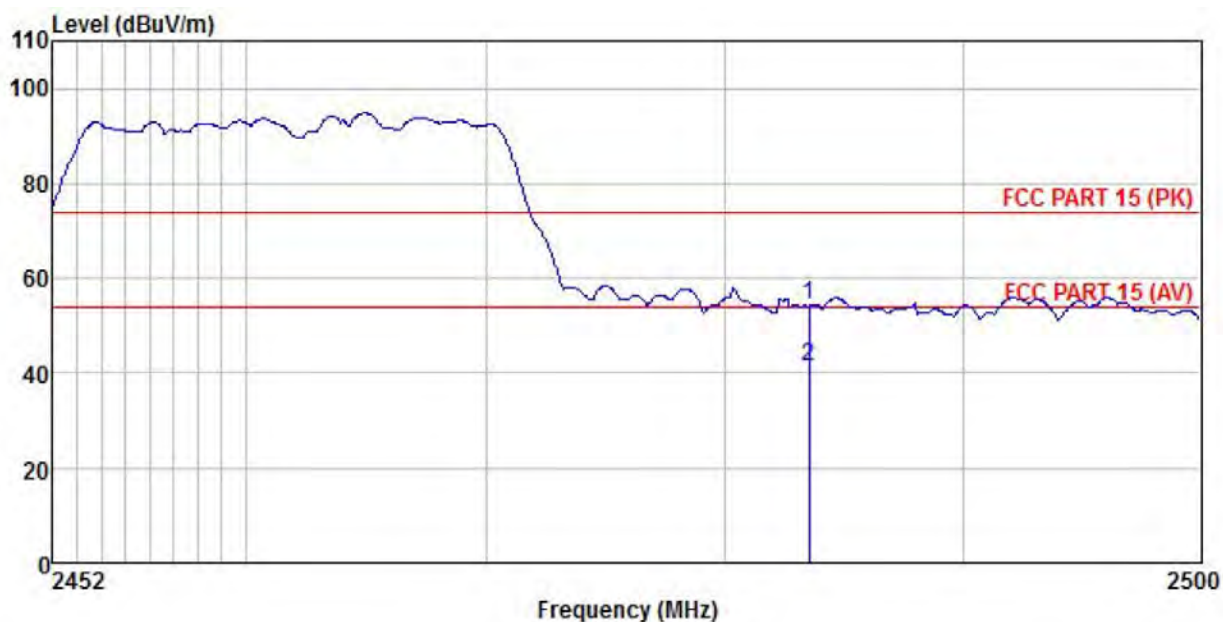


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	22.16	27.36	4.81	0.00	0.00	54.33	74.00	-19.67	Peak
2	2483.500	9.06	27.36	4.81	0.00	0.00	41.23	54.00	-12.77	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

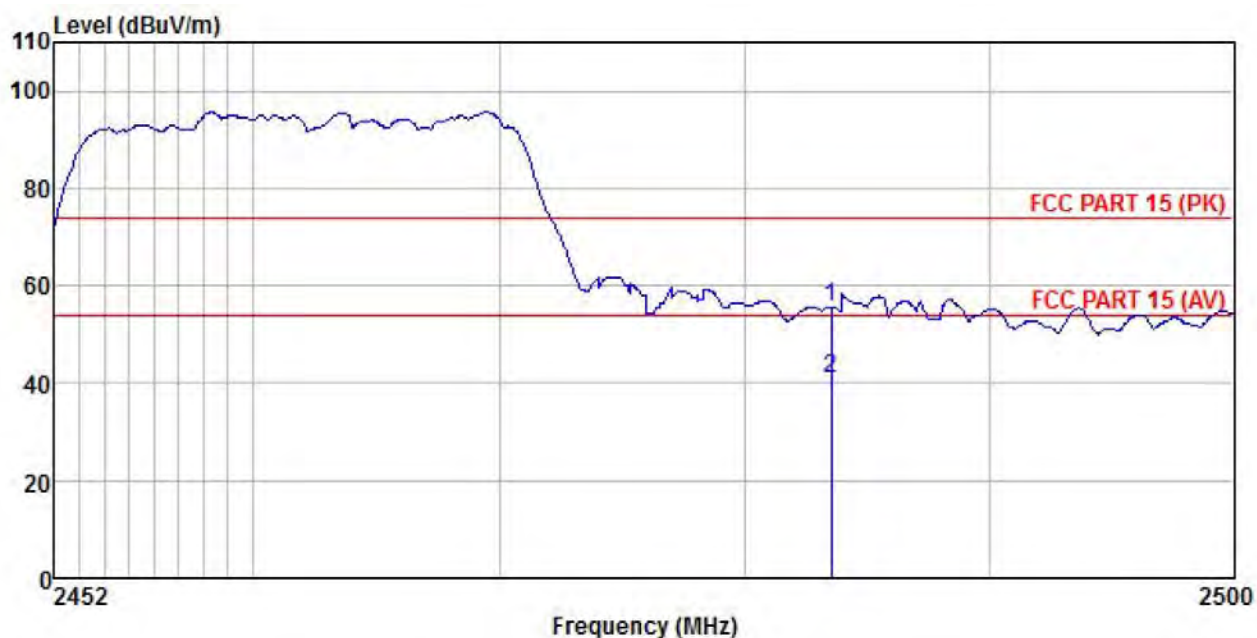


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.62	27.35	4.81	0.00	0.00	55.78	74.00	-18.22	Peak
2	2483.500	9.02	27.35	4.81	0.00	0.00	41.18	54.00	-12.82	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT40):

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

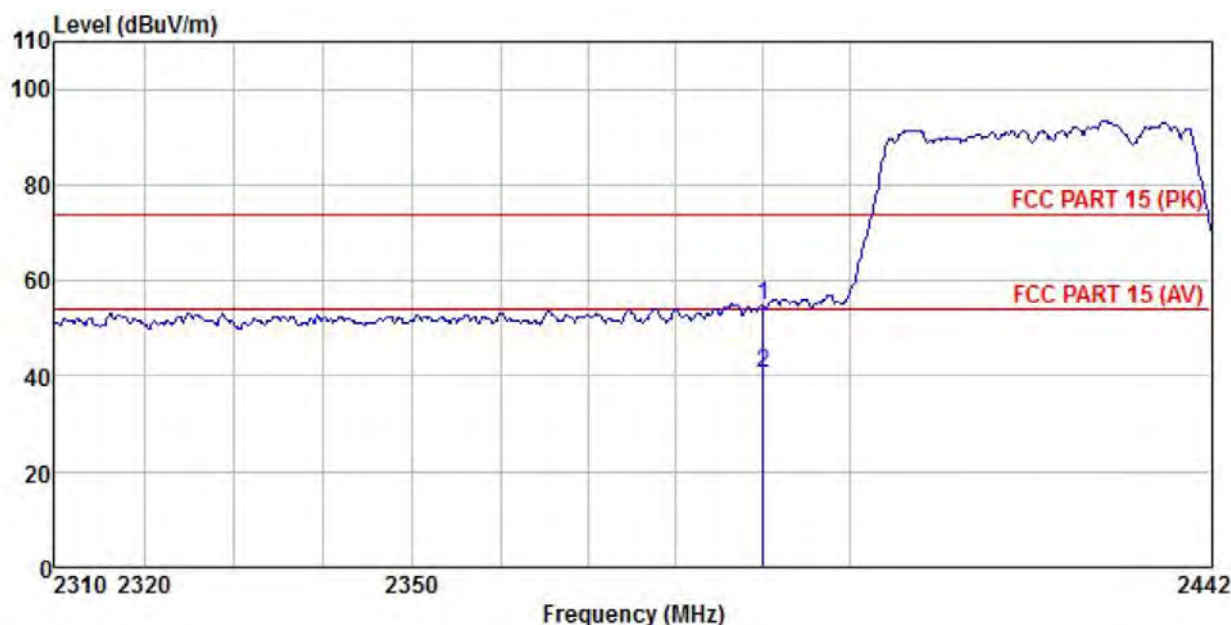


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	23.06	27.07	4.69	0.00	0.00	54.82	74.00	-19.18	Peak
2	2390.000	8.95	27.07	4.69	0.00	0.00	40.71	54.00	-13.29	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

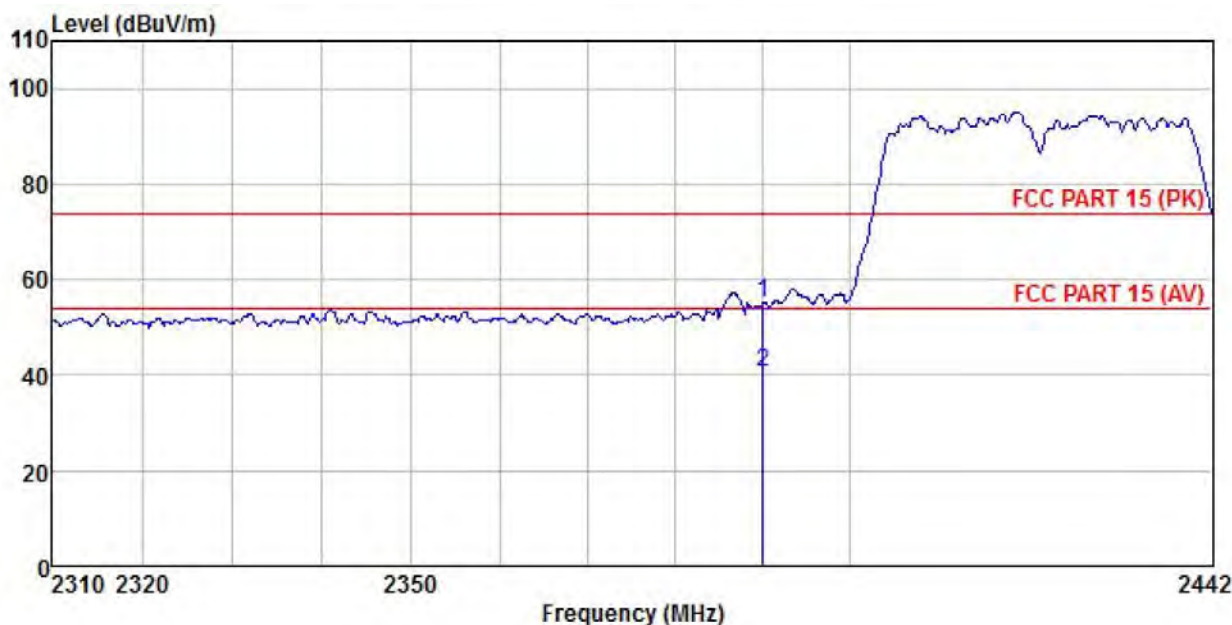


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	23.39	27.08	4.69	0.00	0.00	55.16	74.00	-18.84	Peak
2	2390.000	8.97	27.08	4.69	0.00	0.00	40.74	54.00	-13.26	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

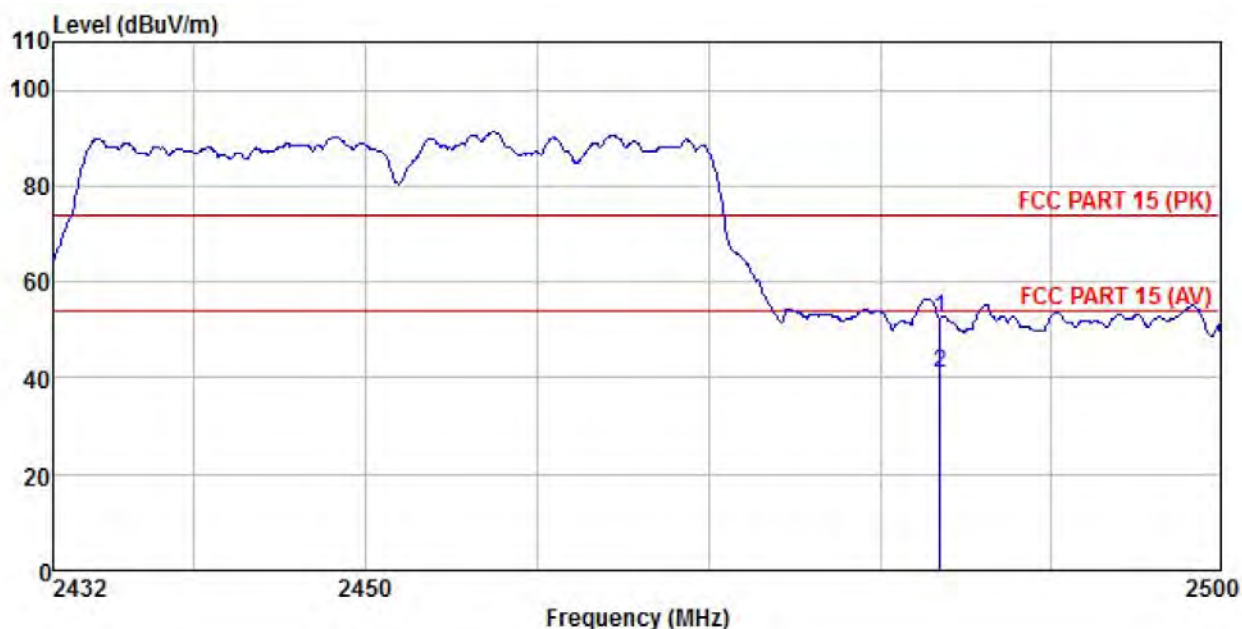


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	dBuV/m	dBuV/m	dB
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	20.28	27.36	4.81	0.00	0.00	52.45	74.00	-21.55 Peak
2	2483.500	9.03	27.36	4.81	0.00	0.00	41.20	54.00	-12.80 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

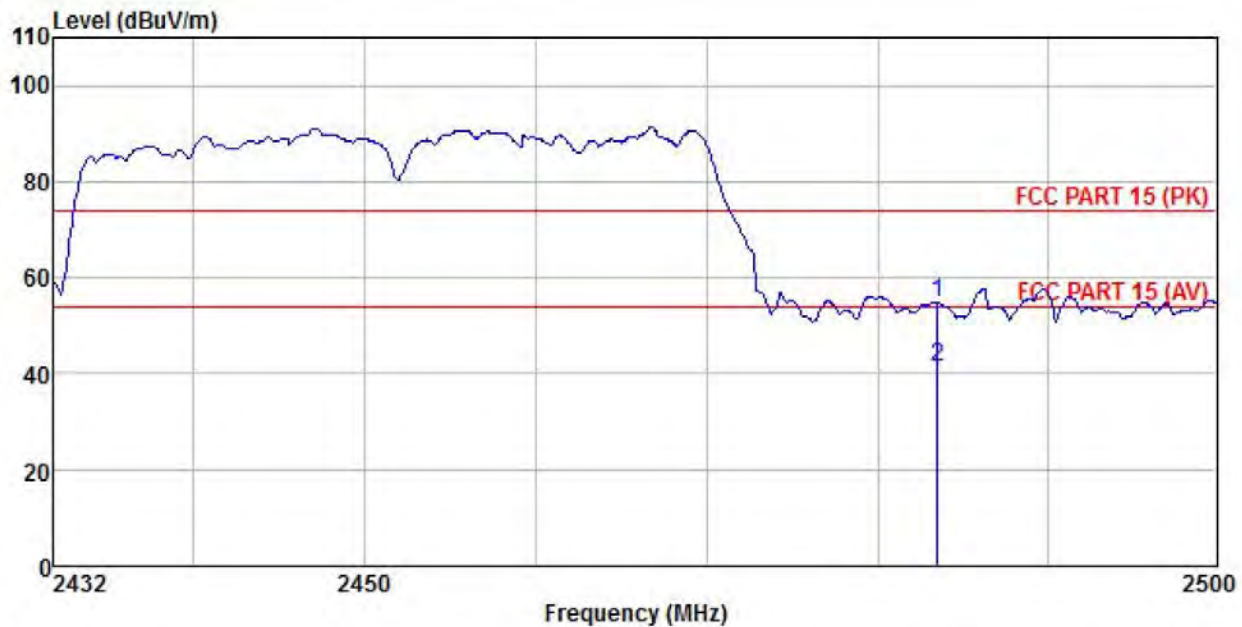

	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	22.67	27.35	4.81	0.00	0.00	54.83	74.00	-19.17	Peak
2	2483.500	9.07	27.35	4.81	0.00	0.00	41.23	54.00	-12.77	Average


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Rod antenna:

802.11b mode:

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

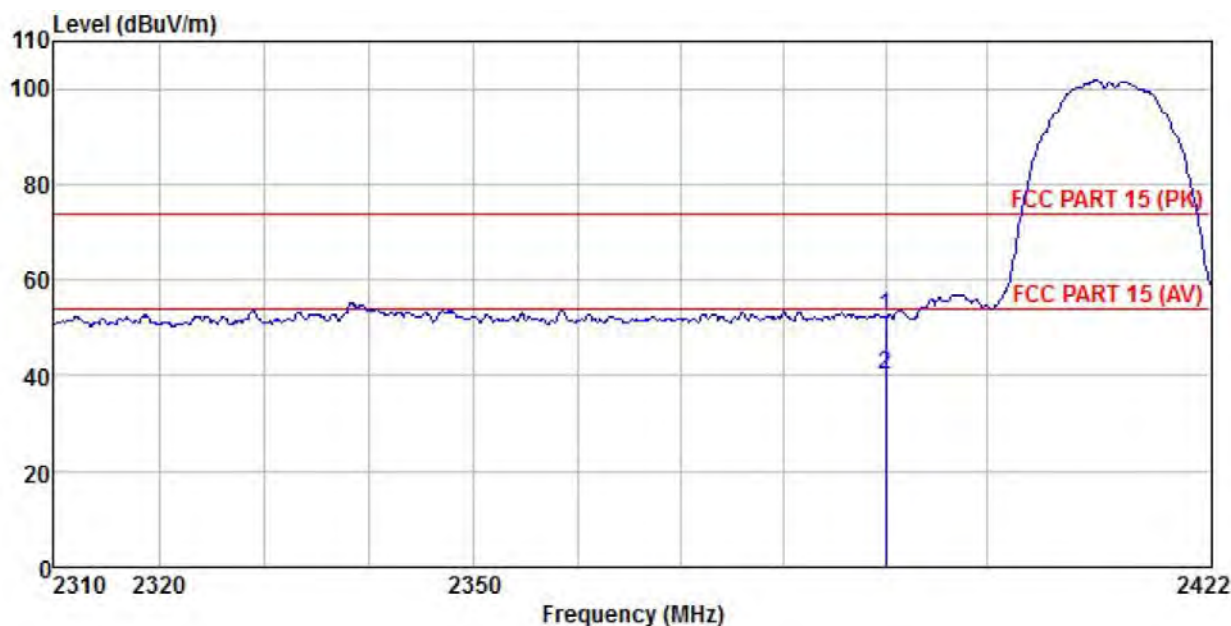


	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	2390.000	20.54	27.07	4.69	0.00	52.30	74.00 -21.70 Peak
2	2390.000	8.57	27.07	4.69	0.00	40.33	54.00 -13.67 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

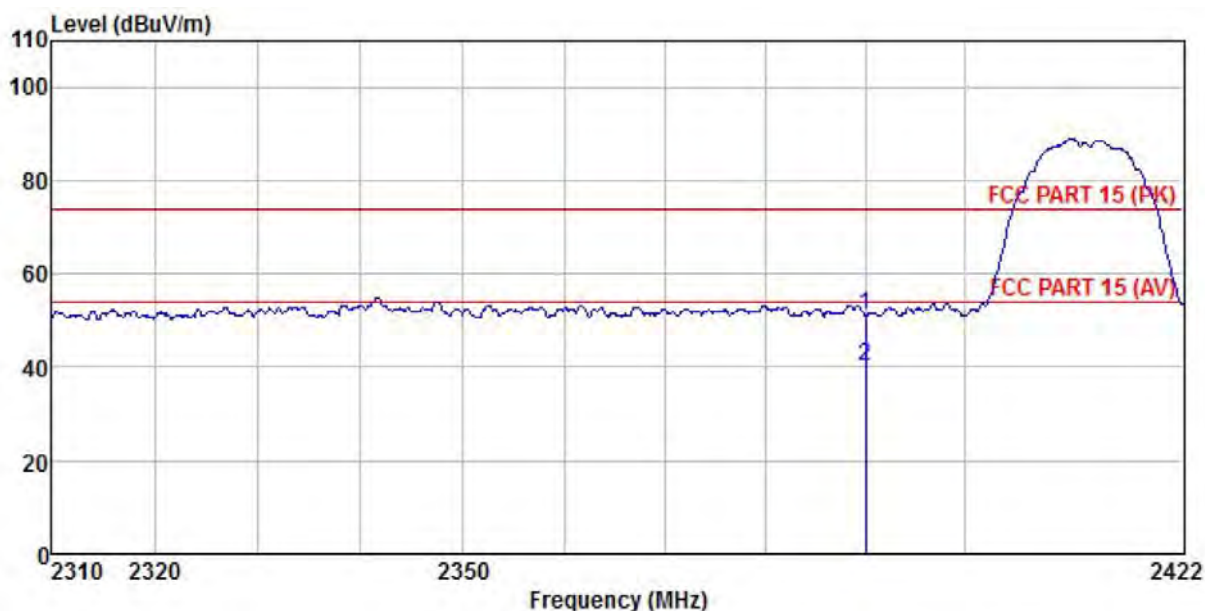


	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.40	27.08	4.69	0.00	51.17	74.00	-22.83	Peak
2	2390.000	8.48	27.08	4.69	0.00	40.25	54.00	-13.75	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

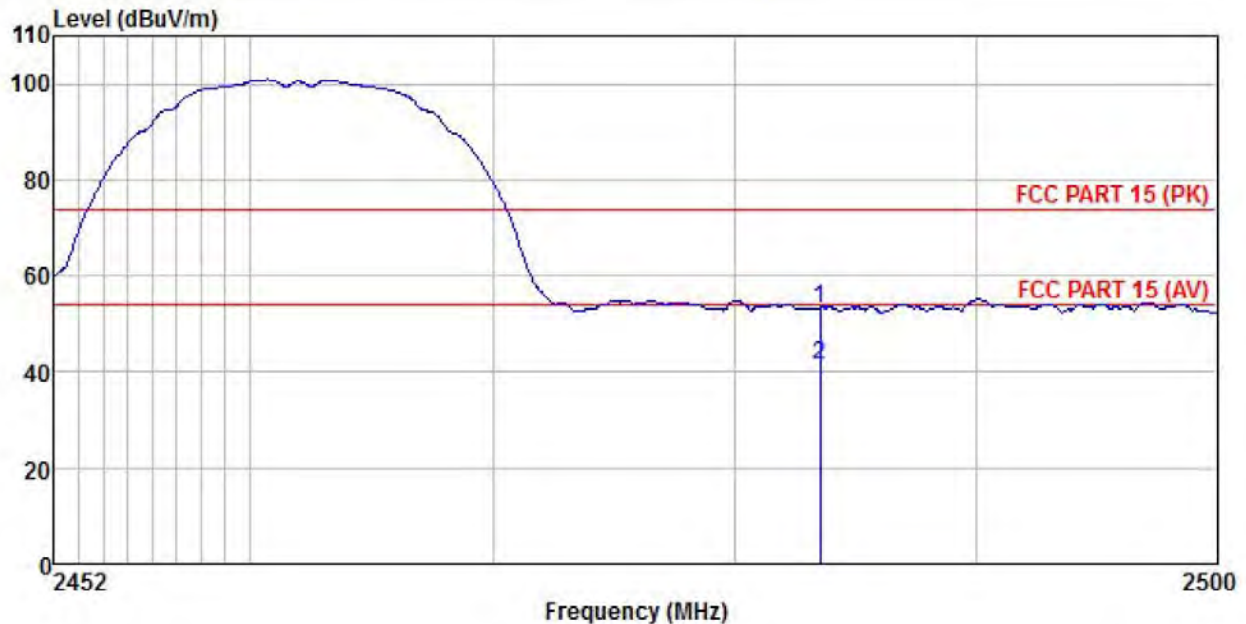


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	21.19	27.36	4.81	0.00	53.36	74.00	-20.64	Peak
2	2483.500	9.18	27.36	4.81	0.00	41.35	54.00	-12.65	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

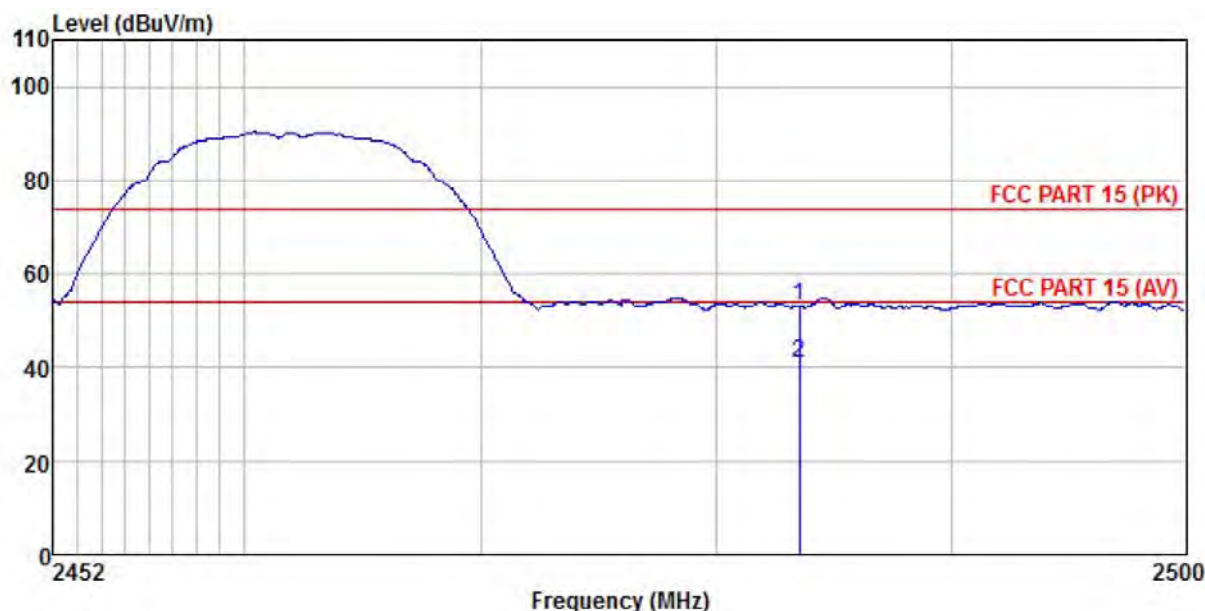


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.98	27.35	4.81	0.00	53.14	74.00	-20.86	Peak
2	2483.500	9.03	27.35	4.81	0.00	41.19	54.00	-12.81	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g mode:

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

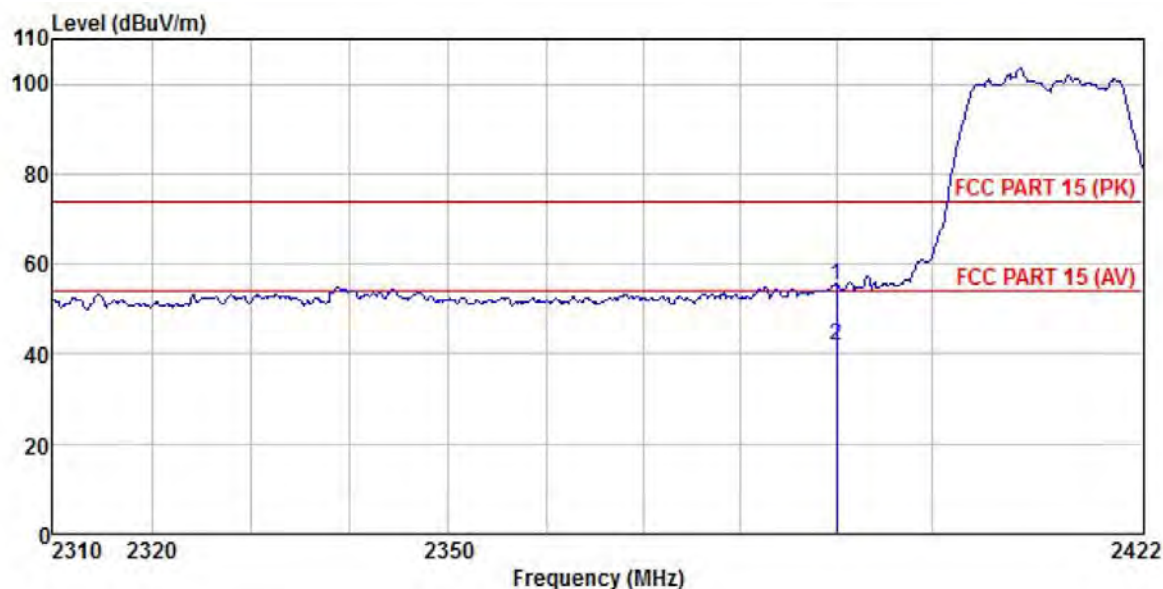


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	23.58	27.07	4.69	0.00	55.34	74.00	-18.66	Peak
2	2390.000	10.06	27.07	4.69	0.00	41.82	54.00	-12.18	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

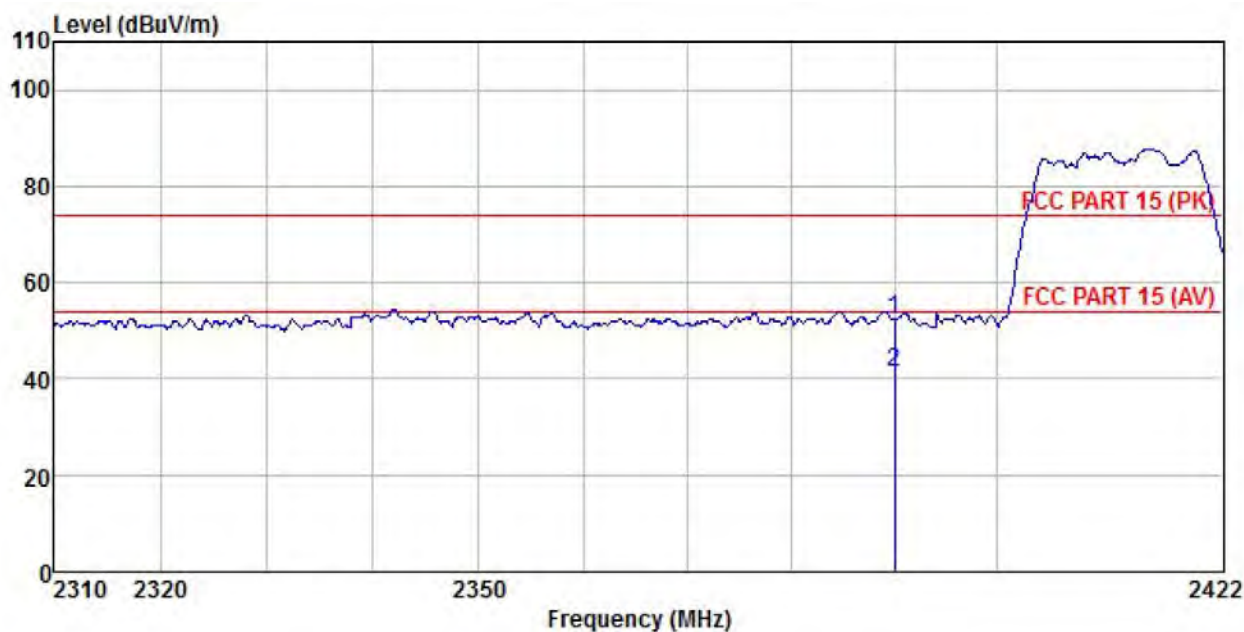


	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB
1	2390.000	20.62	27.08	4.69	0.00	52.39	74.00 -21.61 Peak
2	2390.000	9.55	27.08	4.69	0.00	41.32	54.00 -12.68 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

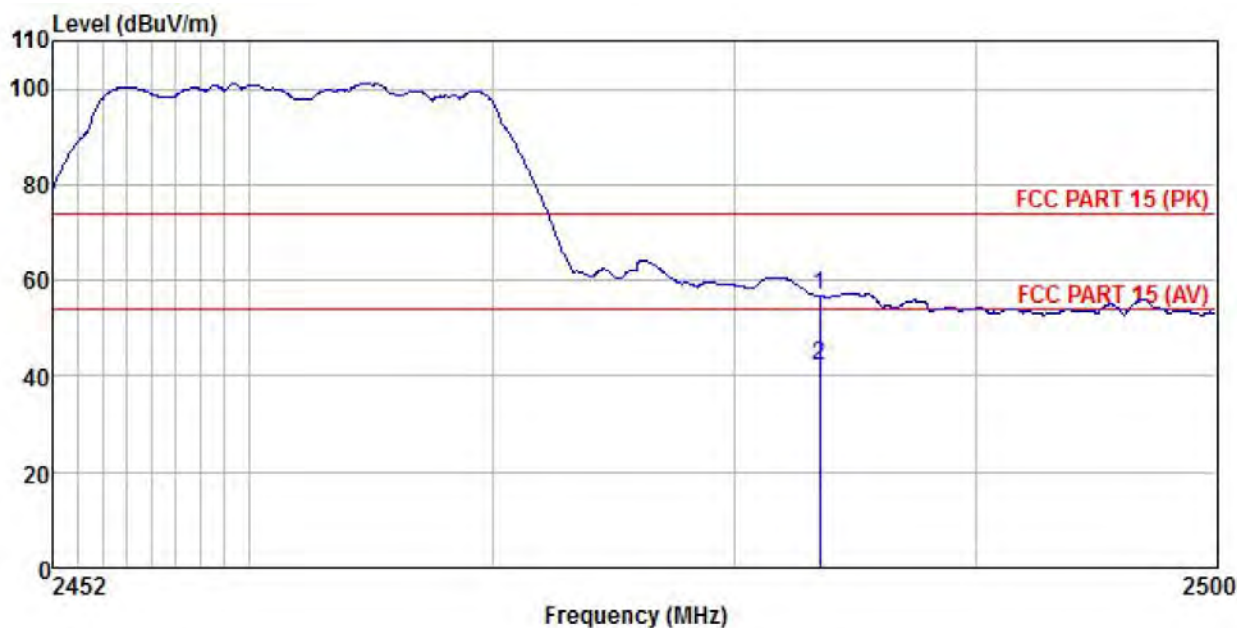


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	24.57	27.36	4.81	0.00	56.74	74.00	-17.26	Peak
2	2483.500	10.05	27.36	4.81	0.00	42.22	54.00	-11.78	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

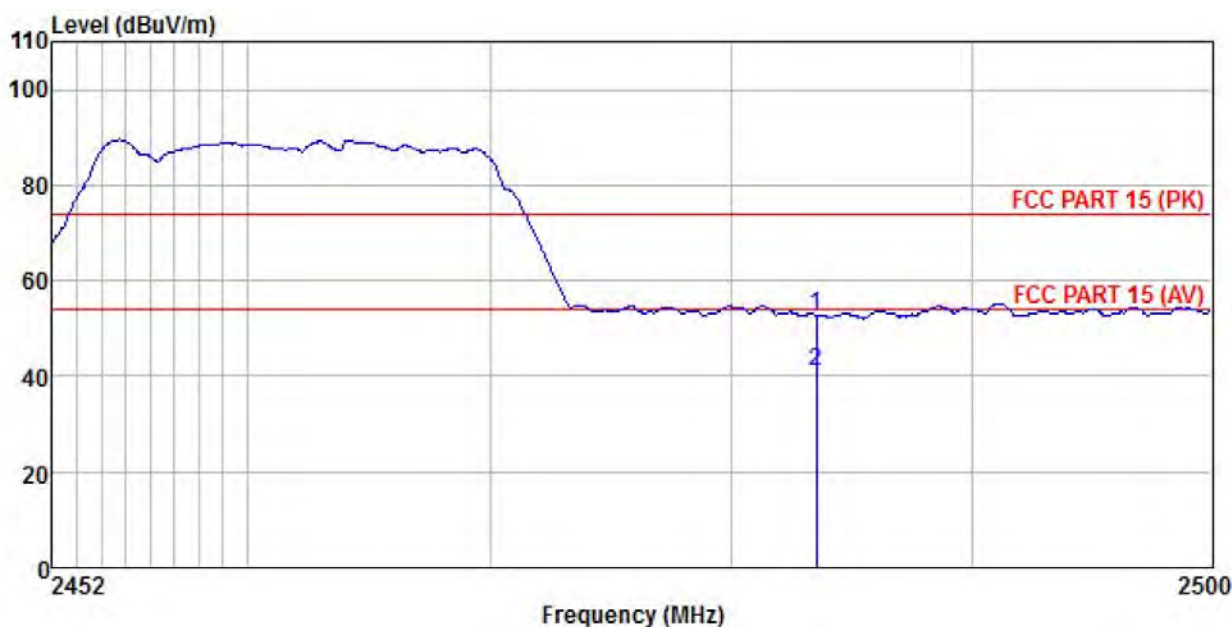


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.63	27.35	4.81	0.00	52.79	74.00	-21.21	Peak
2	2483.500	9.02	27.35	4.81	0.00	41.18	54.00	-12.82	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT20):

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

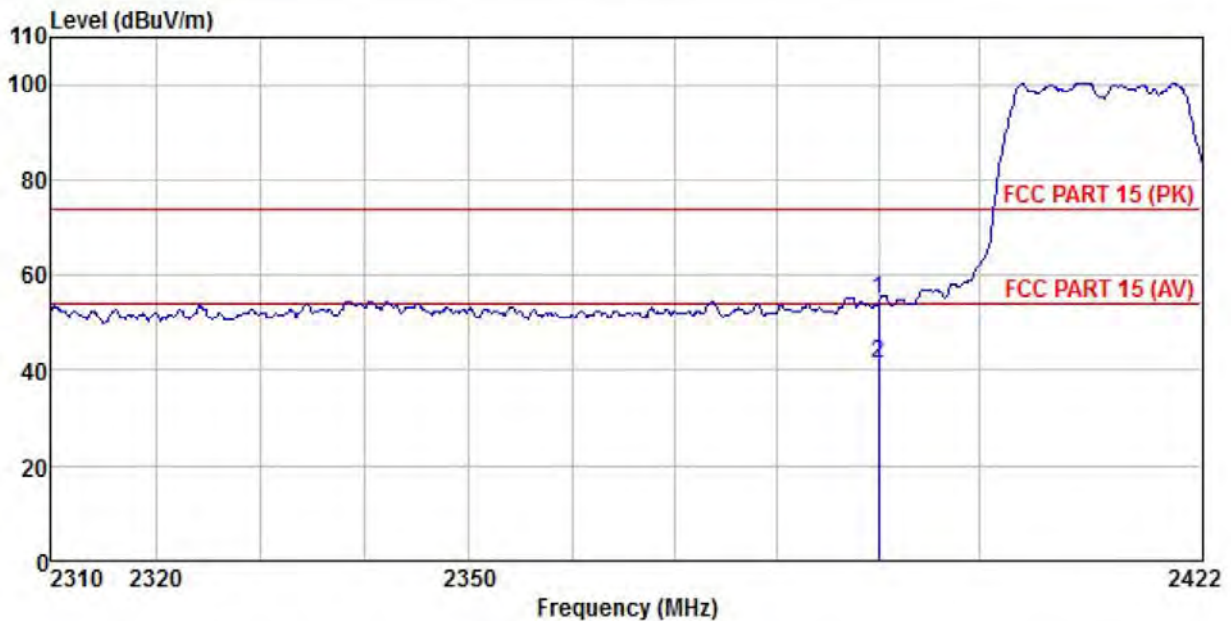


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	23.16	27.07	4.69	0.00	54.92	74.00	-19.08	Peak
2	2390.000	9.76	27.07	4.69	0.00	41.52	54.00	-12.48	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

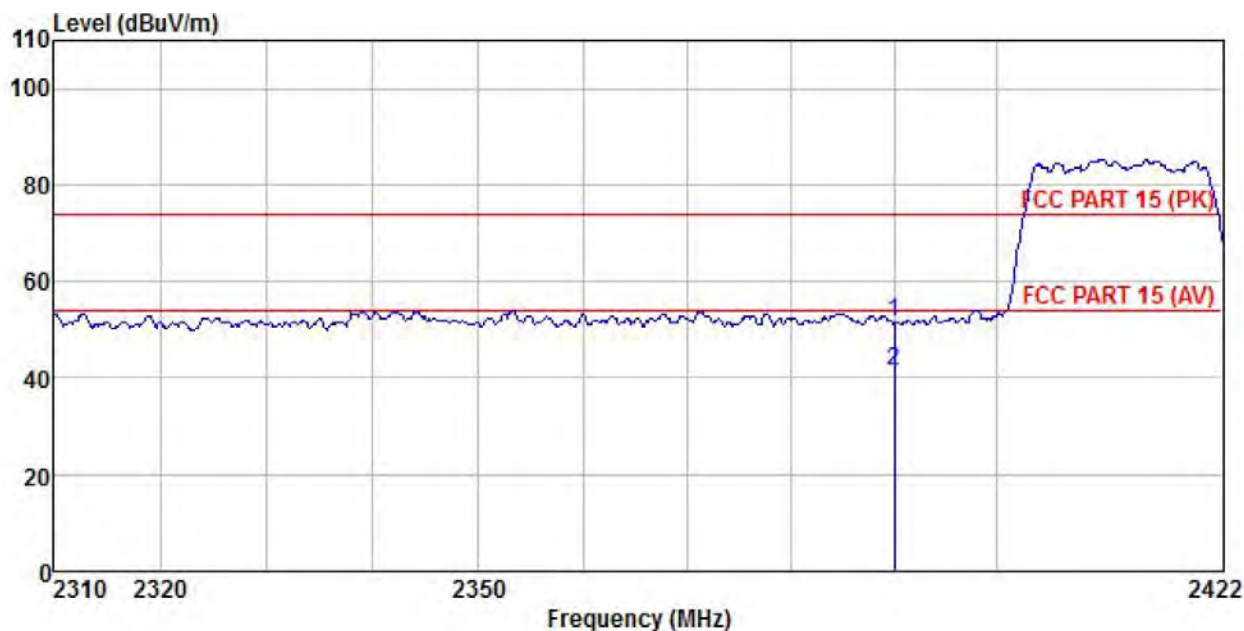


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.85	27.08	4.69	0.00	51.62	74.00	-22.38	Peak
2	2390.000	9.56	27.08	4.69	0.00	41.33	54.00	-12.67	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

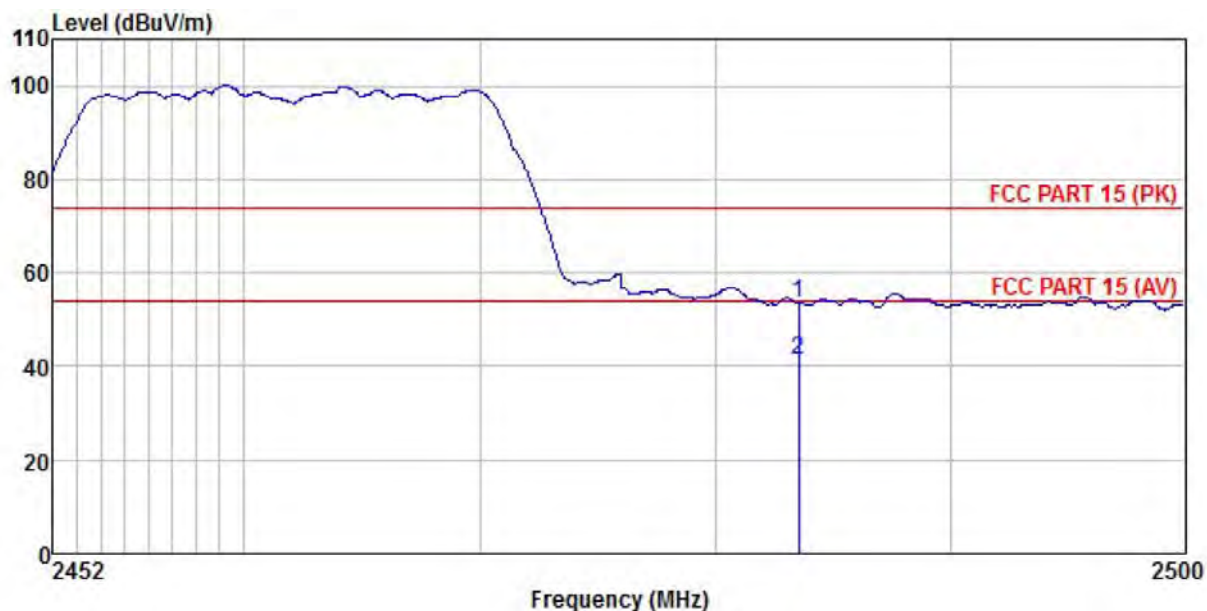


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	21.32	27.36	4.81	0.00	53.49	74.00	-20.51	Peak
2	2483.500	9.18	27.36	4.81	0.00	41.35	54.00	-12.65	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

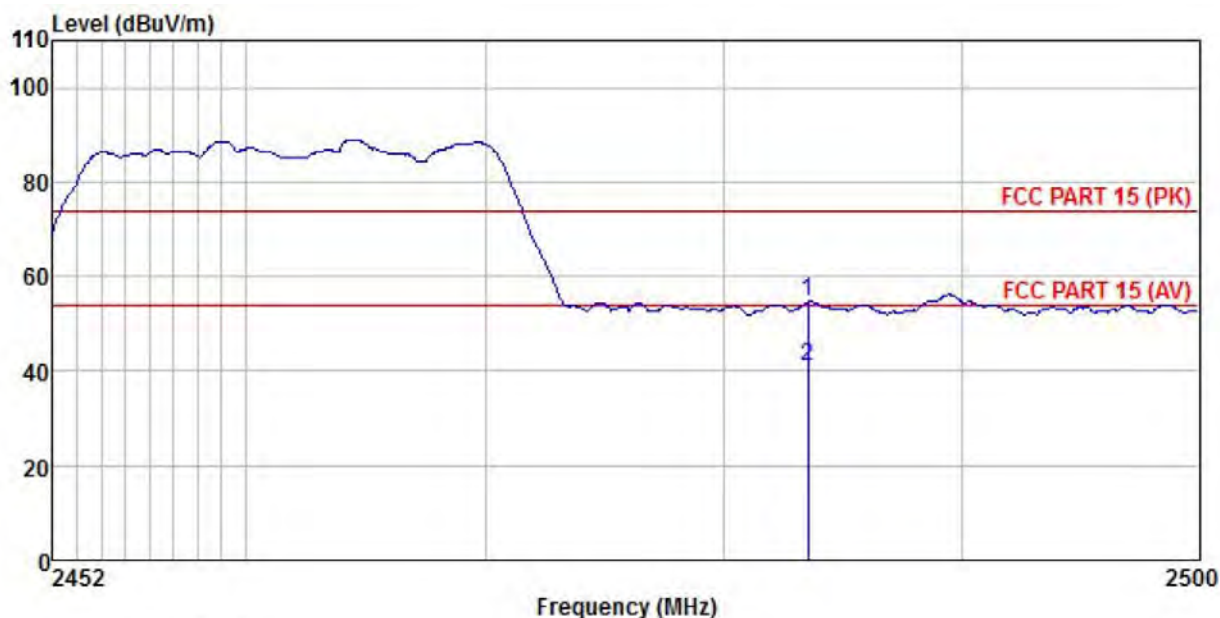


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	22.45	27.35	4.81	0.00	54.61	74.00	-19.39	Peak
2	2483.500	8.92	27.35	4.81	0.00	41.08	54.00	-12.92	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT40):

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

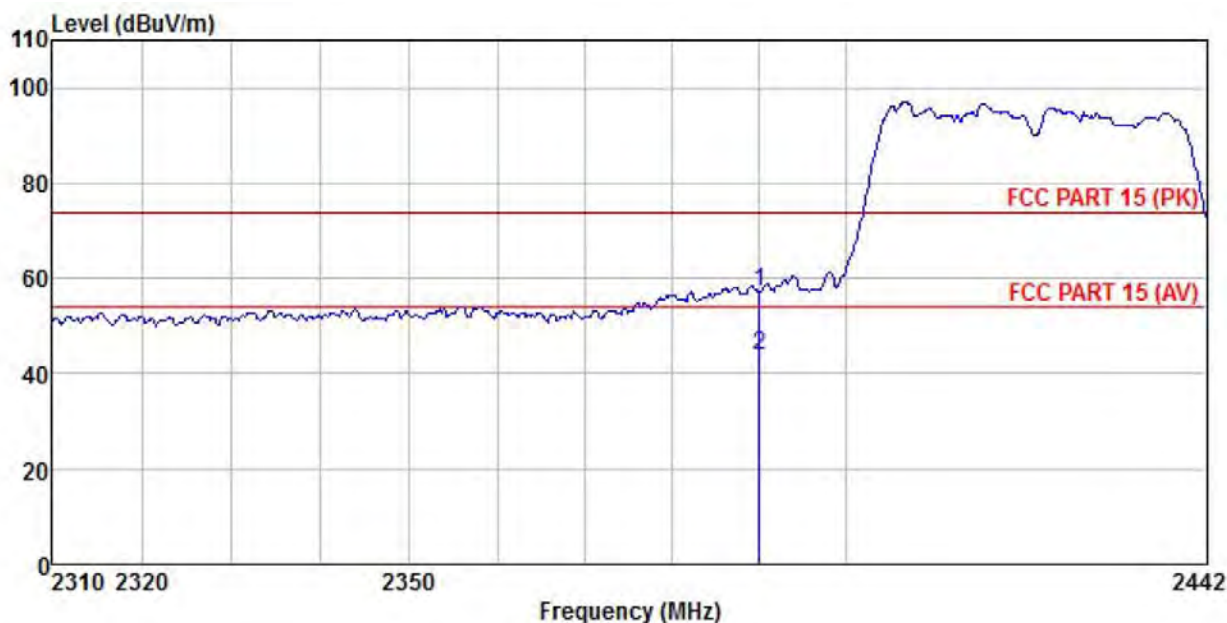


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	25.55	27.07	4.69	0.00	57.31	74.00	-16.69	Peak
2	2390.000	11.96	27.07	4.69	0.00	43.72	54.00	-10.28	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

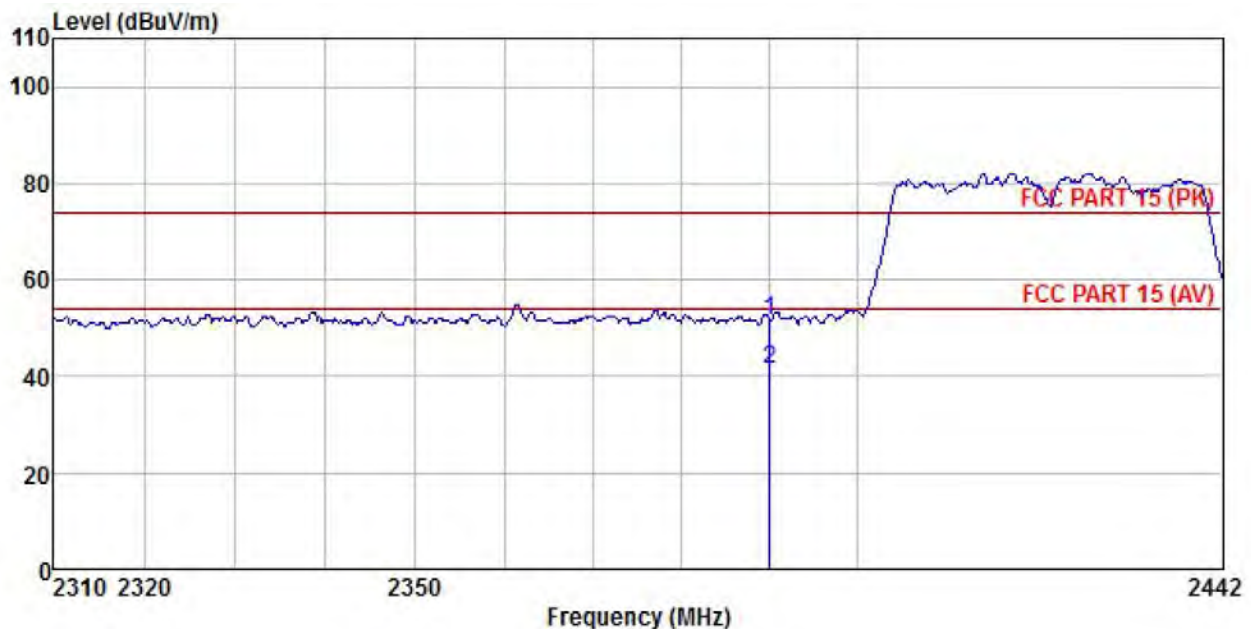


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.96	27.08	4.69	0.00	51.73	74.00	-22.27	Peak
2	2390.000	9.63	27.08	4.69	0.00	41.40	54.00	-12.60	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

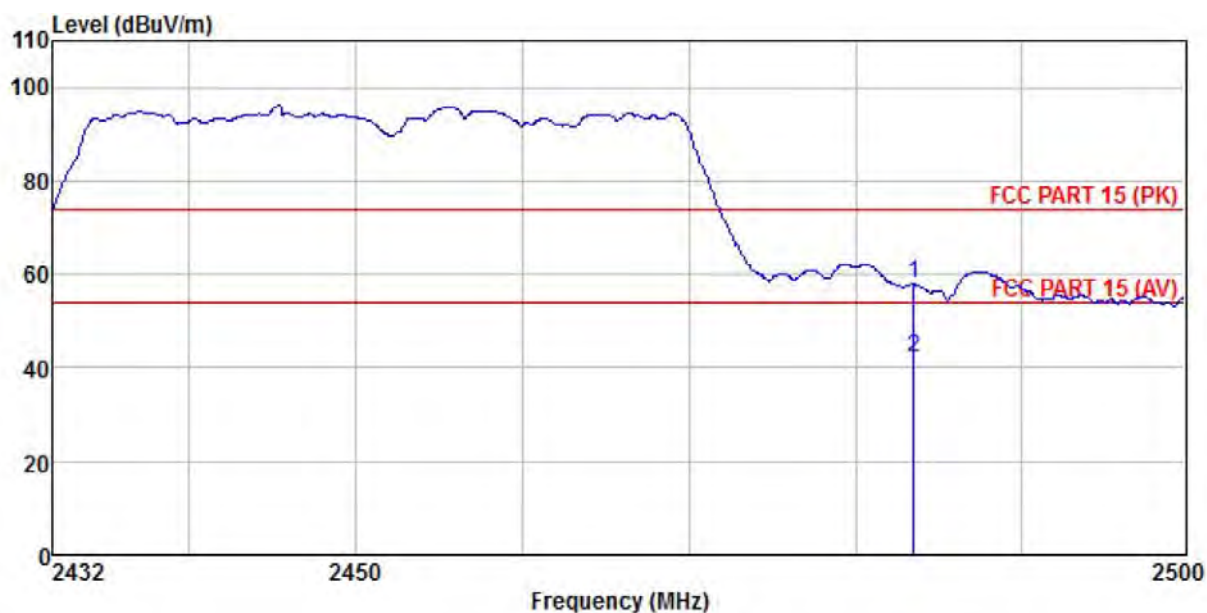


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	25.70	27.36	4.81	0.00	57.87	74.00	-16.13	Peak
2	2483.500	10.25	27.36	4.81	0.00	42.42	54.00	-11.58	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

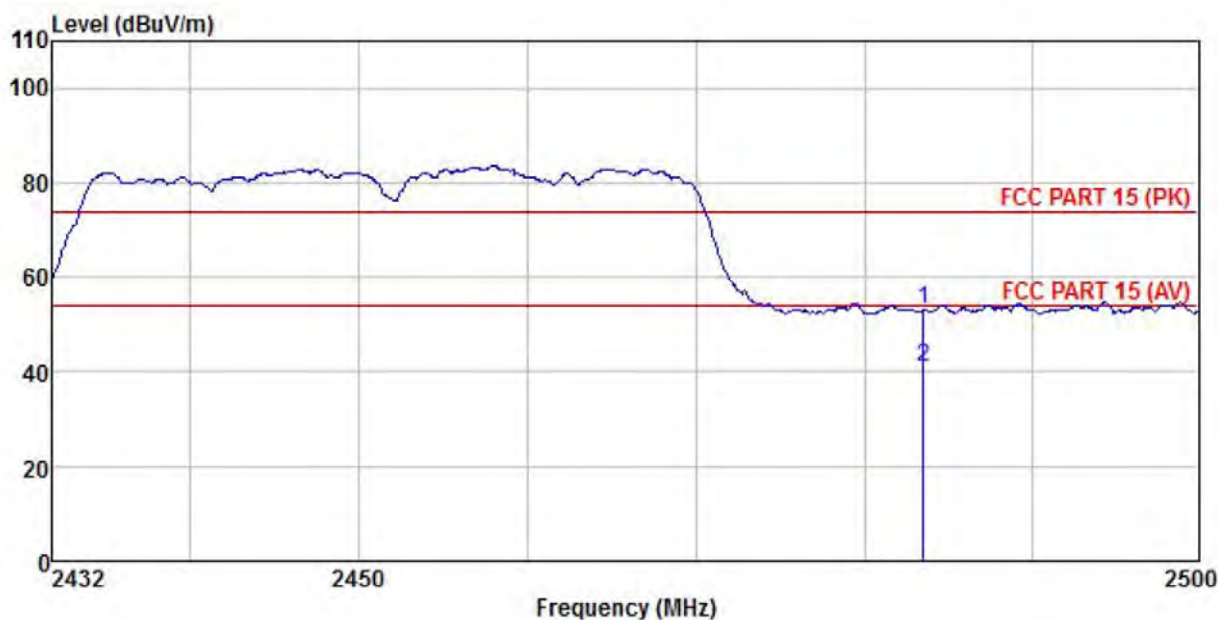


	Freq	ReadAntenna	Cable Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
							dB
1	2483.500	20.96	27.35	4.81	0.00	53.12	74.00
2	2483.500	8.90	27.35	4.81	0.00	41.06	54.00

Remark:


- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

6.7 Spurious Emission


6.7.1 Conducted Emission Method

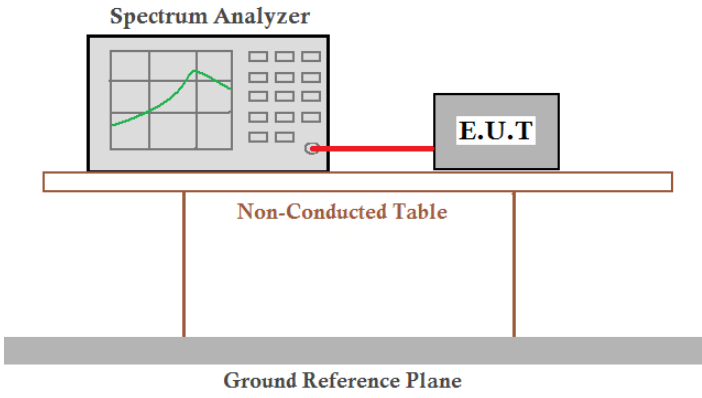Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	 The diagram illustrates the test setup for conducted emissions. A Spectrum Analyzer is connected to an Equipment Under Test (E.U.T.) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

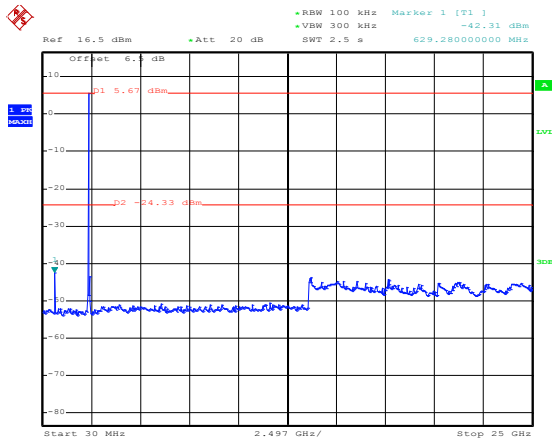
Test mode: 802.11b
Lowest channel

Date: 10.JAN.2020 08:19:16

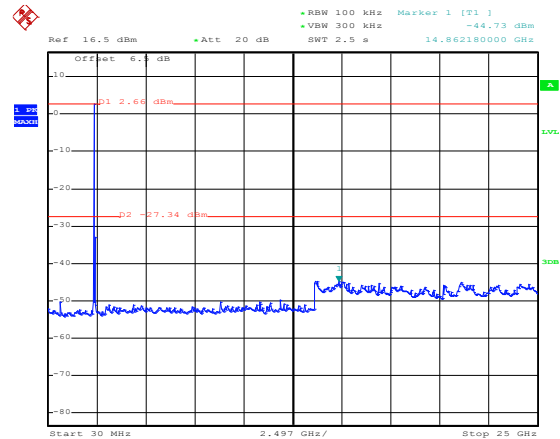Test mode: 802.11g
Lowest channel


Date: 10.JAN.2020 08:29:59

Middle channel

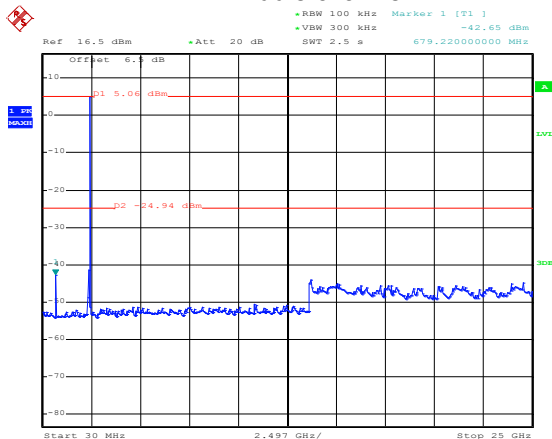


Date: 10.JAN.2020 08:20:31

Middle channel

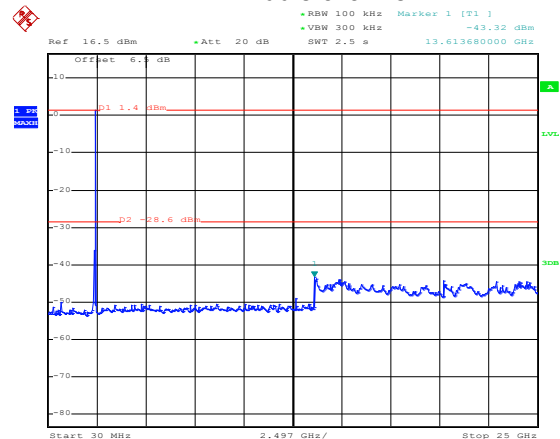


Date: 10.JAN.2020 08:27:16

Highest channel

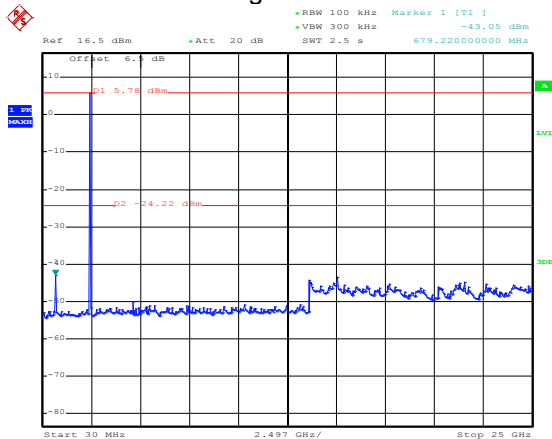

Date: 10.JAN.2020 08:21:33


Highest channel

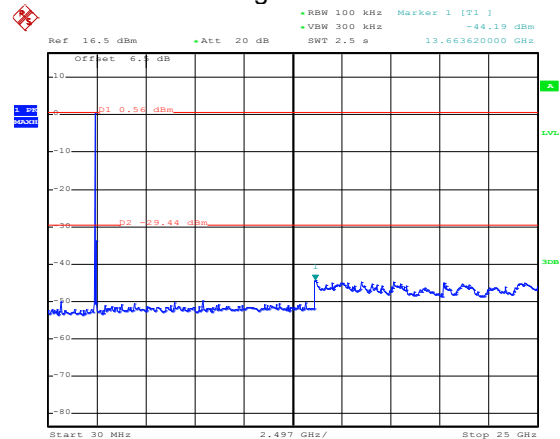

Date: 10.JAN.2020 08:23:47

Test mode: 802.11n(HT20)


Lowest channel

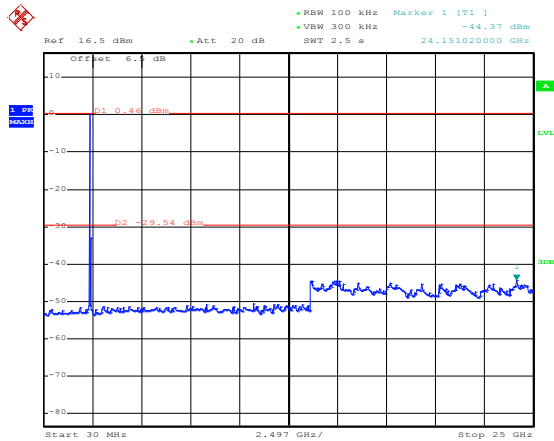

Date: 10.JAN.2020 08:32:18


Test mode: 802.11n(HT40)

Lowest channel

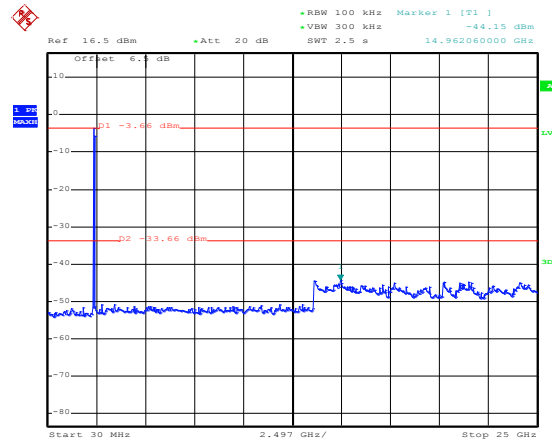


Date: 10.JAN.2020 08:35:59

Middle channel

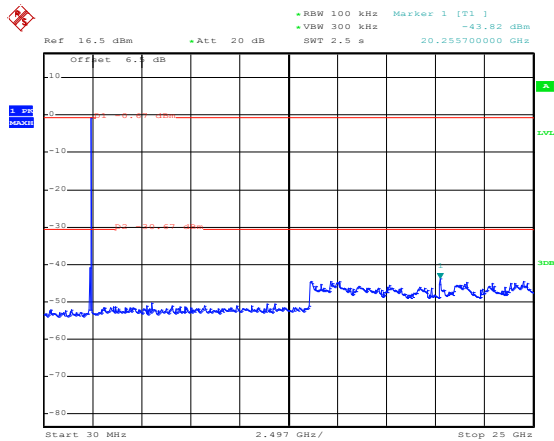


Date: 10.JAN.2020 08:33:39

Middle channel

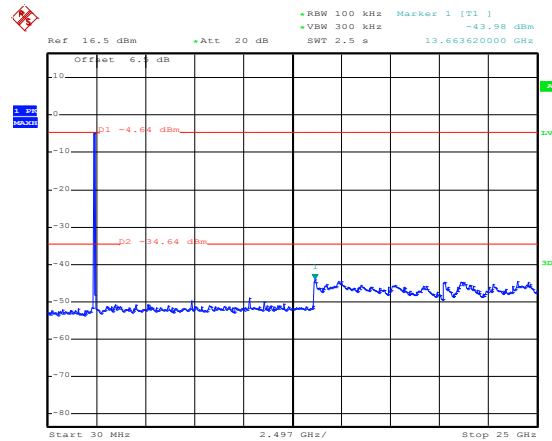


Date: 10.JAN.2020 08:39:04

Highest channel

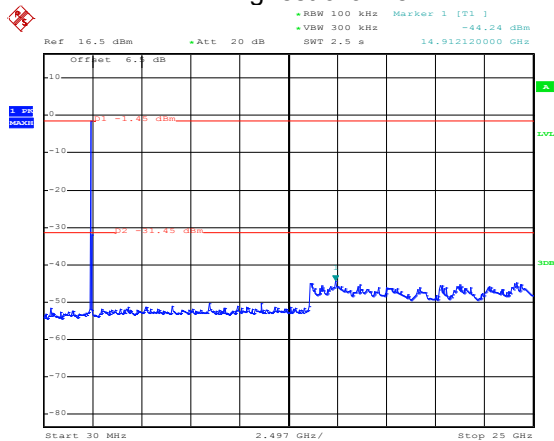


Date: 10.JAN.2020 08:34:33


Highest channel

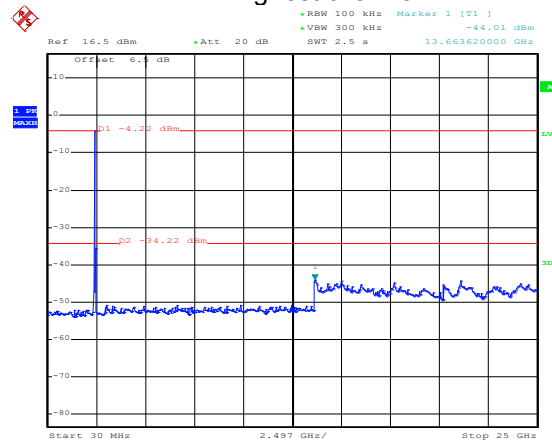

Date: 10.JAN.2020 08:40:42

6.7.2 Radiated Emission Method

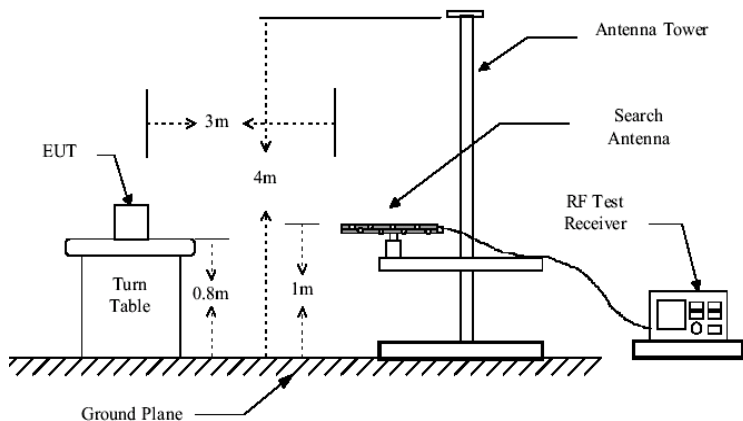
Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	9kHz to 25GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
RMS		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
74.0		Peak Value			
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:	Below 1GHz  Above 1GHz				

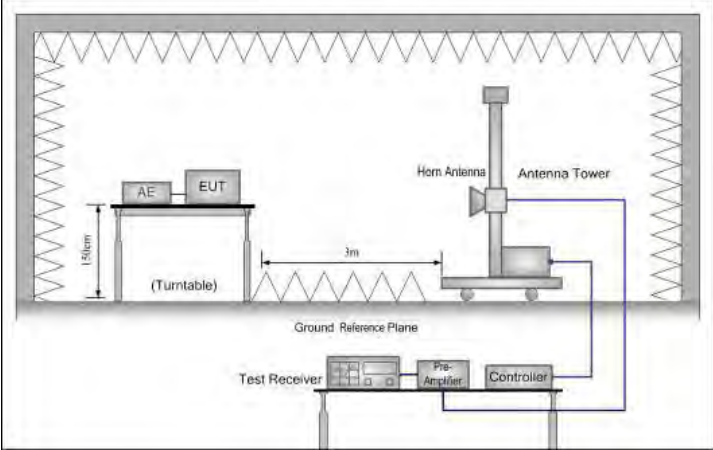	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case. 2. 9 kHz to 30MHz is lower than the limit 20dB, so only shows the data of above 30MHz in this report.

Measurement Data (worst case):

Below 1GHz:

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

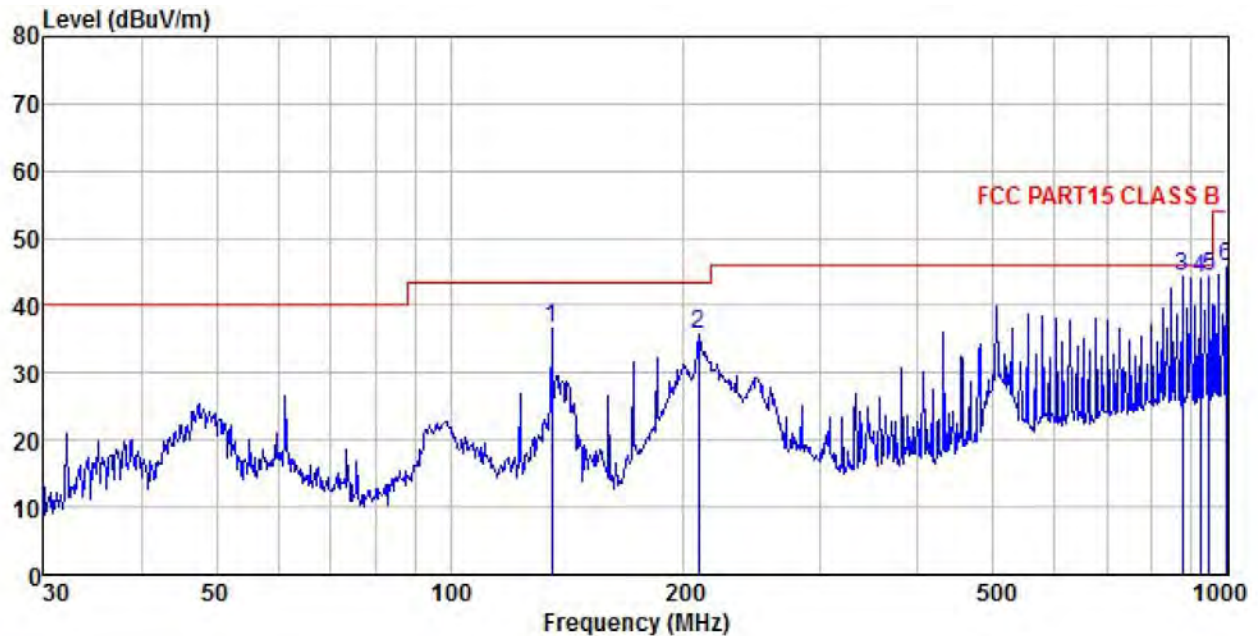


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	dBuV/m	dBuV/m	dB
1	135.032	53.72	9.84	2.34	0.00	29.30	36.60	43.50	-6.90 QP
2	208.580	50.78	11.00	2.86	0.00	28.78	35.86	43.50	-7.64 QP
3	875.247	45.75	22.55	3.95	0.00	27.94	44.31	46.00	-1.69 QP
4	922.516	45.24	22.59	3.94	0.00	27.81	43.96	46.00	-2.04 QP
5	948.761	45.17	22.68	4.20	0.00	27.73	44.32	46.00	-1.68 QP
6	996.500	45.94	22.79	4.45	0.00	27.45	45.73	54.00	-8.27 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

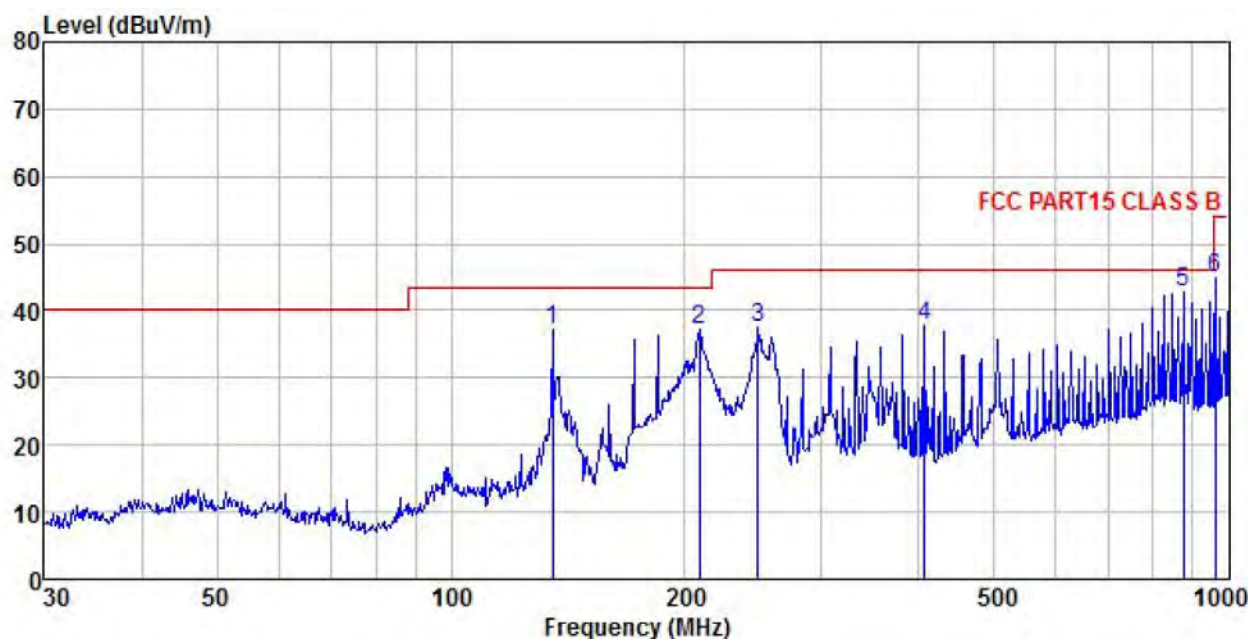


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Level	Line	Limit
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	135.032	54.35	9.84	2.34	0.00	29.30	37.23	43.50	-6.27 QP
2	208.580	52.26	11.00	2.86	0.00	28.78	37.34	43.50	-6.16 QP
3	248.552	50.65	12.62	2.81	0.00	28.55	37.53	46.00	-8.47 QP
4	406.088	47.98	15.43	3.09	0.00	28.79	37.71	46.00	-8.29 QP
5	875.247	44.11	22.55	3.95	0.00	27.94	42.67	46.00	-3.33 QP
6	962.162	45.52	22.73	4.27	0.00	27.65	44.87	54.00	-9.13 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-AC
Test By:	Mike	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

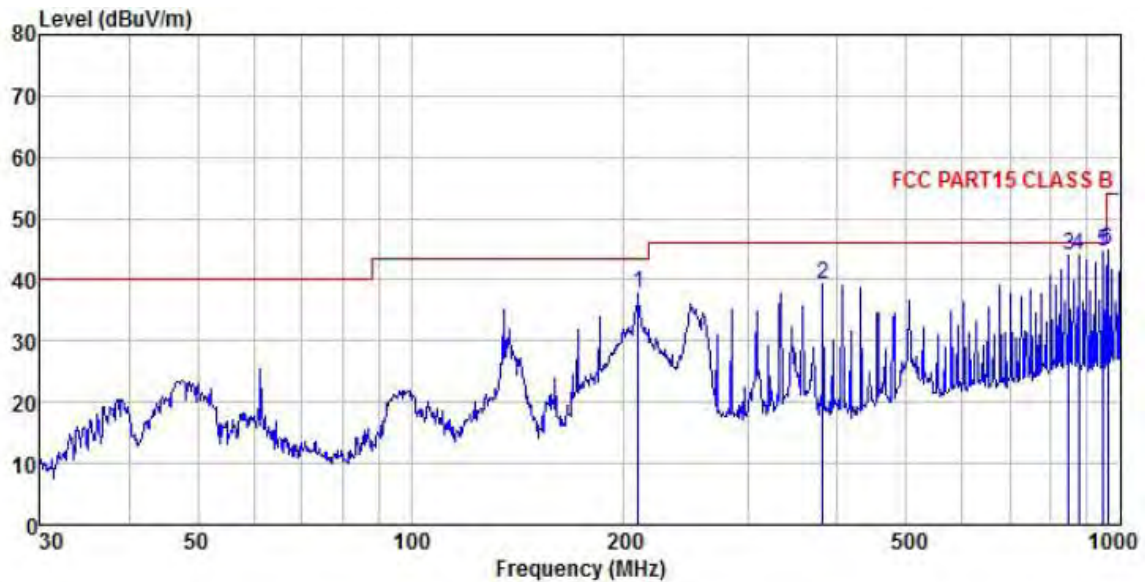


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	209.313	52.59	11.04	2.86	0.00	28.77	37.72	43.50	-5.78 QP
2	381.249	49.87	15.04	3.09	0.00	28.70	39.30	46.00	-6.70 QP
3	848.056	45.14	22.60	4.20	0.00	28.01	43.93	46.00	-2.07 QP
4	875.247	45.28	22.55	3.95	0.00	27.94	43.84	46.00	-2.16 QP
5	948.761	45.51	22.68	4.20	0.00	27.73	44.66	46.00	-1.34 QP
6	962.162	45.53	22.73	4.27	0.00	27.65	44.88	54.00	-9.12 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-AC
Test By:	Mike	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

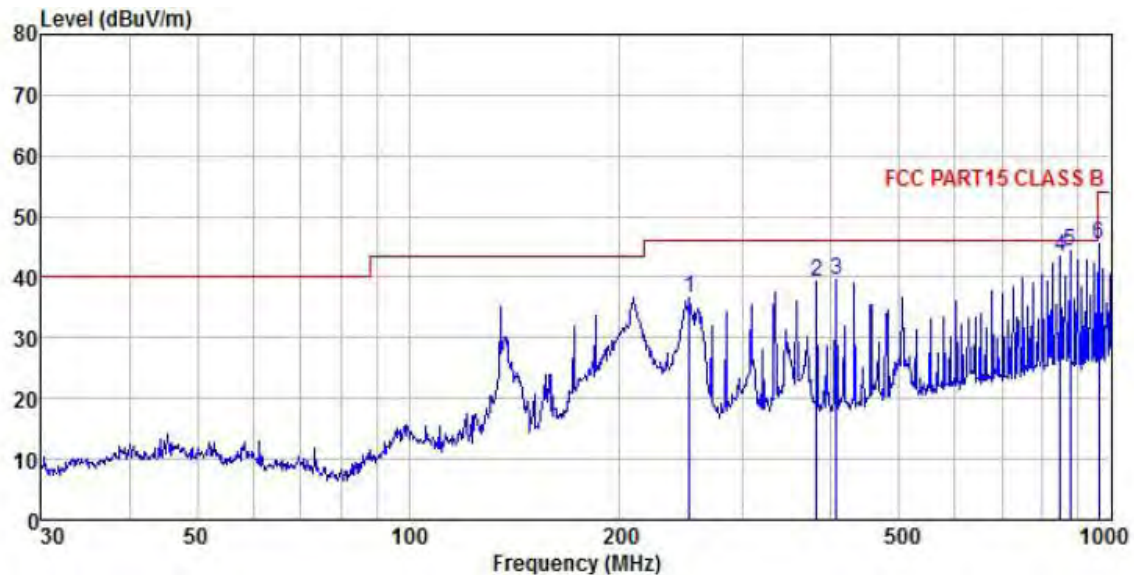

	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	251.180	49.73	12.72	2.81	0.00	28.54	36.72	46.00	-9.28 QP
2	381.249	49.82	15.04	3.09	0.00	28.70	39.25	46.00	-6.75 QP
3	406.088	49.78	15.43	3.09	0.00	28.79	39.51	46.00	-6.49 QP
4	848.056	44.57	22.60	4.20	0.00	28.01	43.36	46.00	-2.64 QP
5	875.247	45.82	22.55	3.95	0.00	27.94	44.38	46.00	-1.62 QP
6	962.162	46.17	22.73	4.27	0.00	27.65	45.52	54.00	-8.48 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Above 1GHz

PCB antenna:

802.11b									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	47.73	31.06	6.81	2.46	41.82	46.24	74.00	-27.76	Vertical
4824.00	47.46	31.06	6.81	2.46	41.82	45.97	74.00	-28.03	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	35.53	31.06	6.81	2.46	41.82	34.04	54.00	-19.96	Vertical
4824.00	38.11	31.06	6.81	2.46	41.82	36.62	54.00	-17.38	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.48	31.16	6.85	2.47	41.84	46.12	74.00	-27.88	Vertical
4874.00	47.88	31.16	6.85	2.47	41.84	46.52	74.00	-27.48	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	35.72	31.16	6.85	2.47	41.84	34.36	54.00	-19.64	Vertical
4874.00	37.72	31.16	6.85	2.47	41.84	36.36	54.00	-17.64	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	47.90	31.25	6.89	2.48	41.86	46.66	74.00	-27.34	Vertical
4924.00	48.14	31.25	6.89	2.48	41.86	46.90	74.00	-27.10	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	35.24	31.25	6.89	2.48	41.86	34.00	54.00	-20.00	Vertical
4924.00	37.46	31.25	6.89	2.48	41.86	36.22	54.00	-17.78	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11g									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	47.54	31.06	6.81	2.46	41.82	46.05	74.00	-27.95	Vertical
4824.00	47.26	31.06	6.81	2.46	41.82	45.77	74.00	-28.23	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	35.10	31.06	6.81	2.46	41.82	33.61	54.00	-20.39	Vertical
4824.00	38.41	31.06	6.81	2.46	41.82	36.92	54.00	-17.08	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.33	31.16	6.85	2.47	41.84	45.97	74.00	-28.03	Vertical
4874.00	48.16	31.16	6.85	2.47	41.84	46.80	74.00	-27.20	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	35.99	31.16	6.85	2.47	41.84	34.63	54.00	-19.37	Vertical
4874.00	37.26	31.16	6.85	2.47	41.84	35.90	54.00	-18.10	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	47.81	31.25	6.89	2.48	41.86	46.57	74.00	-27.43	Vertical
4924.00	48.38	31.25	6.89	2.48	41.86	47.14	74.00	-26.86	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	35.22	31.25	6.89	2.48	41.86	33.98	54.00	-20.02	Vertical
4924.00	37.52	31.25	6.89	2.48	41.86	36.28	54.00	-17.72	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11n(HT20)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	47.41	31.06	6.81	2.46	41.82	45.92	74.00	-28.08	Vertical
4824.00	46.90	31.06	6.81	2.46	41.82	45.41	74.00	-28.59	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	34.70	31.06	6.81	2.46	41.82	33.21	54.00	-20.79	Vertical
4824.00	38.89	31.06	6.81	2.46	41.82	37.40	54.00	-16.60	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.52	31.16	6.85	2.47	41.84	46.16	74.00	-27.84	Vertical
4874.00	46.94	31.16	6.85	2.47	41.84	45.58	74.00	-28.42	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	34.20	31.16	6.85	2.47	41.84	32.84	54.00	-21.16	Vertical
4874.00	38.81	31.16	6.85	2.47	41.84	37.45	54.00	-16.55	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	47.87	31.25	6.89	2.48	41.86	46.63	74.00	-27.37	Vertical
4924.00	47.40	31.25	6.89	2.48	41.86	46.16	74.00	-27.84	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	34.60	31.25	6.89	2.48	41.86	33.36	54.00	-20.64	Vertical
4924.00	38.43	31.25	6.89	2.48	41.86	37.19	54.00	-16.81	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11n(HT40)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	47.03	31.10	6.83	2.46	41.83	45.59	74.00	-28.41	Vertical
4844.00	46.80	31.10	6.83	2.46	41.83	45.36	74.00	-28.64	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	35.03	31.10	6.83	2.46	41.83	33.59	54.00	-20.41	Vertical
4844.00	38.98	31.10	6.83	2.46	41.83	37.54	54.00	-16.46	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.32	31.16	6.85	2.47	41.84	45.96	74.00	-28.04	Vertical
4874.00	46.30	31.16	6.85	2.47	41.84	44.94	74.00	-29.06	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	35.42	31.16	6.85	2.47	41.84	34.06	54.00	-19.94	Vertical
4874.00	38.96	31.16	6.85	2.47	41.84	37.60	54.00	-16.40	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	47.74	31.22	6.87	2.48	41.85	46.46	74.00	-27.54	Vertical
4904.00	46.08	31.22	6.87	2.48	41.85	44.80	74.00	-29.20	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	35.60	31.22	6.87	2.48	41.85	34.32	54.00	-19.68	Vertical
4904.00	38.51	31.22	6.87	2.48	41.85	37.23	54.00	-16.77	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

Rod antenna:

802.11b									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	49.10	31.06	6.81	2.46	41.82	47.61	74.00	-26.39	Vertical
4824.00	48.78	31.06	6.81	2.46	41.82	47.29	74.00	-26.71	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	39.86	31.06	6.81	2.46	41.82	38.37	54.00	-15.63	Vertical
4824.00	38.67	31.06	6.81	2.46	41.82	37.18	54.00	-16.82	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.36	31.16	6.85	2.47	41.84	48.00	74.00	-26.00	Vertical
4874.00	48.97	31.16	6.85	2.47	41.84	47.61	74.00	-26.39	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	39.82	31.16	6.85	2.47	41.84	38.46	54.00	-15.54	Vertical
4874.00	39.05	31.16	6.85	2.47	41.84	37.69	54.00	-16.31	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	49.35	31.25	6.89	2.48	41.86	48.11	74.00	-25.89	Vertical
4924.00	49.43	31.25	6.89	2.48	41.86	48.19	74.00	-25.81	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	39.64	31.25	6.89	2.48	41.86	38.40	54.00	-15.60	Vertical
4924.00	39.30	31.25	6.89	2.48	41.86	38.06	54.00	-15.94	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11g									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.67	31.06	6.81	2.46	41.82	47.18	74.00	-26.82	Vertical
4824.00	49.17	31.06	6.81	2.46	41.82	47.68	74.00	-26.32	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	39.80	31.06	6.81	2.46	41.82	38.31	54.00	-15.69	Vertical
4824.00	38.80	31.06	6.81	2.46	41.82	37.31	54.00	-16.69	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.63	31.16	6.85	2.47	41.84	47.27	74.00	-26.73	Vertical
4874.00	49.12	31.16	6.85	2.47	41.84	47.76	74.00	-26.24	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	39.52	31.16	6.85	2.47	41.84	38.16	54.00	-15.84	Vertical
4874.00	39.26	31.16	6.85	2.47	41.84	37.90	54.00	-16.10	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.89	31.25	6.89	2.48	41.86	47.65	74.00	-26.35	Vertical
4924.00	48.80	31.25	6.89	2.48	41.86	47.56	74.00	-26.44	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	39.73	31.25	6.89	2.48	41.86	38.49	54.00	-15.51	Vertical
4924.00	39.74	31.25	6.89	2.48	41.86	38.50	54.00	-15.50	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11n(HT20)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.52	31.06	6.81	2.46	41.82	47.03	74.00	-26.97	Vertical
4824.00	48.79	31.06	6.81	2.46	41.82	47.30	74.00	-26.70	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	39.57	31.06	6.81	2.46	41.82	38.08	54.00	-15.92	Vertical
4824.00	38.45	31.06	6.81	2.46	41.82	36.96	54.00	-17.04	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.62	31.16	6.85	2.47	41.84	47.26	74.00	-26.74	Vertical
4874.00	49.07	31.16	6.85	2.47	41.84	47.71	74.00	-26.29	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	39.90	31.16	6.85	2.47	41.84	38.54	54.00	-15.46	Vertical
4874.00	39.08	31.16	6.85	2.47	41.84	37.72	54.00	-16.28	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.67	31.25	6.89	2.48	41.86	47.43	74.00	-26.57	Vertical
4924.00	48.91	31.25	6.89	2.48	41.86	47.67	74.00	-26.33	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	39.58	31.25	6.89	2.48	41.86	38.34	54.00	-15.66	Vertical
4924.00	39.67	31.25	6.89	2.48	41.86	38.43	54.00	-15.57	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11n(HT40)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	48.21	31.10	6.83	2.46	41.83	46.77	74.00	-27.23	Vertical
4844.00	48.59	31.10	6.83	2.46	41.83	47.15	74.00	-26.85	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	39.31	31.10	6.83	2.46	41.83	37.87	54.00	-16.13	Vertical
4844.00	38.41	31.10	6.83	2.46	41.83	36.97	54.00	-17.03	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.05	31.16	6.85	2.47	41.84	47.69	74.00	-26.31	Vertical
4874.00	48.78	31.16	6.85	2.47	41.84	47.42	74.00	-26.58	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	39.85	31.16	6.85	2.47	41.84	38.49	54.00	-15.51	Vertical
4874.00	39.05	31.16	6.85	2.47	41.84	37.69	54.00	-16.31	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	49.01	31.22	6.87	2.48	41.85	47.73	74.00	-26.27	Vertical
4904.00	48.44	31.22	6.87	2.48	41.85	47.16	74.00	-26.84	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	40.02	31.22	6.87	2.48	41.85	38.74	54.00	-15.26	Vertical
4904.00	39.67	31.22	6.87	2.48	41.85	38.39	54.00	-15.61	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									