

FCC REPORT

(WIFI)

Applicant: Libre Wireless Technologies, Inc.

Address of Applicant: 2100 Geng Road, Suite 210, Palo Alto, CA 94303, USA

Equipment Under Test (EUT)

Product Name: WiFi Media Streaming Module

Model No.: LS9X-AC11DBT-C, LS9X-AC11DBT-AC

Trade mark:



FCC ID: 2ADBM-LS9X-AC11DBT

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 23 Sep., 2020

Date of Test: 24 Sep., to 02 Nov., 2020

Date of report issued: 03 Nov., 2020

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	03 Nov., 2020	Original

Remark:
This report was amended on FCC ID: 2ADBM-LS9X-AC11DBT follow FCC Class II Permissive Change. The differences between them as below: Add new antenna. So the Conducted Emission, Radiated Emission re-test.

Tested by:



Test Engineer

Date:

03 Nov., 2020

Reviewed by:



Project Engineer

Date:

03 Nov., 2020

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND TEST MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD.....	6
5.7 LABORATORY FACILITY.....	7
5.8 LABORATORY LOCATION	7
5.9 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA	8
6.1 ANTENNA REQUIREMENT	8
6.2 CONDUCTED EMISSION	9
6.3 CONDUCTED OUTPUT POWER	14
6.4 OCCUPY BANDWIDTH	15
6.5 POWER SPECTRAL DENSITY	16
6.6 BAND EDGE	17
6.6.1 Conducted Emission Method.....	17
6.6.2 Radiated Emission Method.....	18
6.7 SPURIOUS EMISSION.....	51
6.7.1 Conducted Emission Method.....	51
6.7.2 Radiated Emission Method.....	52
7 TEST SETUP PHOTO	66
8 EUT CONSTRUCTIONAL DETAILS	67

4 Test Summary

Test Items	Section in CFR 47	Result
Antenna requirement	15.203 & 15.247 (b)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass*
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Pass*
Power Spectral Density	15.247 (e)	Pass*
Band Edge	15.247 (d)	Pass
Spurious Emission	15.205 & 15.209	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer). 4. Pass*: refer to the FCC ID: 2ADBM-LS9X-AC11DBT, Report No.: CCISE200101803.		
Test Method:	ANSI C63.4-2014 ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02	

5 General Information

5.1 Client Information

Applicant:	Libre Wireless Technologies, Inc.
Address:	2100 Geng Road, Suite 210, Palo Alto, CA 94303, USA
Manufacturer:	Libre Wireless Technologies, Inc.
Address:	2100 Geng Road, Suite 210, Palo Alto, CA 94303, USA

5.2 General Description of E.U.T.

Product Name:	WiFi Media Streaming Module
Model No.:	LS9X-AC11DBT-C, LS9X-AC11DBT-AC
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2452MHz (802.11n(HT40))
Channel numbers:	11 for 802.11b/802.11g/802.11(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	PIFA Antenna, PCB Antenna
Antenna gain:	PIFA antenna: 3.0 dBi PCB antenna: 3.0 dBi
Power supply:	DC 3.3V
Remark:	WiFi Media Streaming Module part number LS9X-AC11DBT-AC is a variant product of LS9X-AC11DBT-C. The difference between the variant models is DDR3 memory size, LS9X-AC11DBT-C DDR3 memory size is 256MB while the LS9X-AC11DBT-AC DDR3 memory size is 512MB. The circuit principle and all remaining components are the same.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel for 802.11b/g/n(HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Note: 1. For 802.11n-HT40 mode, the channel number is from 3 to 9; 2. Channel 1, 6 & 11 selected for 802.11b/g/n-HT20 as Lowest, Middle and Highest channel. Channel 3, 6 & 9 selected for 802.11n-HT40 as Lowest, Middle and Highest Channel.							

5.3 Test environment and test mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
Remark:	Conducted Emission and Radiated Emission below 1GHz pre-scan PCB Antenna and PIFA Antenna, found PIFA Antenna was worse case mode, the report only reflects the worst mode.
Radiated Emission: The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate, the follow list were the worst case.	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13.5Mbps

5.4 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
LENOVO	Laptop	SL510	2847A65	DoC
MERCURY	Wireless router	MW150R	12922104015	FCC ID
Libre	Test suite	WL-AM01B-7620A-TEST-V3.0	/	/

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.20 dB (k=2)

5.6 Additions to, deviations, or exclusions from the method

No

5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.9 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2020	07-21-2021
Loop Antenna	SCHWARZBECK	FMZB1519B	044	03-07-2020	03-06-2021
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2020	06-21-2021
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2019	11-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2019	11-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2020	03-06-2021
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		


Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-05-2020	03-04-2021
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-05-2020	03-04-2021
LISN	CHASE	MN2050D	1447	03-05-2020	03-04-2021
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2020	07-20-2021
Cable	HP	10503A	N/A	03-05-2020	03-04-2021
EMI Test Software	AUDIX	E3	Version: 6.110919b		

6 Test results and Measurement Data

6.1 Antenna requirement


Standard requirement:	FCC Part 15 C Section 15.203 /247(b)						
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.							
E.U.T Antenna:							
<i>The product is a professionally installed device which has two types of antennas for the application. The antennas information as below table:</i> <table border="1"> <thead> <tr> <th>Antenna Type</th><th>Antenna Gain(dBi)</th></tr> </thead> <tbody> <tr> <td>PIFAAntenna</td><td>3.00</td></tr> <tr> <td>PCB Antenna</td><td>3.00</td></tr> </tbody> </table> <i>According to above information, the antennas meet the requirements of this section</i>		Antenna Type	Antenna Gain(dBi)	PIFAAntenna	3.00	PCB Antenna	3.00
Antenna Type	Antenna Gain(dBi)						
PIFAAntenna	3.00						
PCB Antenna	3.00						

6.2 Conducted Emission

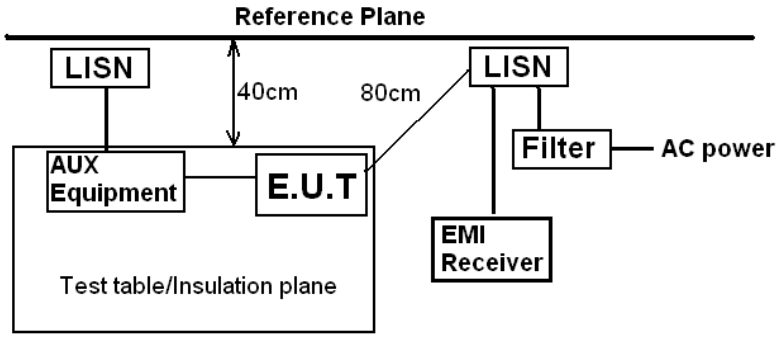Test Requirement:	FCC Part 15 C Section 15.207		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	- The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment. - The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). - Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10(latest version) on conducted measurement.		
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.9 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

Measurement Data:

Product name:	WiFi Media Streaming Module	Product model:	LS9X-AC11DBT-C
Test by:	Mike	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5℃ Humi: 55%

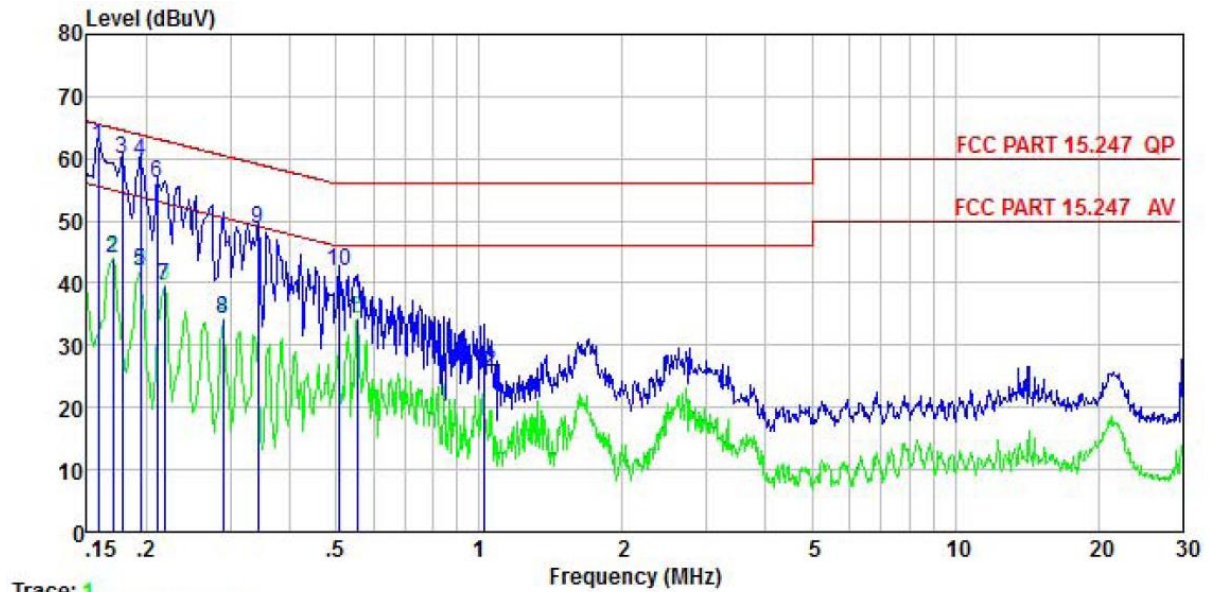


	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.158	51.91	-0.57	-0.07	10.77	62.04	65.56	-3.52	QP
2	0.170	33.87	-0.58	-0.10	10.77	43.96	54.94	-10.98	Average
3	0.178	49.89	-0.58	-0.12	10.77	59.96	64.59	-4.63	QP
4	0.194	49.70	-0.59	-0.15	10.76	59.72	63.84	-4.12	QP
5	0.194	31.82	-0.59	-0.15	10.76	41.84	53.84	-12.00	Average
6	0.211	45.95	-0.58	-0.17	10.76	55.96	63.18	-7.22	QP
7	0.219	29.41	-0.58	-0.18	10.76	39.41	52.88	-13.47	Average
8	0.289	24.33	-0.55	-0.25	10.74	34.27	50.54	-16.27	Average
9	0.343	38.29	-0.52	0.06	10.73	48.56	59.13	-10.57	QP
10	0.510	31.85	-0.44	-0.35	10.76	41.82	56.00	-14.18	QP
11	0.555	24.23	-0.46	-0.37	10.76	34.16	46.00	-11.84	Average
12	1.021	14.94	-0.62	0.44	10.87	25.63	46.00	-20.37	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	WiFi Media Streaming Module	Product model:	LS9X-AC11DBT-C
Test by:	Mike	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

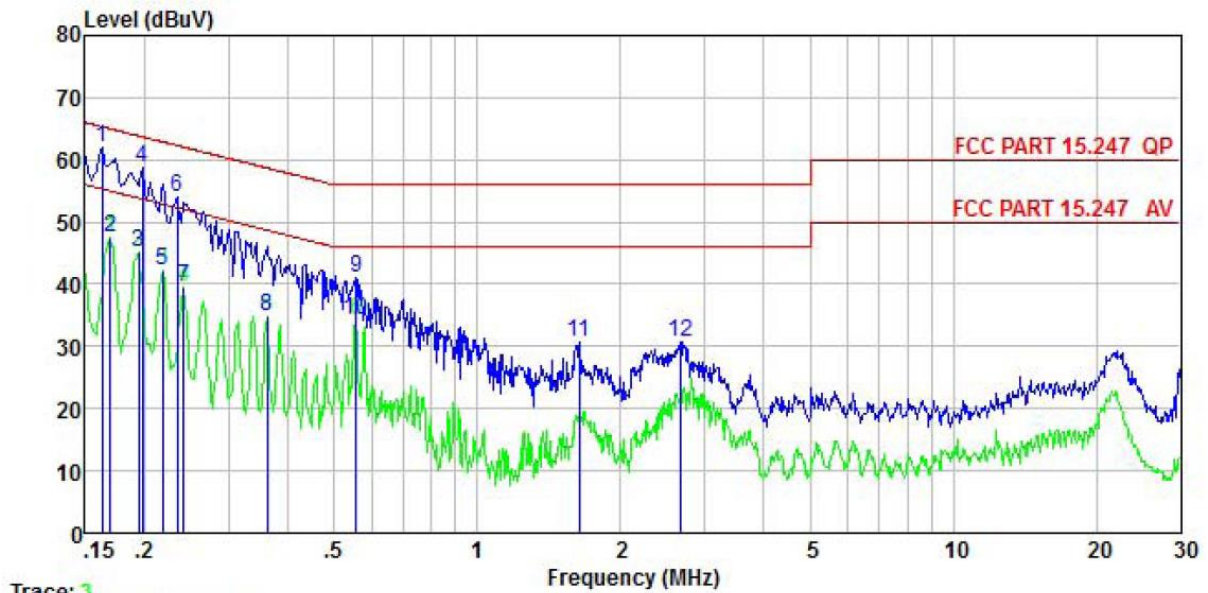


	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	51.99	-0.68	0.01	10.77	62.09	65.34	-3.25	QP
2	0.169	37.55	-0.68	0.01	10.77	47.65	54.99	-7.34	Average
3	0.194	34.94	-0.67	0.00	10.76	45.03	53.84	-8.81	Average
4	0.198	48.59	-0.67	0.00	10.76	58.68	63.71	-5.03	QP
5	0.219	32.05	-0.67	0.00	10.76	42.14	52.88	-10.74	Average
6	0.234	43.86	-0.67	0.00	10.75	53.94	62.30	-8.36	QP
7	0.242	29.46	-0.67	0.00	10.75	39.54	52.04	-12.50	Average
8	0.361	24.88	-0.64	-0.03	10.73	34.94	48.69	-13.75	Average
9	0.555	31.01	-0.65	0.03	10.76	41.15	56.00	-14.85	QP
10	0.555	23.98	-0.65	0.03	10.76	34.12	46.00	-11.88	Average
11	1.636	20.43	-0.70	0.14	10.93	30.80	56.00	-25.20	QP
12	2.664	20.25	-0.67	0.27	10.93	30.78	56.00	-25.22	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	WiFi Media Streaming Module	Product model:	LS9X-AC11DBT-AC
Test by:	Mike	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

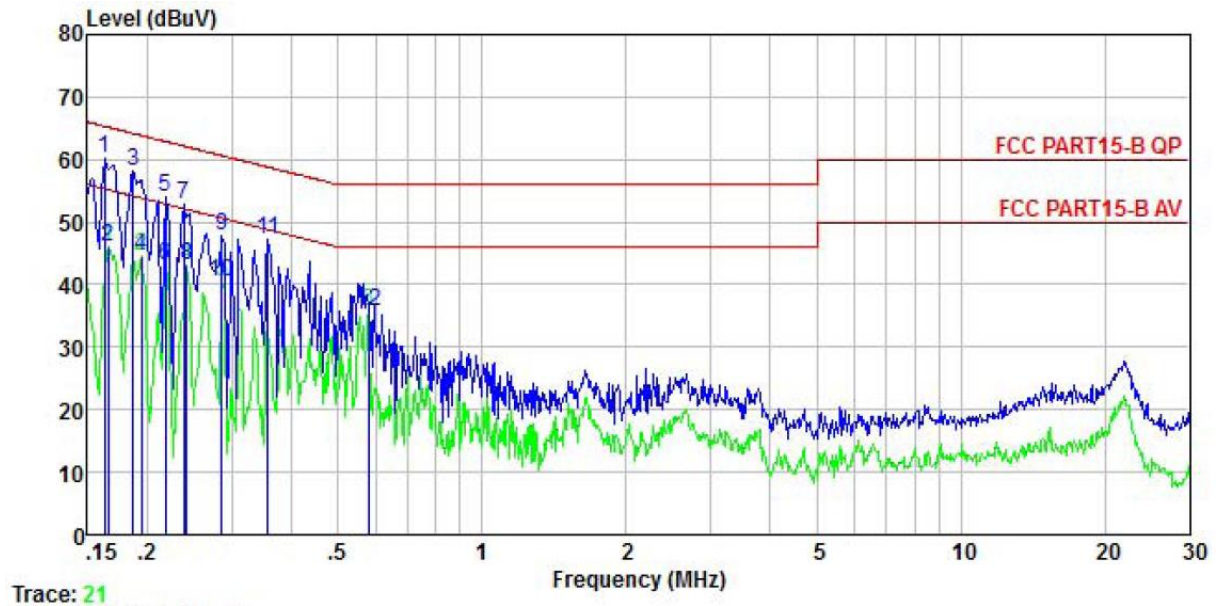


	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	50.23	-0.58	-0.08	10.77	60.34	65.34	-5.00	QP
2	0.166	36.00	-0.58	-0.09	10.77	46.10	55.16	-9.06	Average
3	0.186	48.24	-0.59	-0.13	10.76	58.28	64.20	-5.92	QP
4	0.194	34.58	-0.59	-0.15	10.76	44.60	53.84	-9.24	Average
5	0.219	44.02	-0.58	-0.18	10.76	54.02	62.88	-8.86	QP
6	0.219	33.21	-0.58	-0.18	10.76	43.21	52.88	-9.67	Average
7	0.238	42.95	-0.57	-0.20	10.75	52.93	62.17	-9.24	QP
8	0.242	33.21	-0.57	-0.21	10.75	43.18	52.04	-8.86	Average
9	0.286	37.74	-0.55	-0.25	10.74	47.68	60.63	-12.95	QP
10	0.286	30.63	-0.55	-0.25	10.74	40.57	50.63	-10.06	Average
11	0.358	36.77	-0.51	0.16	10.73	47.15	58.78	-11.63	QP
12	0.579	25.90	-0.47	-0.37	10.76	35.82	46.00	-10.18	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	WiFi Media Streaming Module	Product model:	LS9X-AC11DBT-AC
Test by:	Mike	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5℃ Humi: 55%

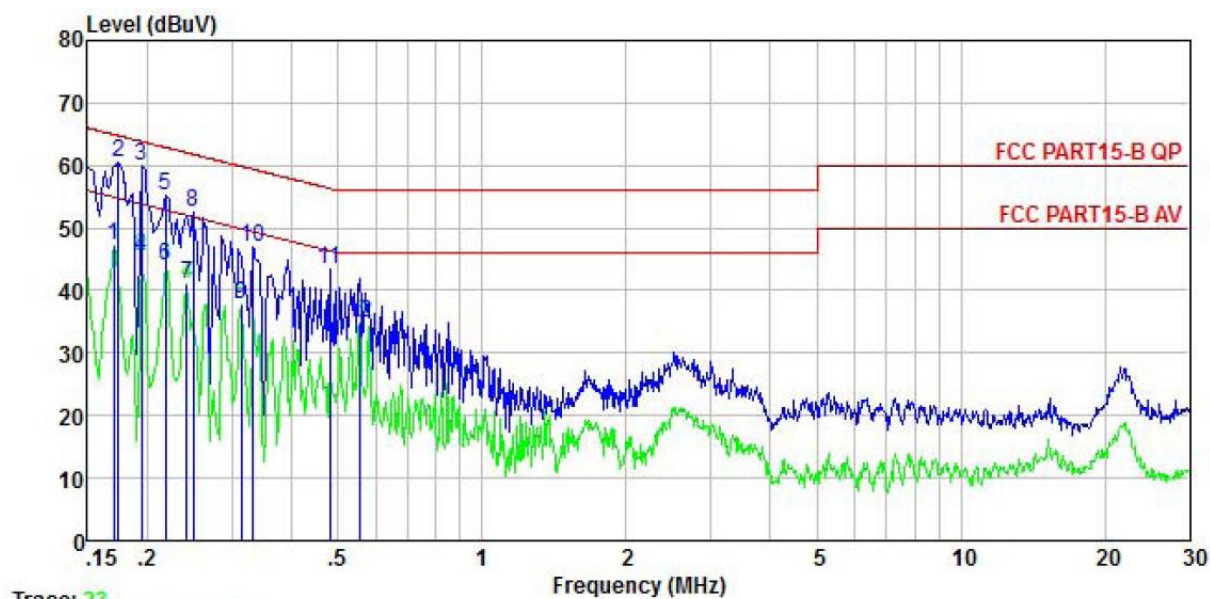


	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.170	37.08	-0.68	0.01	10.77	47.18	54.94	-7.76	Average
2	0.174	50.35	-0.68	0.00	10.77	60.44	64.77	-4.33	QP
3	0.194	49.92	-0.67	0.00	10.76	60.01	63.84	-3.83	QP
4	0.194	35.24	-0.67	0.00	10.76	45.33	53.84	-8.51	Average
5	0.219	44.98	-0.67	0.00	10.76	55.07	62.88	-7.81	QP
6	0.219	33.76	-0.67	0.00	10.76	43.85	52.88	-9.03	Average
7	0.242	30.87	-0.67	0.00	10.75	40.95	52.04	-11.09	Average
8	0.249	42.48	-0.67	0.01	10.75	52.57	61.78	-9.21	QP
9	0.313	27.56	-0.66	0.00	10.74	37.64	49.88	-12.24	Average
10	0.332	36.80	-0.66	-0.02	10.73	46.85	59.40	-12.55	QP
11	0.481	33.17	-0.65	0.02	10.75	43.29	56.32	-13.03	QP
12	0.555	24.58	-0.65	0.03	10.76	34.72	46.00	-11.28	Average


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.


6.3 Conducted Output Power

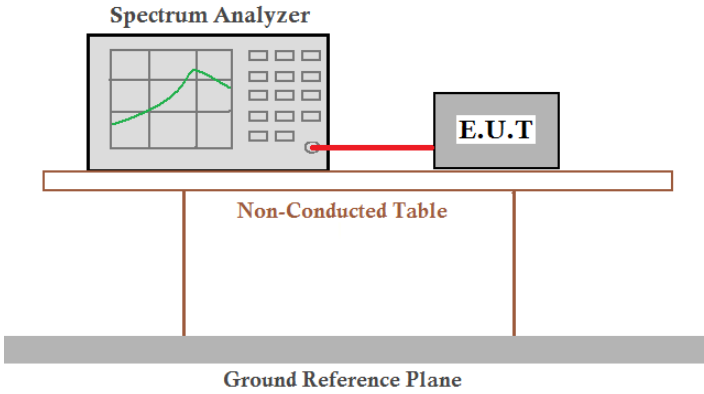Test Requirement:	FCC Part 15 C Section 15.247 (b)(3)
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup for conducted output power measurement. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	refer to the FCC ID: 2ADBM-LS9X-AC11DBT, Report No.: CCISE200101803.

6.4 Occupy Bandwidth

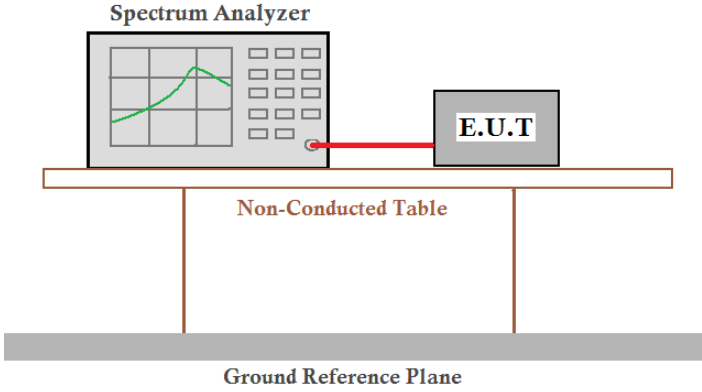
Test Requirement:	FCC Part 15 C Section 15.247 (a)(2)
Limit:	>500kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a table labeled 'Non-Conducted Table'. This table is supported by two vertical legs, which are connected to a horizontal bar at the bottom labeled 'Ground Reference Plane'.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	refer to the FCC ID: 2ADBM-LS9X-AC11DBT, Report No.: CCISE200101803.

6.5 Power Spectral Density

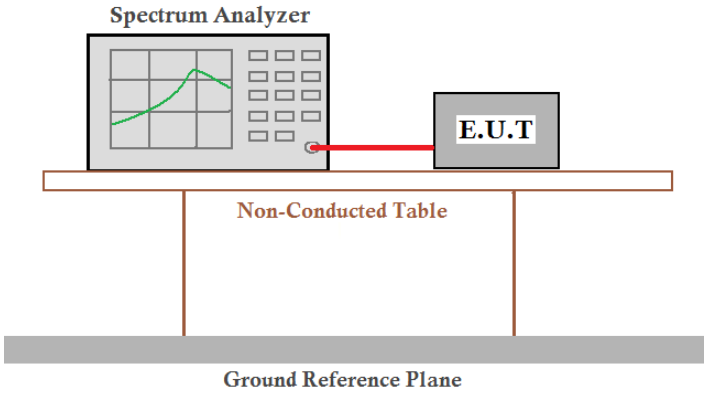
Test Requirement:	FCC Part 15 C Section 15.247 (e)
Limit:	8dBm/3kHz
Test setup:	 The diagram illustrates the test setup for Power Spectral Density measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is positioned above a Ground Reference Plane.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	refer to the FCC ID: 2ADBM-LS9X-AC11DBT, Report No.: CCISE200101803.

6.6 Band Edge

6.6.1 Conducted Emission Method

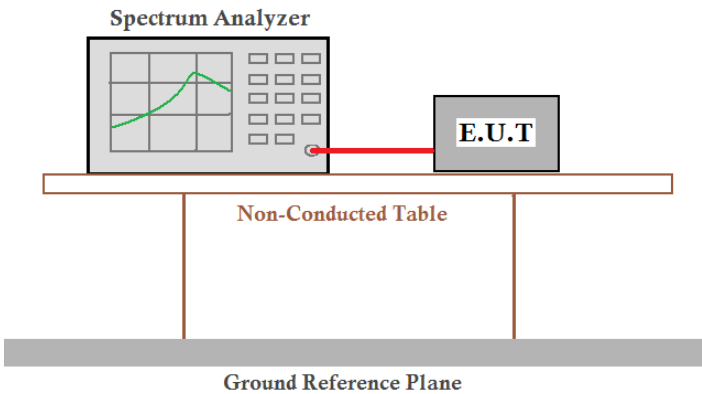Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	refer to the FCC ID: 2ADBM-LS9X-AC11DBT, Report No.: CCISE200101803.


6.6.2 Radiated Emission Method

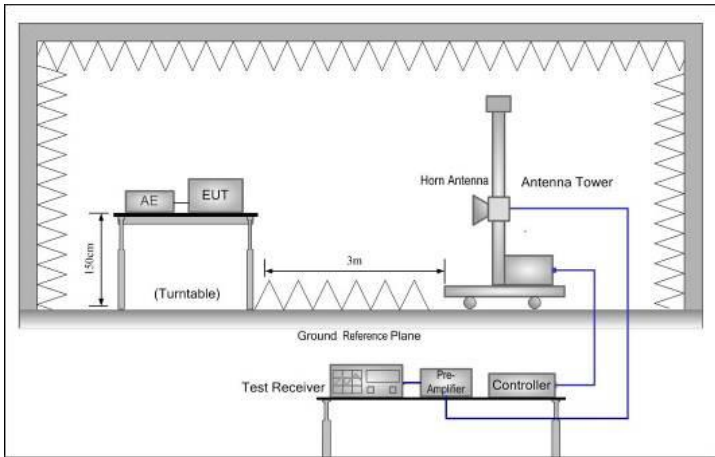Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	2310 MHz to 2390 MHz and 2483.5 MHz to 2500 MHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	Above 1GHz	54.00		Average Value	
		74.00		Peak Value	
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:					
Test Instruments:	Refer to section 5.9 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Passed				

PCB antenna:

802.11b mode:

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

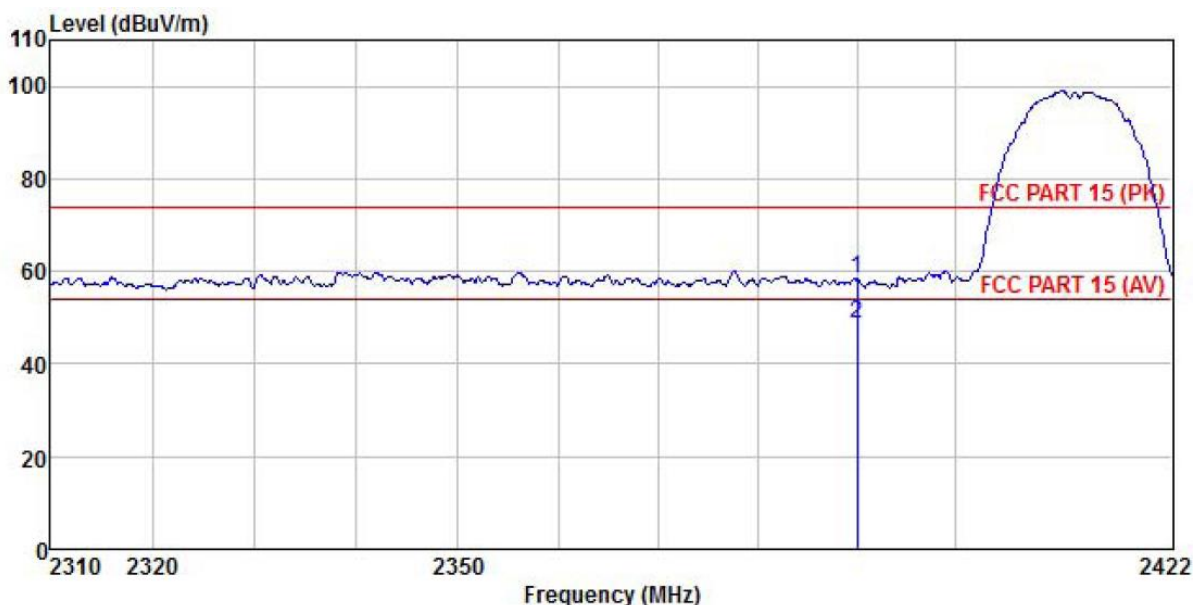


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	25.50	27.03	4.28	1.68	0.00	58.49	74.00	-15.51	Peak
2	2390.000	15.62	27.03	4.28	1.68	0.00	48.61	54.00	-5.39	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

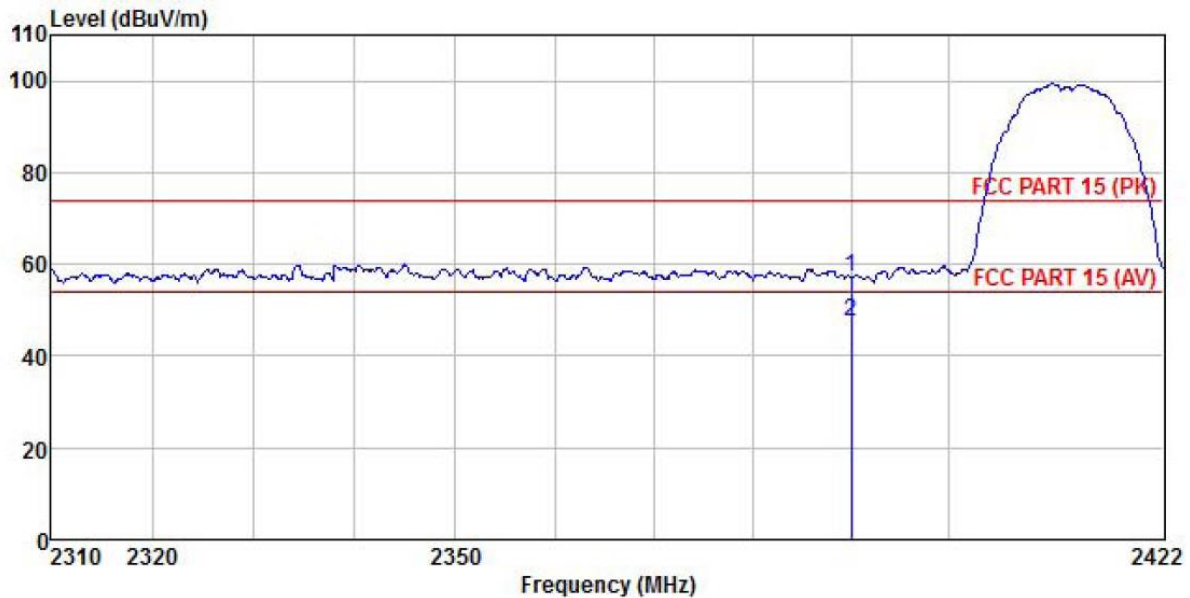


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	24.23	27.03	4.28	1.68	0.00	57.22	74.00	-16.78	Peak
2	2390.000	14.31	27.03	4.28	1.68	0.00	47.30	54.00	-6.70	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

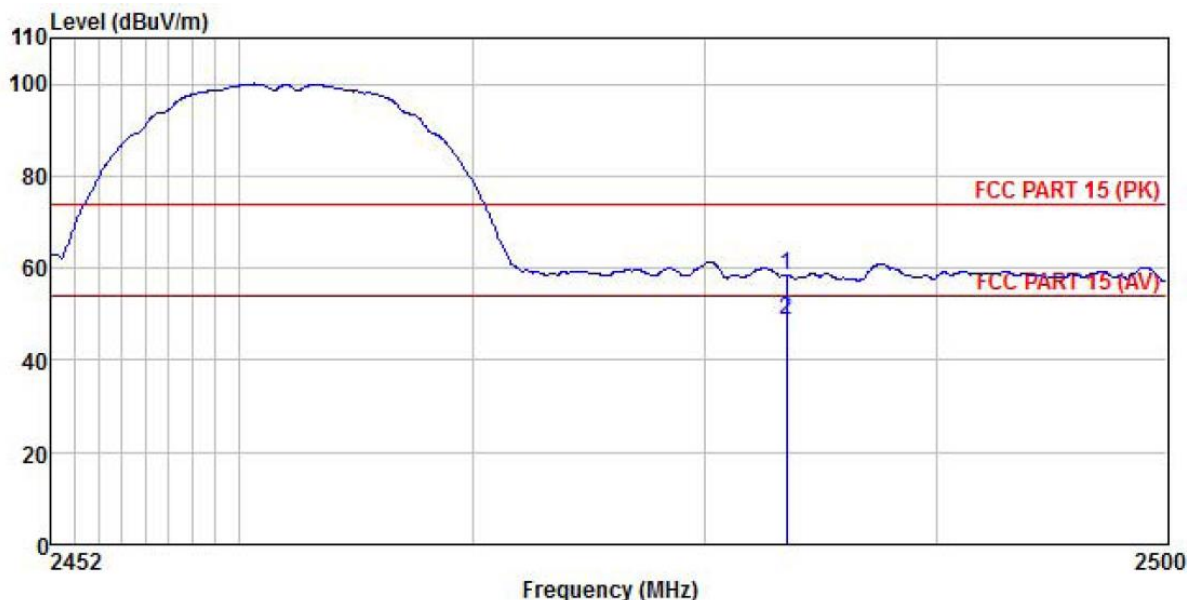


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	25.09	27.27	4.38	1.70	0.00	58.44	74.00	-15.56	Peak
2	2483.500	15.49	27.27	4.38	1.70	0.00	48.84	54.00	-5.16	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

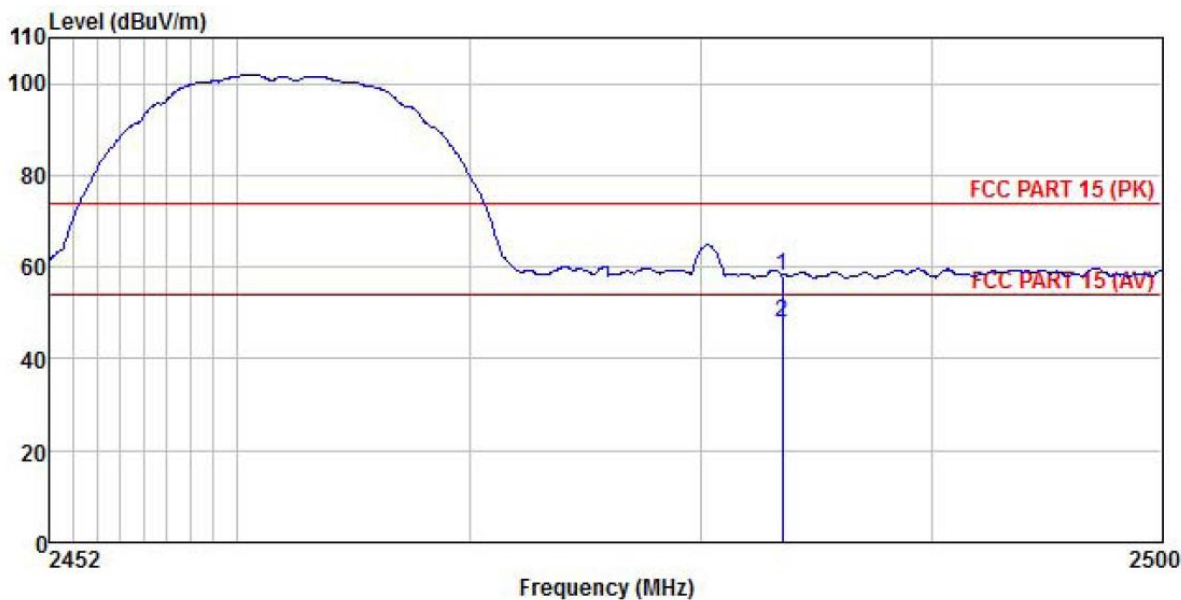


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	24.89	27.27	4.38	1.70	0.00	58.24	74.00	-15.76	Peak
2	2483.500	14.69	27.27	4.38	1.70	0.00	48.04	54.00	-5.96	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g mode:

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

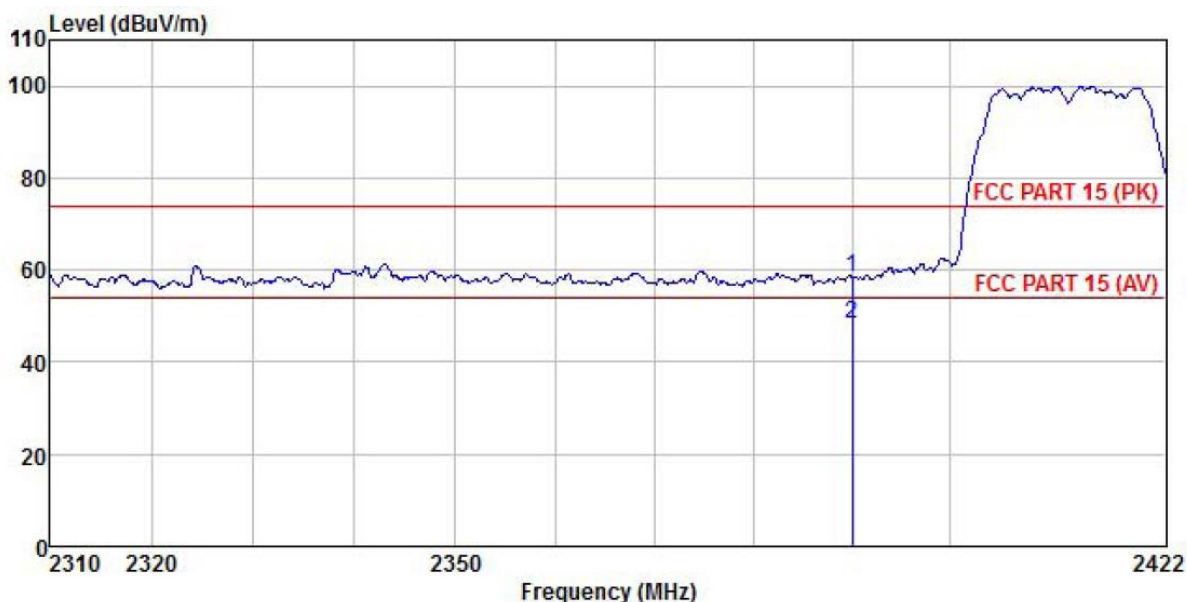


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	25.46	27.03	4.28	1.68	0.00	58.45	74.00	-15.55	Peak
2	2390.000	15.36	27.03	4.28	1.68	0.00	48.35	54.00	-5.65	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

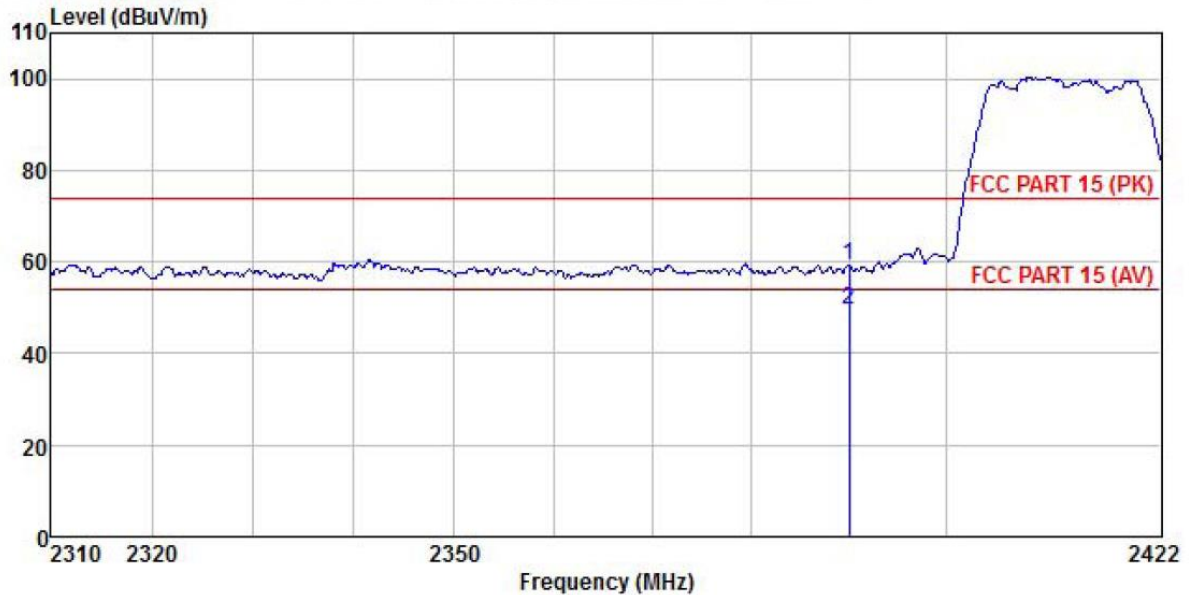


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	26.42	27.03	4.28	1.68	0.00	59.41	74.00	-14.59	Peak
2	2390.000	16.55	27.03	4.28	1.68	0.00	49.54	54.00	-4.46	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

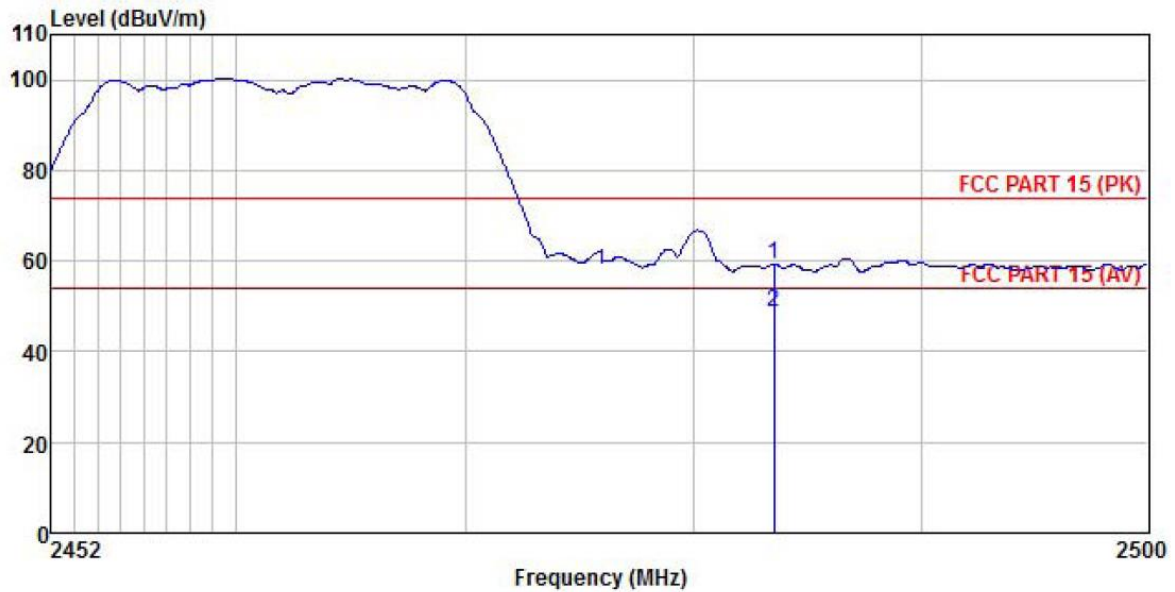


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	2483.500	25.88	27.27	4.38	1.70	0.00	59.23	74.00	-14.77 Peak
2	2483.500	15.48	27.27	4.38	1.70	0.00	48.83	54.00	-5.17 Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

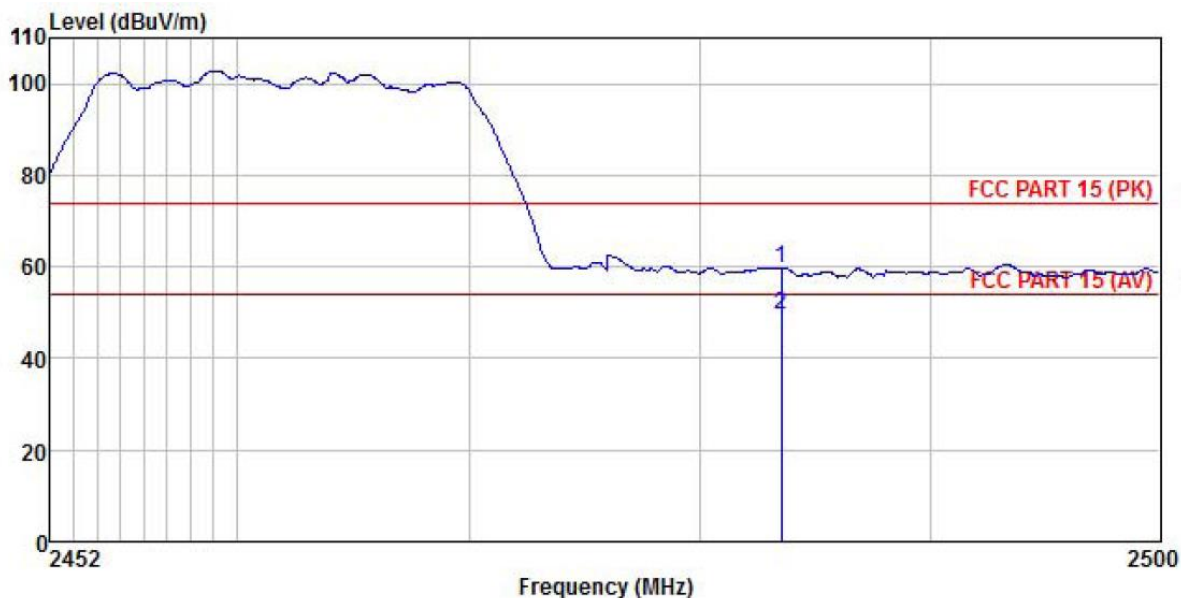


	Read	Antenna	Cable	Aux	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1 2483.500	26.50	27.27	4.38	1.70	0.00	59.85	74.00	-14.15	Peak
2 2483.500	16.34	27.27	4.38	1.70	0.00	49.69	54.00	-4.31	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT20):

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Huni: 57%

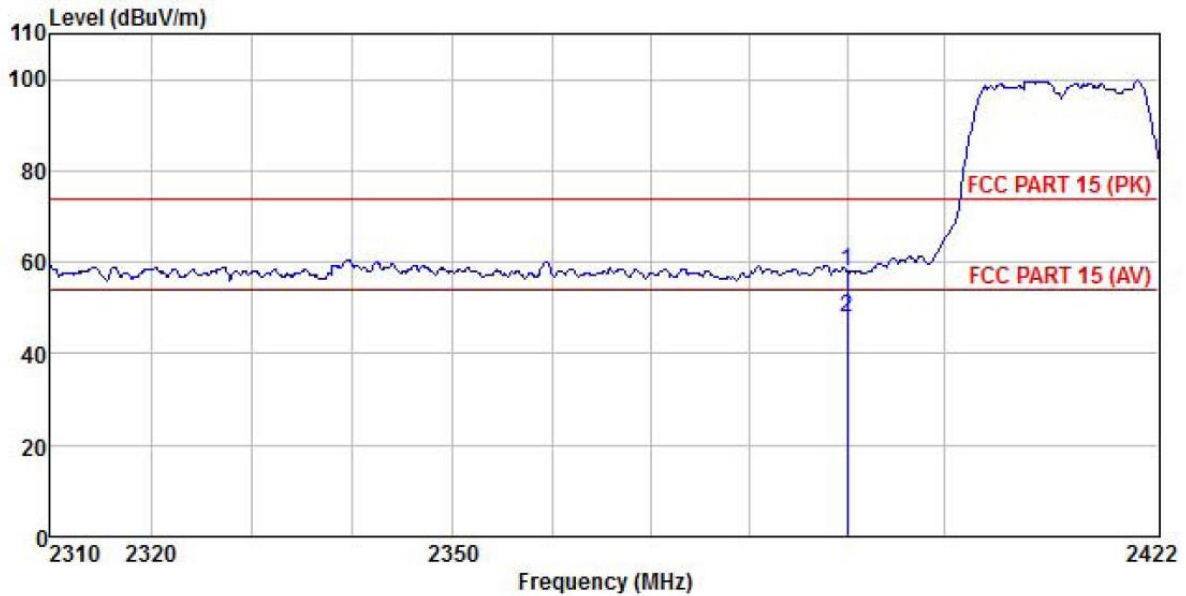


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	2390.000	24.87	27.03	4.28	1.68	0.00	57.86	74.00	-16.14 Peak
2	2390.000	14.87	27.03	4.28	1.68	0.00	47.86	54.00	-6.14 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

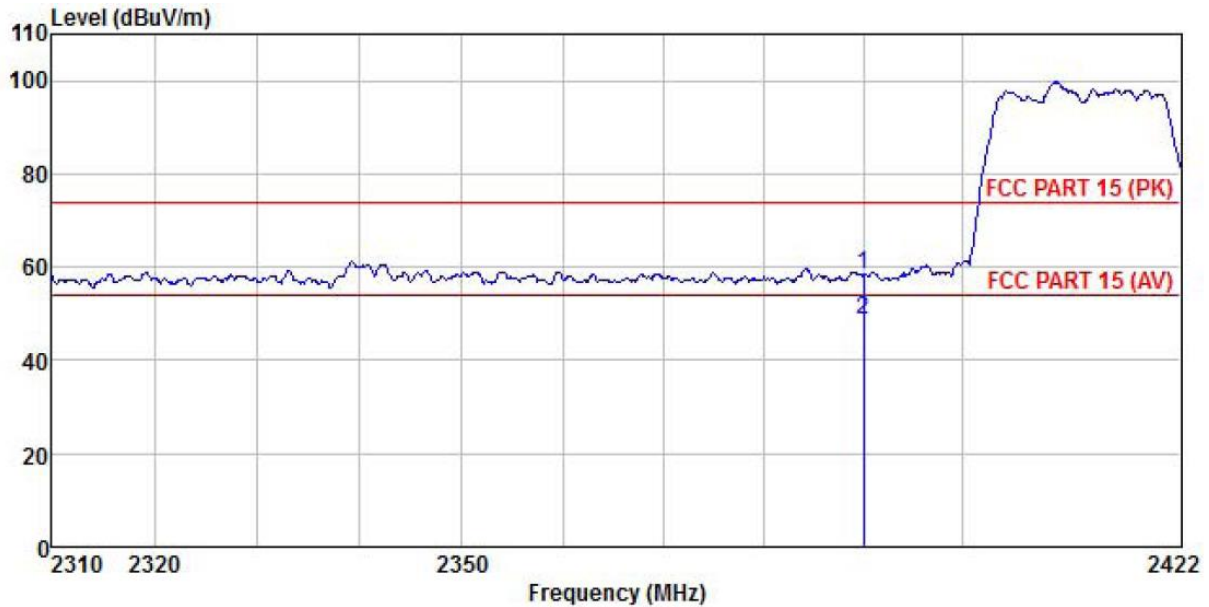


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	25.58	27.03	4.28	1.68	0.00	58.57	74.00	-15.43	Peak
2	2390.000	15.78	27.03	4.28	1.68	0.00	48.77	54.00	-5.23	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

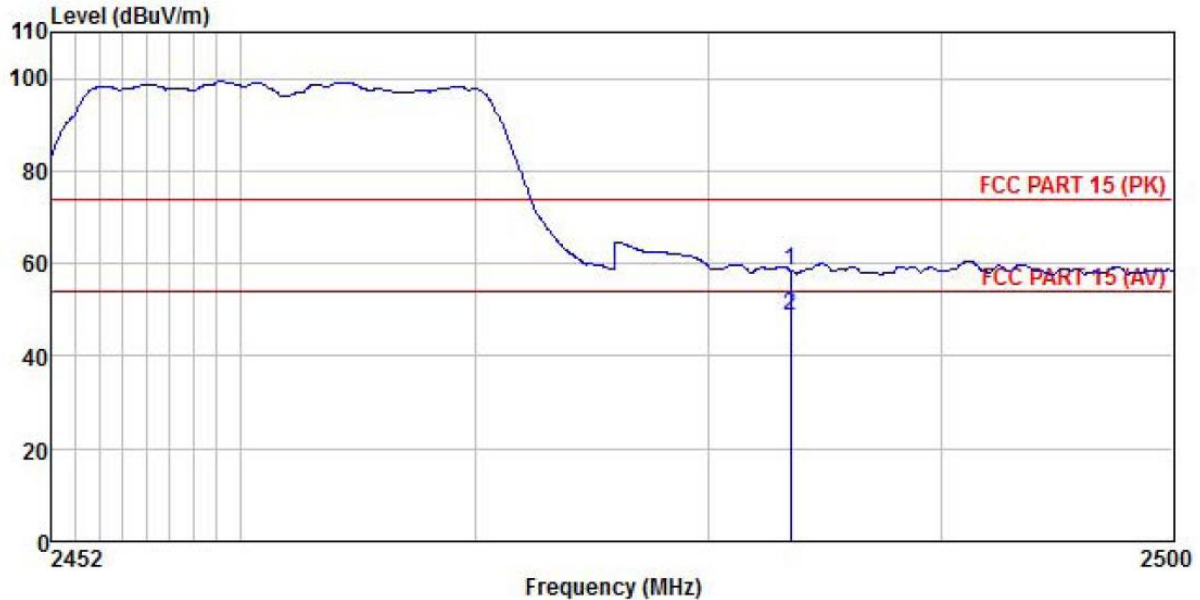


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	25.30	27.27	4.38	1.70	0.00	58.65	74.00	-15.35	Peak
2	2483.500	15.46	27.27	4.38	1.70	0.00	48.81	54.00	-5.19	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

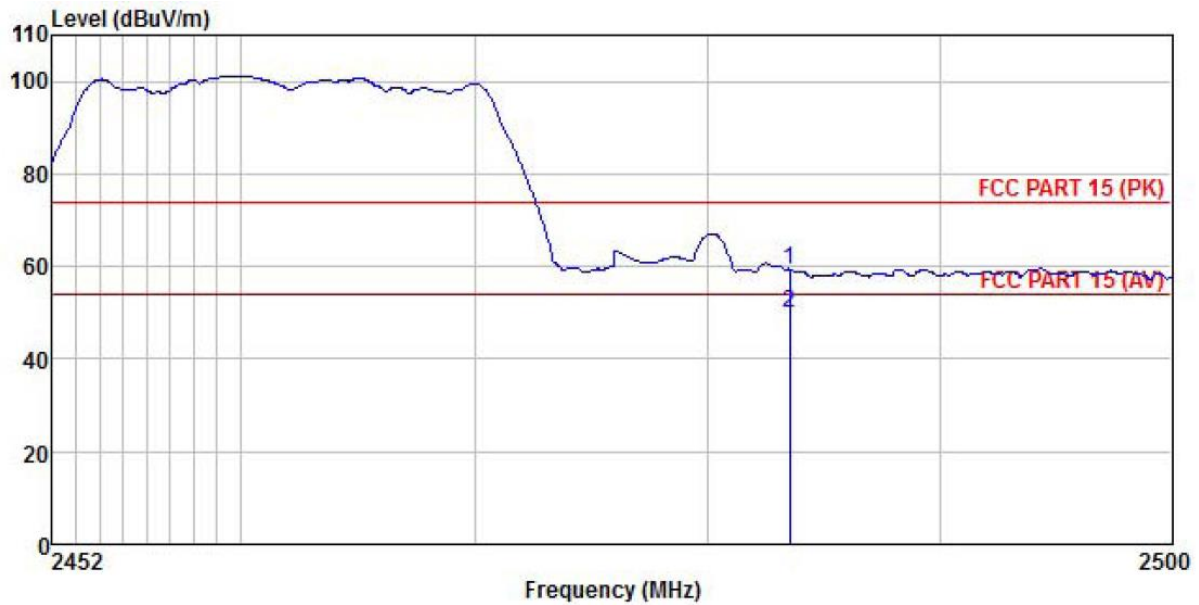


	Read Freq	Antenna Level	Cable Factor	Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	26.10	27.27	4.38	1.70	0.00	59.45	74.00	-14.55	Peak
2	2483.500	16.74	27.27	4.38	1.70	0.00	50.09	54.00	-3.91	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT40):

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

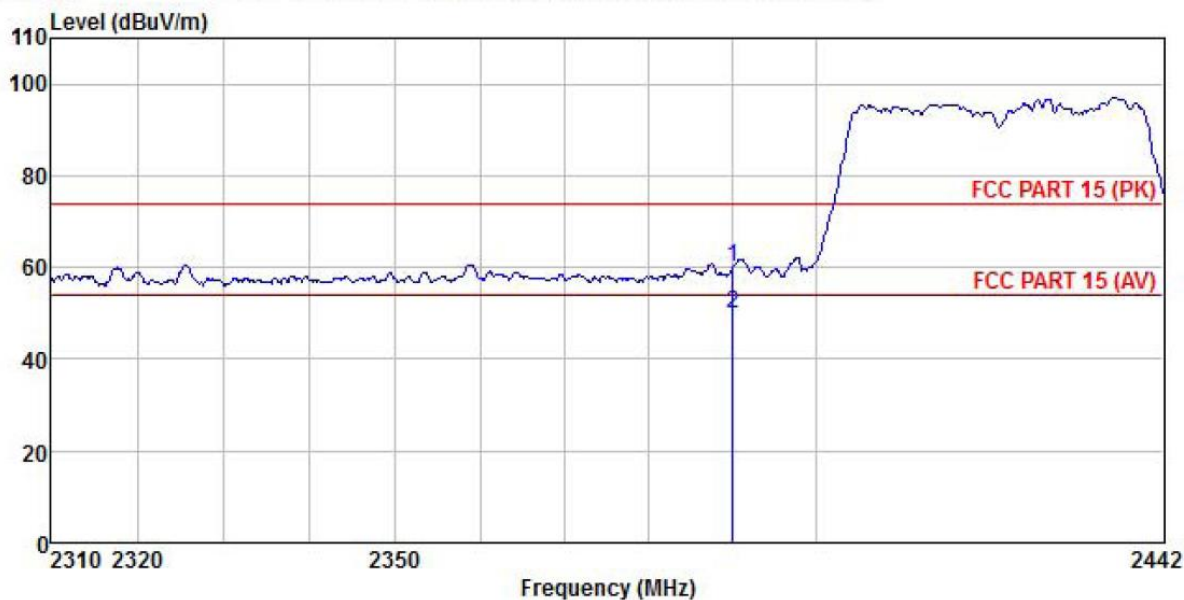


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	26.95	27.03	4.28	1.68	0.00	59.94	74.00	-14.06 Peak
2	2390.000	16.78	27.03	4.28	1.68	0.00	49.77	54.00	-4.23 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

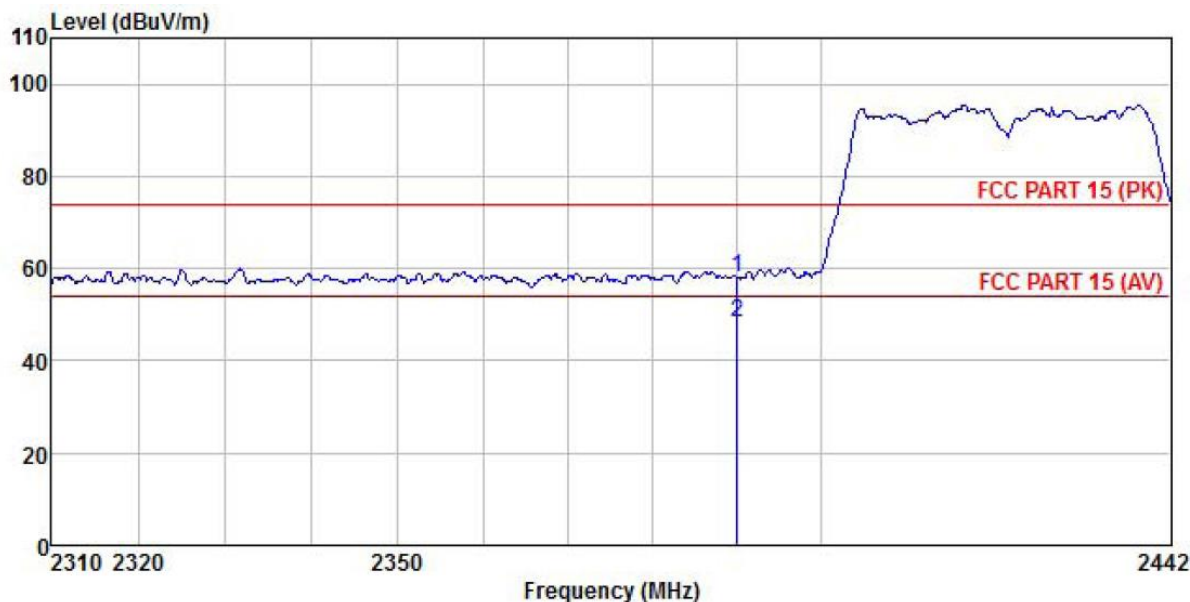


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	25.00	27.03	4.28	1.68	0.00	57.99	74.00	-16.01	Peak
2	2390.000	15.45	27.03	4.28	1.68	0.00	48.44	54.00	-5.56	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

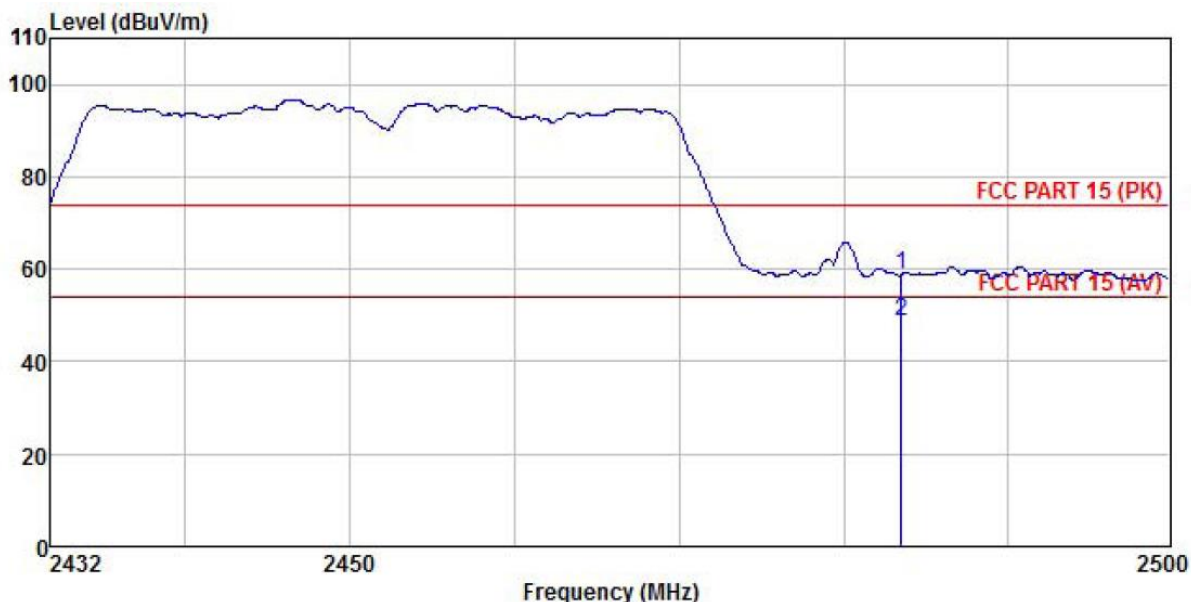


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	25.36	27.27	4.38	1.70	0.00	58.71	74.00	-15.29 Peak
2	2483.500	15.48	27.27	4.38	1.70	0.00	48.83	54.00	-5.17 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

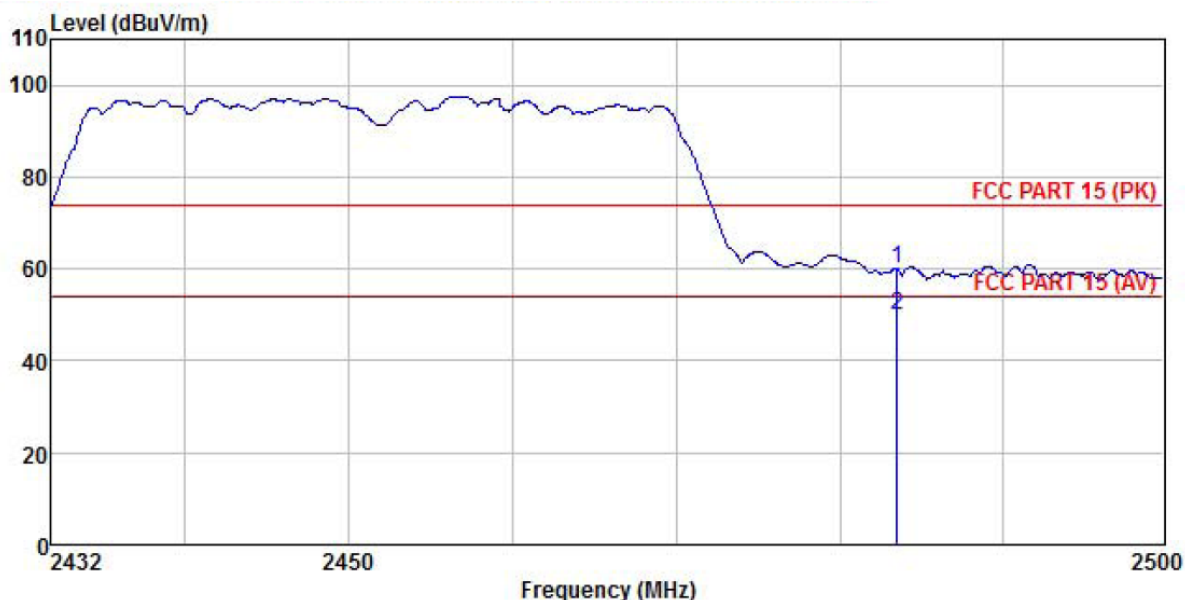

	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	26.64	27.27	4.38	1.70	0.00	59.99	74.00	-14.01	Peak
2	2483.500	16.74	27.27	4.38	1.70	0.00	50.09	54.00	-3.91	Average


Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

PIFA antenna:

802.11b mode:

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

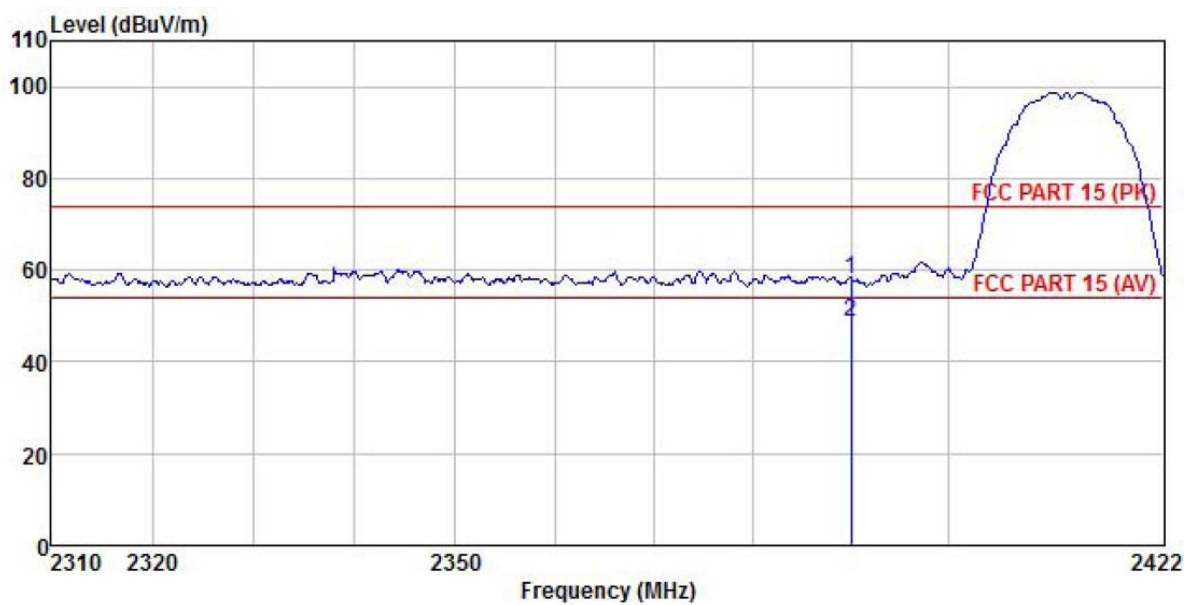


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	24.93	27.03	4.28	1.68	0.00	57.92	74.00	-16.08 Peak
2	2390.000	15.54	27.03	4.28	1.68	0.00	48.53	54.00	-5.47 Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

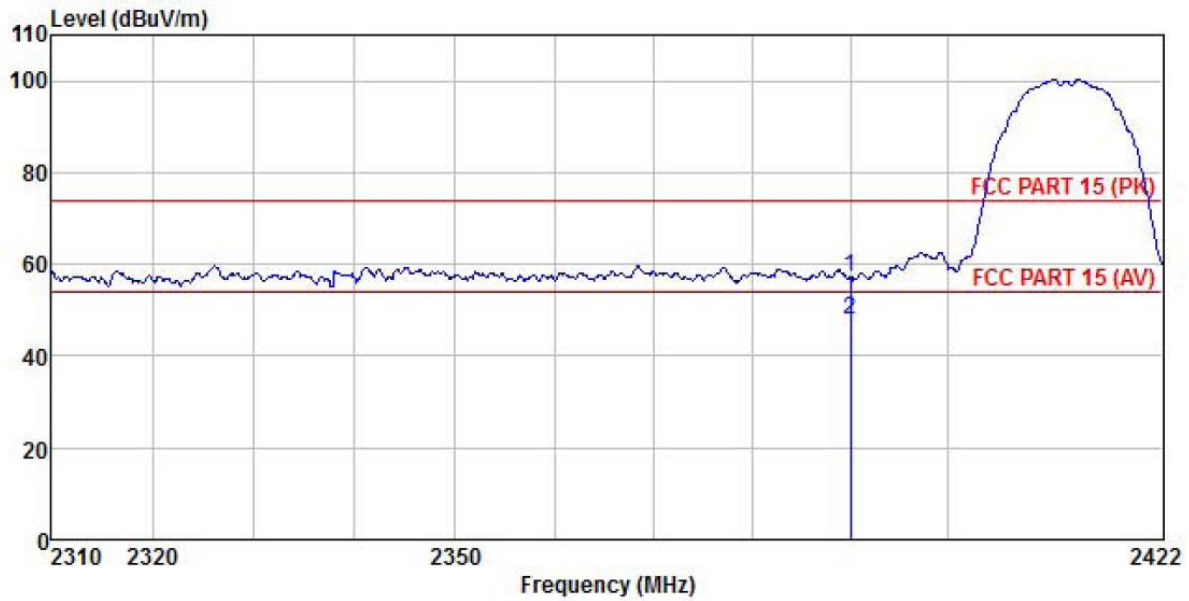


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	24.18	27.03	4.28	1.68	0.00	57.17	74.00	-16.83	Peak
2	2390.000	15.04	27.03	4.28	1.68	0.00	48.03	54.00	-5.97	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

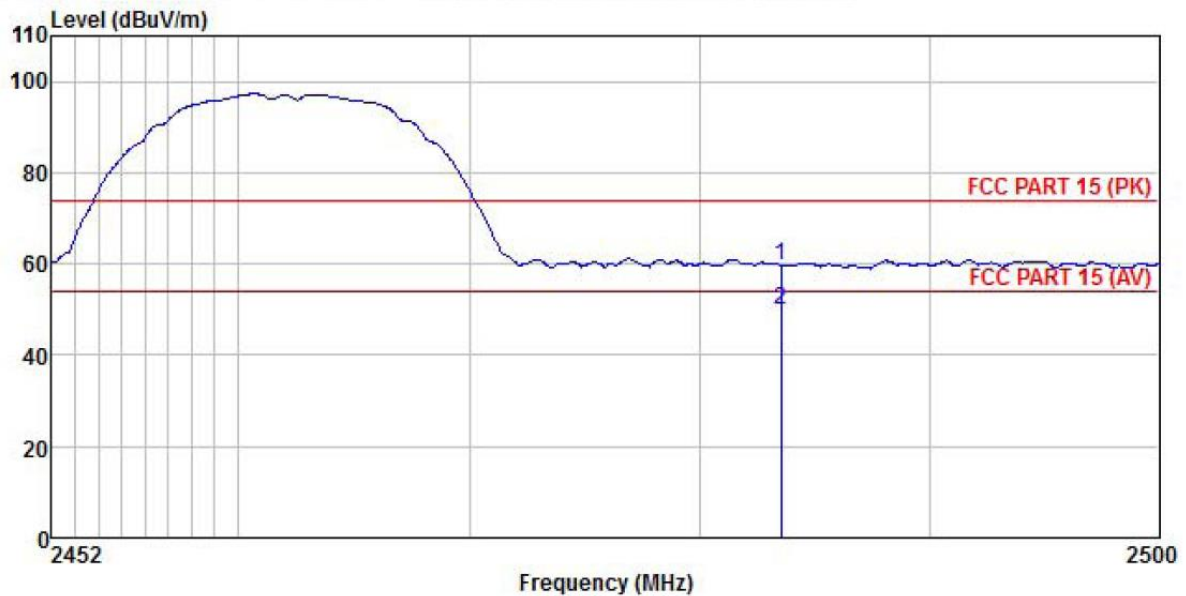


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	26.46	27.27	4.38	1.70	0.00	59.81	74.00	-14.19	Peak
2	2483.500	16.42	27.27	4.38	1.70	0.00	49.77	54.00	-4.23	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

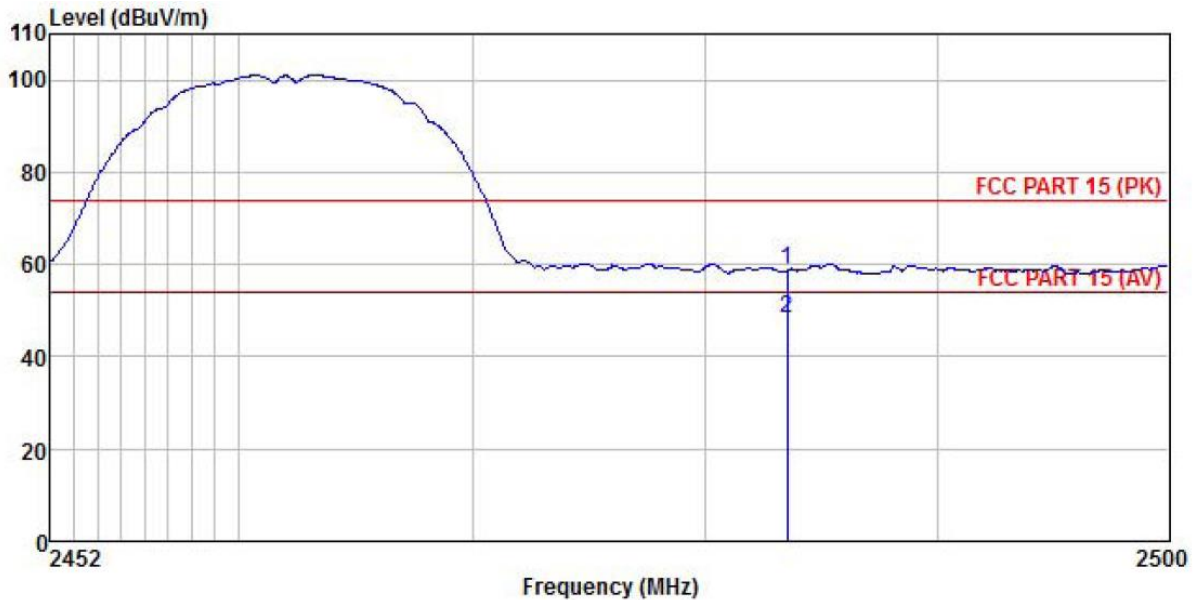


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	25.45	27.27	4.38	1.70	0.00	58.80	74.00	-15.20	Peak
2	2483.500	14.80	27.27	4.38	1.70	0.00	48.15	54.00	-5.85	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g mode:

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

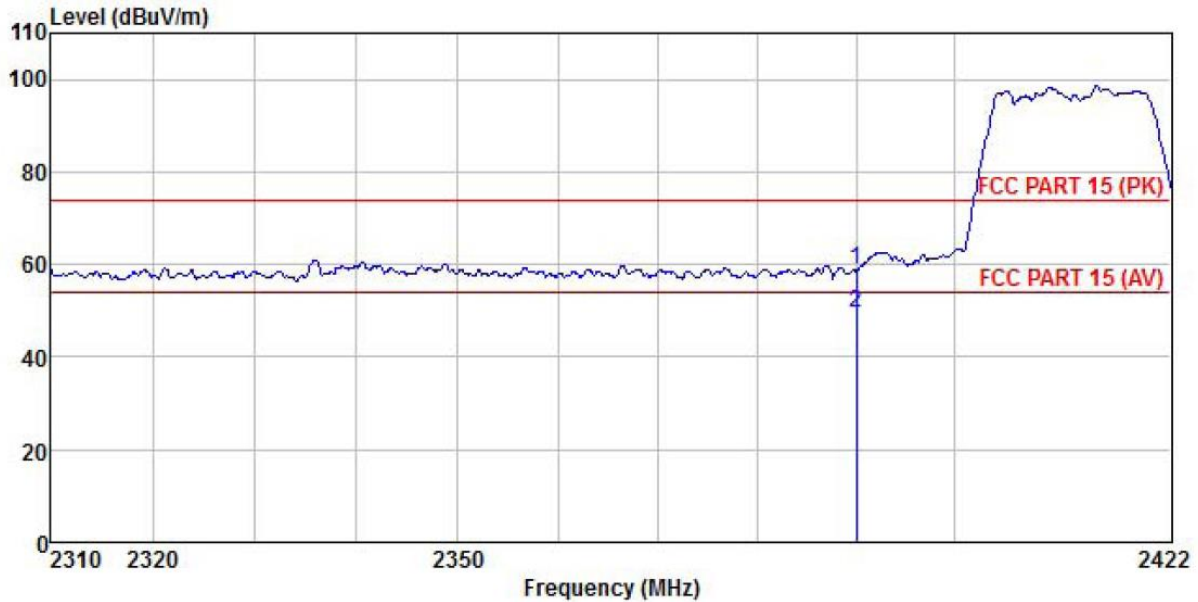


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	25.77	27.03	4.28	1.68	0.00	58.76	74.00	-15.24	Peak
2	2390.000	16.45	27.03	4.28	1.68	0.00	49.44	54.00	-4.56	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

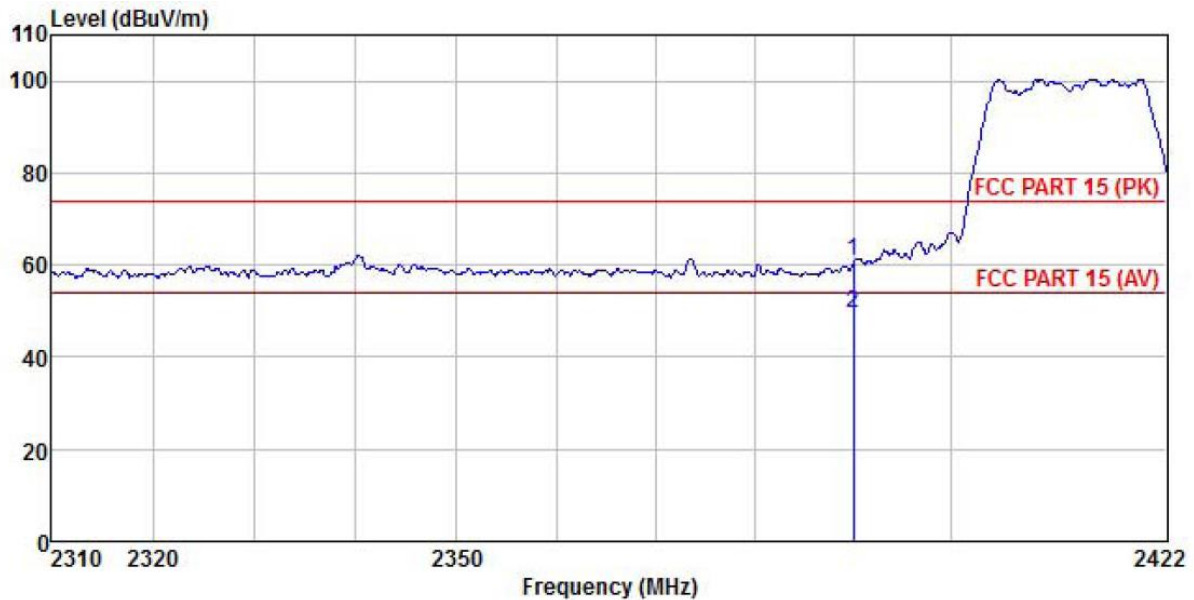


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	27.92	27.03	4.28	1.68	0.00	60.91	74.00	-13.09	Peak
2	2390.000	16.54	27.03	4.28	1.68	0.00	49.53	54.00	-4.47	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

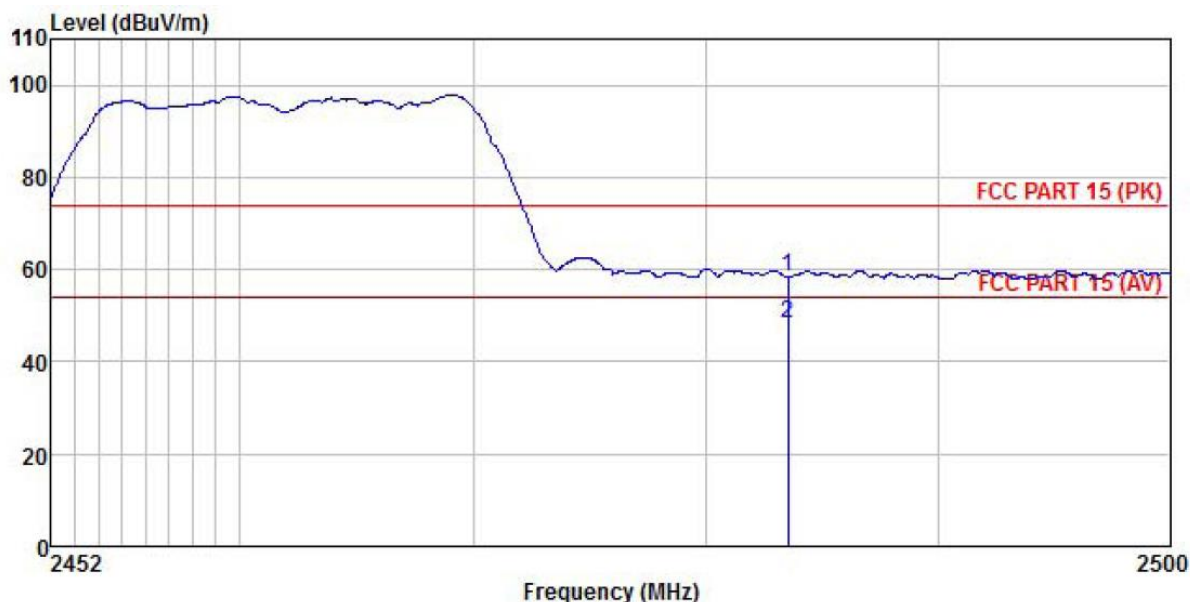


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	25.29	27.27	4.38	1.70	0.00	58.64	74.00	-15.36	Peak
2	2483.500	15.01	27.27	4.38	1.70	0.00	48.36	54.00	-5.64	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

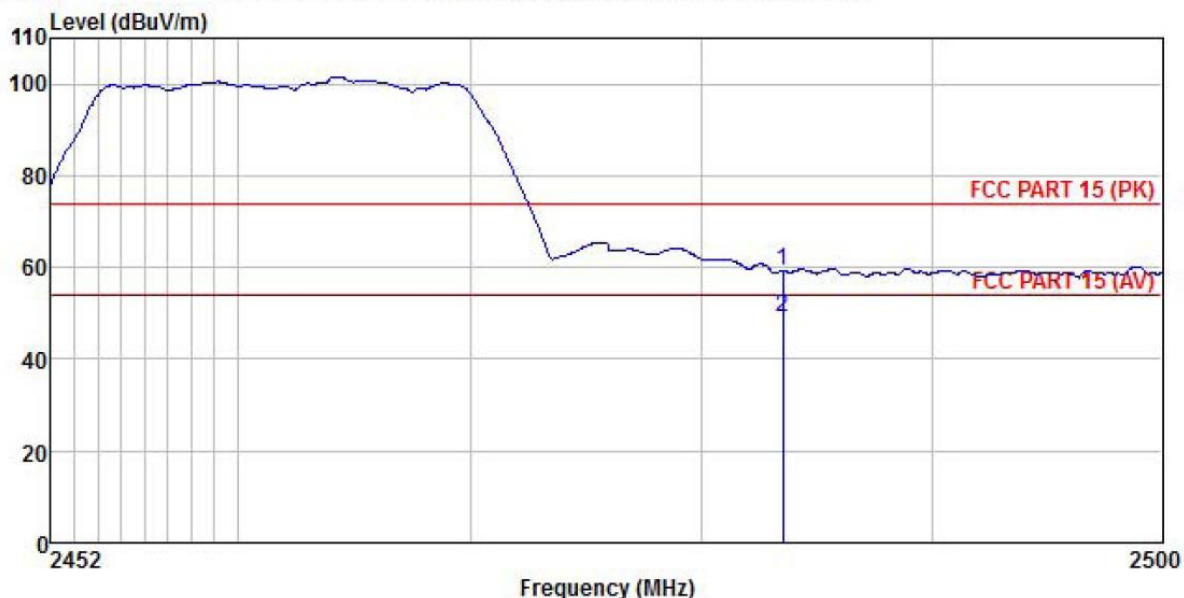


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	25.90	27.27	4.38	1.70	0.00	59.25	74.00	-14.75	Peak
2	2483.500	15.75	27.27	4.38	1.70	0.00	49.10	54.00	-4.90	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT20):

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

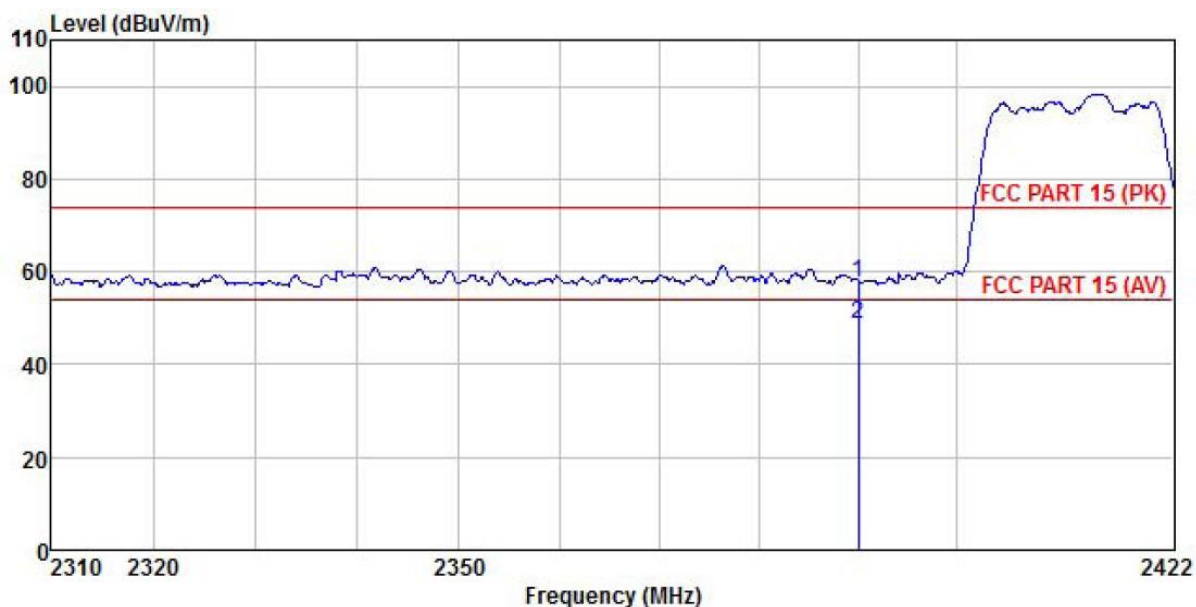


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Factor	Level	Line	Limit Remark
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	24.72	27.03	4.28	1.68	0.00	57.71	74.00	-16.29 Peak
2	2390.000	15.65	27.03	4.28	1.68	0.00	48.64	54.00	-5.36 Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

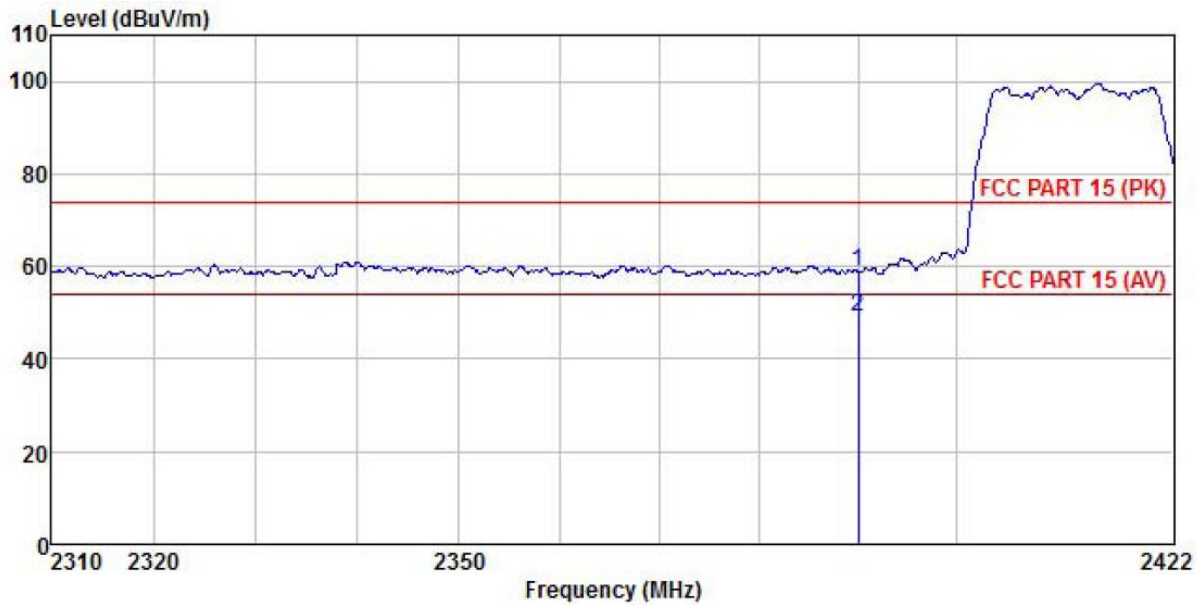


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	25.99	27.03	4.28	1.68	0.00	58.98	74.00	-15.02	Peak
2	2390.000	16.01	27.03	4.28	1.68	0.00	49.00	54.00	-5.00	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

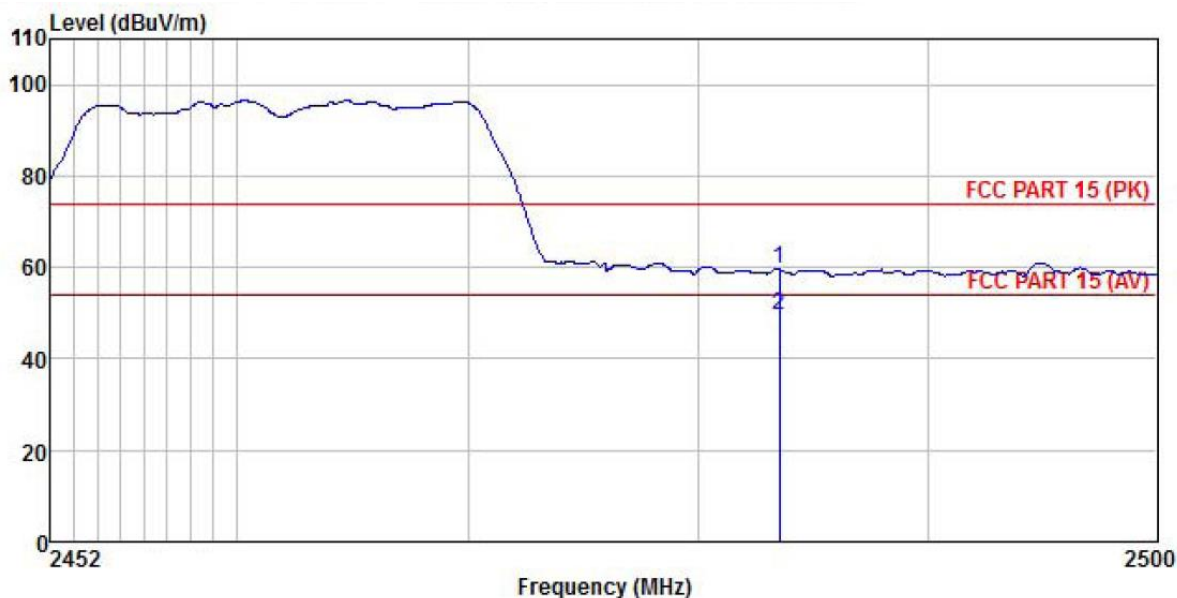


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	26.28	27.27	4.38	1.70	0.00	59.63	74.00	-14.37	Peak
2	2483.500	15.98	27.27	4.38	1.70	0.00	49.33	54.00	-4.67	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

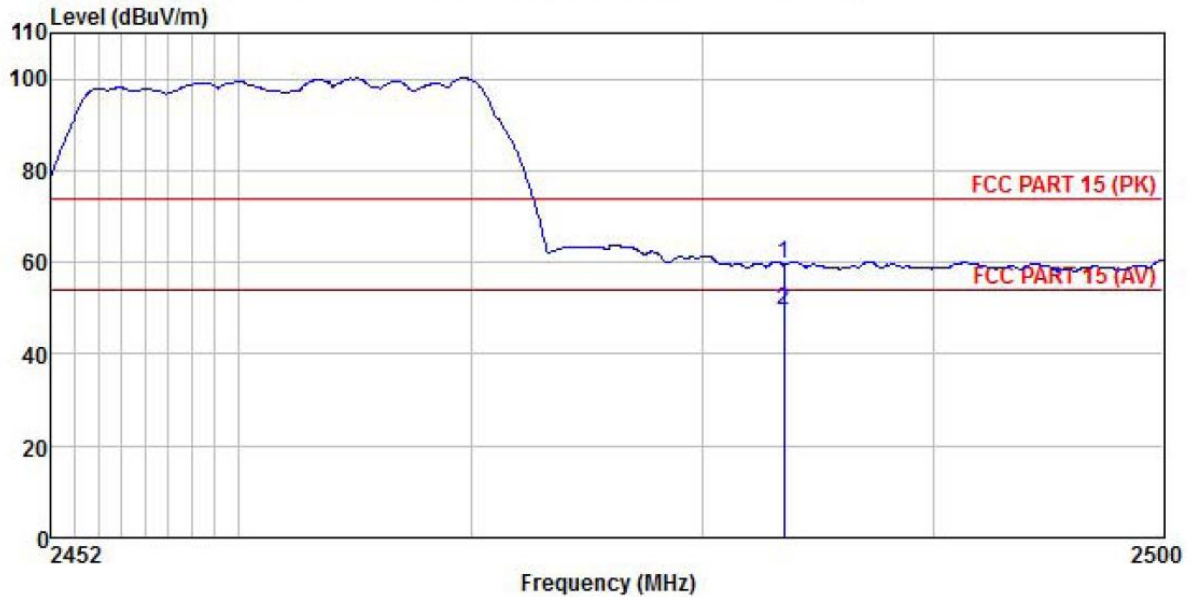


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	26.12	27.27	4.38	1.70	0.00	59.47	74.00	-14.53	Peak
2	2483.500	16.10	27.27	4.38	1.70	0.00	49.45	54.00	-4.55	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT40):

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

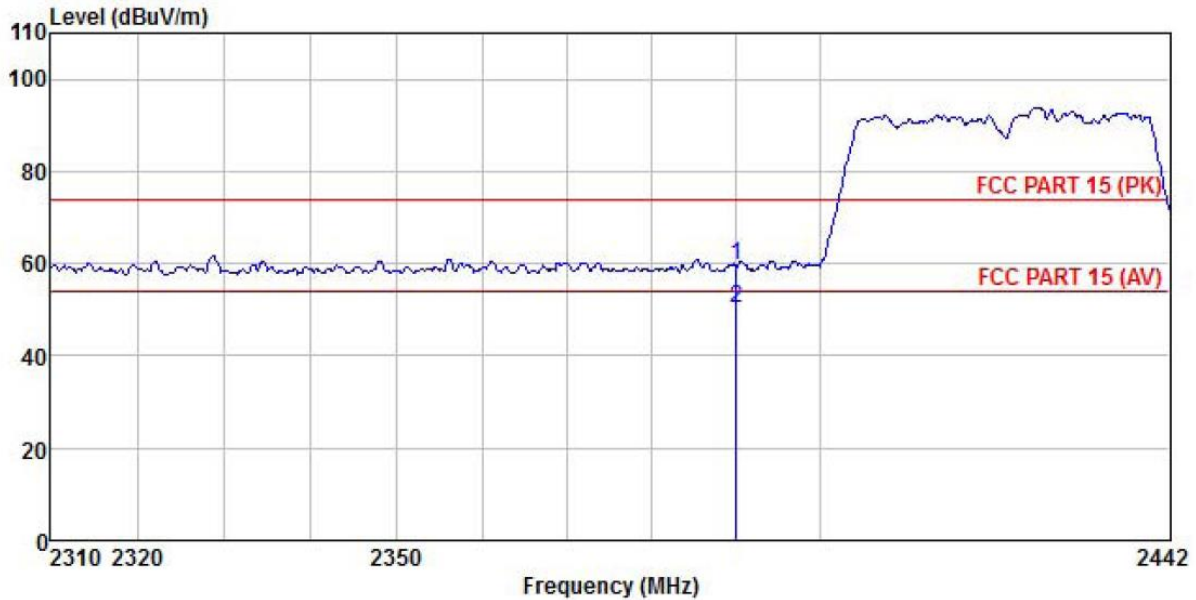


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	26.69	27.03	4.28	1.68	0.00	59.68	74.00	-14.32	Peak
2	2390.000	17.49	27.03	4.28	1.68	0.00	50.48	54.00	-3.52	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

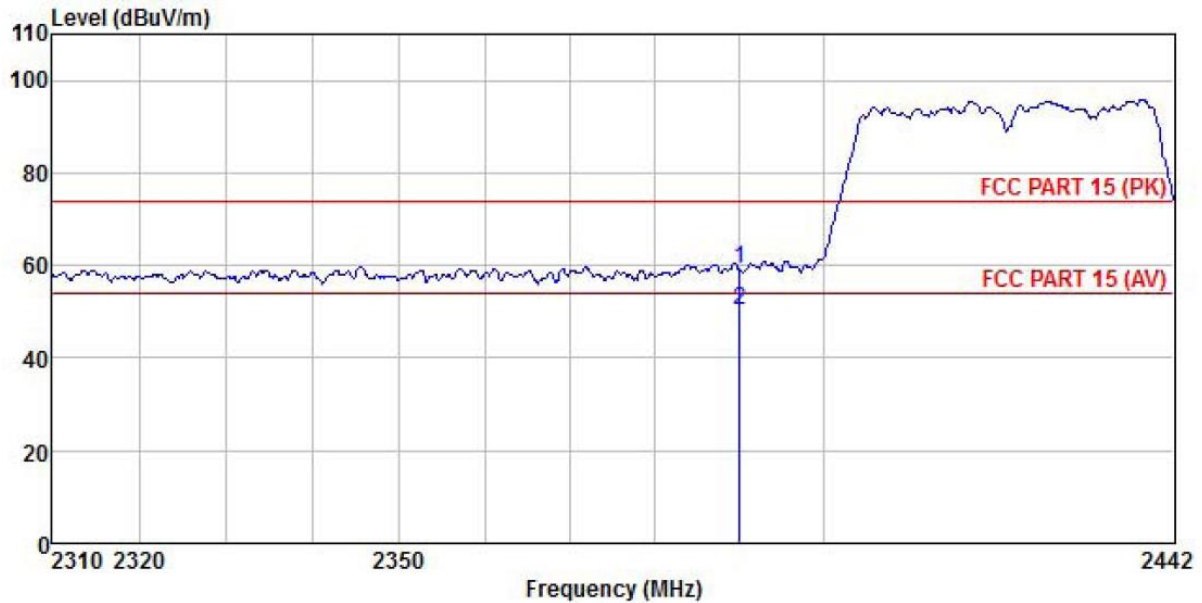


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	26.35	27.03	4.28	1.68	0.00	59.34	74.00	-14.66	Peak
2	2390.000	17.54	27.03	4.28	1.68	0.00	50.53	54.00	-3.47	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

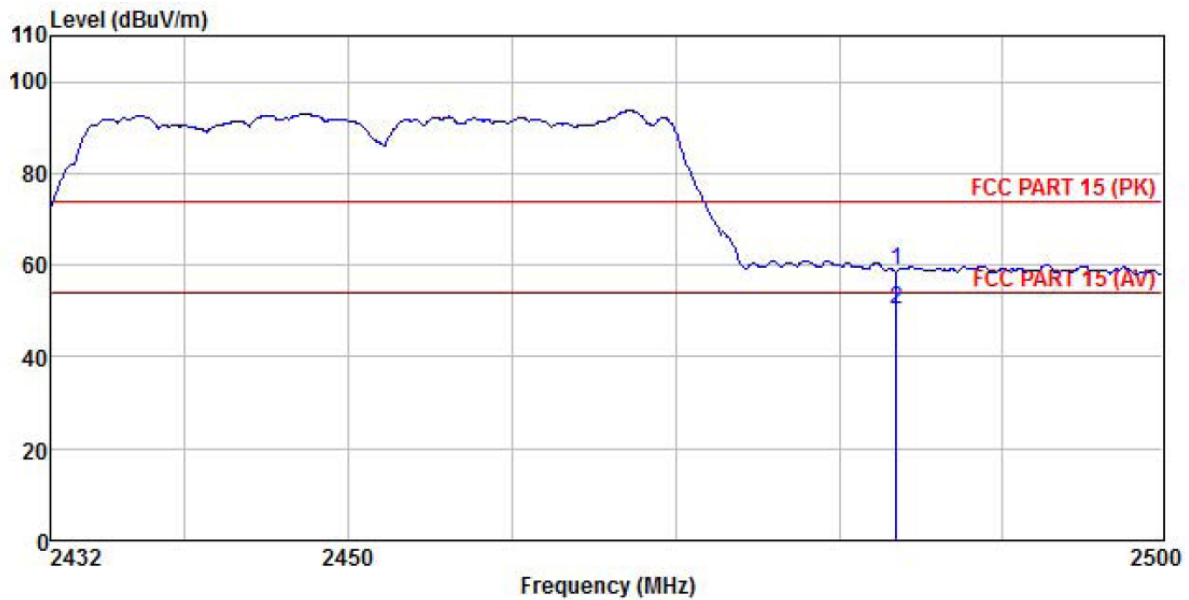


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB		dB	dBuV/m	dBuV/m	dB	
1	2483.500	25.54	27.27	4.38	1.70	0.00	58.89	74.00	-15.11	Peak
2	2483.500	16.82	27.27	4.38	1.70	0.00	50.17	54.00	-3.83	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

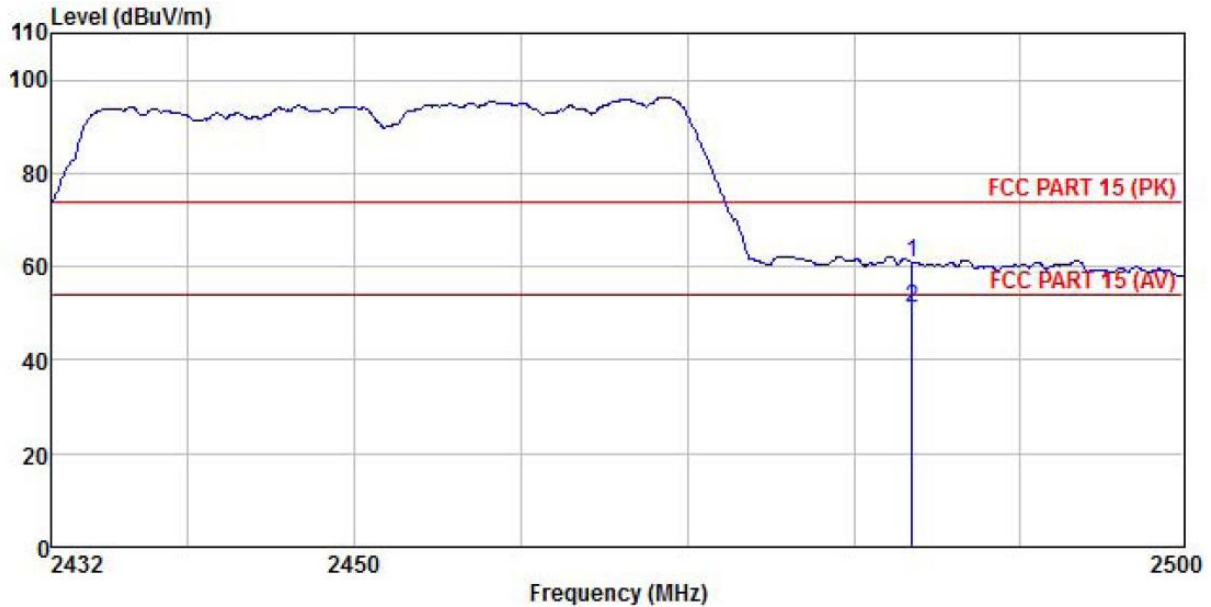


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Level	Line	Limit
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	27.57	27.27	4.38	1.70	0.00	60.92	74.00	-13.08 Peak
2	2483.500	17.65	27.27	4.38	1.70	0.00	51.00	54.00	-3.00 Average

Remark:


- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.


6.7 Spurious Emission

6.7.1 Conducted Emission Method

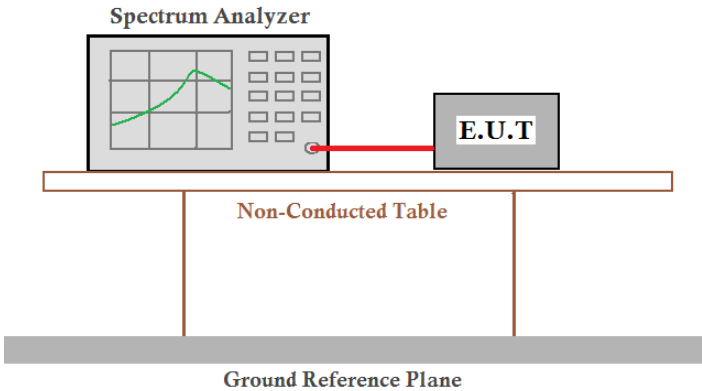Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	 The diagram illustrates the test setup for conducted emissions. A Spectrum Analyzer is connected to an Equipment Under Test (E.U.T) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	refer to the FCC ID: 2ADBM-LS9X-AC11DBT, Report No.: CCISE200101803.

6.7.2 Radiated Emission Method

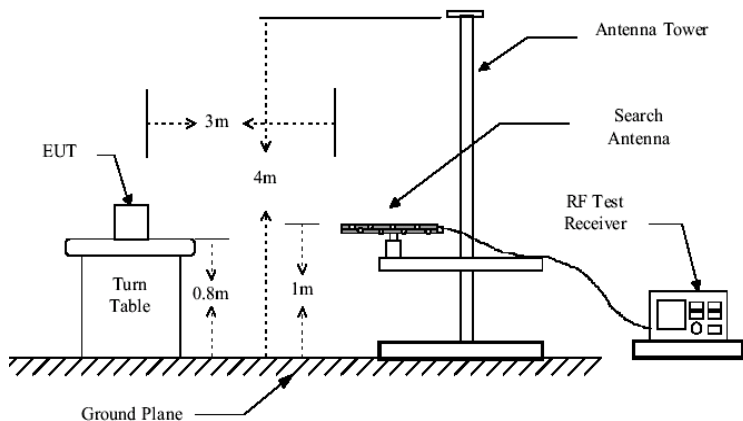
Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	9kHz to 25GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)			Remark
	30MHz-88MHz	40.0			Quasi-peak Value
	88MHz-216MHz	43.5			Quasi-peak Value
	216MHz-960MHz	46.0			Quasi-peak Value
	960MHz-1GHz	54.0			Quasi-peak Value
	Above 1GHz	54.0			Average Value
74.0			Peak Value		
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:	Below 1GHz  Above 1GHz				

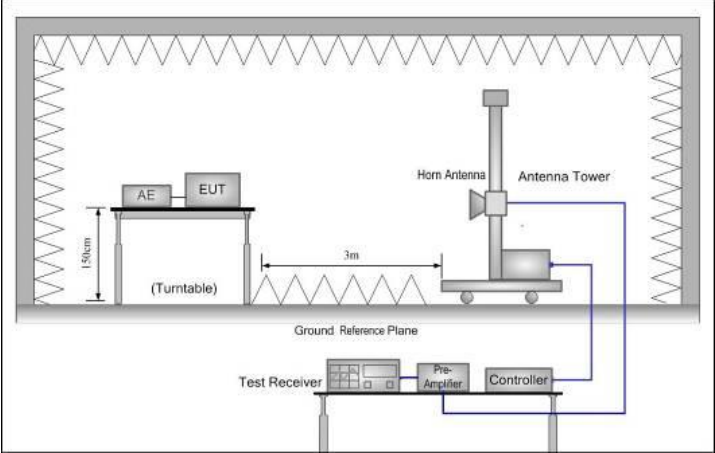	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case. 2. 9 kHz to 30MHz is lower than the limit 20dB, so only shows the data of above 30MHz in this report.

Measurement Data (worst case):

Below 1GHz:

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

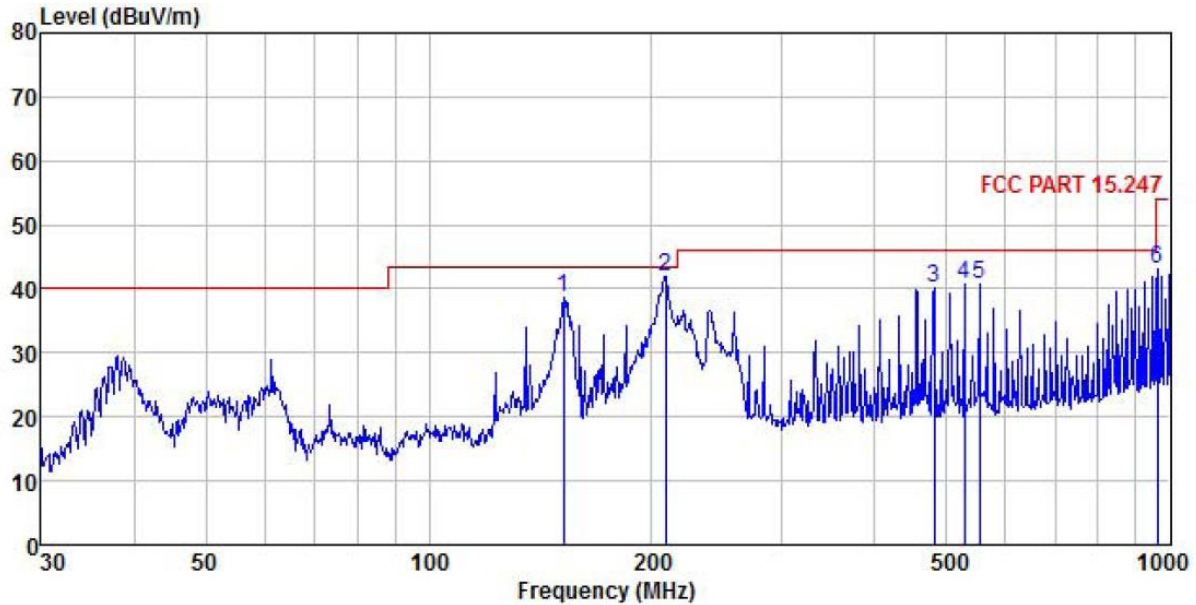


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	152.130	53.04	14.34	0.62	0.00	29.20	38.80	43.50	-4.70 QP
2	208.580	51.71	18.34	0.73	0.00	28.78	42.00	43.50	-1.50 QP
3	480.528	48.63	19.33	1.08	0.00	28.92	40.12	46.00	-5.88 QP
4	528.246	49.01	19.51	1.13	0.00	29.04	40.61	46.00	-5.39 QP
5	552.883	48.92	19.61	1.16	0.00	29.09	40.60	46.00	-5.40 QP
6	962.162	46.32	22.88	1.57	0.00	27.65	43.12	54.00	-10.88 QP

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-C
Test By:	Mike	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

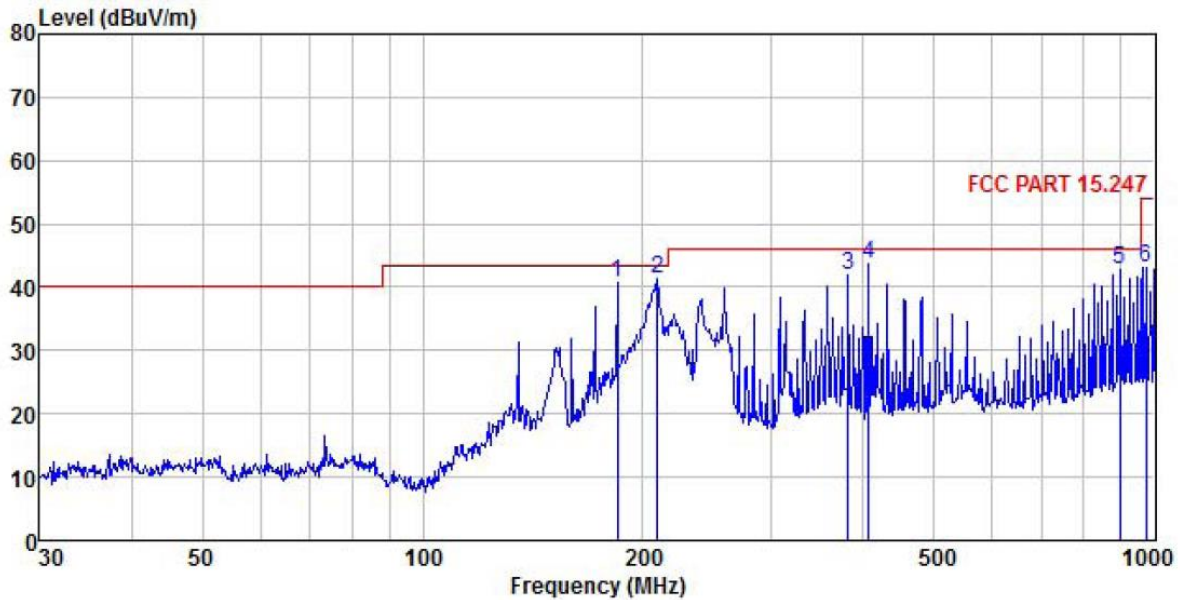


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	184.490	51.93	17.16	0.69	0.00	28.94	40.84	43.50	-2.66	QP
2	209.313	51.12	18.34	0.73	0.00	28.77	41.42	43.50	-2.08	QP
3	381.249	50.70	18.99	0.97	0.00	28.70	41.96	46.00	-4.04	QP
4	406.088	52.46	19.11	1.00	0.00	28.79	43.78	46.00	-2.22	QP
5	896.997	46.79	22.52	1.48	0.00	27.89	42.90	46.00	-3.10	QP
6	972.337	46.28	22.94	1.57	0.00	27.59	43.20	54.00	-10.80	QP

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-AC
Test By:	Mike	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

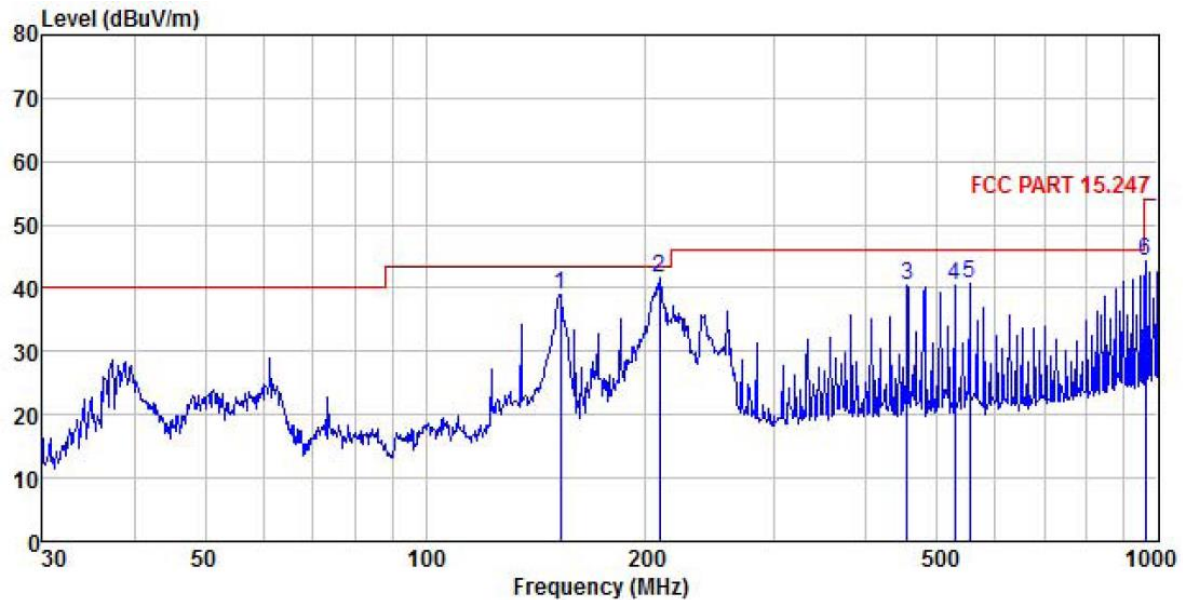


	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	152.664	53.24	14.36	0.62	0.00	29.20	39.02	43.50	-4.48 QP
2	208.580	51.28	18.34	0.73	0.00	28.78	41.57	43.50	-1.93 QP
3	454.310	48.99	19.22	1.05	0.00	28.88	40.38	46.00	-5.62 QP
4	528.246	48.91	19.51	1.13	0.00	29.04	40.51	46.00	-5.49 QP
5	552.883	49.18	19.61	1.16	0.00	29.09	40.86	46.00	-5.14 QP
6	962.162	47.46	22.88	1.57	0.00	27.65	44.26	54.00	-9.74 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	WiFi Media Streaming Module	Product Model:	LS9X-AC11DBT-AC
Test By:	Mike	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

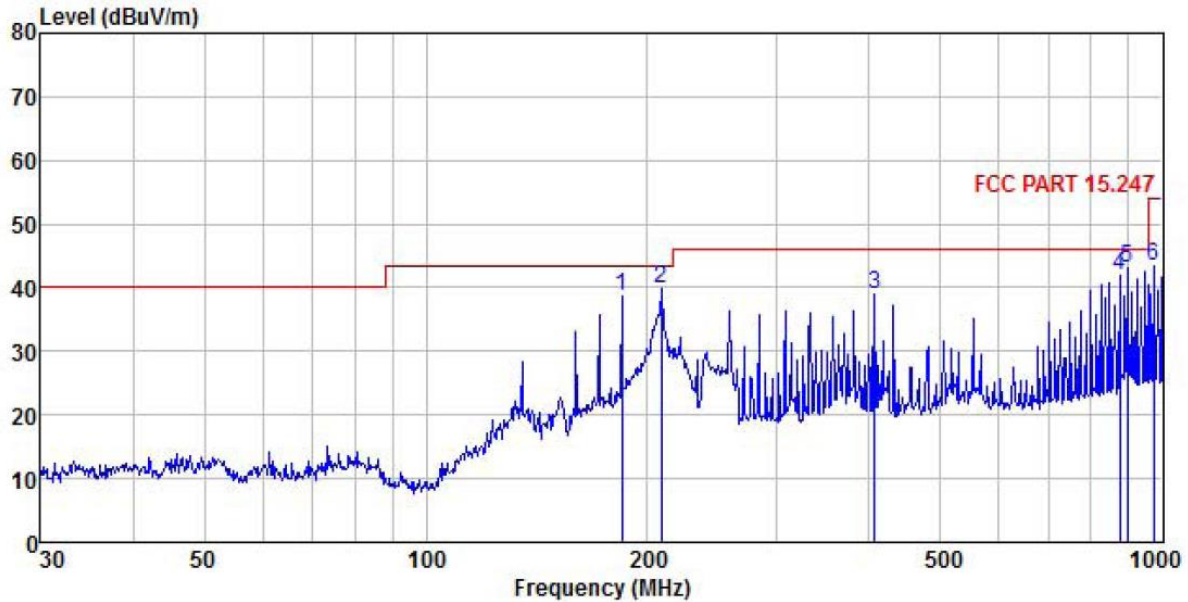

	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	184.490	49.79	17.16	0.69	0.00	28.94	38.70	43.50	-4.80 QP
2	208.580	49.54	18.34	0.73	0.00	28.78	39.83	43.50	-3.67 QP
3	406.088	47.70	19.11	1.00	0.00	28.79	39.02	46.00	-6.98 QP
4	875.247	46.47	22.00	1.45	0.00	27.94	41.98	46.00	-4.02 QP
5	896.997	46.87	22.52	1.48	0.00	27.89	42.98	46.00	-3.02 QP
6	972.337	46.40	22.94	1.57	0.00	27.59	43.32	54.00	-10.68 QP

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Above 1GHz

PCB antenna:

802.11b									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.74	30.81	6.81	2.46	41.82	47.00	74.00	-27.00	Vertical
4824.00	49.57	30.81	6.81	2.46	41.82	47.83	74.00	-26.17	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	38.96	30.81	6.81	2.46	41.82	37.22	54.00	-16.78	Vertical
4824.00	39.38	30.81	6.81	2.46	41.82	37.64	54.00	-16.36	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.29	30.93	6.85	2.47	41.84	46.70	74.00	-27.30	Vertical
4874.00	49.69	30.93	6.85	2.47	41.84	48.10	74.00	-25.90	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	38.69	30.93	6.85	2.47	41.84	37.10	54.00	-16.90	Vertical
4874.00	39.17	30.93	6.85	2.47	41.84	37.58	54.00	-16.42	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.31	31.05	6.89	2.48	41.86	46.87	74.00	-27.13	Vertical
4924.00	49.92	31.05	6.89	2.48	41.86	48.48	74.00	-25.52	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	38.36	31.05	6.89	2.48	41.86	36.92	54.00	-17.08	Vertical
4924.00	39.63	31.05	6.89	2.48	41.86	38.19	54.00	-15.81	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11g									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.95	30.81	6.81	2.46	41.82	47.21	74.00	-26.79	Vertical
4824.00	49.49	30.81	6.81	2.46	41.82	47.75	74.00	-26.25	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	38.85	30.81	6.81	2.46	41.82	37.11	54.00	-16.89	Vertical
4824.00	39.73	30.81	6.81	2.46	41.82	37.99	54.00	-16.01	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.04	30.93	6.85	2.47	41.84	47.45	74.00	-26.55	Vertical
4874.00	49.74	30.93	6.85	2.47	41.84	48.15	74.00	-25.85	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	38.62	30.93	6.85	2.47	41.84	37.03	54.00	-16.97	Vertical
4874.00	40.00	30.93	6.85	2.47	41.84	38.41	54.00	-15.59	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	49.51	31.05	6.89	2.48	41.86	48.07	74.00	-25.93	Vertical
4924.00	50.10	31.05	6.89	2.48	41.86	48.66	74.00	-25.34	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	38.15	31.05	6.89	2.48	41.86	36.71	54.00	-17.29	Vertical
4924.00	39.66	31.05	6.89	2.48	41.86	38.22	54.00	-15.78	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11n(HT20)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	49.22	30.81	6.81	2.46	41.82	47.48	74.00	-26.52	Vertical
4824.00	49.46	30.81	6.81	2.46	41.82	47.72	74.00	-26.28	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	38.75	30.81	6.81	2.46	41.82	37.01	54.00	-16.99	Vertical
4824.00	39.97	30.81	6.81	2.46	41.82	38.23	54.00	-15.77	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.07	30.93	6.85	2.47	41.84	47.48	74.00	-26.52	Vertical
4874.00	49.01	30.93	6.85	2.47	41.84	47.42	74.00	-26.58	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	38.67	30.93	6.85	2.47	41.84	37.08	54.00	-16.92	Vertical
4874.00	39.59	30.93	6.85	2.47	41.84	38.00	54.00	-16.00	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	49.21	31.05	6.89	2.48	41.86	47.77	74.00	-26.23	Vertical
4924.00	48.63	31.05	6.89	2.48	41.86	47.19	74.00	-26.81	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	38.82	31.05	6.89	2.48	41.86	37.38	54.00	-16.62	Vertical
4924.00	39.24	31.05	6.89	2.48	41.86	37.80	54.00	-16.20	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11n(HT40)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	49.58	30.87	6.83	2.46	41.83	47.91	74.00	-26.09	Vertical
4844.00	49.13	30.87	6.83	2.46	41.83	47.46	74.00	-26.54	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	38.67	30.87	6.83	2.46	41.83	37.00	54.00	-17.00	Vertical
4844.00	40.30	30.87	6.83	2.46	41.83	38.63	54.00	-15.37	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.84	30.93	6.85	2.47	41.84	48.25	74.00	-25.75	Vertical
4874.00	48.88	30.93	6.85	2.47	41.84	47.29	74.00	-26.71	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	38.91	30.93	6.85	2.47	41.84	37.32	54.00	-16.68	Vertical
4874.00	40.13	30.93	6.85	2.47	41.84	38.54	54.00	-15.46	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	49.68	30.99	6.87	2.48	41.85	48.17	74.00	-25.83	Vertical
4904.00	49.13	30.99	6.87	2.48	41.85	47.62	74.00	-26.38	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	38.57	30.99	6.87	2.48	41.85	37.06	54.00	-16.94	Vertical
4904.00	39.93	30.99	6.87	2.48	41.85	38.42	54.00	-15.58	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

PIFA antenna:

802.11b									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.19	30.81	6.81	2.46	41.82	46.45	74.00	-27.55	Vertical
4824.00	48.26	30.81	6.81	2.46	41.82	46.52	74.00	-27.48	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	40.43	30.81	6.81	2.46	41.82	38.69	54.00	-15.31	Vertical
4824.00	40.08	30.81	6.81	2.46	41.82	38.34	54.00	-15.66	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.42	30.93	6.85	2.47	41.84	46.83	74.00	-27.17	Vertical
4874.00	48.72	30.93	6.85	2.47	41.84	47.13	74.00	-26.87	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	40.70	30.93	6.85	2.47	41.84	39.11	54.00	-14.89	Vertical
4874.00	40.07	30.93	6.85	2.47	41.84	38.48	54.00	-15.52	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.16	31.05	6.89	2.48	41.86	46.72	74.00	-27.28	Vertical
4924.00	48.40	31.05	6.89	2.48	41.86	46.96	74.00	-27.04	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	40.55	31.05	6.89	2.48	41.86	39.11	54.00	-14.89	Vertical
4924.00	40.44	31.05	6.89	2.48	41.86	39.00	54.00	-15.00	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11g									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	47.43	30.81	6.81	2.46	41.82	45.69	74.00	-28.31	Vertical
4824.00	49.10	30.81	6.81	2.46	41.82	47.36	74.00	-26.64	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	40.07	30.81	6.81	2.46	41.82	38.33	54.00	-15.67	Vertical
4824.00	40.42	30.81	6.81	2.46	41.82	38.68	54.00	-15.32	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.58	30.93	6.85	2.47	41.84	45.99	74.00	-28.01	Vertical
4874.00	48.87	30.93	6.85	2.47	41.84	47.28	74.00	-26.72	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	40.43	30.93	6.85	2.47	41.84	38.84	54.00	-15.16	Vertical
4874.00	40.10	30.93	6.85	2.47	41.84	38.51	54.00	-15.49	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.05	31.05	6.89	2.48	41.86	46.61	74.00	-27.39	Vertical
4924.00	48.61	31.05	6.89	2.48	41.86	47.17	74.00	-26.83	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	40.68	31.05	6.89	2.48	41.86	39.24	54.00	-14.76	Vertical
4924.00	40.29	31.05	6.89	2.48	41.86	38.85	54.00	-15.15	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11n(HT20)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	46.95	30.81	6.81	2.46	41.82	45.21	74.00	-28.79	Vertical
4824.00	49.36	30.81	6.81	2.46	41.82	47.62	74.00	-26.38	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	40.08	30.81	6.81	2.46	41.82	38.34	54.00	-15.66	Vertical
4824.00	40.37	30.81	6.81	2.46	41.82	38.63	54.00	-15.37	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.53	30.93	6.85	2.47	41.84	44.94	74.00	-29.06	Vertical
4874.00	49.20	30.93	6.85	2.47	41.84	47.61	74.00	-26.39	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	40.01	30.93	6.85	2.47	41.84	38.42	54.00	-15.58	Vertical
4874.00	40.76	30.93	6.85	2.47	41.84	39.17	54.00	-14.83	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	46.40	31.05	6.89	2.48	41.86	44.96	74.00	-29.04	Vertical
4924.00	49.50	31.05	6.89	2.48	41.86	48.06	74.00	-25.94	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	39.88	31.05	6.89	2.48	41.86	38.44	54.00	-15.56	Vertical
4924.00	41.17	31.05	6.89	2.48	41.86	39.73	54.00	-14.27	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									

802.11n(HT40)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	45.54	30.87	6.83	2.46	41.83	43.87	74.00	-30.13	Vertical
4844.00	49.76	30.87	6.83	2.46	41.83	48.09	74.00	-25.91	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	39.34	30.87	6.83	2.46	41.83	37.67	54.00	-16.33	Vertical
4844.00	40.77	30.87	6.83	2.46	41.83	39.10	54.00	-14.90	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	45.93	30.93	6.85	2.47	41.84	44.34	74.00	-29.66	Vertical
4874.00	49.68	30.93	6.85	2.47	41.84	48.09	74.00	-25.91	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	39.71	30.93	6.85	2.47	41.84	38.12	54.00	-15.88	Vertical
4874.00	41.18	30.93	6.85	2.47	41.84	39.59	54.00	-14.41	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	46.17	30.99	6.87	2.48	41.85	44.66	74.00	-29.34	Vertical
4904.00	49.60	30.99	6.87	2.48	41.85	48.09	74.00	-25.91	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	39.40	30.99	6.87	2.48	41.85	37.89	54.00	-16.11	Vertical
4904.00	40.75	30.99	6.87	2.48	41.85	39.24	54.00	-14.76	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.									
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.									