



ELECTRICAL TESTING  
0839.01

Hermon Laboratories Ltd.  
Harakevet Industrial Zone, Binyamina 30500,  
Israel  
Tel. +972-4-6288001  
Fax. +972-4-6288277  
E-mail: mail@hermonlabs.com

# TEST REPORT

ACCORDING TO: FCC CFR 47 Part 15 subpart F, section 15.519;  
RSS-220 issue 1

FOR:  
**Pixie Technology Ltd.**  
**Thin Point**  
**Model:P1100**  
**FCC ID:2ADBO-P1100**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



## Table of contents

1	Applicant information.....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT .....	5
6.4	Transmitter characteristics .....	6
7	Transmitter tests according to 47CFR part 15 and RSS-220 requirements .....	7
7.1	Occupied bandwidth test .....	7
7.2	Radiated power density and Peak power within 50 MHz bandwidth .....	11
7.3	Radiated spurious emission measurements.....	16
7.4	Transmission duration requirements .....	41
8	APPENDIX A Test equipment and ancillaries used for tests.....	43
9	APPENDIX B Measurement uncertainties.....	44
10	APPENDIX C Test laboratory description .....	45
11	APPENDIX D Specification references .....	45
12	APPENDIX E Test equipment correction factors.....	46
13	APPENDIX F Abbreviations and acronyms.....	54



## 1 Applicant information

**Client name:** Pixie Technology Ltd.  
**Address:** 8 Hamada street, Bld. B, 3rd floor, Herzliya 46733, Israel  
**Telephone:** +972 77 921 5815  
**Fax:** +972 77 921 5833  
**E-mail:** tsachs@getpixie.com  
**Contact name:** Mr. Tsach Shwartz

## 2 Equipment under test attributes

**Product name:** Thin Point  
**Product type:** Transceiver  
**Model(s):** P1100  
**Serial number:** Prototype  
**Hardware version:** Rev1  
**Software release:** 001  
**Receipt date** 31-Jul-16

## 3 Manufacturer information

**Manufacturer name:** Pixie Technology Ltd.  
**Address:** 8 Hamada street, Bld. B, 3rd floor, Herzliya 46733, Israel  
**Telephone:** +972 77 921 5815  
**Fax:** +972 77 921 5833  
**E-Mail:** tsachs@getpixie.com  
**Contact name:** Mr. Tsach Shwartz

## 4 Test details

**Project ID:** 28663  
**Location:** Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel  
**Test started:** 31-Jul-16  
**Test completed:** 28-Aug-16  
**Re-test performed:** 8-Jun-17  
**Test specification(s):** FCC CFR 47 Part 15 subpart F, section 15.519; RSS-220 Issue 1



## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
FCC section 15.519(b), Occupied bandwidth	Pass
FCC section 15.519(c), RSS-220 section 5.3.1(d), Radiated power density	Pass
FCC section 15.519(c)/15.209, RSS-220 sections 5.3.1(c), 3.4, Radiated spurious emissions below 960 MHz	Pass
FCC section 15.519(c), (d), RSS-220 section 5.3.1(d), Radiated spurious emissions above 960 MHz	Pass
FCC section 15.519(e), RSS-220 section 5.3.1(g), Peak power within 50 MHz bandwidth	Pass
FCC section 15.519(a)(1), RSS-220 section 5.3.1(b), Transmission duration requirements	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report supersedes the previously issued test report identified by Doc ID:PIXRAD\_FCC.28663\_UWB\_rev1.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer	August 28, 2016; June 8, 2017	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	June 8, 2017	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	June 8, 2017	




## 6 EUT description

### 6.1 General information

The EUT, PixiePoint tag, is a very low power wireless device utilizing 2 wireless technologies: BLE (Bluetooth) to communicate with smartphones and UWB to measure distance between the tags. The tag is working in very low duty cycle. Most of the time the tag is advertising (sends BLE standard "existing" message). Advertise is done every 2 sec for 3 msec. The UWB radio is set to deep sleep. Once the smartphone responses the tag can communicate with the smartphone and via smartphone can communicate with other similar tags and measure Tag to Tag range using the UWB radio. The UWB radio is active for minimal time that is needed for range measurement – about 2 -3 msec. After the measurement sequence, the UWB is set to deep sleep again. The BLE (Bluetooth) and UWB radio do not work at the same time. There is one built-in antenna for UWB and BLE.

### 6.2 Test configuration

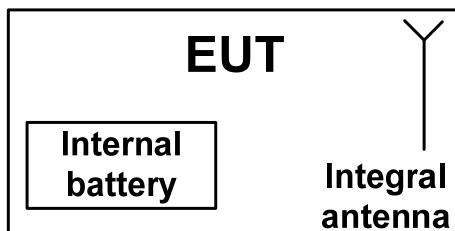

### 6.3 Changes made in EUT

No changes were performed in the EUT during testing.



## 6.4 Transmitter characteristics

Type of equipment							
V	Stand-alone (Equipment with or without its own control provisions)						
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)						
	Plug-in card (Equipment intended for a variety of host systems)						
Assigned frequency range		3774-4243.2 MHz, 4243.2-4742.4 MHz, 6240-6739.2 MHz					
Operating frequencies for FCC		3993.6 MHz (ch2), 4492.8 MHz (ch3), 6489.6 MHz (ch5)					
Operating frequencies for IC		6489.6 MHz (ch5)					
Is transmitter output power variable?		V	No				
			continuous variable				
		Yes	stepped variable with stepsize		dB		
			minimum RF power	dBm			
			maximum RF power	dBm			
Antenna connection							
unique coupling	standard connector		V	Integral	with temporary RF connector		
			V		without temporary RF connector		
Antenna/s technical characteristics							
Type	Manufacturer		Model number		Gain		
Internal Printed Omni	Pixie		P1100		0 dB		
Transmitter aggregate data rate/s		No payload					
Type of modulation		Burst position modulation (BPM) according to IEEE802.15.4-2011 UWB					
Modulating test signal (baseband)		Burst position modulation (BPM) according to IEEE802.15.4-2011 UWB					
Transmitter power source							
V	Battery	Nominal rated voltage	3.0 V	Battery type	Lithium Manganese Dioxide		
	DC	Nominal rated voltage					
	AC mains	Nominal rated voltage		Frequency	Hz		



HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.519(b), 15.503(d), Occupied bandwidth</b>		
<b>Test procedure:</b>	ANSI C63.10-2013, section 10.1		
<b>Test mode:</b>	Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b>	14-Aug-16 - 15-Aug-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 15 and RSS-220 requirements

### 7.1 Occupied bandwidth test

#### 7.1.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.1.1.

Table 7.1.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum allowed bandwidth, MHz
3100 - 10600	10	500

\* - Modulation envelope reference points are provided in terms of attenuation below the unmodulated carrier.

#### 7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit the unmodulated carrier and the reference peak power level was measured.
- 7.1.2.3 The EUT was set to transmit the normally modulated carrier.
- 7.1.2.4 The transmitter occupied bandwidth was measured with spectrum analyzer as a frequency delta between the reference points on modulation envelope and provided in Table 7.1.2 and the associated plots.

Figure 7.1.1 Occupied bandwidth test setup





HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(b), 15.503(d), Occupied bandwidth			
<b>Test procedure:</b> ANSI C63.10-2013, section 10.1			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 14-Aug-16 - 15-Aug-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

Table 7.1.2 Occupied bandwidth test results

DETECTOR USED: Peak hold  
RESOLUTION BANDWIDTH: 100 kHz  
VIDEO BANDWIDTH: 300 kHz  
MODULATION: GFSK  
MODULATION ENVELOPE REFERENCE POINTS: 10 dBc

Carrier frequency, MHz	Occupied bandwidth, MHz	Limit, MHz	Margin, MHz	Verdict
3993.6	581.458	500	81.458	Pass
4492.8	574.638	500	74.638	
6489.6	508.240	500	8.240	

**Reference numbers of test equipment used**

HL 3818							
---------	--	--	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(b), 15.503(d), Occupied bandwidth			
<b>Test procedure:</b> ANSI C63.10-2013, section 10.1			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 14-Aug-16 - 15-Aug-16			
Temperature: 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Plot 7.1.1 Occupied bandwidth test result at low frequency**

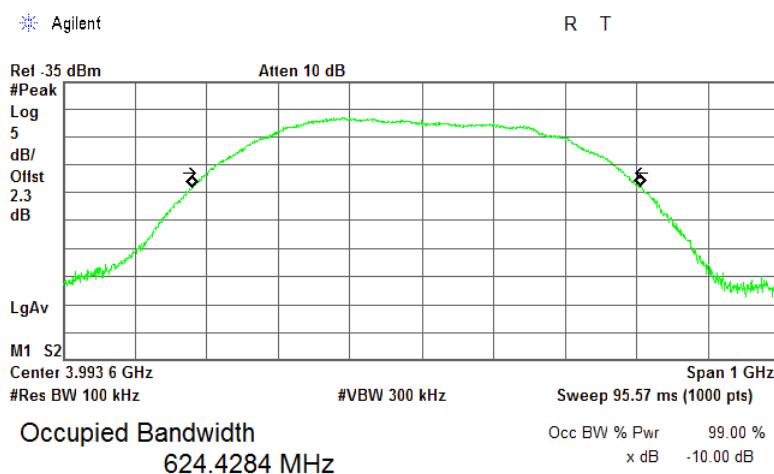

**Plot 7.1.2 Occupied bandwidth test result at mid frequency**

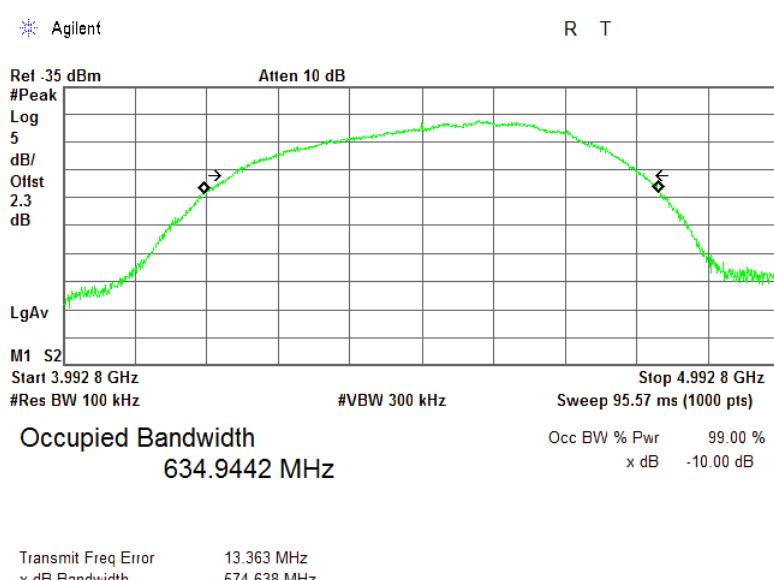




HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(b), 15.503(d), Occupied bandwidth			
<b>Test procedure:</b> ANSI C63.10-2013, section 10.1			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Aug-16 - 15-Aug-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

Plot 7.1.3 Occupied bandwidth test result at high frequency

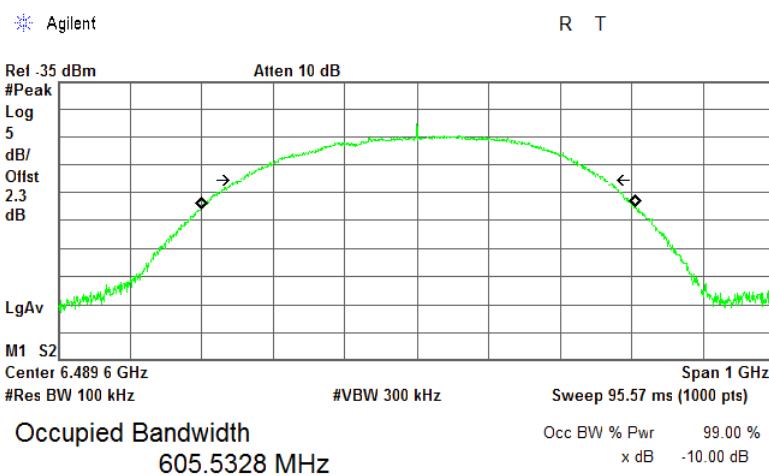



HERMON LABORATORIES

<b>Test specification:</b>	<b>Sections 15.519(c),15.519(e), RSS-220 sections 5.3.1(d), 5.3.1(g), Peak power within 50 MHz bandwidth and Radiated power density</b>		
<b>Test procedure:</b>	47 CFR, Section 15.521, ANSI C63.10-2013, section 10.3		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	15-Aug-16 - 23-Aug-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

## 7.2 Radiated power density and Peak power within 50 MHz bandwidth

### 7.2.1 General

This test was performed to measure effective radiated power emanated by transmitter at carrier frequency. Specification test limits are given in Table 7.2.1, Table 7.2.2.

**Table 7.2.1 Power spectral density limit (EIRP)**

Assigned frequency band, MHz	EIRP	Equivalent field strength limit @ 3m, dB(µV/m)/1MHz*
	dBm/1MHz	
<b>FCC section 15.519(c)</b>		
3100 - 10600	-41.3	53.9
<b>RSS-220 section 5.3.1(d)</b>		
4750-10600	-41.3	53.9

\* - Equivalent field strength, dB(µV/m) = EIRP, dBm + 95.2 dB

**Table 7.2.2 Peak level of emissions contained within 50 MHz (EIRP)**

Assigned frequency band, MHz	EIRP	Equivalent field strength limit @ 3m, dB(µV/m) in 50 MHz*
	dBm	
3100 - 10600	0	95.2

\* - Equivalent field strength, dB(µV/m) = EIRP, dBm + 95.2 dB

### 7.2.2 Test procedure for field strength measurements


- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.
- 7.2.2.2 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was swept throughout the range, specified in Table 7.2.3, in both vertical and horizontal polarizations.
- 7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.4 and shown in the associated plots.



HERMON LABORATORIES

<b>Test specification:</b>	<b>Sections 15.519(c),15.519(e), RSS-220 sections 5.3.1(d), 5.3.1(g), Peak power within 50 MHz bandwidth and Radiated power density</b>		
<b>Test procedure:</b>	47 CFR, Section 15.521, ANSI C63.10-2013, section 10.3		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	15-Aug-16 - 23-Aug-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

Figure 7.2.1 Setup for carrier field strength measurements

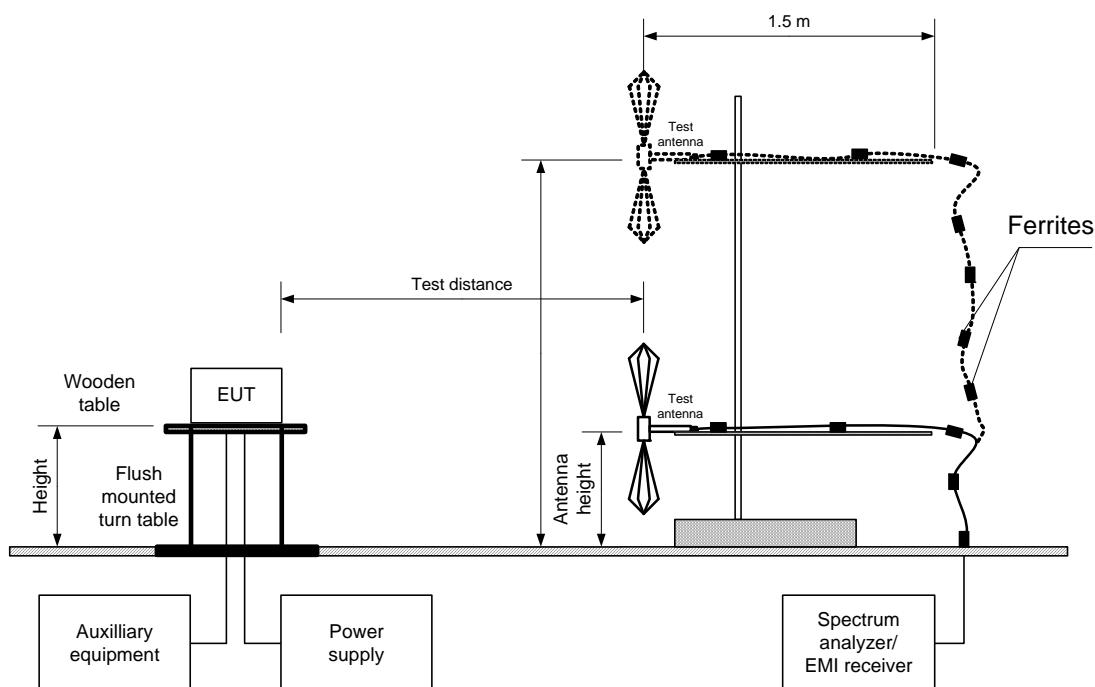



HERMON LABORATORIES

Report ID: PIXRAD\_FCC.28663\_UWB\_rev2.docx

Date of Issue: 8-Jun-17

<b>Test specification:</b>	<b>Sections 15.519(c),15.519(e), RSS-220 sections 5.3.1(d), 5.3.1(g), Peak power within 50 MHz bandwidth and Radiated power density</b>		
<b>Test procedure:</b>	47 CFR, Section 15.521, ANSI C63.10-2013, section 10.3		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	15-Aug-16 - 23-Aug-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Table 7.2.3 Power spectral density test results**

ASSIGNED FREQUENCY RANGE: 3100 – 10600 MHz  
 TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 EUT HEIGHT: 1.5 m  
 TEST ANTENNA HEIGHTS RANGE: 1.0 – 4.0 m  
 DETECTOR USED: AVR  
 VIDEO BANDWIDTH: > Resolution bandwidth  
 TEST ANTENNA TYPE: Horn  
 MODULATION: GFSK

Frequency, MHz	Equivalent field strength, dB(μV/m)/1MHz	EIRP, dBm*	Limit, dBm	Margin, dB**	Verdict
<b>FCC section 15.519(c)</b>					
3993.6	52.57	-42.63	-41.3	-1.33	Pass
4639.1	53.52	-41.68	-41.3	-0.38	Pass
6489.6	52.19	-43.01	-41.3	-1.71	Pass
<b>RSS-220 section 5.3.1(d)</b>					
6489.6	52.19	-43.01	-41.3	-1.71	Pass

\*- EIRP, dBm= Equivalent field strength, dB(μV/m)/1 MHz - 95.2 dB

\*\*- Margin, dB = EIRP, dBm –limit, dBm.

**Table 7.2.4 Peak power level contained within 50 MHz test results**

ASSIGNED FREQUENCY RANGE: 3100 – 10600 MHz  
 TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 EUT HEIGHT: 1.5 m  
 TEST ANTENNA HEIGHTS RANGE: 1.0 – 4.0 m  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: > Resolution bandwidth  
 TEST ANTENNA TYPE: Horn  
 MODULATION: GFSK

Frequency, MHz	RBW, MHz	Equivalent field strength, dB(μV/m) in 50 MHz	EIRP, dBm*	Limit, dBm	Margin, dB*	Verdict
3993.6	1	92.89	-2.31	0	-2.31	Pass
4492.8	1	94.30	-0.90	0	-0.90	Pass
6489.6	1	94.26	-0.94	0	-0.94	Pass

\*- EIRP, dBm= Equivalent field strength, dB(μV/m) -95.2 dB

\*\*- Margin, dB = EIRP, dBm –limit, dBm.

\*\*\*- The power reading on the spectrum analyser can be directly related to the peak power limit when a spectrum analyser resolution bandwidth of 50 MHz is used for the measurements. A spectrum analyser resolution bandwidth of 1 MHz was used instead, the maximum peak power was increased by a factor of  $20 \log (50/1) = 34$  dB, where 1 represents the measurement bandwidth used (refer to OFF SET=20 log 50/1=34 dB on plots 7.2.1 to 7.2.3).

**Reference numbers of test equipment used**



HL 3818	HL 3901	HL 4917	HL 4933			
---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

<b>Test specification:</b>	<b>Sections 15.519(c),15.519(e), RSS-220 sections 5.3.1(d), 5.3.1(g), Peak power within 50 MHz bandwidth and Radiated power density</b>		
<b>Test procedure:</b>	47 CFR, Section 15.521, ANSI C63.10-2013, section 10.3		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	15-Aug-16 - 23-Aug-16	<b>Verdict:</b>	<b>PASS</b>
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

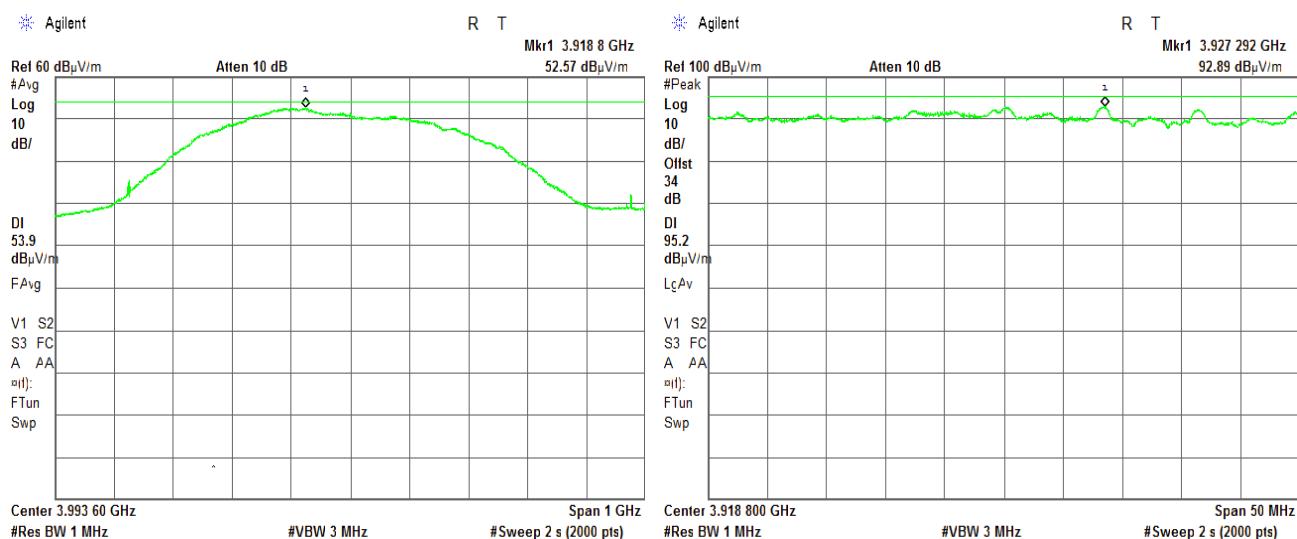
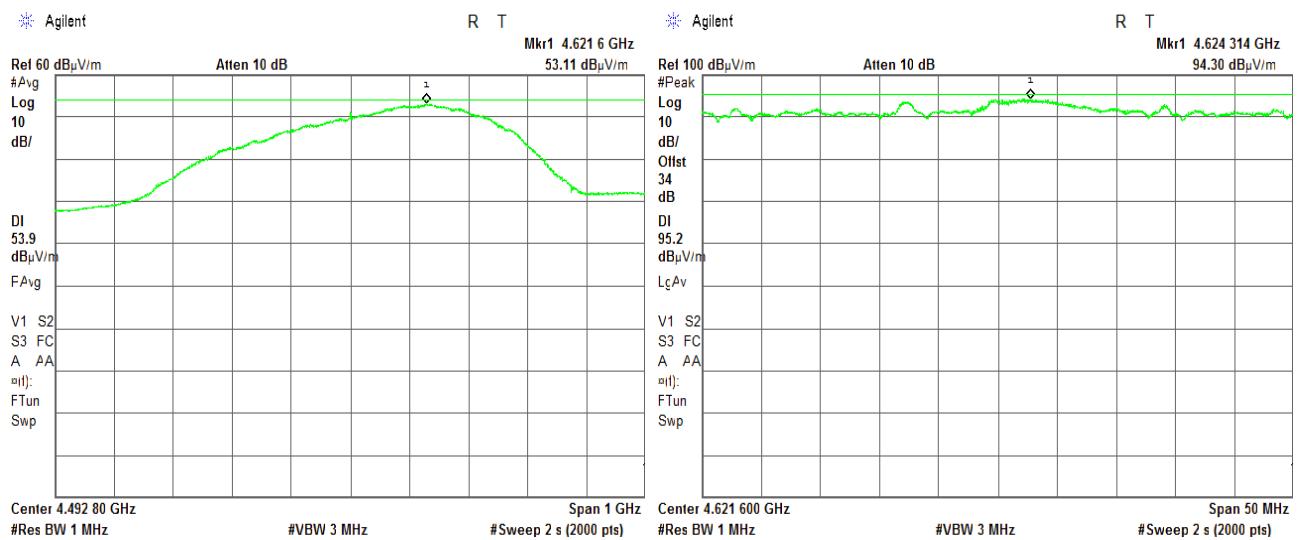
**Plot 7.2.1 Mean power spectral density and Peak level at low frequency****Plot 7.2.2 Mean power spectral density and Peak level at mid frequency**



HERMON LABORATORIES

<b>Test specification:</b>	<b>Sections 15.519(c),15.519(e), RSS-220 sections 5.3.1(d), 5.3.1(g), Peak power within 50 MHz bandwidth and Radiated power density</b>		
<b>Test procedure:</b>	47 CFR, Section 15.521, ANSI C63.10-2013, section 10.3		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	15-Aug-16 - 23-Aug-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Plot 7.2.3 Mean power spectral density and Peak level at high frequency**

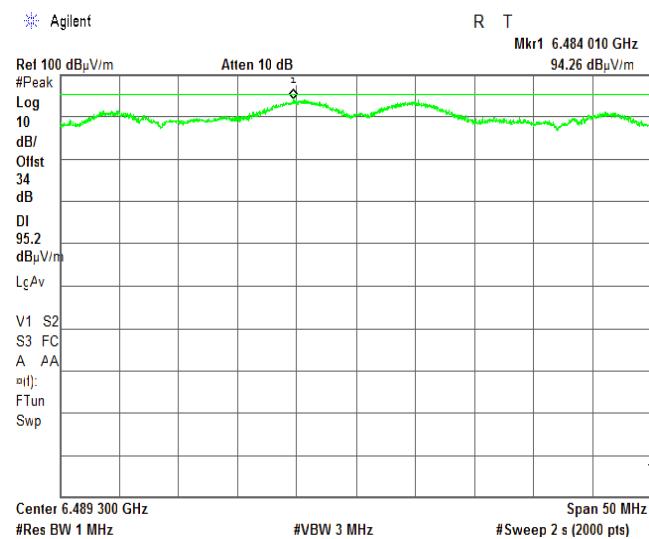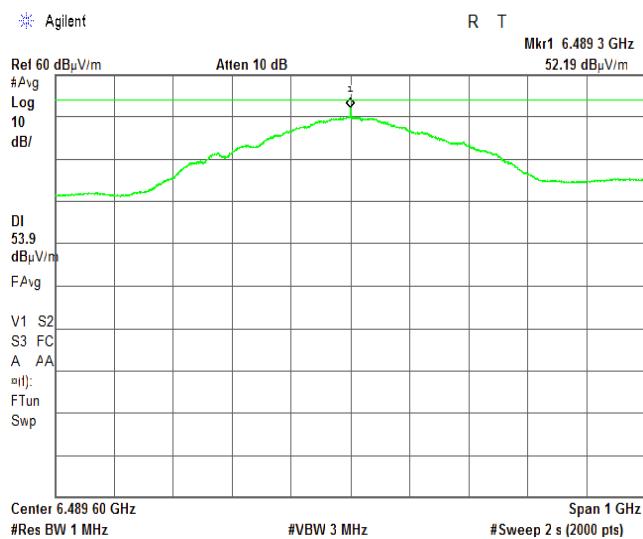



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
Temperature: 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

## 7.3 Radiated spurious emission measurements

### 7.3.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.3.1, Table 7.3.2, Table 7.3.3.

Table 7.3.1 Radiated spurious emission test limits according to section 15.209

Frequency, MHz	Field strength at 3 m, dB(µV/m)		
	Within restricted bands		
	Peak	Quasi Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**
0.090 – 0.110	NA	108.5 – 106.8**	NA
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**
0.490 – 1.705	NA	73.8 – 63.0**	NA
1.705 – 30.0*		69.5	
30 – 88		40.0	
88 – 216		43.5	
216 – 960		46.0	

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\*- The limit decreases linearly with the logarithm of frequency.

Table 7.3.2 Radiated emission average limits according to sections 15.519(c), 15.519(d)

Frequency, MHz	RBW, kHz	EIRP of spurious, dBm	Equivalent field strength limit @ 3m, dB(µV/m)***
960-1610	1000	-75.3	19.9
1610-1990	1000	-63.3	31.9
1990-3100	1000	-61.3	33.9
3100-10600	1000	-41.3	53.9
Above 10600	1000	-61.3	33.9
1164-1240	≥1	-85.3	9.9
1559-1610	≥1	-85.3	9.9

\*\*\*- Equivalent field strength, dB(µV/m) = EIRP, dBm - 95.2 dB

Table 7.3.3 Radiated emission average limits according to RSS-220 section 5.3.1(d)

Frequency, MHz	RBW, kHz	EIRP of spurious, dBm	Equivalent field strength limit @ 3m, dB(µV/m)***
960-1610	1000	-75.3	19.9
1610-4750	1000	-70.0	25.2
4750-10600	1000	-41.3	53.9
Above 10600	1000	-61.3	33.9
1164-1240	≥1	-85.3	9.9
1559-1610	≥1	-85.3	9.9

\*\*\*- Equivalent field strength, dB(µV/m) = EIRP, dBm - 95.2 dB



HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions</b>		
<b>Test procedure:</b>	ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	23-Aug-16; 8-Jun-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

### 7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.
- 7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.
- 7.3.2.3 The worst test results (the lowest margins) were recorded in Table 7.3.4 and shown in the associated plots.

### 7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

- 7.3.3.1 The EUT was set up as shown in Figure 7.3.2, Figure 7.3.3, energized and the performance check was conducted.
- 7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.
- 7.3.3.3 The worst test results (the lowest margins) were recorded in Table 7.3.4 and shown in the associated plots.

### 7.3.4 Test procedure for spurious emission field strength measurements in 1164-1240 MHz and 1559-1610 MHz

- 7.3.4.1 The EUT was set up as shown in Figure 7.3.3 and energized.
- 7.3.4.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.
- 7.3.4.3 The radiated emissions were measured with a Spectrum analyzer using an RMS detector. The RBW of 1 kHz and VBW of 3 kHz with a 1 msec averaging time were used. The SA settings are shown on the attached Plot 7.3.7 to Plot 7.3.21.
- 7.3.4.4 The worst test results (the lowest margins) were recorded in Table 7.3.4 and shown in the associated plots.



HERMON LABORATORIES

Report ID: PIXRAD\_FCC.28663\_UWB\_rev2.docx

Date of Issue: 8-Jun-17

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

Figure 7.3.1 Setup for spurious emission field strength measurements in 9 kHz to 30 MHz band


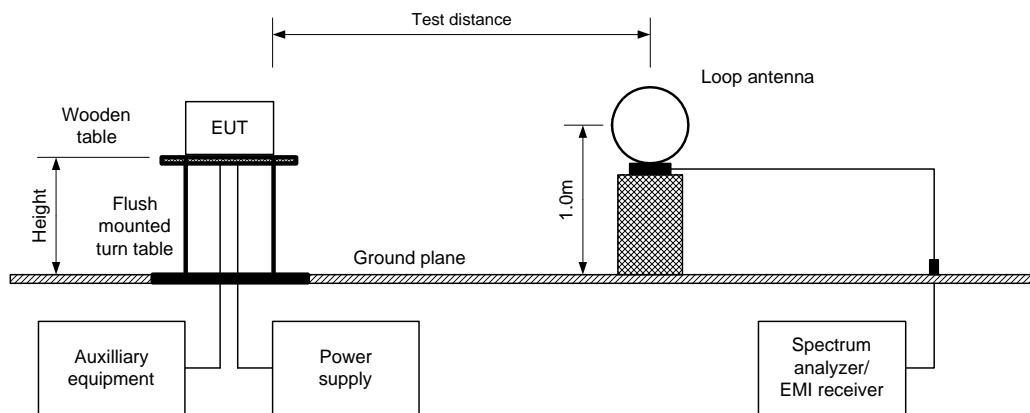


Figure 7.3.2 Setup for spurious emission field strength measurements above 30 MHz




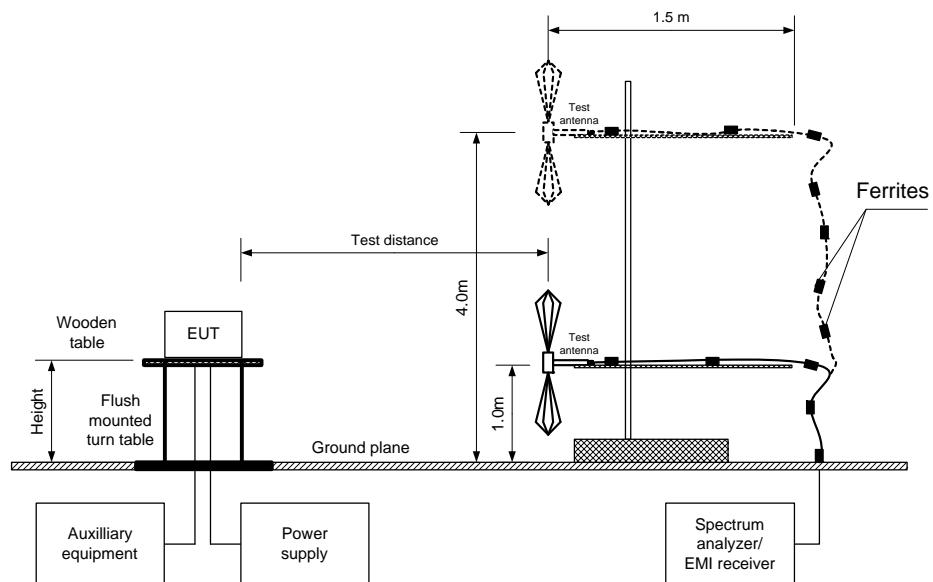

HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

Figure 7.3.3 Setup for spurious emission field strength measurements above 1000 MHz

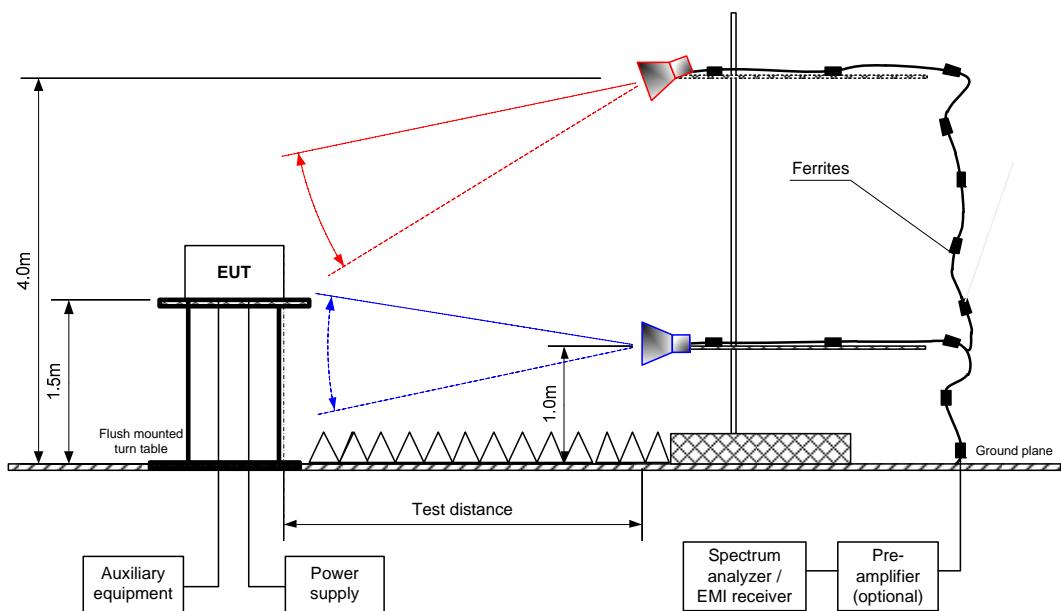



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions							
<b>Test procedure:</b>		ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521					
<b>Test mode:</b>	Compliance			<b>Verdict:</b> PASS			
<b>Date(s):</b>	23-Aug-16; 8-Jun-17						
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %		<b>Air Pressure:</b> 1007 hPa		<b>Power:</b> Battery		
<b>Remarks:</b>							

**Table 7.3.4 Spurious emission field strength test results**

ASSIGNED FREQUENCY RANGE:	3100 - 10600 MHz
TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
INVESTIGATED FREQUENCY RANGE:	0.009 – 40000 MHz
DETECTOR USED:	RMS
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)
MODULATION:	GFSK

**FCC section 15.519(c)**

Frequency, MHz	Field strength, dB( $\mu$ V/m)	RBW, kHz	Antenna polarization	EIRP, dBm*	Limit, dBm	Margin, dB**	Verdict
<b>Low carrier frequency 3993.6 MHz</b>							
1188.03	-0.65	10	Vertical	-95.85	-85.3	-10.55	Pass
1584.04	1.55	3	Vertical	-93.65	-85.3	-8.35	Pass
2688.10	24.56	1000	Vertical	-70.64	-61.3	-9.34	Pass
<b>Mid carrier frequency 4492.8 MHz</b>							
1187.91	1.30	10	Vertical	-93.9	-85.3	-8.6	Pass
1584.04	0.10	3	Vertical	-95.1	-85.3	-9.8	Pass
3024.10	24.55	1000	Vertical	-70.65	-61.3	-9.35	Pass
<b>High carrier frequency 6489.6 MHz</b>							
1188.10	0.85	10	Vertical	-94.35	-85.3	-9.05	Pass
1584.04	0.21	3	Vertical	-94.99	-85.3	-9.69	Pass
3024.50	24.62	1000	Vertical	-70.58	-61.3	-9.28	Pass

**RSS-220 section 5.3.1(d)**

Frequency, MHz	Field strength, dB( $\mu$ V/m)	RBW, kHz	Antenna polarization	EIRP, dBm*	Limit, dBm	Margin, dB**	Verdict
<b>Low carrier frequency 3993.6 MHz</b>							
1188.03	-0.65	10	Vertical	-95.85	-85.3	-10.55	Pass
1584.04	1.55	3	Vertical	-93.65	-85.3	-8.35	Pass
2688.10	24.56	1000	Vertical	-70.64	-70.0	-0.64	Pass
<b>Mid carrier frequency 4492.8 MHz</b>							
1187.91	1.30	10	Vertical	-93.9	-85.3	-8.6	Pass
1584.04	0.10	3	Vertical	-95.1	-85.3	-9.8	Pass
3024.10	24.55	1000	Vertical	-70.65	-70.0	-0.65	Pass
<b>High carrier frequency 6489.6 MHz</b>							
1188.10	0.85	10	Vertical	-94.35	-85.3	-9.05	Pass
1584.04	0.21	3	Vertical	-94.99	-85.3	-9.69	Pass
3024.50	24.62	1000	Vertical	-70.58	-70.0	-0.58	Pass

\*-EIRP, dBm = Field strength, dB( $\mu$ V/m) – 95.2 dB

\*\*- Margin = EIRP, dBm – specification limit.

**Reference numbers of test equipment used**

HL 0446	HL 0604	HL 3818	HL 3901	HL 3903	HL 4353	HL 4722	HL 4933
HL 4956							

Full description is given in Appendix A.



HERMON LABORATORIES


<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Plot 7.3.1 Radiated emission measurements in 9 - 150 kHz range**

TEST SITE: Semi anechoic chamber  
CARRIER FREQUENCY: Low, Mid, High  
ANTENNA POLARIZATION: Vertical and Horizontal  
TEST DISTANCE: 3 m



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 9.1 kHz  
70.89 dB $\mu$ V/m

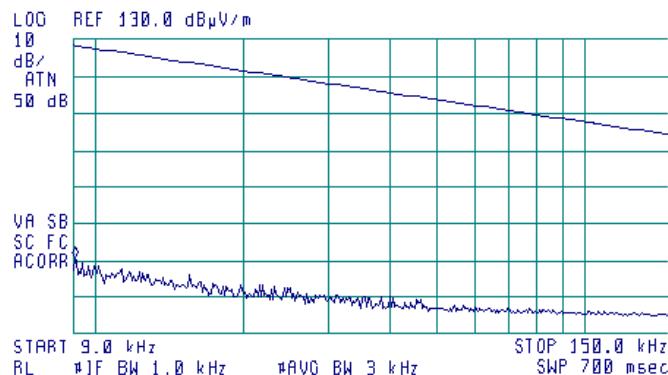


**Plot 7.3.2 Radiated emission measurements in 0.15 - 30 MHz range**

TEST SITE: Semi anechoic chamber  
CARRIER FREQUENCY: Low, Mid, High  
ANTENNA POLARIZATION: Vertical and Horizontal  
TEST DISTANCE: 3 m



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 150 kHz  
54.84 dB $\mu$ V/m

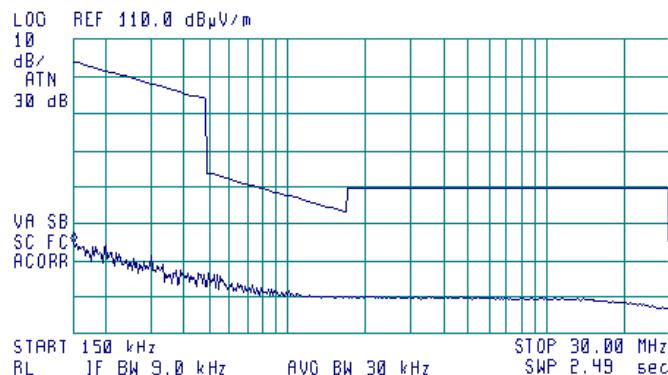



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Plot 7.3.3 Radiated emission measurements in 30 - 960 MHz range**

TEST SITE: Semi anechoic chamber


CARRIER FREQUENCY: Low, Mid, High

ANTENNA POLARIZATION: Vertical and Horizontal

TEST DISTANCE: 3 m



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 923.7 MHz  
32.00 dB $\mu$ V/m

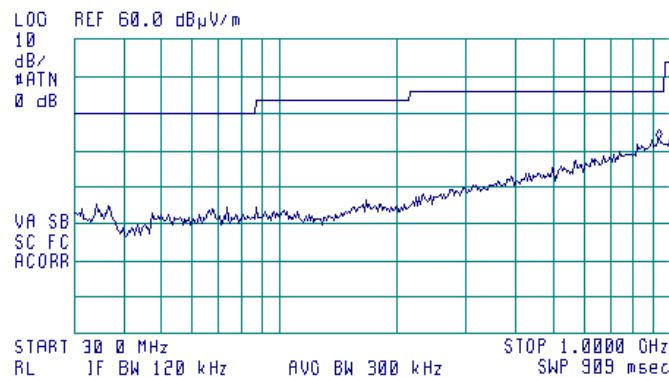





HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
Temperature: 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

#### Plot 7.3.4 Radiated emission measurements in 960 – 1610 MHz range

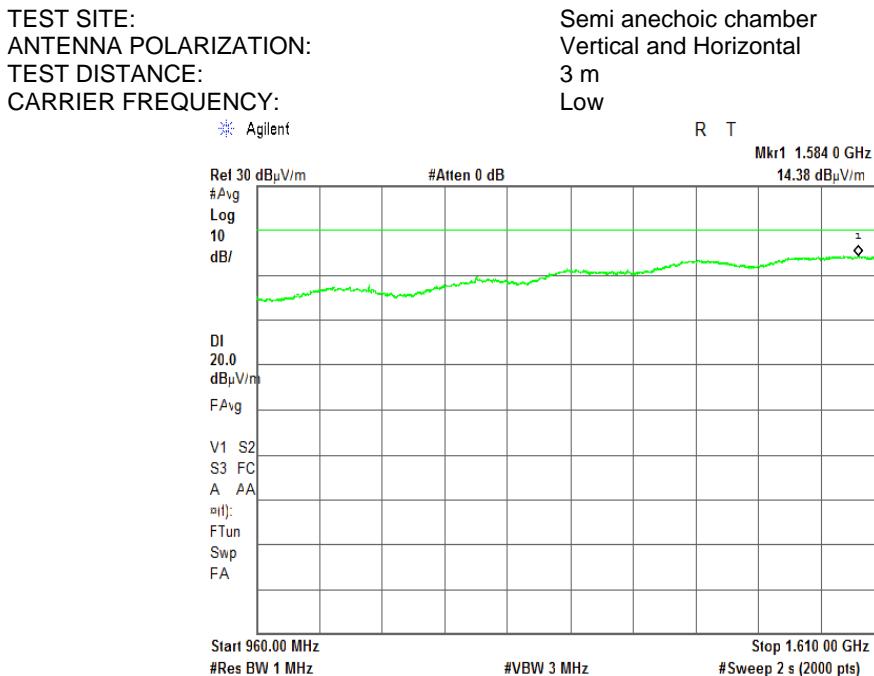

#### Plot 7.3.5 Radiated emission measurements in 960 – 1610 MHz range

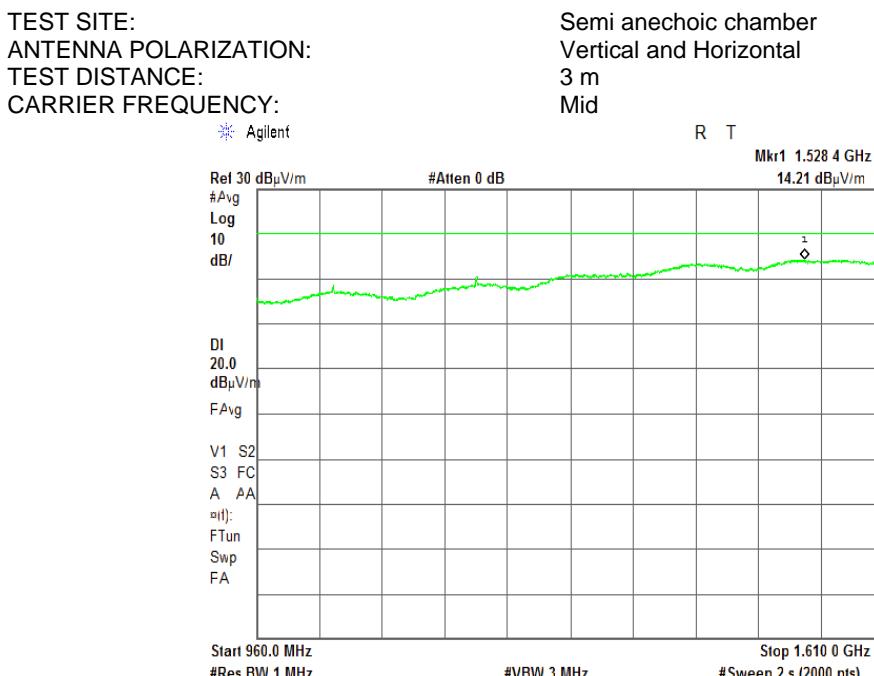



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Plot 7.3.6 Radiated emission measurements in 960 – 1610 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:


High

Agilent

R T

Mkr1 1.527 7 GHz

14.17 dB $\mu$ V/m

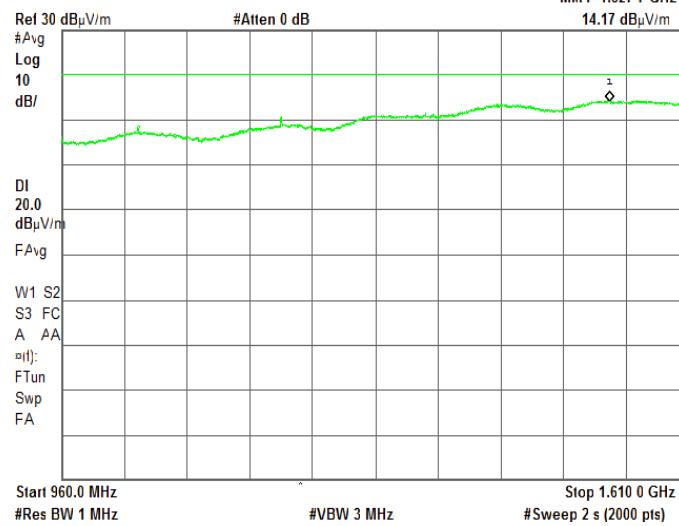



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance		<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b>	23-Aug-16; 8-Jun-17	<b>Air Pressure:</b>	1007 hPa
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Power:</b>	Battery
<b>Remarks:</b>			

**Plot 7.3.7 Radiated emission measurements in 1164 – 1190 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Low

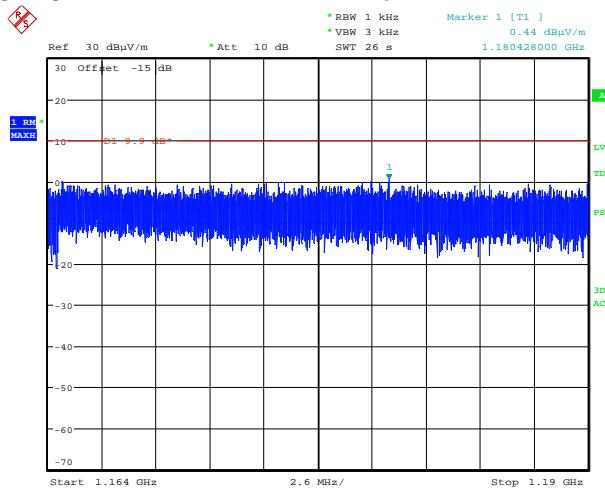

Date: 8.JUN.2017 03:42:52

**Example:** Sweep points 26001, span 26 MHz, sweep time 26 s or 1 ms/point.**Plot 7.3.8 Radiated emission measurements in 1904 – 1216 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Low

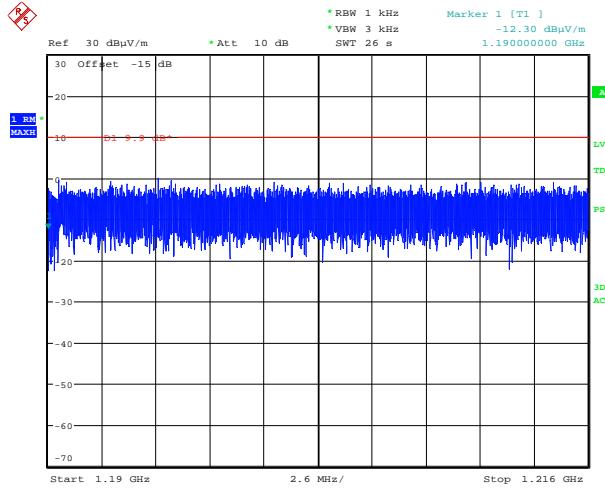

Date: 8.JUN.2017 03:47:16



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b>	23-Aug-16; 8-Jun-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

### Plot 7.3.9 Radiated emission measurements in 1216 – 1240 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Low

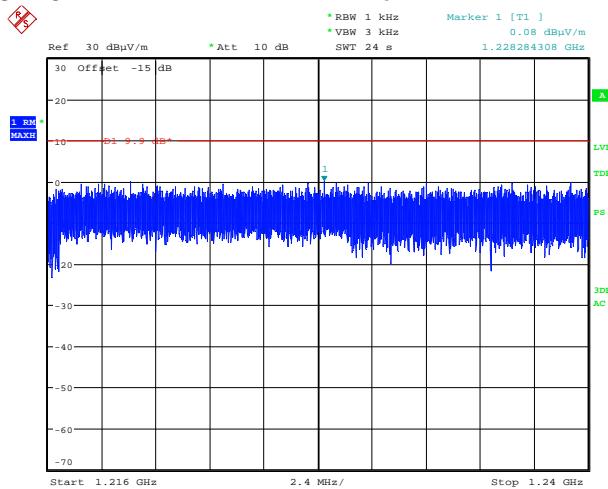

Date: 8.JUN.2017 03:49:24

### Plot 7.3.10 Radiated emission measurements in 1164 – 1190 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Mid

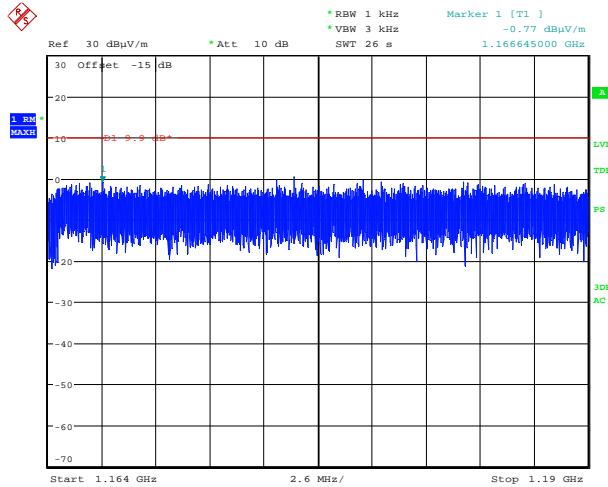

Date: 8.JUN.2017 04:18:07



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b>	23-Aug-16; 8-Jun-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

#### Plot 7.3.11 Radiated emission measurements in 1190 – 1216 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Mid

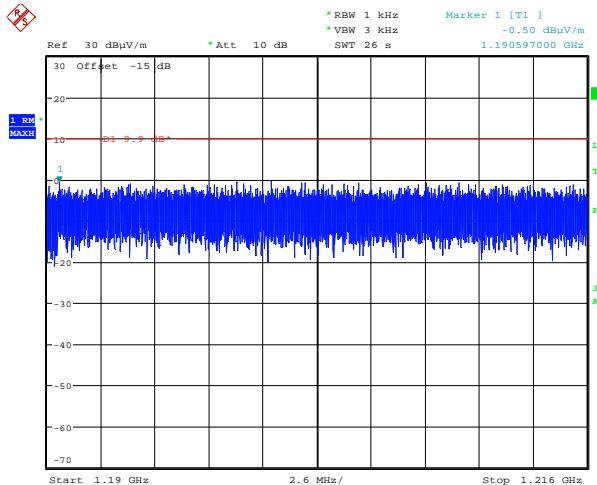

Date: 8.JUN.2017 05:14:07

#### Plot 7.3.12 Radiated emission measurements in 1216 – 1240 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Mid

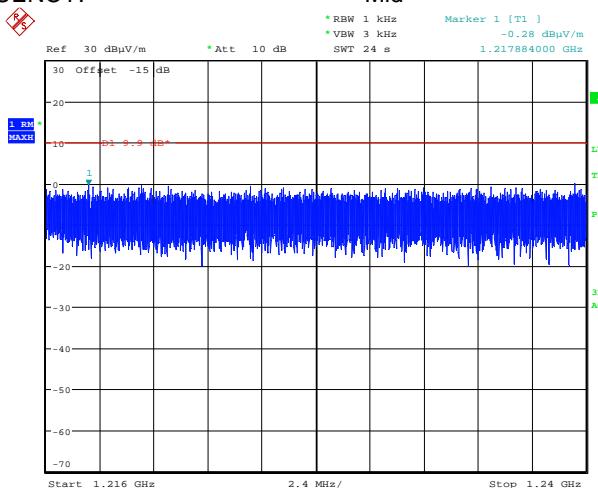

Date: 8.JUN.2017 05:17:11



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b>	23-Aug-16; 8-Jun-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

#### Plot 7.3.13 Radiated emission measurements in 1164 – 1190 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

High

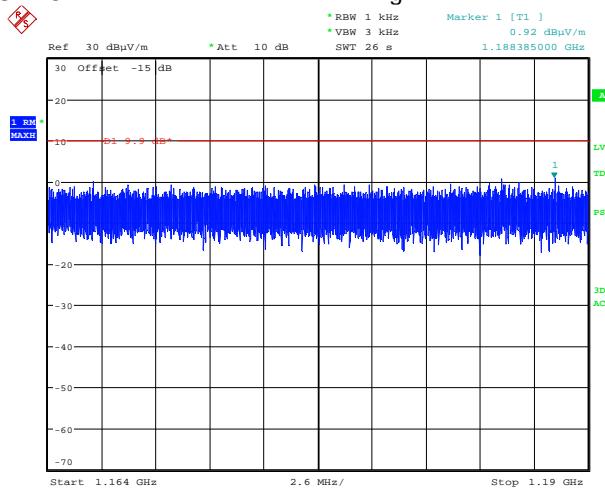

Date: 8.JUN.2017 04:38:53

#### Plot 7.3.14 Radiated emission measurements in 1190 – 1216 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

High

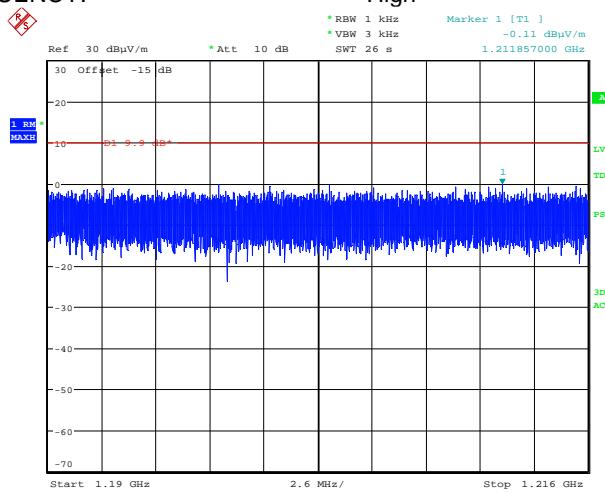

Date: 8.JUN.2017 04:42:54



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance		<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b>	23-Aug-16; 8-Jun-17	<b>Air Pressure:</b>	1007 hPa
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Power:</b>	Battery
<b>Remarks:</b>			

**Plot 7.3.15 Radiated emission measurements in 1216 – 1240 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

High

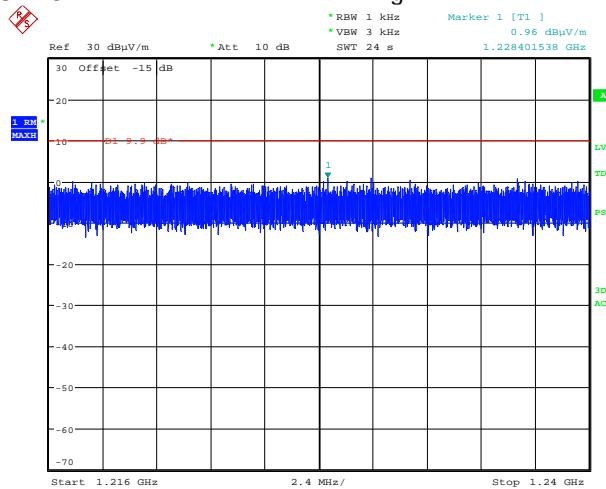

Date: 8.JUN.2017 05:18:46

**Plot 7.3.16 Radiated emission measurements in 1559 – 1585 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Low

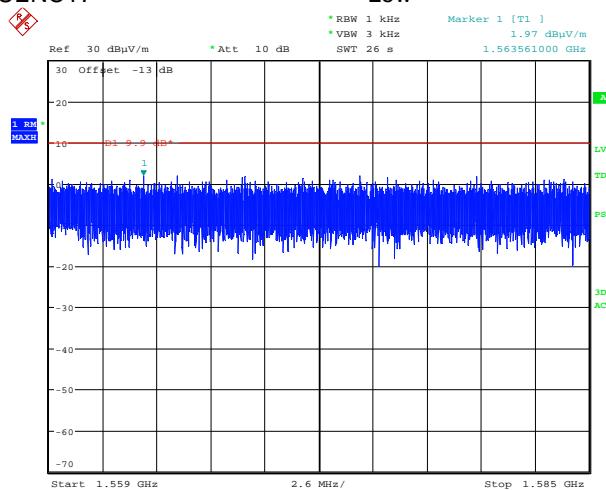

Date: 8.JUN.2017 03:56:27



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance		<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b>	23-Aug-16; 8-Jun-17	<b>Air Pressure:</b>	1007 hPa
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Power:</b>	Battery
<b>Remarks:</b>			

**Plot 7.3.17 Radiated emission measurements in 1585 – 1610 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Low

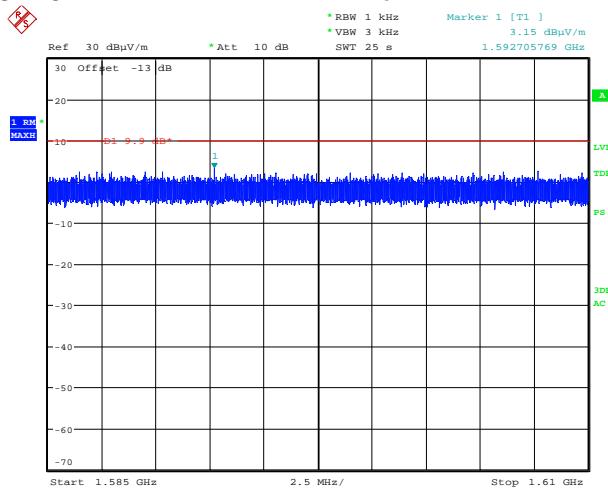

Date: 8.JUN.2017 05:06:11

**Plot 7.3.18 Radiated emission measurements in 1559 – 1585 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Mid

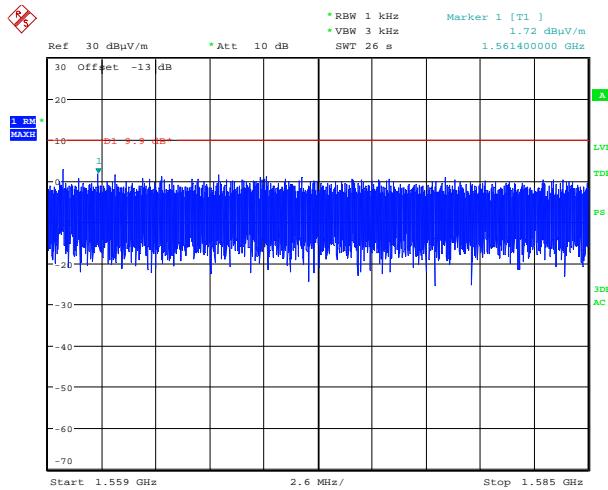

Date: 8.JUN.2017 04:09:46



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b>	23-Aug-16; 8-Jun-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

#### Plot 7.3.19 Radiated emission measurements in 1585 – 1610 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Mid

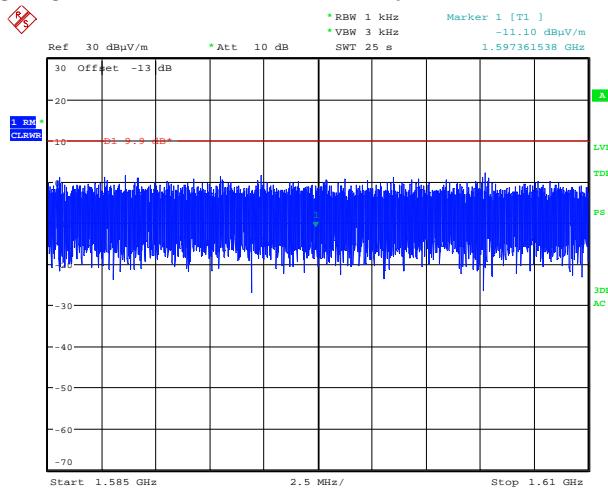

Date: 8.JUN.2017 04:13:05

#### Plot 7.3.20 Radiated emission measurements in 1559 – 1585 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:


Vertical and Horizontal

TEST DISTANCE:

3 m

CARRIER FREQUENCY:

High

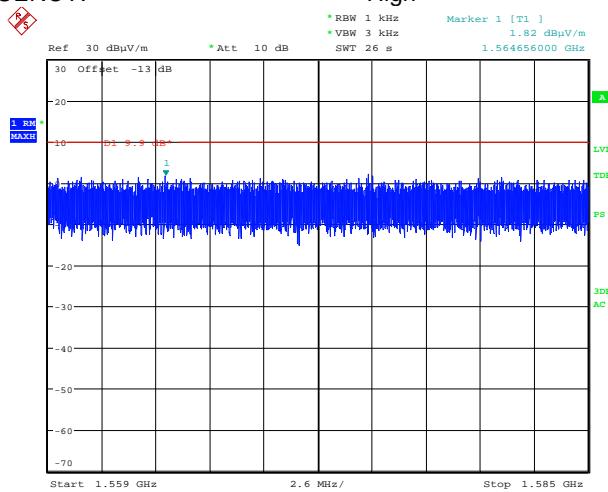

Date: 8.JUN.2017 04:51:43




HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17		<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Temperature:</b> 23 °C <b>Relative Humidity:</b> 56 %			<b>Remarks:</b>

**Plot 7.3.21 Radiated emission measurements in 1585 – 1610 MHz range**

TEST SITE: Semi anechoic chamber  
ANTENNA POLARIZATION: Vertical and Horizontal  
TEST DISTANCE: 3 m  
CARRIER FREQUENCY: High

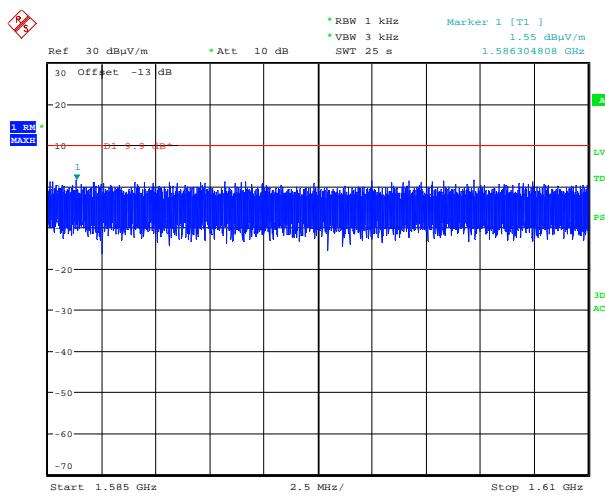

Date: 8.JUN.2017 04:55:49



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
Temperature: 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Plot 7.3.22 Radiated emission measurements in 1610 – 1990 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Low

Agilent

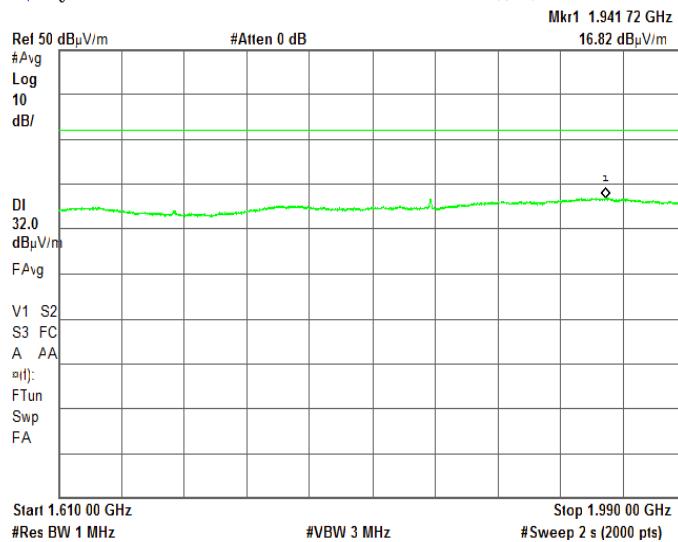

**Plot 7.3.23 Radiated emission measurements in 1610 – 1990 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Mid

Agilent

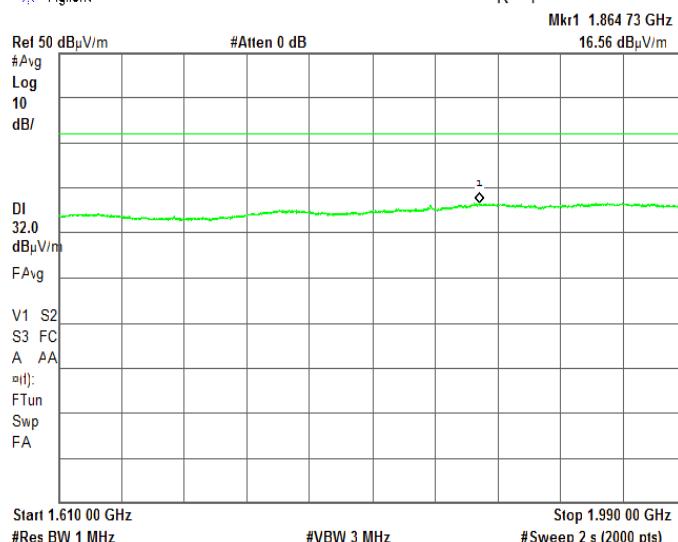



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
Temperature: 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Plot 7.3.24 Radiated emission measurements in 1610 – 1990 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

High

Agilent

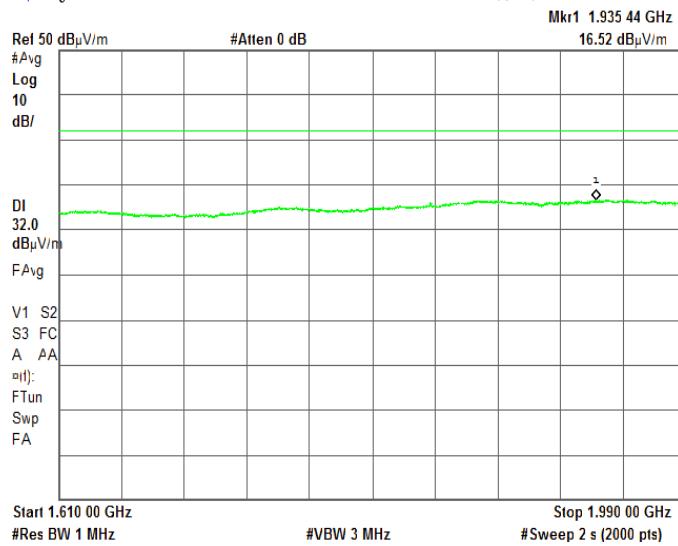

**Plot 7.3.25 Radiated emission measurements in 1990 – 3100 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Low

Agilent

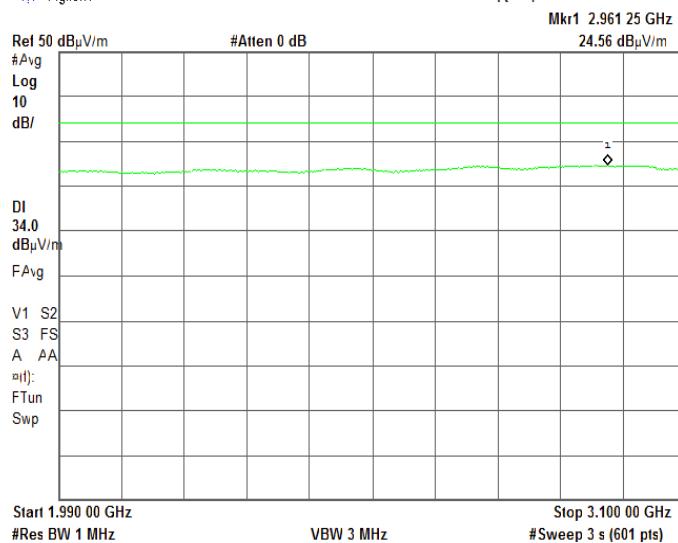



HERMON LABORATORIES

Report ID: PIXRAD\_FCC.28663\_UWB\_rev2.docx

Date of Issue: 8-Jun-17

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
Temperature: 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

Plot 7.3.26 Radiated emission measurements in 1990 – 3100 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Mid

Agilent

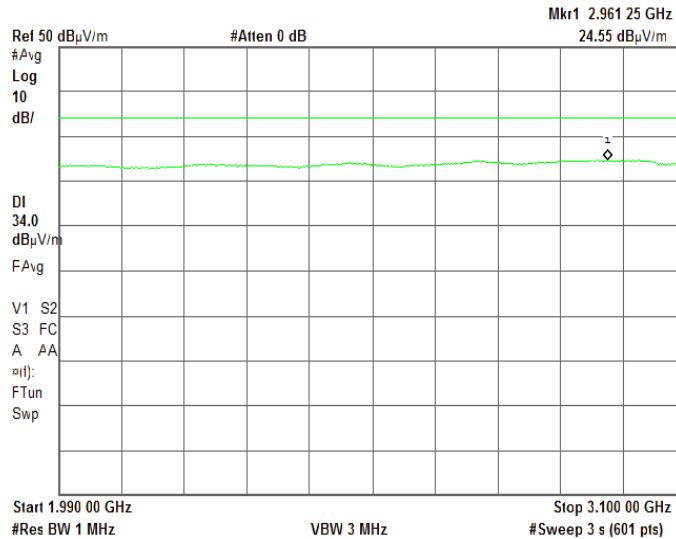

Plot 7.3.27 Radiated emission measurements in 1990 – 3100 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

High

Agilent

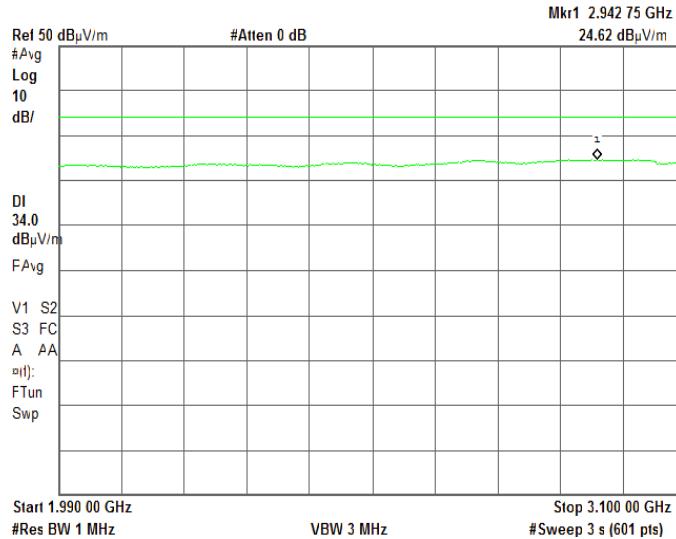



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
Temperature: 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

Plot 7.3.28 Radiated emission measurements in 3100 – 6000 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Low

Agilent

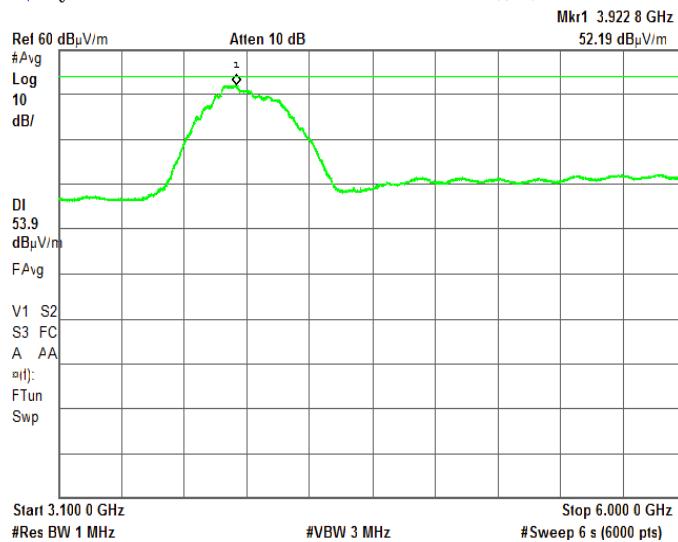

Plot 7.3.29 Radiated emission measurements in 3100 – 6000 MHz range

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Mid

Agilent

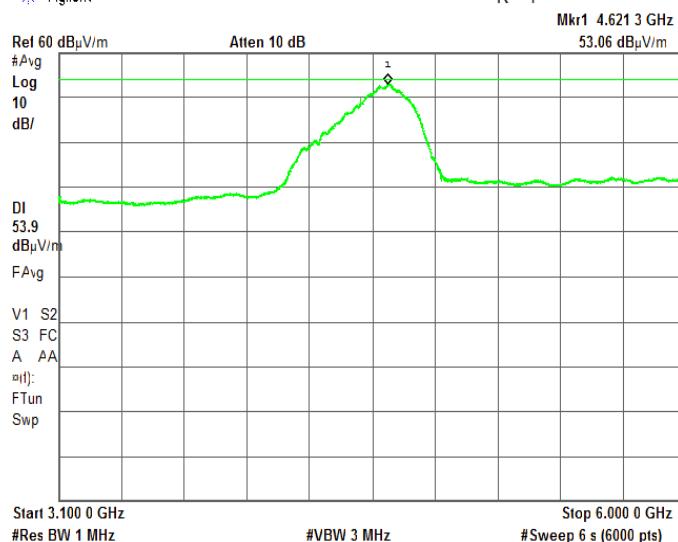



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
Temperature: 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Plot 7.3.30 Radiated emission measurements in 3100 – 6000 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

High

Agilent

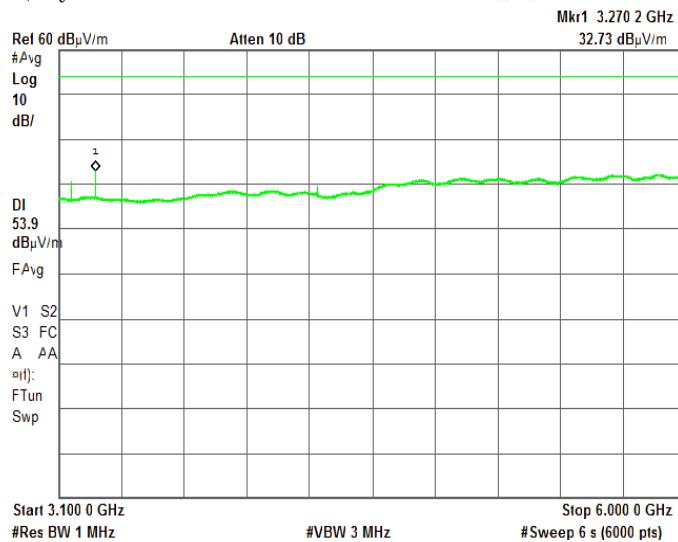

**Plot 7.3.31 Radiated emission measurements in 6000 – 10600 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Low

Agilent

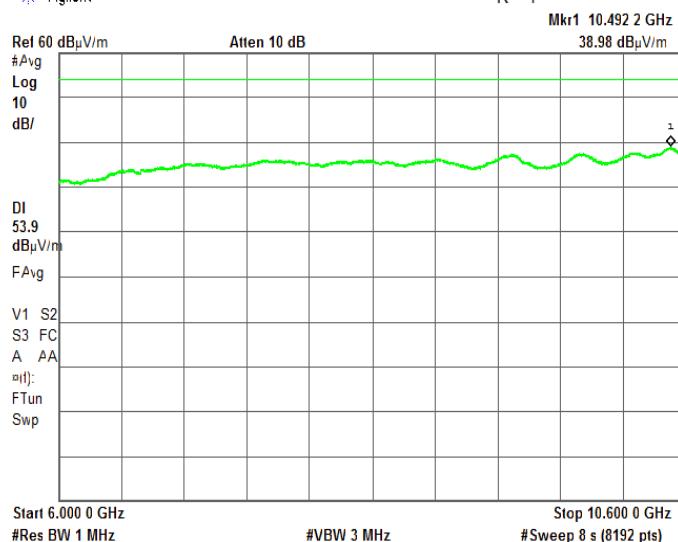



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
Temperature: 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Plot 7.3.32 Radiated emission measurements in 6000 – 10600 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

Mid

Agilent

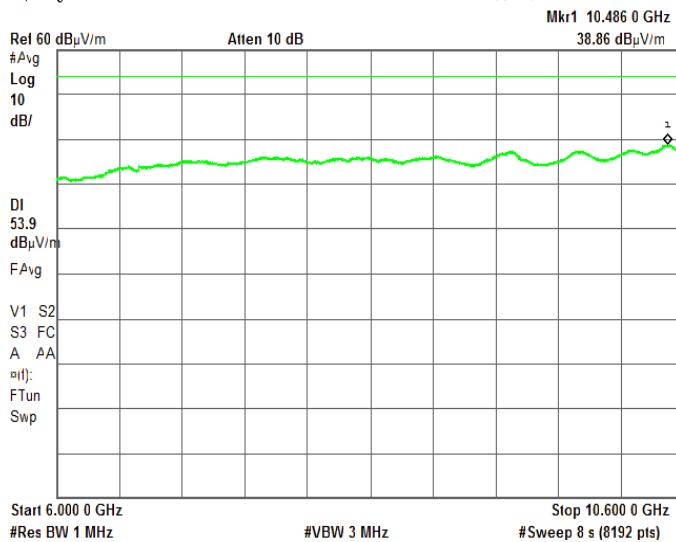

**Plot 7.3.33 Radiated emission measurements in 6000 – 10600 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal


TEST DISTANCE:

3 m

CARRIER FREQUENCY:

High

Agilent

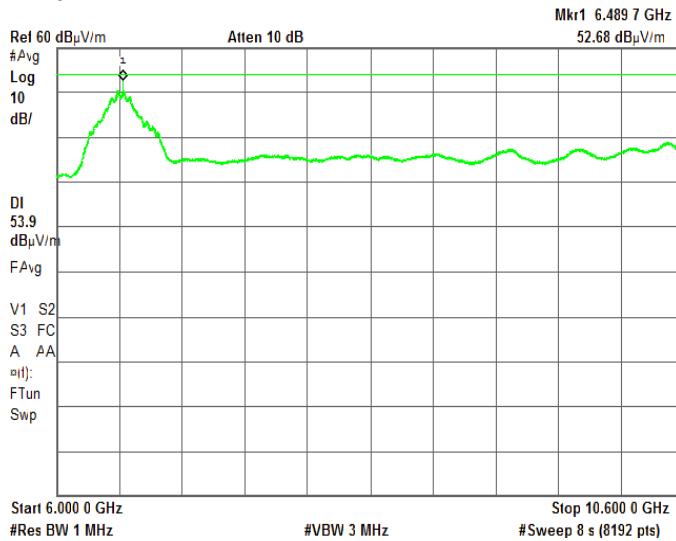



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17			
Temperature: 23 °C	Relative Humidity: 56 %	Air Pressure: 1007 hPa	Power: Battery
<b>Remarks:</b>			

**Plot 7.3.34 Radiated emission measurements in 10000 – 18000 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal

TEST DISTANCE:

1 m


CARRIER FREQUENCY:

Low, Mid, High

Agilent

R T

Mkr1 18.000 0 GHz

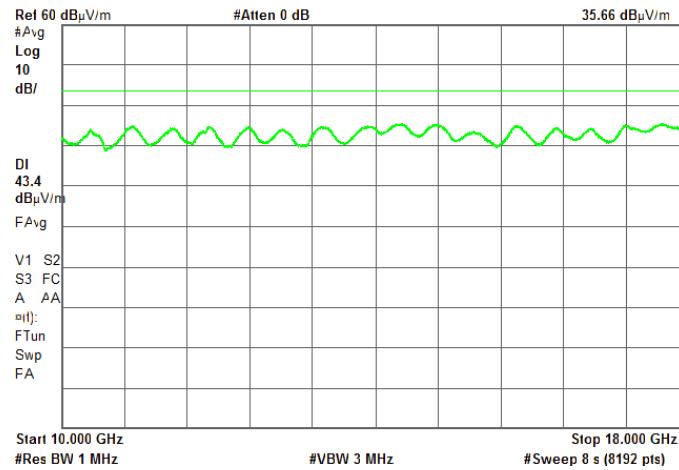35.66 dB $\mu$ V/m

$$\text{Limit@ 1m} = \text{Limit @3m} + 20 * \log(3m/1m) = 33.9 \text{dBuV/m} + 9.54 = 43.44 \text{ dBuV/m}$$

**Plot 7.3.35 Radiated emission measurements in 18000 – 26500 MHz range**

TEST SITE:

Semi anechoic chamber

ANTENNA POLARIZATION:

Vertical and Horizontal

TEST DISTANCE:

1 m

CARRIER FREQUENCY:


Low, Mid, High

Agilent

R T

Mkr1 18.142 2 GHz

Mkr1 18.169 1 GHz

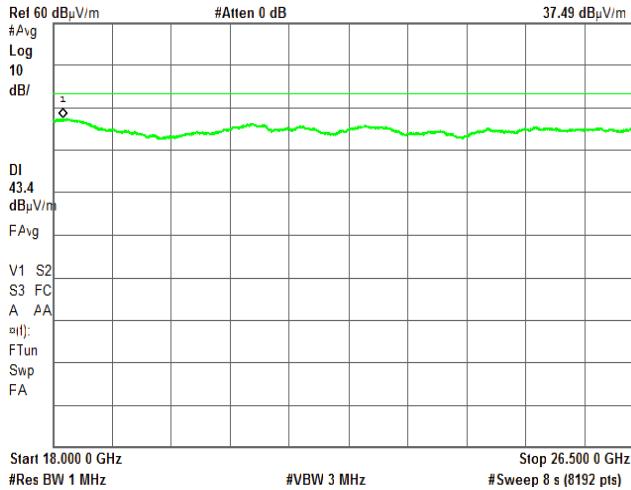27.82 dB $\mu$ V/m

Start 18.000 0 GHz #Res BW 100 kHz

#VBW 3 MHz

Stop 26.500 0 GHz #Sweep 8 s (8192 pts)

$$\text{Limit@ 1m} = \text{Limit @3m} + 20 * \log(3m/1m) = 33.9 \text{dBuV/m} + 9.54 = 43.44 \text{ dBuV/m}$$



HERMON LABORATORIES

<b>Test specification:</b> Section 15.519(c),(d), RSS-220 section 5.3.1(c), (d), Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10-2013, sections 10.2, 10.3, Section 15.521		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Aug-16; 8-Jun-17		
Temperature: 23 °C	Relative Humidity: 56 %	Air Pressure: 1007 hPa
<b>Remarks:</b>		

**Plot 7.3.36 Radiated emission measurements in 26500 - 40000 MHz range**

TEST SITE:

ANTENNA POLARIZATION:

TEST DISTANCE:

CARRIER FREQUENCY:

Semi anechoic chamber


Vertical and Horizontal

1 m

Low, Mid, High


Agilent

R T

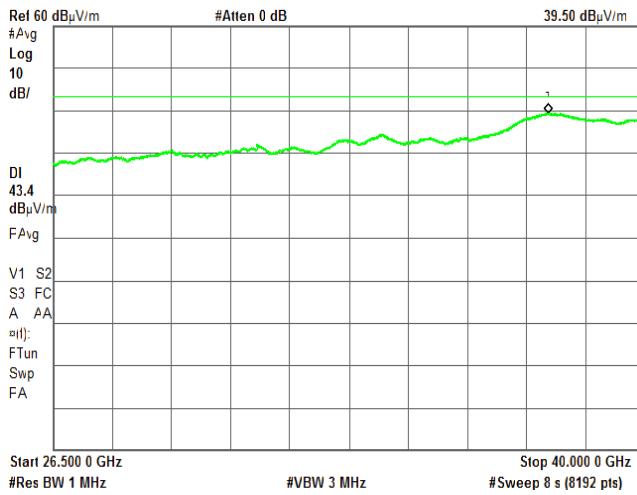Mkr1 37.809 6 GHz  
39.50 dB $\mu$ V/m

Agilent

R T

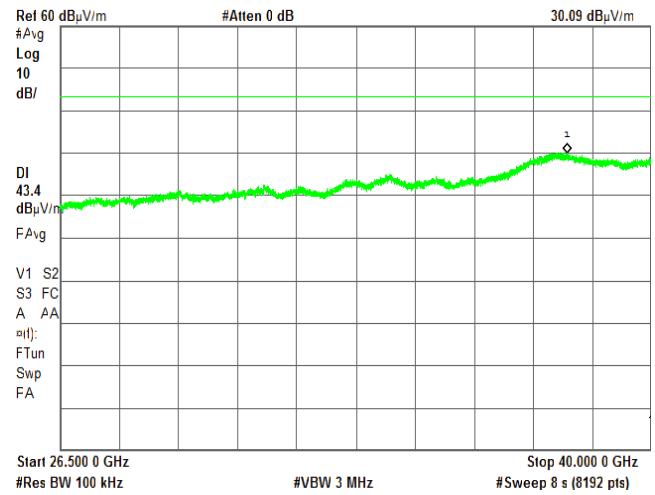Mkr1 38.068 4 GHz  
30.09 dB $\mu$ V/m

$$\text{Limit@ 1m} = \text{Limit @3m} + 20 \cdot \log(3m/1m) = 33.9 \text{dBuV/m} + 9.54 = 43.44 \text{dBuV/m}$$



HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.519(a)(1), RSS-220 section 5.3.1(b), Transmission duration requirements</b>		
<b>Test procedure:</b>	47 CFR, Section 15.521		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	23-Aug-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

## 7.4 Transmission duration requirements

### 7.4.1 General

The EUT was verified for compliance with transmission duration requirements listed below:

- A transmitter shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission was received.

### 7.4.2 Test procedure for transmitter shut down test


7.4.2.1 The EUT was set up as shown in Figure 7.4.1.

7.4.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.4.2.3 The transmitter was activated.

7.4.2.4 The transmission time was captured and shown in the associated plots. The test results for cease of transmitter operating is shown in Plot 7.4.1.

Figure 7.4.1 Setup for transmitter shut down test



### Reference numbers of test equipment used

HL 0337	HL 3001							
---------	---------	--	--	--	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.519(a)(1), RSS-220 section 5.3.1(b), Transmission duration requirements</b>		
<b>Test procedure:</b>	47 CFR, Section 15.521		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	23-Aug-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 56 %	<b>Air Pressure:</b> 1007 hPa	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Plot 7.4.1 RF transmission duration in 15 sec period

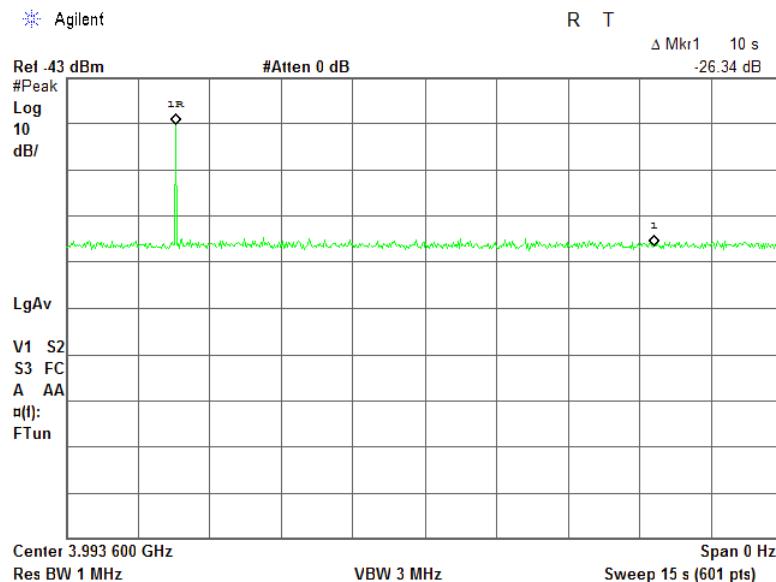



HERMON LABORATORIES

## 8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check*	Due Cal./Check*
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	18-Jan-16	18-Jan-17
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-May-16	10-May-17
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	03-May-16	03-May-17
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	15-Feb-16	15-Feb-17
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1226/2A	15-Feb-16	15-Feb-17
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-16	15-Mar-17
4722	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	51228701 001	01-Jan-16	01-Jan-17
4917	High Pass Filter, 50 Ohm, 3150 to 6500 MHz, SMA-FM / SMA-M	Mini-Circuits	VHF-2700+	NA	01-Oct-15	01-Oct-17
4933	Active Horn Antenna, 1 GHz to 18 GHz	Com-Power Corporation	AHA-118	701046	14-Oct-16	14-Oct-17
4956	Active horn antenna, 18 to 40 GHz	Com-Power Corporation	AHA-840	105004	09-Nov-15	09-Nov-16

\* the calibration was valid at the testing time.



HERMON LABORATORIES

## 9 APPENDIX B Measurement uncertainties

### Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: $\pm 1.7$ dB 12.4 GHz to 40 GHz: $\pm 2.3$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Occupied bandwidth	$\pm 8.0$ %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB
Vertical polarization	

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

## 10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports). The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## 11 APPENDIX D Specification references

FCC 47CFR part 15: 2015	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
RSS-220 Issue 1:2009	Devices Using Ultra-Wideband (UWB) Technology



HERMON LABORATORIES

## 12 APPENDIX E Test equipment correction factors

**Antenna factor**  
**Active loop antenna**  
**Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).

**Antenna factor**  
**Standard gain horn antenna**  
**Quinstar Technology**  
**Model QWH**  
**Ser.No.112, HL 0768, 0769, 0770, 0771, 0772**

Frequency min, GHz	Frequency max, GHz	Antenna factor, dB(1/m)
18.000	26.500	32.01
26.500	40.000	35.48
40.000	60.000	39.03
60.000	90.000	42.55
90.000	140.000	46.23
140.000	220.000	50.11

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



HERMON LABORATORIES

**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



HERMON LABORATORIES

Antenna factor, HL 4933

**Active Horn Antenna Factor Calibration**

1 GHz to 18 GHz

<b>Equipment:</b>	<b>ACTIVE HORN ANTENNA</b>				
<b>Model:</b>	AHA-118				
<b>Serial Number:</b>	701046				
<b>Calibration Distance:</b>	3 Meter				
<b>Polarization:</b>	Horizontal				
<b>Calibration Date:</b>	11/12/2014				
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
1	40.96	-16.47	10	40.94	-1.97
1.5	41.21	-14.53	10.5	40.63	-1.06
2	41.44	-13.30	11	40.74	-1.50
2.5	41.71	-12.87	11.5	40.65	-0.52
3	41.96	-12.26	12	40.76	-0.15
3.5	42.14	-11.77	12.5	41.03	-0.85
4	42.13	-10.91	13	41.37	-0.81
4.5	41.79	-9.41	13.5	41.18	0.05
5	41.44	-7.54	14	40.98	0.36
5.5	40.91	-6.47	14.5	40.81	1.26
6	40.69	-5.48	15	40.65	0.25
6.5	40.64	-5.53	15.5	40.93	-1.05
7	40.76	-4.12	16	41.31	-1.44
7.5	40.94	-3.12	16.5	40.96	-0.80
8	40.68	-1.69	17	40.64	-0.02
8.5	40.08	-1.71	17.5	40.57	1.81
9	40.41	-1.86	18	40.08	3.63
9.5	41.21	-2.73			

Calibration according to ARP 958

**Antenna Factor to be added to receiver reading:**

Meter Reading (dBuV) + Antenna Factor (dB/m) = Corrected Reading (dBuV/m)



HERMON LABORATORIES

Antenna factor, HL 4956



## Active Horn Antenna Factor Calibration

18 GHz to 40 GHz

Equipment:			ACTIVE HORN ANTENNA		
Model:			AHA-840		
Serial Number:			105004		
Calibration Distance:			3 meter		
Polarization:			Horizontal		
Calibration Date:			1/26/2015		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
18	38.83	-1.06	29.5	42.47	-5.33
18.5	39.34	-2.65	30	41.91	-4.86
19	39.71	-3.88	30.5	41.60	-4.64
19.5	39.87	-4.35	31	41.52	-4.60
20	39.98	-3.97	31.5	41.56	-4.79
20.5	40.42	-3.68	32	41.80	-5.21
21	41.12	-4.06	32.5	42.29	-5.54
21.5	41.74	-5.46	33	42.79	-5.63
22	42.14	-6.22	33.5	42.88	-5.38
22.5	42.35	-6.42	34	42.62	-4.76
23	42.50	-6.59	34.5	42.63	-4.84
23.5	42.65	-6.82	35	43.15	-5.13
24	42.81	-7.01	35.5	43.91	-5.83
24.5	42.86	-7.37	36	44.59	-6.39
25	42.73	-7.53	36.5	45.04	-6.64
25.5	42.77	-7.45	37	45.08	-6.40
26	42.85	-7.21	37.5	44.82	-5.75
26.5	42.98	-7.17	38	44.16	-4.58
27	43.14	-7.22	38.5	42.90	-2.66
27.5	43.18	-7.32	39	42.39	-1.71
28	43.04	-7.10	39.5	43.76	-2.49
28.5	43.01	-6.73	40	45.98	-5.21
Calibration per ANSI C63.5: 2006 Standard Site Method, Equations 1-6 (3-antenna)					
Corrected Reading (dB $\mu$ V/m) = Meter Reading (dB $\mu$ V) + AFE(dB/m)					



HERMON LABORATORIES

**Cable loss**  
**Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A**  
**HL 3901**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52



HERMON LABORATORIES

**Cable loss**  
**Microwave Cable Assembly, Huber-Suhner, 40 GHz, 1.5 m, SMA-SMA, S/N 1226/2A**  
**HL 3903**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	-0.02	9500	1.84	21000	2.98
100	0.15	10000	1.86	22000	3.07
500	0.38	10500	1.93	23000	3.13
1000	0.56	11000	1.99	24000	3.21
1500	0.69	11500	2.04	25000	3.26
2000	0.82	12000	2.10	26000	3.48
2500	0.90	12500	2.15	27000	3.44
3000	0.98	13000	2.21	28000	3.53
3500	1.06	13500	2.25	29000	3.59
4000	1.11	14000	2.29	30000	3.66
4500	1.17	14500	2.34	31000	3.70
5000	1.24	15000	2.36	32000	3.79
5500	1.32	15500	2.40	33000	3.88
6000	1.40	16000	2.45	34000	3.94
6500	1.50	16500	2.48	35000	3.91
7000	1.56	17000	2.56	36000	4.05
7500	1.62	17500	2.58	37000	4.22
8000	1.68	18000	2.60	38000	4.25
8500	1.74	19000	2.84	39000	4.27
9000	1.78	20000	2.88	40000	4.33



HERMON LABORATORIES

**Cable loss**  
**Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,**  
**NC29-N1N1-244S/N 12025101 003,**  
**HL 4353**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



HERMON LABORATORIES

**Cable loss**  
**Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,**  
**NC29-N1N1-244, S/N 51228701001**  
**HL 4722**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.22	9000	2.93
100	0.30	9500	3.06
300	0.52	10000	3.16
500	0.66	10500	3.20
1000	0.93	11000	3.34
1500	1.15	11500	3.39
2000	1.33	12000	3.48
2500	1.49	12500	3.55
3000	1.64	13000	3.66
3500	1.77	13500	3.75
4000	1.90	14000	3.76
4500	2.03	14500	3.87
5000	2.17	15000	3.98
5500	2.30	15500	4.01
6000	2.39	16000	4.14
6500	2.51	16500	4.15
7000	2.59	17000	4.32
7500	2.67	17500	4.36
8000	2.76	18000	4.38
8500	2.84		



HERMON LABORATORIES

## 13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million ( $10^{-6}$ )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT