



## FCC PART 15 B

### TEST REPORT

For

### Shenzhen Kaliho Technology Development Limited

19F, Block A, Stars Plaza, HuaQiang North Road, FuTian District, Shenzhen, China

**FCC ID: 2ADBR-K204**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Feature Phone
<b>Test Engineer:</b> <u>Dean Liu</u> 	
<b>Report Number:</b> <u>RDG160224007-00B</u>	
<b>Report Date:</b> <u>2016-04-19</u>	
<b>Reviewed By:</b> <u>Jerry Zhang</u> <u>EMC Manager</u>	
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY.....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EUT EXERCISE SOFTWARE .....	5
EQUIPMENT MODIFICATIONS .....	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	5
SUPPORT CABLE LIST AND DETAILS .....	5
CONFIGURATION OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>FCC§15.107 - CONDUCTED EMISSIONS.....</b>	<b>8</b>
MEASUREMENT UNCERTAINTY .....	8
EUT SETUP .....	8
EMI TEST RECEIVER SETUP.....	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE .....	9
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	9
TEST RESULTS SUMMARY.....	10
TEST DATA .....	10
<b>FCC §15.109 - RADIATED SPURIOUS EMISSIONS.....</b>	<b>13</b>
MEASUREMENT UNCERTAINTY .....	13
EUT SETUP .....	13
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE .....	14
TEST EQUIPMENT LIST AND DETAILS.....	15
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	15
TEST RESULTS SUMMARY.....	15
TEST DATA .....	15
ENVIRONMENTAL CONDITIONS.....	15
<b>DECLARATION LETTER.....</b>	<b>20</b>

## GENERAL INFORMATION

### Product Description for Equipment Under Test (EUT)

The *Shenzhen Kaliho Technology Development Limited*'s product, model number: *A0002*(FCC ID:2ADBR-K204) (the "EUT") in this report was a *Feature Phone* , which was measured approximately: 113.7 mm (L) x 47.8 mm (W) x 12.7 mm (H), rated input voltage: DC3.7V rechargeable Li-ion battery or DC 5V charging from adapter. The highest operating frequency is 2.48GHz.

Adapter information:

Model: UTC-20

INPUT: AC 110-220V 50/60Hz 0.15A

OUTPUT: DC 5.0V, 500mA

*Note: The series product, model A0002 and K204 are electrically identical, the difference them is the model name, we selected A0002 for fully testing, the details was explained in the attached declaration letter.*

*All measurement and test data in this report was gathered from production sample serial number: 160224007 (Assigned by BACL, Dongguan). The EUT was received on 2016-02-15.*

### Objective

This test report is prepared on behalf of *Shenzhen Kaliho Technology Development Limited* in accordance with Part 2, Subpart J, and Part 15-Subparts A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 B Class B.

### Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: 2ADBR-K204.

FCC Part 22H, 24E PCE submissions with FCC ID: 2ADBR-K204.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

### EUT Exercise Software

The software “winthrax.exe” was used during test.

### Equipment Modifications

No modification was made to the EUT tested.


### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HP	Printer	C3941A	JPTVOB2337
AST	Modem	AEM-2100	0293
DELL	Keyboard	L100	CNORH656658907BL05DC
DELL	Laptop	PP11L	N/A
SAMSUNG	TF Card	N/A	N/A

### Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Printer Cable	Yes	No	1.2	Parallel Port of Laptop	Printer
Serial Cable	Yes	No	1.2	Serial Port of Laptop	Modem
Keyboard Cable	Yes	No	1.5	Keyboard Port of Laptop	Keyboard
USB Cable	Yes	Yes	1.03	USB Port of Laptop	EUT
Earphone	No	No	0.61	EUT	Earphone

## Configuration of Test Setup

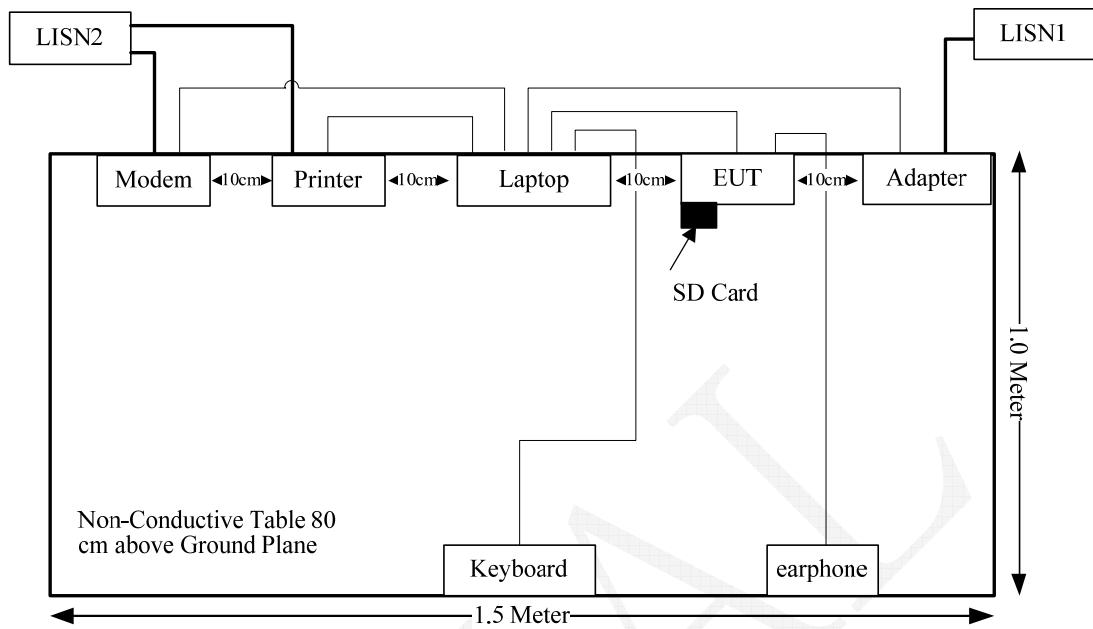

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

## FCC§15.107 - CONDUCTED EMISSIONS

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are Receiver, cable loss, and LISN.

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cisp}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cisp}}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}})$ , exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{\text{cisp}}$

Measurement	$U_{\text{cisp}}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

### EUT Setup

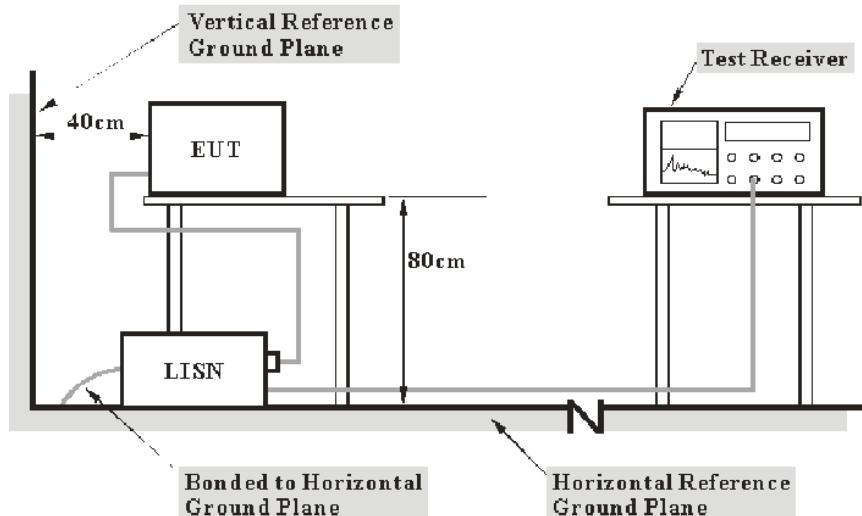

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter of laptop was connected to a 120V/60Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-10-20	2016-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-07-16	2016-07-15
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2015-05-06	2016-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

During the conducted emission test, the adapter of laptop was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_c$ : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15 B Class B, with the worst margin reading of:

**8.7 dB at 0.307284 MHz** in the **Neutral** conducted mode

## Test Data


### Environmental Conditions

<b>Temperature:</b>	23.1 °C
<b>Relative Humidity:</b>	39 %
<b>ATM Pressure:</b>	101.9 kPa

*The testing was performed by Dean Liu on 2016-03-01.*

*Test Mode: Downloading*


**AC120V, 60Hz, Line:**

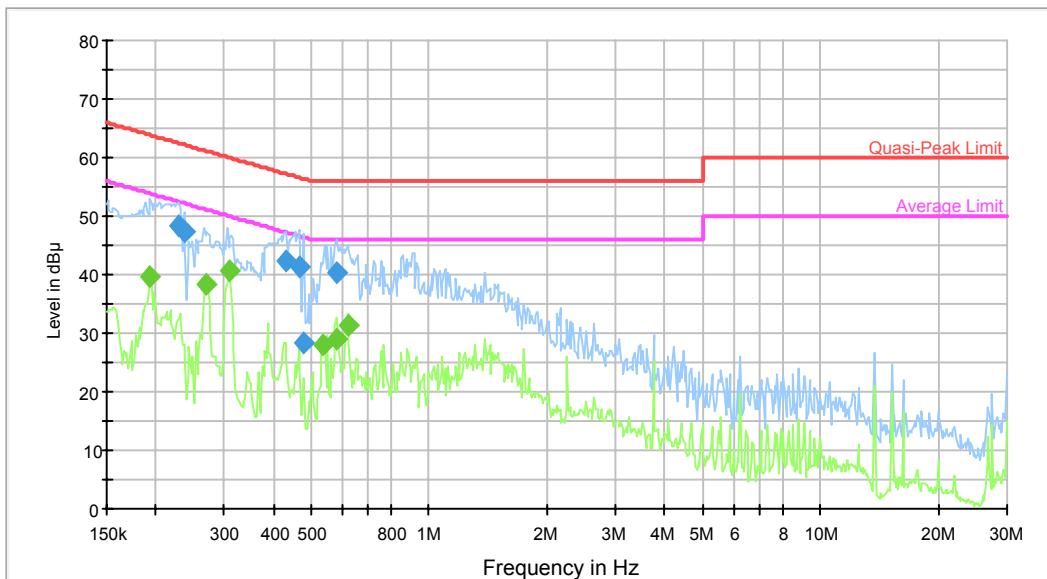

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.228823	48.3	9.000	L1	9.7	14.2	62.5	Compliance
0.236234	47.4	9.000	L1	9.7	14.8	62.2	Compliance
0.429420	42.2	9.000	L1	9.8	15.1	57.3	Compliance
0.465037	41.4	9.000	L1	9.8	15.2	56.6	Compliance
0.480097	28.2	9.000	L1	9.8	28.1	56.3	Compliance
0.581275	40.4	9.000	L1	9.8	15.6	56.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.193566	39.7	9.000	L1	9.7	14.2	53.9	Compliance
0.268355	38.3	9.000	L1	9.7	12.9	51.2	Compliance
0.307284	40.5	9.000	L1	9.7	9.5	50.0	Compliance
0.536756	27.9	9.000	L1	9.8	18.1	46.0	Compliance
0.581275	29.1	9.000	L1	9.8	16.9	46.0	Compliance
0.619536	31.3	9.000	L1	9.8	14.7	46.0	Compliance

**AC120V, 60Hz, Neutral:**

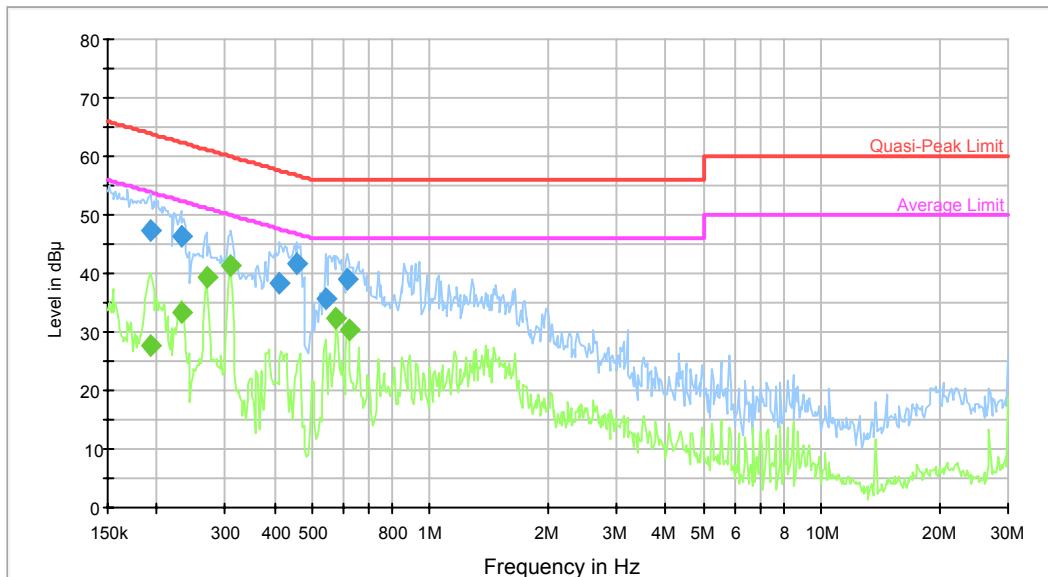

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.193566	47.5	9.000	N	9.7	16.4	63.9	Compliance
0.230654	46.2	9.000	N	9.7	16.2	62.4	Compliance
0.412647	38.5	9.000	N	9.7	19.1	57.6	Compliance
0.457684	41.5	9.000	N	9.7	15.2	56.7	Compliance
0.541050	35.8	9.000	N	9.7	20.2	56.0	Compliance
0.614619	38.9	9.000	N	9.7	17.1	56.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.192030	27.7	9.000	N	9.7	26.2	53.9	Compliance
0.232499	33.2	9.000	N	9.7	19.2	52.4	Compliance
0.268355	39.5	9.000	N	9.7	11.7	51.2	Compliance
0.307284	41.3	9.000	N	9.7	8.7	50.0	Compliance
0.576662	32.2	9.000	N	9.7	13.8	46.0	Compliance
0.619536	30.3	9.000	N	9.7	15.7	46.0	Compliance

## FCC §15.109 - RADIATED SPURIOUS EMISSIONS

### Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cispr}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cispr}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB

Table 1 – Values of  $U_{\text{cispr}}$


Measurement	$U_{\text{cispr}}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

### EUT Setup

Below 1GHz:

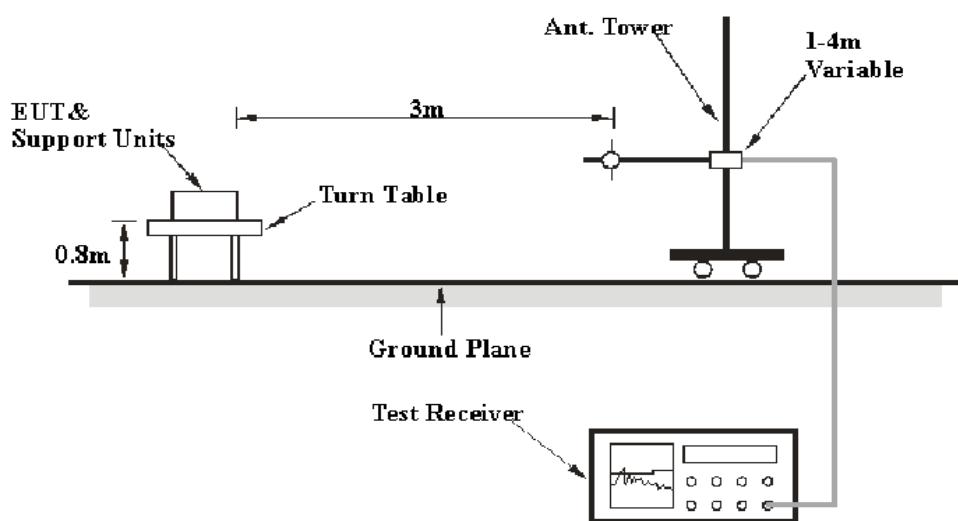

Above 1GHz:

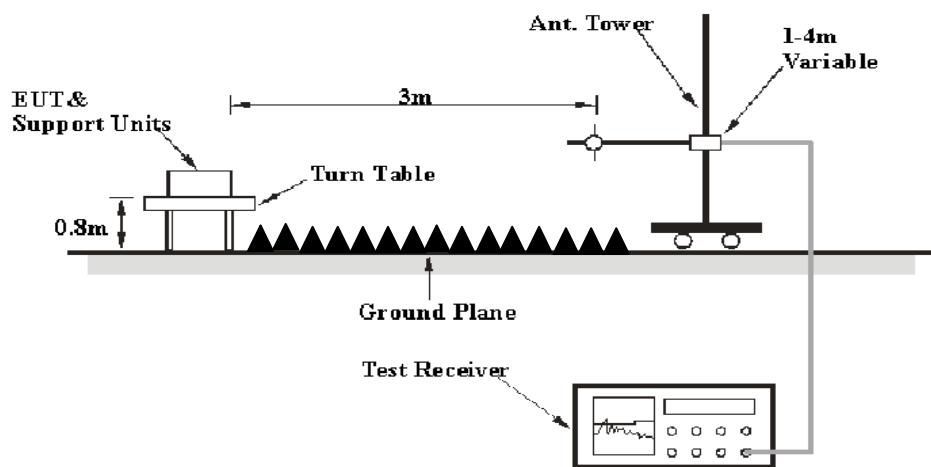

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

### EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	10 Hz	/	AVG

### Test Procedure

During the radiated emissions, the adapter of laptop was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
N/A	Coaxial Cable	14m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	8m	N/A	2015-05-06	2016-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15 B Class B, with the worst margin reading of:

**9.9 dB at 30.0000 MHz** in the **Vertical** polarization

## Test Data

### Environmental Conditions

<b>Temperature:</b>	21.4 °C
<b>Relative Humidity:</b>	69 %
<b>ATM Pressure:</b>	101.2 kPa


\* The testing was performed by Dean Liu on 2016-04-15.

*Test Result: Compliance*


*Test Mode: Downloading*

**1) Below 1GHz:**


**Horizontal**

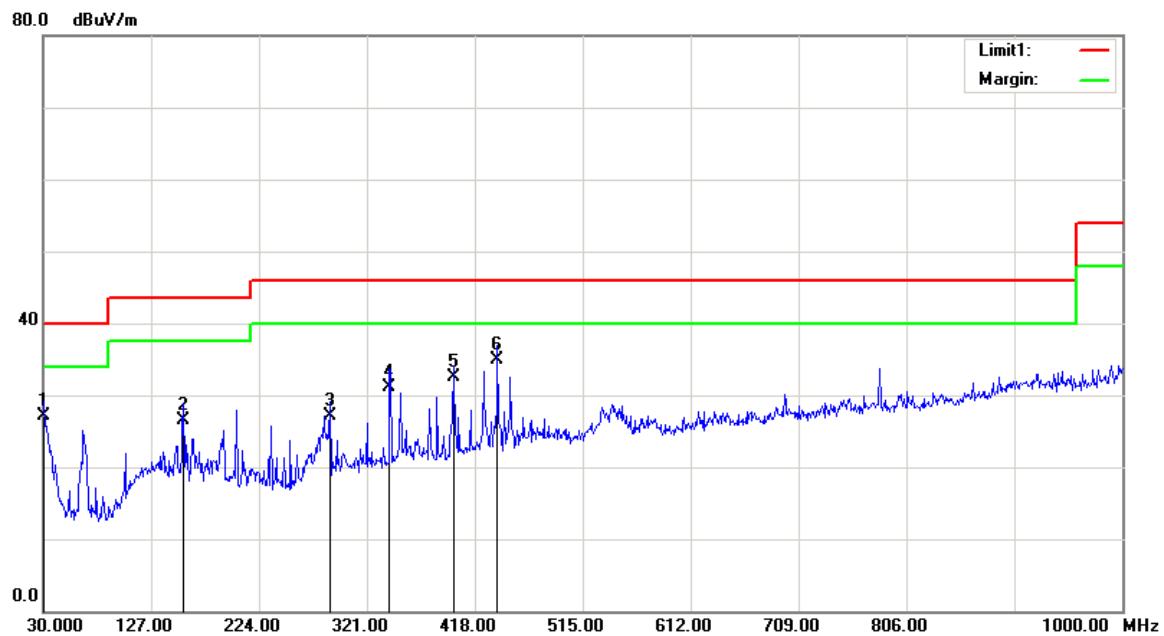

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
30.9700	24.98	QP	2.22	27.20	40.00	12.80
156.1000	33.95	QP	-7.35	26.60	43.50	16.90
288.0200	33.20	QP	-6.10	27.10	46.00	18.90
341.3700	36.48	QP	-5.28	31.20	46.00	14.80
398.6000	36.26	QP	-3.76	32.50	46.00	13.50
438.3700	37.53	QP	-2.63	34.90	46.00	11.10

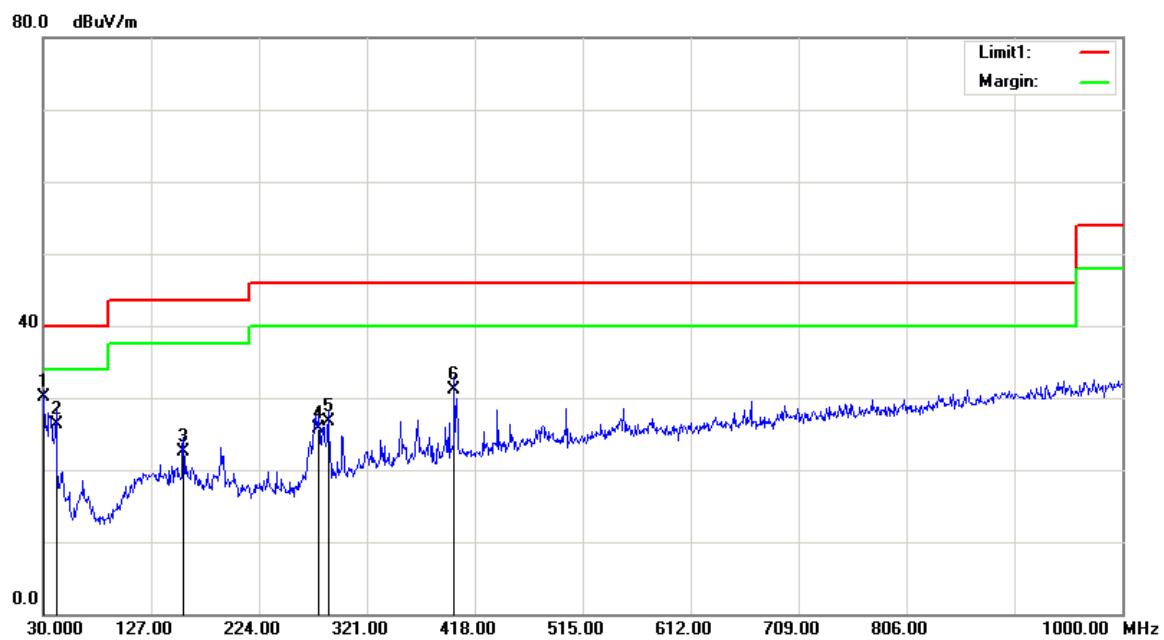
**Vertical**

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
30.0000	26.72	QP	3.38	30.10	40.00	9.90
41.6400	34.06	QP	-7.76	26.30	40.00	13.70
156.1000	29.85	QP	-7.35	22.50	43.50	21.00
277.3500	31.90	QP	-6.10	25.80	46.00	20.20
286.0800	32.80	QP	-6.10	26.70	46.00	19.30
399.5700	34.91	QP	-3.71	31.20	46.00	14.80

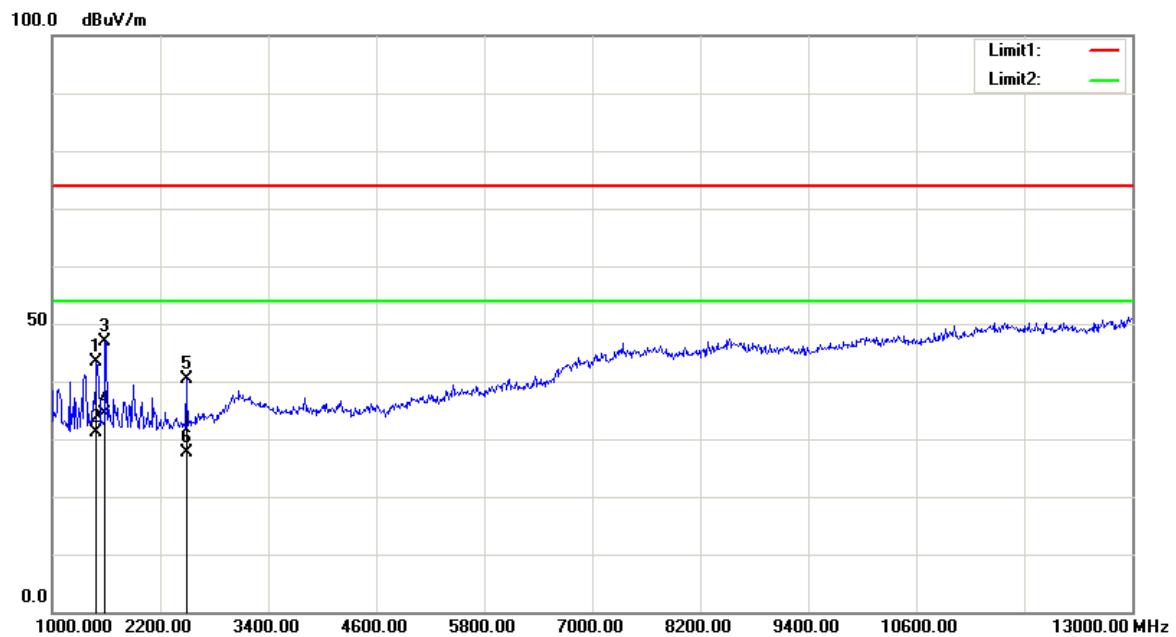**2) Above 1GHz:****Horizontal**

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1498.000	44.40	peak	-1.02	43.38	74.00	30.62
1498.000	32.03	AVG	-1.02	31.01	54.00	22.99
1594.000	47.73	peak	-0.79	46.94	74.00	27.06
1594.000	35.23	AVG	-0.79	34.44	54.00	19.56
2494.000	38.30	peak	2.04	40.34	74.00	33.66
2494.000	25.61	AVG	2.04	27.65	54.00	26.35

Note: For above 6 GHz, no emission was detected.

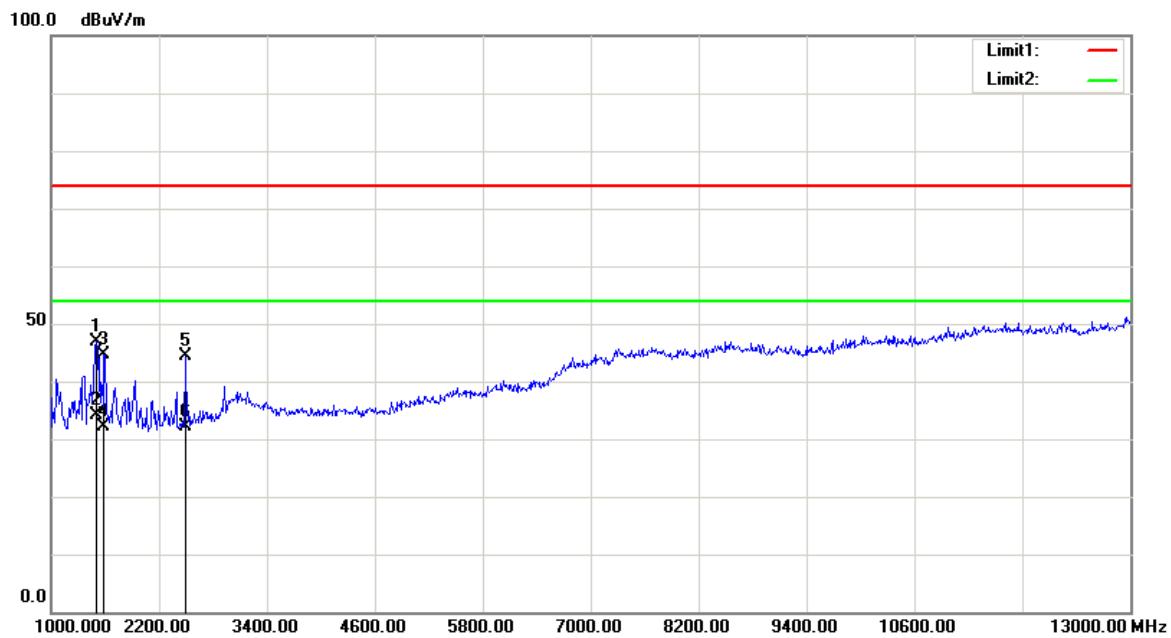**Vertical**

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1504.000	47.77	peak	-1.00	46.77	74.00	27.23
1504.000	35.15	AVG	-1.00	34.15	54.00	19.85
1594.000	45.47	peak	-0.79	44.68	74.00	29.32
1594.000	32.95	AVG	-0.79	32.16	54.00	21.84
2488.000	42.43	peak	2.05	44.48	74.00	29.52
2488.000	29.98	AVG	2.05	32.03	54.00	21.97

Note: For above 6 GHz, no emission was detected.

## **DECLARATION LETTER**

Shenzhen Kaliho Technology Development Limited  
19F. Block A, Stars plaza, HuaQiang North Road, FuTian District, ShenZhen, China  
Contact Phone: 0755-36886291 Contact Fax: 0755-36886291

### **Product Similarity Declaration**

Date: 2016-03-25

To:  
FEDERAL COMMUNICATIONS COMMISSION  
Authorization and Evaluation Division  
7435 Oakland Mills Road  
Columbia, MD 21046

Dear Sir/Madam,

We, Shenzhen Kaliho Technology Development Limited, hereby declare that our product Feature Phone, Model Number: AO002, K204, FCC ID: 2ADBR-K204 are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics. Model Number: K204 is electrically identical with the Model Number: AO002 that was certified by BACL. Their only difference is the model name.

The rest are the same.

Please contact me if you have any question.

Signature:

Evan Li

Manager

Evan@kaliho.com



**\*\*\*\*\* END OF REPORT \*\*\*\*\***