



# CERTIFICATION TEST REPORT

## FCC CFR47 PART 15 SUBPART C

Test Report File No.	14-IST-0574	<input checked="" type="checkbox"/> Basic	<input type="checkbox"/> Alternate
Date of Receipt	September 04, 2014	Begin of test date	September 22, 2014
Date of Issue	October 17, 2014	End of test date	September 30, 2014

Kind of Product	Action Camera
FCC Basic Model(s)	360FLYBLK
IC Basic Model(s)	360FLYBLK
FCC ID	2ADDK-360FLYBLK
IC ID	12404A-360FLYBLK

Applicant	360fly, Inc.
Address	1000 Town Center Way, Suite 200
	Canonsburg PA 15317, USA
Manufacturer	WOOJEON&HANDAN CO., LTD.
Address	569-12 kasan-dong, kumchon-ku, 153-803
	Seoul, Korea

**Test Result**

**Positive**

**Negative**

Tested By

B.O.KO

Reviewed By

S.J.CHO

**Comment(s)**

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart C.
- The test report is consists of 35 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST Co., Ltd.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4

I assume full responsibility for accuracy and completeness of these data.





## TABLE OF CONTENTS

<b>Table of contents</b>	2
<b>Information of test laboratory, Measurement Uncertainty</b>	3
<b>Product Information</b>	4
<b>Summary of the test results</b>	5
- <b>Conducted Emissions</b>	6-10
- <b>Peak Output Power</b>	11-12
- <b>6dB BandWidth</b>	13-14
- <b>Power Spectral Density</b>	15-16
- <b>99% Occupied Bandwidth</b>	17-18
- <b>Conducted Spurious Emissions &amp; Band Edge</b>	19
- <b>Conducted Spurious Emissions</b>	20-21
- <b>Conducted Band Edges</b>	22
- <b>Radiated Emissions</b>	23-24
- <b>Radiated Spurious Emissions &amp; Restricted bands emission</b>	25
- <b>Radiated Emissions, 9KHz to 30MHz(Magnetic Field Test)</b>	26
- <b>Radiated Spurious Emissions</b>	27-30
- <b>Radiated Restricted Band Edge</b>	31-34
- <b>Antenna Requirements</b>	35



## INFORMATION OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd.  
52-20, Sinjeong-ro 41beon-gil, Giheung-gu  
Yongin-si, Gyeonggi-do, Korea.

TEL : +82 31 326 6700      FAX : +82 31 326 6797

KOLAS Testing No. : KT118  
RRA Designation No. : KR0018  
FCC Registration No. : 400603  
VCCI Member No. : 1739



## Measurement Uncertainty

Conducted Emissions(#1)	$U = 2.59$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Conducted Emissions(#2)	$U = 2.59$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Radiated Emissions 30 MHz - 1000 MHz (Antenna - Horizontal)	$U = 3.02$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Radiated Emissions 30 MHz - 1000 MHz (Antenna - Vertical)	$U = 3.68$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Radiated Emissions Above 1 GHz	$U = 4.20$ [dB] (Confidence level approximately 95 %, $k = 2$ )



## PRODUCT INFORMATION

### Action Camera(360FLYBLK)

Recording	
Video Format	H.264
Video Mode(Resolution)	1504 x 1504 @ 30fps
Video Actual (Pixel)	Approximately 2.300K
Video Bit rate	Approximately 12 Mbps
Audio Format	AAC 2-Ch, Sample rate : 48 KHz, Sample rate : 64 kbps
Lens	
f-stop	f 2.50
Field of view	204°
Interface	
WIFI	IEEE 802.11 b/g/n(2.4 GHz band) for RTSP
Bluetooth	BT 4.0 LE
USB	USB OTG 2.0
Environmental	
Water-proof	5ATM (With Microphone Plug)
Water-resistant	IP6X (Without Microphone Plug)
Operating Temperature	-4° to 140° F / -20° to 60 °C
Power	
Power Source	Built-In Li-Polymer battery (1600mA), DC 3.7 V
Charging Method	Through Power Cradle using bundled USB cable
Full Charging Time	Approx. 3hrs 30min @ 500mA, 2hr 10min @ 1A
Size & Weight	
Dimensions (Approx.)	Main Device (61mm (Diameter) x 59.5mm(H)) Power Cradle (45.6mm(Dia) x 12.3mm(H)) TiltMount (50mm(Dia) x 25.8mm(H))
Weight (Approx.)	Main Device (138g) Power Cradle – TBD TiltMount (30.6g)

**Note:** All the testing were performed according to the procedures in  
FCC 47CFR PART 15 SUBPART C



## SUMMARY

FCC Standard Section	IC Standard Section	Description	result	remark
15.207	RSS-Gen 7.2.4	AC Conducted Emission	Pass	
15.247(b)	RSS-210 A8.4(4)	Peak Output Power	Pass	
15.205 & 15.209	RSS-210 A8.5	General Field Strength Limits	Pass	
15.247(d)	RSS-210 A8.5 & RSS-Gen 7.2.3	Conducted Band Edges	Pass	
		Conducted Spurious Emission	Pass	
		Radiated restricted bands Emission	Pass	
		Radiated Spurious Emission	Pass	
-	RSS-Gen Issue 3	99% Occupied Bandwidth	Pass	
15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	Pass	
15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	Pass	
15.203 & 15.247(b)	RSS-Gen 7.1.2	Antenna requirement	-	

### Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the Following standards:

- ✧ FCC Part 15 Subpart C § 15.247
- ✧ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ✧ FCC TCB Workshop 2013, April 9.
- ✧ ANSI C63.4-2003 and ANSI C63.10-2009
- ✧ IC RSS-210 Issue 8
- ✧ IC RSS-Gen Issue 3




### Conducted Emissions:


The measurement were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω/50 uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "quasi-peak" & "Average" within a bandwidth of 9 KHz.

#### - Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1 m X 1.5 m wooden table 80 cm height is placed 40 cm away from the vertical wall and 1.5 m away from the other wall of the shielded room. The R/S ENV216 and R/S ESH3-Z5 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80 cm from the LISN and powered from the R/S ENV216 LISN. The peripheral equipment is powered from the other LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the R/S ESH3-Z6 LISN. All interconnected cables more than 1 m were shortened by non-inductive bundling to a 1 m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

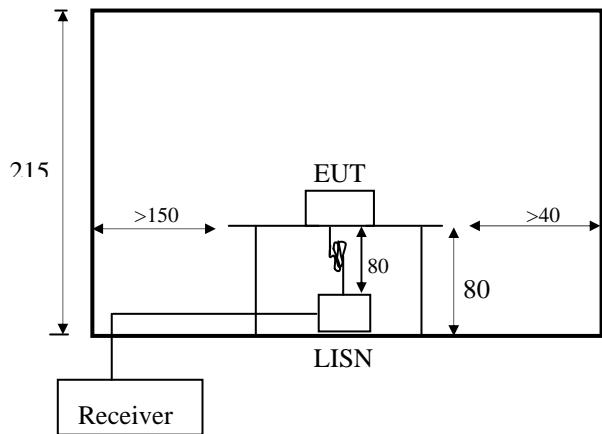

< Side View >

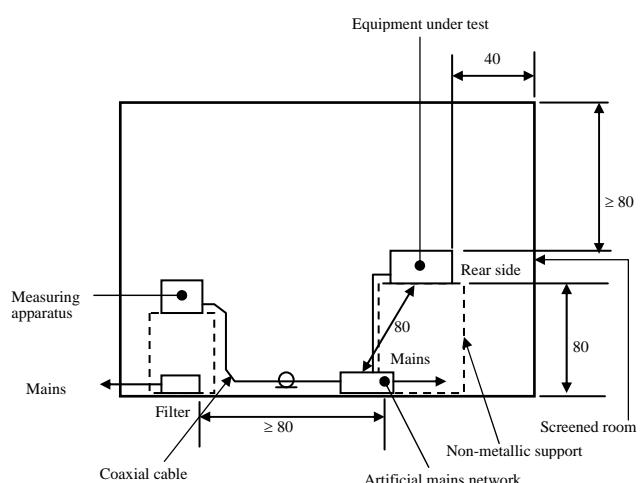

< Concept Drawing >



## Limits

According to §15.207(a) except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network(LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

Test specification.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207 & RSS-Gen 7.2.2



## Conducted Emissions

[Applicable]

#### ◆ Test Equipment Used

Model Name	Description	Manufacturer	Due for Cal	Serial No.
ESCI	Test Receiver	Rohde & Schwarz	May. 09, 2015	100374
ENV216	LISN	Rohde & Schwarz	Dec. 09, 2014	101718

*Note : The equipment used is calibrated in regular for every year.*

#### ◆ Test Accessories Used

Equipment	Type	Brand	Serial No.
360FLYBLK	360FLYBLK	360fly Inc.	N/A
Laptop	LG15N53	LG ELECTRONICS	404QCPY560240
Adapter(Laptop)	ADP-65JH BB	DELTA ELECTRONICS, INC.	691W43403WP
I phone	A1387	Apple Inc.	DQGJX0TLDTDF

### Connecting Interface Cables :

AC Power Cable : 1.2 m (Unshielded)

USB Cable(Micro 5pin to USB) : 0.5 m (Unshielded)

## ◆ Test Conditions

Temperature ( 24.5 ± 0.2 ) °C

Humidity ( 50.0 ± 0.2 ) % R.H.

Atmosphere (1010) mbar

## ◆ Test Area

### Conducted Room #2


## ◆ Test Date

September 23 2015

*Note* :-




Conducted Emissions result

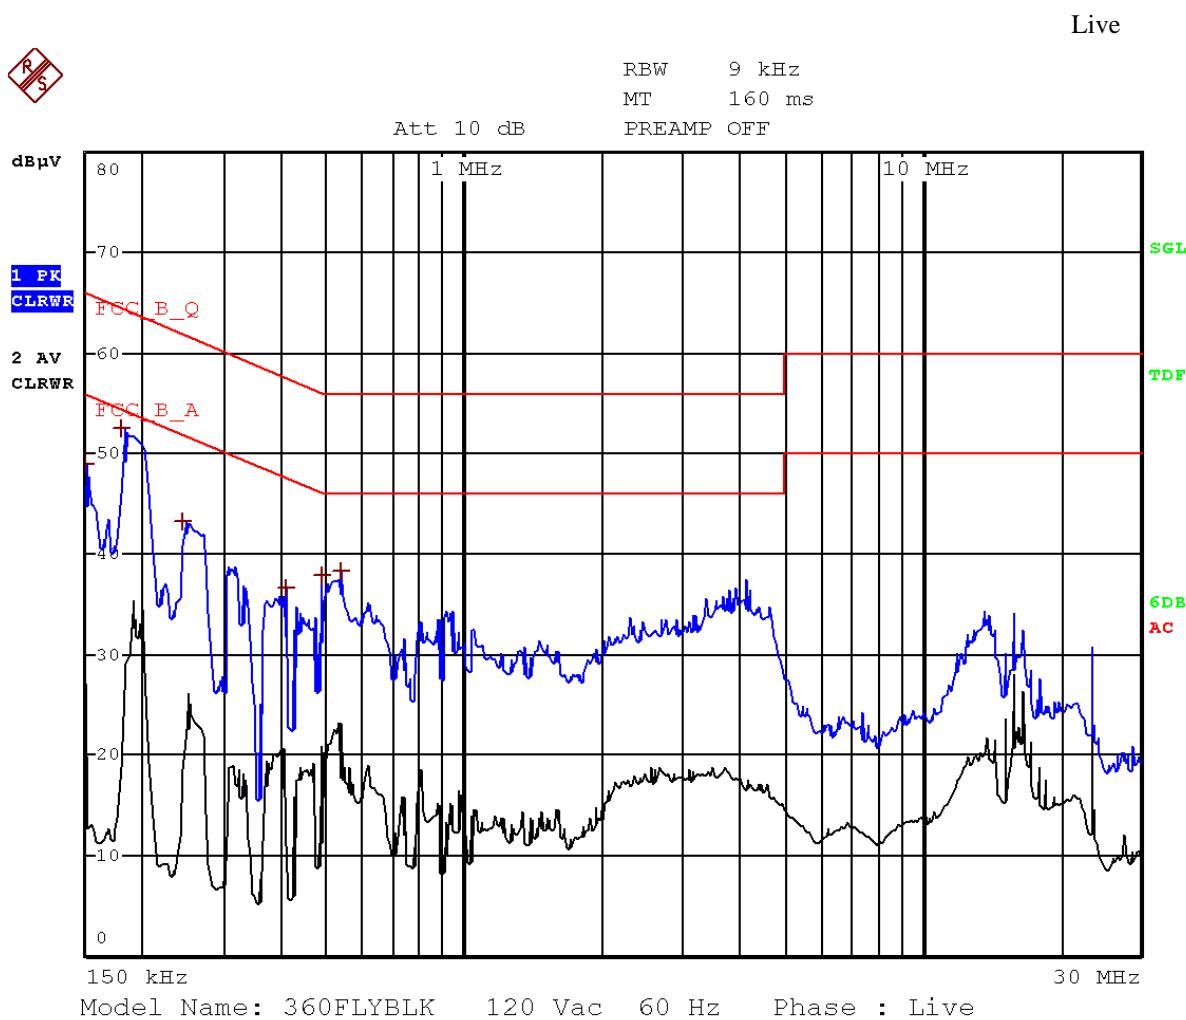

Freq. [MHz]	Measurement [dB $\mu$ V]		Limit [dB $\mu$ V]		Insertion Loss	Cable Loss	Result [dB $\mu$ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.150	39.75	26.57	66.00	56.00	9.54	0.10	49.39	36.21	16.61	19.79
0.190	36.44	21.10	64.04	54.04	9.54	0.07	46.05	30.71	17.99	23.33
0.216	28.94	13.49	62.97	52.97	9.54	0.07	38.55	23.10	24.43	29.88
0.467	23.93	18.05	56.57	46.57	9.55	0.11	33.59	27.71	22.97	18.85
0.490	23.07	17.02	56.17	46.17	9.55	0.10	32.72	26.67	23.44	19.49
0.548	24.41	18.06	56.00	46.00	9.55	0.09	34.05	27.70	21.95	18.30



Conducted Emissions result

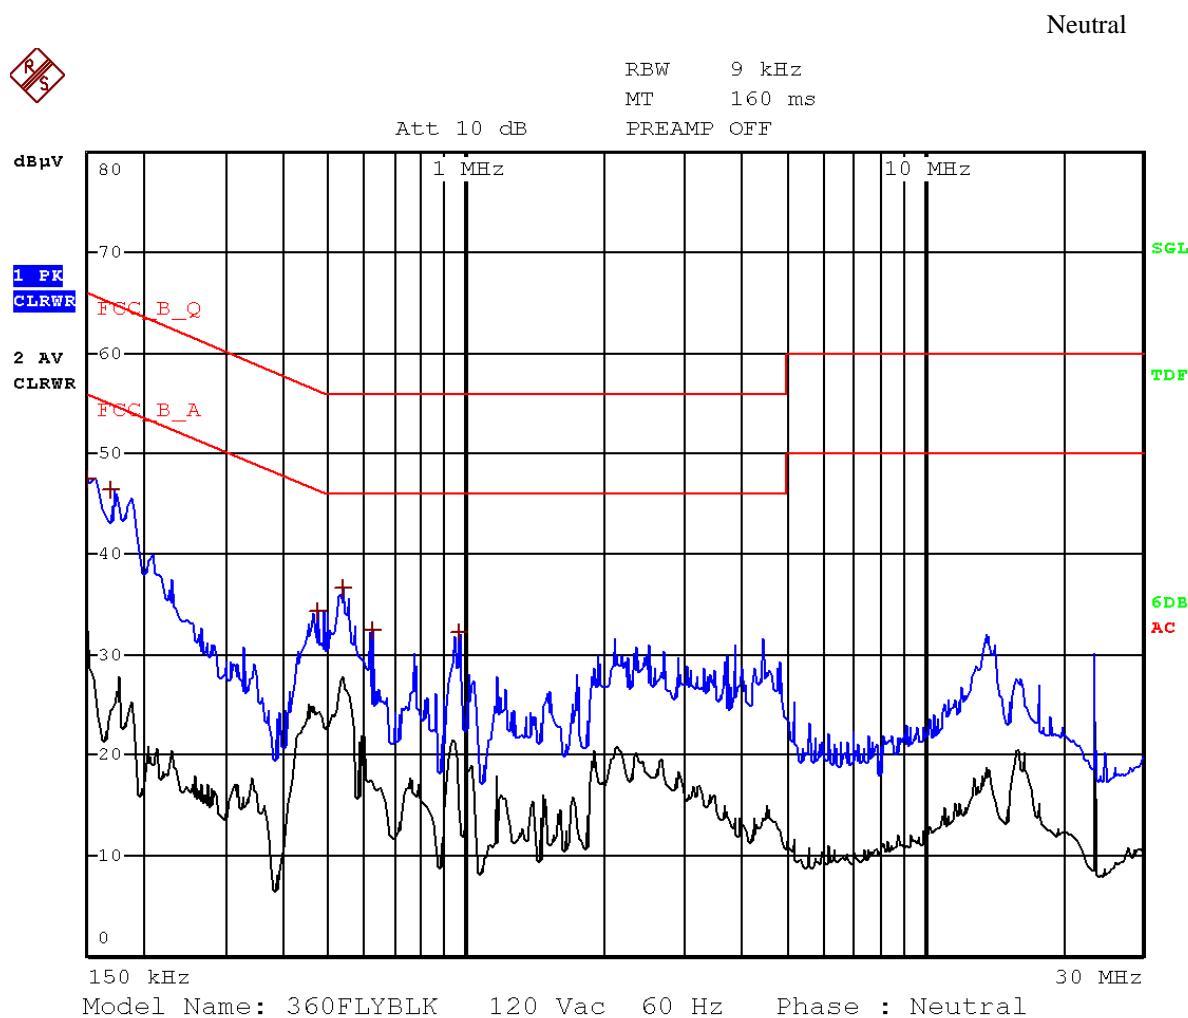

Freq. [MHz]	Measurement [dB $\mu$ V]		Limit [dB $\mu$ V]		Insertion Loss [dB]	Cable Loss [dB]	Result [dB $\mu$ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.150	35.59	22.47	66.00	56.00	9.55	0.10	45.24	32.12	20.76	23.88
0.171	33.24	18.71	64.91	54.91	9.55	0.08	42.87	28.34	22.04	26.57
0.474	20.38	15.79	56.44	46.44	9.55	0.11	30.04	25.45	26.40	20.99
0.535	23.29	17.93	56.00	46.00	9.55	0.09	32.93	27.57	23.07	18.43
0.591	17.26	12.62	56.00	46.00	9.55	0.08	26.90	22.26	29.11	23.75
0.941	16.51	11.43	56.00	46.00	9.56	0.10	26.17	21.09	29.84	24.92



## Peak Output Power

### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Power Meter	Agilent	N1911A/ MY53280018	Oct. 08, 2015
2	Wideband Power Sensor	Agilent	N1921A/ MY52300024	Oct. 08, 2015
3	RF ROOM			

*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*


### ◆ Limits

The maximum peak output power of the intentional radiator shall not exceed the following :

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz : 1Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs(b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

IC RSS-210 A8.4

### ◆ Test Setup

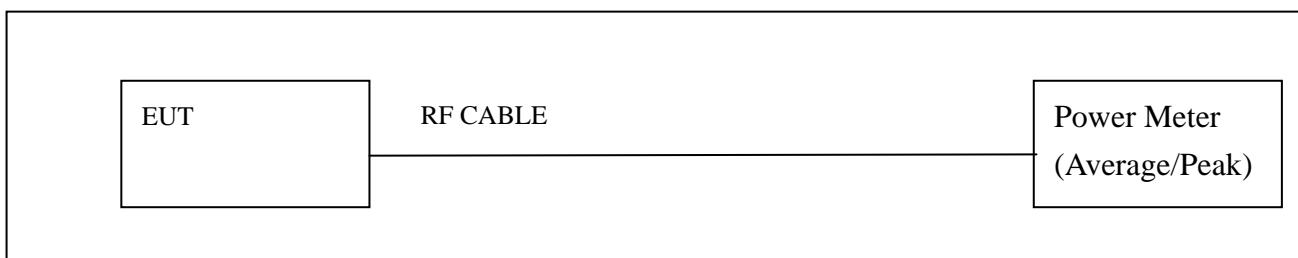

### ◆ Test Procedure

1. The transmitter output is connected to the Power meter.

The Power meter is set to the peak power detection.

2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas.

Guidance v03r02.

9.1.2 PKPM1 Peak power meter method.



### Peak Output Power Test result

Product	360FLYBLK
Test Method	PKPM1 Peak Power Meter method
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

BT LE (GFSK)		Rate (Mbps)	Measure Power (dBm)	Limit (dBm)
Frequency (MHz)	Channel No.			
2402	0	1 Mbps	-1.94	1Watt=30dBm
2440	19	1 Mbps	-2.39	1Watt=30dBm
2480	39	1 Mbps	-3.97	1Watt=30dBm

Note : Measurement Power = reading level + correct factor



## 6dB BandWidth


### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May.08, 2015
2	RF ROOM			

Note : All equipment upon which need to calibrated are with calibration period of 1 year.

### ◆ Test Setup

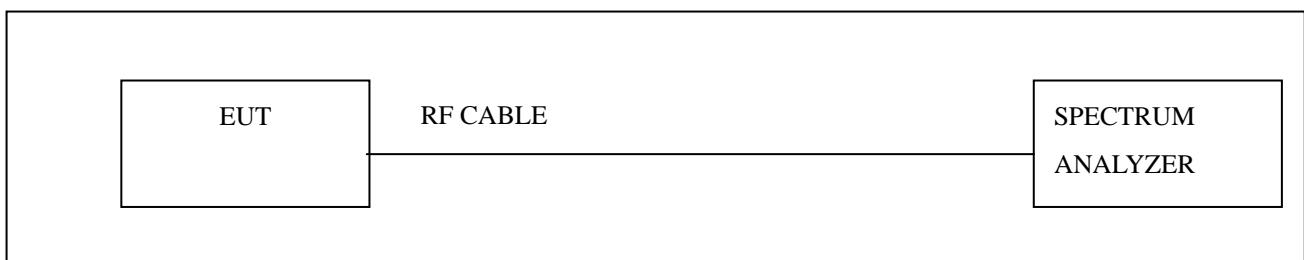

### ◆ Limits

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions :

(2) systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

IC RSS-210 A8.2 a

### ◆ Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02. 8.0 DTS bandwidth 8.1 Option 1.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set the spectrum analyzer's resolution bandwidth (RBW) = 100KHz.  
Set the Video bandwidth (VBW) > 3 \*RBW.  
Set Peak Detector, max hold trace mode and auto couple sweep.
4. Measure the Maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (Upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.




## 6dB BandWidth Test result


Product	360FLYBLK
Test Method	8.0 DTS bandwidth 8.1 Option 1
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

BT LE (GFSK)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (KHz)	Result
Low	2402	0.680	>500	Pass
Mid	2440	0.690	>500	Pass
High	2480	0.695	>500	Pass


Low ( 2402 MHz )

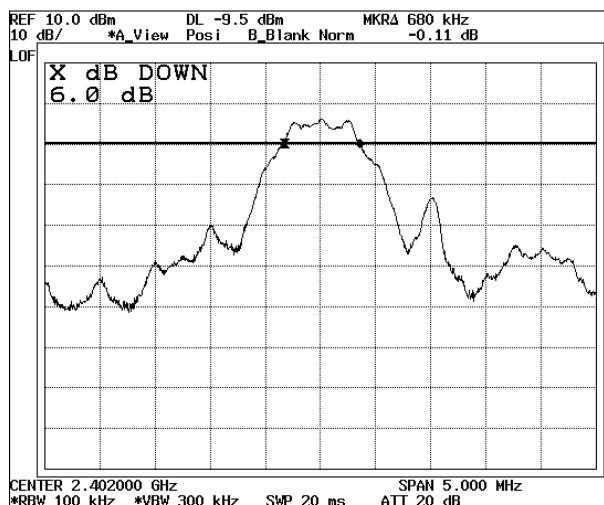

Mid(2440 MHz)

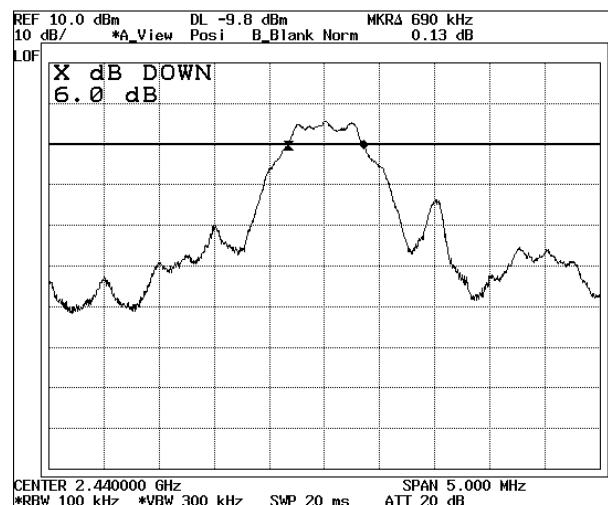

High (2480 MHz)

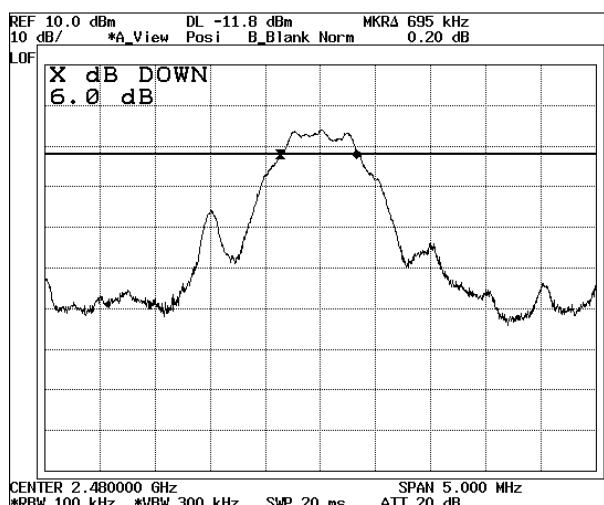



## Power Spectral Density


### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May. 08, 2015
2	RF ROOM			

*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*

### ◆ Test Setup

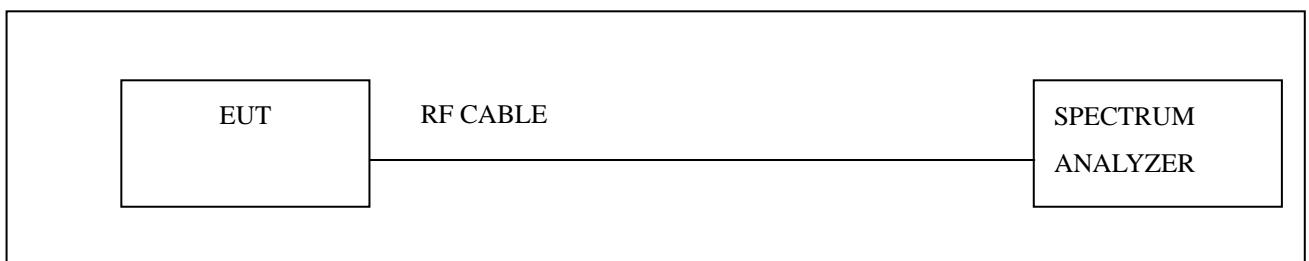

### ◆ Limits

Section 15.247 (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (v) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

IC RSS-210 A8.2 b

### ◆ Test Procedure

The Measurement Procedure PKPSD was set according to the FCC KDB 558074 D01 DTS Meas. Guidance v03r02. 10.2 Method PDPSD (peak PSD).

Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental RBW.

(VBW  $\geq$  3 xRBW, Sweep time = auto couple, Trace mode = Max hold)

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/ 3 kHz.





### PSD Test result


Product	360FLYBLK
Test Method	Method PKPSD (peak PSD)
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

BT LE (GFSK)				
Channel	Frequency (MHz)	PSD / 3KHz (dBm)	Limit (dBm)	Result
Low	2402	-17.93	< 8	Pass
Mid	2440	-18.30	< 8	Pass
High	2480	-19.87	< 8	Pass

Low( 2402 MHz )

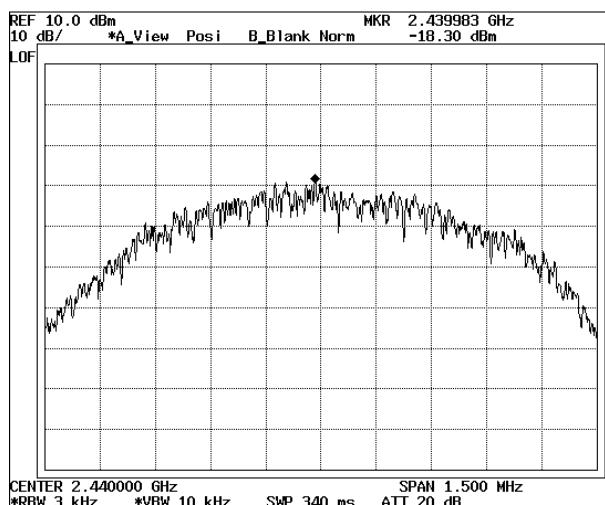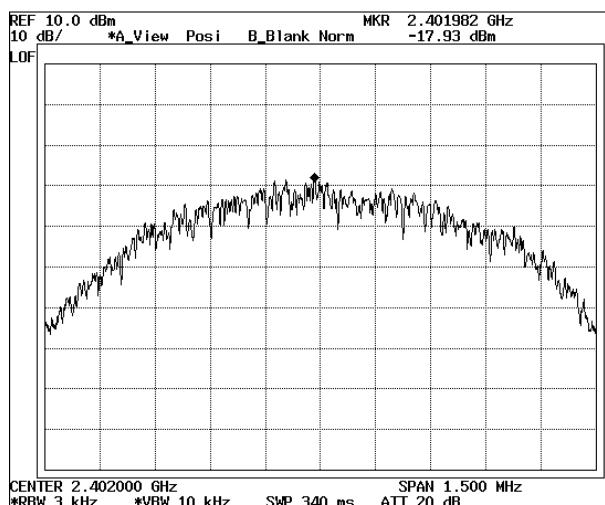

High( 2480 MHz )

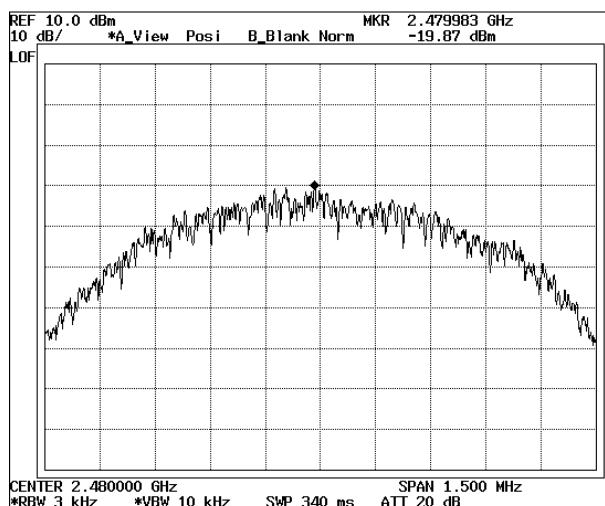



## 99% Occupied Bandwidth


### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Due for Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May. 08, 2015
2	RF ROOM			

*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*

### ◆ Test Setup

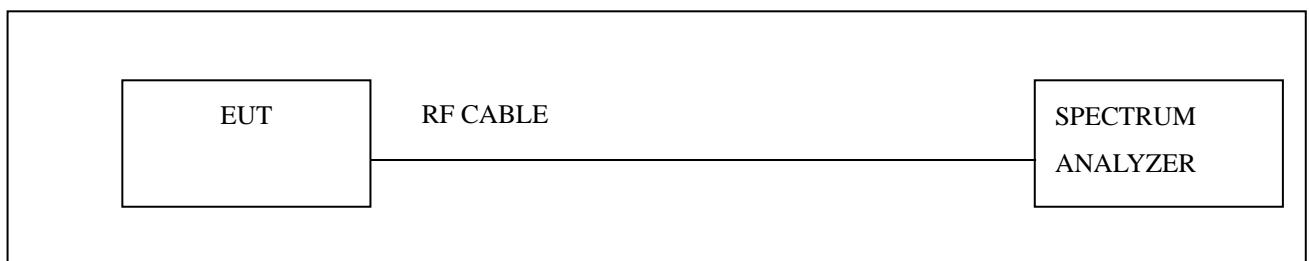

### ◆ Limits

None; for reporting purposes only

RSS-Gen 4.6.1

### ◆ Test Procedure

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the Span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.




**99% Occupied Bandwidth Test result**


Product	360FLYBLK
Test Item	99% Occupied Bandwidth
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

BT LE (GFSK)		
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)
Low	2402	1.119
Mid	2440	1.116
High	2480	1.104


Low( 2402 MHz )

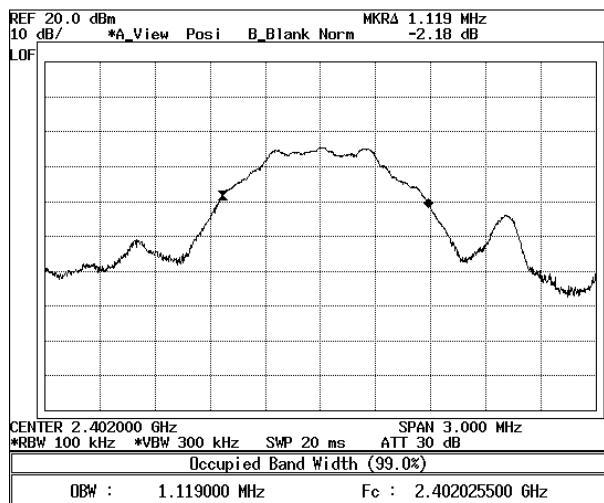

Mid( 2440 MHz )

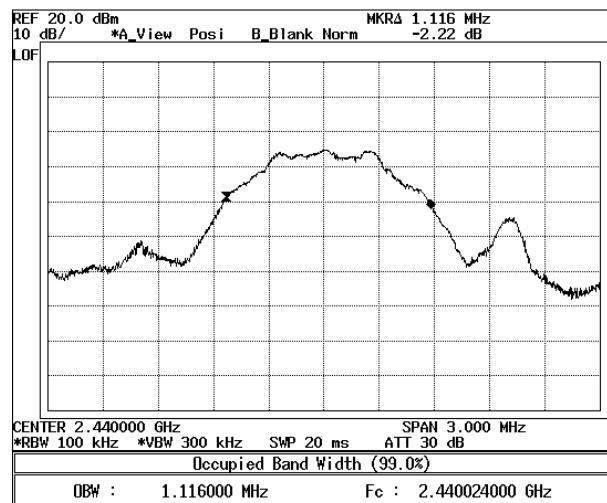

High( 2480 MHz )

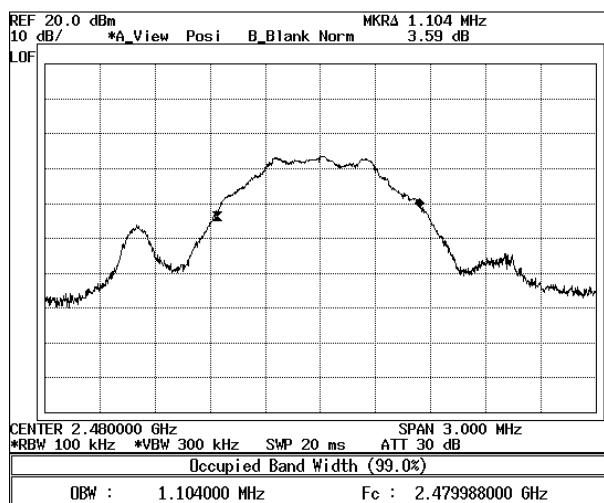



## Conducted Spurious Emissions & Band Edge

### ◆ TEST Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Last Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 110600587	May. 08, 2015
2	RF ROOM			

*Note : 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to RRL, KRISS, KTL and HCT.*


### ◆ Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio Frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within The band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a)(see Section 15.205(c)).

IC RSS-210 A8.5

### ◆ Test Setup

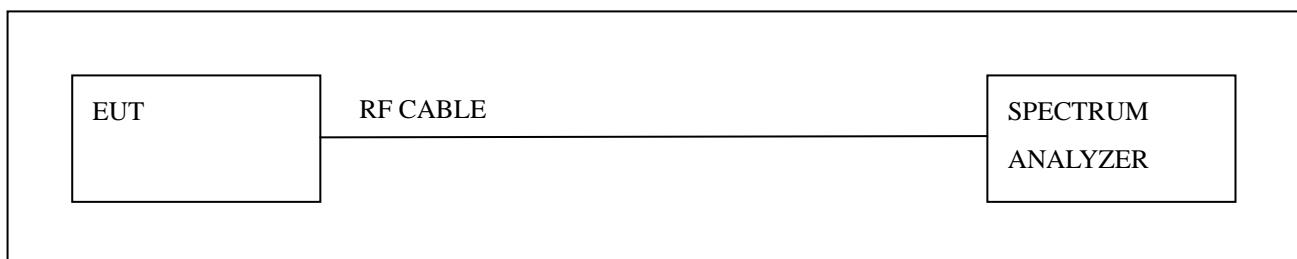

### ◆ Test Procedure

1. The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas. Guidance v03r02.
  - 11.2 Reference level measurement.
  - 11.3 Emission level measurement.





### Spurious Emission Test result



Product	360FLYBLK
Test Method	Reference level measurement Emission level measurement ( 30 MHz ~ 25 GHz )
Test Mode	Transmit Low/Mid/High
Test Site	RF Room
Measurement Method	Conducted

#### ● BT LE (GFSK)

Low ( 2402 MHz )

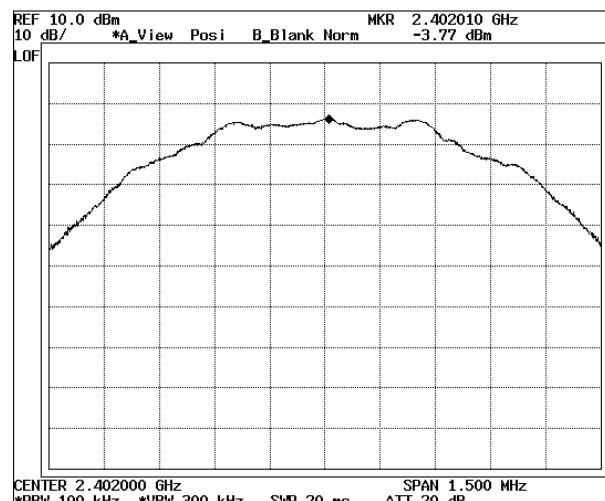
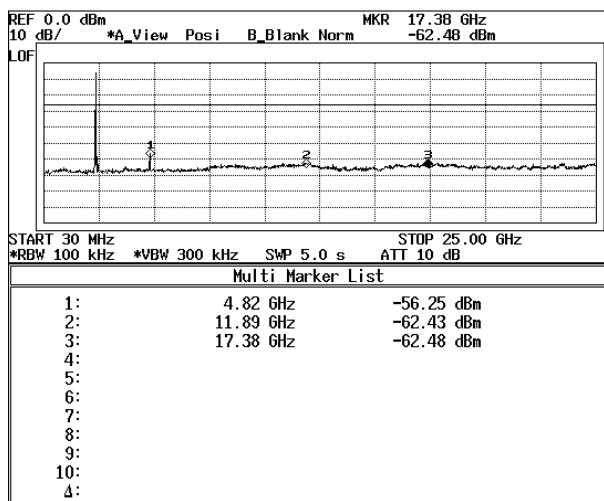


Mid ( 2440 MHz )

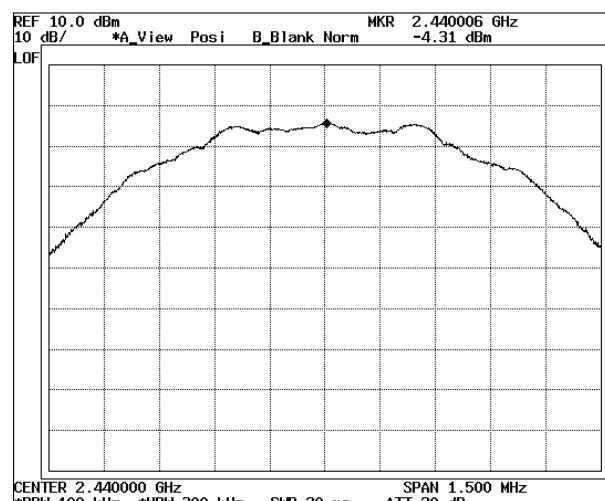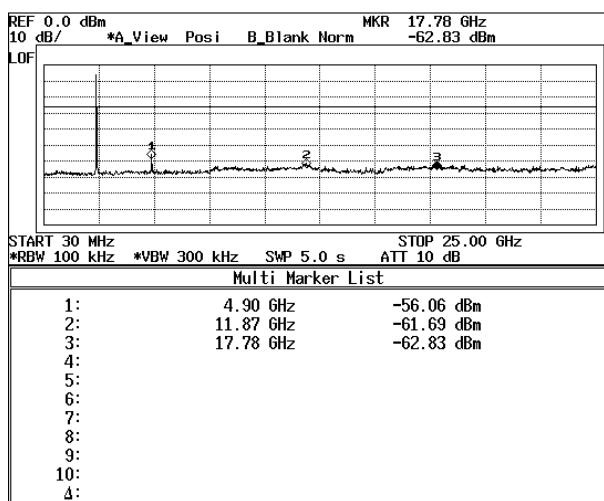



High(2480 MHz)

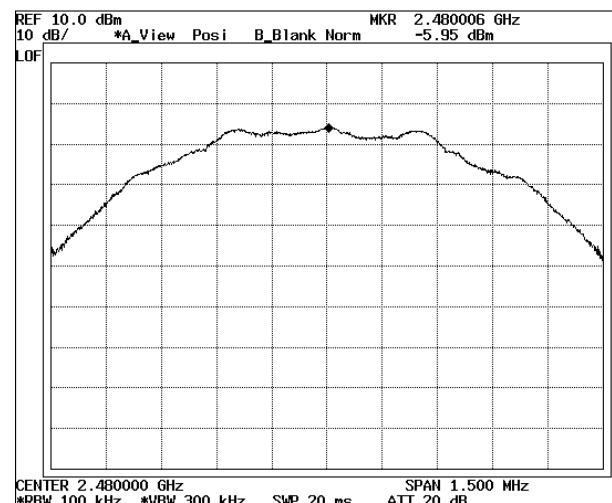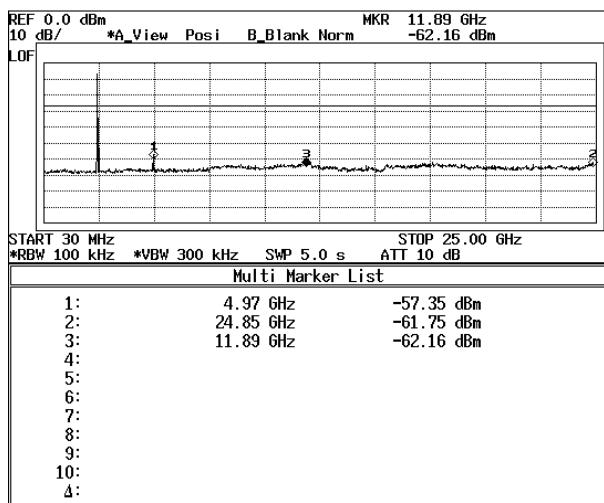

Note : Measurement level = reading level + correct factor




### Band Edge Test result


Product	360FLYBLK
Test Item	Band Edge
Test Mode	Transmit Low/High
Test Site	RF Room
Measurement Method	Conducted

#### ● BT LE (GFSK)

Low (2402 MHz)

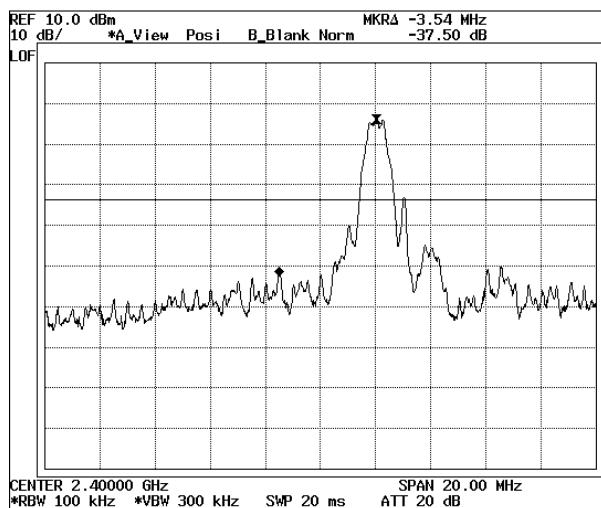

High (2480 MHz)

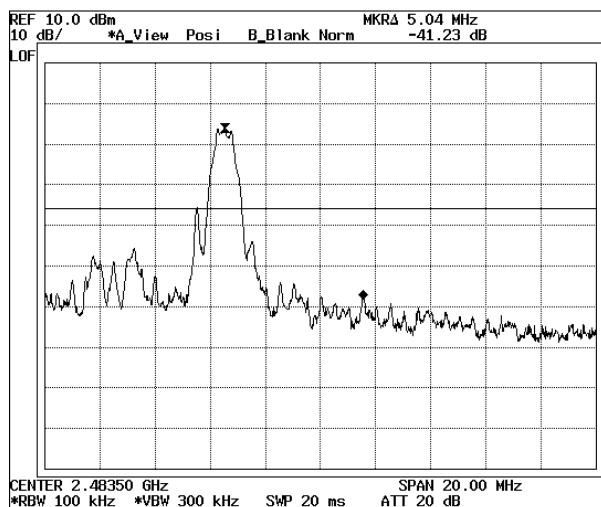

Note : Measurement level = reading level + correct factor




## Radiated Emissions:

The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120kHz.


### Procedure of Test

Preliminary measurements were made at 3 meter using bi-log antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1000MHz using bi-log antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission.(The bandwidth below 1GHz setting on the field strength meter is 120KHz and above 1GHz is 1MHz.)

### Under 1GHz Test Setup:

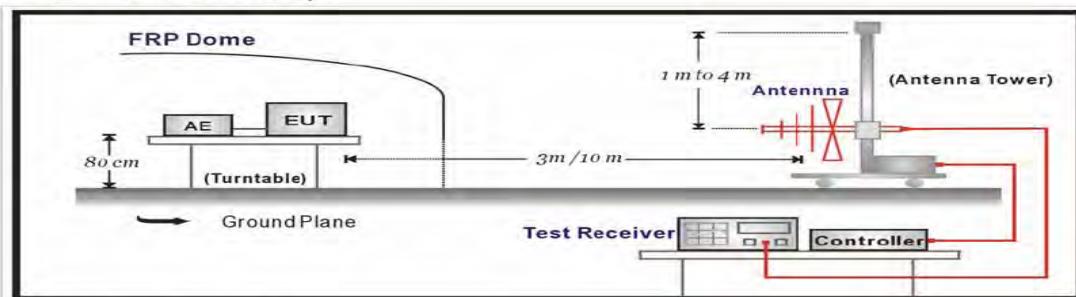


### Above 1GHz Test Setup:

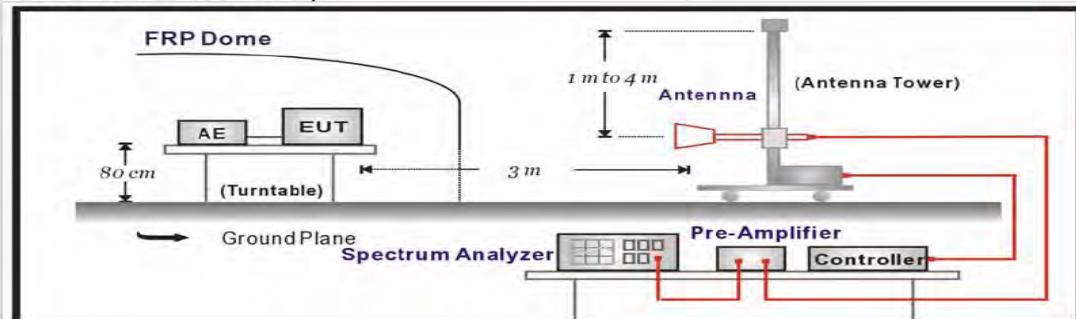



**Below 30 MHz**

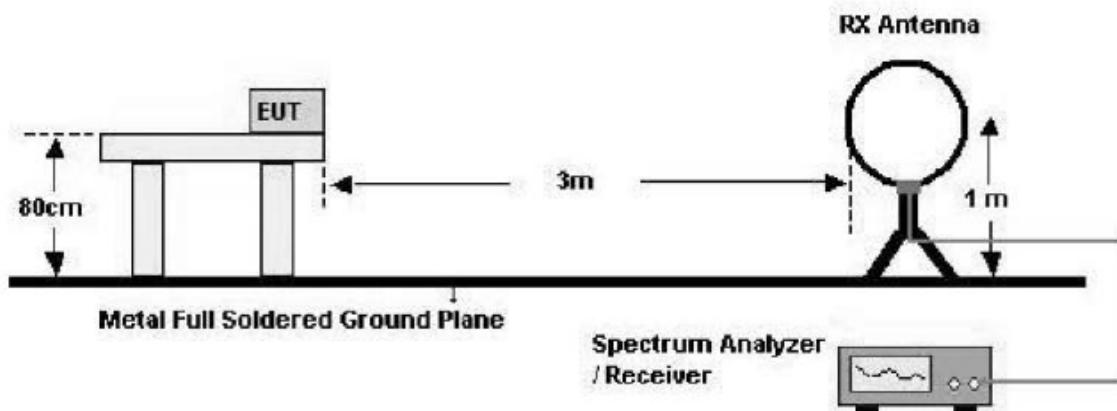

**Limits**

Emissions radiated outside of the specified frequency bands, except for harmonics, Shall be attenuated by at least 20dB below the level of the fundamental or to the General radiated emission limits in paragraph 15.209, whichever is the lesser attenuation:

FCC Part 15 Subpart C Section 15.209 Limits		
Frequency(MHz)	$\mu\text{V}/\text{meter}$	$\text{dB}\mu\text{V}/\text{meter}(3\text{m})$
0.009-0.490	2400/F(KHz) at 300 m	$20\log 2400/F(\text{KHz})+80$
0.490-1.705	24000/F(KHz) at 30m	$20\log 24000/F(\text{KHz})+40$
1.705-30	30 at 30 m	49.5
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks :

1. RF Voltage( $\text{dB}\mu\text{V}$ )= $20\log$  RF Voltage( $\mu\text{V}$ )
2.  $\text{dB}\mu\text{V}/\text{m} = \text{ERP}(\text{dBm})+106.92 \text{ dB} + 20\log(10\text{m}/3\text{m}) + 2.15\text{dB}$ (conversion Factor for E.I.R.P)
3. In the Above Table, the tighter limit applies at the band edges.
4. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Test specification.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.209

IC RSS-210 Clause 2.6

IC RSS-Gen Clause 6



**Radiated Spurious Emissions**  
**& Restricted bands Emissions**

**[Applicable]**

◆ Test Equipment Used

Name	Type	Manufacturer	Due for Cal	Serial Number
EMI Receiver	ESCS30	Rohde & Schwarz	May. 08, 2015	100171
EMI Receiver	ESCI7	Rohde & Schwarz	Jul. 21, 2015	100872
SPECTRUM ANALYZER	R3273	ADVANTEST	May. 08, 2015	110600587
Loop Antenna	HFH2-Z2	Rohde & Schwarz	Oct. 26, 2014	8620771017
Log-bicon Antenna	VULB9160	Schwarz beck	Jun. 03, 2015	3071
HORN-Antenna	3115	EMCO	Dec. 04, 2015	9012-3602
BROADBAND HORN-Antenna	BBHA9170	Schwarzbeck	Sep. 06, 2015	BBHA9170318
PRE AMPLIFIER	8449B OPT H02	HP	Oct. 06, 2015	3008A0530

*Note : 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to RRL, KRISS, KTL and HCT.*  
*2. The calibration interval of horn ant. and loop ant. is 24 months*

◆ Test Conditions

Temperature ( 23.0 ± 0.2 ) °C  
 Humidity ( 46.2 ± 0.2 ) % R.H.  
 Atmosphere ( 1005 ) mbar

◆ Test Area Full-Anechoic Room ( 3m )

◆ Test Date September 25, 2015

**Note :**

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

Where Corr. Factor = Antenna Factor + Cable Factor - Amplifier Gain (if any)



### Radiated Emissions Test, 9 kHz to 30 MHz (Magnetic Field Test)

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions at a distance of 3 meters according to Section 15.31(f)(2).
2. The EUT was placed on the top of the 0.8-meter height, 1 x 1.5 meter non-metallic table.
3. Emissions from the EUT are maximized by adjusting the orientation of the Loop antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions if applicable.
4. To obtain the final measurement data, each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector with specified bandwidth.
5. The result was 20dB lower than the limit line 15.31(o) was not reported.

### Radiated Emissions Result

Frequency MHz	Reading dBuV	P (H, V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB

Note : The measured value have enough margin over 20dB than the limit, therefore they are not reported.



**Radiated Spurious Emissions Result**

[Applicable]

**Spurious Emissions Test (Below 1GHz) :**

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types and antenna ports(if EUT with antenna diversity architecture), and X,Y,Z Axis.

EUT	360FLYBLK	PROBE	Below 1 GHz
POWER	DC 3.7 V	NOTE	0 Channel (2402 MHz)
MODE	BT LE (GFSK)		

Frequency MHz	Reading dBuV	P (H,V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB
99.843	26.50	H	8.56	1.66	43.50	36.72	-6.78
214.305	23.70	H	9.70	2.52	43.50	35.92	-7.58
264.742	23.30	H	11.69	2.76	46.00	37.75	-8.25
289.963	19.90	V	12.58	2.88	46.00	35.36	-10.64
*327.791	24.10	H	13.63	3.04	46.00	40.77	-5.23

EUT	360FLYBLK	PROBE	Below 1 GHz
POWER	DC 3.7 V	NOTE	19 Channel (2440 MHz)
MODE	BT LE (GFSK)		

Frequency MHz	Reading dBuV	P (H,V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB
214.308	22.20	H	9.70	2.52	43.50	34.42	-9.08
239.522	18.30	V	10.74	2.64	46.00	31.68	-14.32
264.745	23.70	H	11.69	2.76	46.00	38.15	-7.85
289.963	20.60	H	12.58	2.88	46.00	36.06	-9.94
*480.081	17.50	H	17.55	3.66	46.00	38.71	-7.29



EUT	360FLYBLK	PROBE	Below 1 GHz
POWER	DC 3.7 V	NOTE	39 Channel (2480 MHz)
MODE	BT LE (GFSK)		

Frequency MHz	Reading dBuV	P (H,V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB
126.035	21.2	H	11.19	1.83	43.50	34.22	-9.28
192.964	18.4	V	9.79	2.35	43.50	30.54	-12.96
214.302	23.2	H	9.70	2.52	43.50	35.42	-8.08
*264.741	23.7	H	11.69	2.76	46.00	38.15	-7.85
378.237	19.7	V	14.89	3.25	46.00	37.84	-8.16

Note :

1. Remark "\*" means that the data is the worst emission level.
2. All reading levels are Quasi-peak value.
3. Measurement level = reading level + correct factor



**Spurious Emissions Test (Above 1GHz) :**

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types and antenna ports(if EUT with antenna diversity architecture), and X,Y,Z Axis.

EUT	360FLYBLK	PROBE	Above 1 GHz
POWER	DC 3.7 V	CHANNEL	0 Channel (2402 MHz)
MODE	BT LE (GFSK)		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.105	44.02	30.61	H	74.00	54.00	29.98	23.39
1.661	44.24	27.79	H	74.00	54.00	29.76	26.21
4.714	44.25	32.35	H	74.00	54.00	29.75	21.65
5.564	45.65	34.34	H	74.00	54.00	28.35	19.66
1.082	42.03	25.90	V	74.00	54.00	31.97	28.10
1.996	39.50	27.75	V	74.00	54.00	34.50	26.25
3.924	43.83	32.15	V	74.00	54.00	30.17	21.85
5.249	46.00	33.69	V	74.00	54.00	28.00	20.31
8.612	51.38	40.52	V	74.00	54.00	22.62	13.48

EUT	360FLYBLK	PROBE	Above 1 GHz
POWER	DC 3.7 V	CHANNEL	19 Channel (2440 MHz)
MODE	BT LE (GFSK)		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.102	42.82	29.70	H	74.00	54.00	31.18	24.30
1.665	43.95	28.71	H	74.00	54.00	30.05	25.29
3.173	43.05	31.26	H	74.00	54.00	30.95	22.74
5.612	45.79	34.25	H	74.00	54.00	28.21	19.75
1.084	41.51	25.82	V	74.00	54.00	32.49	28.18
3.932	44.68	31.97	V	74.00	54.00	29.32	22.03
5.894	46.32	34.18	V	74.00	54.00	27.68	19.82
6.458	48.27	35.25	V	74.00	54.00	25.73	18.75



EUT	360FLYBLK	PROBE	Above 1 GHz
POWER	DC 3.7 V	NOTE	39 Channel (2480 MHz)
MODE	BT LE (GFSK)		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
1.103	43.14	29.50	H	74.00	54.00	30.86	24.50
1.664	42.57	28.04	H	74.00	54.00	31.43	25.96
5.653	46.03	34.26	H	74.00	54.00	27.97	19.74
1.081	41.84	25.91	V	74.00	54.00	32.16	28.09
1.996	40.53	28.31	V	74.00	54.00	33.47	25.69
3.194	43.70	31.17	V	74.00	54.00	30.30	22.83
5.217	45.64	34.34	V	74.00	54.00	28.36	19.66

*Note : -Reading(dBuV) : Measurement Level + Ant Factor + Cable Loss - Amp Gain*

*- The measured value from 6GHz to 25GHz have enough margin over 20dB than the limit, therefore they are not reported.*




**Radiated Restricted bands Emissions Result**


EUT	360FLYBLK	PROBE	Above 1 GHz
POWER	DC 3.7 V	NOTE	0 Channel (2402 MHz)
MODE	BT LE (GFSK)		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	2.3859	43.71	36.49	H	74.00	54.00	30.29
2.3853	44.22	35.34	V	74.00	54.00	29.78	18.66

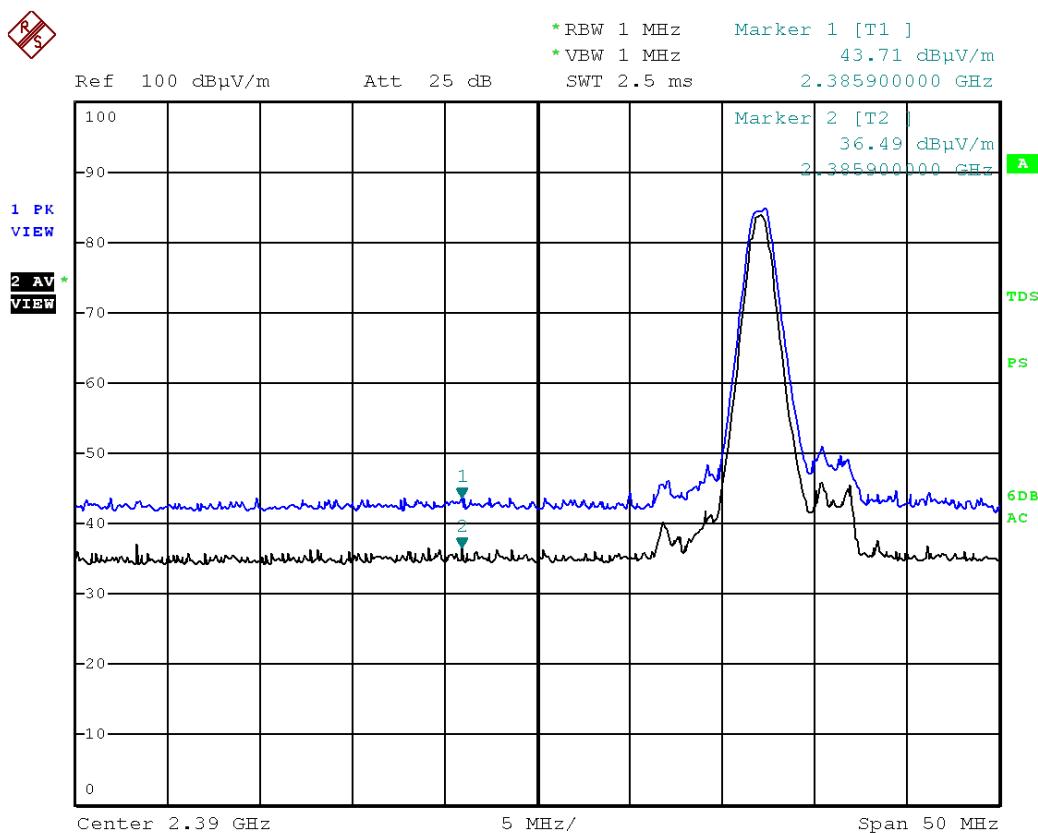

BT LE (GFSK) Low (Horizontal)

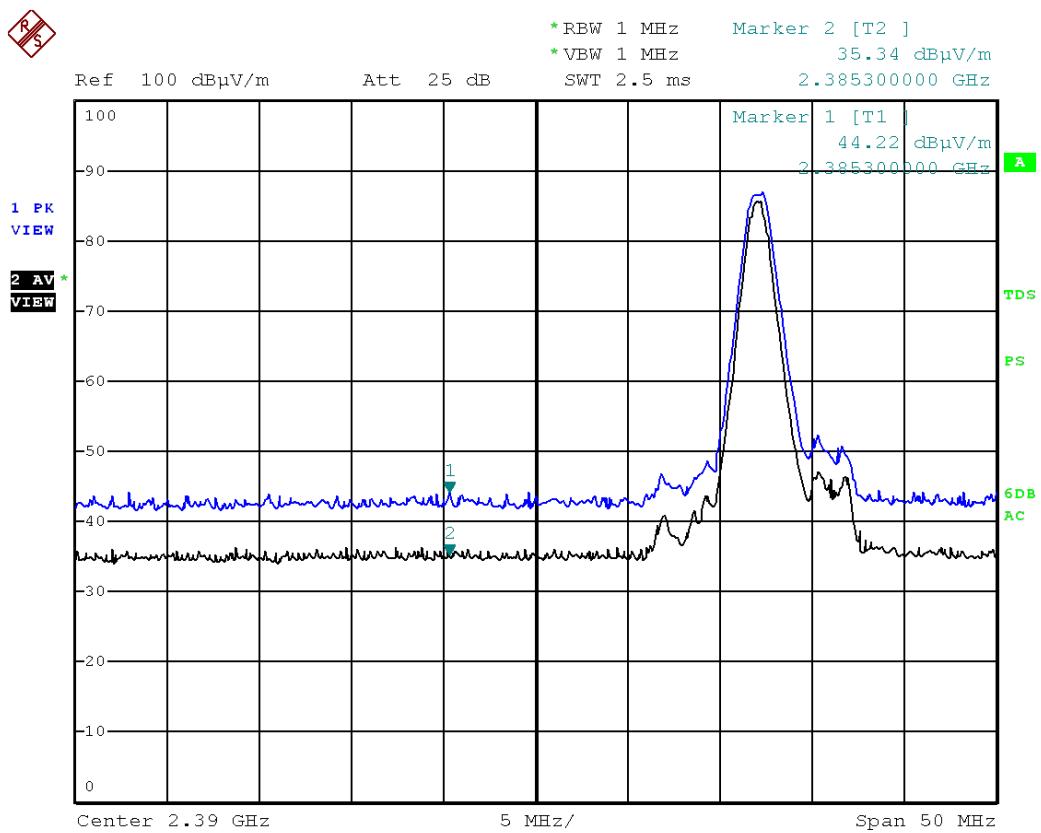


## BT LE(GFSK) Low (Vertical)




EUT	360FLYBLK	PROBE	Above 1 GHz
POWER	DC 3.7 V	NOTE	39 Channel (2480 MHz)
MODE	BT LE (GFSK)		

**Test Data**

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	2.4846	44.04	35.72	H	74.00	54.00	29.96
2.4846	44.39	35.91	V	74.00	54.00	29.61	18.09

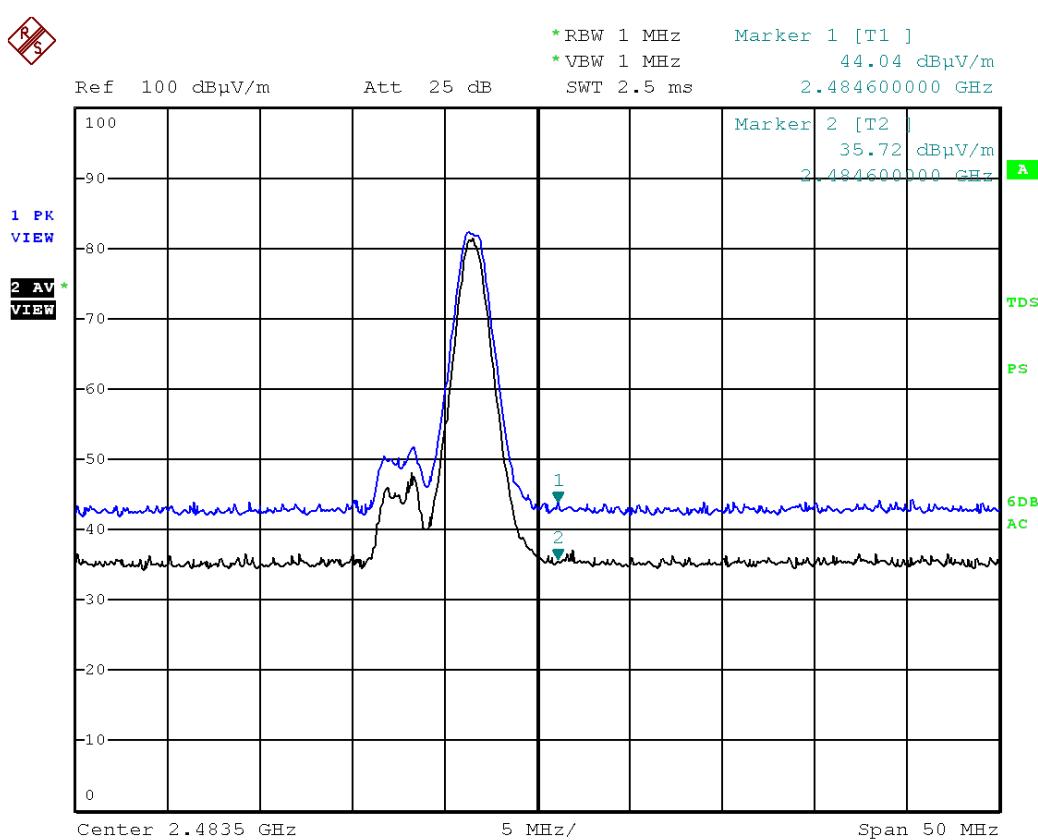

BT LE(GFSK) High (Horizontal)

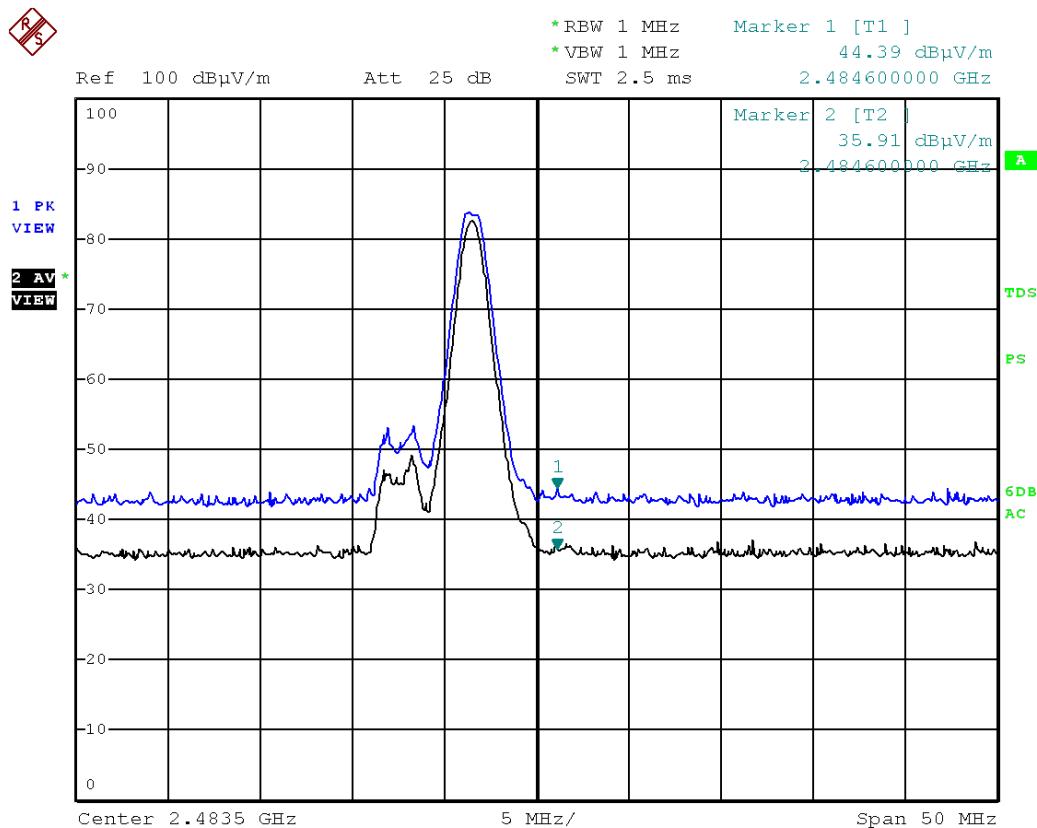

BT LE(GFSK) High (Vertical)

Note : Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain



## Antenna requirements

### **According to FCC 47 CFR 15.203**

“an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

\* the antenna of this EUT is a unique(CHIP Antenna).

\* the EUT complies with the requirement of 15.203

