

# **Certification Test Report**

FCC ID: 2ADDK360FLY4K IC: 12404A-360FLY4K

FCC Rule Part: 15.247 IC Radio Standards Specification: RSS-247

ACS Report Number: 16-2006.W06.2A

Applicant: 360fly, Inc.

Model(s): 360FLY4K

Test Begin Date: February 12, 2016 Test End Date: March 2, 2016

Report Issue Date: April 7, 2016



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

Reviewed by:

**Thierry Jean-Charles** 

**EMC Engineer** 

Advanced Compliance Solutions, Inc.

Town Charles for the

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 17 pages

# **TABLE OF CONTENTS**

1	GENERAL	3
1.1	Purpose	3
1.2	Applicant Information	3
1.3	Product Description	3
1.4	Test Methodology and Considerations	4
2	TEST FACILITIES	5
2.1	Location	5
2.2	Laboratory Accreditations/Recognitions/Certifications	5
2.3	Radiated & Conducted Emissions Test Site Description	6
3	APPLICABLE STANDARD REFERENCES	8
4	LIST OF TEST EQUIPMENT	9
5	SUPPORT EQUIPMENT	10
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	11
7	SUMMARY OF TESTS	12
7.1	Antenna Requirement – FCC: Section 15.203	12
7.2	Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC: RSS-247 5.5	12
7.3	Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 8.8	14
8	CONCLUSION	17

#### 1 GENERAL

#### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-247.

#### 1.2 Applicant Information

360fly, Inc. 1000 Town Center Way, Suite 200 Canonsburg, PA 15317

#### 1.3 Product Description

The product 360FLY4K is a camera which includes a single transceiver that supports GPS, Bluetooth 3.0/4.0 and Wi-Fi 2.4/5GHz bands. The function of the transceiver is to communicate with smart phones or tablet over Bluetooth and Wi-Fi using custom application. The custom application allows users to change the camera settings, capture pictures, record videos, share media and edit videos using Wi-Fi connection. This test report document results for the Bluetooth 3.0+EDR radio.

#### **Technical Details**

Mode of Operation: Bluetooth Low Energy (BLE) Frequency Range: 2402 MHz - 2480 MHz

Number of Channels: 40 Channel Separation: 2 MHz Modulations: GFSK

Antenna Type/Gain: Loop Antenna, 0.03 dBi Input Power: 3.8 VDC, Lithium Ion Battery

Model Number: 360FLY4K

Test Sample Serial Number(s): PIB179 (Radiated and Power Line Conducted Emissions).

Test Sample Condition: The equipment was provided in good condition without any physical damage.

#### 1.4 Test Methodology and Considerations

The EUT was evaluated for radiated and power line conducted emissions for the Bluetooth Low Energy (BLE) radio. The RF conducted measurements were performed by a different test facility which has documented the results in a separate test report.

For the radiated emission evaluation, preliminary evaluation was performed for the EUT standalone, the EUT powered via a power supply and the EUT connected to a laptop computer. The radiated emissions from the three configurations did not differ significantly and the final measurements were collected using the laptop configuration.

The power line conducted emissions evaluation was performed for the EUT powered using a wall adapter.

The EUT was also evaluated for unintentional emissions. The results are documented separately in a Declaration of Conformity/Verification test report.

#### **2 TEST FACILITIES**

#### 2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc. 3998 FAU Blvd, Suite 310 Boca Raton, Florida 33431 Phone: (561) 961-5585

Fax: (561) 961-5587 www.acstestlab.com

FCC Test Firm Registration #: 475089 Industry Canada Lab Code: 4175C

#### 2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

#### 2.3 Radiated & Conducted Emissions Test Site Description

#### 2.3.1 Semi-Anechoic Chamber Test Site

Model(s): 360FLY4K

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flush with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1050 Multi-device controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

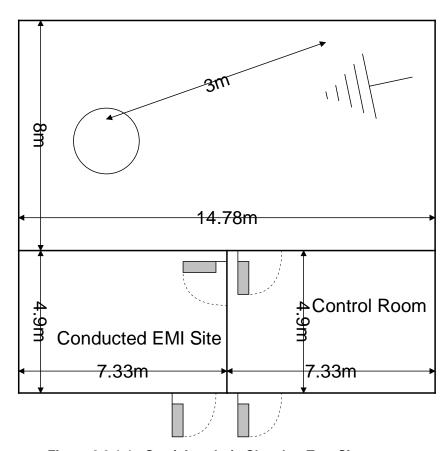


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

Model(s): 360FLY4K

### 2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are 7.3 x 4.9 x 3 m $^3$ . The power line conducted emission site includes two LISNs: a Solar Model 8028-50 50  $\Omega/50~\mu H$  and an EMCO Model 3825/2R, which are installed as shown in the figure below. For evaluations requiring 230 V, 50 Hz AC input, a Polarad LISN (S/N 879341/048) is used in conjunction with a California Instruments signal generator Model 2001RP-OP1.

A diagram of the room is shown below in figure 2.3.2-1:

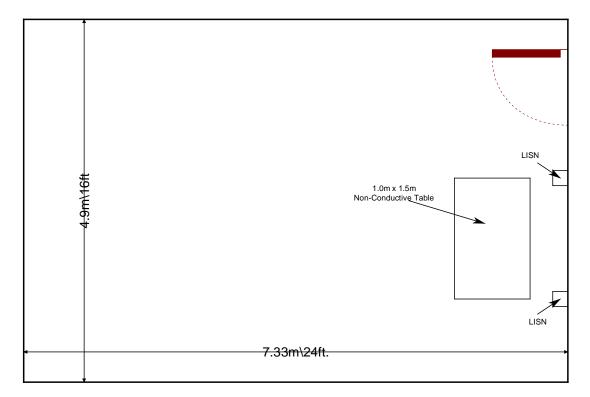


Figure 2.3.2-1: AC Mains Conducted EMI Site

#### 3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ANSI C63.4-2014: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40 GHz.
- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2016.
- US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2016
- ❖ Industry Canada Radio Standards Specification: RSS-247 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 1, May 2015.
- Industry Canada Radio Standards Specification: RSS-GEN General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.

#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment** 

**Table 4-1: Test Equipment List** 

					Last Calibration	Calibration
AssetID	Manufacturer	Model #	Equipment Type	Serial #	Date	Due Date
479	Electro-Metrics	ALP-70	Antennas	158	12/3/2015	12/3/2017
523	Agilent	E7405	Spectrum Analyzers	MY45103293	12/26/2014	12/26/2016
653	Suhner	SF-102A	Cables	0944/2A	4/13/2015	4/13/2016
2002	EMCO	3108	Antennas	2147	11/19/2015	11/19/2017
2004	EMCO	3146	Antennas	1385	11/19/2015	11/19/2017
2006	EMCO	3115	Antennas	2573	4/14/2015	4/14/2017
2008	COM-Power	AH-826	Antennas	81009	NCR	NCR
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	11/18/2015	11/18/2016
2022	EMCO	LISN3825/2R	LISN	1095	9/14/2015	9/14/2017
2045	ACS Boca	Conducted Cable Set	Cable Set	2045	11/11/2015	11/11/2016
2070	Mini Circuits	VHF-8400+	Filter	2070	11/17/2015	11/17/2016
2072	Mini Circuits	VHF-3100+	Filter	30737	11/17/2015	11/17/2016
2075	Hewlett Packard	8495B	Attenuators	2626A11012	11/18/2015	11/18/2016
2082	Teledyne Storm Products	90-010-048	Cables	2082	4/22/2015	4/22/2016
2086	Merrimac	FAN-6-10K	Attenuators	23148-83-1	11/16/2015	11/16/2016
2089	Agilent Technologies, Inc.	83017A	Amplifiers	3123A00214	12/9/2015	12/9/2016
2095	ETS Lindgren	TILE4! - Version 4.2.A	Software	85242	NCR	NCR
2121	ACS Boca	Radiated Cable Set	Cable Set	2121	8/22/2015	8/22/2016
3004	Teseq	CFL 9206A	Attenuators	34720	10/7/2015	10/7/2016

Note: NCR=No Calibration Required

#### **5 SUPPORT EQUIPMENT**

Table 5-1: EUT and Support Equipment (Radiated Emissions)

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	360fly, Inc.	360FLY4K	PIB179
2	Dock	360fly, Inc.	360FLYBLK	N/A
3	Laptop	Apple, Inc	Macbook Pro A1278	C1MN2X3DTY3
4	Mouse	Dell	M-UARDEL7	LZ9440C43W5
5	Laptop AC Adapter	Apple, Inc	MagSafe	N/A
6	Earbuds	Maxell	N/A	N/A

**Table 5-2: Cable Description (Radiated Emissions)** 

Cable #	Cable Type	Cable Type Length Shield		Termination
Α	USB	0.56 m	No	EUT Dock to Laptop
В	USB	1.80 m	No	Mouse to Laptop
С	Audio	0.95 m	No	Laptop to Earbuds
D	Power	1.80 m	No	Laptop to AC Adapter
	Extension Cord	2.7 m	No	Laptop Adapter to AC Mains

**Table 5-3: EUT and Support Equipment (Power Line Conducted Emissions)** 

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	360fly, Inc.	360FLY4K	PIB179
2	Dock	360fly, Inc.	360FLYBLK	N/A
3	5 VDC Wall AC Adapter	VSN	C-P06	141125011054

**Table 5-4: Cable Description (Power Line Conducted Emissions)** 

Cable #	Cable Type	Length	Shield	Termination
Α	USB	0.56 m	No	EUT Dock to Wall AC Adapter
В	Extension Cord	2.7 m	No	AC Adapter to AC Mains

## 6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

Model(s): 360FLY4K

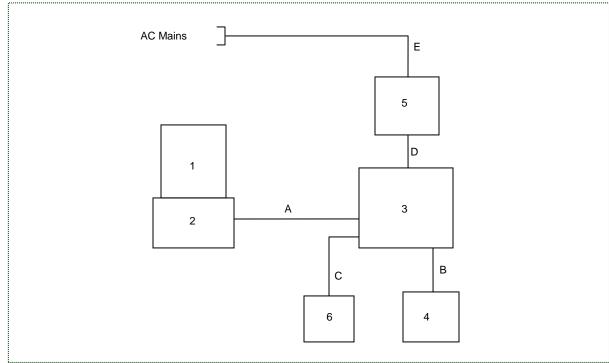


Figure 6-1: EUT Test Setup (Radiated Emissions)

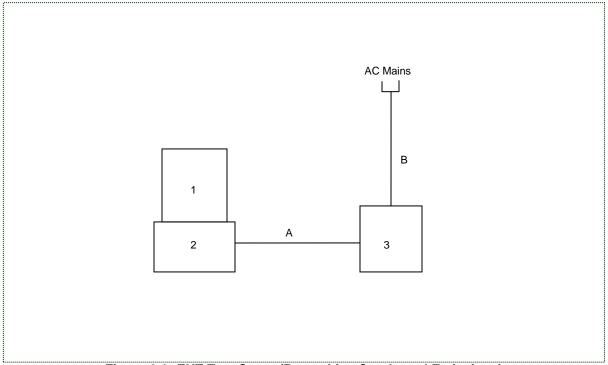


Figure 6-2: EUT Test Setup (Power Line Conducted Emissions)

#### 7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

#### 7.1 Antenna Requirement – FCC: Section 15.203

The EUT uses an internal 0.03 dBi loop antenna which connects to the PCB via spring contact. The antenna meets the requirements of FCC Section 15.203.

#### 7.2 Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC: RSS-247 5.5

# 7.2.1 Radiated Spurious Emissions into Restricted Frequency Bands - FCC 15.205, 15.209; IC: RSS-Gen 8.9, 8.10

#### 7.2.1.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 9 kHz to 26 GHz, 10 times the highest fundamental frequency. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

For measurements below 30 MHz, the receive antenna height was set to 1m and the EUT was rotated through 360 degrees. The resolution bandwidth was set to 200 Hz below 150 kHz and to 9 kHz above 150 kHz.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak measurements are made with RBW of 1 MHz and VBW of 3 MHz. Average measurements are performed in the linear scale using VBW of 30 Hz over a 5 second sweep.

#### 7.2.1.2 Measurement Results

Radiated band-edge and spurious emissions found in the restricted frequency bands of 9 kHz to 26 GHz are reported in the tables below.

**Table 7.2.1.2-1: Radiated Spurious Emissions Tabulated Data** 

Frequency (MHz)	Level (dBuV)		Antenna Polarity	Correction Factors	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
(101112)	pk	Qpk/Avg	(H/V)	(dB)	pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
	Low Channel 2402 MHz									
				Noise Flo	oor					
			Middl	e Channel 244	2 MHz					
				Noise Flo	or					
	High Channel 2480 MHz									
2483.5	<b>2483.5</b> 56.96 46.00 H -5.15 51.81 40.85 74.0 54.0 22.2 13.2									
2483.5	58.12	47.95	V	-5.15	52.97	42.80	74.0	54.0	21.0	11.2

Note: All emissions above 2.484 GHz were attenuated below the limits and the noise floor of the measurement equipment.

#### 7.2.1.3 Sample Calculation:

 $R_C = R_U + CF_T$ 

Where:

CF<sub>T</sub> = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

R<sub>U</sub> = Uncorrected Reading
R<sub>C</sub> = Corrected Level
AF = Antenna Factor
CA = Cable Attenuation
AG = Amplifier Gain

DC = Duty Cycle Correction Factor

**Example Calculation: Peak** 

Corrected Level:  $56.96+ (-5.15) = 51.81 \text{ dB}\mu\text{V/m}$ Margin:  $74 \text{ dB}\mu\text{V/m} - 51.81 \text{ dB}\mu\text{V/m} = 22.2 \text{ dB}$ 

**Example Calculation: Average** 

Corrected Level:  $46.0 + (-5.15) = 40.85 \text{ dB}\mu\text{V/m}$ Margin:  $54 \text{ dB}\mu\text{V/m} - 40.85 \text{ dB}\mu\text{V/m} = 13.2 \text{ dB}$ 

#### 7.3 Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 8.8

#### 7.3.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer's resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss Margin = Applicable Limit - Corrected Reading

#### 7.3.2 Measurement Results

Results are shown below.

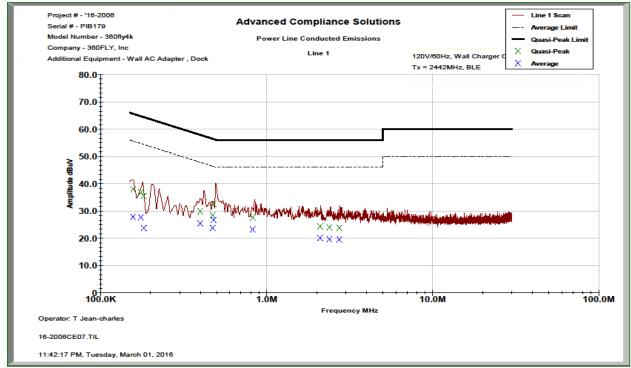


Figure 7.3.2-1: Conducted Emissions Results - Line 1

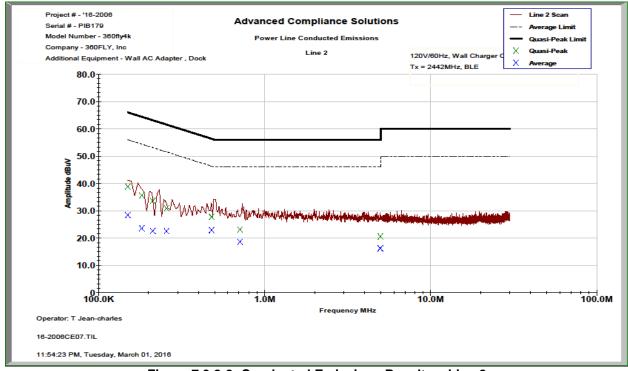


Figure 7.3.2-2: Conducted Emissions Results – Line 2

**Table 7.3.2-1: Conducted EMI Results** 

<ul> <li>□ Line 1 □ Line 2 □ Line 3</li> <li>□ Line 4</li> <li>□ To Ground □ Floating</li> <li>□ Telecom Port</li> <li>□ dBµV □ dBµA</li> </ul>
Plot Number: 16-2006CE07 Power Supply Description: 5 VDC

Frequency (MHz)	Uncorrected Reading		Total Correction Factor	Corrected Level		Limit		Margin	(dB)
, ,	Quasi- Peak	Average	(dB)	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
				Lir	ne 1				
0.157245	27.756	17.6	10.22	37.98	27.82	65.61	55.61	27.6	27.8
0.174849	26.693	17.492	10.20	36.90	27.70	64.73	54.73	27.8	27.0
0.182237	25.31	13.553	10.20	35.51	23.76	64.38	54.38	28.9	30.6
0.398649	19.632	15.255	10.20	29.83	25.46	57.88	47.88	28.0	22.4
0.473275	18.159	13.633	10.21	28.37	23.84	56.46	46.46	28.1	22.6
0.479999	22.274	16.578	10.21	32.48	26.79	56.34	46.34	23.9	19.6
0.824013	17.52	13.035	10.19	27.71	23.22	56.00	46.00	28.3	22.8
2.1001	14.108	9.873	10.28	24.38	20.15	56.00	46.00	31.6	25.9
2.39114	13.749	9.341	10.28	24.02	19.62	56.00	46.00	32.0	26.4
2.74187	13.547	9.249	10.28	23.82	19.52	56.00	46.00	32.2	26.5
				Lir	ne 2				
0.150067	28.655	18.202	10.23	38.89	28.44	66.00	56.00	27.1	27.6
0.182237	25.392	13.365	10.22	35.62	23.59	64.38	54.38	28.8	30.8
0.212087	23.417	12.452	10.22	33.63	22.67	63.12	53.12	29.5	30.5
0.256863	20.728	12.374	10.21	30.93	22.58	61.53	51.53	30.6	29.0
0.479999	17.59	12.77	10.21	27.80	22.98	56.34	46.34	28.5	23.4
0.480737	17.608	12.767	10.21	27.82	22.98	56.33	46.33	28.5	23.3
0.712075	12.926	8.47	10.23	23.15	18.70	56.00	46.00	32.8	27.3
4.98	10.147	5.792	10.44	20.59	16.23	56.00	46.00	35.4	29.8
4.9801	10.099	5.716	10.44	20.54	16.16	56.00	46.00	35.5	29.8

#### 8 CONCLUSION

In the opinion of ACS, Inc., the model 360FLY4K manufactured by 360fly, Inc. meet the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-247 for the test procedures documented in the test report.

# **END REPORT**