


FCC Radio Test Report


FCC ID: 2ADEN-INTRALOT-GNN2


This report concerns (check one): ☒ Original Grant ☐ Class I Change ☐ Class II Change

Project No. : 1712054
Equipment : Genion II
Test Model : PN223
Series Model : PN323, PN224, PN324, PN223XXXXXXXXXXXXXXXXXX, PN323XXXXXXXXXXXXXXXXXX, PN224XXXXXXXXXXXXXXXXXX, PN324XXXXXXXXXXXXXXXXXX (where X may be any alphanumeric character, blank or "-").
Applicant : INTRALOT S.A.
Address : 64, Kifissias Ave. & 3, Premetis Str. 15125 Athens, Greece

Date of Receipt : Jan. 03, 2018
Date of Test : Jan. 03, 2018 ~ Jan. 19, 2018
Issued Date : Jan. 22, 2018
Tested by : BTL Inc.

Testing Engineer : 
(Kenji Lin)

Technical Manager : 
(James Chiu)

Authorized Signatory : 
(Andy Chiu)

B T L I N C .

No.18, Ln. 171, Sec. 2, Jiuzong Rd.,
Neihu Dist., Taipei City, Taiwan (R.O.C.)
TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents

Page

1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	13
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	15
3.3 DUTY CYCLE	17
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	19
3.5 DESCRIPTION OF SUPPORT UNITS	19
4 . EMC EMISSION TEST	20
4.1 CONDUCTED EMISSION MEASUREMENT	20
4.1.1 POWER LINE CONDUCTED EMISSION	20
4.1.2 TEST PROCEDURE	20
4.1.3 DEVIATION FROM TEST STANDARD	20
4.1.4 TEST SETUP	21
4.1.5 EUT OPERATING CONDITIONS	21
4.1.6 EUT TEST CONDITIONS	21
4.1.7 TEST RESULTS	21
4.2 RADIATED EMISSION MEASUREMENT	22
4.2.1 RADIATED EMISSION LIMITS	22
4.2.2 TEST PROCEDURE	23
4.2.3 DEVIATION FROM TEST STANDARD	23
4.2.4 TEST SETUP	23
4.2.5 EUT OPERATING CONDITIONS	24
4.2.6 EUT TEST CONDITIONS	24
4.2.7 TEST RESULTS (9K TO 30MHz)	25
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	25
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	25
5 . 26dB SPECTRUM BANDWIDTH	26
5.1 APPLIED PROCEDURES / LIMIT	26
5.1.1 TEST PROCEDURE	26
5.1.2 DEVIATION FROM STANDARD	26
5.1.3 TEST SETUP	26
5.1.4 EUT OPERATION CONDITIONS	26
5.1.5 EUT TEST CONDITIONS	27
5.1.6 TEST RESULTS	27

Table of Contents	Page
6 . MAXIMUM CONDUCTED OUTPUT POWER	28
6.1 APPLIED PROCEDURES / LIMIT	28
6.1.1 TEST PROCEDURE	28
6.1.2 DEVIATION FROM STANDARD	29
6.1.3 TEST SETUP	29
6.1.4 EUT OPERATION CONDITIONS	29
6.1.5 EUT TEST CONDITIONS	29
6.1.6 TEST RESULTS	29
7 . POWER SPECTRAL DENSITY TEST	30
7.1 APPLIED PROCEDURES / LIMIT	30
8.1.1 TEST PROCEDURE	30
7.1.1 DEVIATION FROM STANDARD	31
7.1.2 TEST SETUP	31
7.1.3 EUT OPERATION CONDITIONS	31
7.1.4 EUT TEST CONDITIONS	31
7.1.5 TEST RESULTS	31
8 . FREQUENCY STABILITY MEASUREMENT	32
8.1 APPLIED PROCEDURES / LIMIT	32
8.1.1 TEST PROCEDURE	32
8.1.2 DEVIATION FROM STANDARD	32
8.1.3 TEST SETUP	33
8.1.4 EUT OPERATION CONDITIONS	33
8.1.5 EUT TEST CONDITIONS	33
8.1.6 TEST RESULTS	33
9 . MEASUREMENT INSTRUMENTS LIST	34
10 . EUT TEST PHOTOS	36
APPENDIX A - CONDUCTED EMISSION	40
APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)	49
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	66
APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)	75
APPENDIX E - BANDWIDTH	228
APPENDIX F - MAXIMUM OUTPUT POWER	274
APPENDIX G - POWER SPECTRAL DENSITY	283
APPENDIX H - FREQUENCY STABILITY	313

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-3-1712054	Original Issue.	Jan. 22, 2018

1. CERTIFICATION

Equipment : Genion II
Brand Name : INTRALOT
Test Model : PN223
Series Model : PN323, PN224, PN324, PN223XXXXXXXXXXXXXXXXXX,
PN323XXXXXXXXXXXXXXXXXX,PN224XXXXXXXXXXXXXXXXXX,
PN324XXXXXXXXXXXXXXXXXX(where X may be any alphanumeric character ,
blank or "-".)
Applicant : INTRALOT S.A.
Manufacturer : Advantech Co., Ltd.
Address : No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei, Taiwan 11491,
R.O.C.
Date of Test : Jan. 03, 2018 ~ Jan. 19, 2018
Test Sample : Production Unit
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found in compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-3-1712054) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the 5GHz RLAN part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	
15.407(c)	Automatically Discontinue Transmission	PASS	NOTE (2)

NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving.
The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C05: (VCCI RN: C-4742; FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

Radiated emission Test (Below 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Above 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted emission test:

Test Site	Method	Measurement Frequency Range	U,(dB)
C05	CISPR	150 kHz ~ 30MHz	2.68

B. Radiated emission test:

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (3m)	CISPR	9kHz ~ 150kHz	2.82
		150kHz ~ 30MHz	2.58

Test Site	Method	Measurement Frequency Range	Ant.	U,(dB)
CB15 (3m)	CISPR	30MHz ~ 200MHz	V	4.20
		30MHz ~ 200MHz	H	3.64
		200MHz ~ 1,000MHz	V	4.56
		200MHz ~ 1,000MHz	H	3.90

Test Site	Method	Measurement Frequency Range	Ant.	U,(dB)
CB15 (3m)	CISPR	1GHz ~ 6GHz	V	4.46
		1GHz ~ 6GHz	H	4.40
		6GHz ~ 18GHz	V	3.88
		6GHz ~ 18GHz	H	4.00

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (1m)	CISPR	18 ~ 26.5 GHz	4.62
		26.5 ~ 40 GHz	5.12

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

Note: unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Genion II	
Brand Name	INTRALOT	
Test Model	PN223	
Series Model	PN323, PN224, PN324, PN223XXXXXXXXXXXXXXXXXX, PN323XXXXXXXXXXXXXXXXXX, PN224XXXXXXXXXXXXXXXXXX, PN324XXXXXXXXXXXXXXXXXX(where X may be any alphanumeric character , blank or "-".)	
Model Difference	The market distribution is different only.	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	433.3Mbps
Output Power	Output Power (Max.)for UNII-1 (1TX)	802.11a: 11.30dBm 802.11n (20M): 11.45dBm 802.11n (40M): 10.56dBm 802.11ac (20M): 9.75dBm 802.11ac (40M): 9.95dBm 802.11ac (80M): 9.93dBm
	Output Power (Max.)for UNII-2A (1TX)	802.11a: 11.37dBm 802.11n (20M): 11.43dBm 802.11n (40M): 10.36dBm 802.11ac (20M): 9.80dBm 802.11ac (40M): 9.89dBm 802.11ac (80M): 9.72dBm
	Output Power (Max.)for UNII-2C (1TX)	802.11a: 11.37dBm 802.11n (20M): 11.28dBm 802.11n (40M): 10.74dBm 802.11ac (20M): 9.89dBm 802.11ac (40M): 9.89dBm 802.11ac (80M): 9.87dBm
	Output Power (Max.)for UNII-3 (1TX)	802.11a: 11.19dBm 802.11n (20M): 11.37dBm 802.11n (40M): 10.69dBm 802.11ac (20M): 9.93dBm 802.11ac (40M): 9.88dBm 802.11ac (80M): 9.63dBm
Power Source	DC Voltage supplied from AC/DC adapter.	
Power Rating	I/P: AC 100-240V~, 0.8A, 50-60Hz O/P: DC 12.0V 2.08A MAX	

Products Covered	1* Mother board: Advantech /A101-1 1* Power Supply(adapter): FSP / FSP025-DHAN2 1* Smart IC card reader: SYSKING / DIC202-11U 1* RFID module: GIGA-TMS / MP30U-00 1* Touch panel: Acute Touch / AT4-17070-003 1* 2D scanner: Honeywell / 5180SF-1213A0R 1* 4G SD card: Transcend / TS4GSDHC10 1* 16G SD card: Apacer / AP-ISD016GCA-1HTM 1* 2.4GHz wifi: QCOM / LR802UKN3 1* 5GHz wifi: FANGTEC / F-5M02-50-2.0-4-CT
------------------	---

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
132	5660				
136	5680				
140	5700				

UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	An jie	AJDP1J-C0022	PIFA	I-PEX_I	3.55	Band 1
					4.9	Band 2
					6.58	Band 3
					6.58	Band 4

Note:

The Antenna gain is exceeds 6, so power spectral density & conducted power limits will be reduced.

For conducted power:

5500 MHz~5700 MHz :

The reduced conducted power limits (dBm/MHz) = $24 - (6.58-6) = 23.42$

5745 MHz~5805 MHz :

The reduced conducted power limits (dBm/MHz) = $30 - (6.58-6) = 29.42$

For power spectral density:

5500 MHz~5700 MHz :

The reduced power spectral density limits (dBm/MHz) = $11 - (6.58-6) = 10.42$

5745 MHz~5805 MHz :

The reduced power spectral density limits (dBm/MHz) = $30 - (6.58-6) = 29.42$

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC80 Mode / CH42 (UNII-1)
Mode 5	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 6	TX N20 Mode / CH52, CH60, CH64 (UNII-2A)
Mode 7	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 8	TX AC80 Mode / CH58 (UNII-2A)
Mode 9	TX A Mode / CH100, CH116, CH140 (UNII-2C)
Mode 10	TX N20 Mode / CH100, CH116, CH140 (UNII-2C)
Mode 11	TX N40 Mode / CH102, CH110, CH134 (UNII-2C)
Mode 12	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 13	TX A Mode / CH149,CH157,CH161 (UNII-3)
Mode 14	TX N20 Mode / CH149,CH157,CH161 (UNII-3)
Mode 15	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 16	TX AC80 Mode / CH155 (UNII-3)
Mode 17	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 17	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC80 Mode / CH42 (UNII-1)
Mode 5	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 6	TX N20 Mode / CH52, CH60, CH64 (UNII-2A)
Mode 7	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 8	TX AC80 Mode / CH58 (UNII-2A)
Mode 9	TX A Mode / CH100, CH116, CH140 (UNII-2C)
Mode 10	TX N20 Mode / CH100, CH116, CH140 (UNII-2C)
Mode 11	TX N40 Mode / CH102, CH110, CH134 (UNII-2C)
Mode 12	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 13	TX A Mode / CH149,CH157,CH161 (UNII-3)
Mode 14	TX N20 Mode / CH149,CH157,CH161 (UNII-3)
Mode 15	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 16	TX AC80 Mode / CH155 (UNII-3)

Note:

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

UNII-1 - 1TX			
Test Software Version	PUTTY		
Frequency (MHz)	5180	5200	5240
A Mode	10.65	11.28	11.30
Frequency (MHz)	5180	5200	5240
N20 Mode	11.05	11.42	11.45
Frequency (MHz)	5190	5230	
N40 Mode	10.56	10.54	

UNII-2A - 1TX			
Test Software Version	PUTTY		
Frequency (MHz)	5260	5300	5320
A Mode	10.74	11.37	11.30
Frequency (MHz)	5260	5300	5320
N20 Mode	11.13	11.43	11.15
Frequency (MHz)	5270	5310	
N40 Mode	10.31	10.36	

UNII-2C - 1TX			
Test Software Version	PUTTY		
Frequency (MHz)	5500	5580	5700
A Mode	11.22	11.37	11.30
Frequency (MHz)	5500	5580	5700
N20 Mode	11.25	11.16	11.28
Frequency (MHz)	5510	5550	5670
N40 Mode	10.73	10.74	10.56

UNII-3 - 1TX			
Test Software Version	PUTTY		
Frequency (MHz)	5745	5785	5805
A Mode	11.13	11.19	11.08
Frequency (MHz)	5745	5785	5805
N20 Mode	11.26	11.33	11.37
Frequency (MHz)	5755	5795	
N40 Mode	10.66	10.69	

UNII-1 - 1TX			
Test Software Version	PUTTY		
Frequency (MHz)	5180	5200	5240
AC20 Mode	9.38	9.58	9.75
Frequency (MHz)	5190	5230	
AC40 Mode	9.95	9.88	
Frequency (MHz)	5210		
AC80 Mode	9.93		





UNII-2A - 1TX			
Test Software Version	PUTTY		
Frequency (MHz)	5260	5300	5320
AC20 Mode	9.76	9.67	9.80
Frequency (MHz)	5270	5310	
AC40 Mode	9.77	9.89	
Frequency (MHz)	5290		
AC80 Mode	9.72		



UNII-2C - 1TX			
Test Software Version	PUTTY		
Frequency (MHz)	5500	5580	5700
AC20 Mode	9.71	9.89	9.76
Frequency (MHz)	5510	5550	5670
AC40 Mode	9.89	9.63	9.83
Frequency (MHz)	5530	5610	
AC80 Mod	9.87	9.56	

UNII-3 - 1TX			
Test Software Version	PUTTY		
Frequency (MHz)	5745	5785	5805
AC20 Mode	9.93	9.69	9.74
Frequency (MHz)	5755	5795	
AC40 Mode	9.70	9.88	
Frequency (MHz)	5775		
AC80 Mode	9.63		


3.3 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.

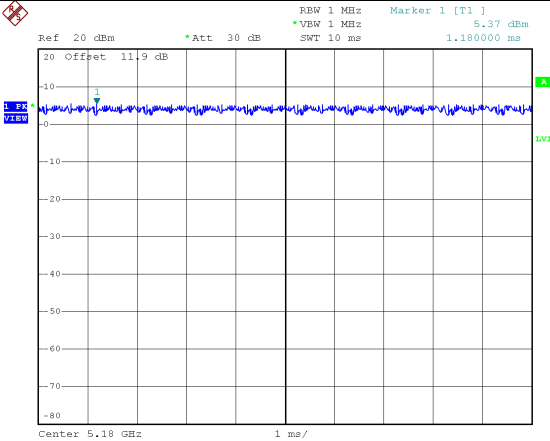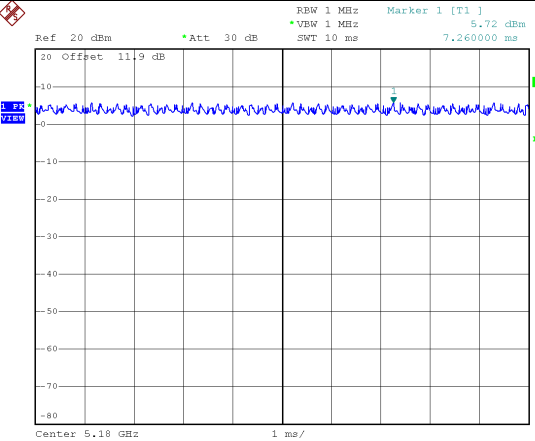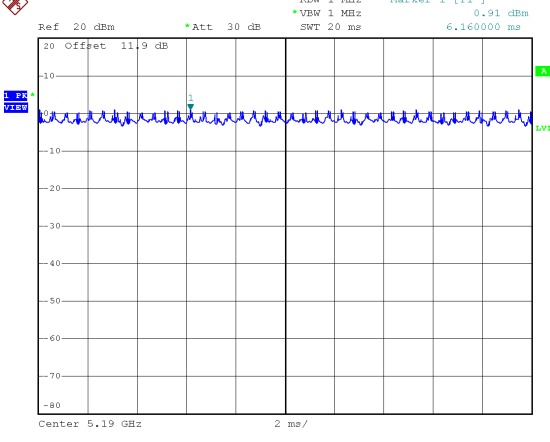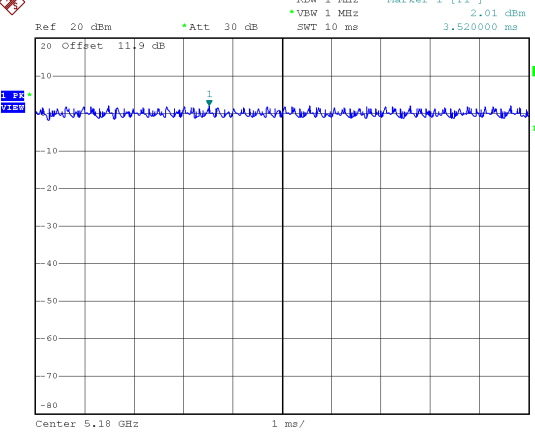IEEE 802.11a  Ref 20 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 5.37 dBm *VBW 1 MHz SWT 10 ms 1.180000 ms 20 Offset 11.9 dB Center 5.18 GHz 1 ms/ Date: 18.JAN.2018 10:45:45	IEEE 802.11n (20 MHz)  Ref 20 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 5.72 dBm *VBW 1 MHz SWT 10 ms 7.260000 ms 20 Offset 11.9 dB Center 5.18 GHz 1 ms/ Date: 18.JAN.2018 10:47:37
Duty cycle = 100 % Duty Factor = $10 * \log(1 / 1) = 0$	Duty cycle = 100 % Duty Factor = $10 * \log(1 / 1) = 0$
IEEE 802.11n (40 MHz)  Ref 20 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 6.16 dBm *VBW 1 MHz SWT 20 ms 0.91 dBm 20 Offset 11.9 dB Center 5.19 GHz 2 ms/ Date: 18.JAN.2018 10:51:42	IEEE 802.11ac (20 MHz)  Ref 20 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 3.52 dBm *VBW 1 MHz SWT 10 ms 2.01 dBm 20 Offset 11.9 dB Center 5.18 GHz 1 ms/ Date: 18.JAN.2018 13:03:24
Duty cycle = 100 % Duty Factor = $10 * \log(1 / 1) = 0$	Duty cycle = 100 % Duty Factor = $10 * \log(1 / 1) = 0$

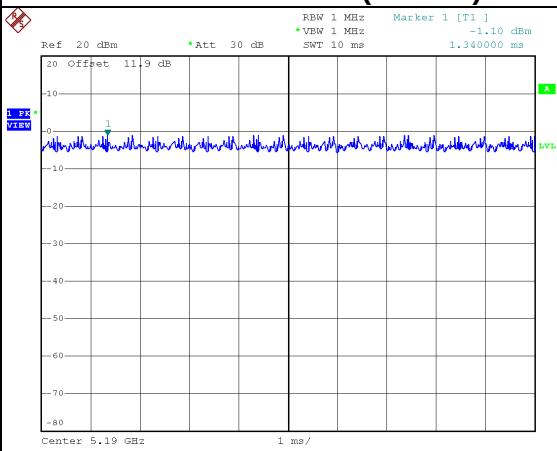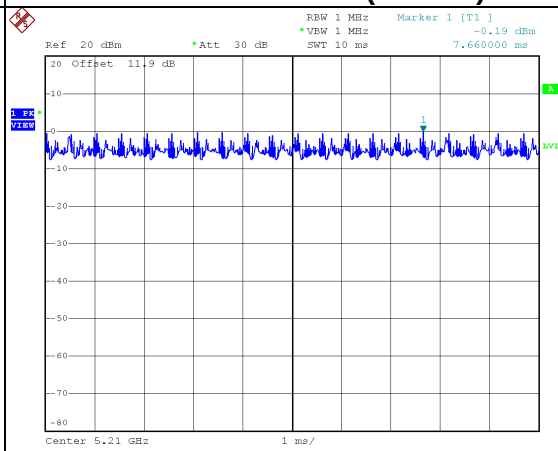IEEE 802.11ac (40 MHz)	IEEE 802.11ac (80 MHz)
 Ref 20 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] -1.10 dBm *VIEW 1 MHz SWT 10 ms 1.340000 ms 20 Offset 11.9 dB Center 5.19 GHz 1 ms/ Date: 18.JAN.2018 13:11:13	 Ref 20 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] -0.19 dBm *VIEW 1 MHz SWT 10 ms 7.660000 ms 20 Offset 11.9 dB Center 5.21 GHz 1 ms/ Date: 18.JAN.2018 14:23:14
Duty cycle = 100 % Duty Factor = $10 * \log(1 / 1) = 0$	Duty cycle = 100 % Duty Factor = $10 * \log(1 / 1) = 0$

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

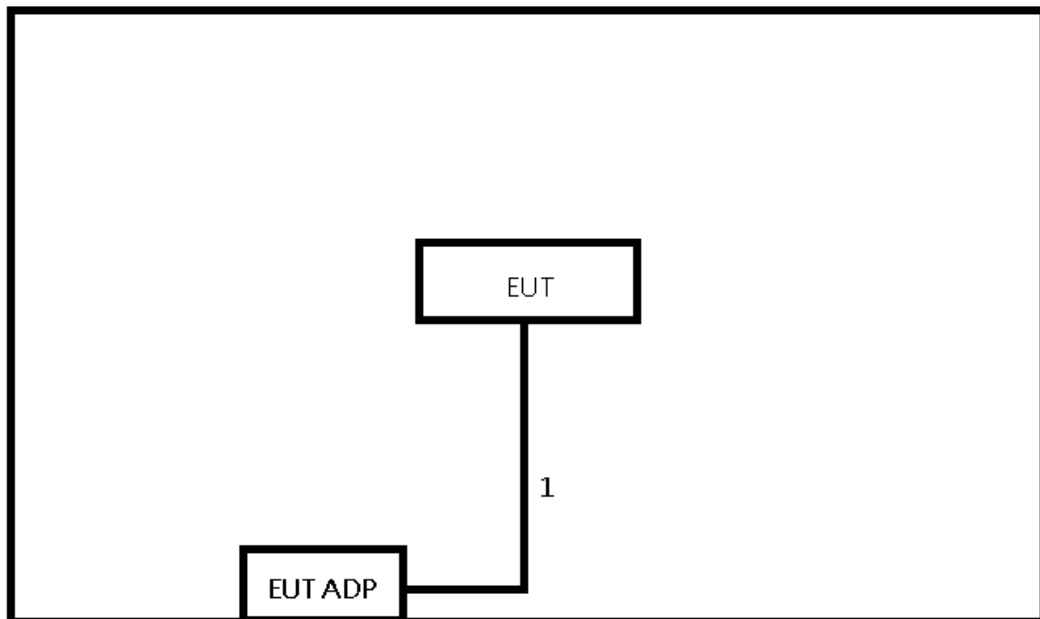

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.5m	Power Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

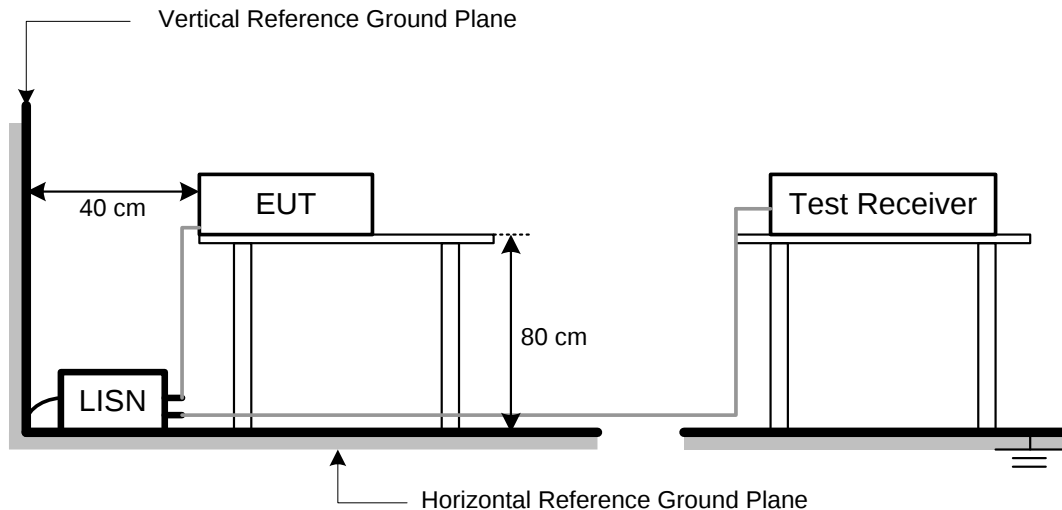

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.
The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note 1. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3}$ μV/m, where P is the eirp (Watts)

2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A)Radiated Emission Test Set-Up Frequency Below 1GHz

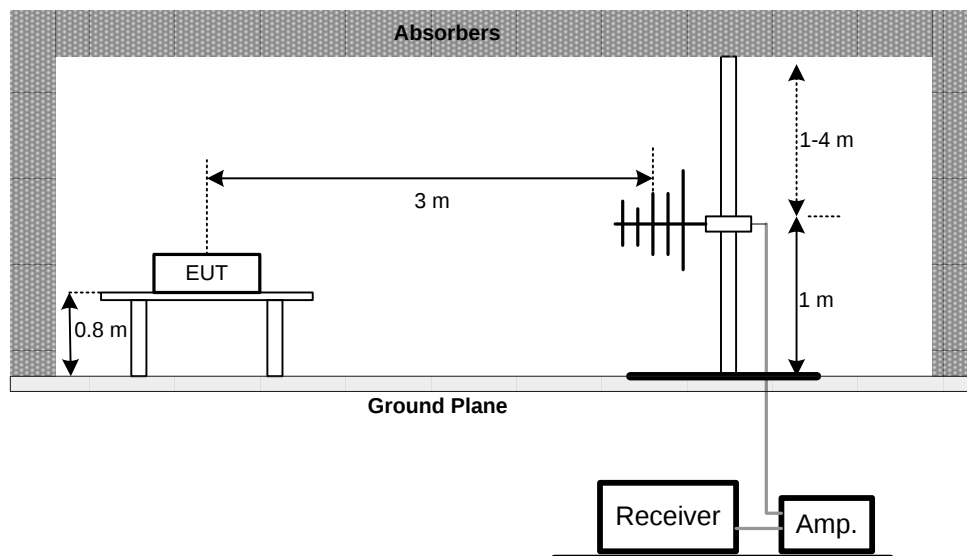


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

Band edge

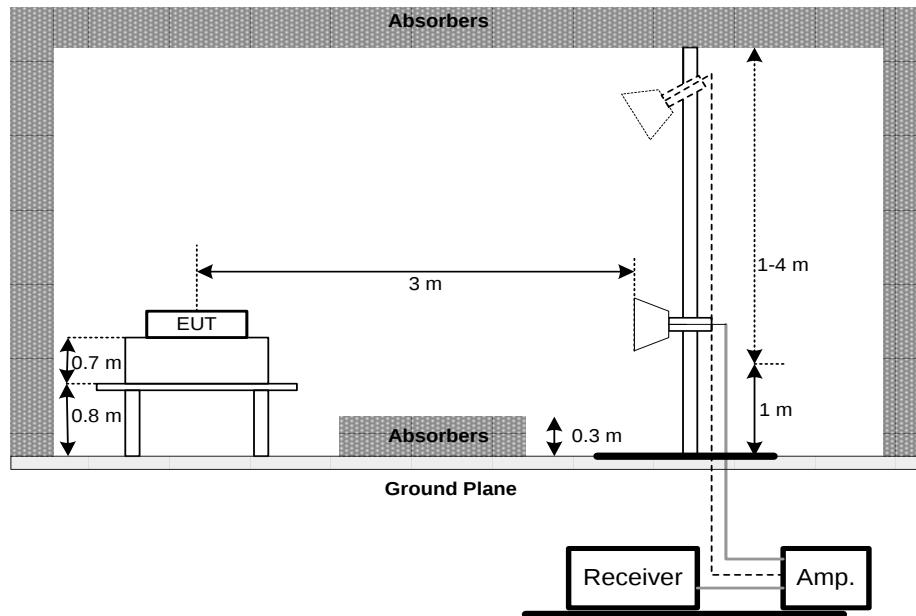

(C) Radiated emissions below 30MHz

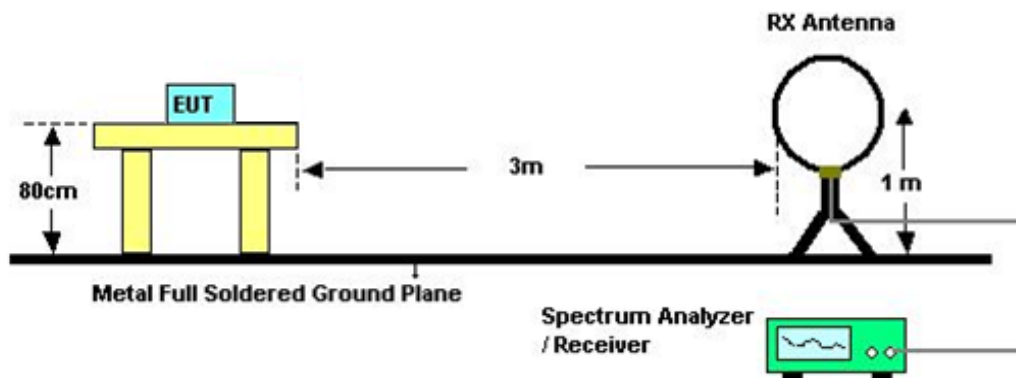

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 23°C Relative Humidity: 70% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	26 dB Bandwidth	5150-5250	PASS
	26 dB Bandwidth	5250-5350	PASS
	26 dB Bandwidth	5470-5725	PASS
	Minimum 500kHz 6dB Bandwidth	5725-5850	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	300 kHz(Bandwidth 20MHz) 1MHz(Bandwidth 40MHz and 80MHz)
VBW	1MHz(Bandwidth 20MHz) 3MHz(Bandwidth 40MHz and 80MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 23°C Relative Humidity: 70% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Conducted Output Power	Fixed:1 Watt (30dBm) Mobile and portable: 250mW (24dBm)	5150-5250	PASS
	250mW (24dBm)	5250-5350	PASS
	250mW (24dBm)	5470-5725	PASS
	1 Watt (30dBm)	5725-5850	PASS
Note: The maximum e.i.r.p at anyelevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)			

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	≥ 3MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto

c. Test was performed in accordance with method of KDB 789033 D02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 23°C Relative Humidity: 70% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F.

7. POWER SPECTRAL DENSITY TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250	PASS
	11dBm/MHz	5250-5350	PASS
	11dBm/MHz	5470-5725	PASS
	30dBm/500kHz	5725-5850	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	≥ 3MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01r02, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
- The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is -3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

7.1.1 DEVIATION FROM STANDARD

No deviation.

7.1.2 TEST SETUP



7.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.4 EUT TEST CONDITIONS

Temperature: 23°C Relative Humidity: 70% Test Voltage: AC 120V/60Hz

7.1.5 TEST RESULTS

Please refer to the Appendix H.

8. FREQUENCY STABILITY MEASUREMENT

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	Specified in the user's manual	5150-5250	PASS
		5250-5350	PASS
		5470-5725	PASS
		5725-5850	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. User manual temperature is -20°C~50°C.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

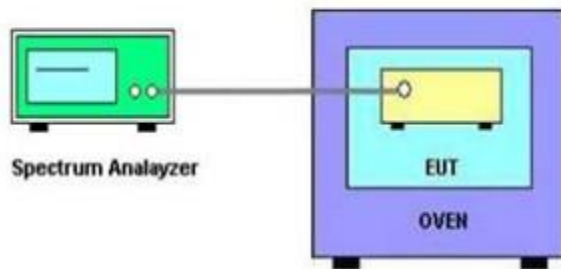

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix I.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 25, 2018
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2018
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 08, 2018
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	012645B	980267	Feb. 28, 2018
2	Preamplifier	EMCI	EMC02325	980217	Dec. 28, 2018
3	Preamplifier	EMCI	EMC2654045	980030	Feb. 14, 2018
4	Test Cable	EMCI	EMC104-SM-S M-8000	8m	Jan. 03, 2019
5	Test Cable	EMCI	EMC104-SM-S M-800	150207	Jan. 03, 2019
6	Test Cable	EMCI	EEMC104-SM-S M-3000	151205	Jan. 03, 2019
7	MXE EMI Receiver	Agilent	N9038A	MY55420127	Jan. 08, 2019
8	Signal Analyzer	Agilent	N9010A	MY52220990	Feb. 22, 2018
9	Loop Ant	EMCO	6502	42960	Nov. 23, 2018
10	Loop Ant	EMCI	LPA600	274	May 04, 2018
11	Horn Ant	Schwarzbeck	BBHA 9170	187	Dec. 06, 2018
12	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	Jan. 16, 2018
13	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	Jan. 16, 2018

Spectrum Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018

Maximum Conducted Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018
2	Power Meter	Anritsu	ML2495A	1128008	Aug. 16, 2018
3	Power Sensor	Anritsu	MA2411B	1126001	Aug. 16, 2018

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018


Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - CONDUCTED EMISSION

Test Mode: UNII-1/TX Mode

Line

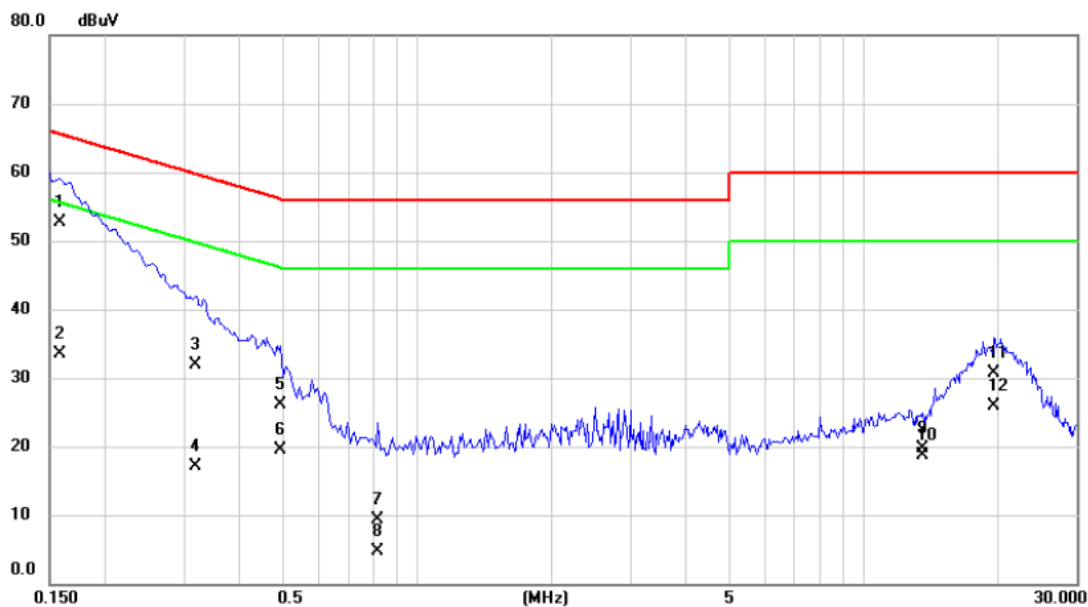


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1584	42.90	9.73	52.63	65.55	-12.92	QP	
2		0.1584	23.80	9.73	33.53	55.55	-22.02	AVG	
3		0.3194	22.20	9.73	31.93	59.72	-27.79	QP	
4		0.3194	7.30	9.73	17.03	49.72	-32.69	AVG	
5		0.4944	16.40	9.74	26.14	56.09	-29.95	QP	
6		0.4944	9.70	9.74	19.44	46.09	-26.65	AVG	
7		0.8150	-0.40	9.74	9.34	56.00	-46.66	QP	
8		0.8150	-5.10	9.74	4.64	46.00	-41.36	AVG	
9		13.5500	9.80	9.98	19.78	60.00	-40.22	QP	
10		13.5500	8.70	9.98	18.68	50.00	-31.32	AVG	
11		19.6000	20.80	9.98	30.78	60.00	-29.22	QP	
12		19.6000	15.90	9.98	25.88	50.00	-24.12	AVG	

Note : The test result has included the cable loss.

Test Mode: UNII-1/TX Mode

Neutral

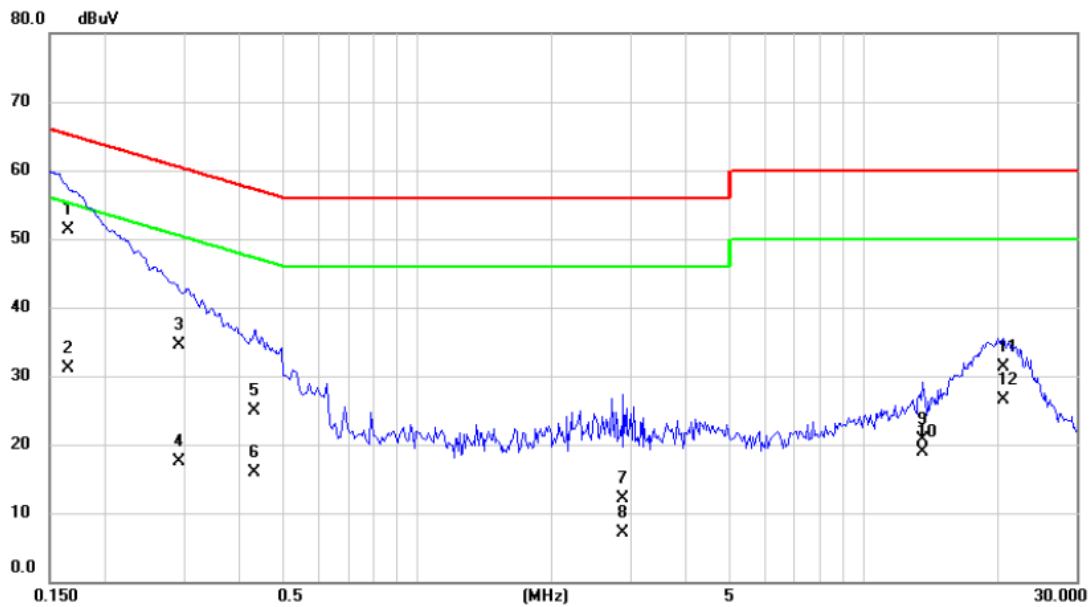


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1654	41.70	9.65	51.35	65.19	-13.84	QP	
2		0.1654	21.40	9.65	31.05	55.19	-24.14	AVG	
3		0.2914	24.90	9.68	34.58	60.48	-25.90	QP	
4		0.2914	7.80	9.68	17.48	50.48	-33.00	AVG	
5		0.4328	15.20	9.68	24.88	57.20	-32.32	QP	
6		0.4328	6.20	9.68	15.88	47.20	-31.32	AVG	
7		2.8940	2.30	9.74	12.04	56.00	-43.96	QP	
8		2.8940	-2.70	9.74	7.04	46.00	-38.96	AVG	
9		13.5500	10.70	9.98	20.68	60.00	-39.32	QP	
10		13.5500	9.00	9.98	18.98	50.00	-31.02	AVG	
11		20.6000	21.30	10.02	31.32	60.00	-28.68	QP	
12		20.6000	16.50	10.02	26.52	50.00	-23.48	AVG	

Note : The test result has included the cable loss.

Test Mode: UNII-2A/TX Mode

Line

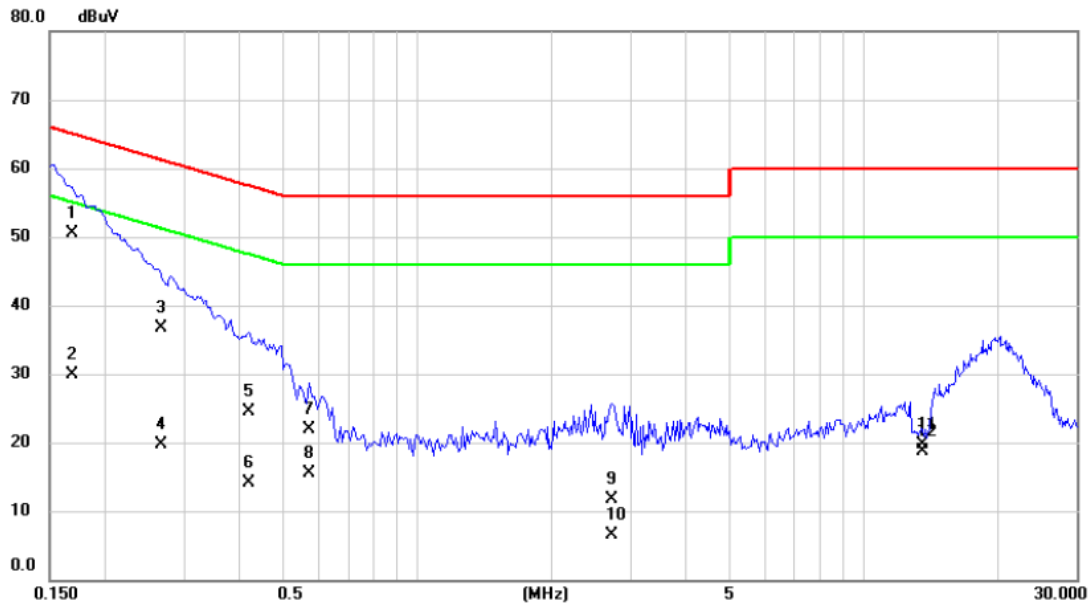


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1682	40.80	9.72	50.52	65.05	-14.53	QP	
2		0.1682	20.10	9.72	29.82	55.05	-25.23	AVG	
3		0.2662	26.90	9.73	36.63	61.24	-24.61	QP	
4		0.2662	10.00	9.73	19.73	51.24	-31.51	AVG	
5		0.4195	14.80	9.74	24.54	57.46	-32.92	QP	
6		0.4195	4.30	9.74	14.04	47.46	-33.42	AVG	
7		0.5720	12.10	9.74	21.84	56.00	-34.16	QP	
8		0.5720	5.70	9.74	15.44	46.00	-30.56	AVG	
9		2.7230	1.90	9.78	11.68	56.00	-44.32	QP	
10		2.7230	-3.20	9.78	6.58	46.00	-39.42	AVG	
11		13.5500	9.80	9.98	19.78	60.00	-40.22	QP	
12		13.5500	8.70	9.98	18.68	50.00	-31.32	AVG	

Note : The test result has included the cable loss.

Test Mode: UNII-2A/TX Mode

Neutral

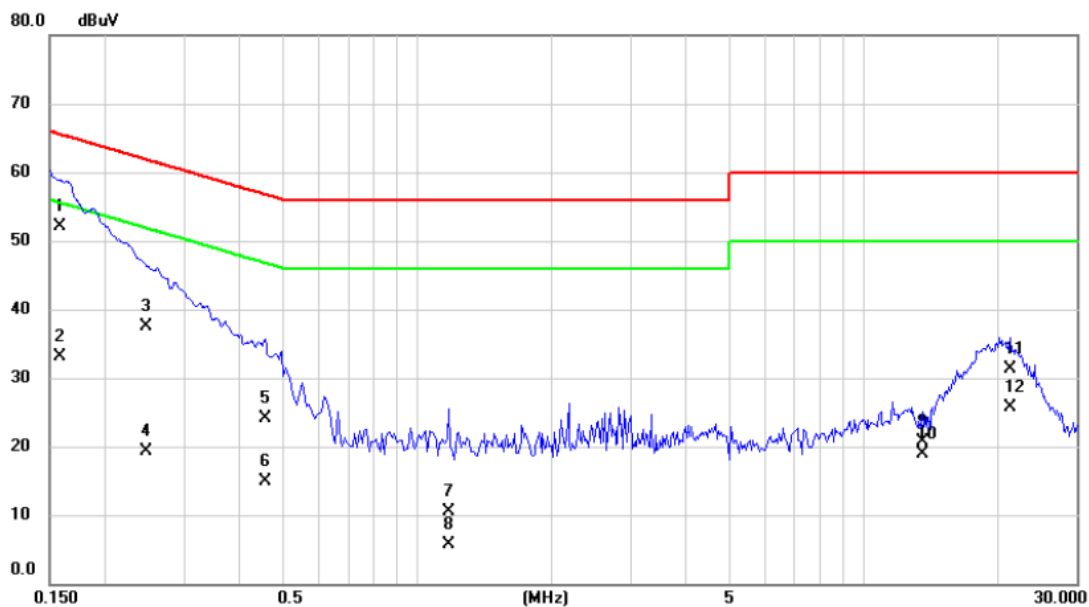


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1584	42.40	9.65	52.05	65.55	-13.50	QP	
2		0.1584	23.40	9.65	33.05	55.55	-22.50	AVG	
3		0.2466	27.90	9.66	37.56	61.87	-24.31	QP	
4		0.2466	9.60	9.66	19.26	51.87	-32.61	AVG	
5		0.4560	14.50	9.68	24.18	56.77	-32.59	QP	
6		0.4560	5.20	9.68	14.88	46.77	-31.89	AVG	
7		1.1750	0.90	9.69	10.59	56.00	-45.41	QP	
8		1.1750	-4.00	9.69	5.69	46.00	-40.31	AVG	
9		13.5500	10.70	9.98	20.68	60.00	-39.32	QP	
10		13.5500	9.00	9.98	18.98	50.00	-31.02	AVG	
11		21.3500	21.30	10.02	31.32	60.00	-28.68	QP	
12		21.3500	15.70	10.02	25.72	50.00	-24.28	AVG	

Note : The test result has included the cable loss.

Test Mode: UNII-2C/TX Mode

Line

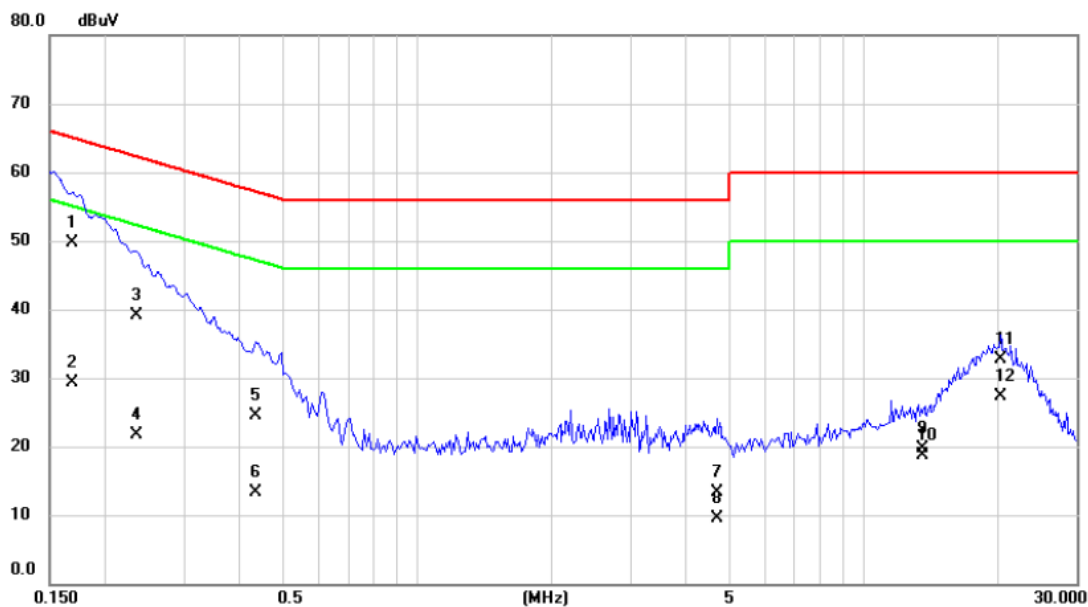


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1690	40.00	9.72	49.72	65.01	-15.29	QP	
2		0.1690	19.60	9.72	29.32	55.01	-25.69	AVG	
3		0.2347	29.30	9.72	39.02	62.28	-23.26	QP	
4		0.2347	11.90	9.72	21.62	52.28	-30.66	AVG	
5		0.4356	14.80	9.74	24.54	57.15	-32.61	QP	
6		0.4356	3.60	9.74	13.34	47.15	-33.81	AVG	
7		4.7030	3.50	9.82	13.32	56.00	-42.68	QP	
8		4.7030	-0.40	9.82	9.42	46.00	-36.58	AVG	
9		13.5500	9.80	9.98	19.78	60.00	-40.22	QP	
10		13.5500	8.70	9.98	18.68	50.00	-31.32	AVG	
11		20.2000	22.80	9.98	32.78	60.00	-27.22	QP	
12		20.2000	17.40	9.98	27.38	50.00	-22.62	AVG	

Note : The test result has included the cable loss.

Test Mode: UNII-2C/TX Mode

Neutral

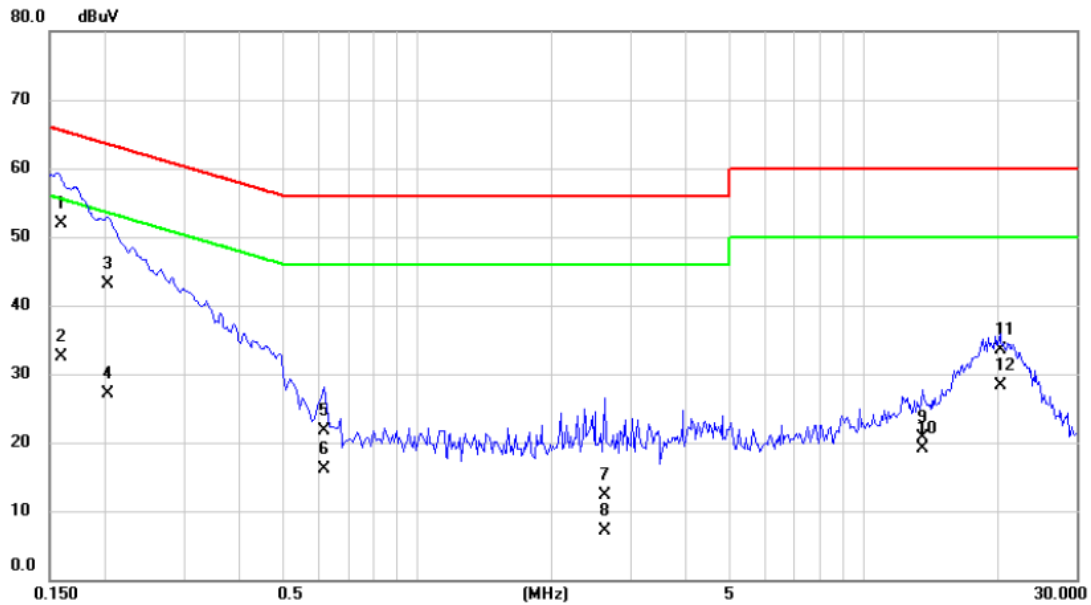


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1598	42.20	9.65	51.85	65.47	-13.62	QP	
2		0.1598	22.80	9.65	32.45	55.47	-23.02	AVG	
3		0.2025	33.50	9.65	43.15	63.51	-20.36	QP	
4		0.2025	17.40	9.65	27.05	53.51	-26.46	AVG	
5		0.6170	12.10	9.68	21.78	56.00	-34.22	QP	
6		0.6170	6.40	9.68	16.08	46.00	-29.92	AVG	
7		2.6240	2.50	9.73	12.23	56.00	-43.77	QP	
8		2.6240	-2.70	9.73	7.03	46.00	-38.97	AVG	
9		13.5500	10.80	9.98	20.78	60.00	-39.22	QP	
10		13.5500	9.10	9.98	19.08	50.00	-30.92	AVG	
11		20.2000	23.50	10.02	33.52	60.00	-26.48	QP	
12		20.2000	18.20	10.02	28.22	50.00	-21.78	AVG	

Note : The test result has included the cable loss.

Test Mode: UNII-3/TX Mode

Line

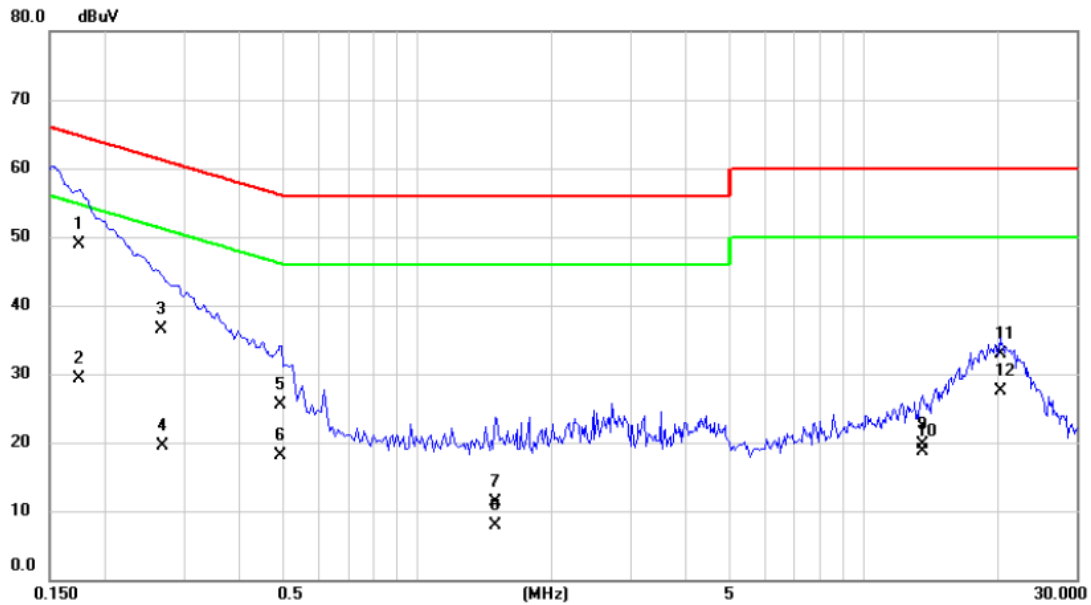


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1745	39.10	9.72	48.82	64.74	-15.92	QP	
2		0.1745	19.50	9.72	29.22	54.74	-25.52	AVG	
3		0.2662	26.70	9.73	36.43	61.24	-24.81	QP	
4		0.2683	9.70	9.73	19.43	51.17	-31.74	AVG	
5		0.4923	15.80	9.74	25.54	56.13	-30.59	QP	
6		0.4923	8.40	9.74	18.14	46.13	-27.99	AVG	
7		1.4990	1.50	9.75	11.25	56.00	-44.75	QP	
8		1.4990	-1.90	9.75	7.85	46.00	-38.15	AVG	
9		13.5500	9.80	9.98	19.78	60.00	-40.22	QP	
10		13.5500	8.70	9.98	18.68	50.00	-31.32	AVG	
11		20.2000	22.90	9.98	32.88	60.00	-27.12	QP	
12		20.2000	17.50	9.98	27.48	50.00	-22.52	AVG	

Note : The test result has included the cable loss.

Test Mode: UNII-3/TX Mode

Neutral

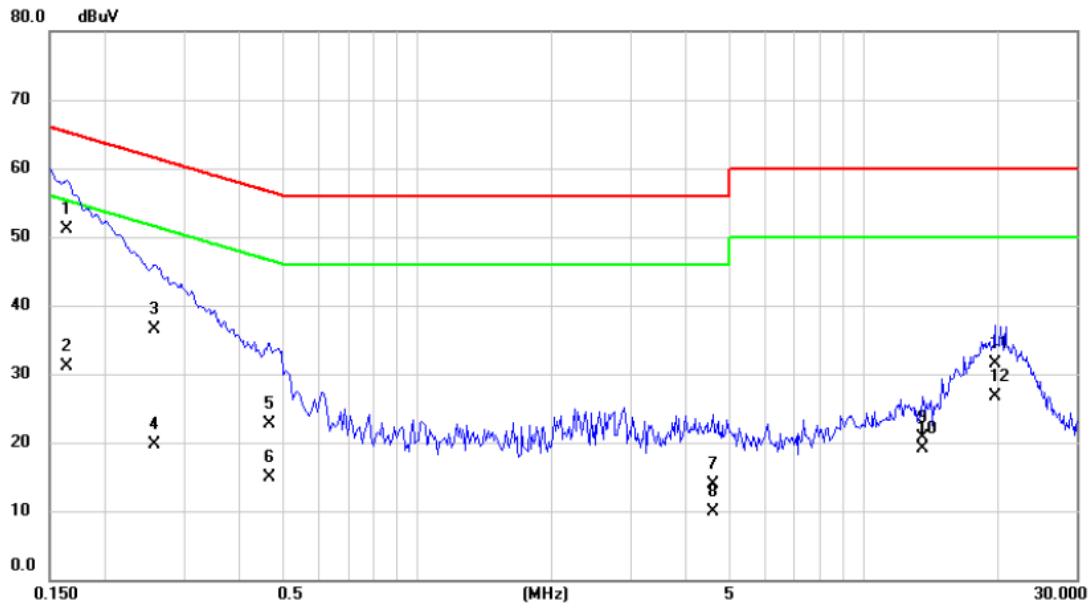


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1640	41.40	9.65	51.05	65.26	-14.21	QP	
2		0.1640	21.50	9.65	31.15	55.26	-24.11	AVG	
3		0.2571	26.90	9.67	36.57	61.52	-24.95	QP	
4		0.2571	10.00	9.67	19.67	51.52	-31.85	AVG	
5		0.4657	13.10	9.68	22.78	56.59	-33.81	QP	
6		0.4657	5.20	9.68	14.88	46.59	-31.71	AVG	
7		4.6040	4.10	9.78	13.88	56.00	-42.12	QP	
8		4.6040	0.10	9.78	9.88	46.00	-36.12	AVG	
9		13.5500	10.70	9.98	20.68	60.00	-39.32	QP	
10		13.5500	9.10	9.98	19.08	50.00	-30.92	AVG	
11		19.6500	21.40	10.02	31.42	60.00	-28.58	QP	
12		19.6500	16.60	10.02	26.62	50.00	-23.38	AVG	

Note : The test result has included the cable loss.

APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: UNII-1/ TX N40 Mode 5230MHz


Ant 0°

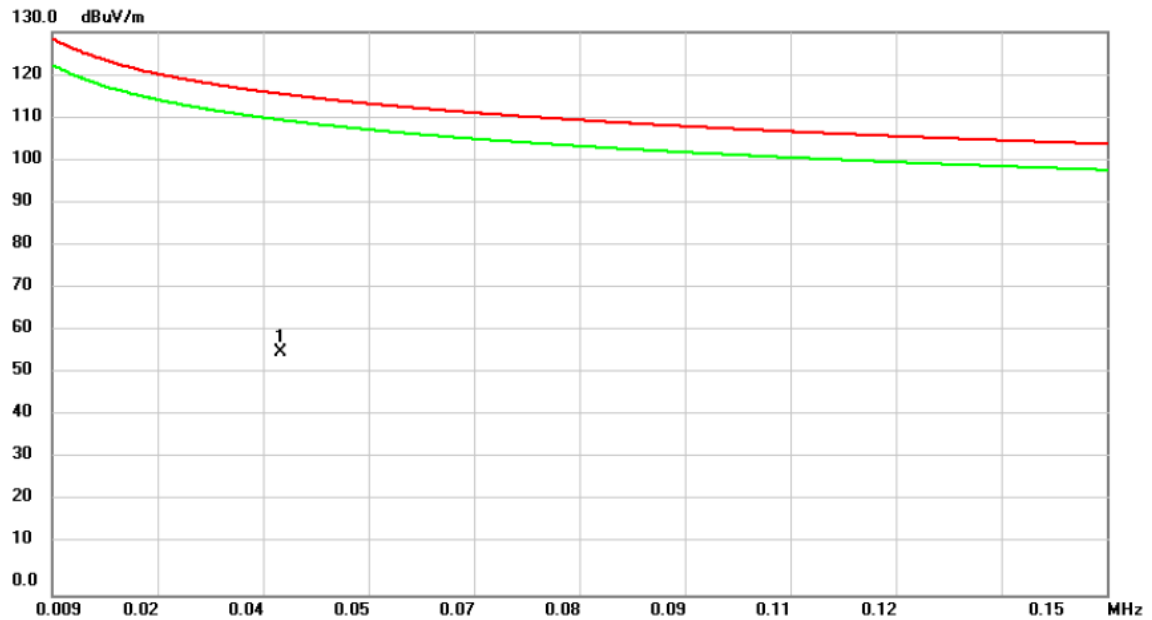

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0395	42.02	14.05	56.07	115.67	-59.60	peak

Test Mode: UNII-1/ TX N40 Mode 5230MHz


Ant 0°

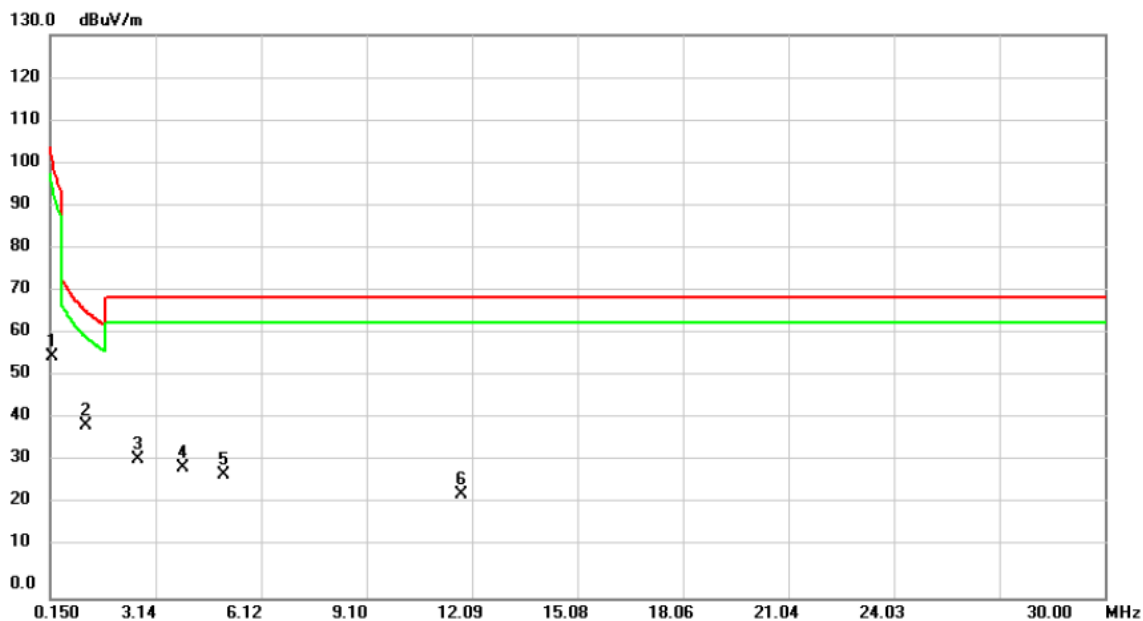

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2096	43.96	11.94	55.90	101.18	-45.28	peak	
2	*	1.1650	28.03	11.93	39.96	66.28	-26.32	peak	
3		2.6573	20.87	11.25	32.12	69.54	-37.42	peak	
4		3.9110	18.67	11.24	29.91	69.54	-39.63	peak	
5		5.0750	16.98	11.40	28.38	69.54	-41.16	peak	
6		11.7911	12.65	11.25	23.90	69.54	-45.64	peak	

Test Mode: UNII-1/ TX N40 Mode 5230MHz


Ant 90°

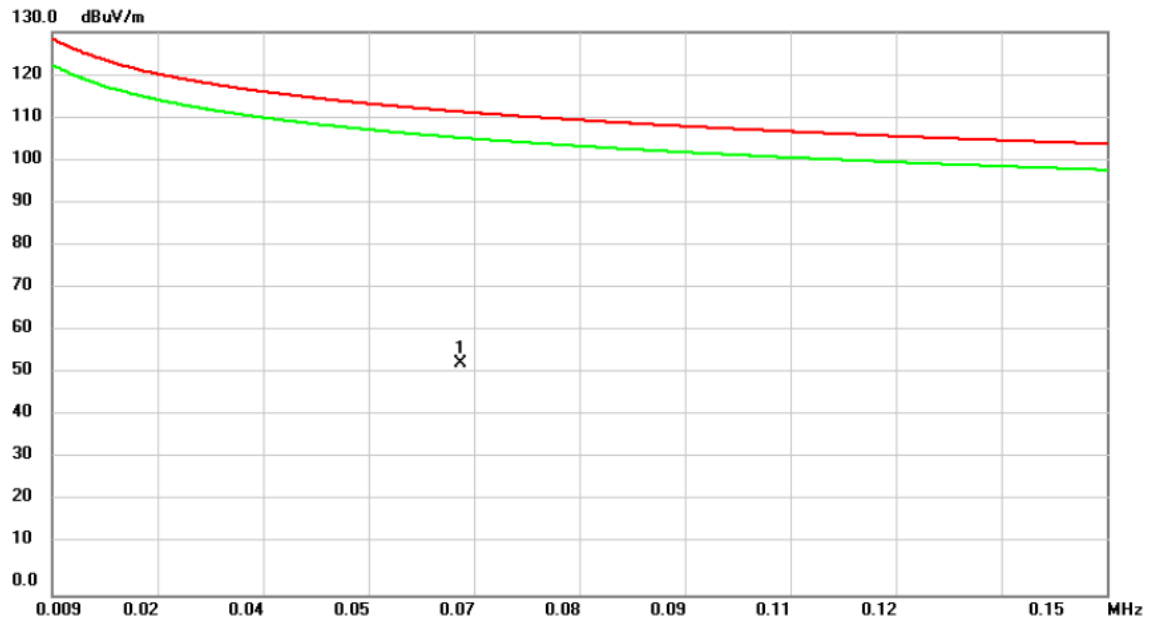

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0637	40.61	12.75	53.36	111.52	-58.16	peak

Test Mode: UNII-1/ TX N40 Mode 5230MHz


Ant 90°

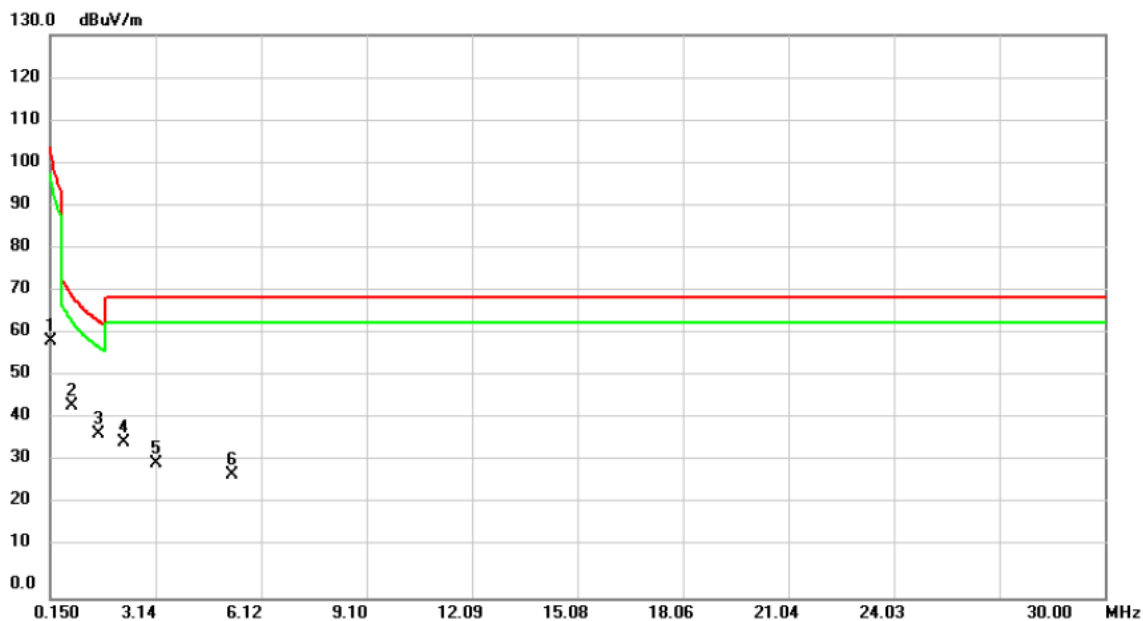

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		0.1500	47.16	12.03	59.19	104.08	-44.89	peak
2	*	0.7470	32.44	11.90	44.34	70.14	-25.80	peak
3		1.5230	26.24	11.76	38.00	63.95	-25.95	peak
4		2.2395	24.62	11.44	36.06	69.54	-33.48	peak
5		3.1350	19.91	11.12	31.03	69.54	-38.51	peak
6		5.2842	16.97	11.39	28.36	69.54	-41.18	peak

Test Mode: UNII-2A/ TX N40 Mode 5270MHz


Ant 0°

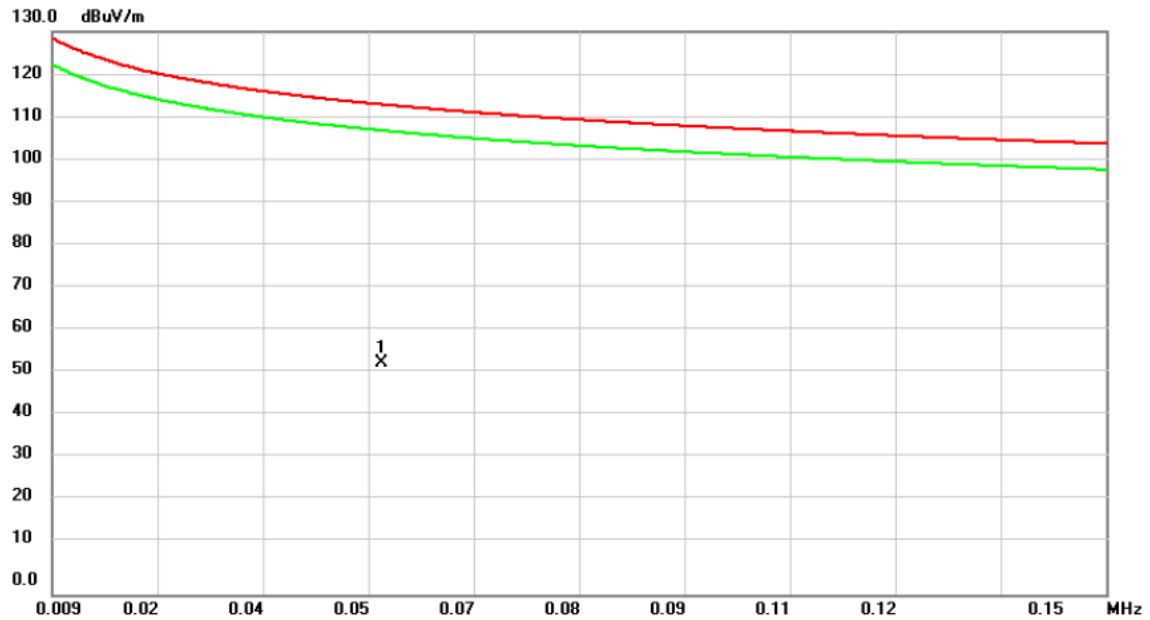

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0530	40.57	12.95	53.52	113.12	-59.60	peak

Test Mode: UNII-2A/ TX N40 Mode 5270MHz


Ant 0°

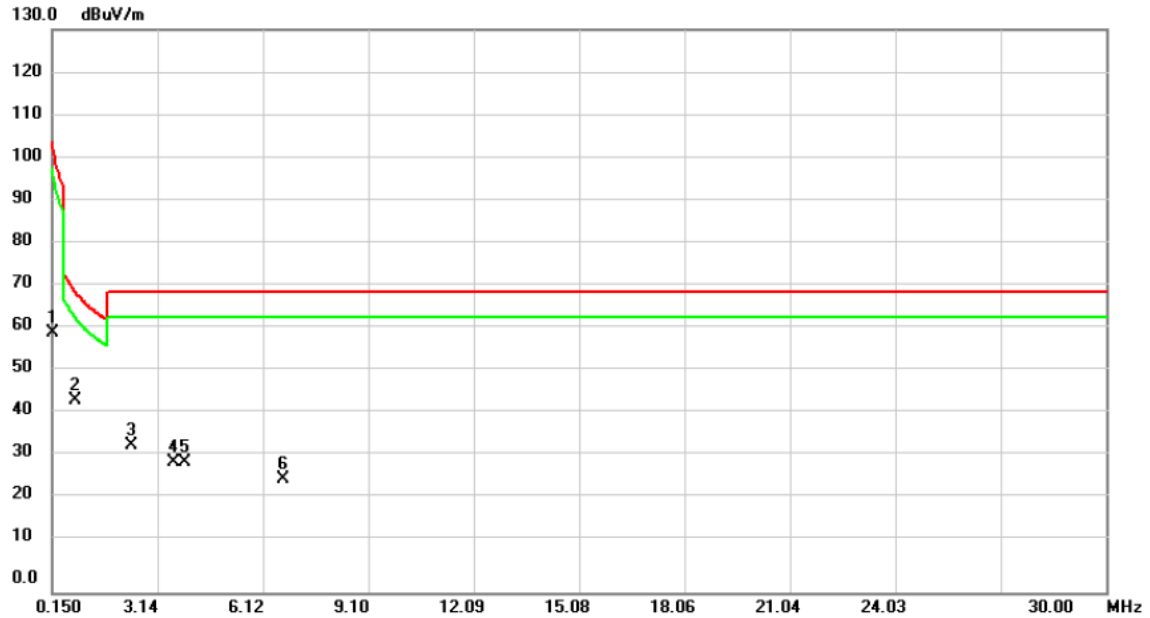

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		0.1500	47.93	12.03	59.96	104.08	-44.12	peak
2	*	0.8064	32.31	11.92	44.23	69.47	-25.24	peak
3		2.3887	22.56	11.38	33.94	69.54	-35.60	peak
4		3.5825	18.91	11.19	30.10	69.54	-39.44	peak
5		3.9110	18.67	11.24	29.91	69.54	-39.63	peak
6		6.6871	14.74	11.37	26.11	69.54	-43.43	peak

Test Mode: UNII-2A/ TX N40 Mode 5270MHz


Ant 90°

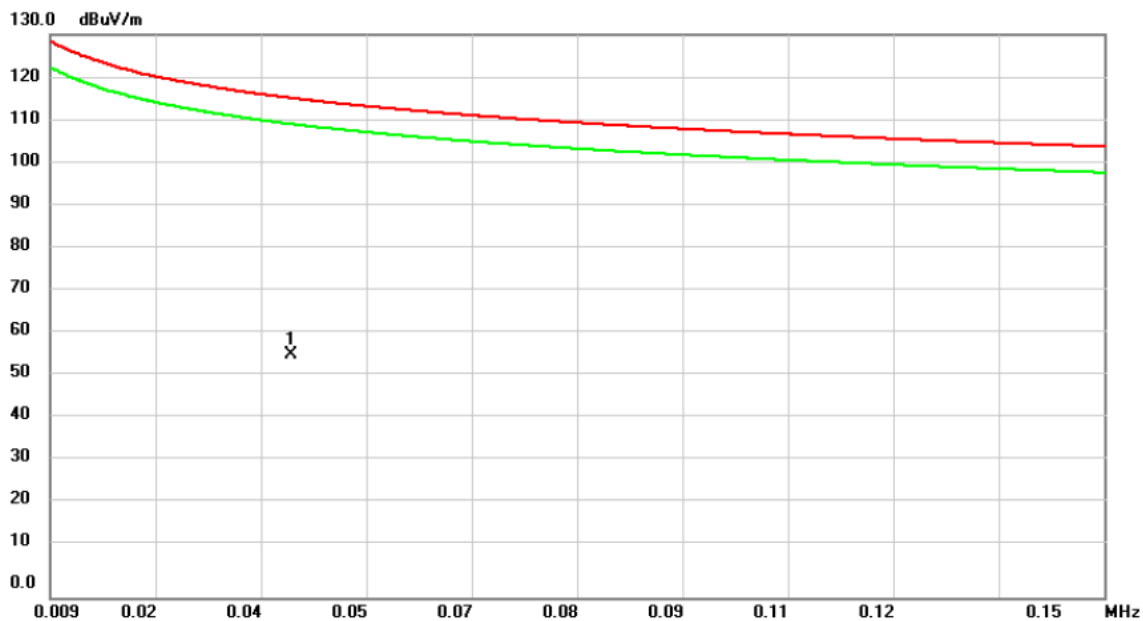

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0413	42.09	13.87	55.96	115.29	-59.33	peak

Test Mode: UNII-2A/ TX N40 Mode 5270MHz


Ant 90°

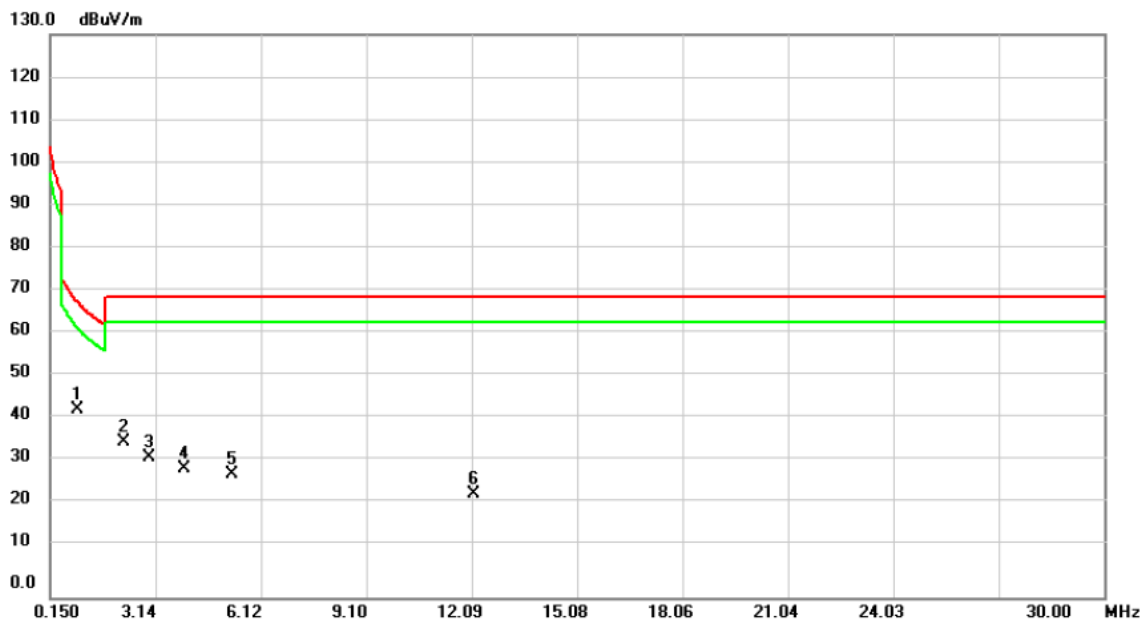

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.9261	31.48	11.97	43.45	68.27	-24.82	peak	
2		2.2395	24.62	11.44	36.06	69.54	-33.48	peak	
3		2.9560	21.26	11.12	32.38	69.54	-37.16	peak	
4		3.9410	18.34	11.24	29.58	69.54	-39.96	peak	
5		5.2842	16.97	11.39	28.36	69.54	-41.18	peak	
6		12.1493	12.61	11.24	23.85	69.54	-45.69	peak	

Test Mode: UNII-2C/ TX N20 Mode 5500MHz

Ant 0°

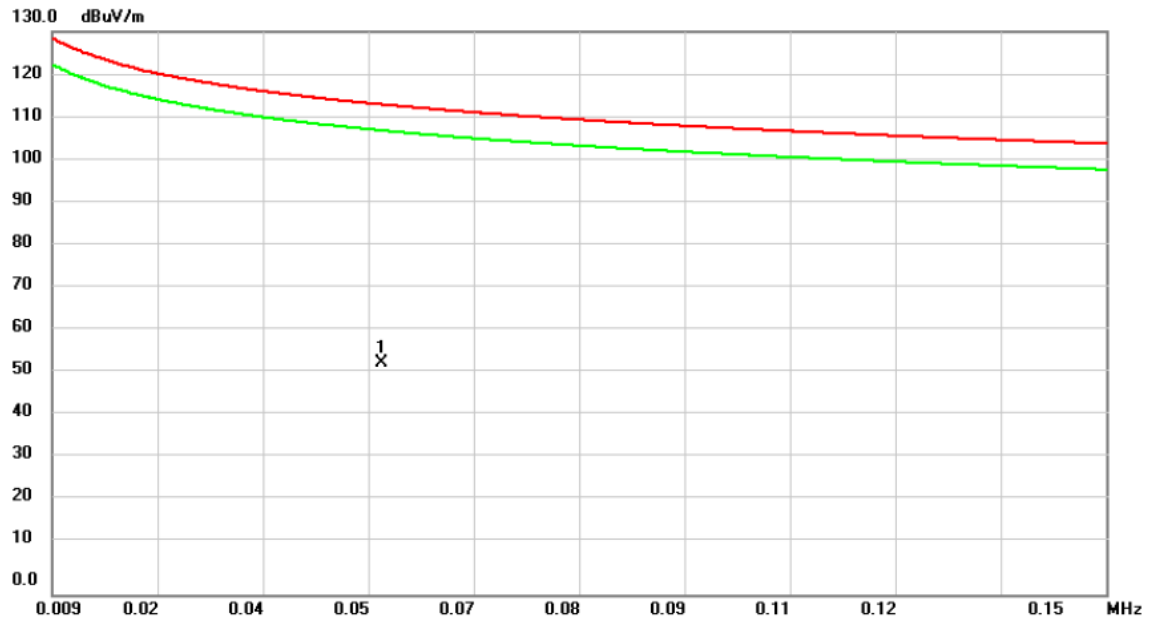

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0530	40.57	12.95	53.52	113.12	-59.60	peak

Test Mode: UNII-2C/ TX N20 Mode 5500MHz


Ant 0°



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	0.9261	30.79	11.97	42.76	68.27	-25.51	peak	
2		1.7020	25.41	11.68	37.09	62.98	-25.89	peak	
3		3.9110	18.67	11.24	29.91	69.54	-39.63	peak	
4		4.3290	18.38	11.30	29.68	69.54	-39.86	peak	
5		8.4184	13.23	11.33	24.56	69.54	-44.98	peak	
6		11.1942	12.82	11.26	24.08	69.54	-45.46	peak	

Test Mode: UNII-2C/ TX N20 Mode 5500MHz

Ant 90°

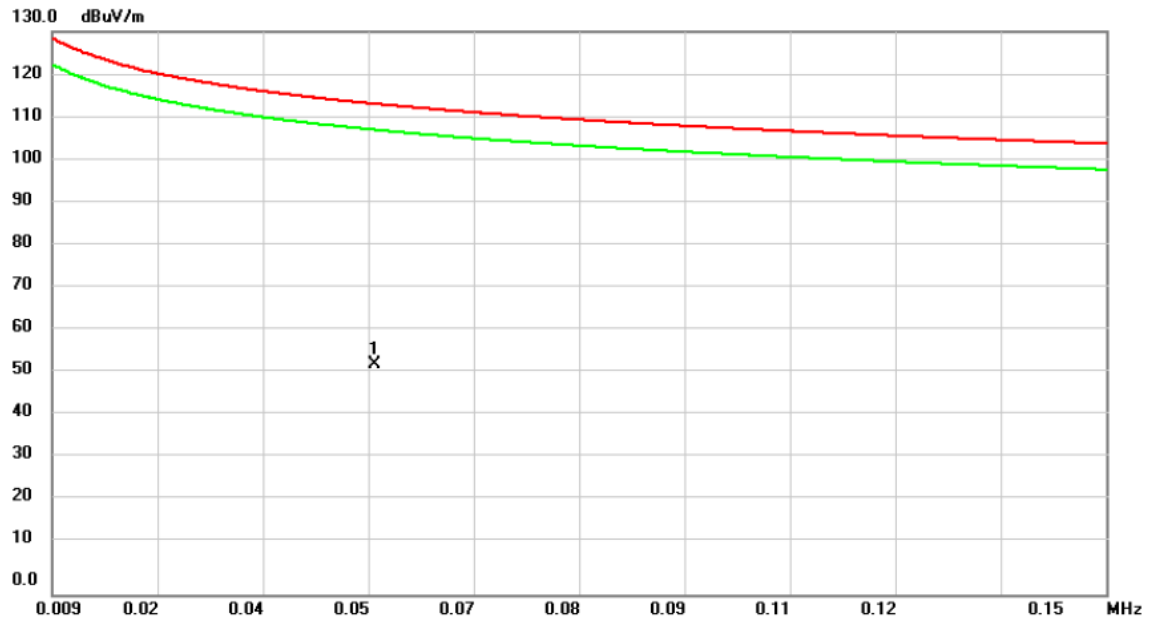

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0522	40.30	12.96	53.26	113.25	-59.99	peak

Test Mode: UNII-2C/ TX N20 Mode 5500MHz


Ant 90°



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		0.4187	37.60	11.80	49.40	95.17	-45.77	peak
2	*	1.2842	27.98	11.87	39.85	65.43	-25.58	peak
3		2.2395	24.62	11.44	36.06	69.54	-33.48	peak
4		4.0602	17.63	11.26	28.89	69.54	-40.65	peak
5		5.2842	16.97	11.39	28.36	69.54	-41.18	peak
6		6.3887	15.28	11.37	26.65	69.54	-42.89	peak
7		8.4780	13.54	11.33	24.87	69.54	-44.67	peak

Test Mode: UNII-3/ TX N20 Mode 5785MHz


Ant 0°

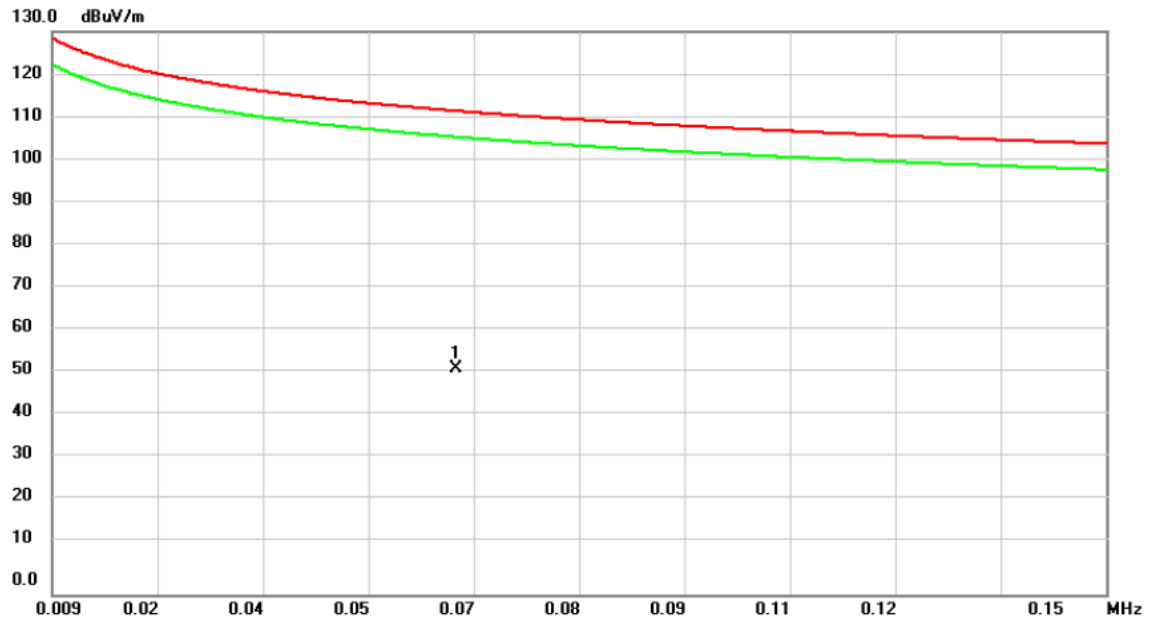

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0630	39.39	12.77	52.16	111.62	-59.46	peak

Test Mode: UNII-3/ TX N20 Mode 5785MHz


Ant 0°

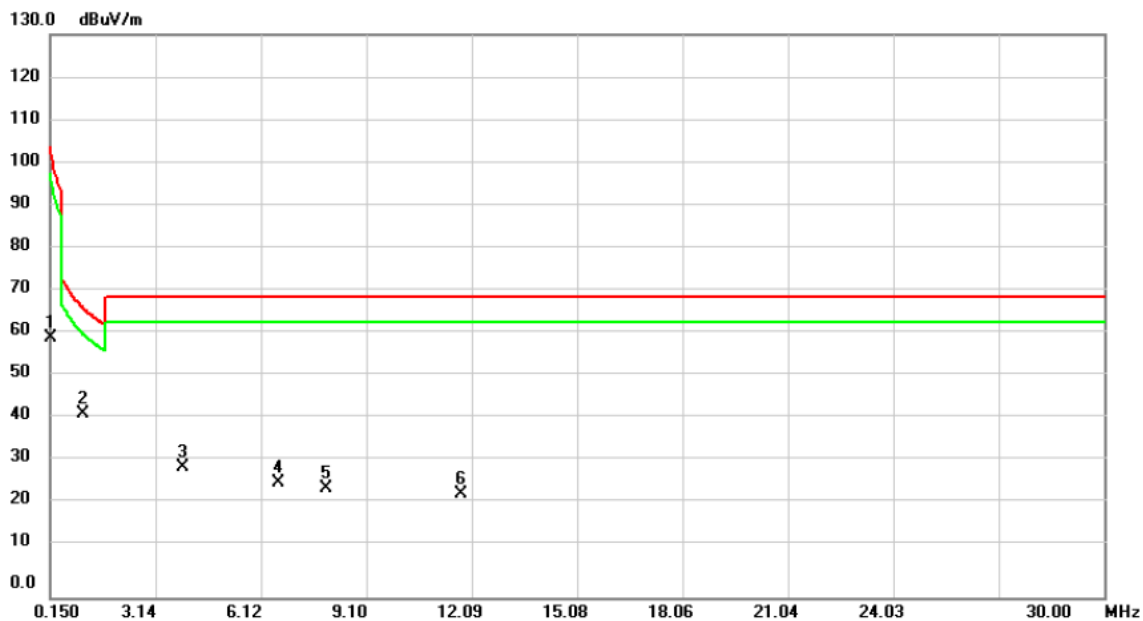

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		0.1500	47.93	12.03	59.96	104.08	-44.12	peak
2	*	1.0750	30.36	11.97	42.33	66.98	-24.65	peak
3		3.9110	18.67	11.24	29.91	69.54	-39.63	peak
4		6.6272	15.26	11.37	26.63	69.54	-42.91	peak
5		7.9706	13.82	11.34	25.16	69.54	-44.38	peak
6		11.7911	12.65	11.25	23.90	69.54	-45.64	peak

Test Mode: UNII-3/ TX N20 Mode 5785MHz

Ant 90°

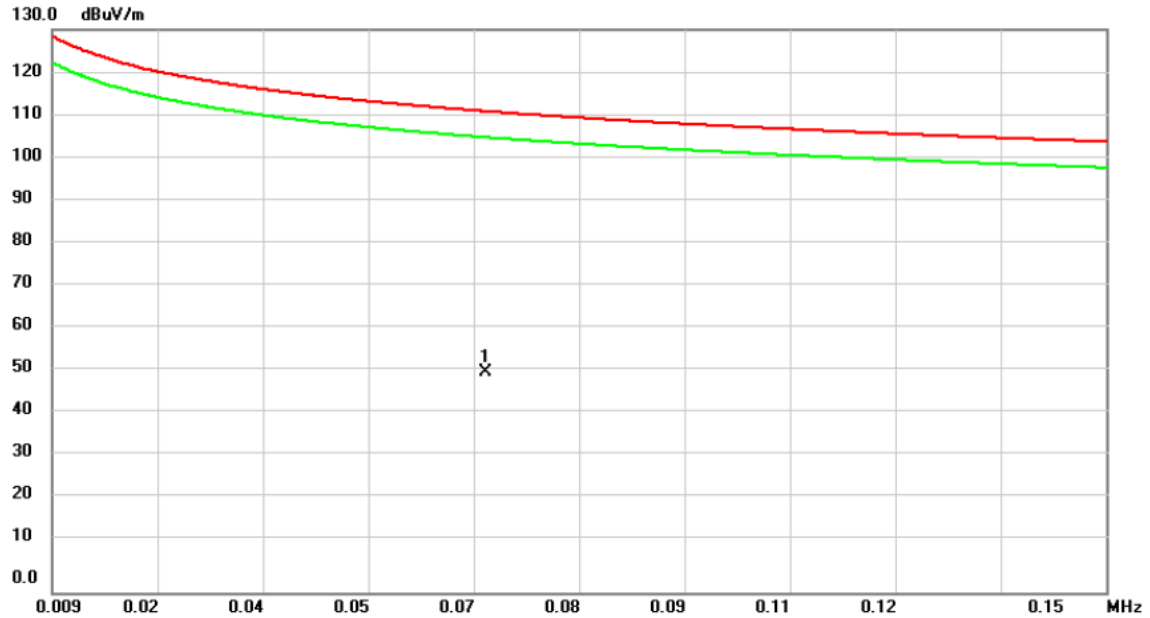

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0670	38.04	12.69	50.73	111.08	-60.35	peak

Test Mode: UNII-3/ TX N20 Mode 5785MHz

Ant 90°




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2.2395	24.62	11.44	36.06	69.54	-33.48	peak	
2		2.8664	21.25	11.16	32.41	69.54	-37.13	peak	
3		5.2842	16.97	11.39	28.36	69.54	-41.18	peak	
4		6.3887	15.28	11.37	26.65	69.54	-42.89	peak	
5		9.5228	13.44	11.31	24.75	69.54	-44.79	peak	
6		12.1493	12.61	11.24	23.85	69.54	-45.69	peak	

APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/ TX N40 Mode 5230MHz


Vertical

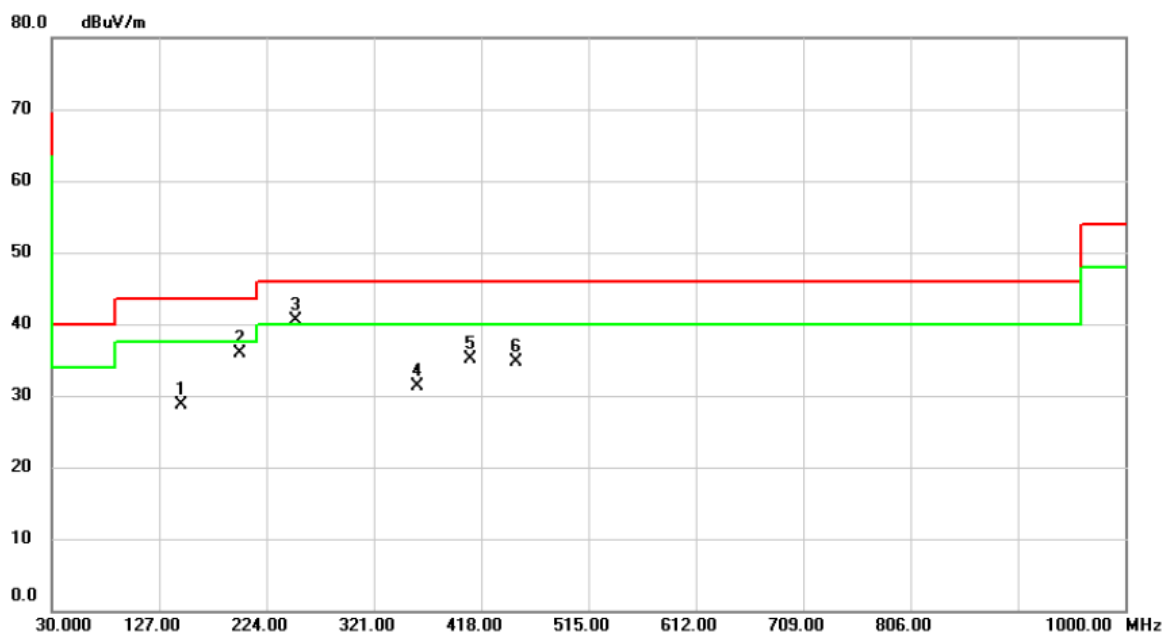

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		146.4000	37.72	-9.04	28.68	43.50	-14.82	peak	
2		199.7500	46.54	-10.64	35.90	43.50	-7.60	peak	
3	*	250.1900	49.55	-9.07	40.48	46.00	-5.52	peak	
4		359.8000	37.26	-5.98	31.28	46.00	-14.72	peak	
5		408.3000	39.91	-4.71	35.20	46.00	-10.80	peak	
6		450.0100	38.33	-3.56	34.77	46.00	-11.23	peak	

Test Mode: UNII-1/ TX N40 Mode 5230MHz


Horizontal

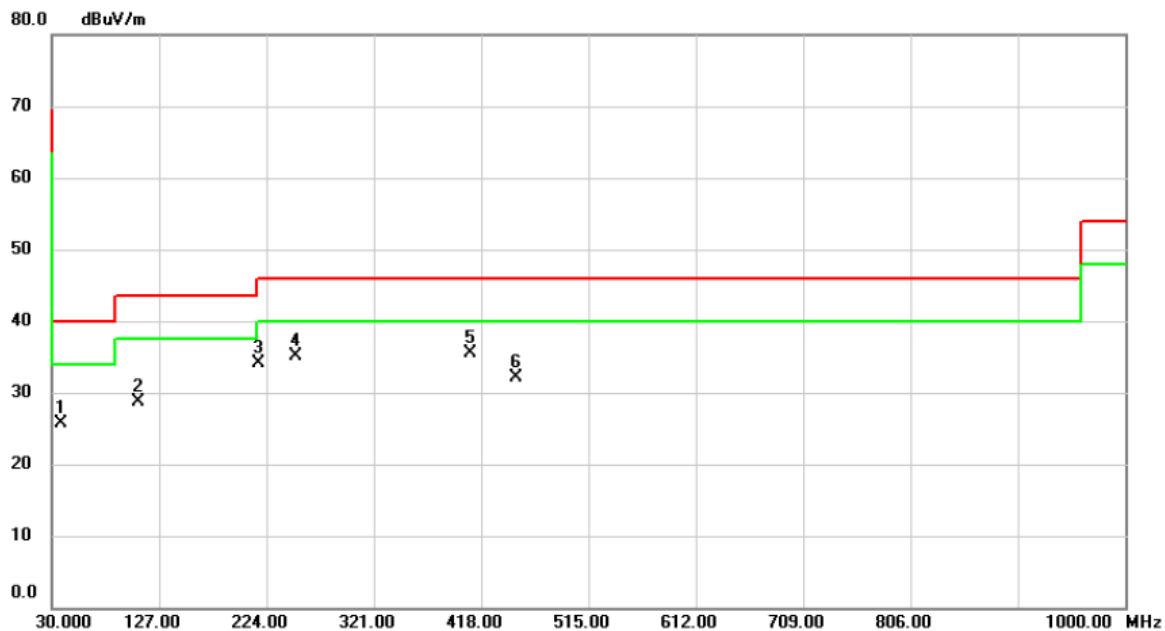

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		37.7600	34.26	-8.63	25.63	40.00	-14.37	peak	
2		108.5700	39.64	-11.00	28.64	43.50	-14.86	peak	
3		217.2100	44.96	-10.86	34.10	46.00	-11.90	peak	
4		250.1900	44.18	-9.07	35.11	46.00	-10.89	peak	
5	*	408.3000	40.15	-4.71	35.44	46.00	-10.56	peak	
6		450.0100	35.58	-3.56	32.02	46.00	-13.98	peak	

Test Mode: UNII-2A/ TX N40 Mode 5270MHz


Vertical

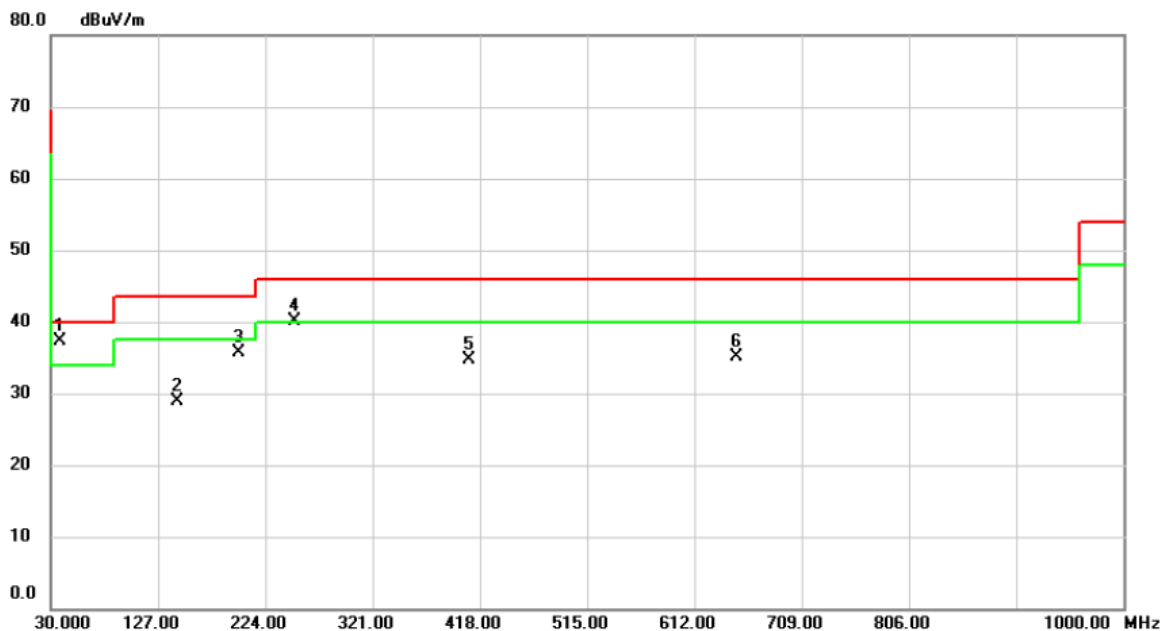

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	37.7600	45.86	-8.63	37.23	40.00	-2.77	peak	
2		144.4600	38.05	-9.07	28.98	43.50	-14.52	peak	
3		199.7500	46.28	-10.64	35.64	43.50	-7.86	peak	
4	!	250.1900	49.09	-9.07	40.02	46.00	-5.98	peak	
5		408.3000	39.49	-4.71	34.78	46.00	-11.22	peak	
6		649.8300	35.14	-0.03	35.11	46.00	-10.89	peak	

Test Mode: UNII-2A/ TX N40 Mode 5270MHz


Horizontal

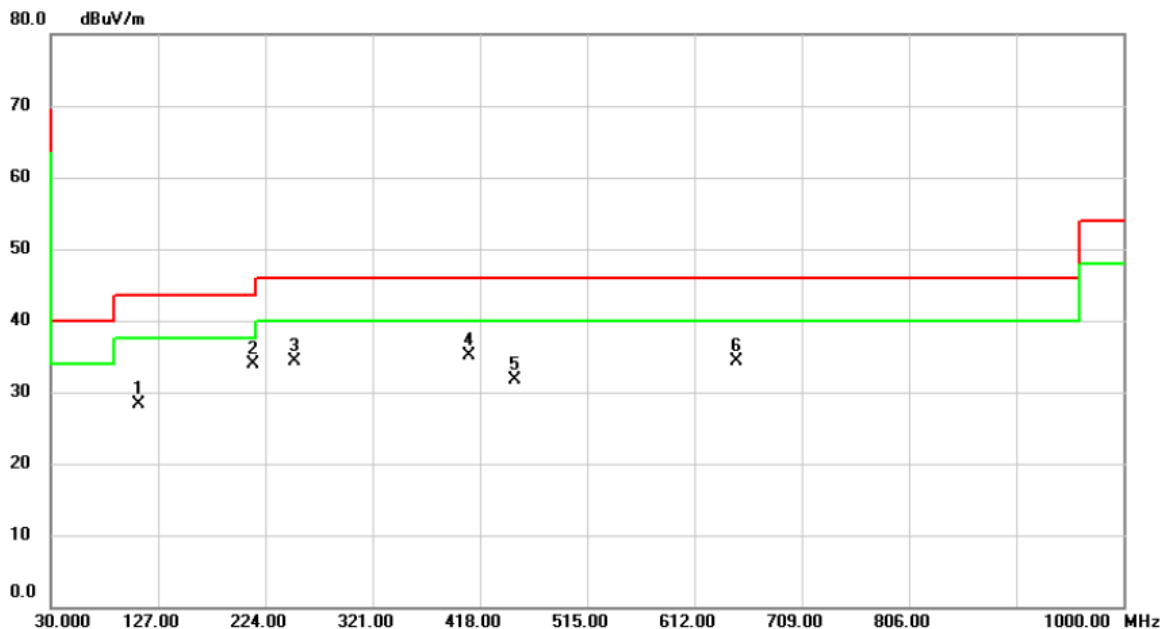

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		109.5400	39.19	-10.85	28.34	43.50	-15.16	peak	
2	*	212.3600	44.79	-10.91	33.88	43.50	-9.62	peak	
3		250.1900	43.38	-9.07	34.31	46.00	-11.69	peak	
4		408.3000	39.76	-4.71	35.05	46.00	-10.95	peak	
5		450.0100	35.32	-3.56	31.76	46.00	-14.24	peak	
6		649.8300	34.34	-0.03	34.31	46.00	-11.69	peak	

Test Mode: UNII-2C/ TX N20 Mode 5500MHz


Vertical

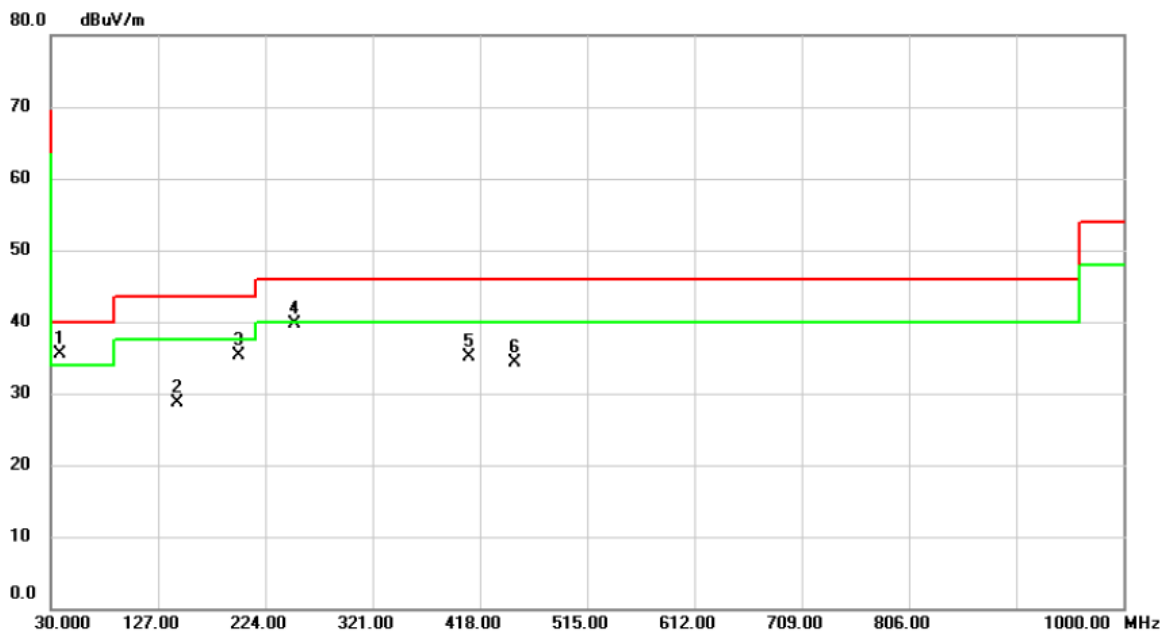

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	37.7600	44.05	-8.63	35.42	40.00	-4.58	peak	
2		144.4600	37.82	-9.07	28.75	43.50	-14.75	peak	
3		199.7500	45.97	-10.64	35.33	43.50	-8.17	peak	
4		250.1900	48.86	-9.07	39.79	46.00	-6.21	peak	
5		408.3000	39.86	-4.71	35.15	46.00	-10.85	peak	
6		450.0100	37.88	-3.56	34.32	46.00	-11.68	peak	

Test Mode: UNII-2C/ TX N20 Mode 5500MHz


Horizontal

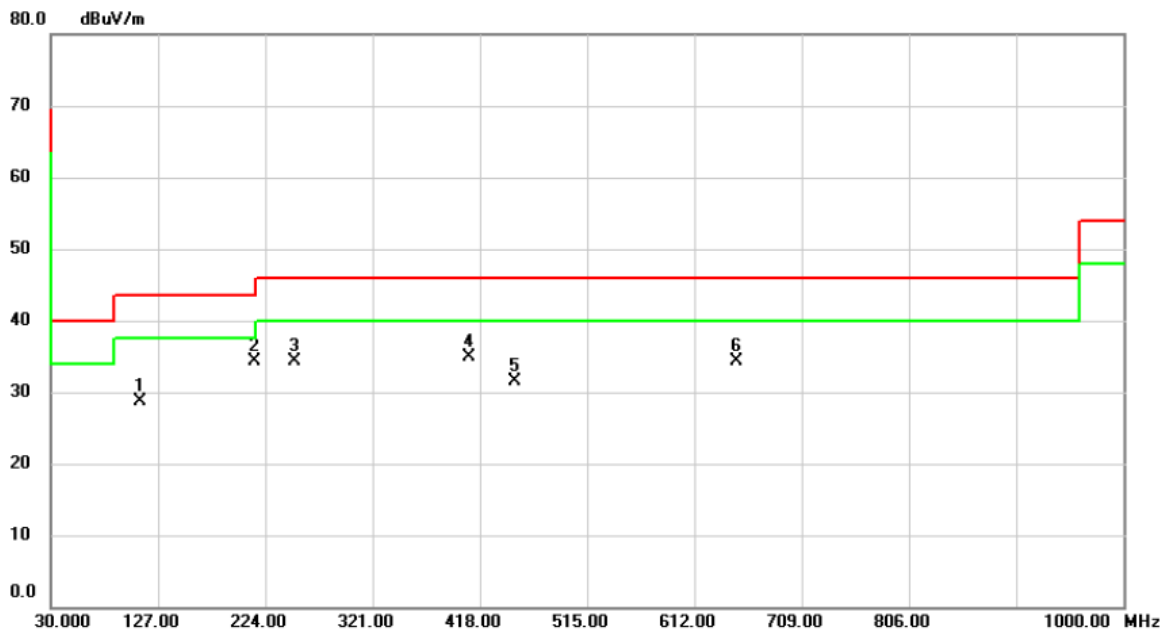

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		110.5100	39.50	-10.74	28.76	43.50	-14.74	peak	
2	*	214.3000	45.18	-10.89	34.29	43.50	-9.21	peak	
3		250.1900	43.43	-9.07	34.36	46.00	-11.64	peak	
4		408.3000	39.58	-4.71	34.87	46.00	-11.13	peak	
5		450.0100	35.11	-3.56	31.55	46.00	-14.45	peak	
6		649.8300	34.24	-0.03	34.21	46.00	-11.79	peak	

Test Mode: UNII-3/ TX N20 Mode 5785MHz


Vertical

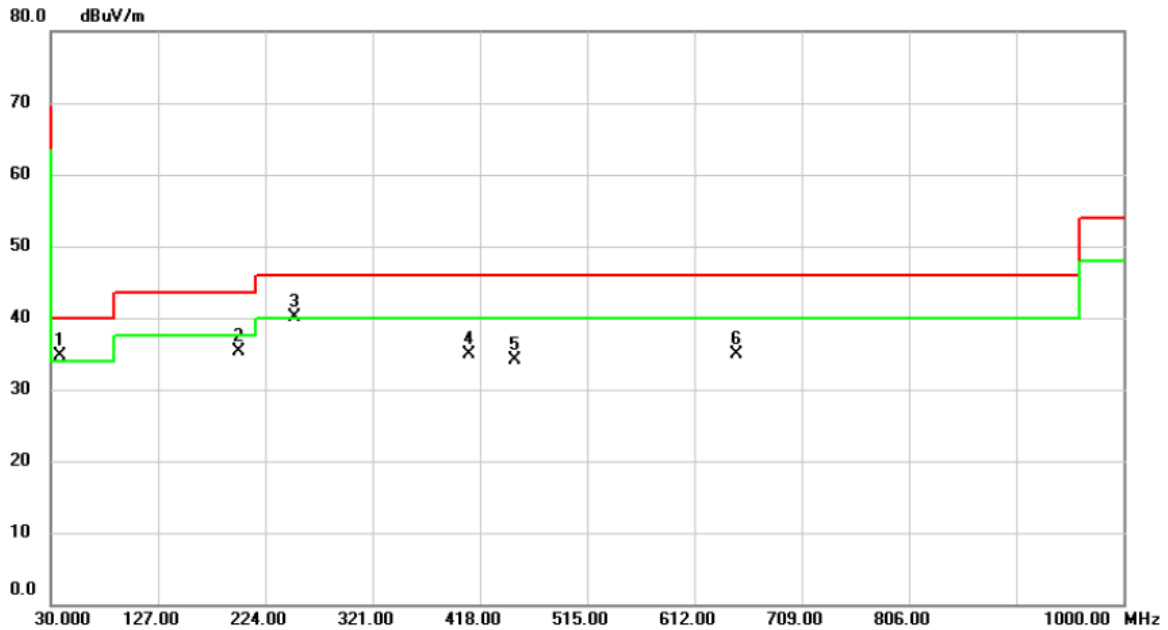

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	37.7600	43.38	-8.63	34.75	40.00	-5.25	peak	
2		199.7500	46.04	-10.64	35.40	43.50	-8.10	peak	
3	!	250.1900	49.22	-9.07	40.15	46.00	-5.85	peak	
4		408.3000	39.54	-4.71	34.83	46.00	-11.17	peak	
5		450.0100	37.68	-3.56	34.12	46.00	-11.88	peak	
6		649.8300	34.97	-0.03	34.94	46.00	-11.06	peak	

Test Mode: UNII-3/ TX N20 Mode 5785MHz

Horizontal

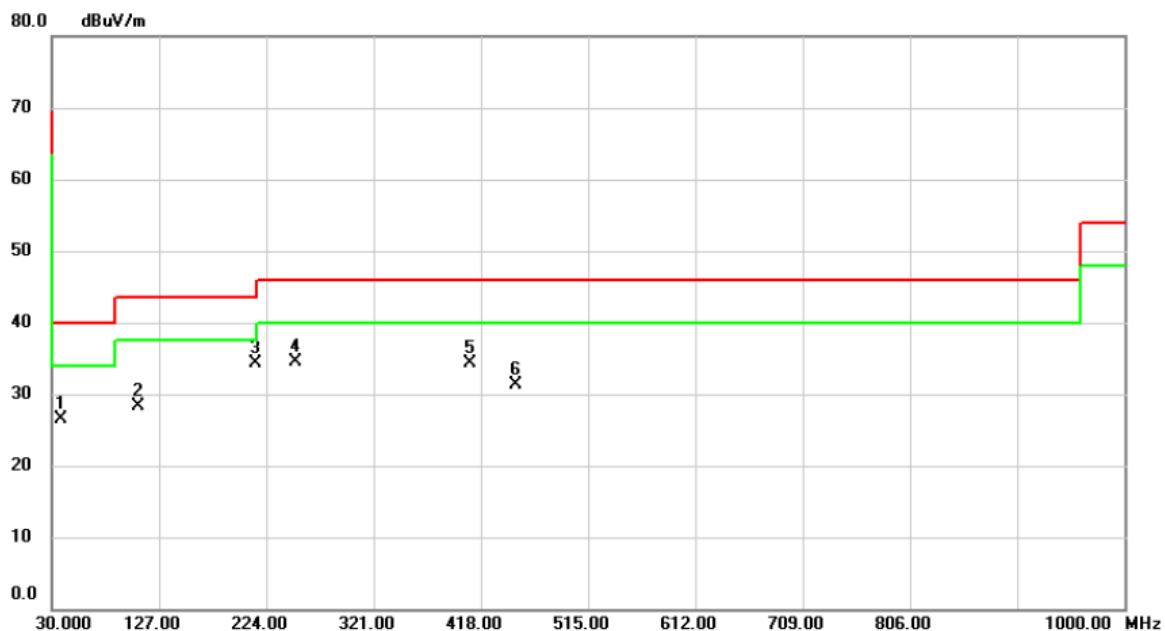


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		37.7600	35.22	-8.63	26.59	40.00	-13.41	peak	
2		108.5700	39.21	-11.00	28.21	43.50	-15.29	peak	
3	*	214.3000	45.12	-10.89	34.23	43.50	-9.27	peak	
4		250.1900	43.64	-9.07	34.57	46.00	-11.43	peak	
5		408.3000	39.07	-4.71	34.36	46.00	-11.64	peak	
6		450.0100	34.82	-3.56	31.26	46.00	-14.74	peak	

APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

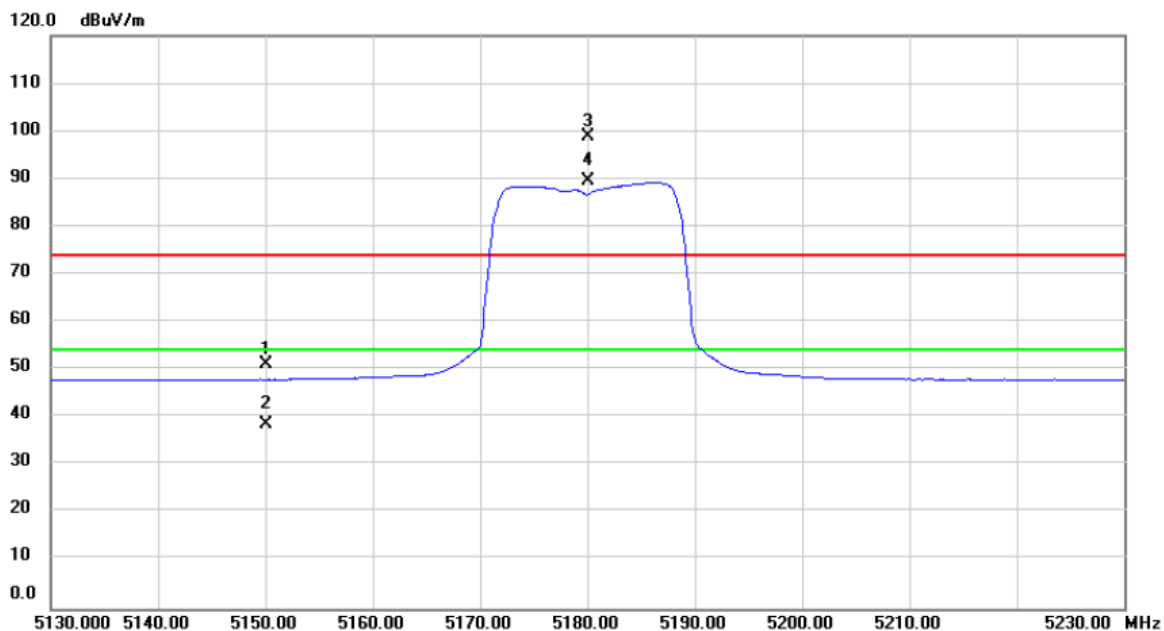

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	13.66	37.54	51.20	74.00	-22.80	peak	
2		5150.000	1.08	37.54	38.62	54.00	-15.38	AVG	
3	X	5180.000	61.42	37.58	99.00	74.00	25.00	peak	No Limit
4	*	5180.000	51.83	37.58	89.41	54.00	35.41	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

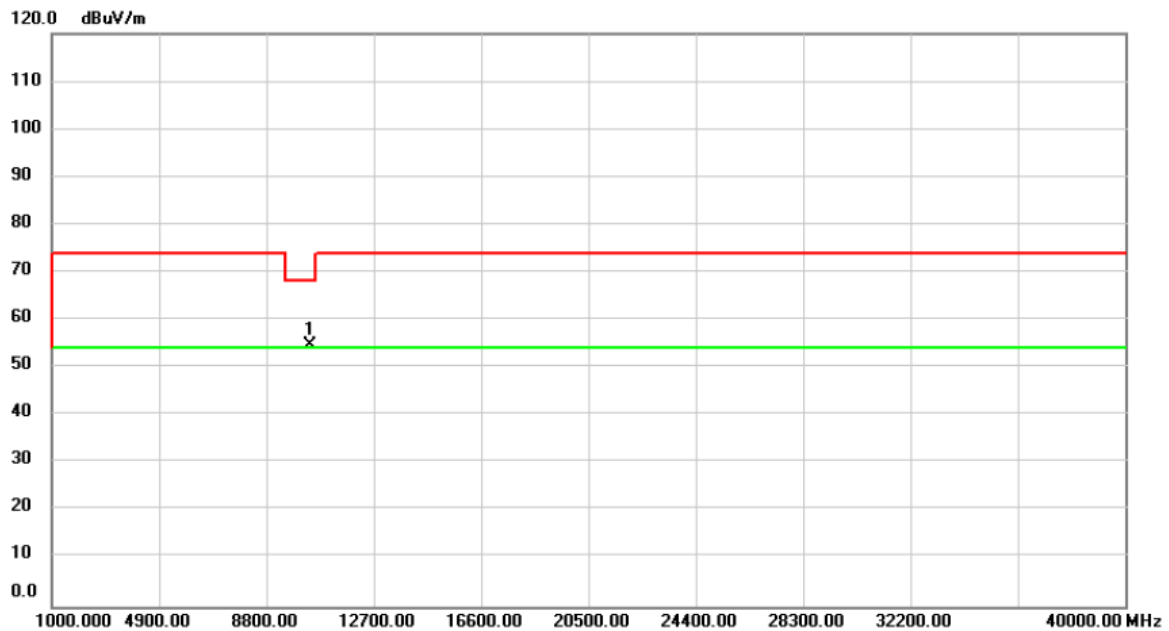

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	52.74	1.92	54.66	68.20	-13.54	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

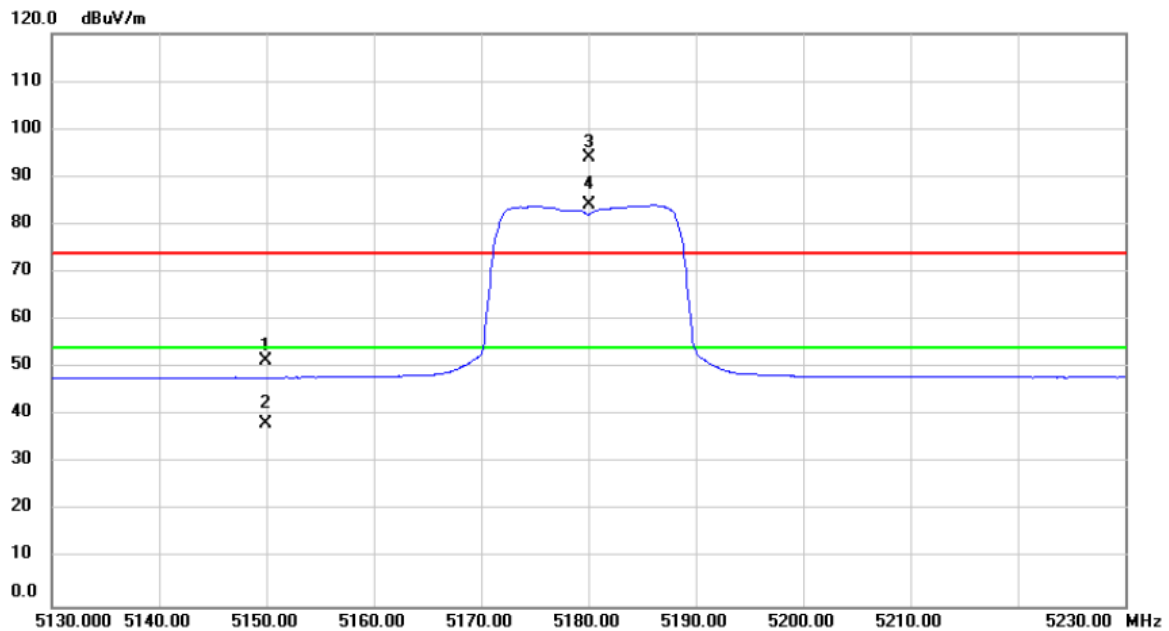

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5149.980	13.91	37.54	51.45	74.00	-22.55	peak	
2		5149.980	0.68	37.54	38.22	54.00	-15.78	AVG	
3	X	5180.000	56.53	37.58	94.11	74.00	20.11	peak	No Limit
4	*	5180.000	46.49	37.58	84.07	54.00	30.07	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

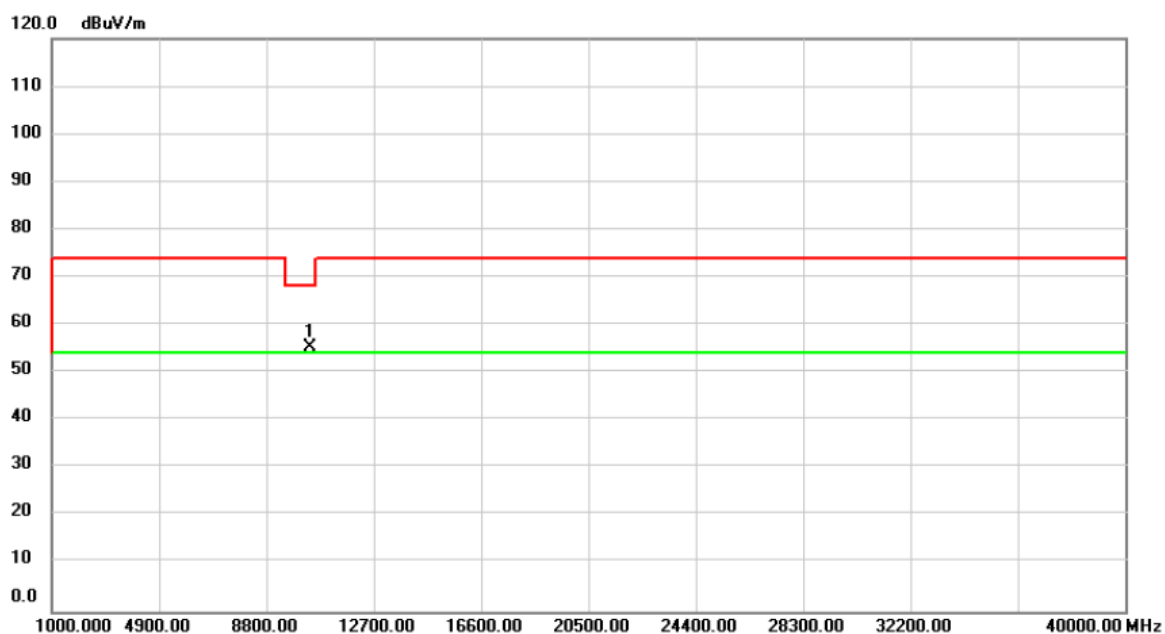

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	53.50	1.92	55.42	68.20	-12.78	peak	


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz

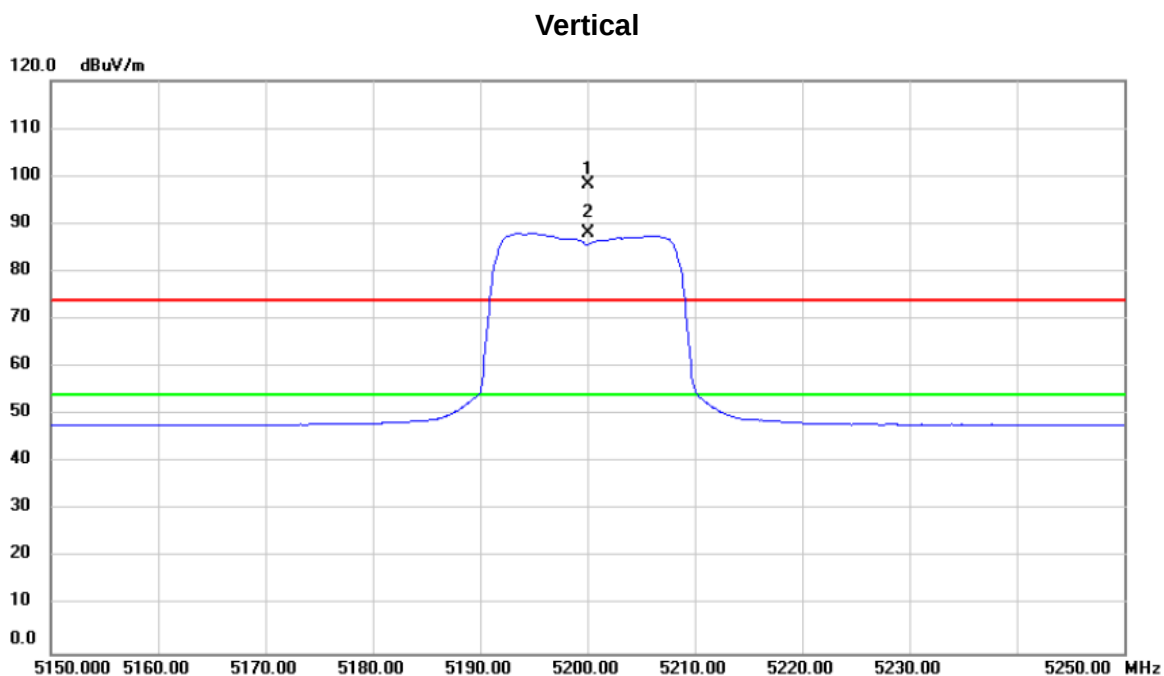

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5200.000	60.65	37.60	98.25	74.00	24.25	peak	No Limit
2	*	5200.000	50.32	37.60	87.92	54.00	33.92	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Vertical

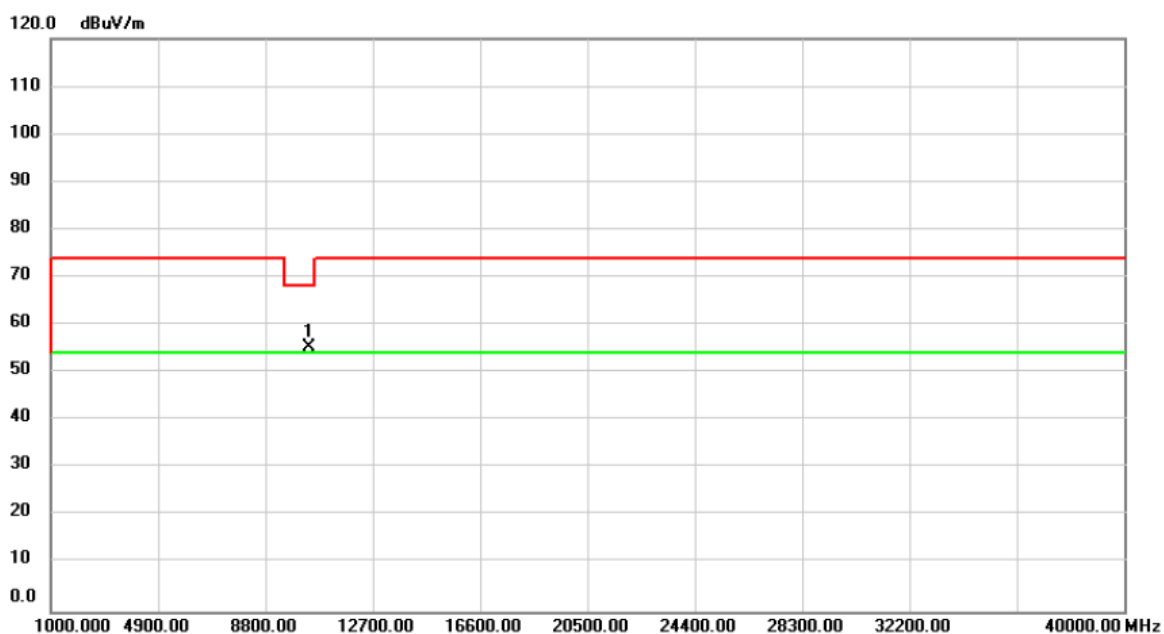

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	53.54	1.95	55.49	68.20	-12.71	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Horizontal

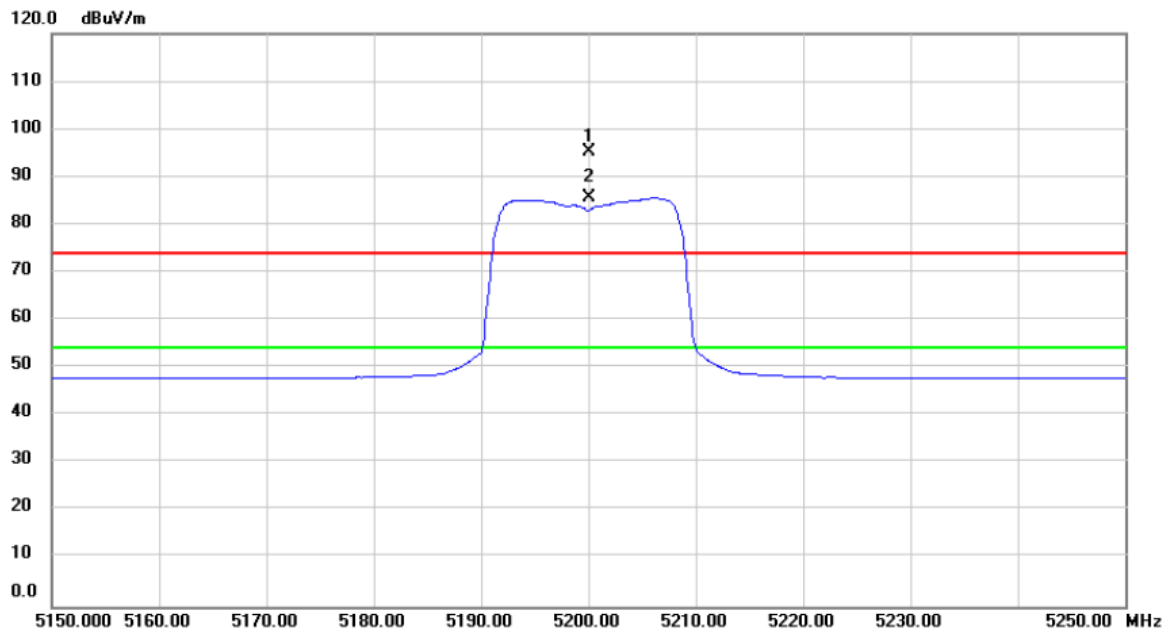

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5200.000	57.66	37.60	95.26	74.00	21.26	peak	No Limit
2	*	5200.000	48.00	37.60	85.60	54.00	31.60	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Horizontal

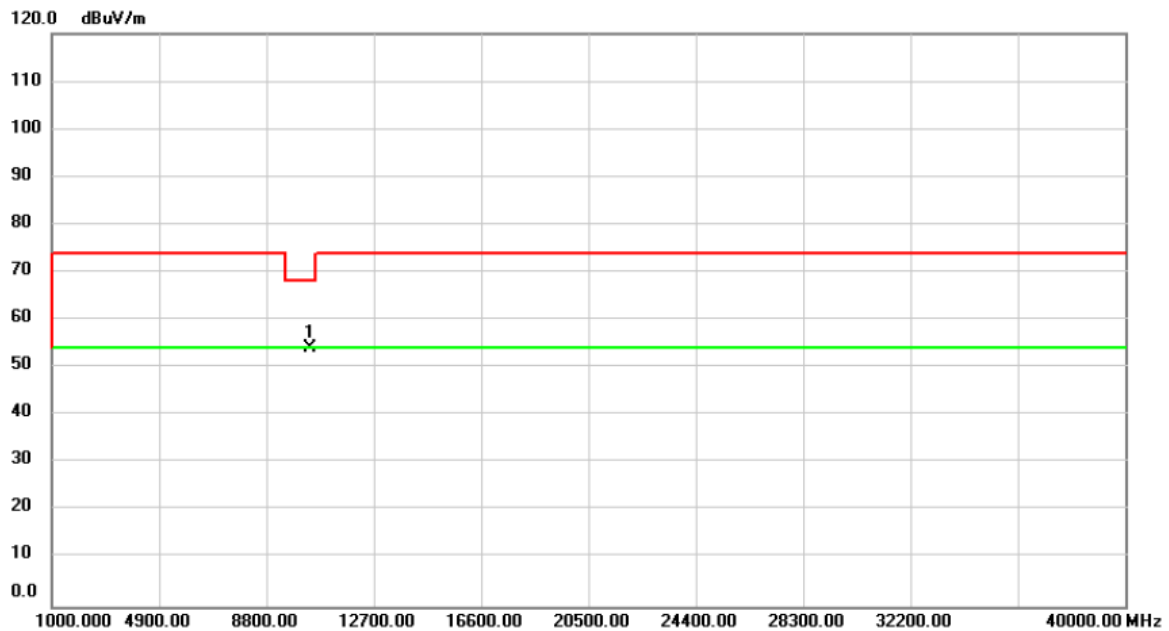

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	52.26	1.95	54.21	68.20	-13.99	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

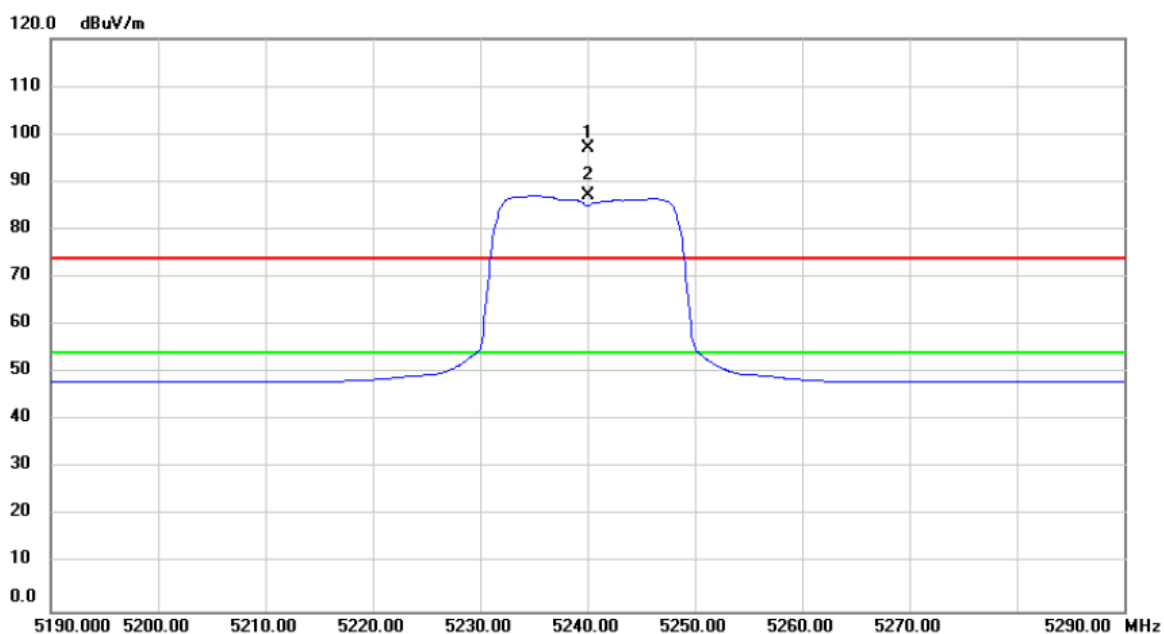

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5240.000	59.51	37.64	97.15	74.00	23.15	peak	No Limit
2	*	5240.000	49.45	37.64	87.09	54.00	33.09	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

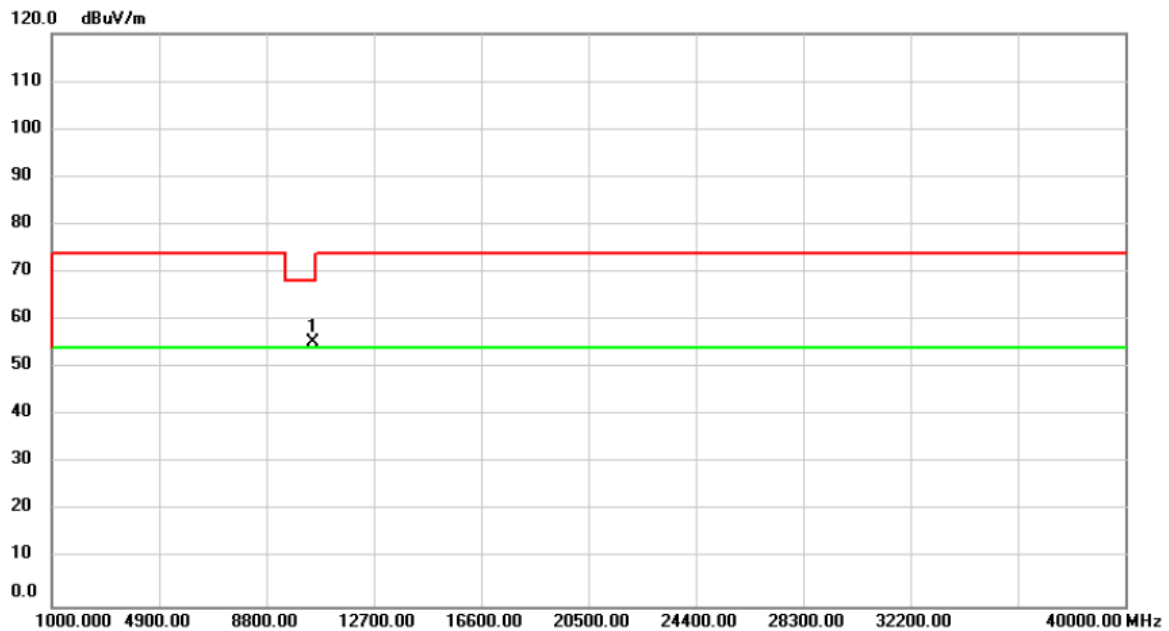

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	53.38	1.96	55.34	68.20	-12.86	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

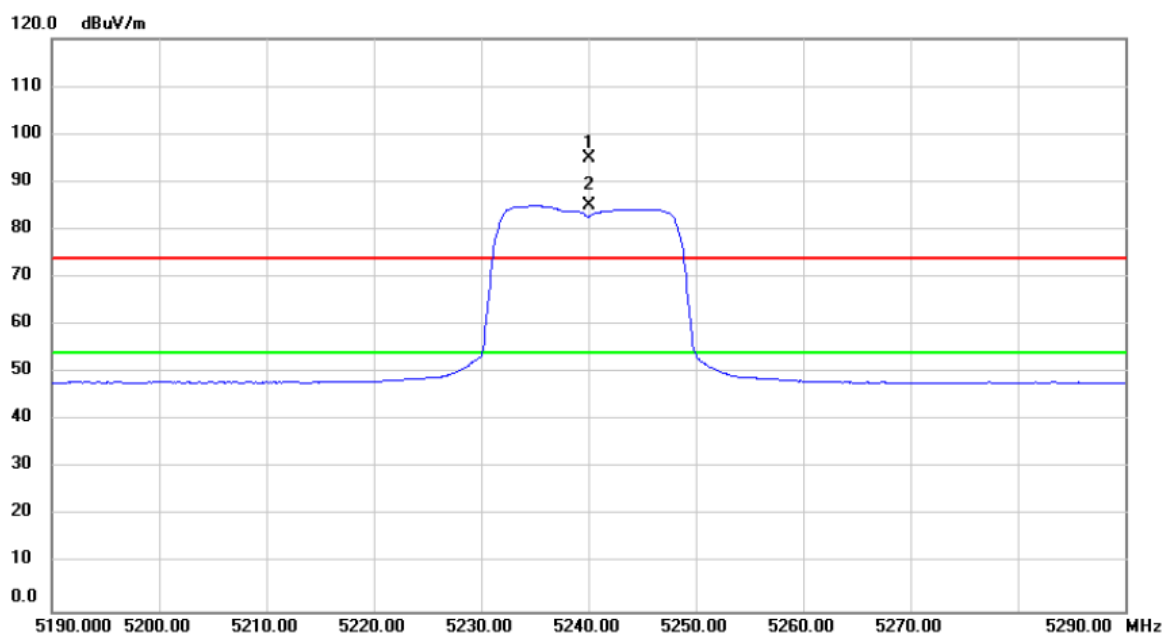

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5240.000	57.20	37.64	94.84	74.00	20.84	peak	No Limit
2	*	5240.000	47.37	37.64	85.01	54.00	31.01	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

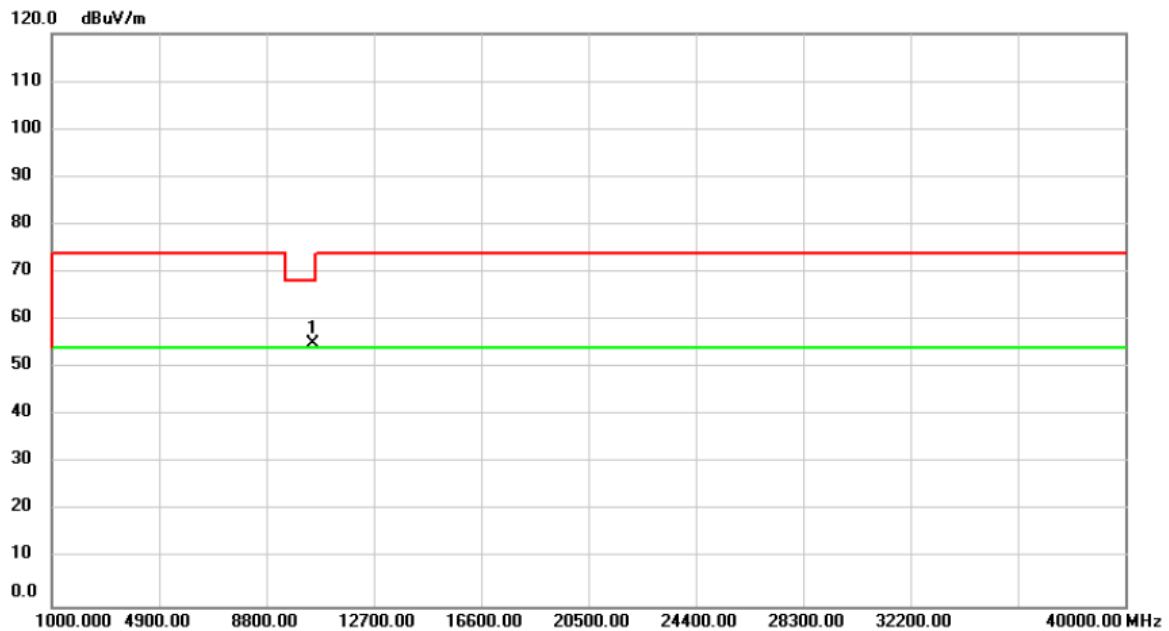

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	53.23	1.96	55.19	68.20	-13.01	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

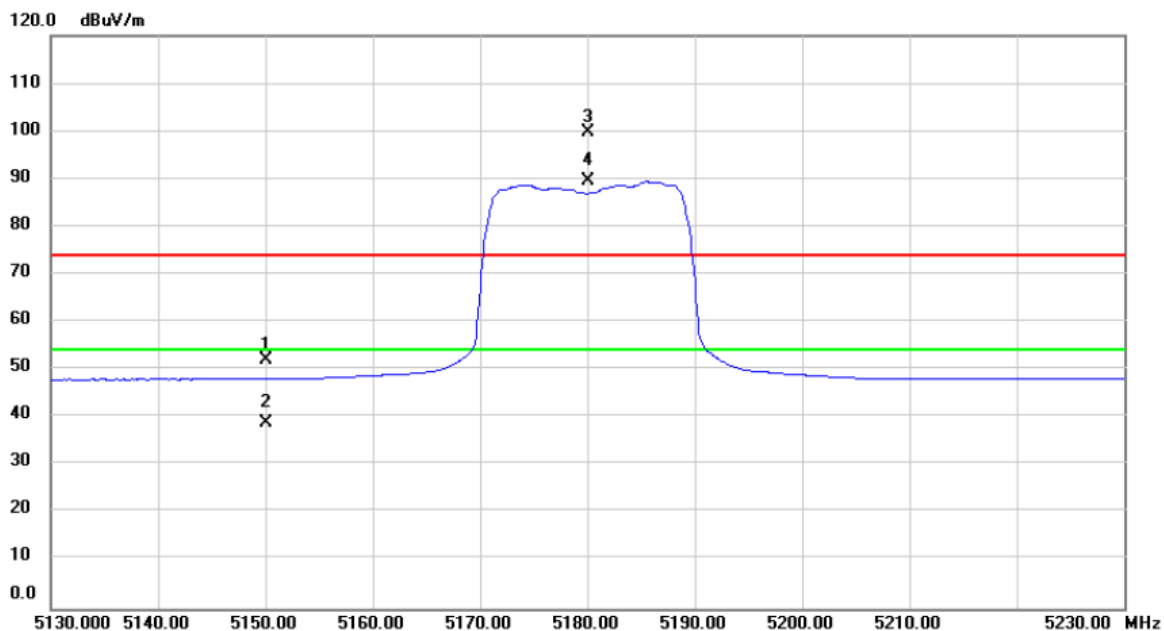

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	14.48	37.54	52.02	74.00	-21.98	peak	
2		5150.000	1.39	37.54	38.93	54.00	-15.07	AVG	
3	X	5180.000	62.07	37.58	99.65	74.00	25.65	peak	No Limit
4	*	5180.000	51.85	37.58	89.43	54.00	35.43	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

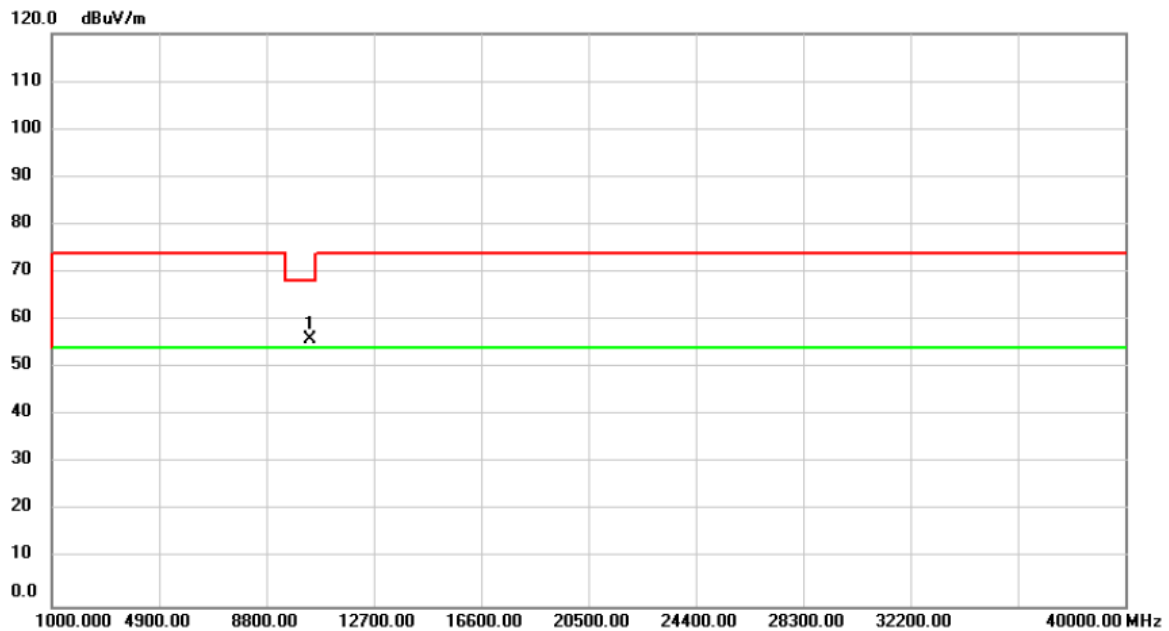

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	53.93	1.92	55.85	68.20	-12.35	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

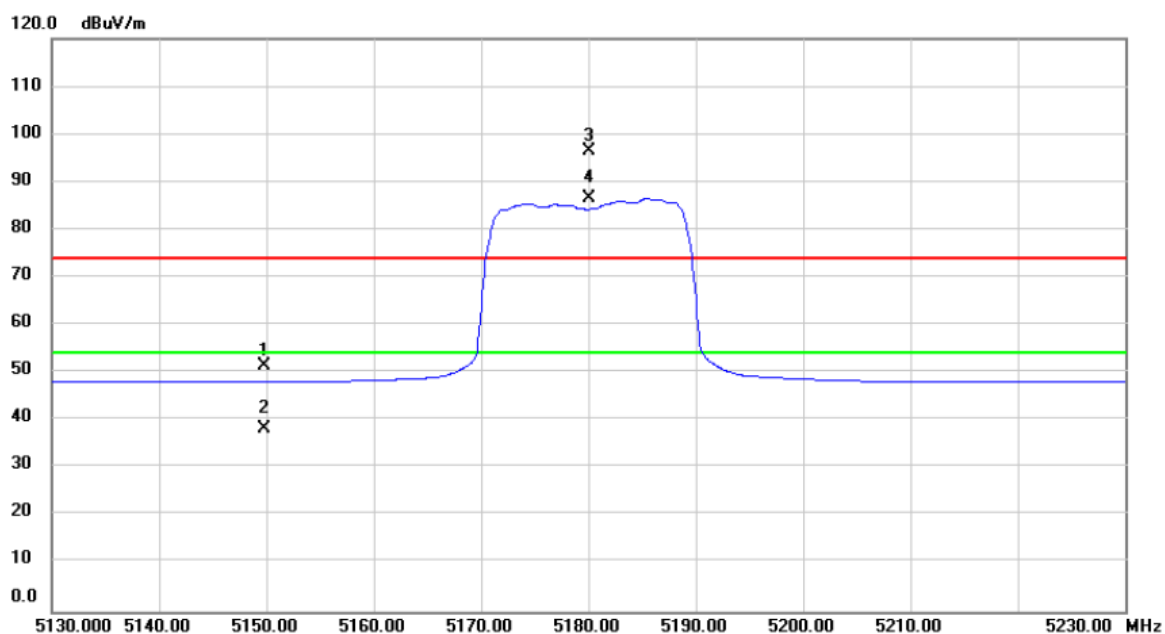

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5149.840	14.05	37.54	51.59	74.00	-22.41	peak	
2		5149.840	0.85	37.54	38.39	54.00	-15.61	AVG	
3	X	5180.000	58.95	37.58	96.53	74.00	22.53	peak	No Limit
4	*	5180.000	48.86	37.58	86.44	54.00	32.44	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

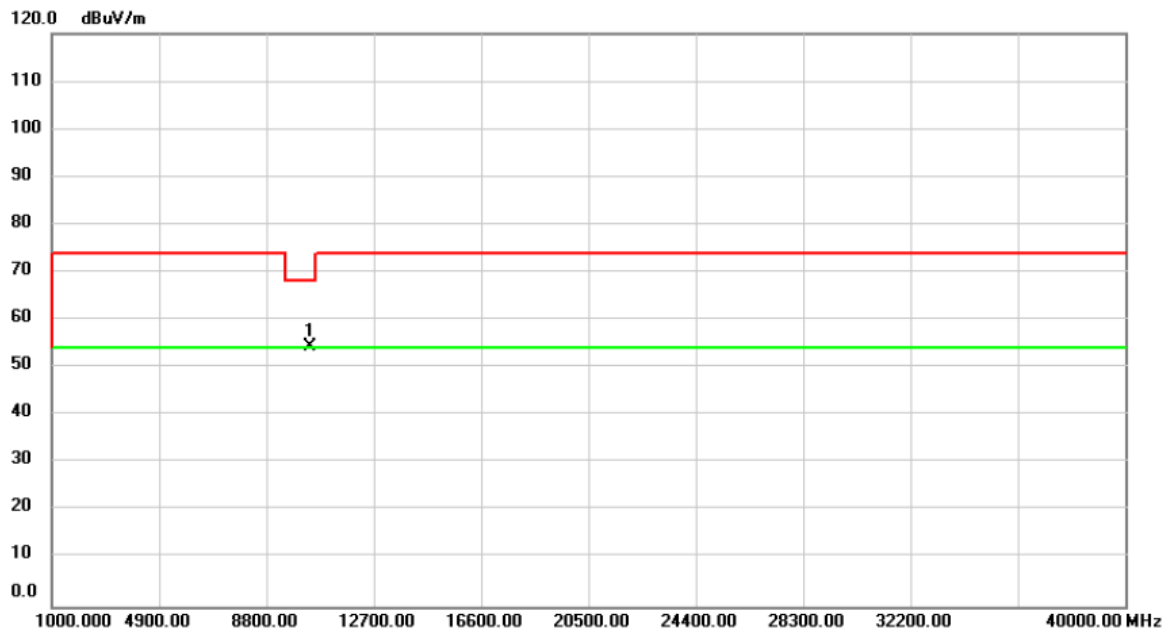

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	52.60	1.92	54.52	68.20	-13.68	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Vertical

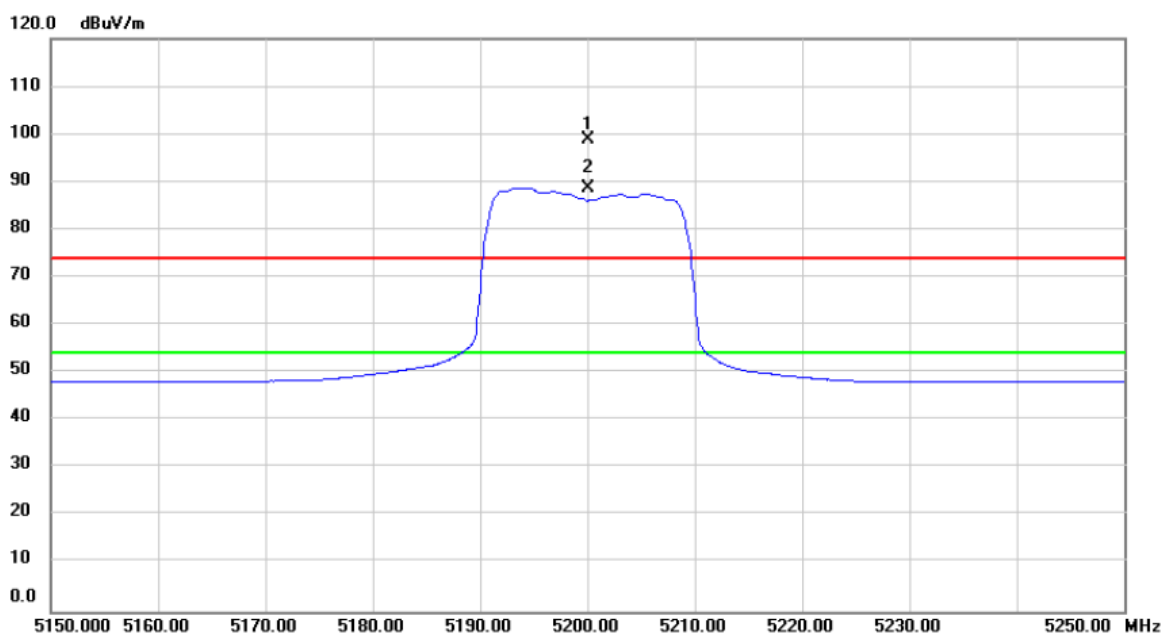

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5200.000	61.18	37.60	98.78	74.00	24.78	peak	No Limit
2	*	5200.000	51.18	37.60	88.78	54.00	34.78	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Vertical

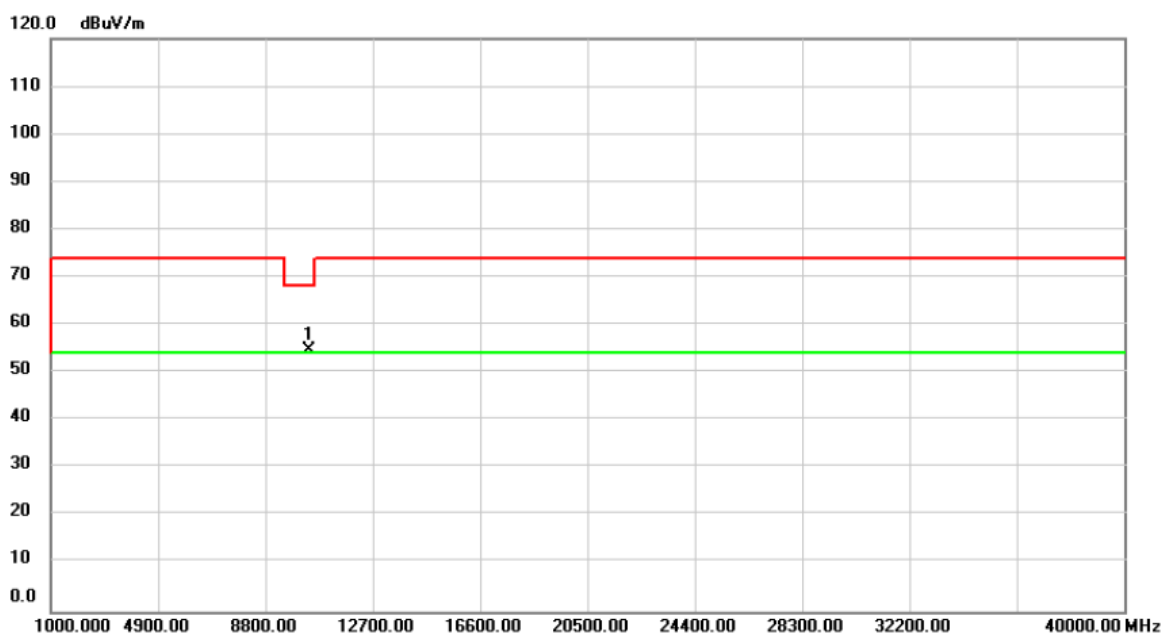

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	52.70	1.95	54.65	68.20	-13.55	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Horizontal

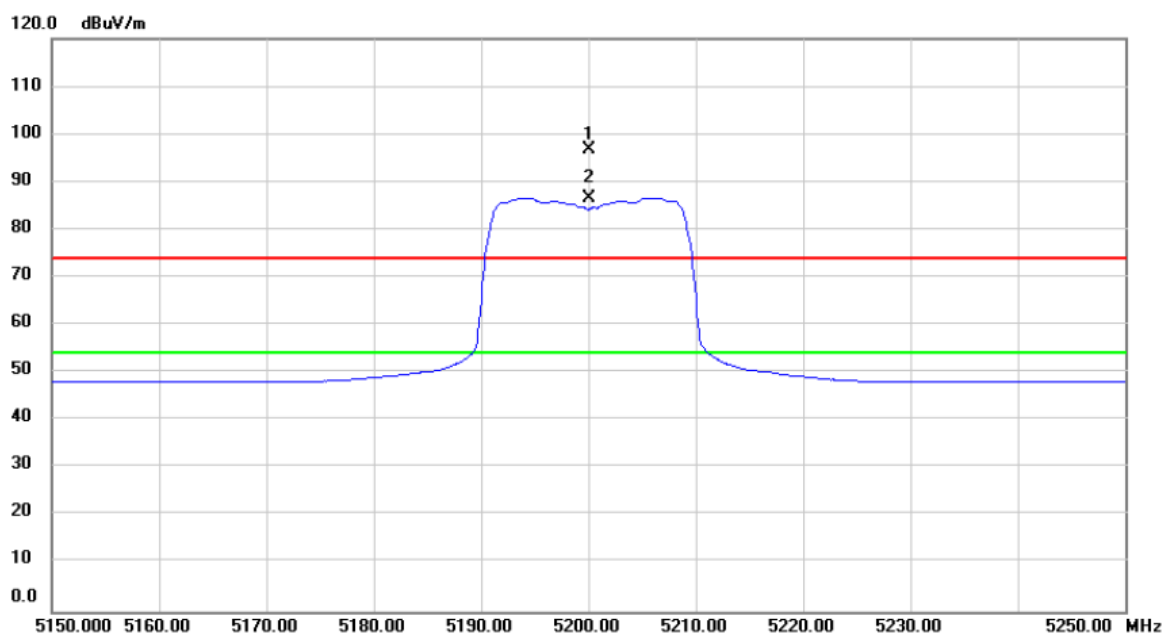

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5200.000	59.26	37.60	96.86	74.00	22.86	peak	No Limit
2	*	5200.000	49.10	37.60	86.70	54.00	32.70	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Horizontal

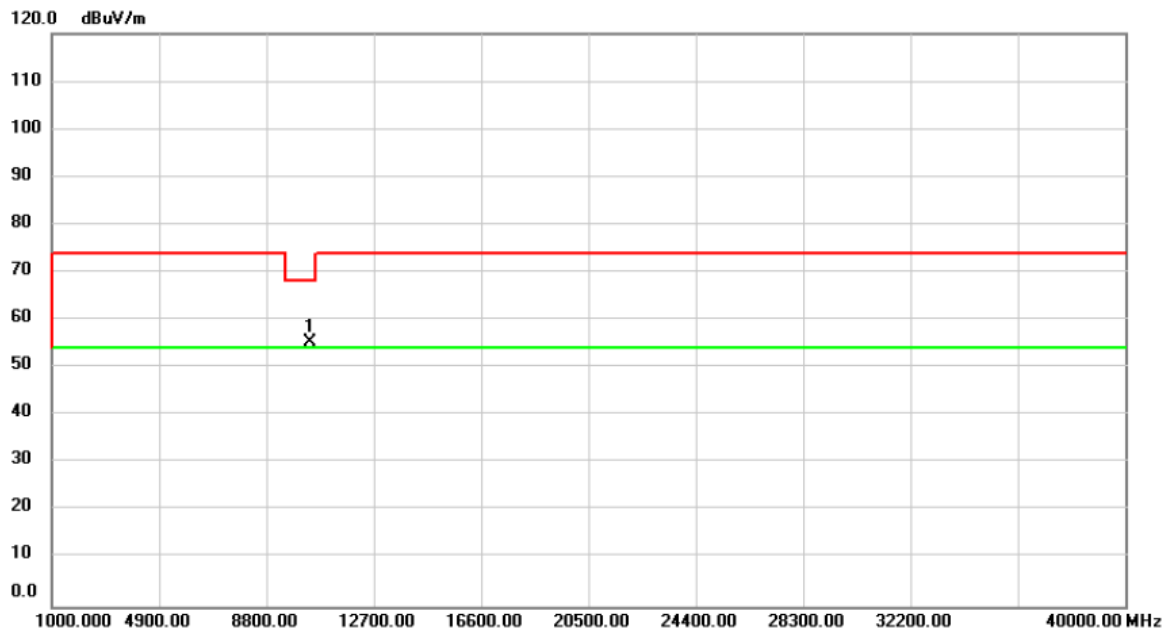

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	53.32	1.95	55.27	68.20	-12.93	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

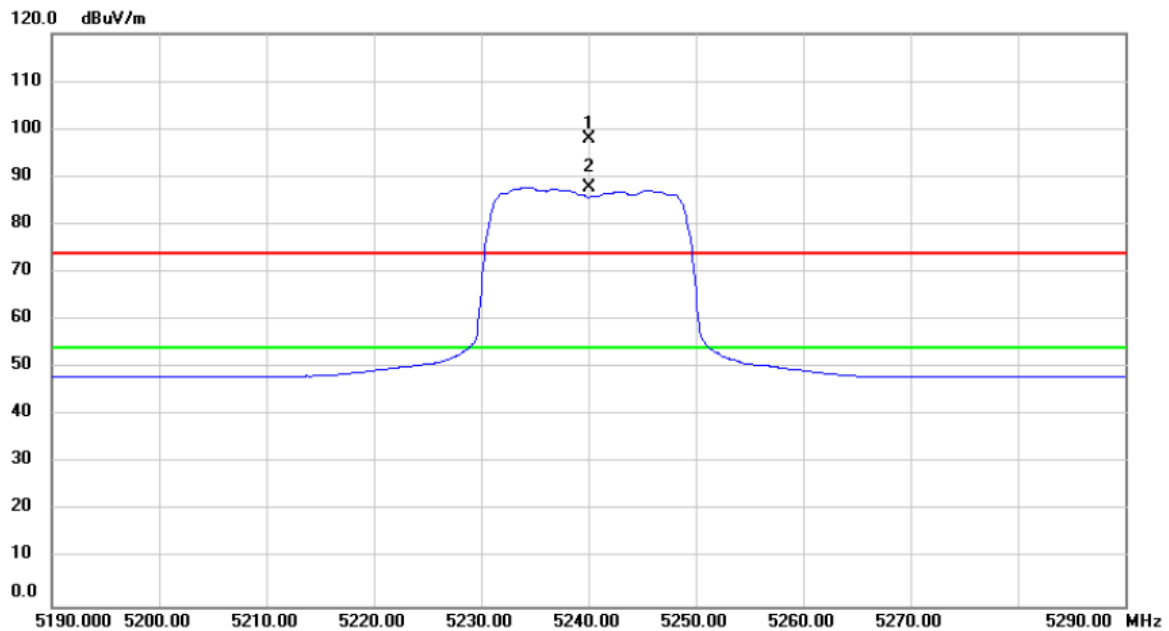

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5240.000	60.25	37.64	97.89	74.00	23.89	peak	No Limit
2	*	5240.000	50.19	37.64	87.83	54.00	33.83	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

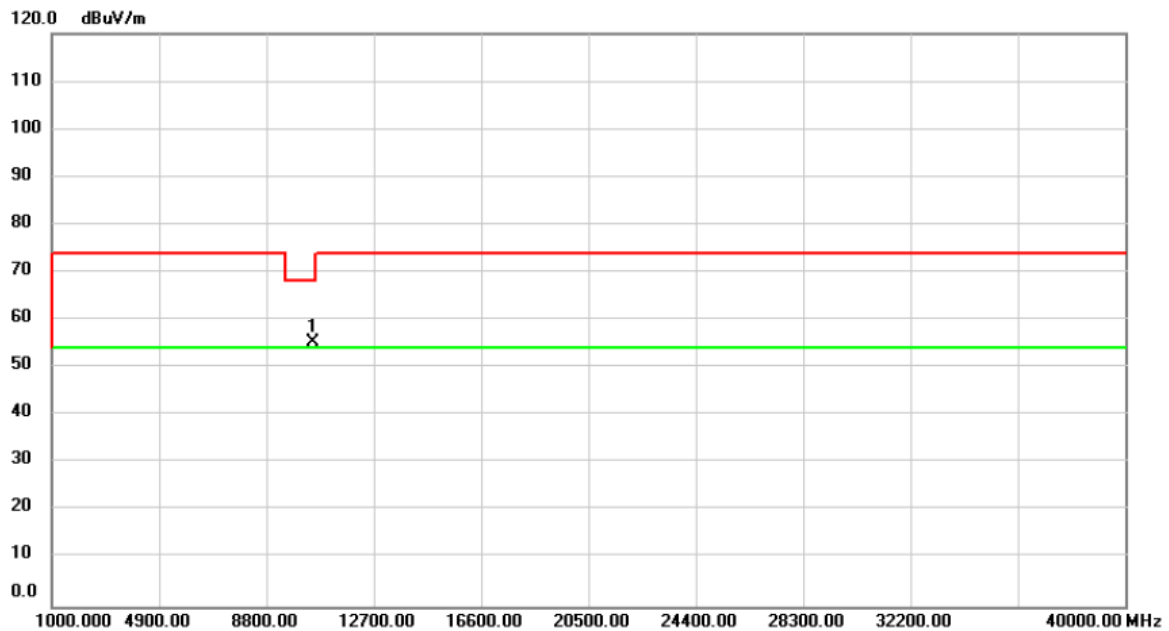

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10480.00	53.36	1.96	55.32	68.20	-12.88	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

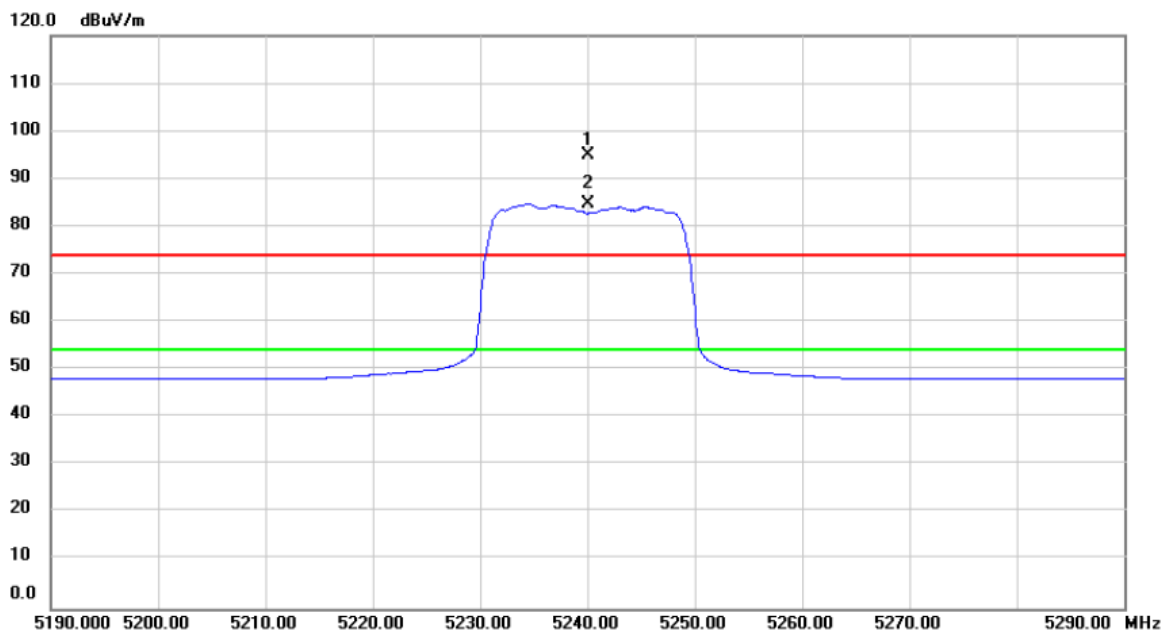

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5240.000	57.31	37.64	94.95	74.00	20.95	peak	No Limit
2	*	5240.000	46.99	37.64	84.63	54.00	30.63	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

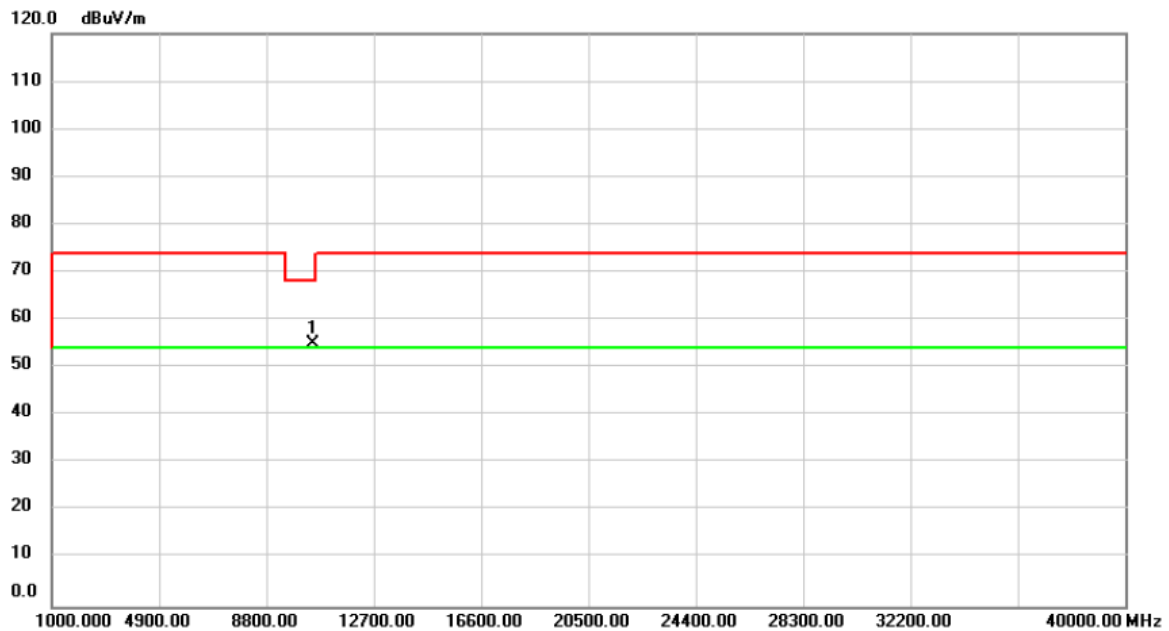

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10479.79	53.10	1.96	55.06	68.20	-13.14	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

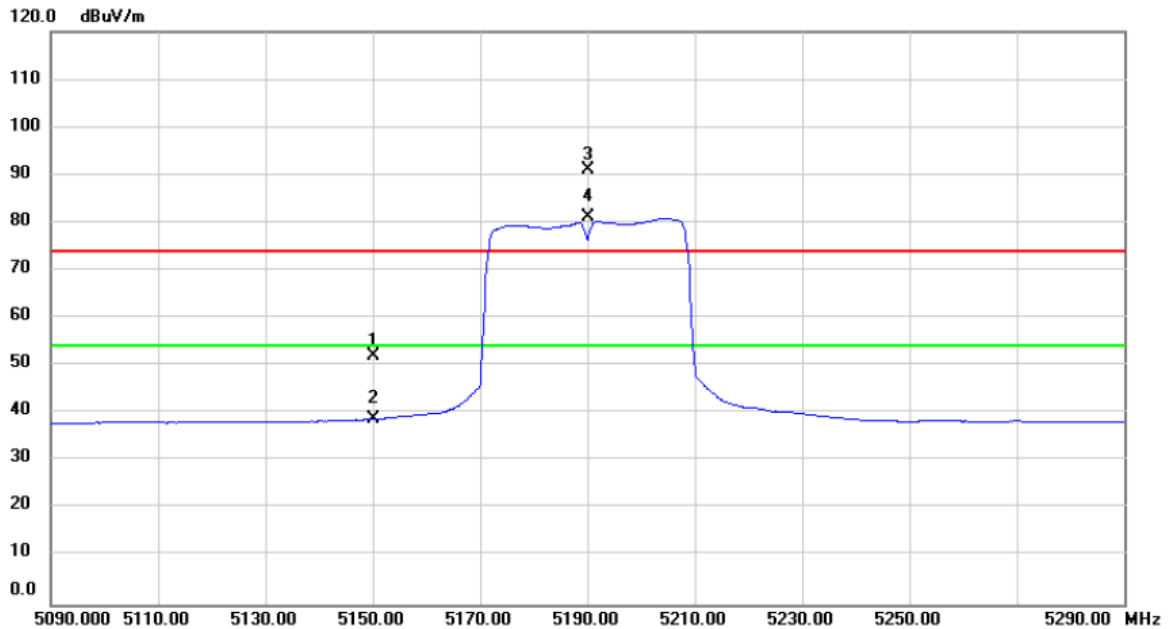

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	14.57	37.54	52.11	74.00	-21.89	peak	
2		5150.000	1.40	37.54	38.94	54.00	-15.06	AVG	
3	X	5190.000	53.38	37.58	90.96	74.00	16.96	peak	No Limit
4	*	5190.000	43.45	37.58	81.03	54.00	27.03	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

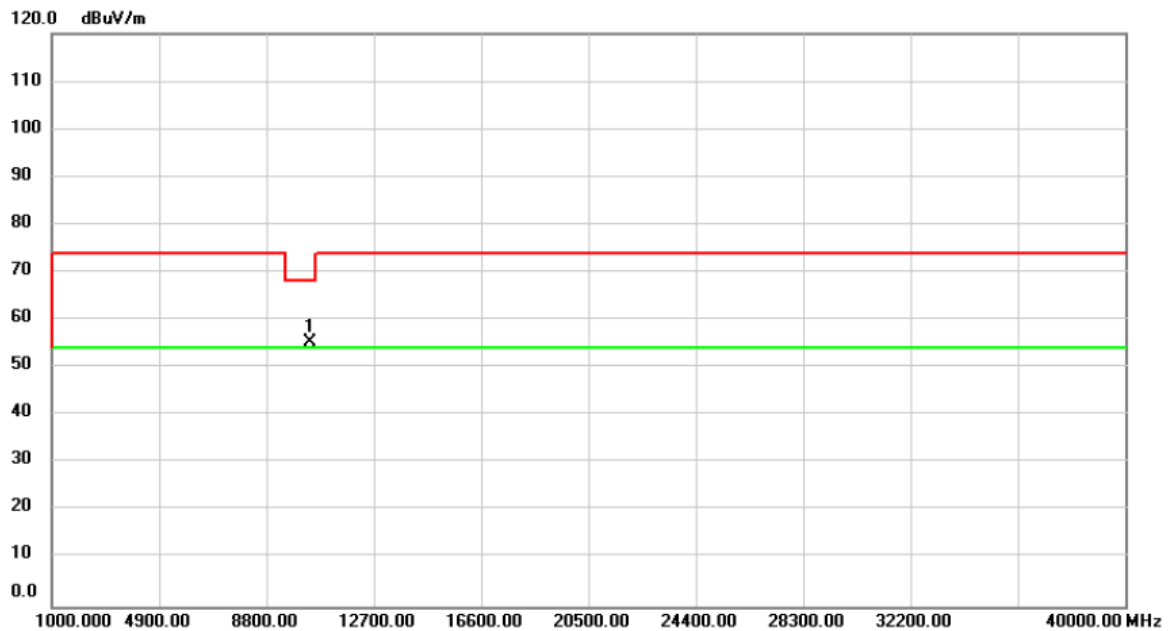

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	53.36	1.94	55.30	68.20	-12.90	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

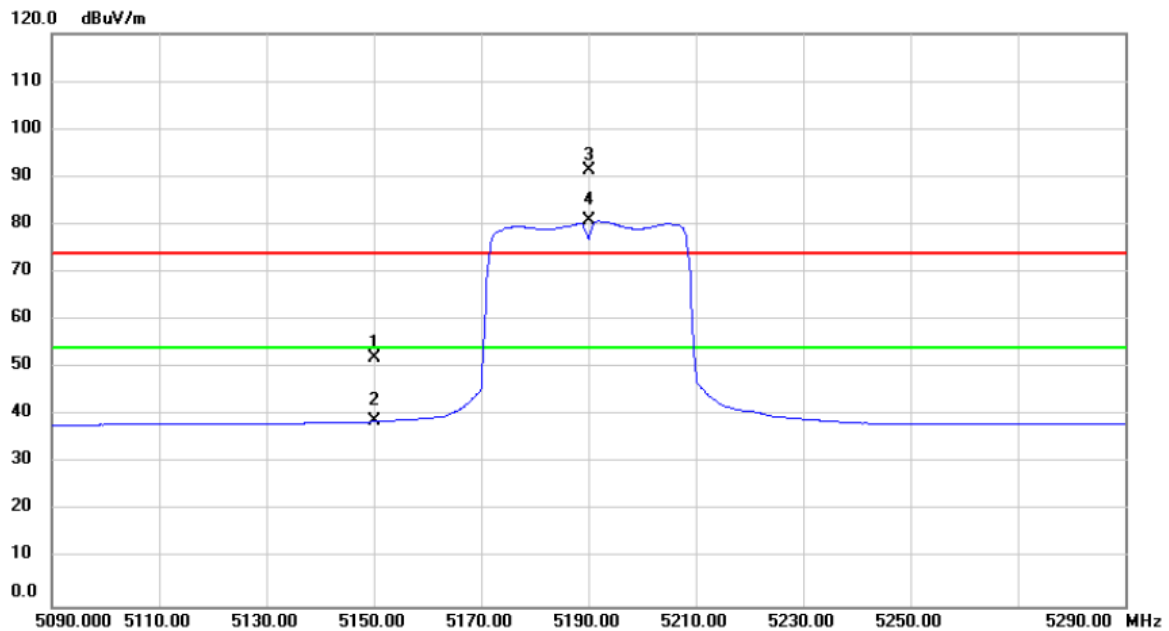

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	14.40	37.54	51.94	74.00	-22.06	peak	
2		5150.000	1.33	37.54	38.87	54.00	-15.13	AVG	
3	X	5190.000	53.72	37.58	91.30	74.00	17.30	peak	No Limit
4	*	5190.000	43.19	37.58	80.77	54.00	26.77	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

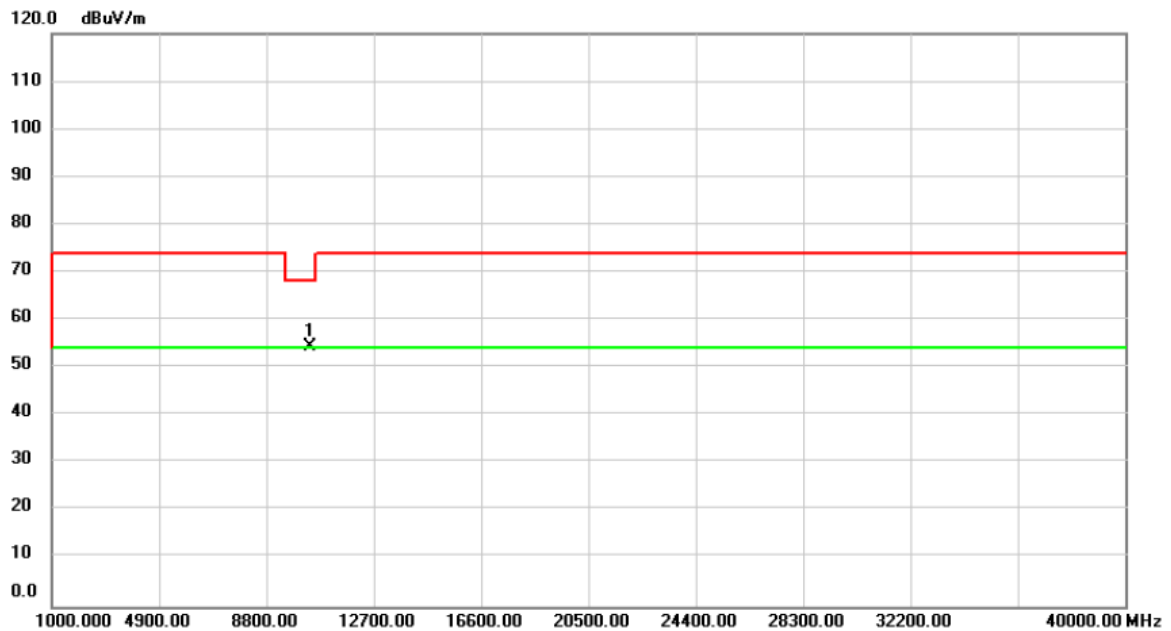

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	52.55	1.94	54.49	68.20	-13.71	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

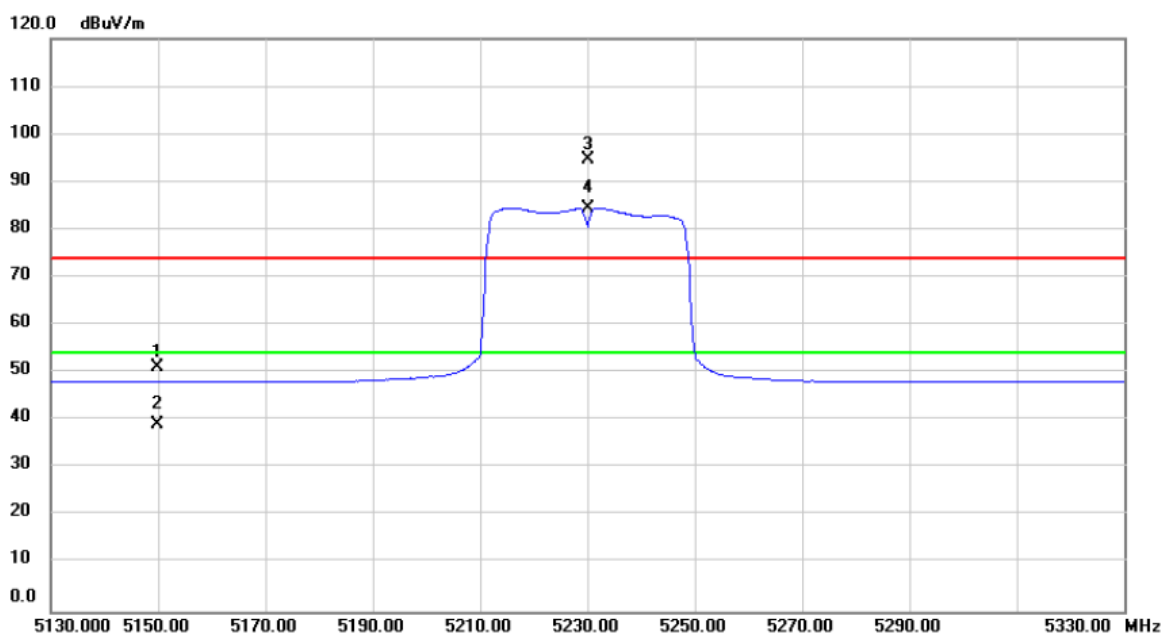

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5149.960	13.62	37.54	51.16	74.00	-22.84	peak	
2		5149.960	1.50	37.54	39.04	54.00	-14.96	AVG	
3	X	5230.000	57.08	37.63	94.71	74.00	20.71	peak	No Limit
4	*	5230.000	46.96	37.63	84.59	54.00	30.59	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

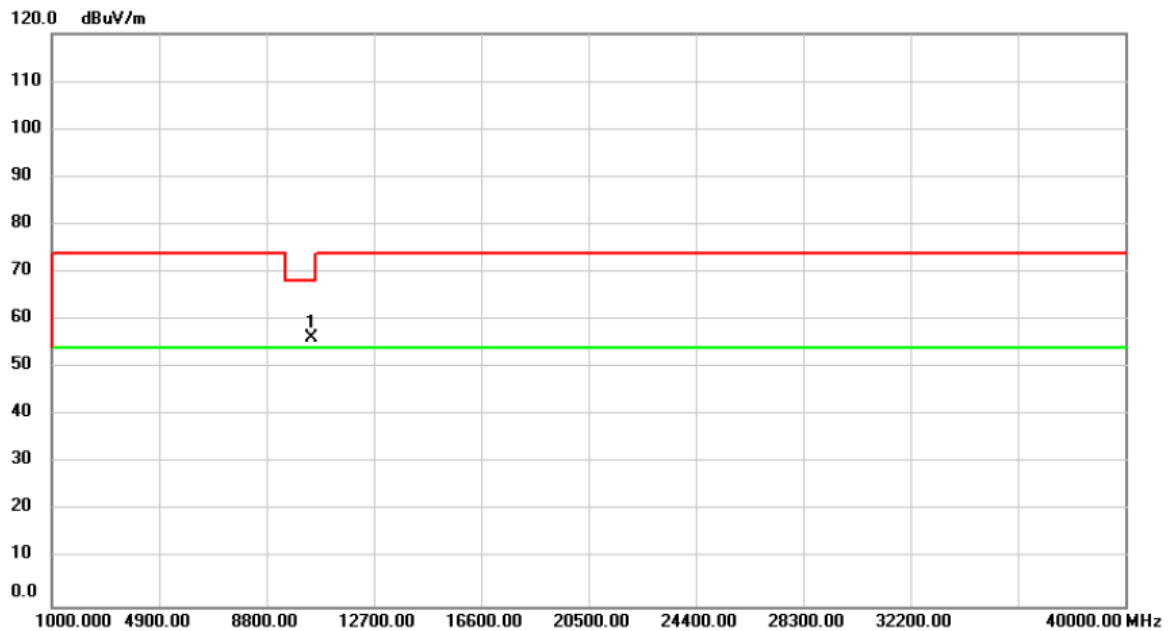

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10460.00	54.18	1.96	56.14	68.20	-12.06	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

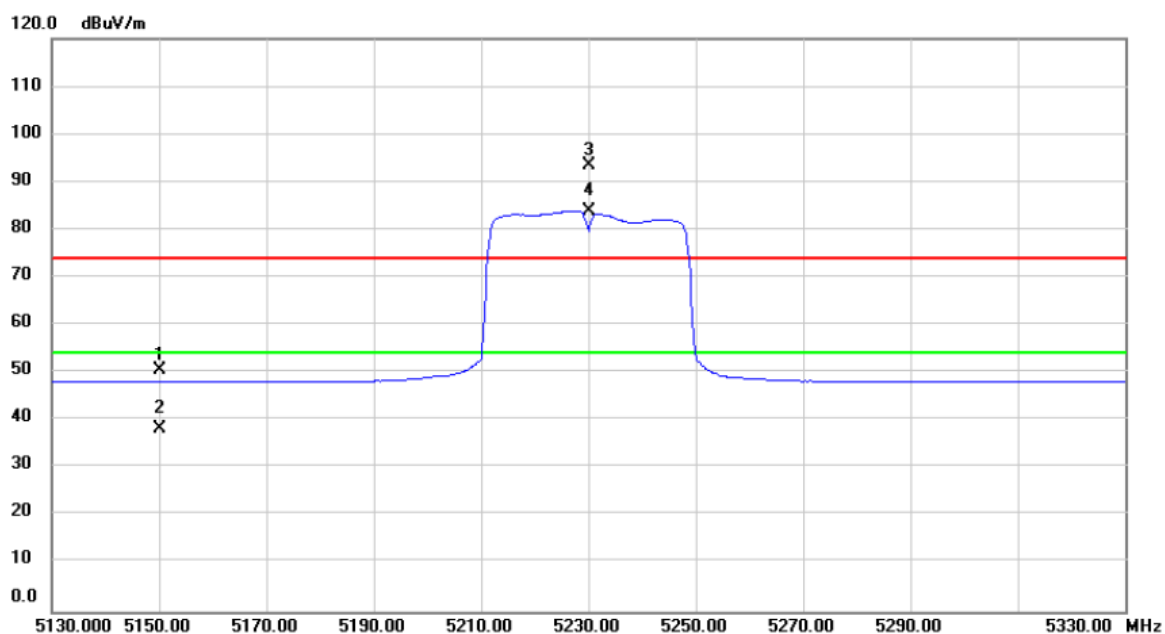

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	13.07	37.54	50.61	74.00	-23.39	peak	
2		5150.000	0.81	37.54	38.35	54.00	-15.65	AVG	
3	X	5230.000	55.78	37.63	93.41	74.00	19.41	peak	No Limit
4	*	5230.000	46.21	37.63	83.84	54.00	29.84	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

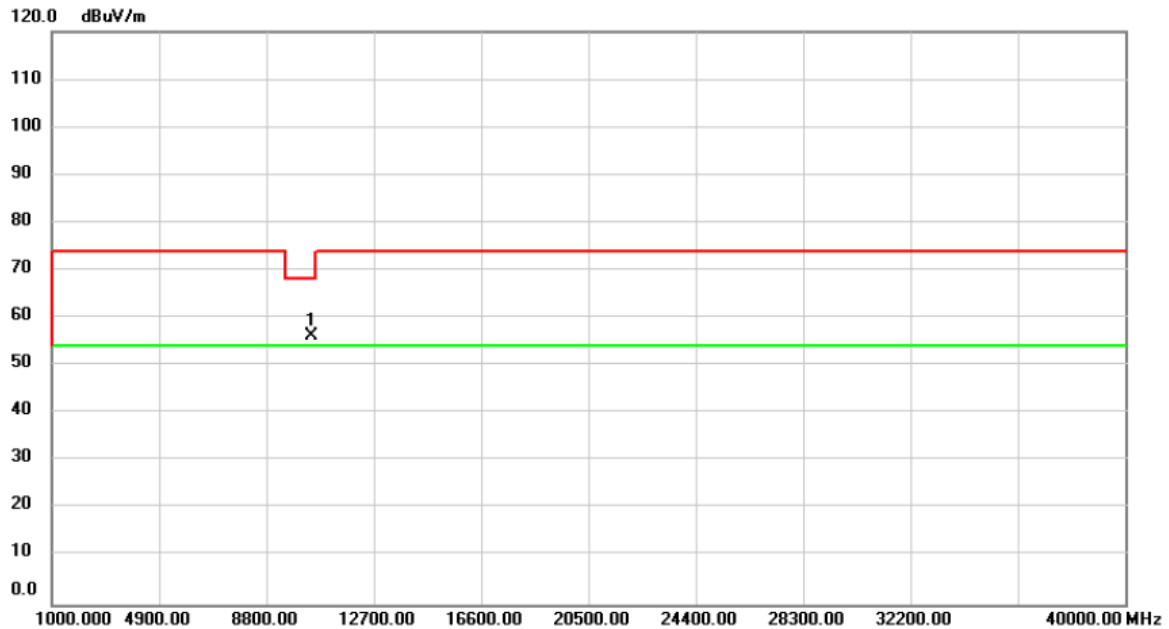

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10460.00	54.31	1.96	56.27	68.20	-11.93	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

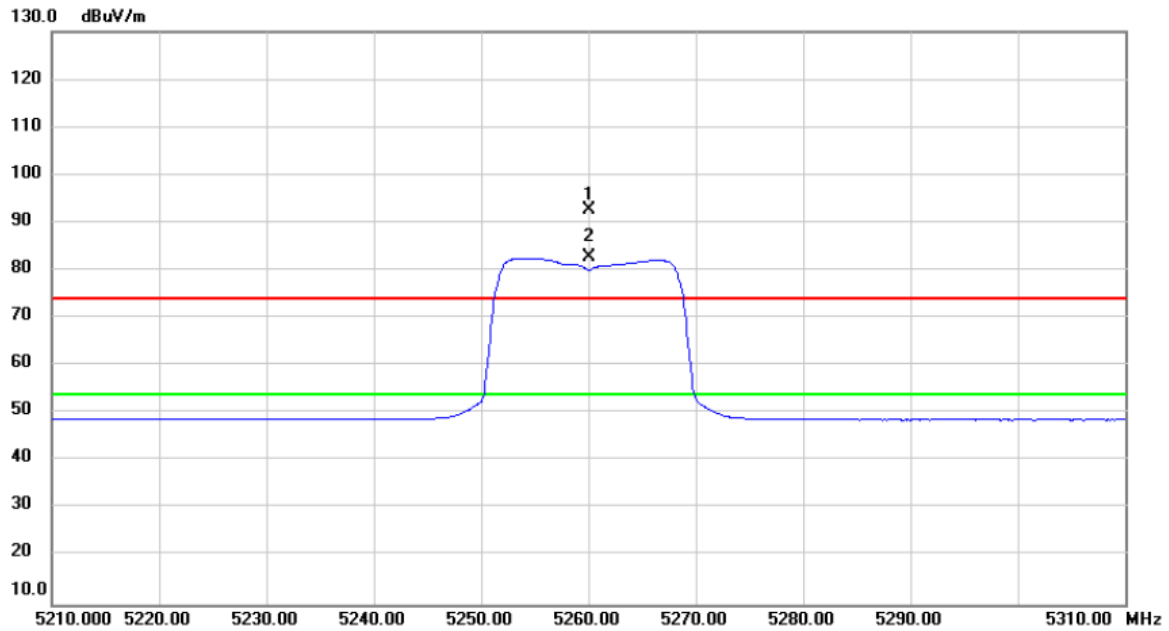

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5260.000	54.86	37.66	92.52	74.00	18.52	peak	No Limit
2	*	5260.000	45.03	37.66	82.69	54.00	28.69	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

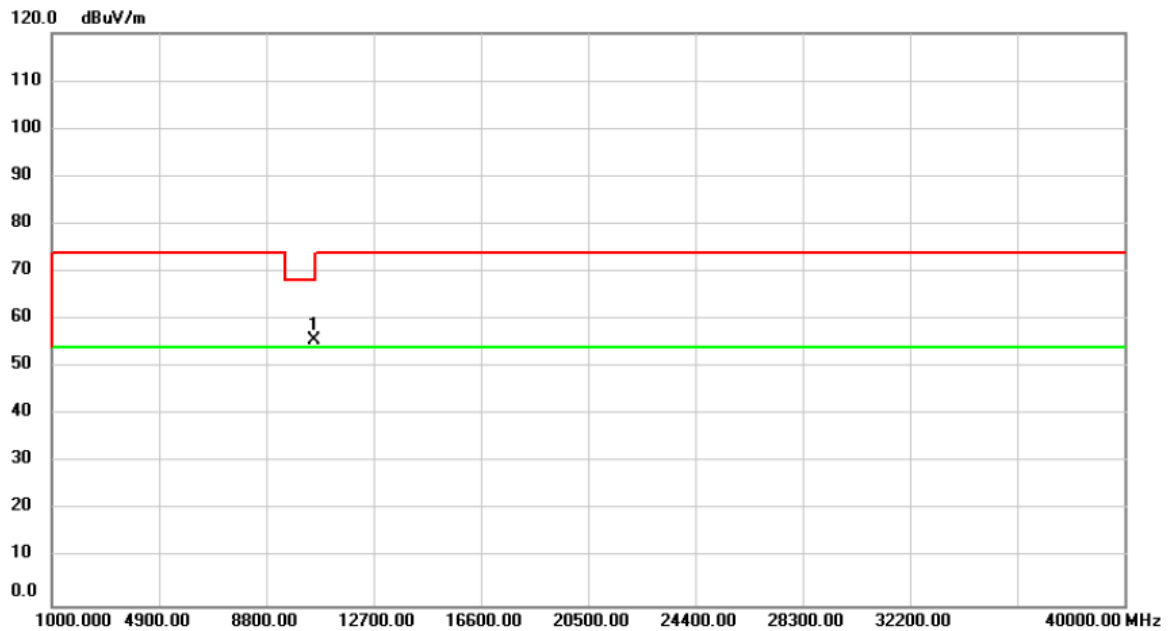

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	53.79	2.00	55.79	68.20	-12.41	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

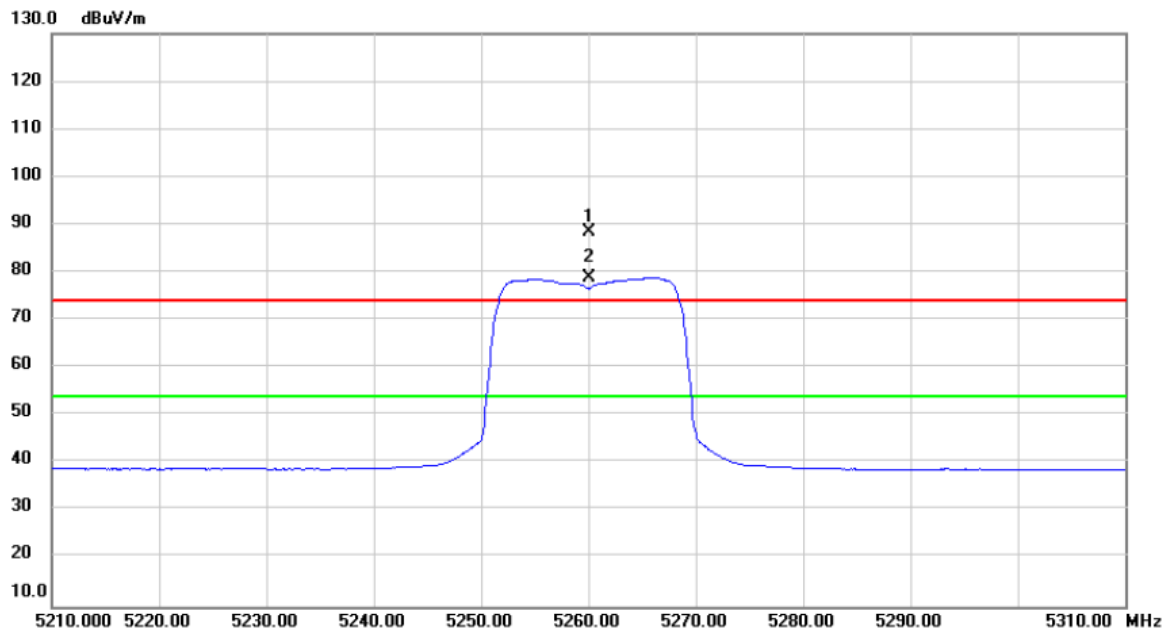

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5260.000	50.70	37.66	88.36	74.00	14.36	peak	No Limit
2	*	5260.000	41.22	37.66	78.88	54.00	24.88	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

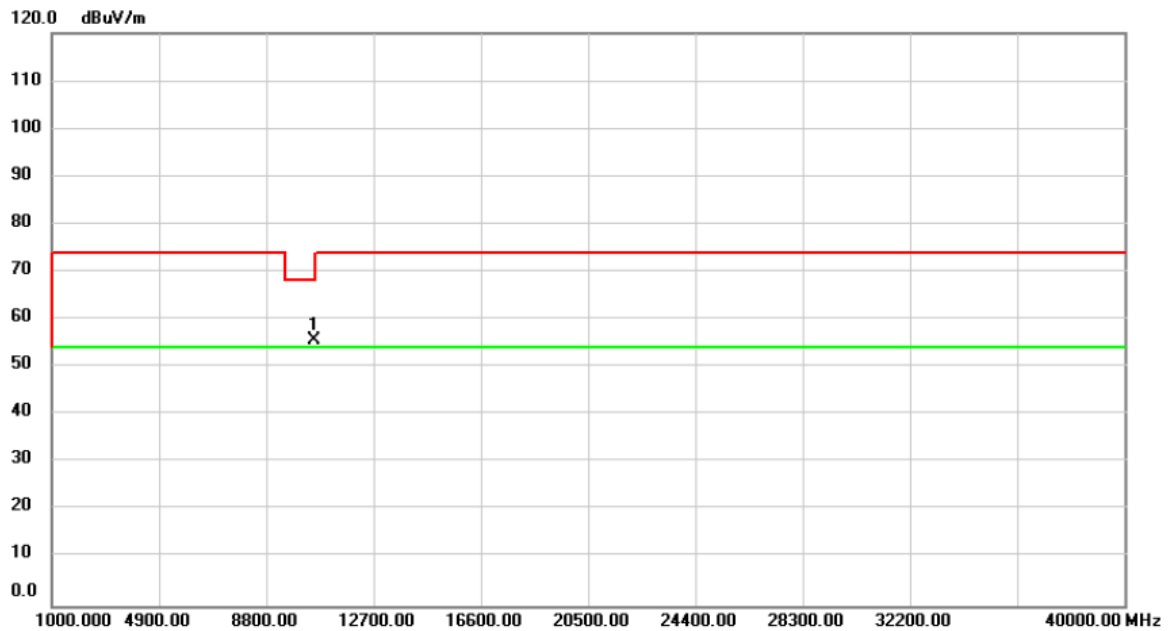

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	53.57	2.00	55.57	68.20	-12.63	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Vertical

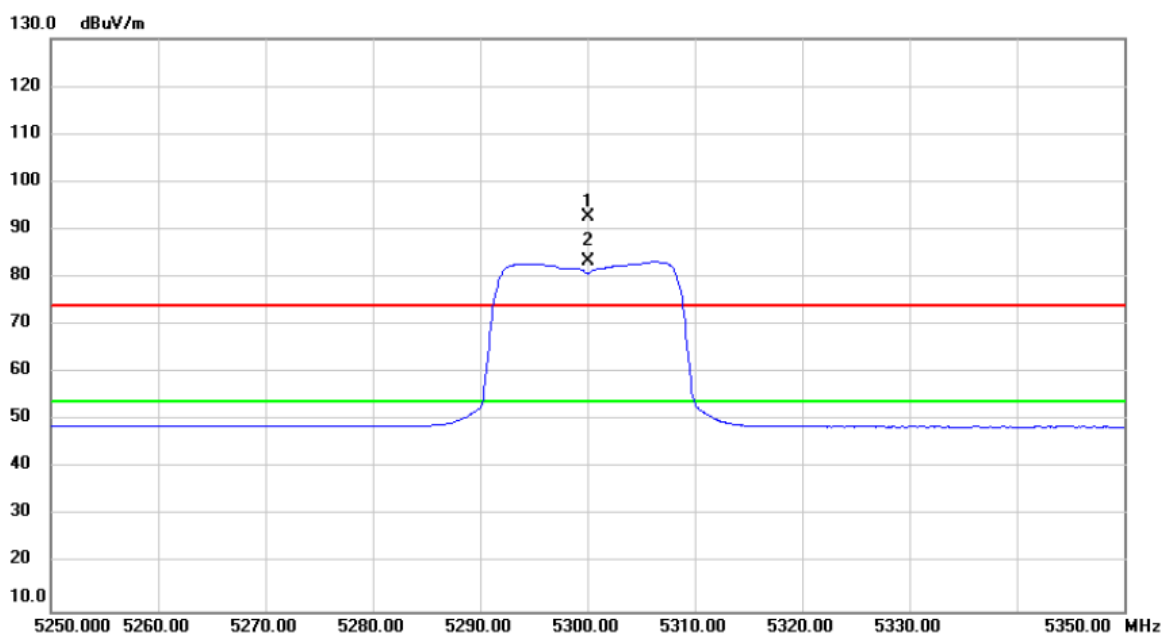

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5300.000	54.83	37.70	92.53	74.00	18.53	peak	
2	*	5300.000	45.75	37.70	83.45	54.00	29.45	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Vertical

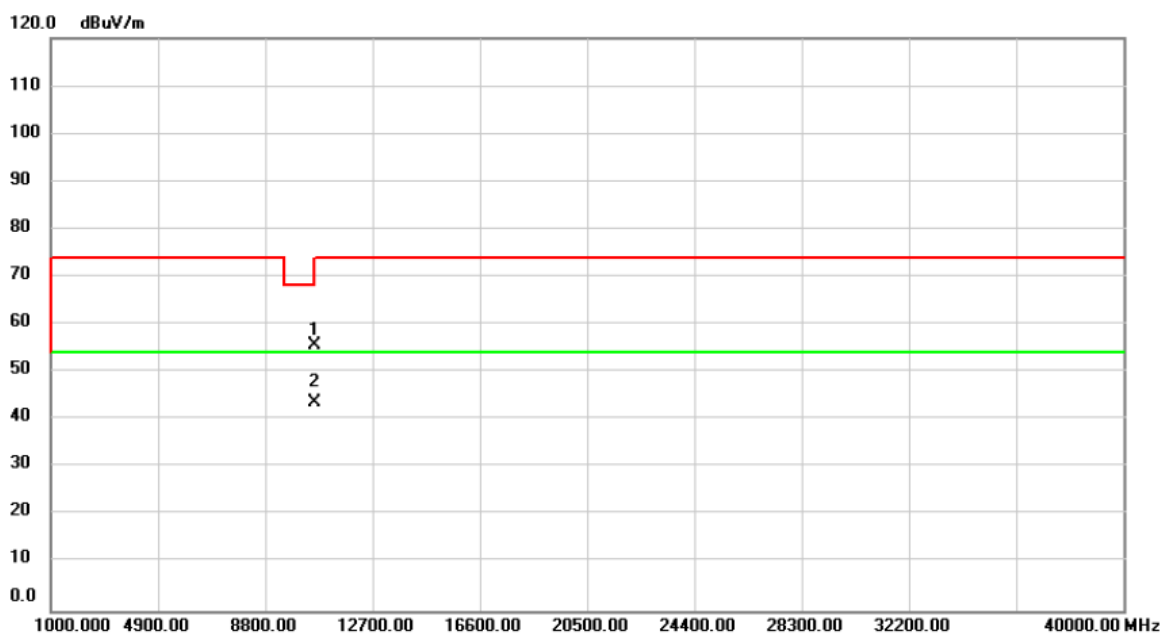

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.10	53.61	2.14	55.75	74.00	-18.25	peak	
2	*	10600.10	41.61	2.14	43.75	54.00	-10.25	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Horizontal

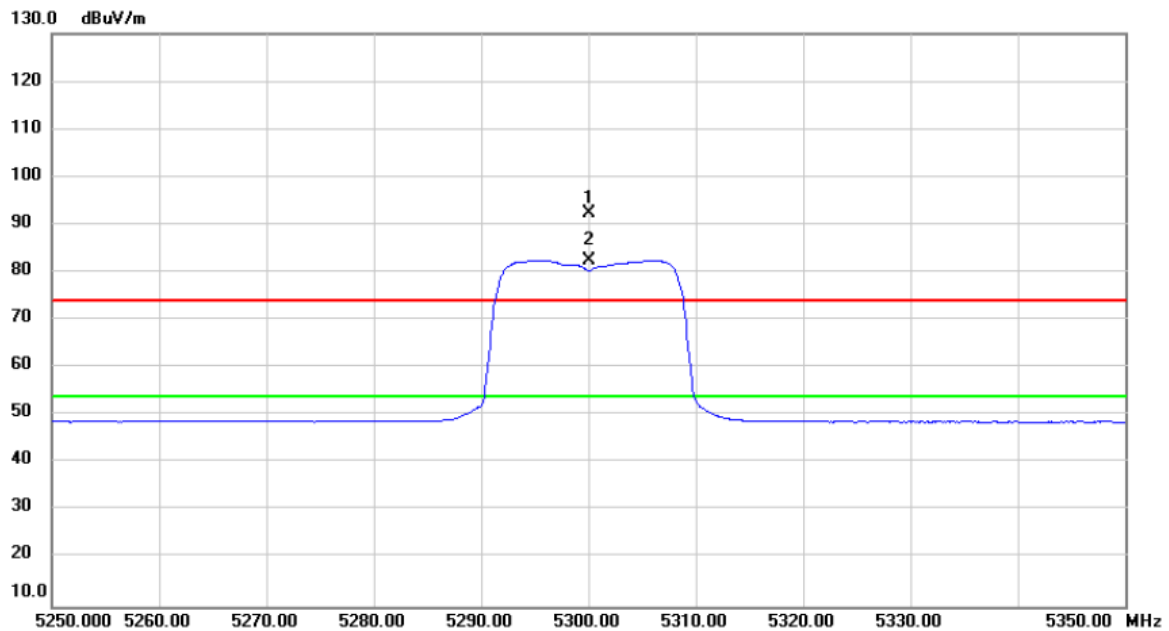

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5300.000	54.71	37.70	92.41	74.00	18.41	peak	
2	*	5300.000	44.87	37.70	82.57	54.00	28.57	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Horizontal

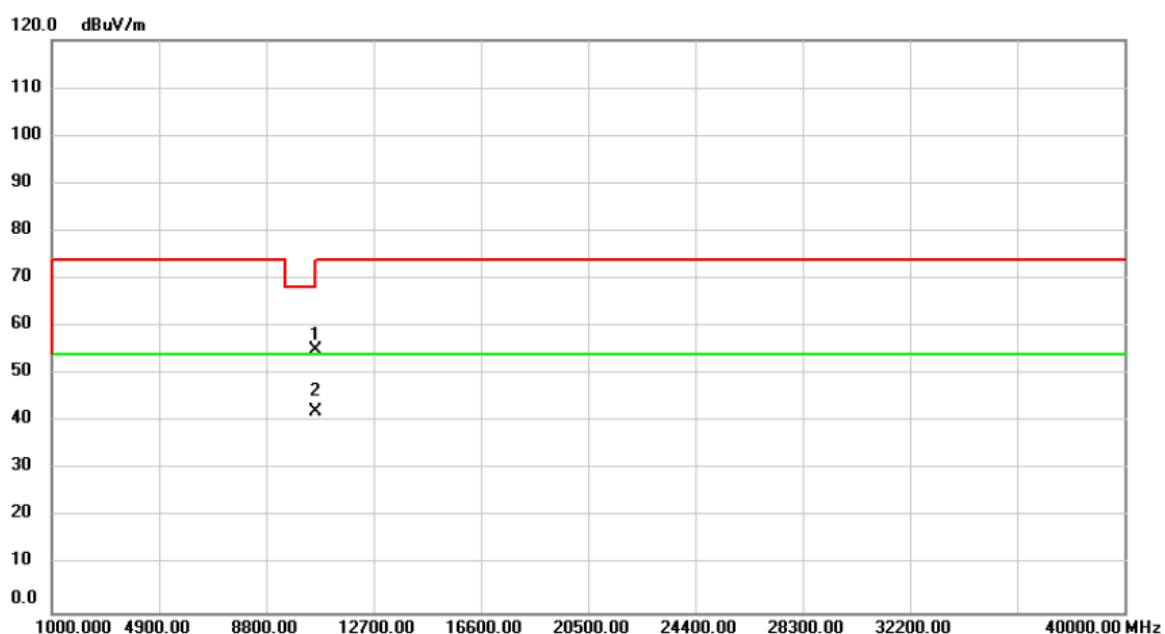

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.10	52.95	2.14	55.09	74.00	-18.91	peak	
2	*	10600.10	40.12	2.14	42.26	54.00	-11.74	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

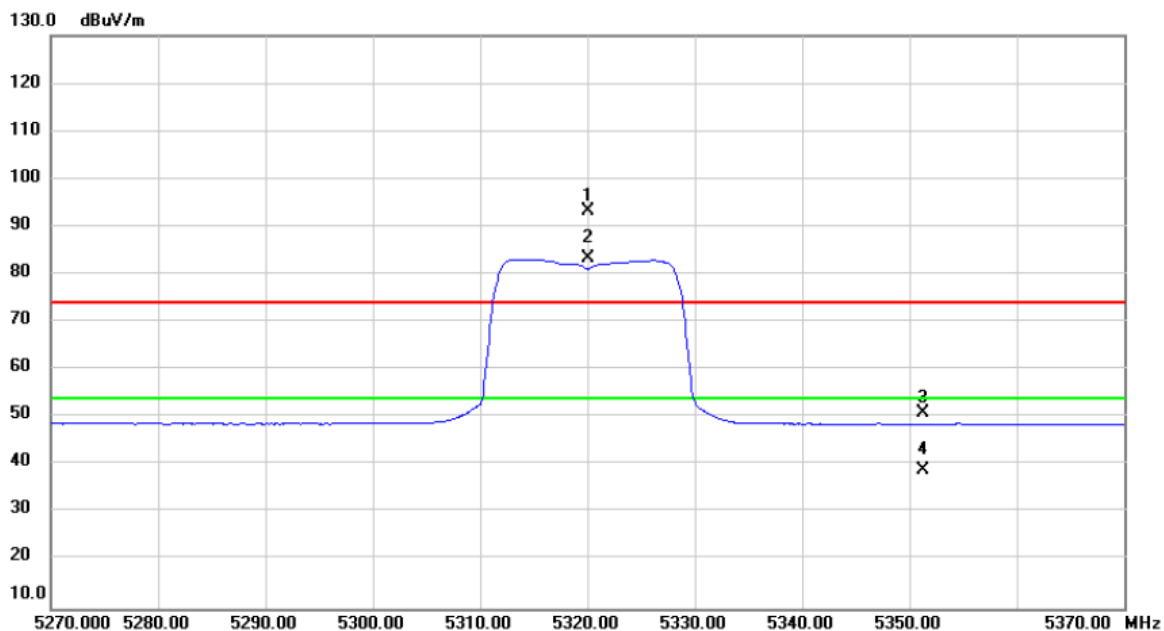

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	55.60	37.72	93.32	74.00	19.32	peak	No Limit
2	*	5320.000	45.56	37.72	83.28	54.00	29.28	AVG	No Limit
3		5351.320	13.32	37.76	51.08	74.00	-22.92	peak	
4		5351.320	1.22	37.76	38.98	54.00	-15.02	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

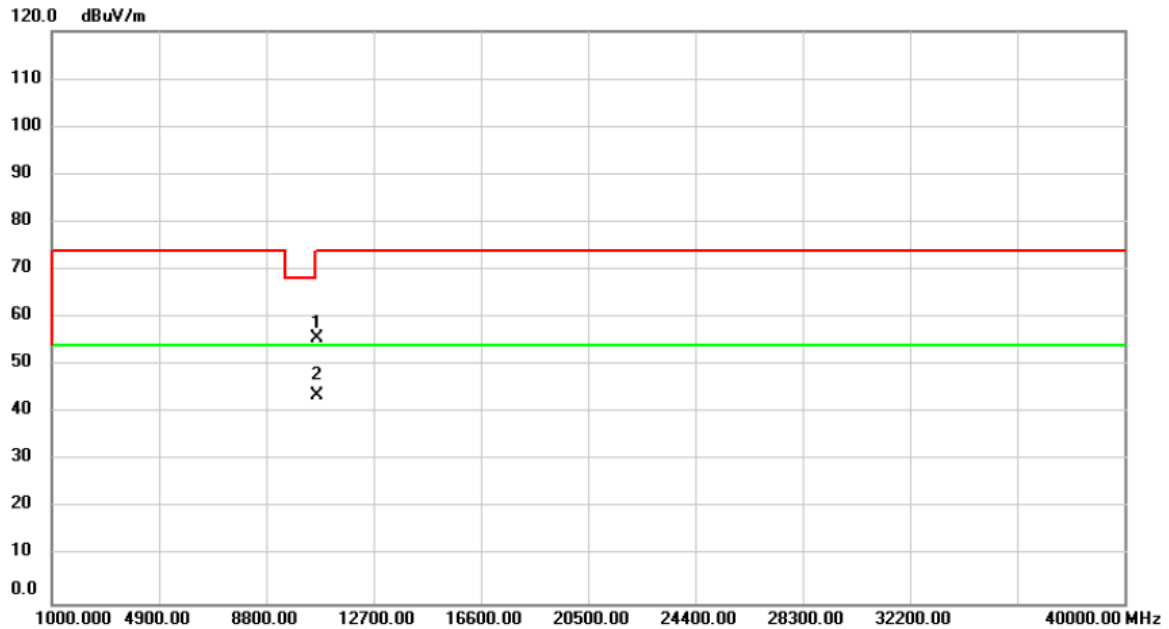

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	53.41	2.22	55.63	74.00	-18.37	peak	
2	*	10640.00	41.48	2.22	43.70	54.00	-10.30	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

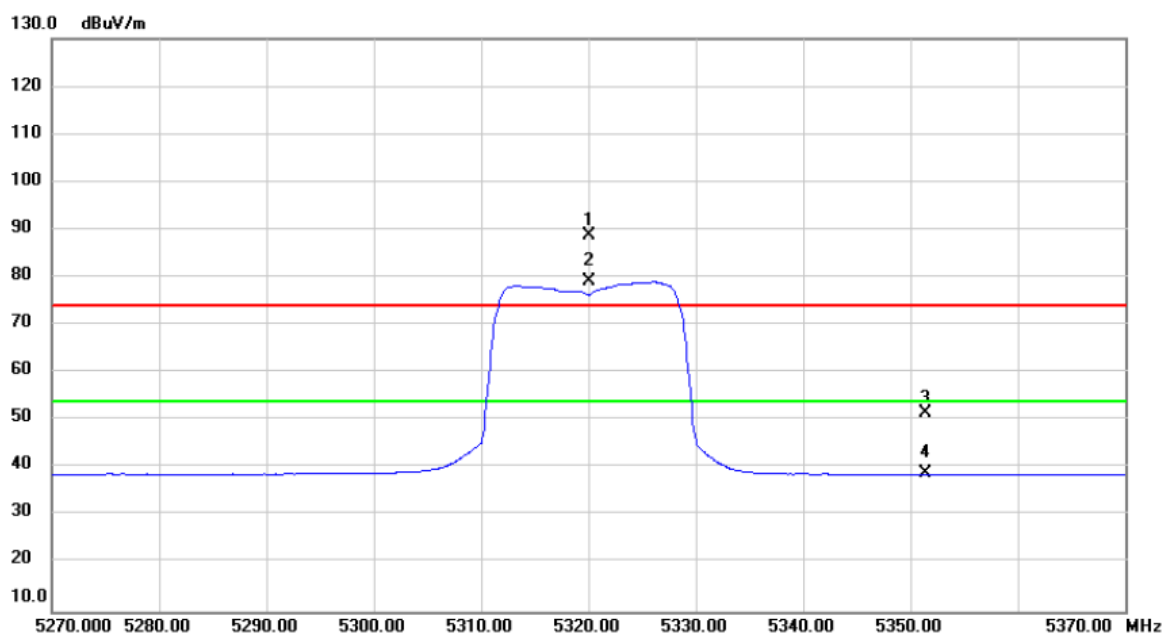

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	50.94	37.72	88.66	74.00	14.66	peak	No Limit
2	*	5320.000	41.36	37.72	79.08	54.00	25.08	AVG	No Limit
3		5351.420	13.74	37.76	51.50	74.00	-22.50	peak	
4		5351.420	1.06	37.76	38.82	54.00	-15.18	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

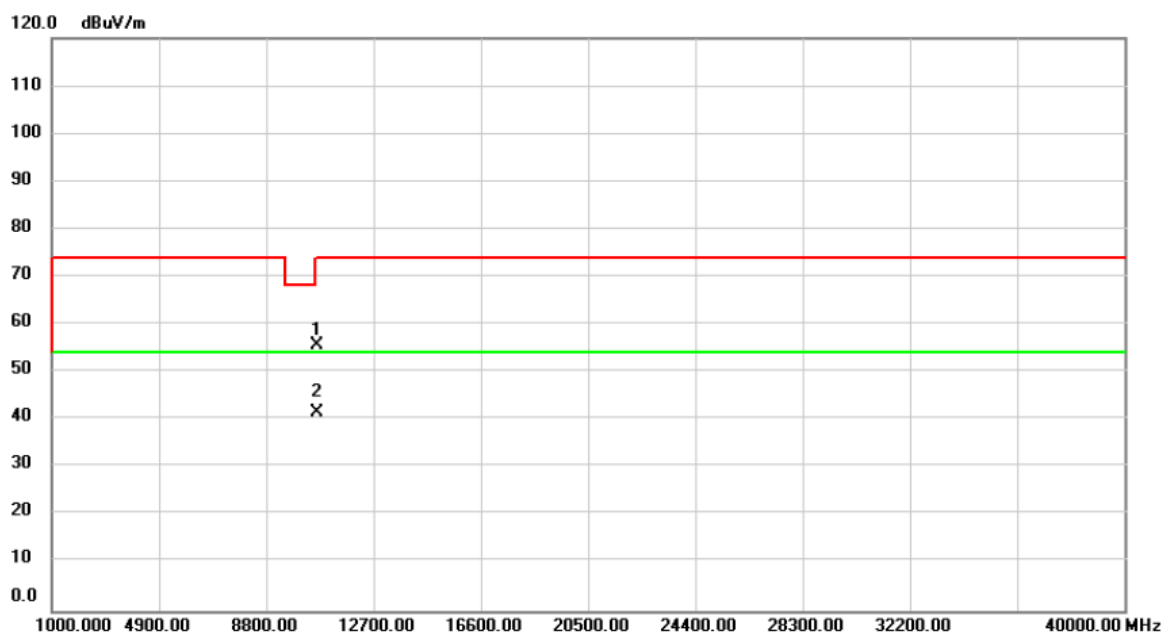

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	53.33	2.22	55.55	74.00	-18.45	peak	
2	*	10640.00	39.38	2.22	41.60	54.00	-12.40	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

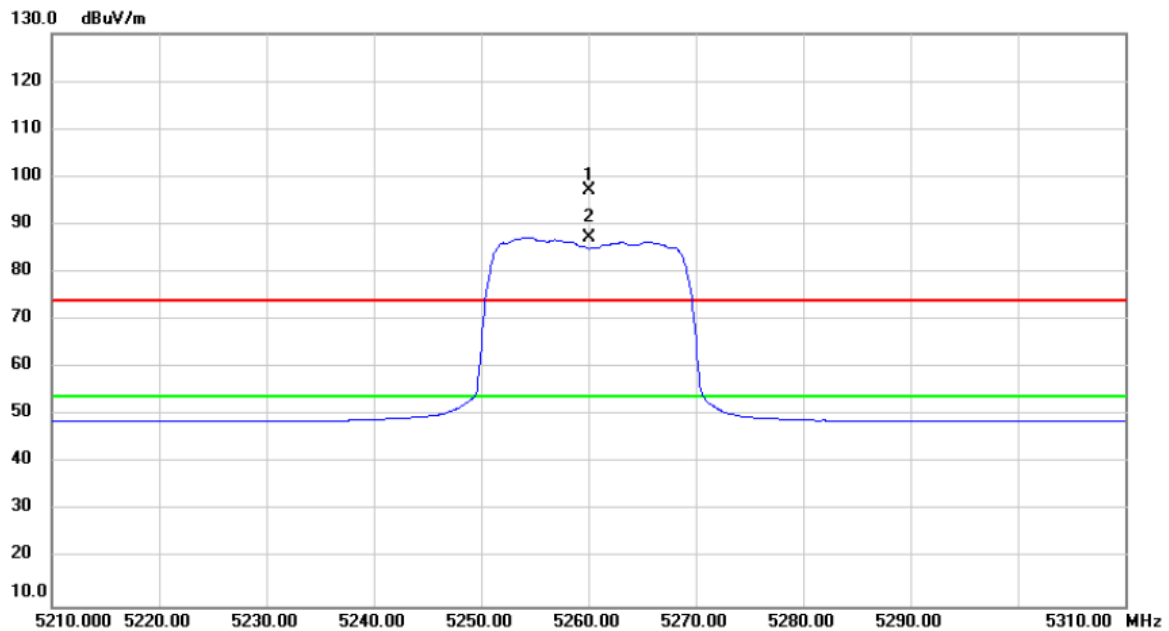

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5260.000	59.49	37.66	97.15	74.00	23.15	peak	No Limit
2	*	5260.000	49.68	37.66	87.34	54.00	33.34	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

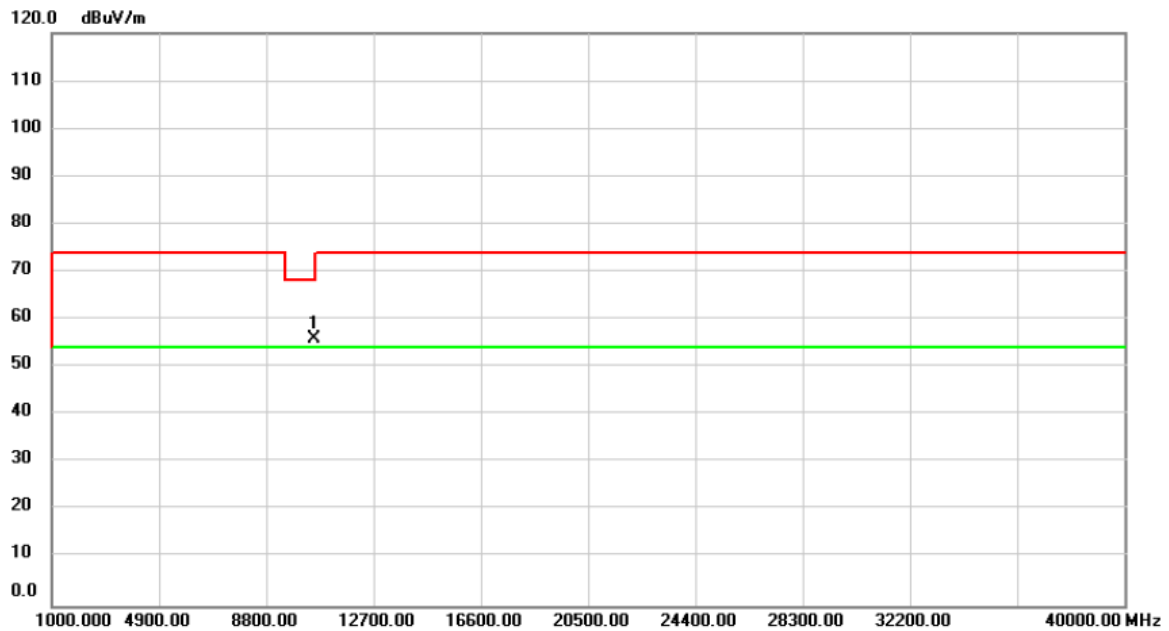

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	54.02	2.00	56.02	68.20	-12.18	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

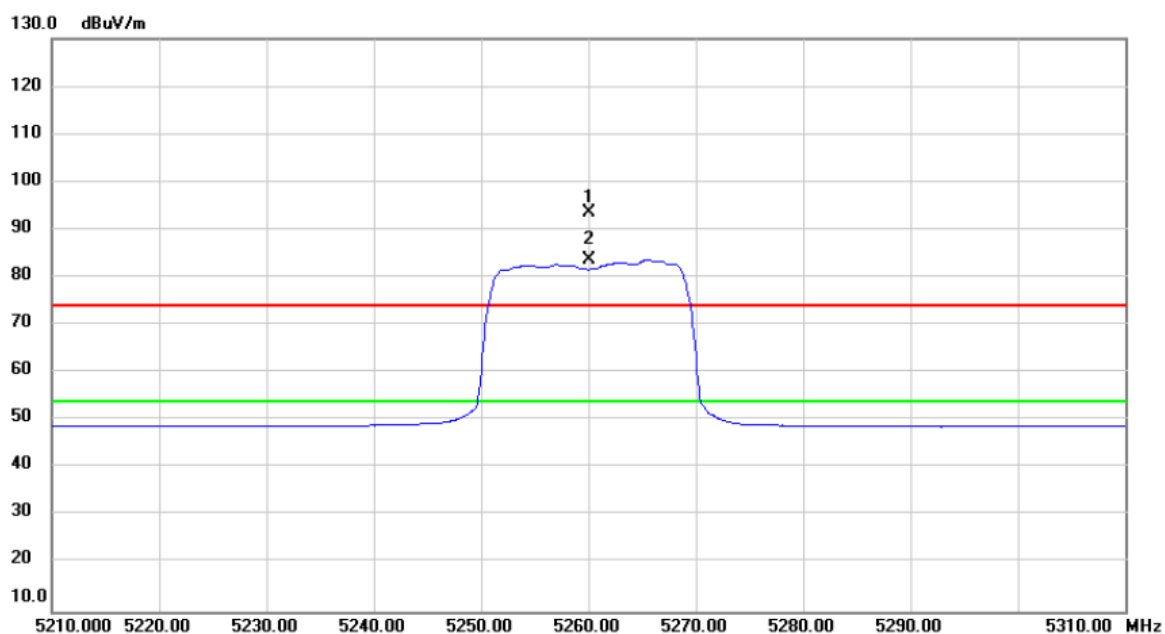

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5260.000	55.82	37.66	93.48	74.00	19.48	peak	No Limit
2	*	5260.000	46.00	37.66	83.66	54.00	29.66	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

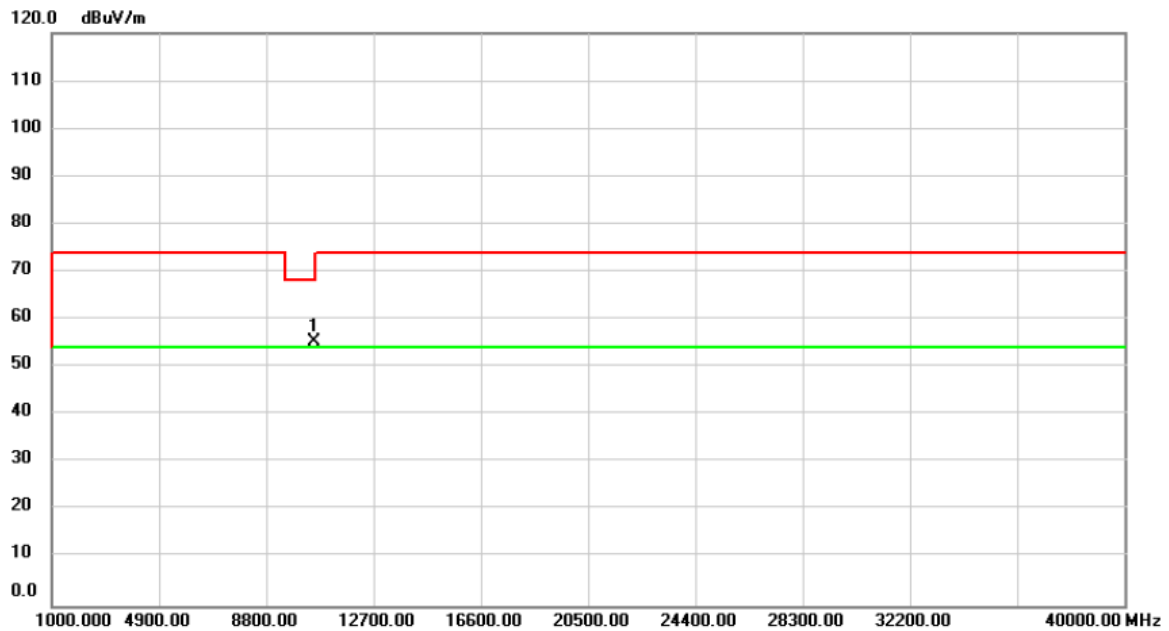

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	53.42	2.00	55.42	68.20	-12.78	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Vertical

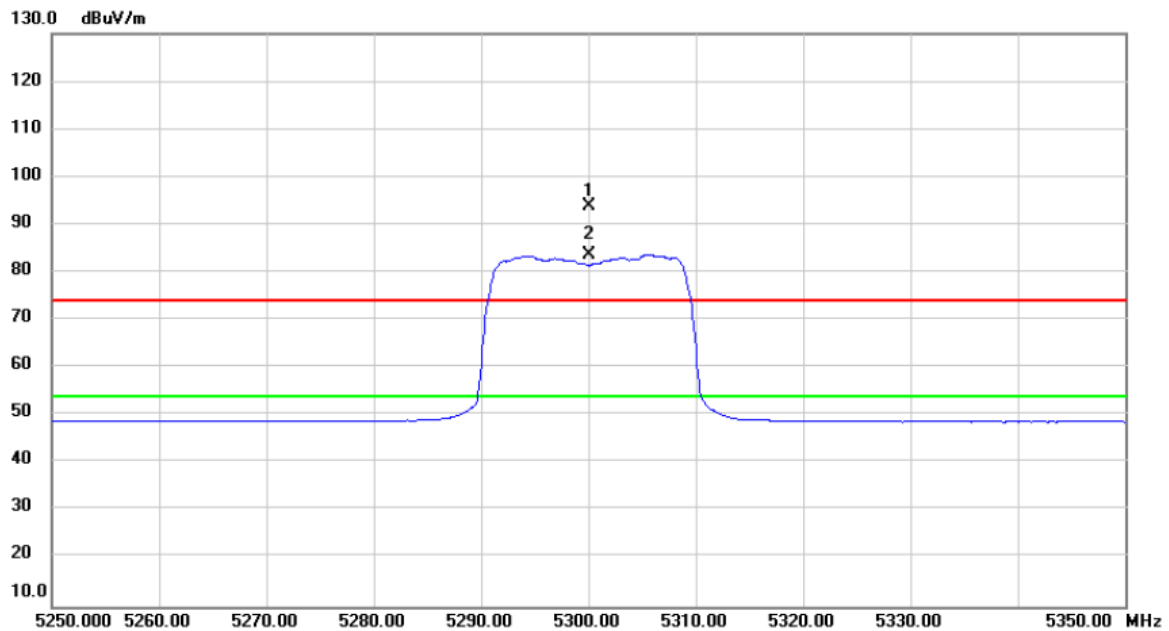

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5300.000	56.06	37.70	93.76	74.00	19.76	peak	No Limit
2	*	5300.000	46.02	37.70	83.72	54.00	29.72	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Vertical

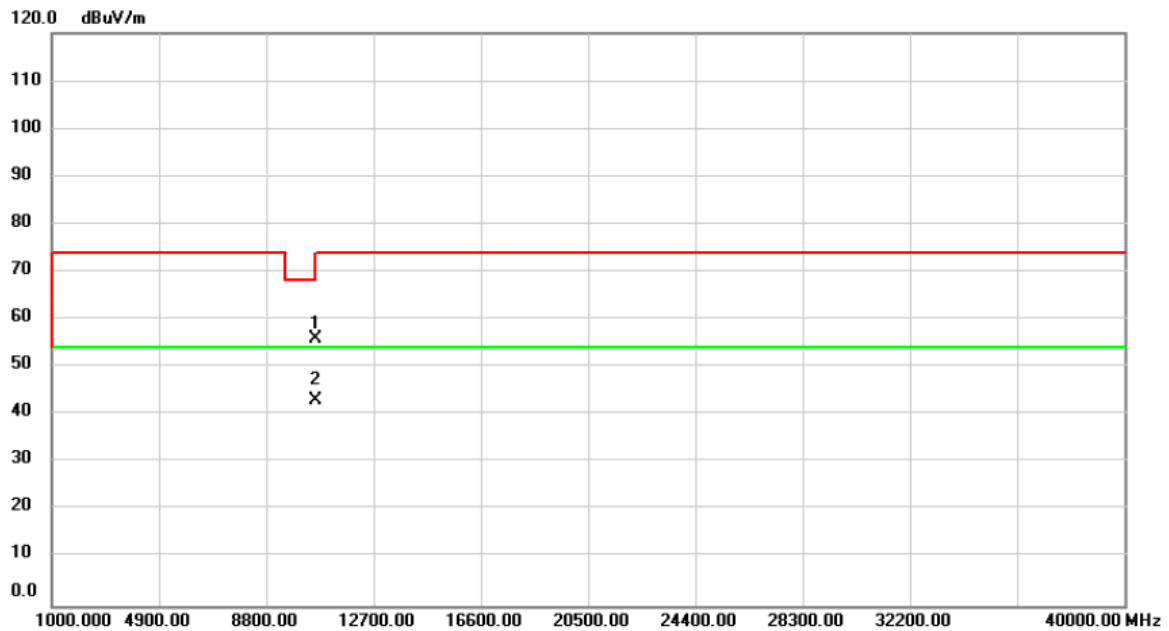

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.10	53.67	2.14	55.81	74.00	-18.19	peak	
2	*	10600.10	41.03	2.14	43.17	54.00	-10.83	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Horizontal

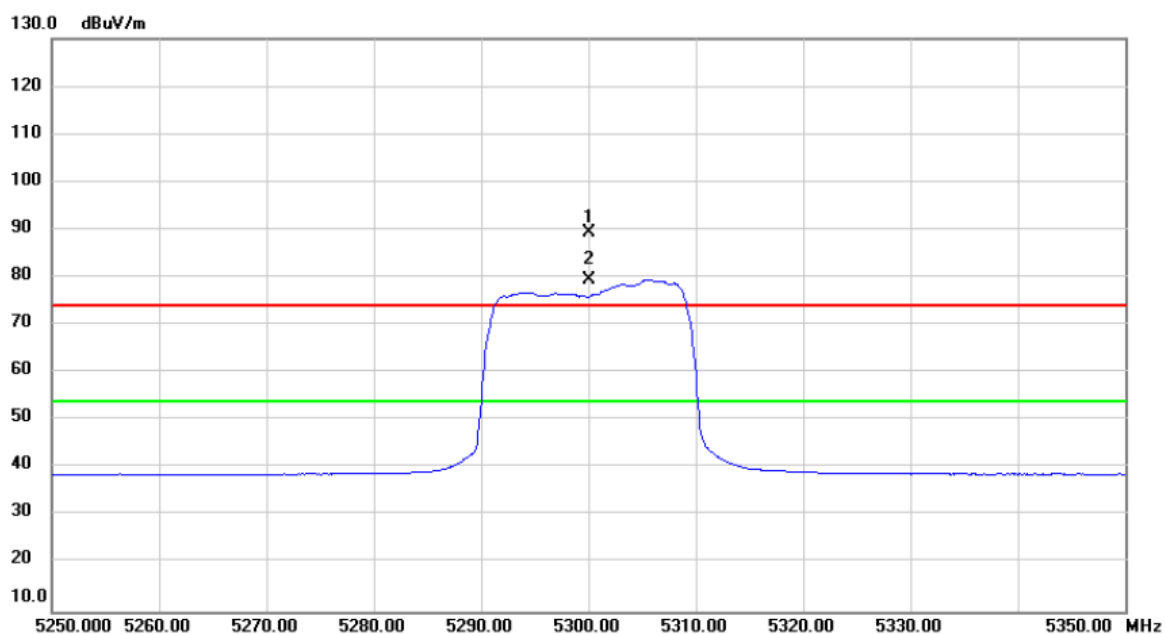

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5300.000	51.55	37.70	89.25	74.00	15.25	peak	No Limit
2	*	5300.000	41.74	37.70	79.44	54.00	25.44	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Horizontal

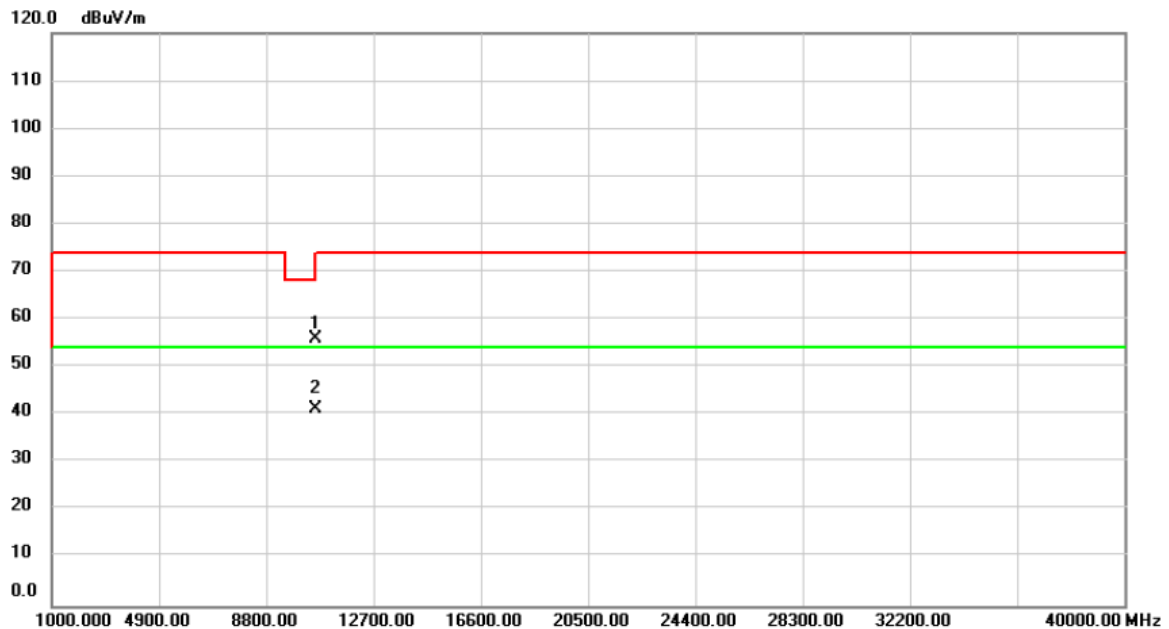

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.10	53.88	2.14	56.02	74.00	-17.98	peak	
2	*	10600.10	39.19	2.14	41.33	54.00	-12.67	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

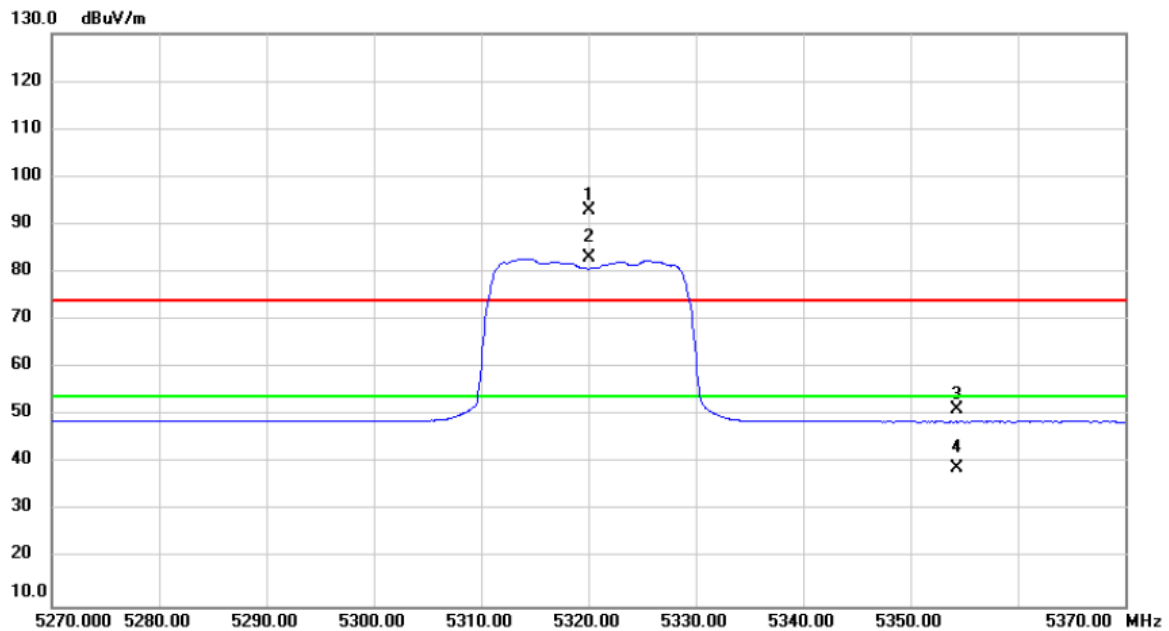

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	55.10	37.72	92.82	74.00	18.82	peak	No Limit
2	*	5320.000	45.23	37.72	82.95	54.00	28.95	AVG	No Limit
3		5354.380	13.48	37.76	51.24	74.00	-22.76	peak	
4		5354.380	1.24	37.76	39.00	54.00	-15.00	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

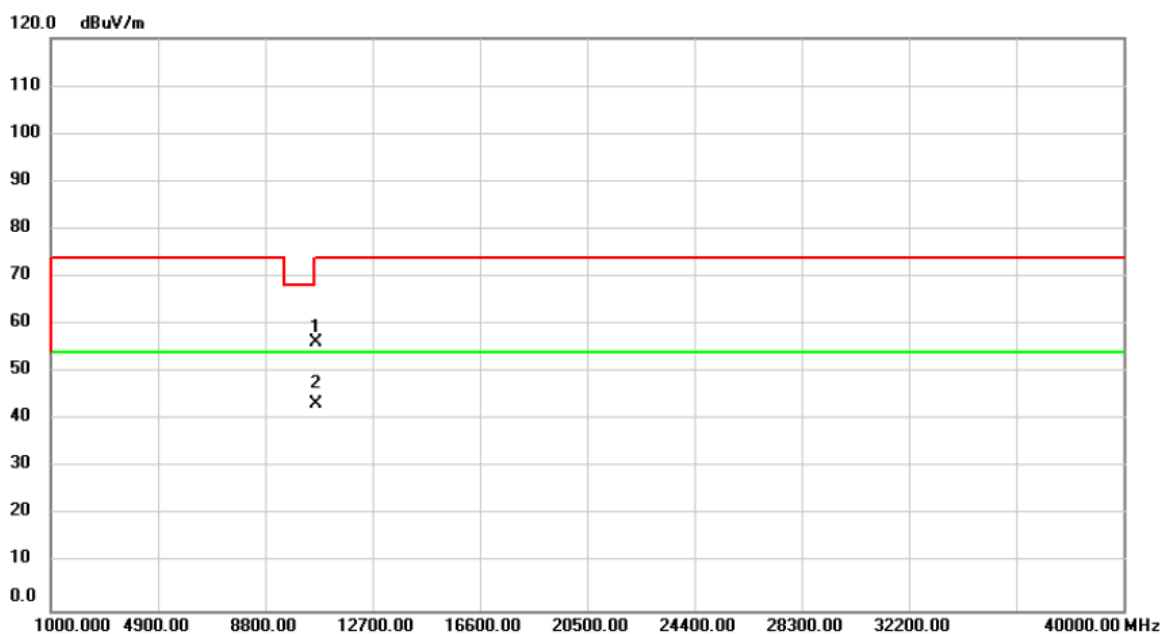

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	54.06	2.22	56.28	74.00	-17.72	peak	
2	*	10640.00	41.01	2.22	43.23	54.00	-10.77	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

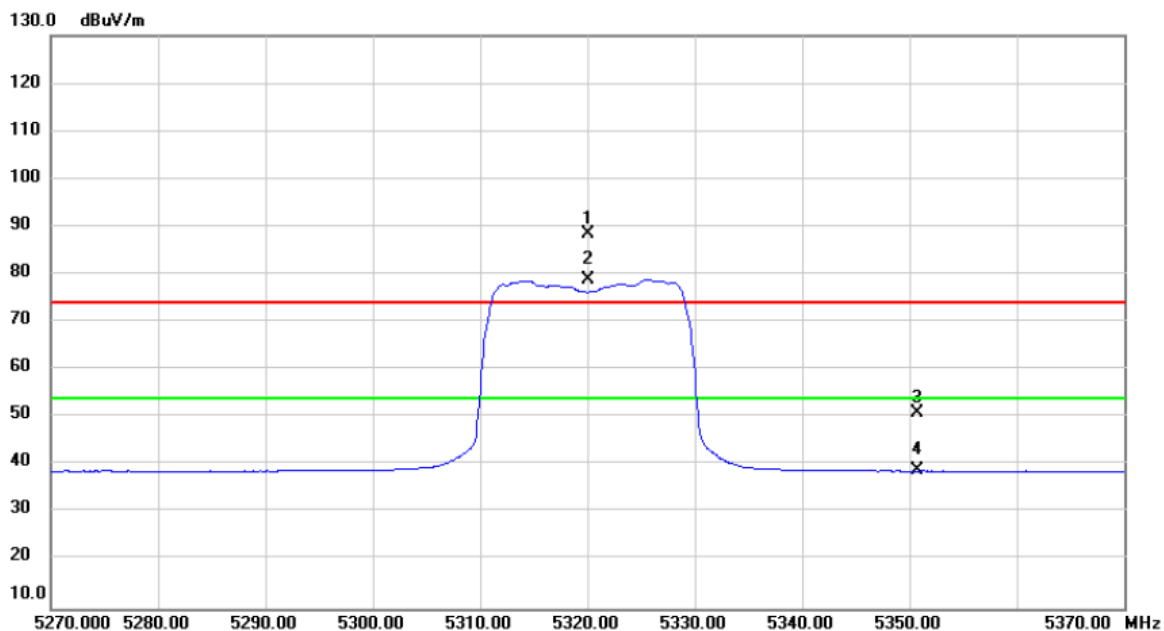

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	50.82	37.72	88.54	74.00	14.54	peak	No Limit
2	*	5320.000	41.10	37.72	78.82	54.00	24.82	AVG	No Limit
3		5350.780	13.18	37.76	50.94	74.00	-23.06	peak	
4		5350.780	1.10	37.76	38.86	54.00	-15.14	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

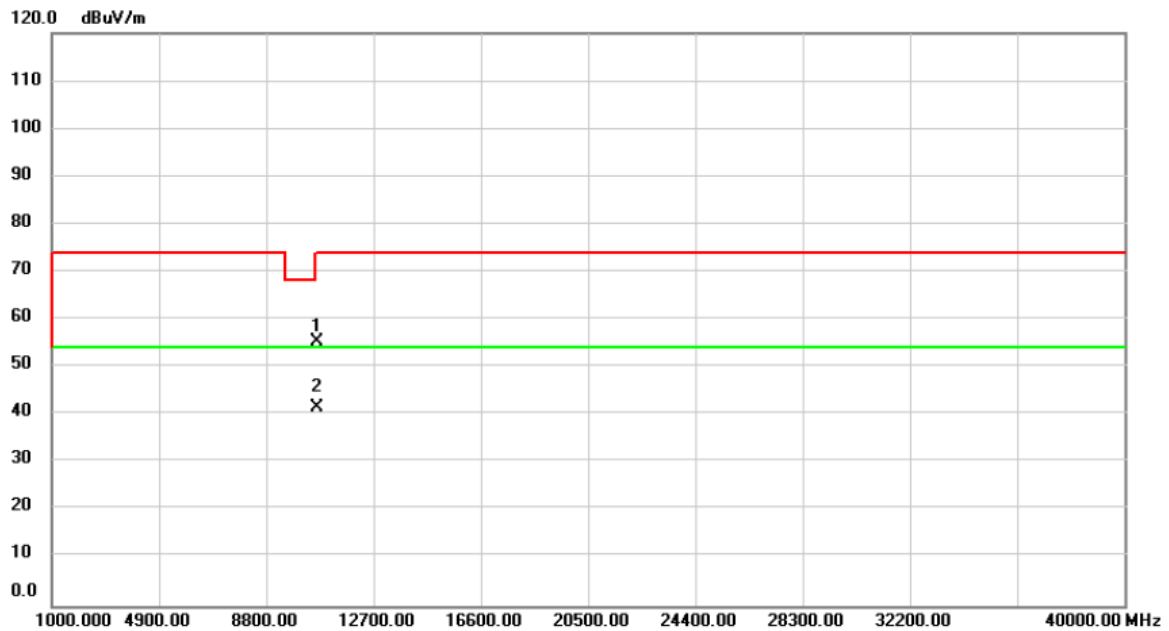

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	53.28	2.22	55.50	74.00	-18.50	peak	
2	*	10640.00	39.30	2.22	41.52	54.00	-12.48	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

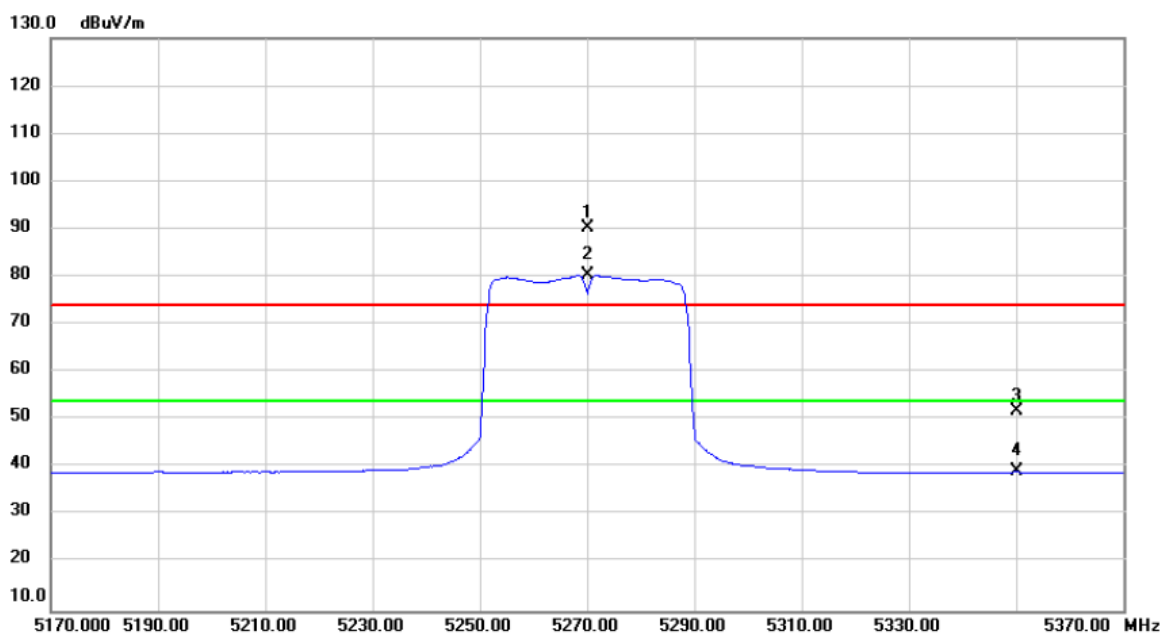

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5270.000	52.72	37.67	90.39	74.00	16.39	peak	No Limit
2	*	5270.000	42.73	37.67	80.40	54.00	26.40	AVG	No Limit
3		5350.000	14.16	37.76	51.92	74.00	-22.08	peak	
4		5350.000	1.54	37.76	39.30	54.00	-14.70	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

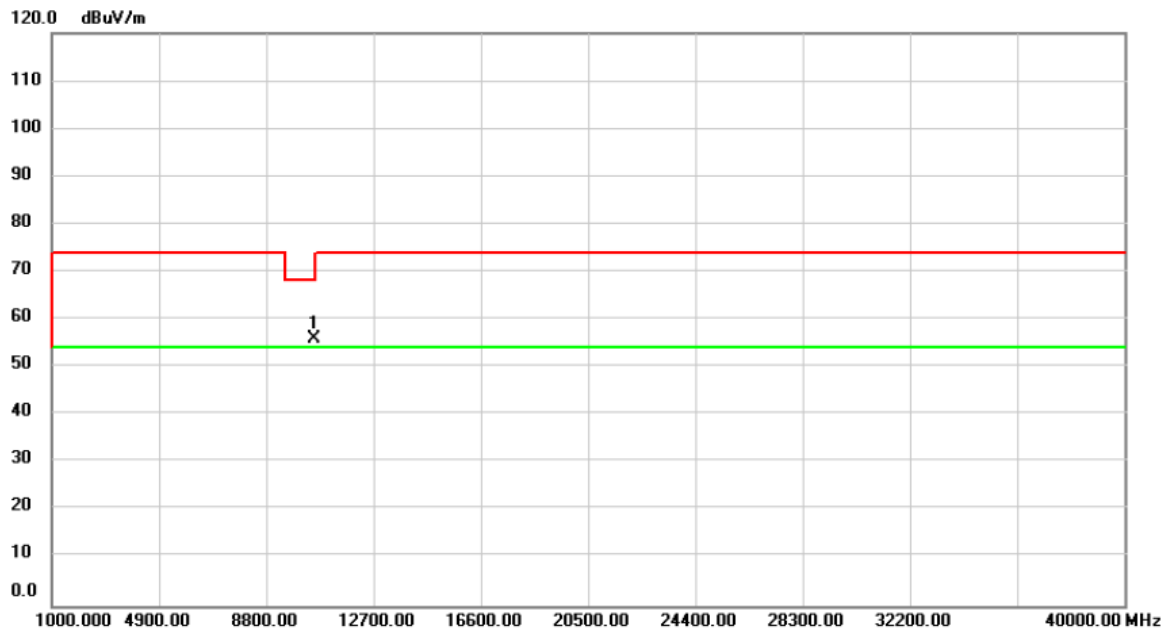

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	53.99	2.04	56.03	68.20	-12.17	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Horizontal

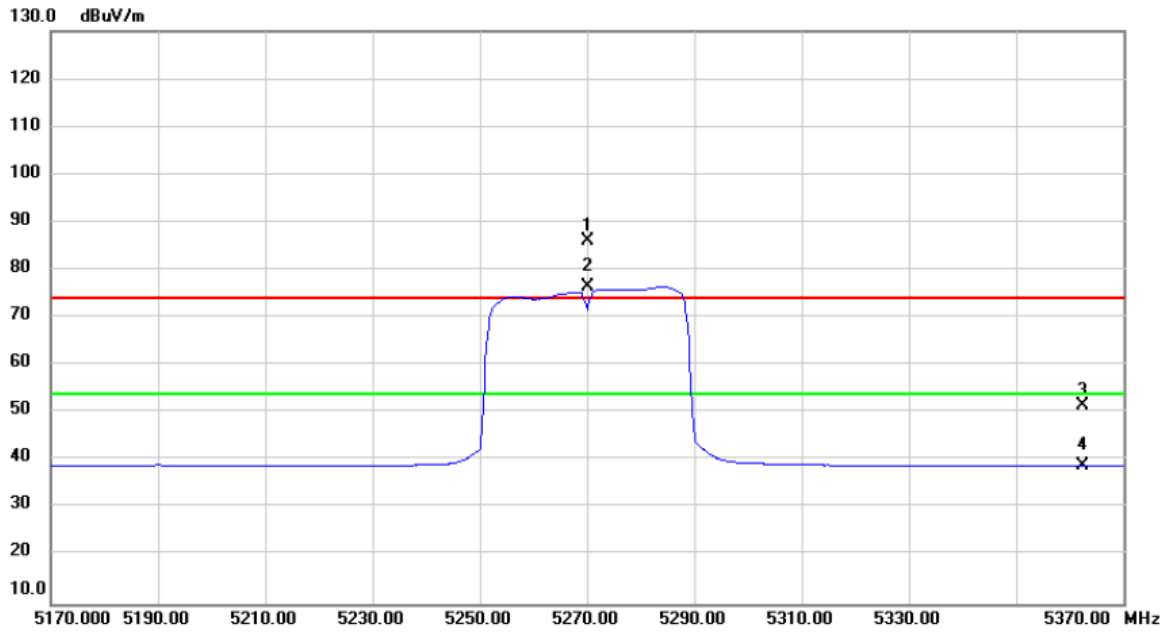

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5270.000	48.43	37.67	86.10	74.00	12.10	peak	No Limit
2	*	5270.000	38.79	37.67	76.46	54.00	22.46	AVG	No Limit
3		5362.360	13.88	37.77	51.65	74.00	-22.35	peak	
4		5362.360	1.23	37.77	39.00	54.00	-15.00	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Horizontal

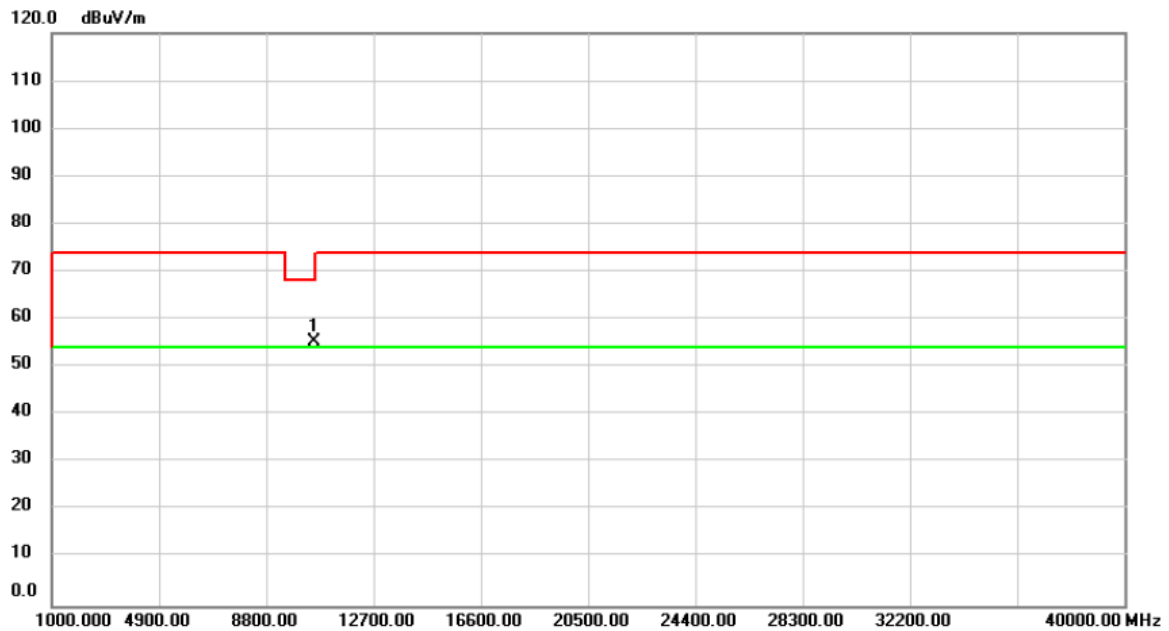

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	53.40	2.04	55.44	68.20	-12.76	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

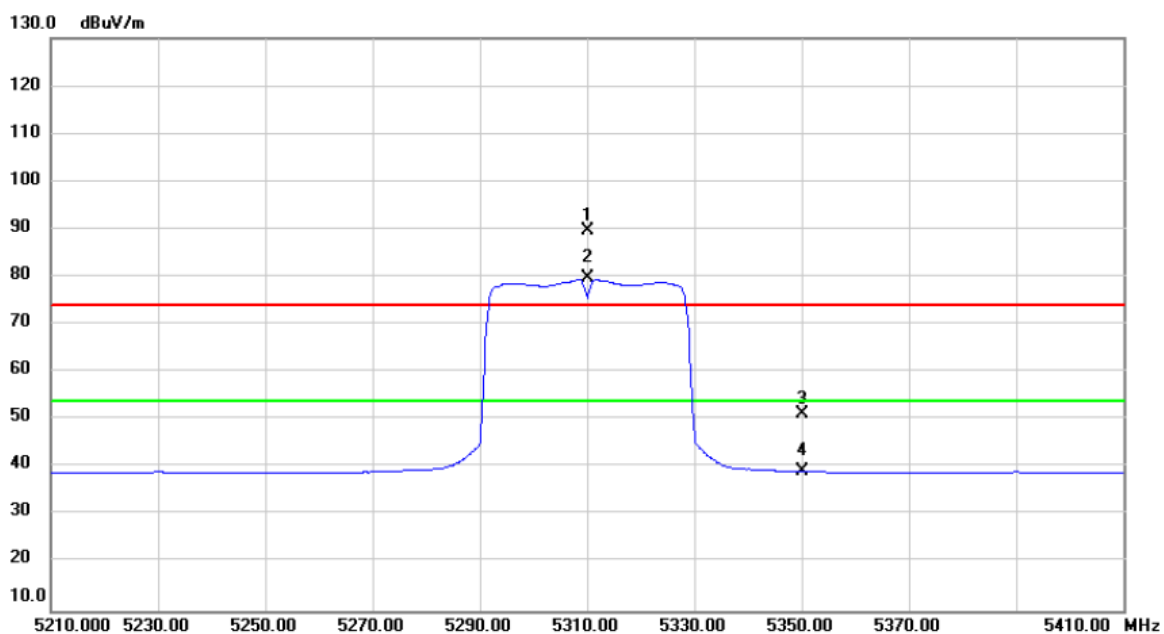

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5310.000	51.85	37.72	89.57	74.00	15.57	peak	No Limit
2	*	5310.000	41.91	37.72	79.63	54.00	25.63	AVG	No Limit
3		5350.180	13.49	37.76	51.25	74.00	-22.75	peak	
4		5350.180	1.55	37.76	39.31	54.00	-14.69	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

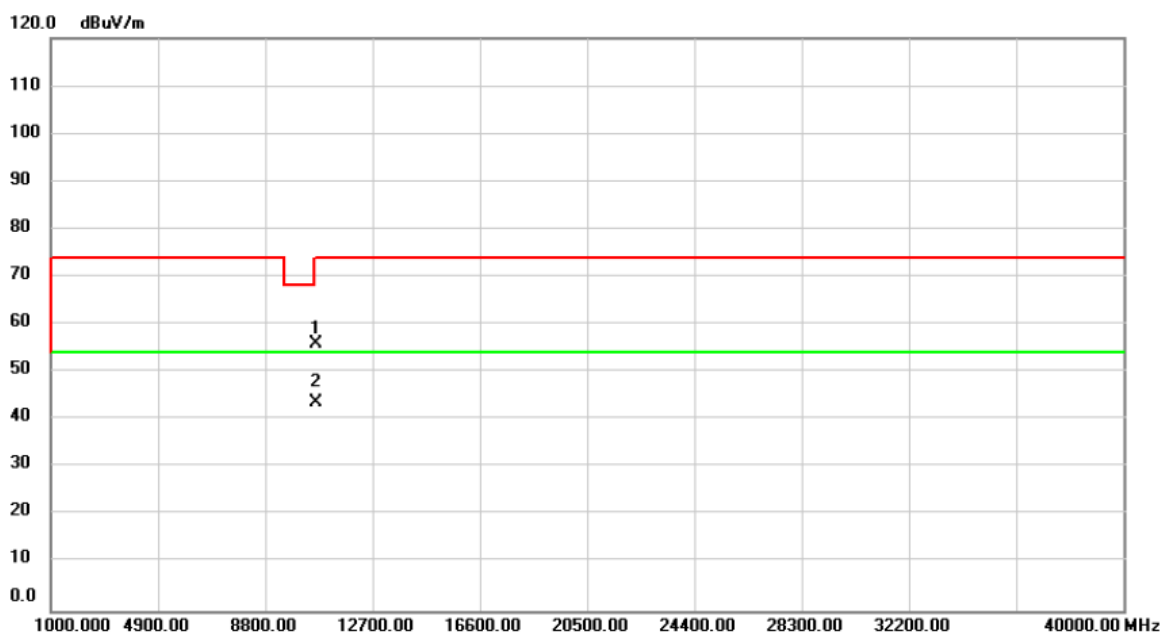

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	53.74	2.18	55.92	74.00	-18.08	peak	
2	*	10620.00	41.44	2.18	43.62	54.00	-10.38	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

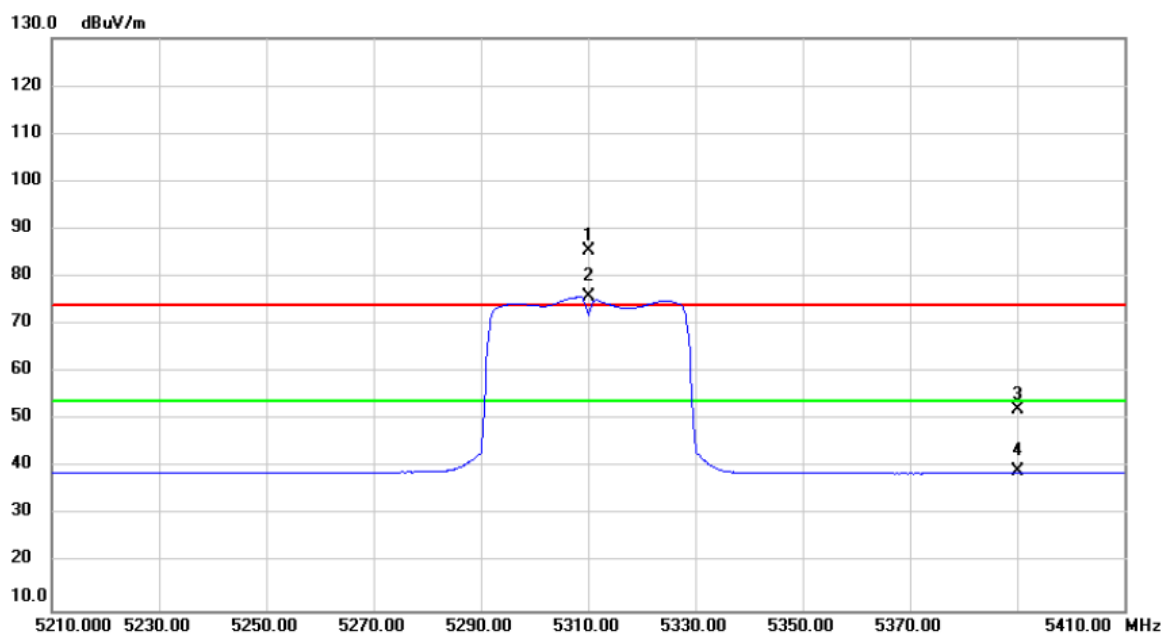

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5310.000	47.76	37.72	85.48	74.00	11.48	peak	No Limit
2	*	5310.000	38.15	37.72	75.87	54.00	21.87	AVG	No Limit
3		5390.020	14.29	37.80	52.09	74.00	-21.91	peak	
4		5390.020	1.32	37.80	39.12	54.00	-14.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

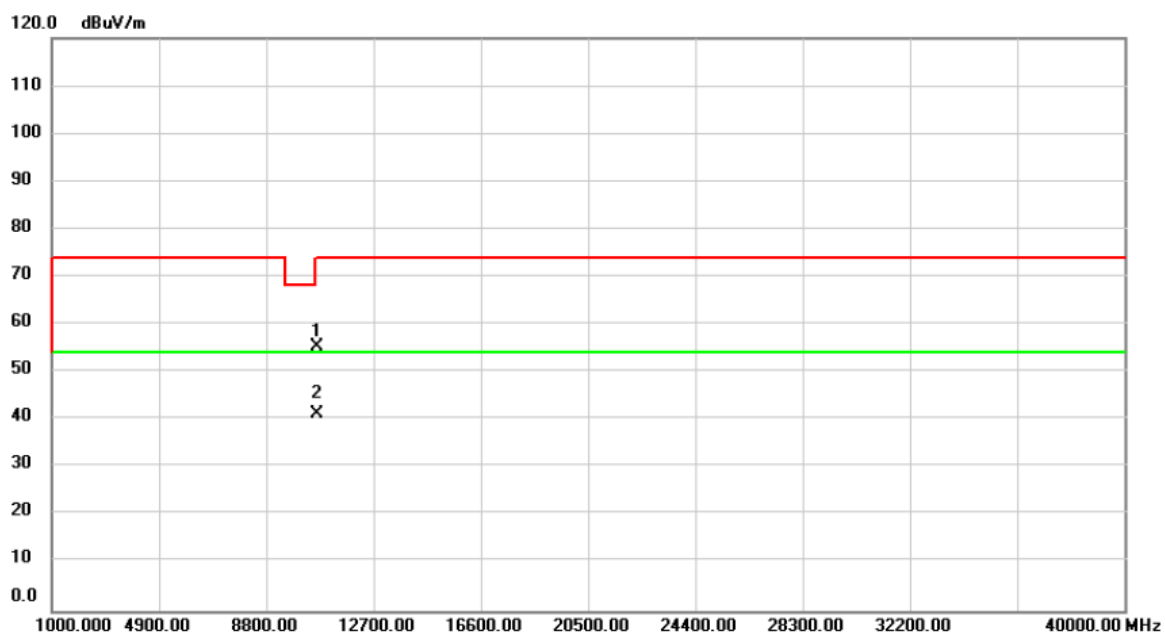

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	53.21	2.18	55.39	74.00	-18.61	peak	
2	*	10620.00	39.11	2.18	41.29	54.00	-12.71	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Vertical

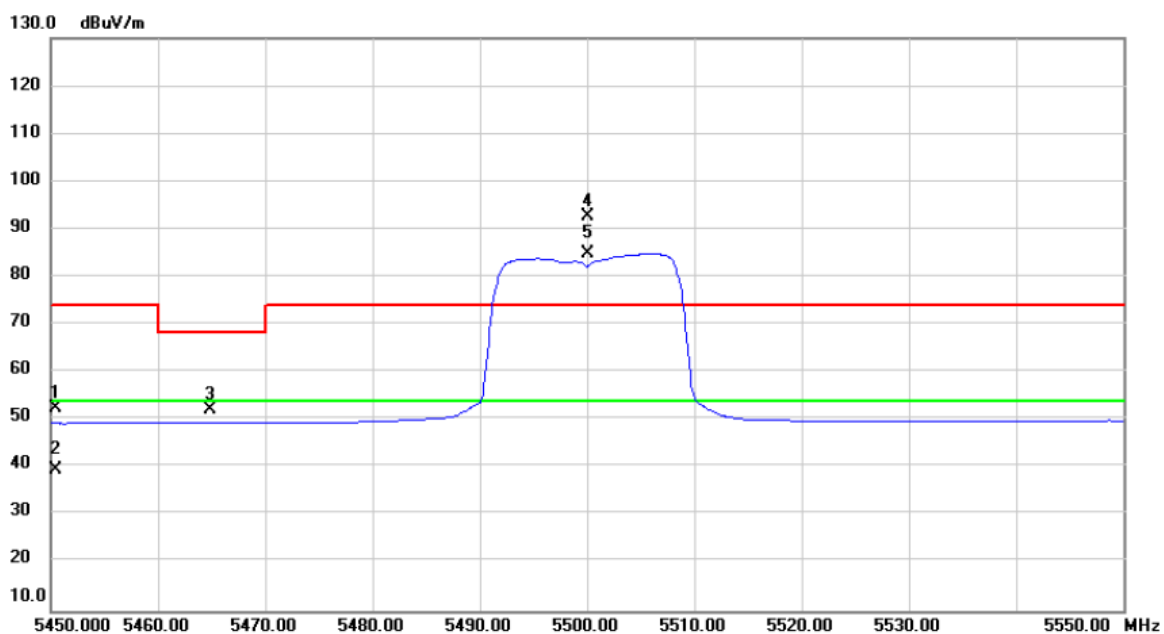

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5450.440	14.53	37.87	52.40	74.00	-21.60	peak	
2		5450.440	1.67	37.87	39.54	54.00	-14.46	AVG	
3		5464.870	14.28	37.88	52.16	68.20	-16.04	peak	
4	X	5500.000	54.84	37.92	92.76	74.00	18.76	peak	No Limit
5	*	5500.000	47.08	37.92	85.00	54.00	31.00	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Vertical

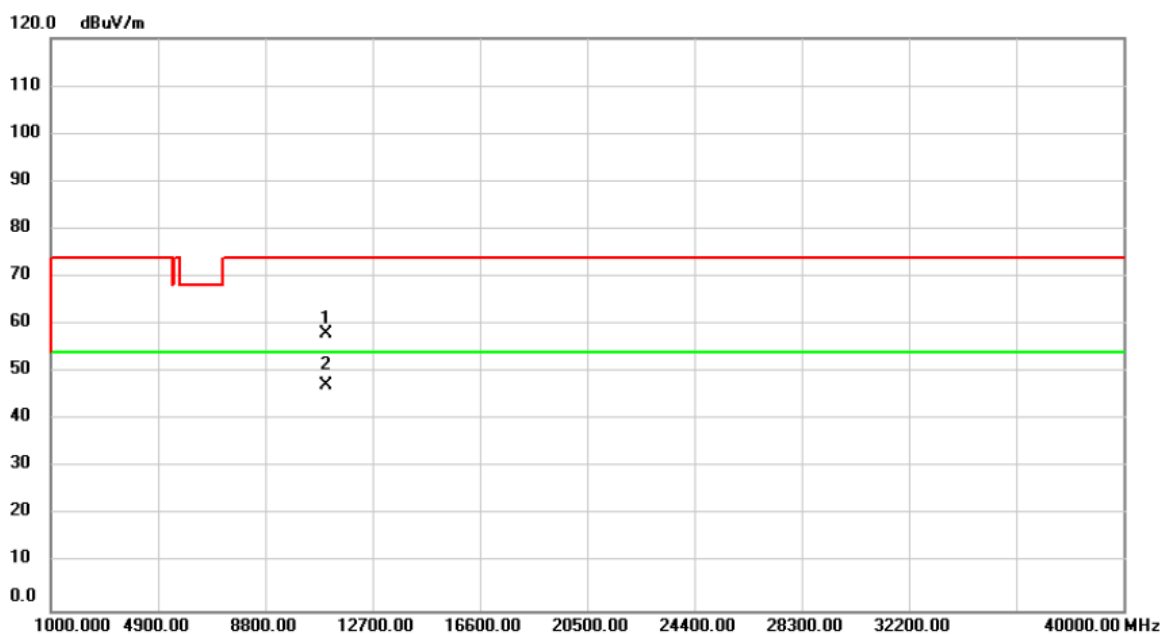

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	55.26	2.85	58.11	74.00	-15.89	peak	
2	*	11000.00	44.33	2.85	47.18	54.00	-6.82	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Horizontal

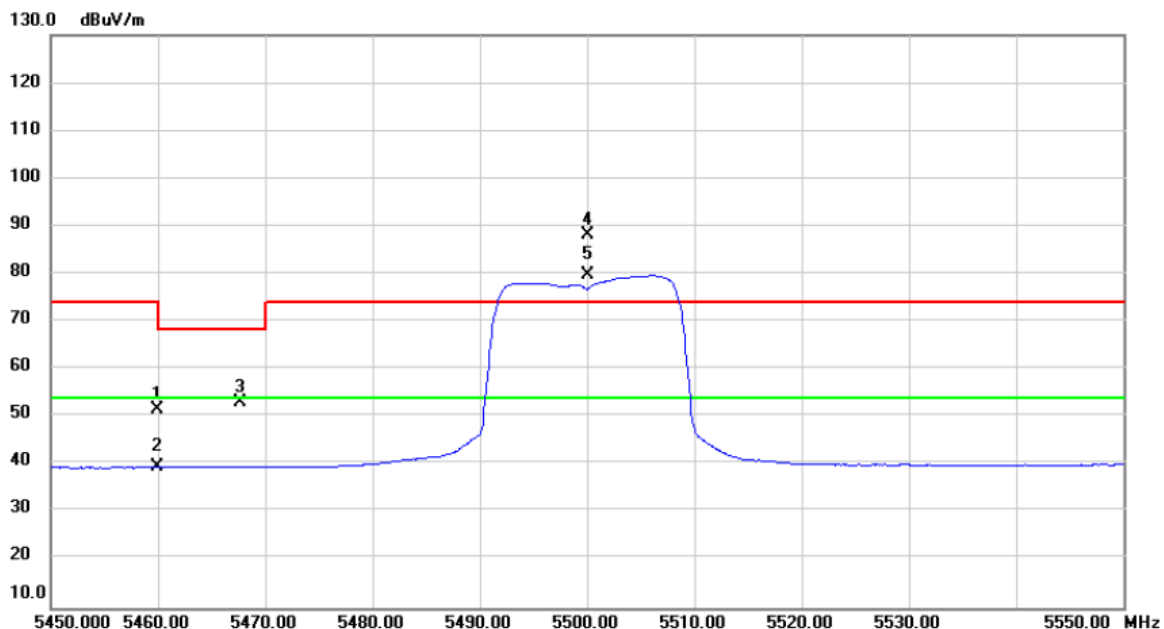

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5459.950	13.81	37.88	51.69	74.00	-22.31	peak	
2		5459.950	1.60	37.88	39.48	54.00	-14.52	AVG	
3		5467.710	15.27	37.88	53.15	68.20	-15.05	peak	
4	X	5500.000	50.11	37.92	88.03	74.00	14.03	peak	No Limit
5	*	5500.000	41.77	37.92	79.69	54.00	25.69	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Horizontal

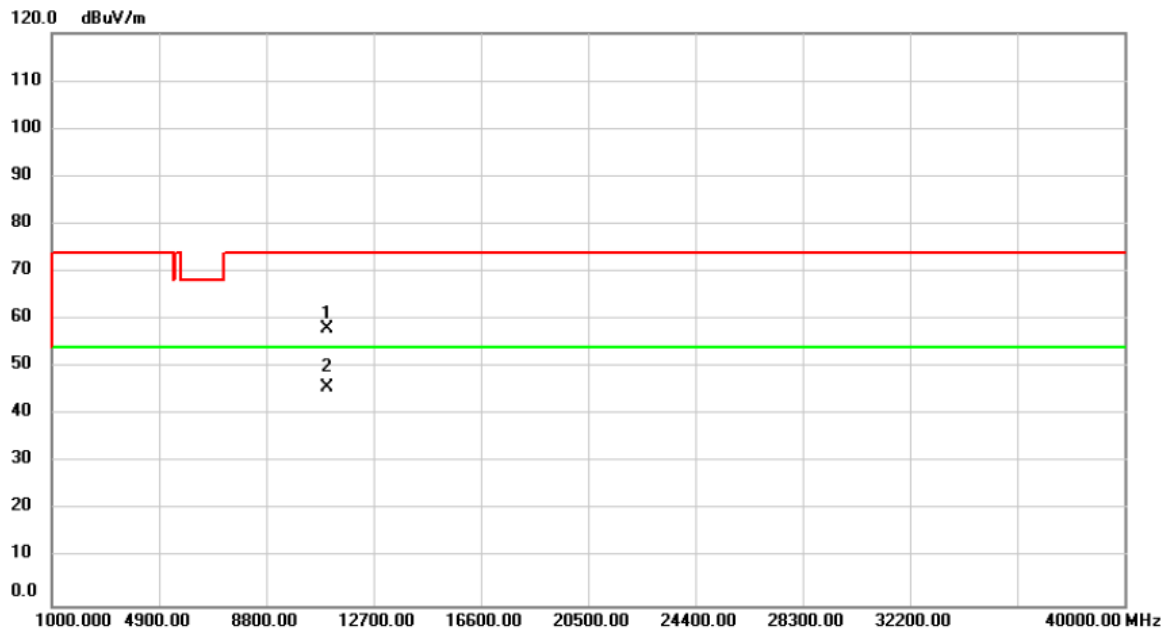

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	55.13	2.85	57.98	74.00	-16.02	peak	
2	*	11000.00	42.82	2.85	45.67	54.00	-8.33	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz


Vertical

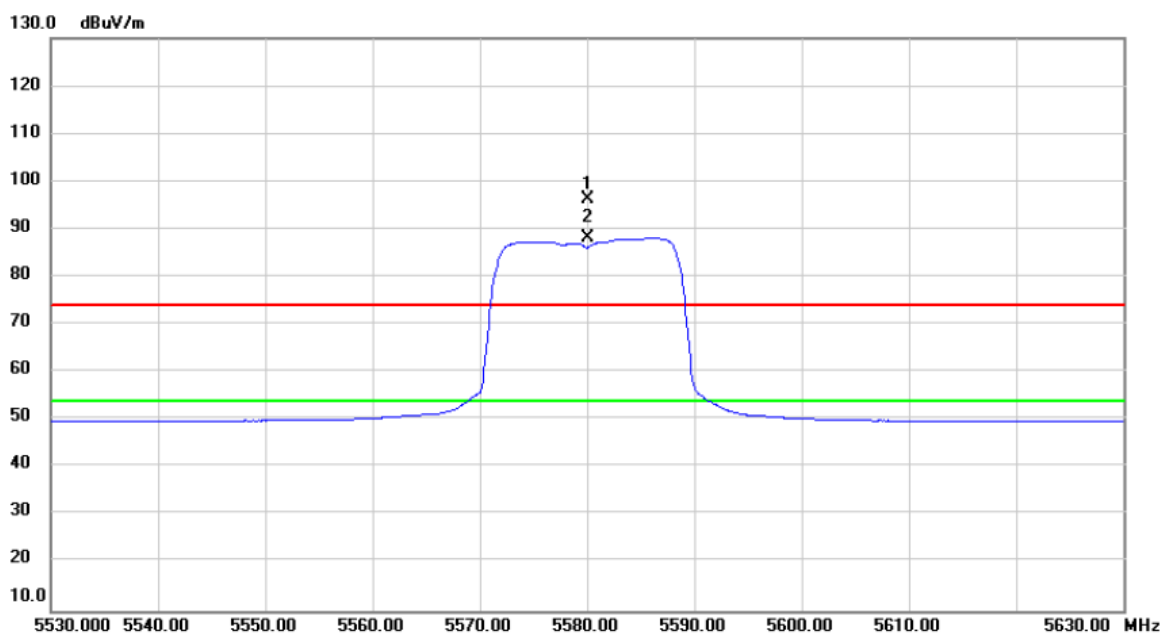

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5580.000	58.07	38.14	96.21	74.00	22.21	peak	No Limit
2	*	5580.000	50.05	38.14	88.19	54.00	34.19	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz


Vertical

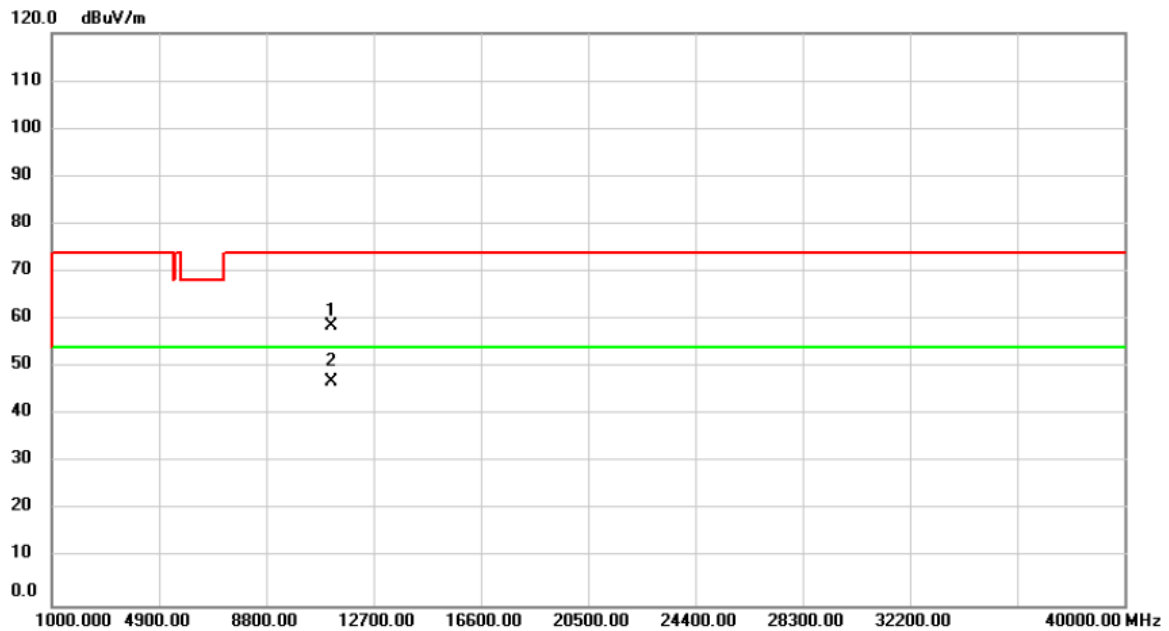

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	55.63	3.04	58.67	74.00	-15.33	peak	
2	*	11160.00	43.83	3.04	46.87	54.00	-7.13	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz


Horizontal

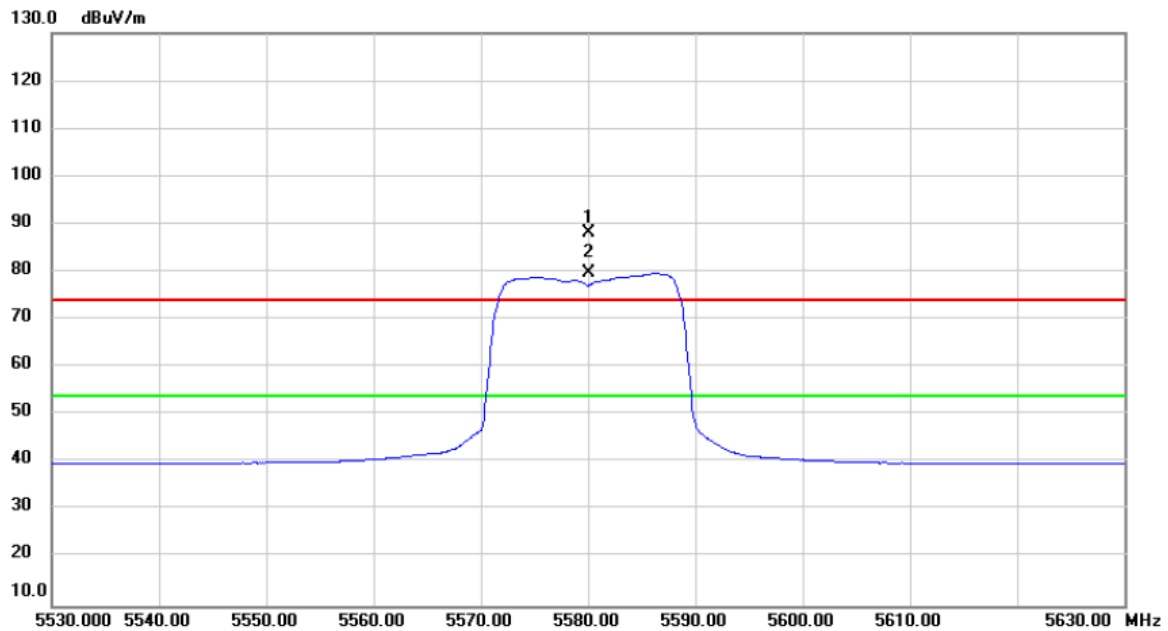

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5580.000	49.94	38.14	88.08	74.00	14.08	peak	No Limit
2	*	5580.000	41.62	38.14	79.76	54.00	25.76	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz

Horizontal

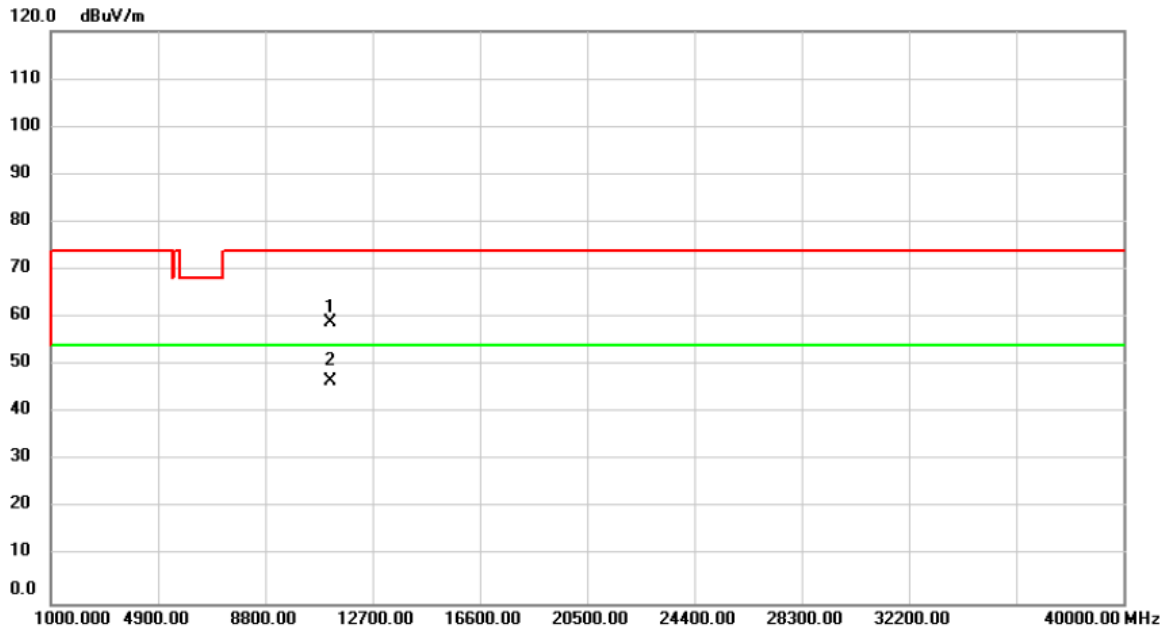

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	55.98	3.04	59.02	74.00	-14.98	peak	
2	*	11160.00	43.55	3.04	46.59	54.00	-7.41	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

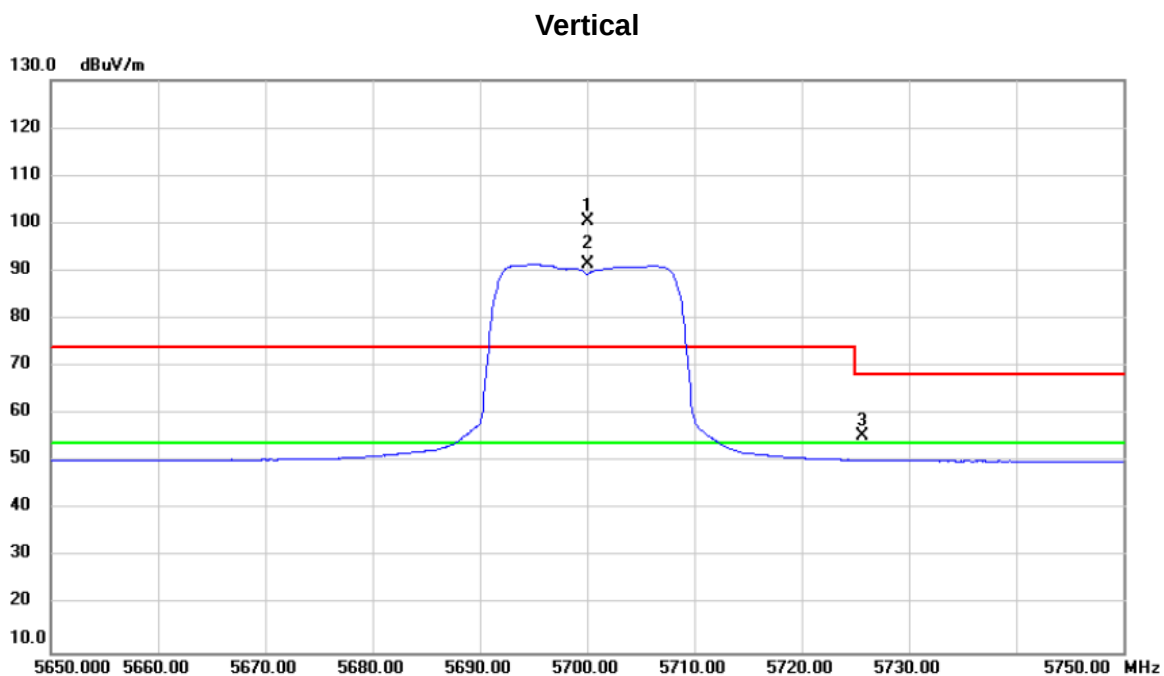

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	62.14	38.46	100.60	74.00	26.60	peak	No Limit
2	*	5700.000	52.96	38.46	91.42	54.00	37.42	AVG	No Limit
3		5725.675	17.02	38.53	55.55	68.20	-12.65	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Vertical

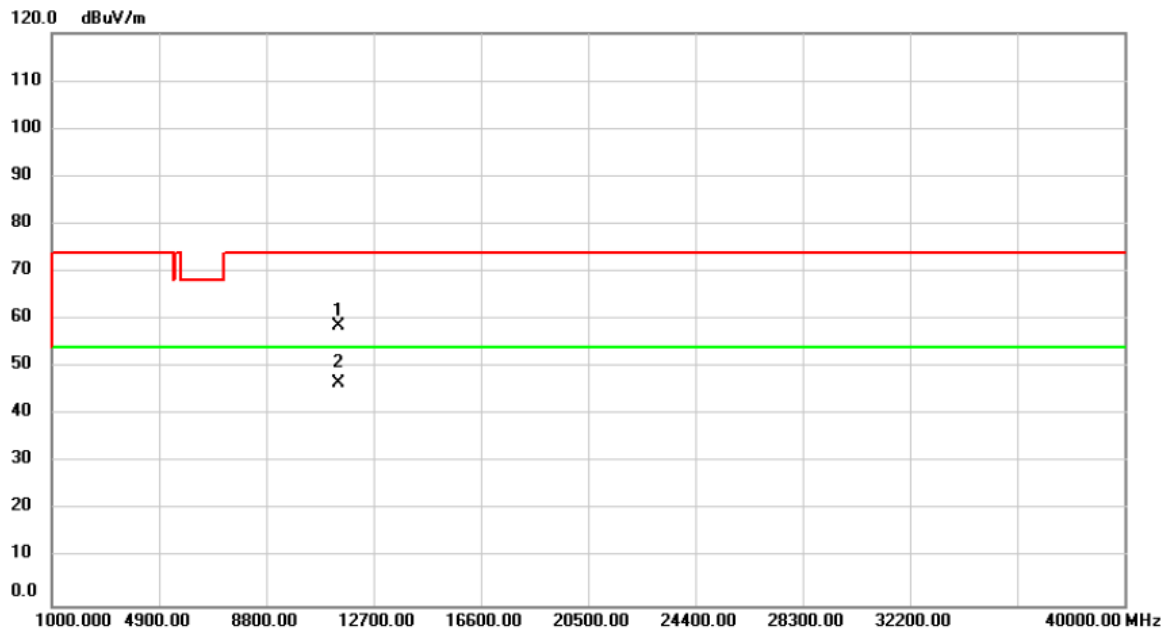

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	55.37	3.30	58.67	74.00	-15.33	peak	
2	*	11400.00	43.25	3.30	46.55	54.00	-7.45	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Horizontal

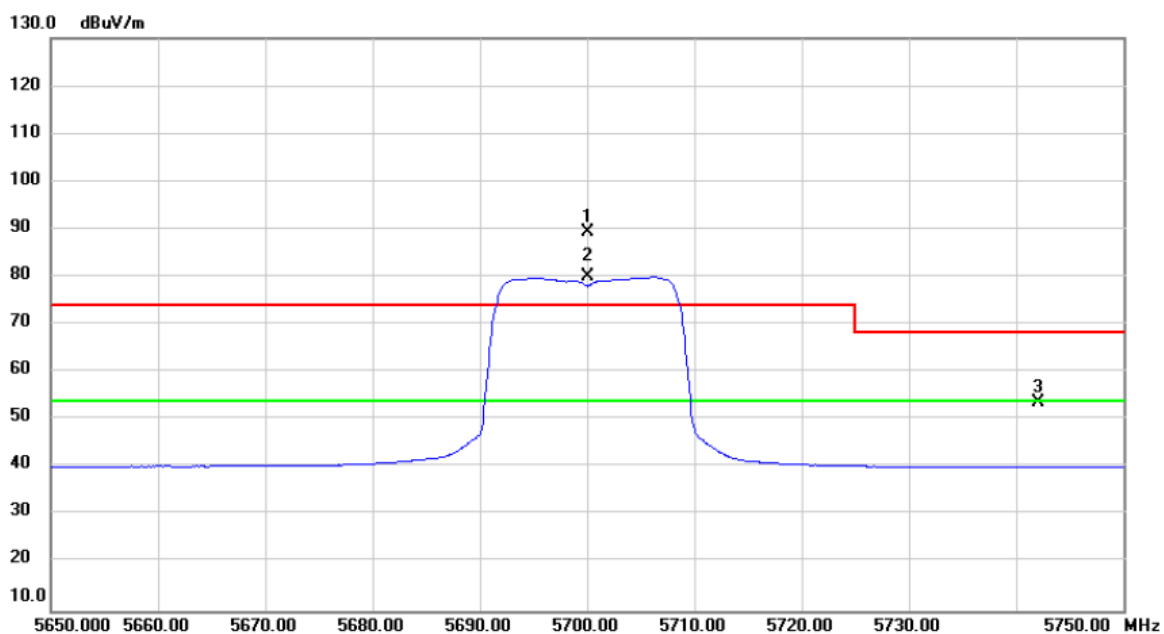

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	50.76	38.46	89.22	74.00	15.22	peak	No Limit
2	*	5700.000	41.64	38.46	80.10	54.00	26.10	AVG	No Limit
3		5742.100	15.06	38.58	53.64	68.20	-14.56	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Horizontal

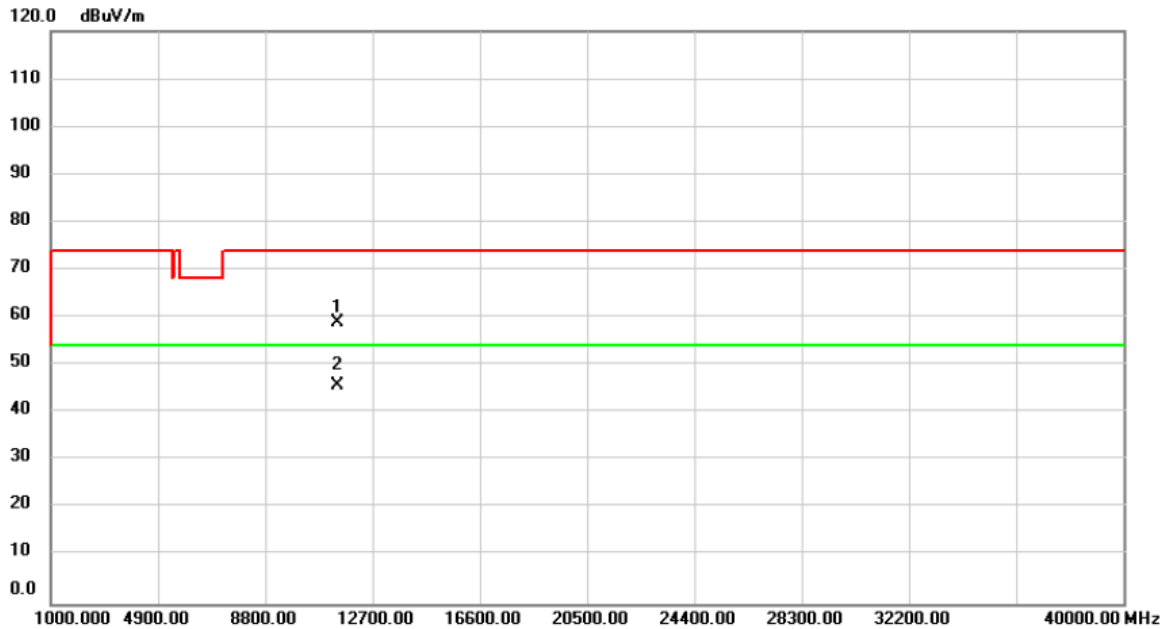

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	55.53	3.30	58.83	74.00	-15.17	peak	
2	*	11400.00	42.59	3.30	45.89	54.00	-8.11	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Vertical

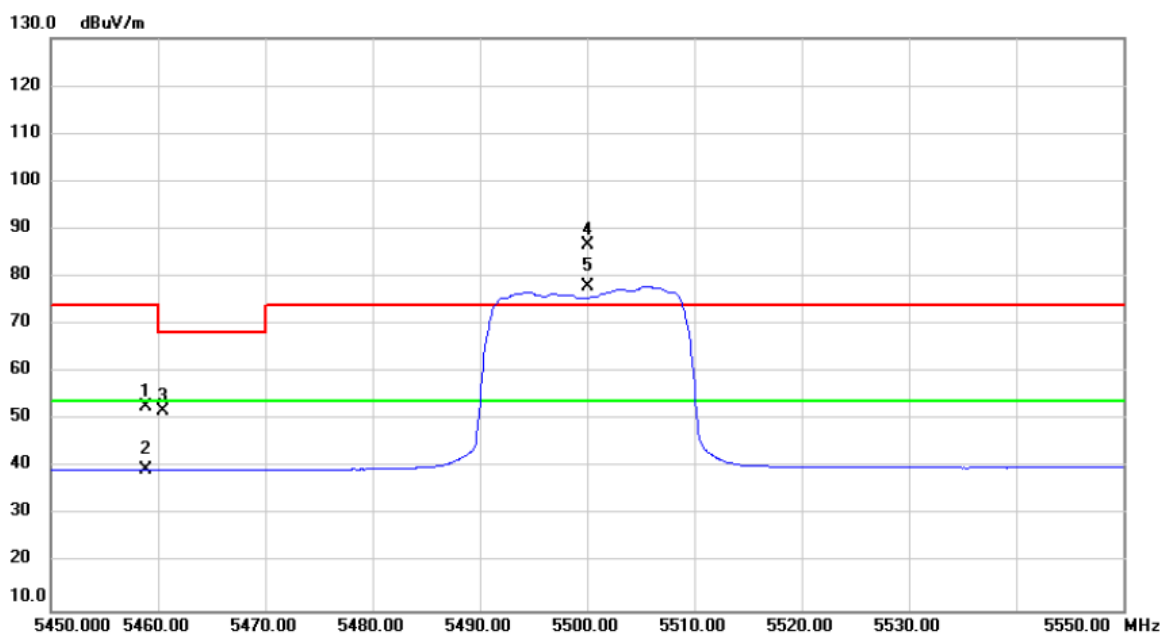

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5458.860	14.77	37.88	52.65	74.00	-21.35	peak	
2		5458.860	1.61	37.88	39.49	54.00	-14.51	AVG	
3		5460.530	14.00	37.88	51.88	68.20	-16.32	peak	
4	X	5500.000	48.74	37.92	86.66	74.00	12.66	peak	No Limit
5	*	5500.000	40.08	37.92	78.00	54.00	24.00	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Vertical

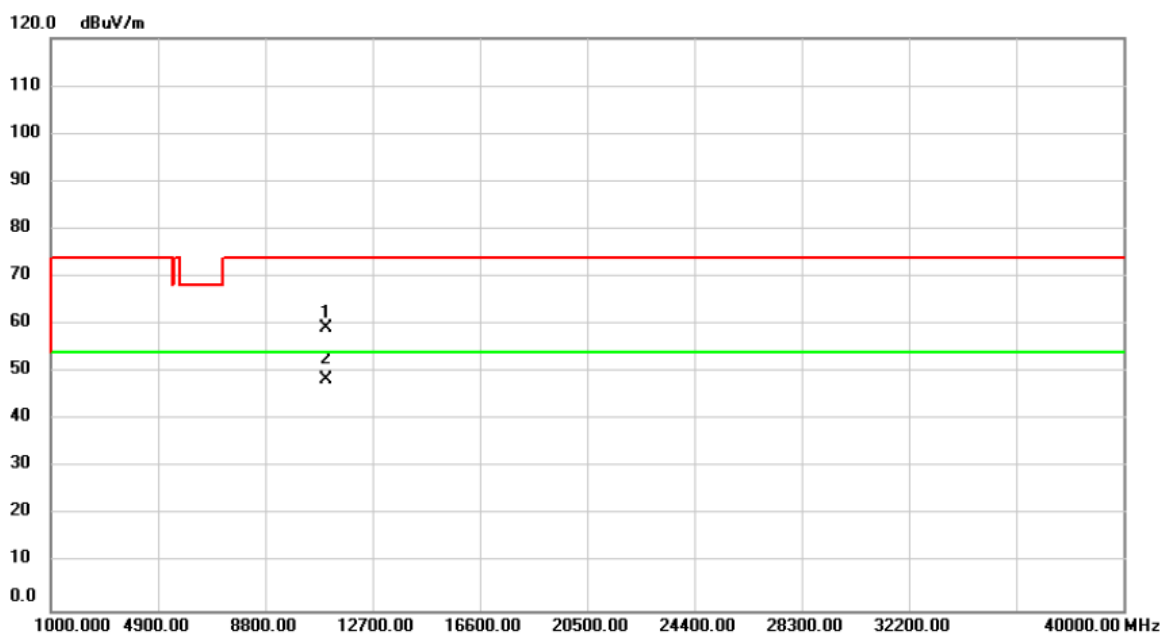

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	56.34	2.85	59.19	74.00	-14.81	peak	
2	*	11000.00	45.54	2.85	48.39	54.00	-5.61	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

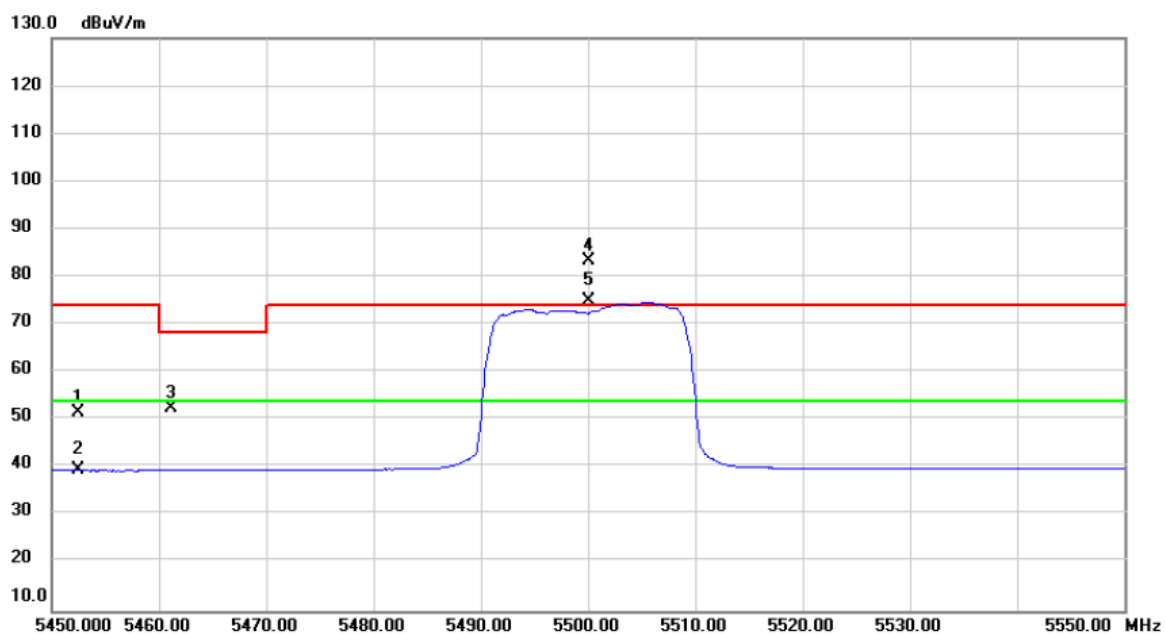

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5452.460	13.77	37.87	51.64	74.00	-22.36	peak	
2		5452.460	1.59	37.87	39.46	54.00	-14.54	AVG	
3		5461.160	14.72	37.88	52.60	68.20	-15.60	peak	
4	X	5500.000	45.41	37.92	83.33	74.00	9.33	peak	No Limit
5	*	5500.000	36.89	37.92	74.81	54.00	20.81	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

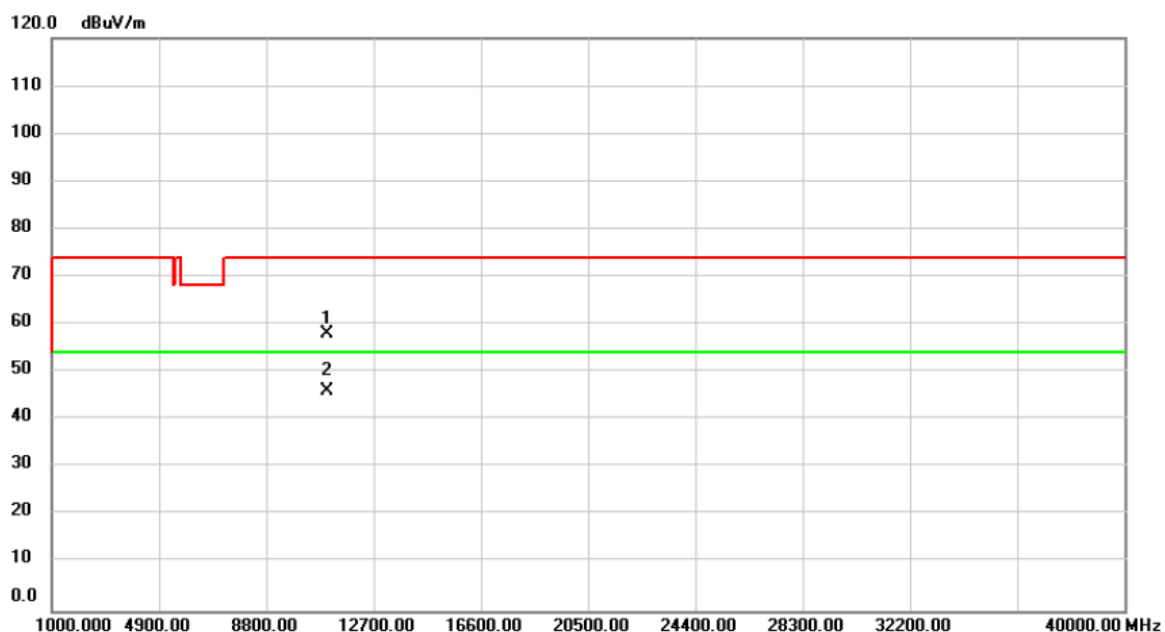

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	55.06	2.85	57.91	74.00	-16.09	peak	
2	*	11000.00	43.30	2.85	46.15	54.00	-7.85	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Vertical

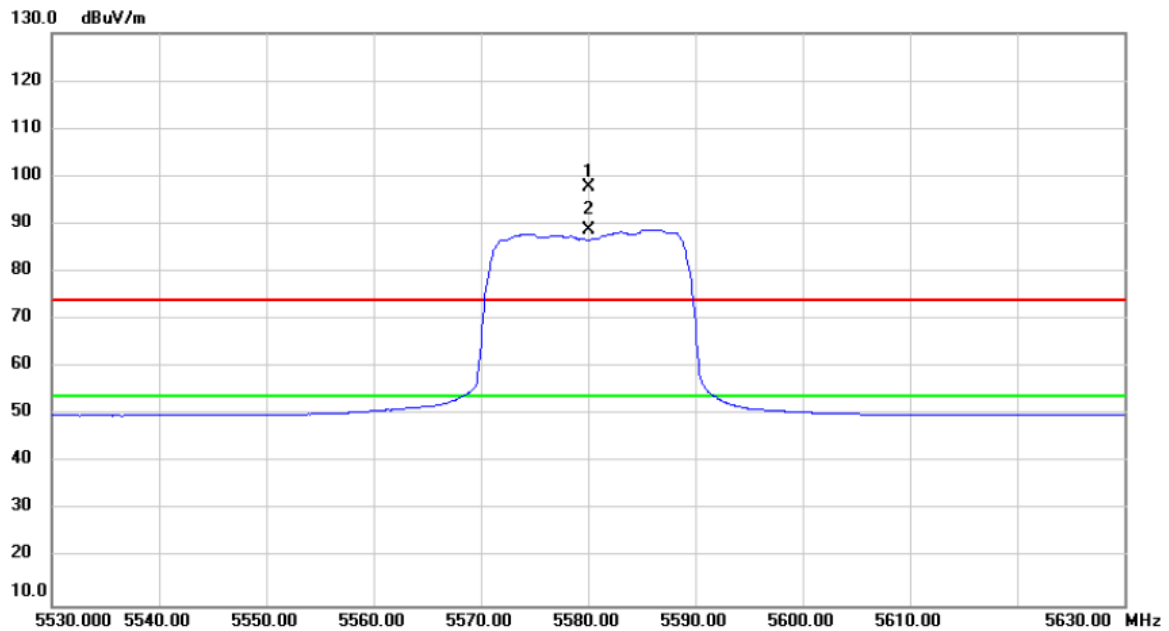

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5580.000	59.56	38.14	97.70	74.00	23.70	peak	No Limit
2	*	5580.000	50.74	38.14	88.88	54.00	34.88	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Vertical

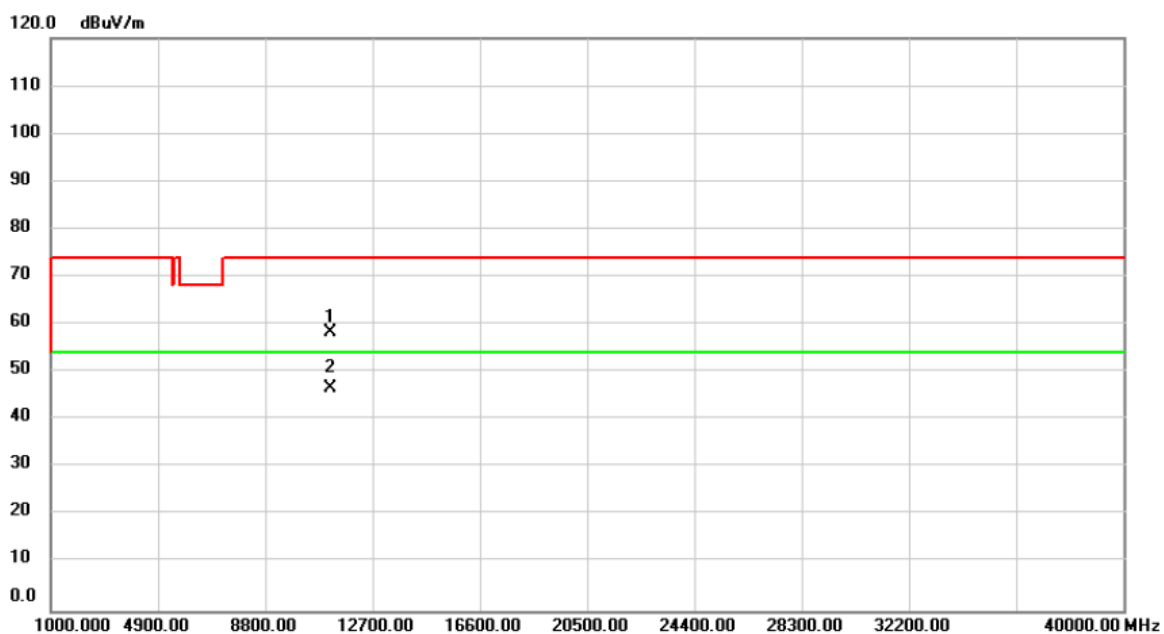

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	55.38	3.04	58.42	74.00	-15.58	peak	
2	*	11160.00	43.53	3.04	46.57	54.00	-7.43	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Horizontal

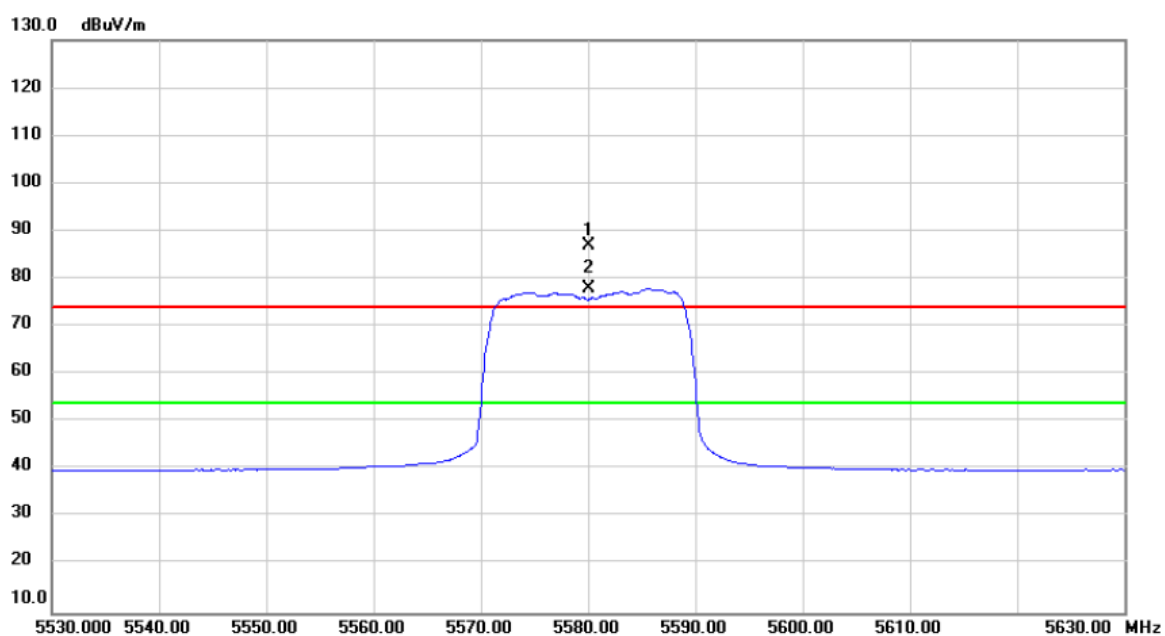

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5580.000	48.85	38.14	86.99	74.00	12.99	peak	No Limit
2	*	5580.000	39.84	38.14	77.98	54.00	23.98	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Horizontal

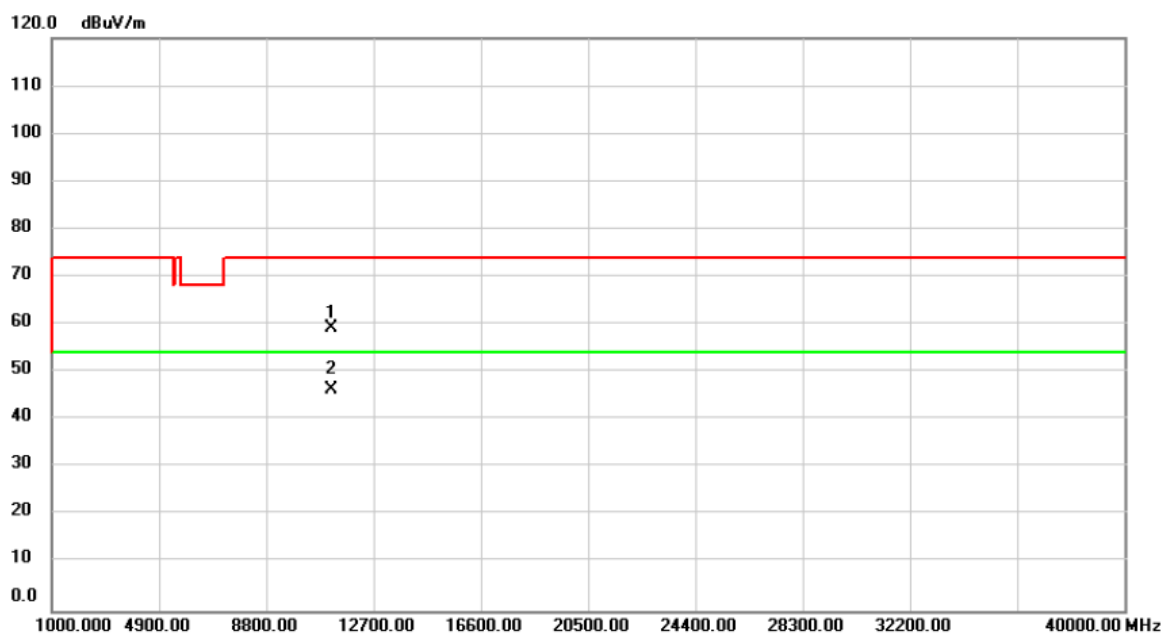

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	56.16	3.04	59.20	74.00	-14.80	peak	
2	*	11160.00	43.35	3.04	46.39	54.00	-7.61	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Vertical

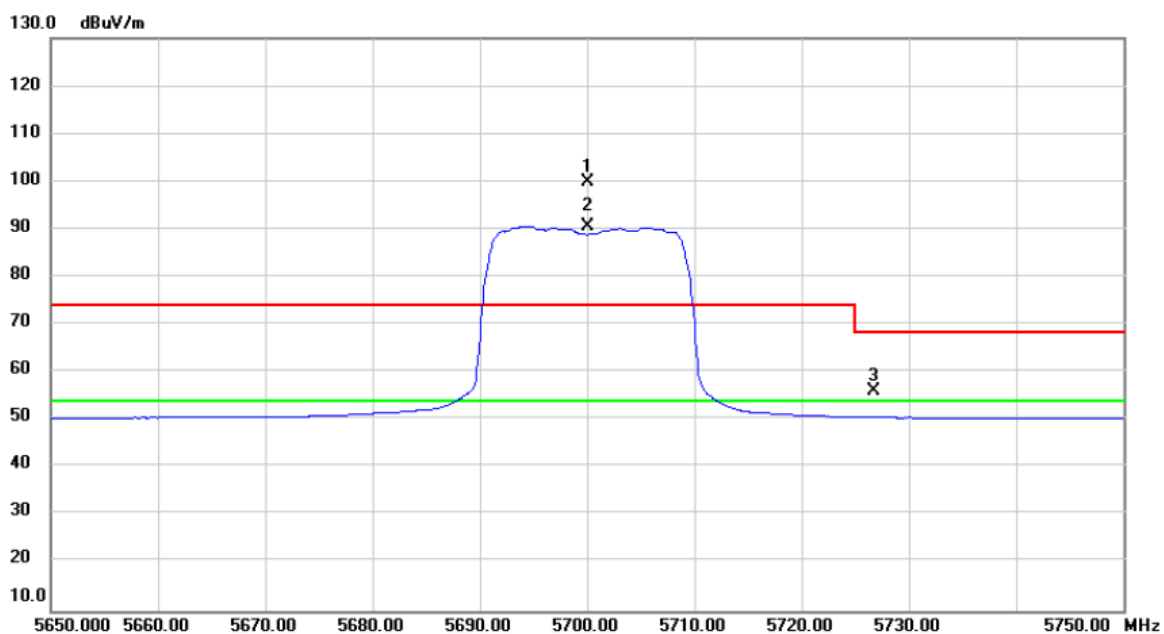

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	61.46	38.46	99.92	74.00	25.92	peak	No Limit
2	*	5700.000	52.24	38.46	90.70	54.00	36.70	AVG	No Limit
3		5726.750	17.61	38.53	56.14	68.20	-12.06	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Vertical

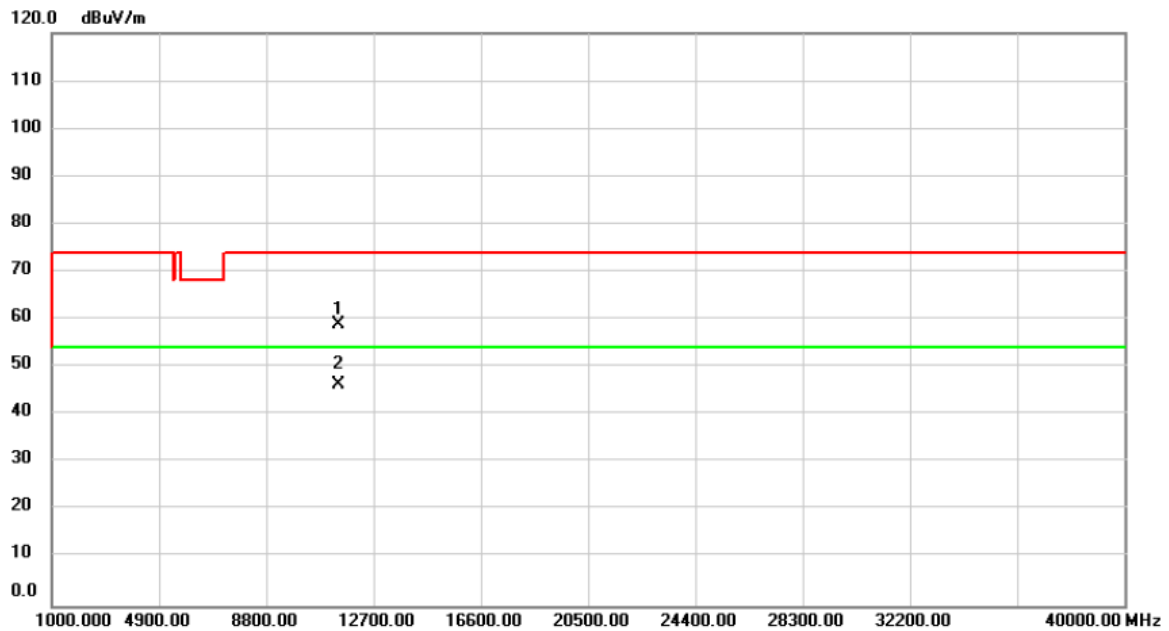

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	55.55	3.30	58.85	74.00	-15.15	peak	
2	*	11400.00	43.08	3.30	46.38	54.00	-7.62	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Horizontal

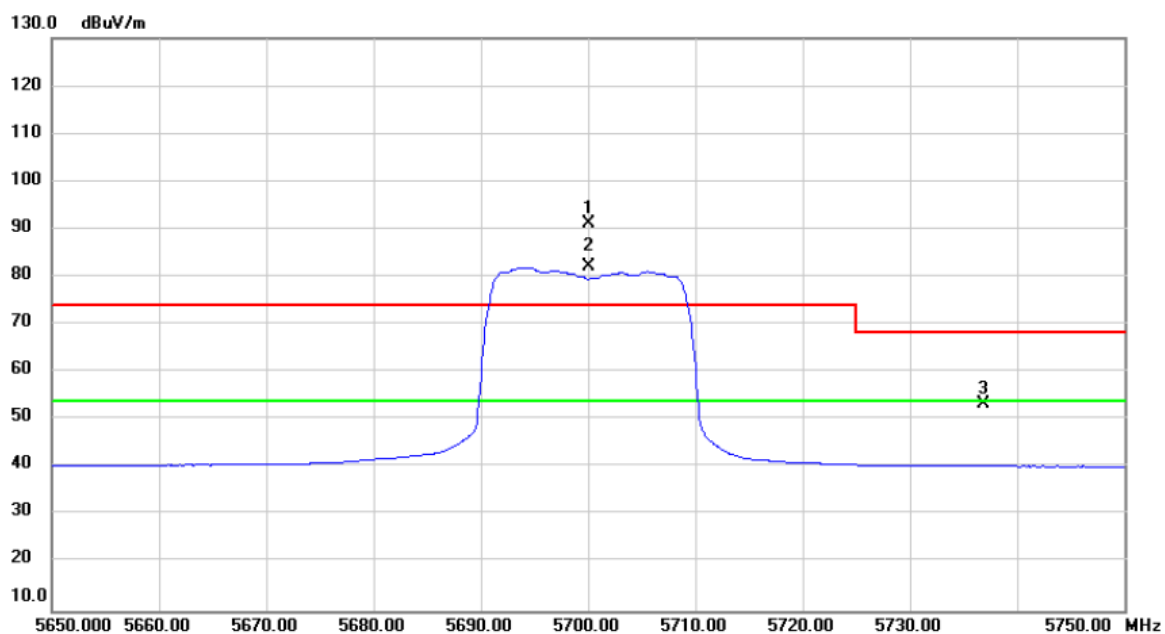

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	52.65	38.46	91.11	74.00	17.11	peak	No Limit
2	*	5700.000	43.56	38.46	82.02	54.00	28.02	AVG	No Limit
3		5736.825	14.89	38.57	53.46	68.20	-14.74	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Horizontal

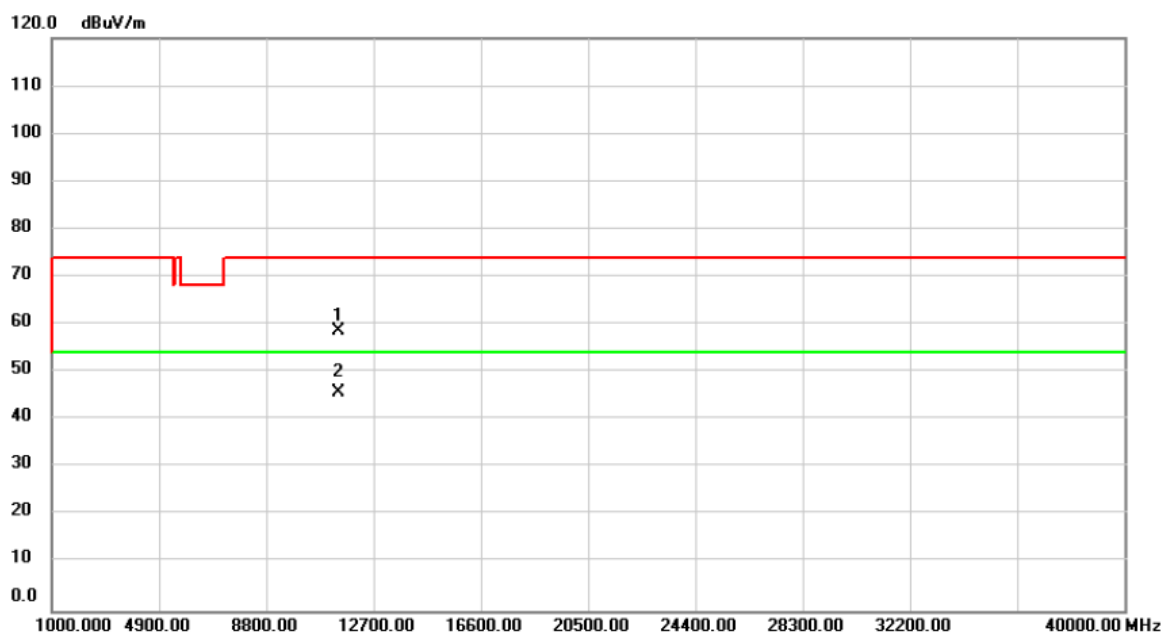

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	55.29	3.30	58.59	74.00	-15.41	peak	
2	*	11400.00	42.55	3.30	45.85	54.00	-8.15	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz


Vertical

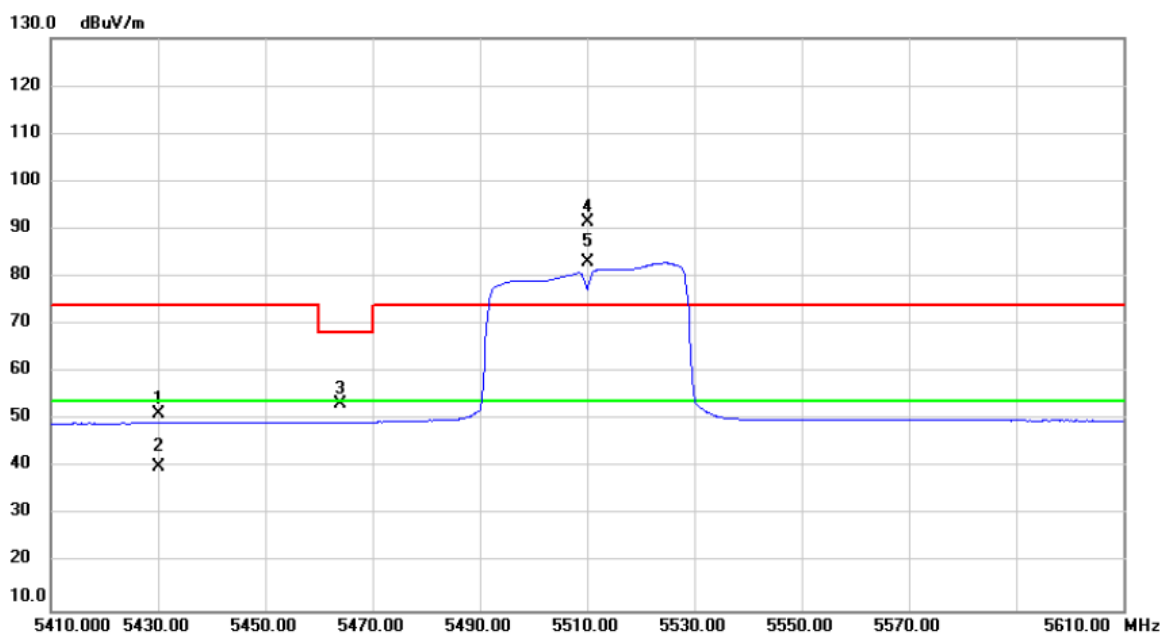

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5430.000	13.45	37.85	51.30	74.00	-22.70	peak	
2		5430.000	2.18	37.85	40.03	54.00	-13.97	AVG	
3		5464.050	15.39	37.88	53.27	68.20	-14.93	peak	
4	X	5510.000	53.65	37.95	91.60	74.00	17.60	peak	No Limit
5	*	5510.000	45.01	37.95	82.96	54.00	28.96	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz


Vertical

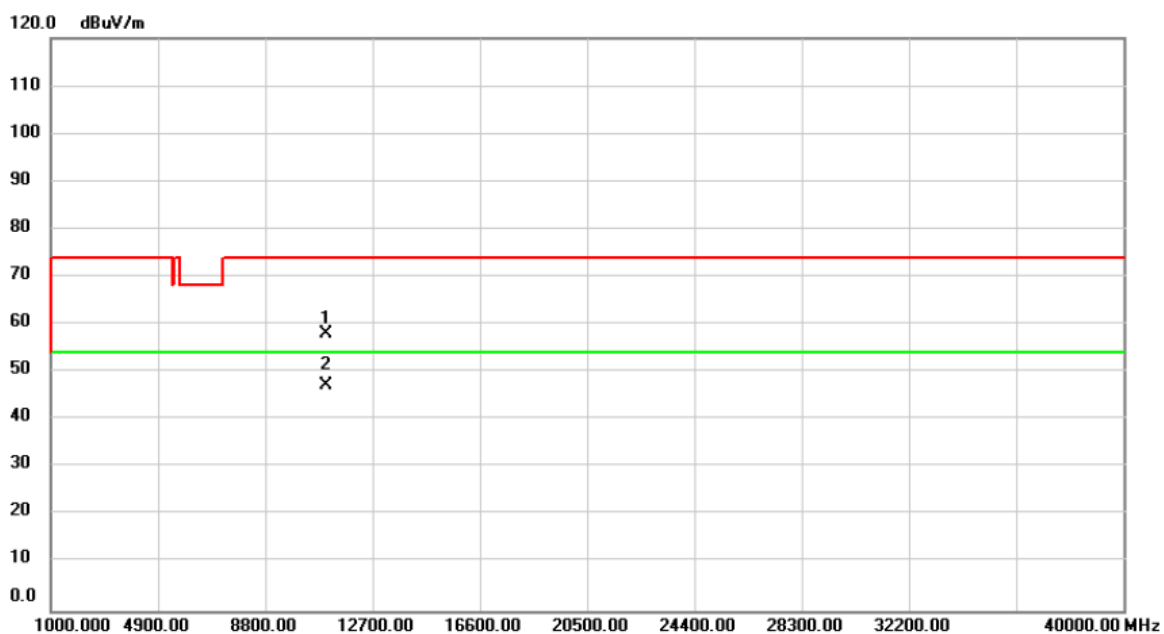

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	55.05	2.87	57.92	74.00	-16.08	peak	
2	*	11020.00	44.25	2.87	47.12	54.00	-6.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz


Horizontal

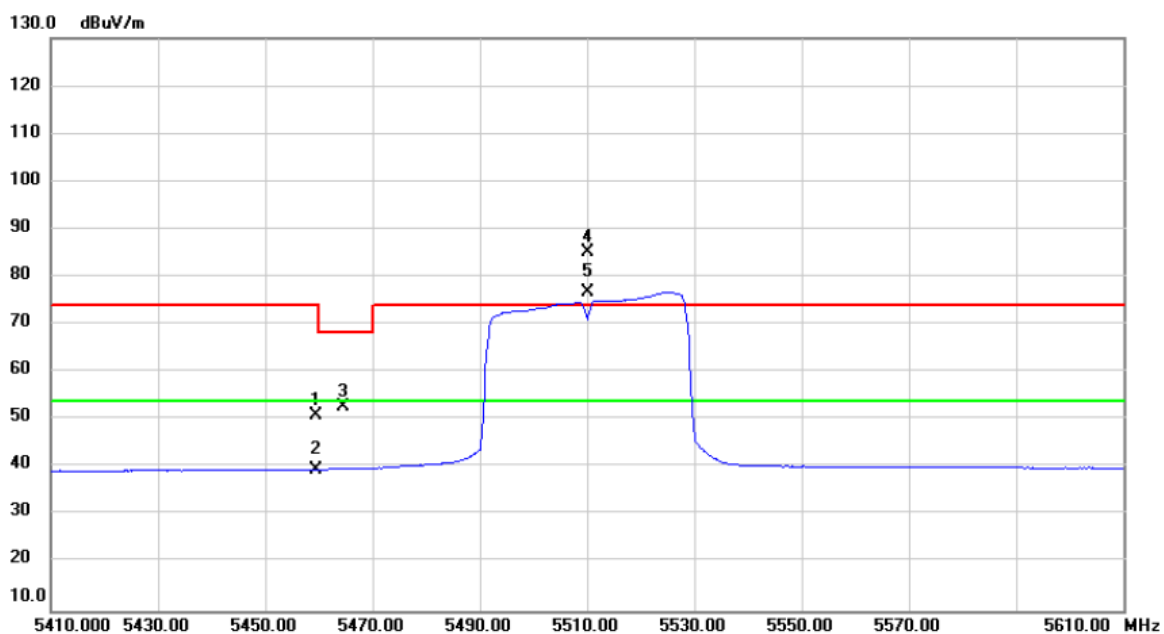

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5459.550	12.95	37.88	50.83	74.00	-23.17	peak	
2		5459.550	1.74	37.88	39.62	54.00	-14.38	AVG	
3		5464.420	14.75	37.88	52.63	68.20	-15.57	peak	
4	X	5510.000	47.19	37.95	85.14	74.00	11.14	peak	No Limit
5	*	5510.000	38.87	37.95	76.82	54.00	22.82	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz


Horizontal

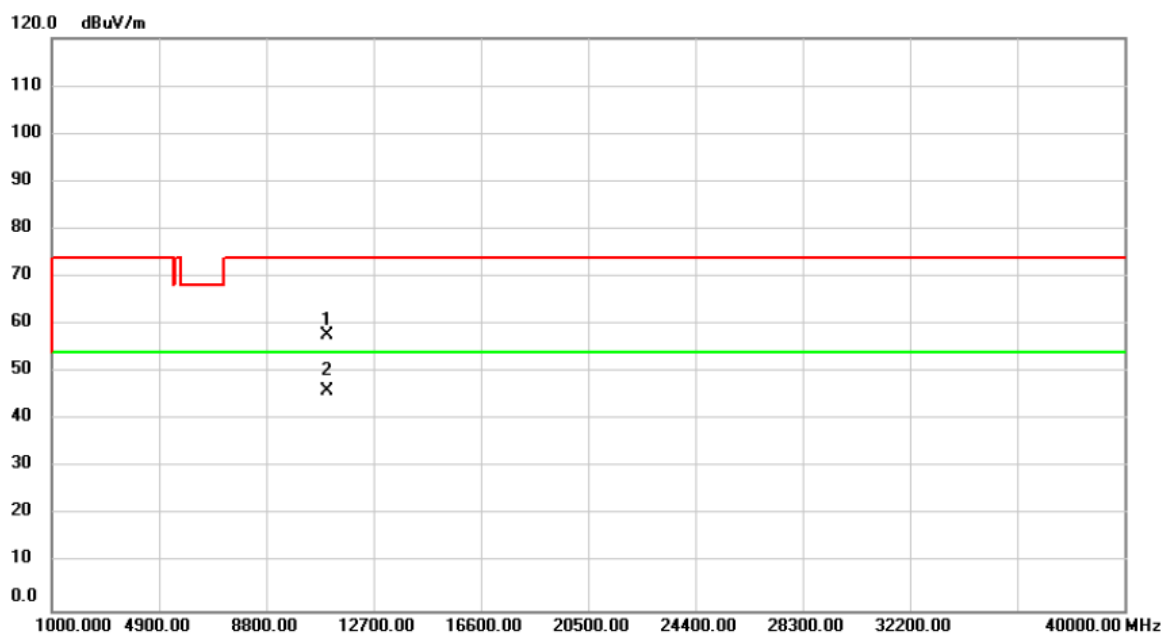

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	54.96	2.87	57.83	74.00	-16.17	peak	
2	*	11020.00	43.14	2.87	46.01	54.00	-7.99	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz


Vertical

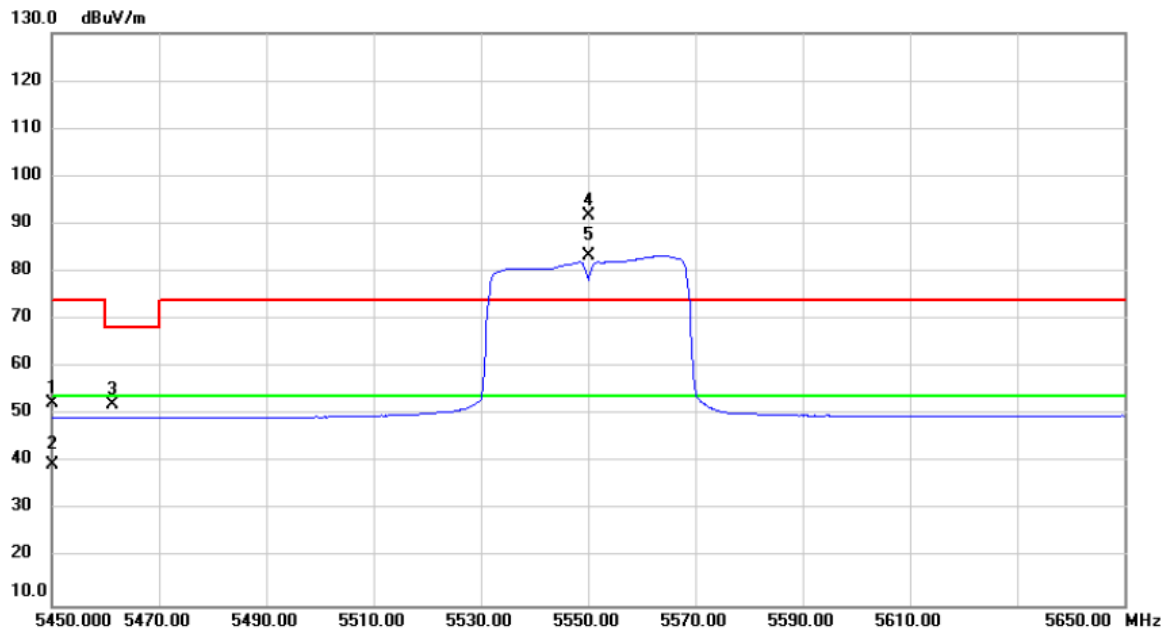

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5450.040	14.66	37.87	52.53	74.00	-21.47	peak	
2		5450.040	1.74	37.87	39.61	54.00	-14.39	AVG	
3		5461.260	14.38	37.88	52.26	68.20	-15.94	peak	
4	X	5550.000	53.71	38.06	91.77	74.00	17.77	peak	No Limit
5	*	5550.000	45.25	38.06	83.31	54.00	29.31	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz


Vertical

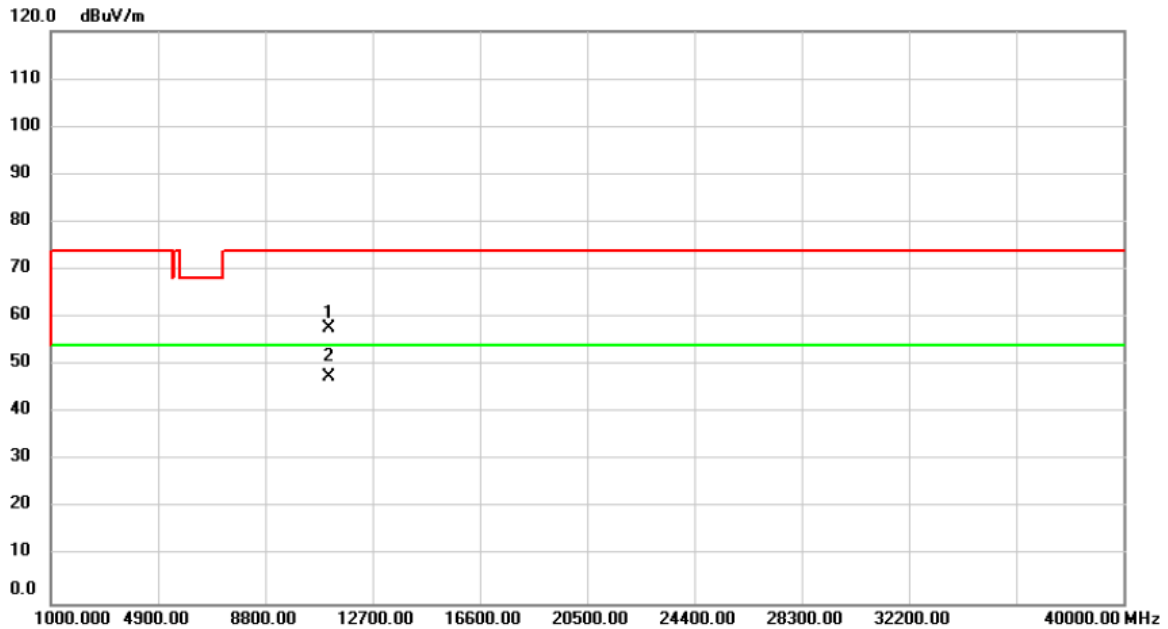

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	54.80	2.97	57.77	74.00	-16.23	peak	
2	*	11100.00	44.52	2.97	47.49	54.00	-6.51	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz


Horizontal

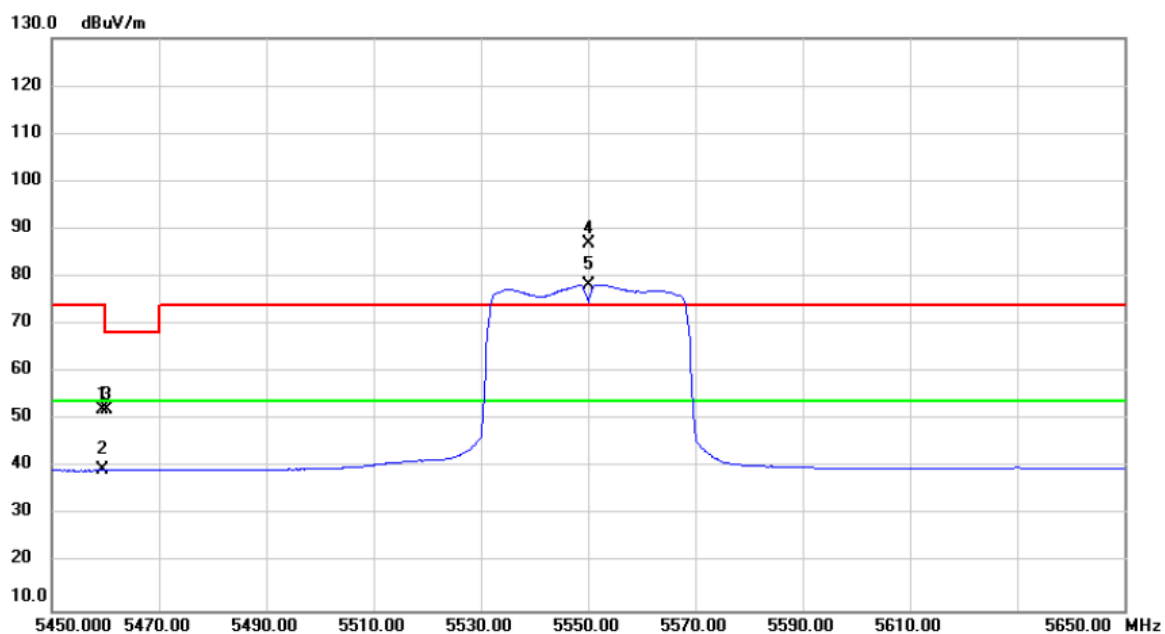

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5459.450	14.17	37.88	52.05	74.00	-21.95	peak	
2		5459.450	1.59	37.88	39.47	54.00	-14.53	AVG	
3		5460.270	14.21	37.88	52.09	68.20	-16.11	peak	
4	X	5550.000	48.81	38.06	86.87	74.00	12.87	peak	No Limit
5	*	5550.000	40.31	38.06	78.37	54.00	24.37	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz


Horizontal

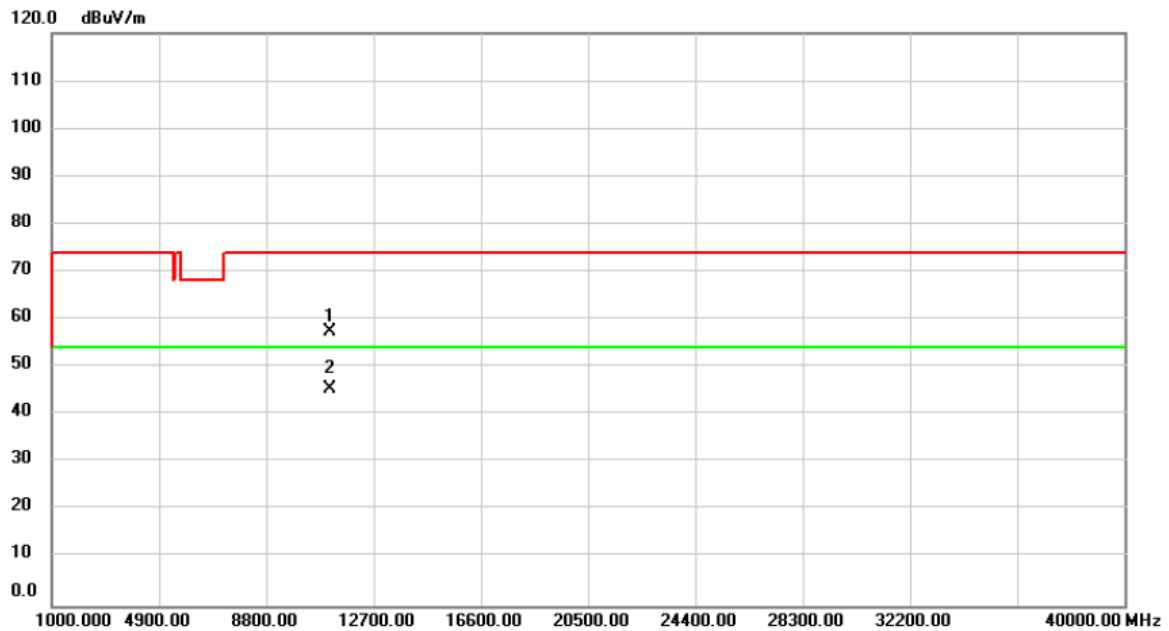

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	54.42	2.97	57.39	74.00	-16.61	peak	
2	*	11100.00	42.35	2.97	45.32	54.00	-8.68	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Vertical

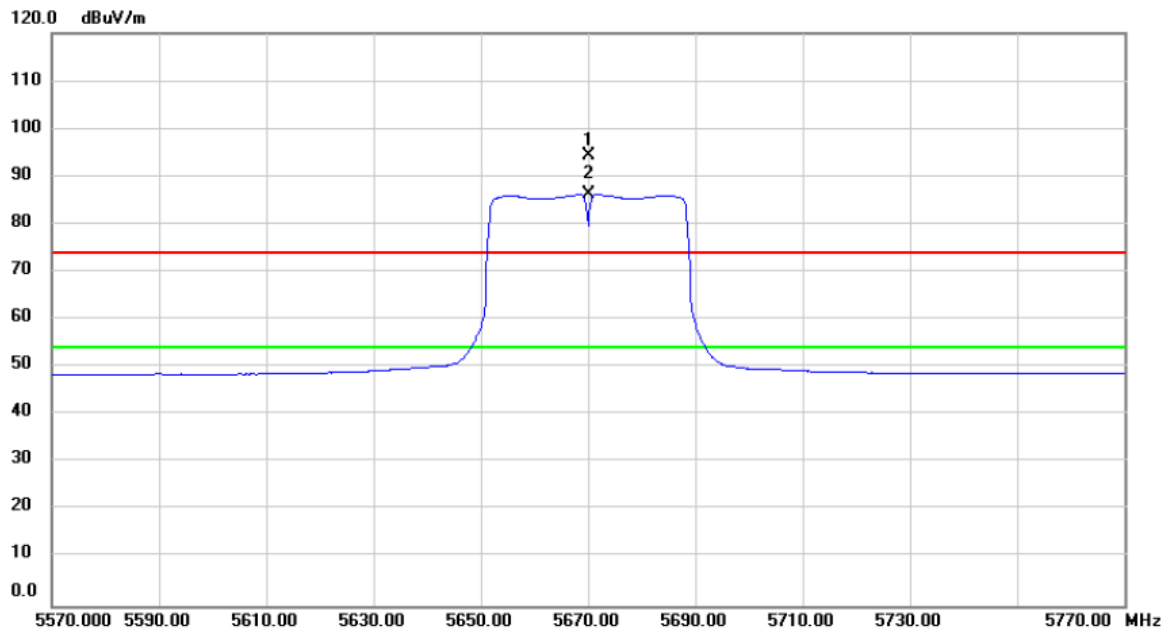

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5670.000	55.98	38.38	94.36	74.00	20.36	peak	No Limit
2	*	5670.000	47.92	38.38	86.30	54.00	32.30	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Vertical

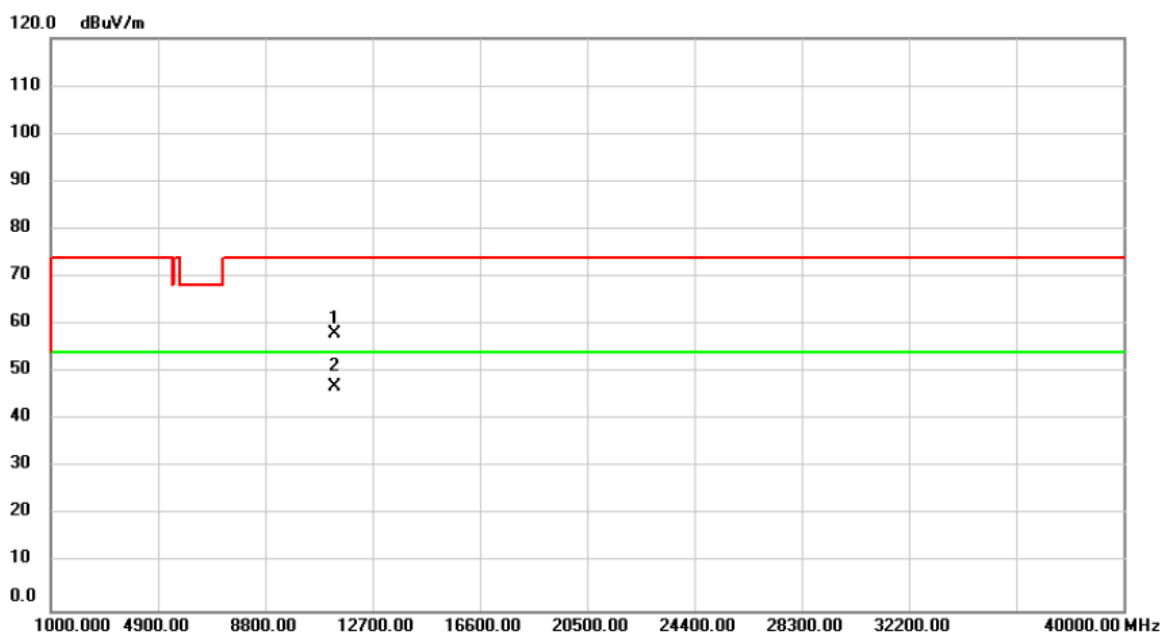

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	54.76	3.23	57.99	74.00	-16.01	peak	
2	*	11340.00	43.63	3.23	46.86	54.00	-7.14	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Horizontal

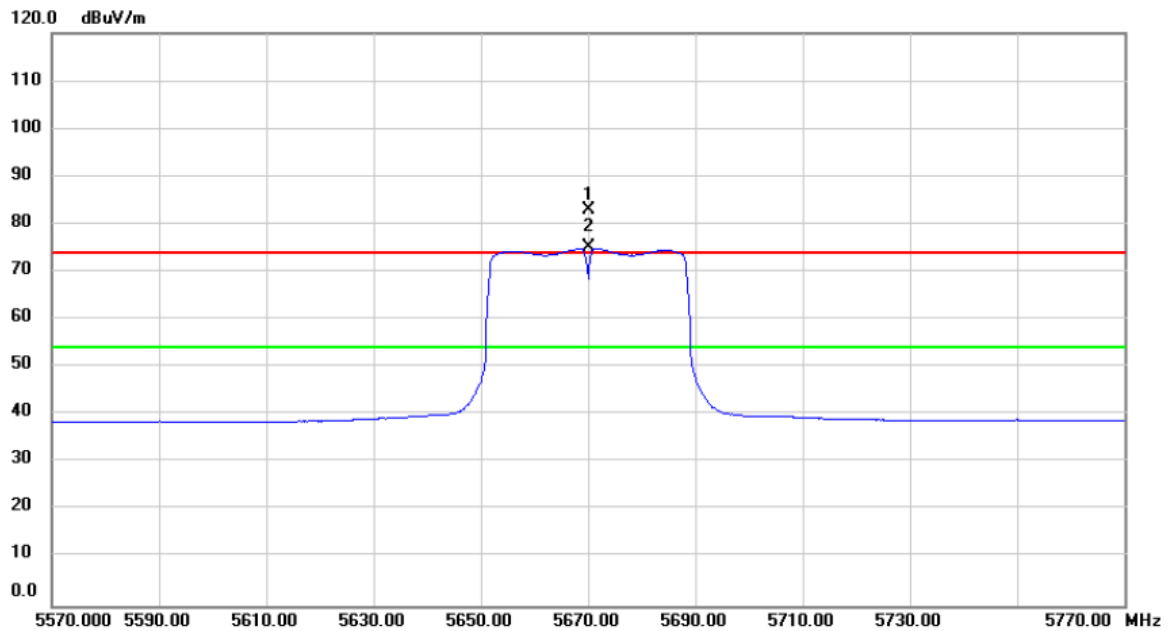

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5670.000	44.56	38.38	82.94	74.00	8.94	peak	No Limit
2	*	5670.000	36.79	38.38	75.17	54.00	21.17	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

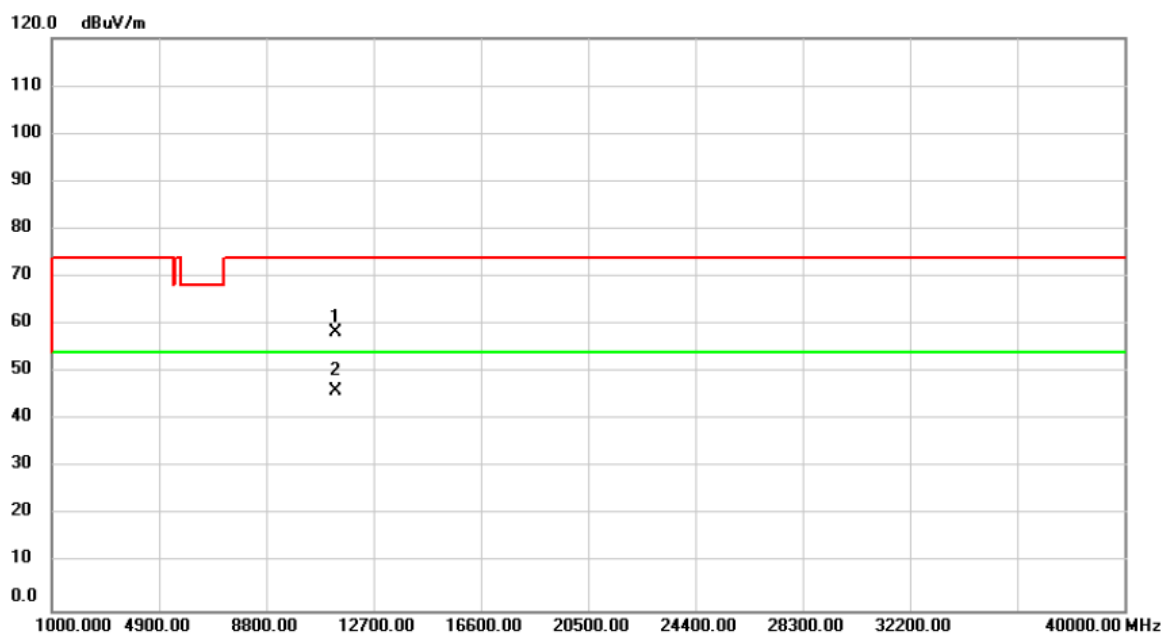

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	55.04	3.23	58.27	74.00	-15.73	peak	
2	*	11340.00	42.86	3.23	46.09	54.00	-7.91	AVG	