



Power Spectral Density Test Data

Temperature	: 26.4°C	Humidity	: 35%
Test Date	: 08-Oct-2014	Tested by	: Kidd Liao
Test Mode	: Mode 4	Channel	: CH01 (2412 MHz)

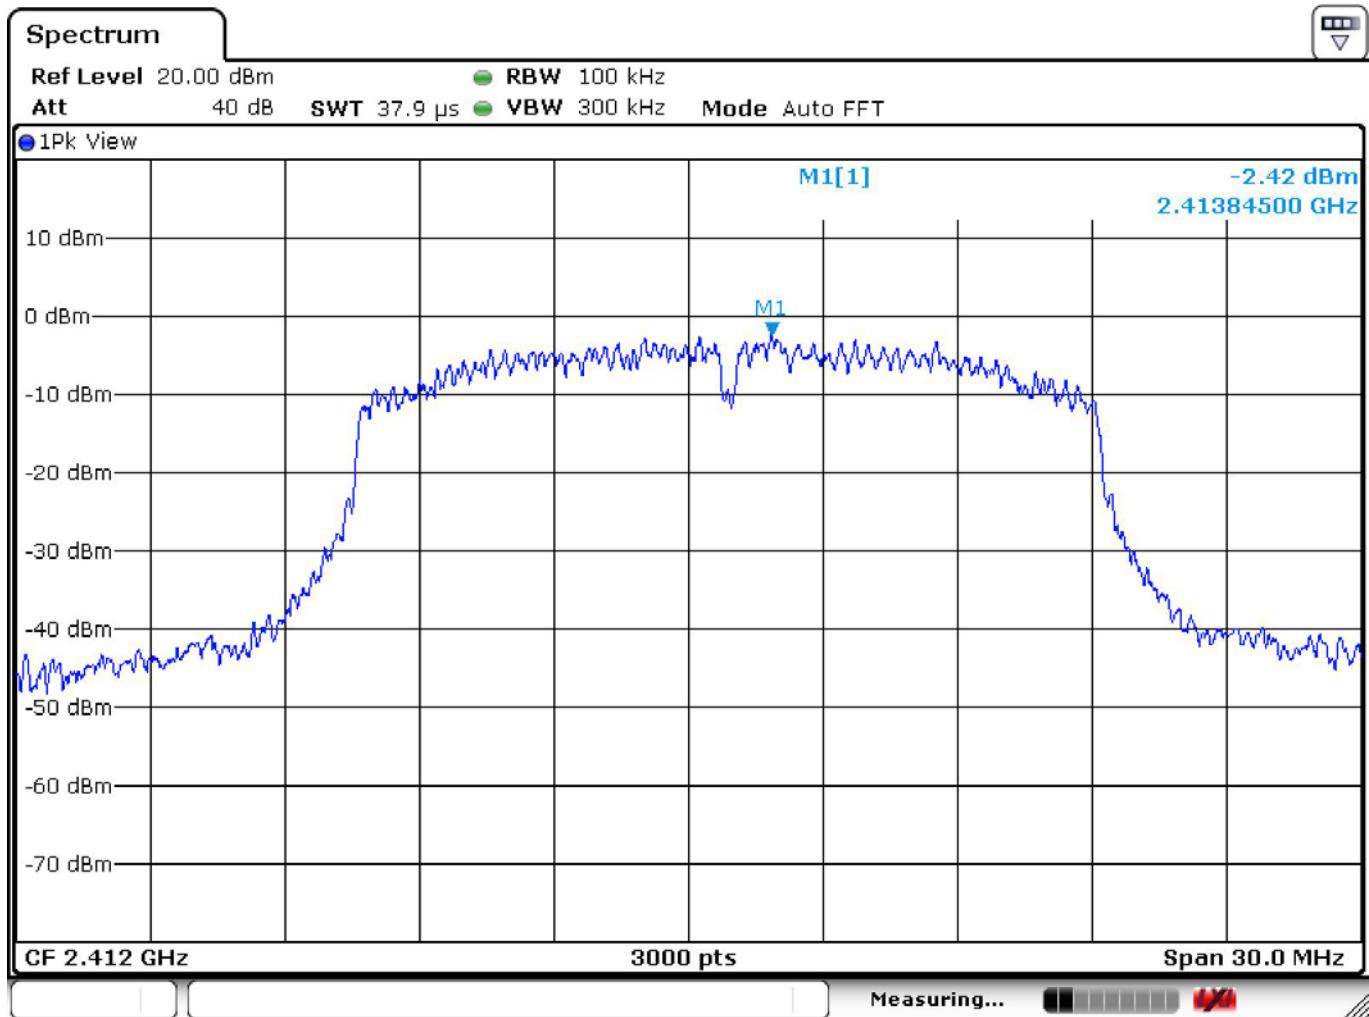


Power Spectral Density Test Data

Temperature	: 26.4°C	Humidity	: 35%
Test Date	: 08-Oct-2014	Tested by	: Kidd Liao
Test Mode	: Mode 5	Channel	: CH06 (2437 MHz)

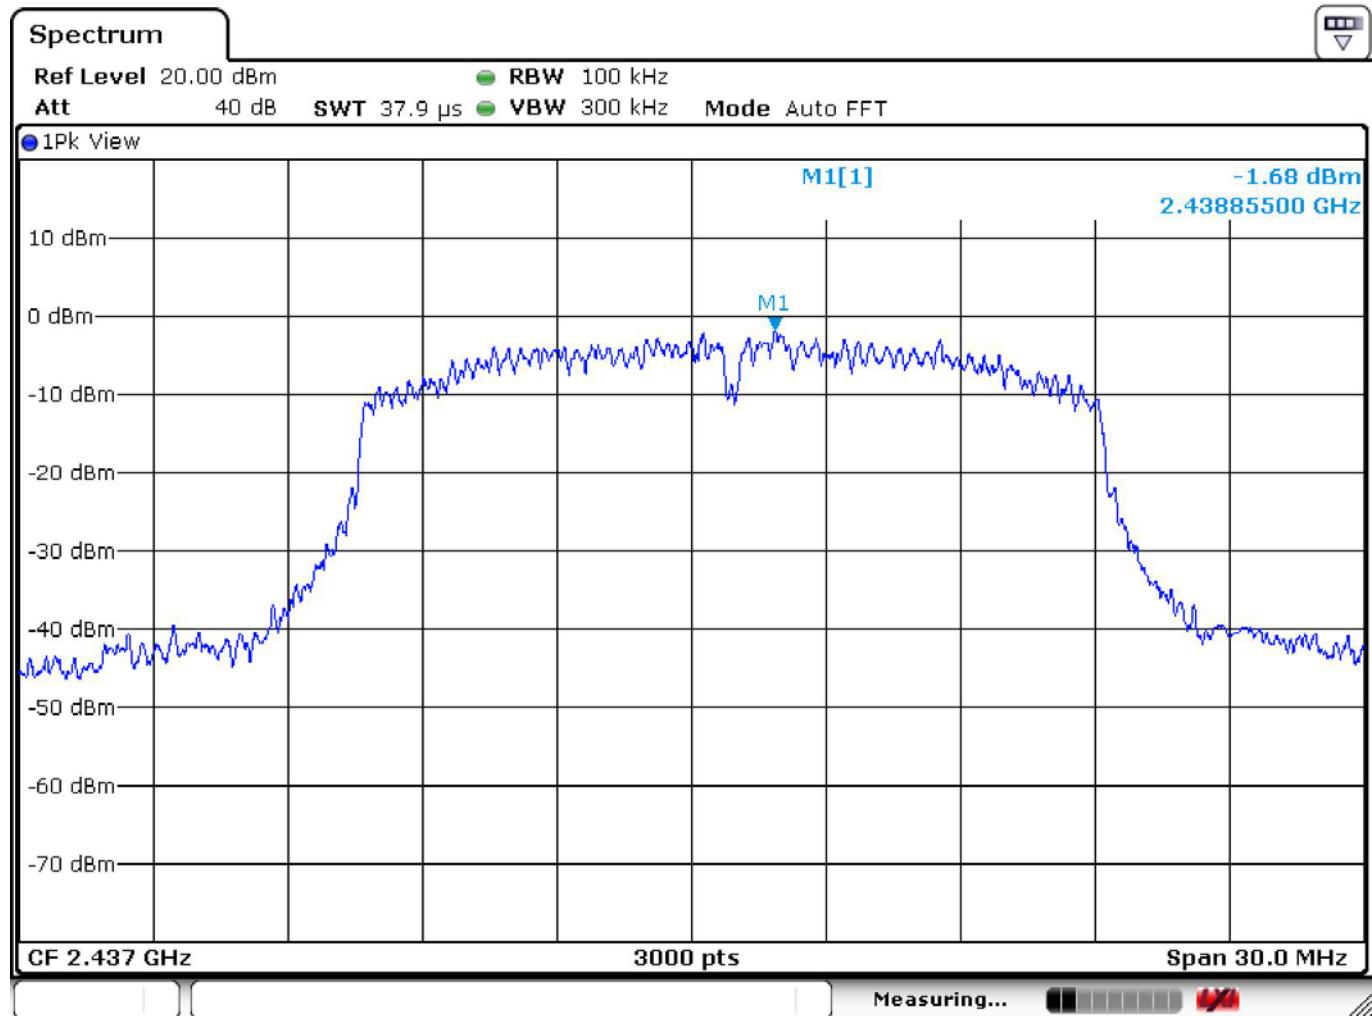


Power Spectral Density Test Data

Temperature	:	26.4°C	Humidity	:	35%
Test Date	:	08-Oct-2014	Tested by	:	Kidd Liao
Test Mode	:	Mode 6	Channel	:	CH11 (2462 MHz)

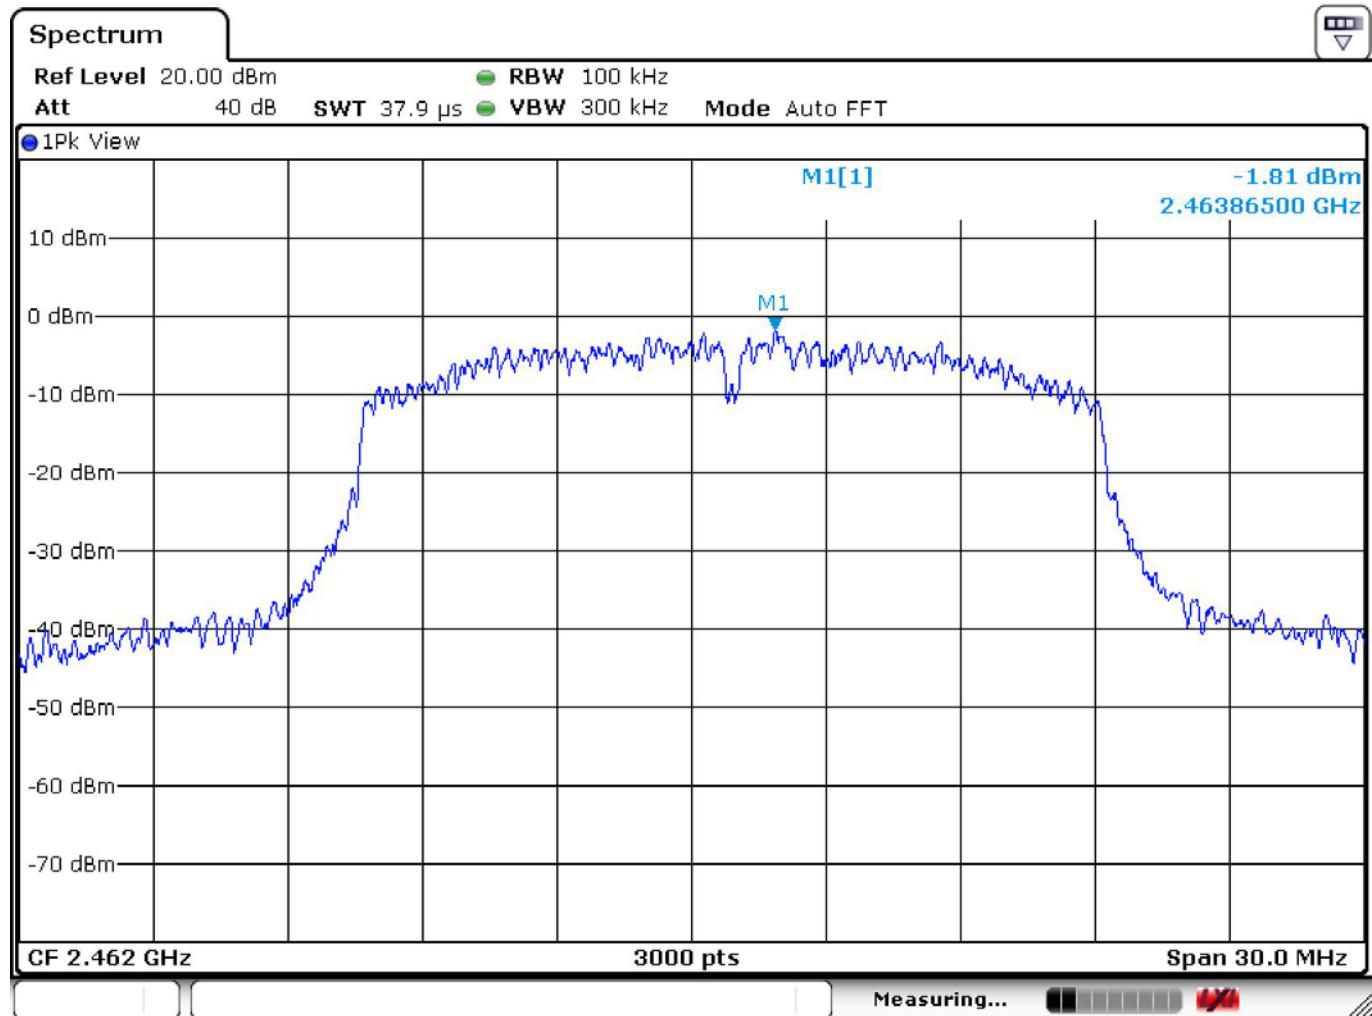


Power Spectral Density Test Data

Temperature	:	26.4°C	Humidity	:	35%
Test Date	:	08-Oct-2014	Tested by	:	Kidd Liao
Test Mode	:	Mode 7	Channel	:	CH01 (2412 MHz)

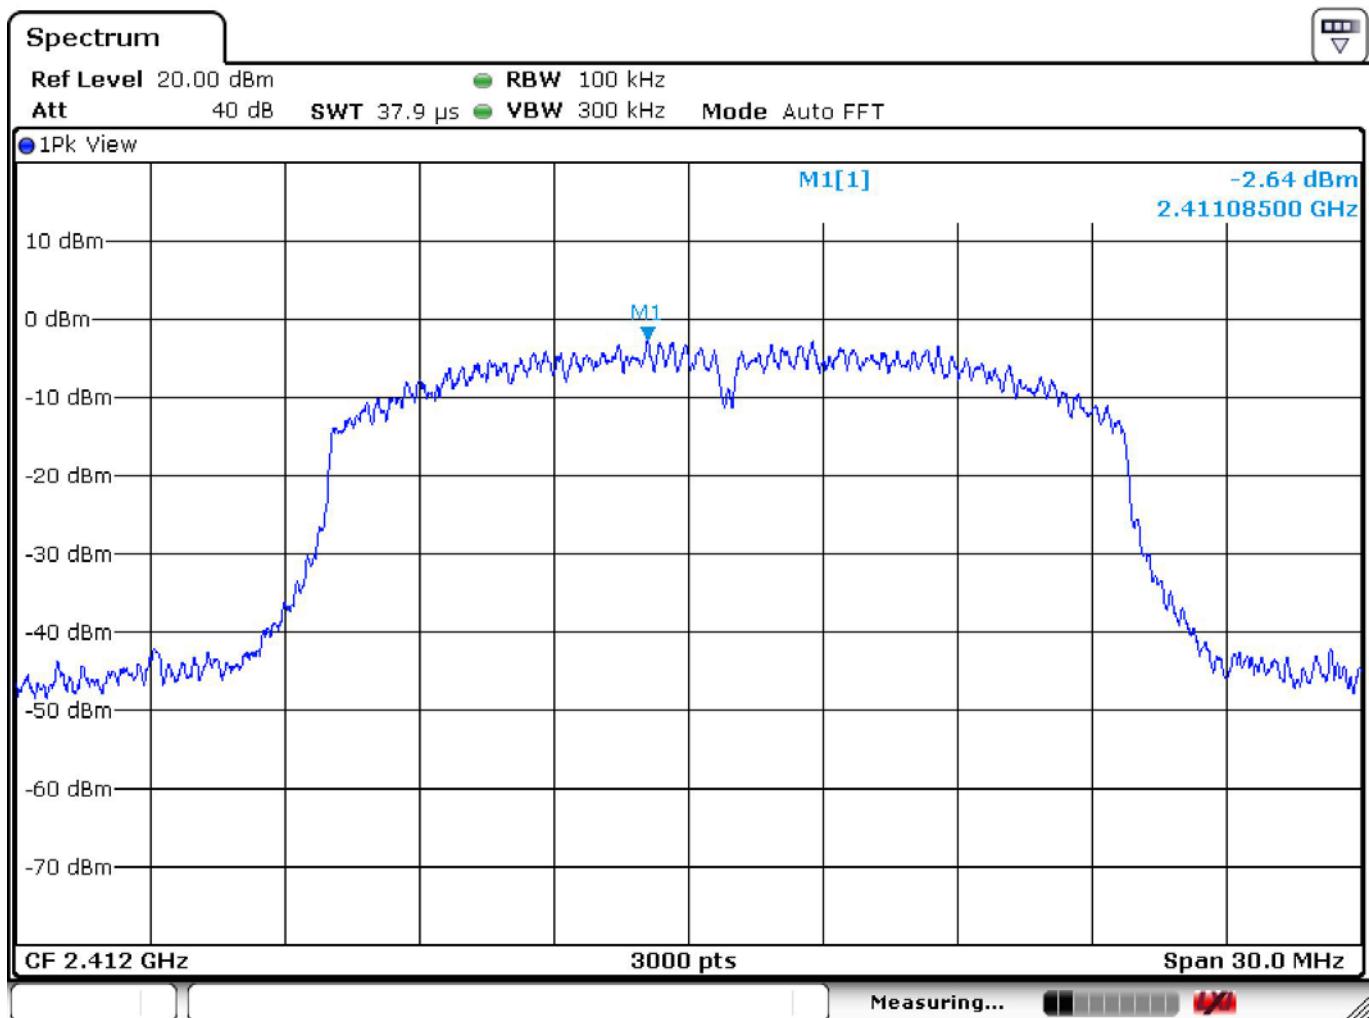


Power Spectral Density Test Data

Temperature	: 26.4°C	Humidity	: 35%
Test Date	: 08-Oct-2014	Tested by	: Kidd Liao
Test Mode	: Mode 8	Channel	: CH06 (2437 MHz)

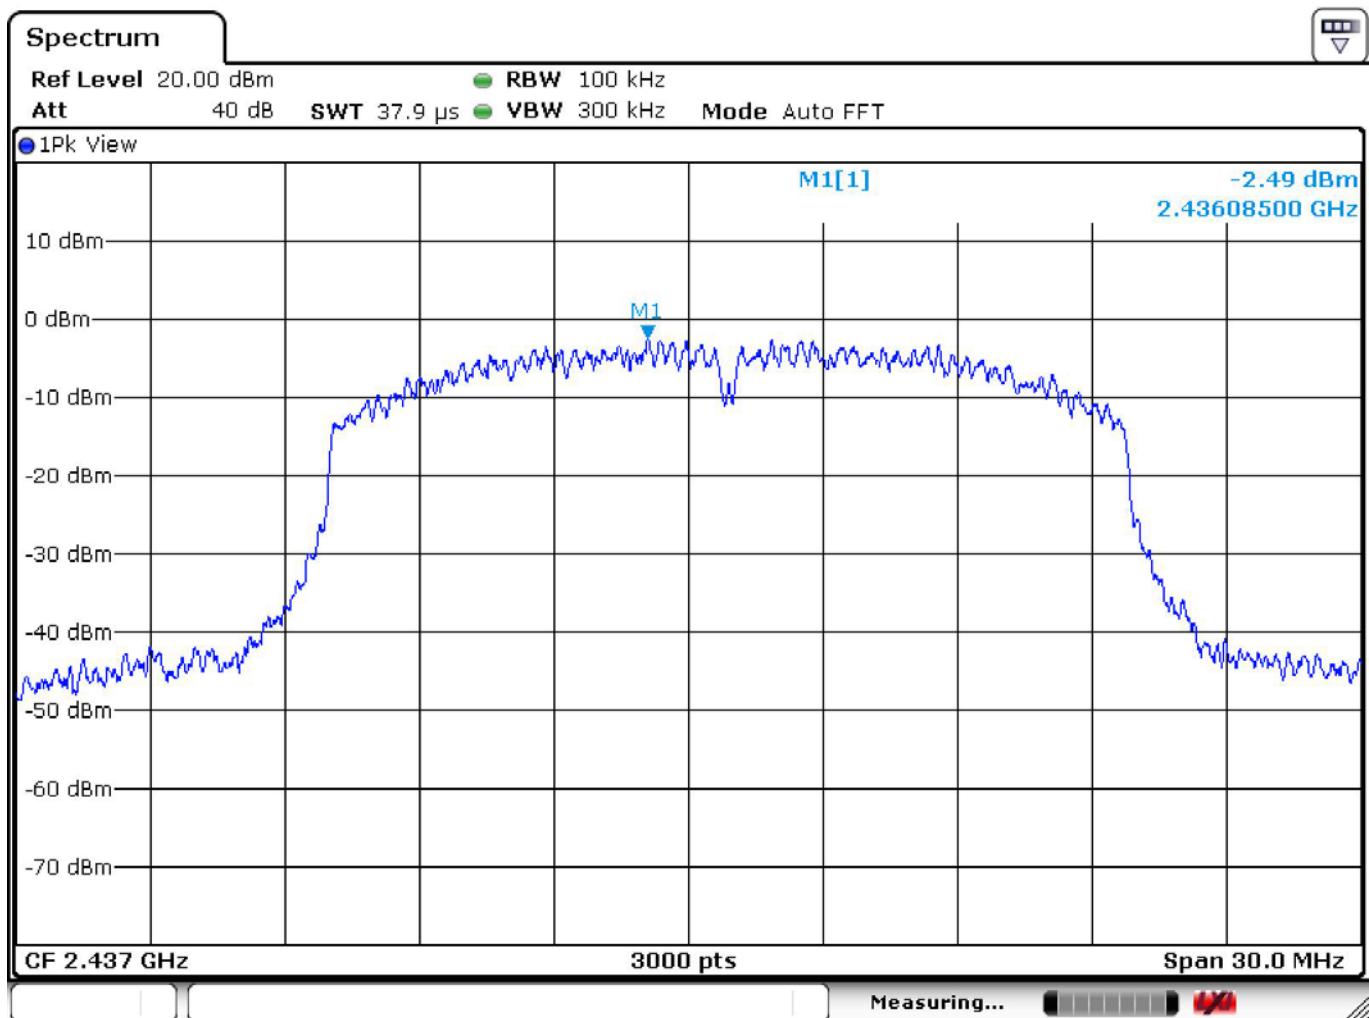


Power Spectral Density Test Data

Temperature	:	26.4°C	Humidity	:	35%
Test Date	:	08-Oct-2014	Tested by	:	Kidd Liao
Test Mode	:	Mode 9	Channel	:	CH11 (2462 MHz)

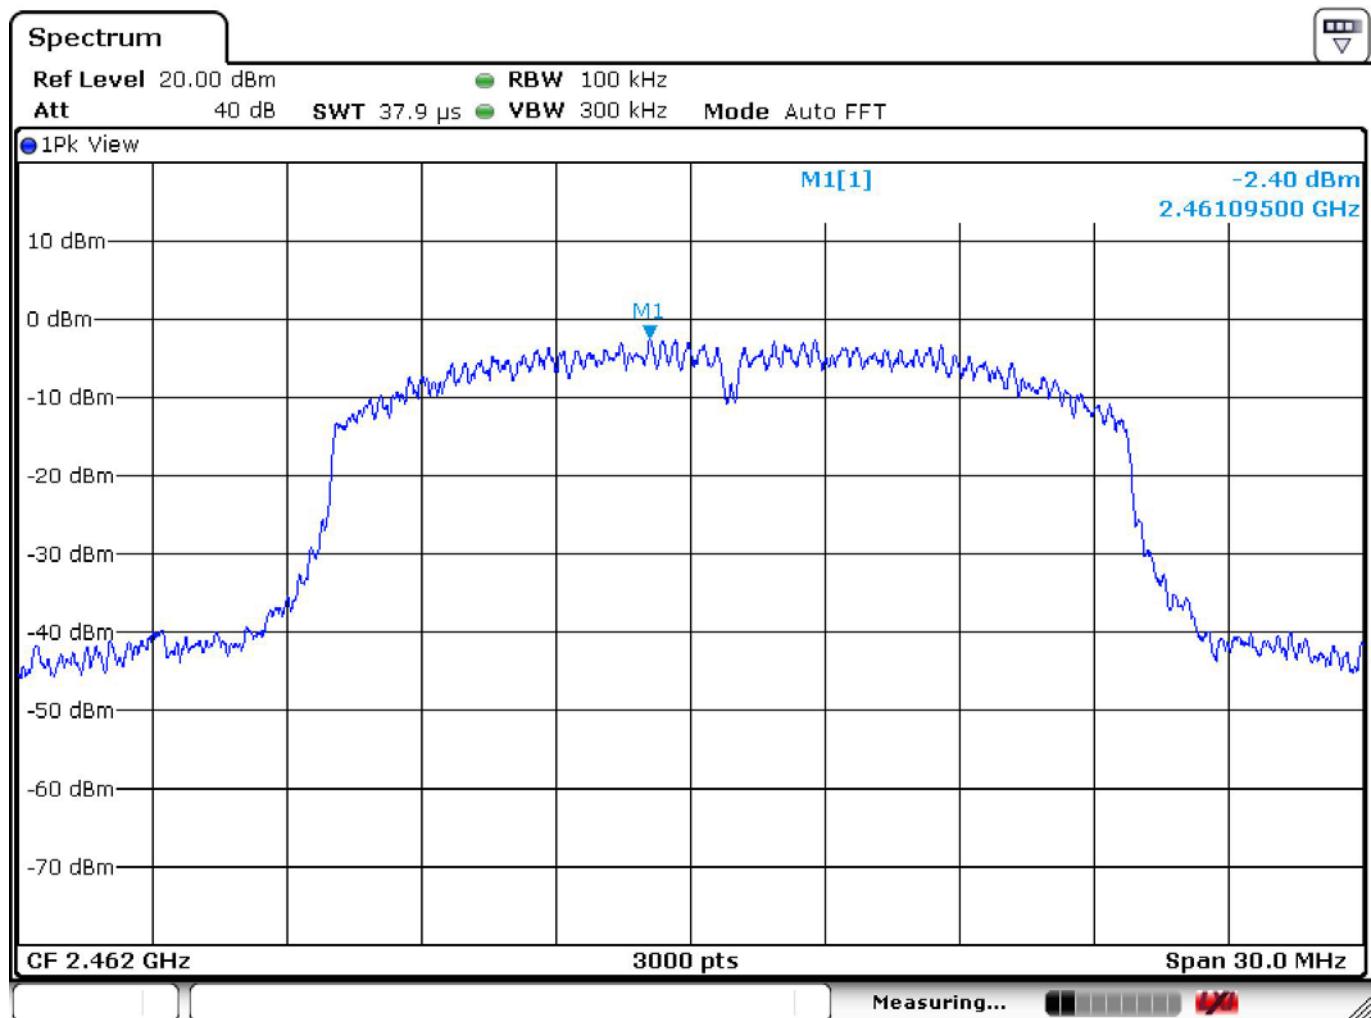


Power Spectral Density Test Data

Temperature	:	26.4°C	Humidity	:	35%
Test Date	:	08-Oct-2014	Tested by	:	Kidd Liao
Test Mode	:	Mode 10	Channel	:	CH03 (2422 MHz)

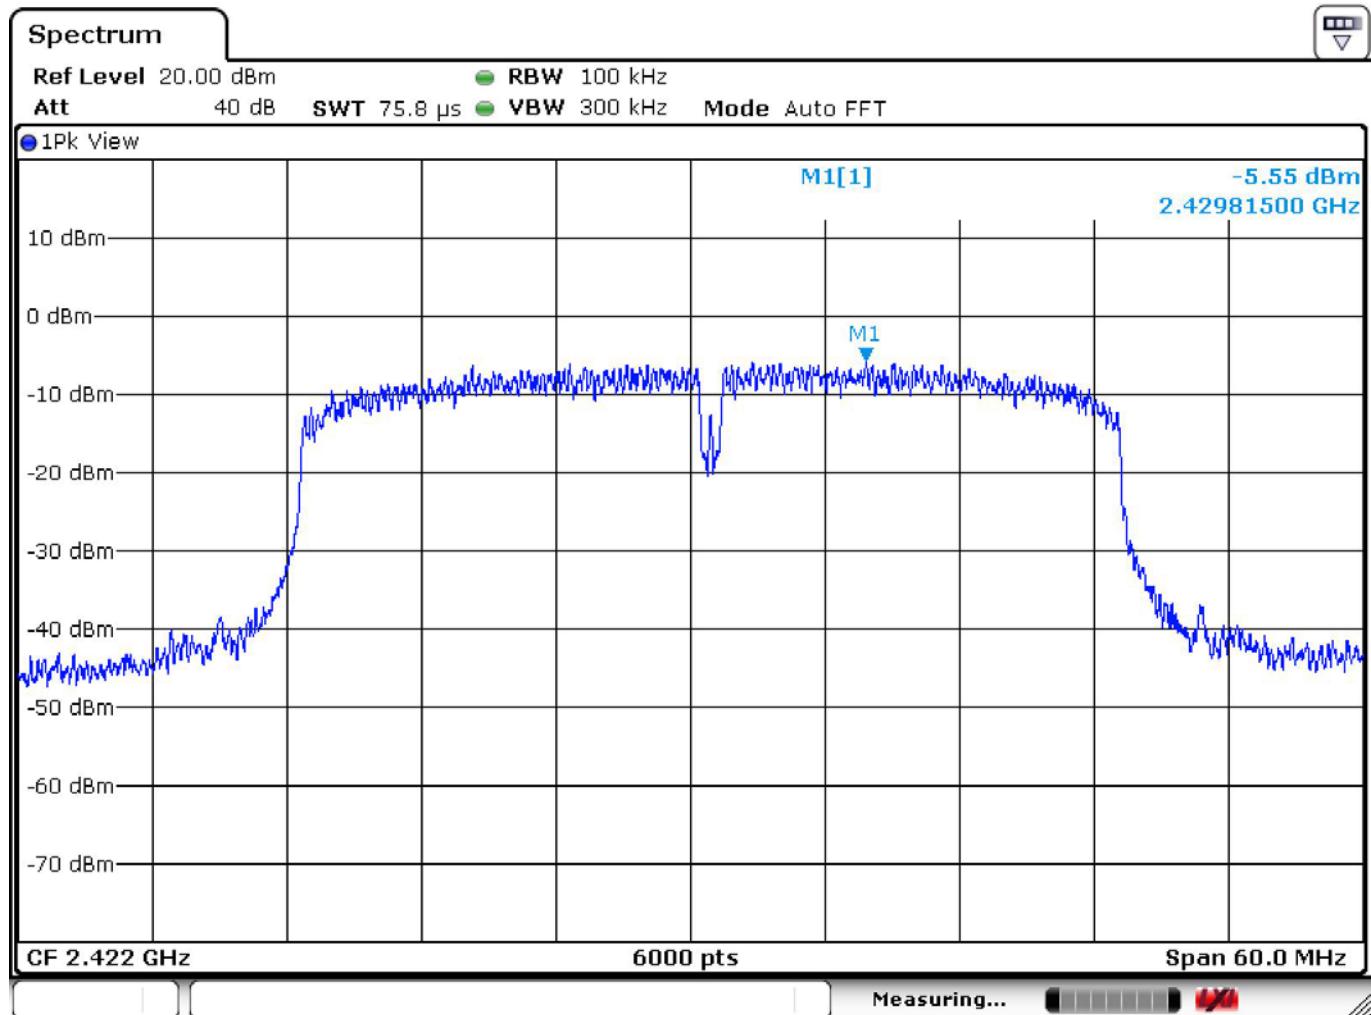


Power Spectral Density Test Data

Temperature	:	26.4°C	Humidity	:	35%
Test Date	:	08-Oct-2014	Tested by	:	Kidd Liao
Test Mode	:	Mode 11	Channel	:	CH06 (2437 MHz)

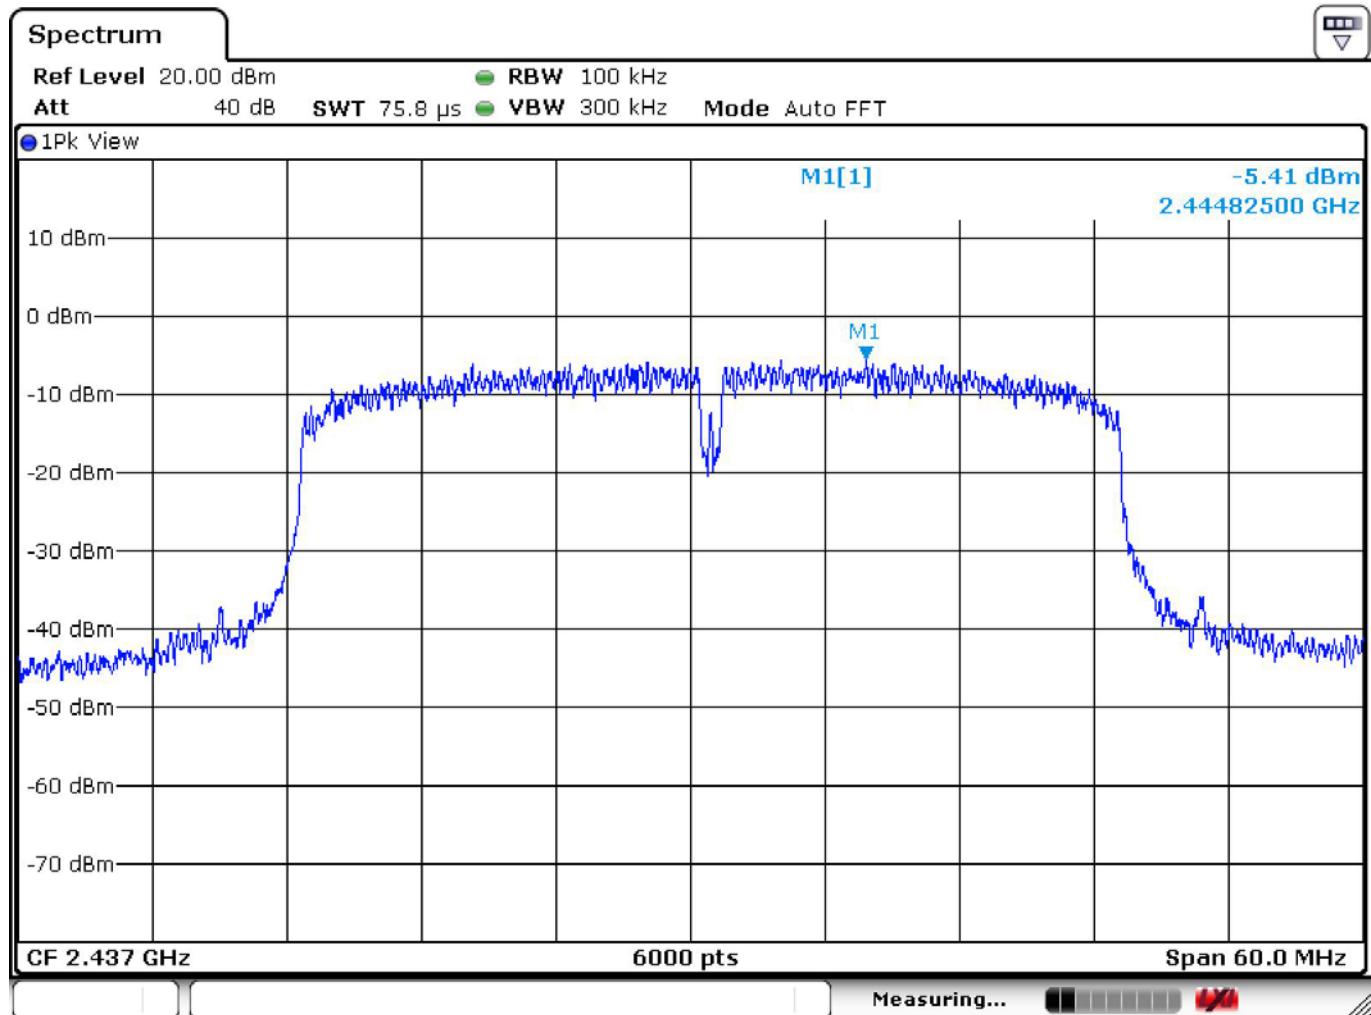

Power Spectral Density Test Data

Temperature	:	26.4°C	Humidity	:	35%
Test Date	:	08-Oct-2014	Tested by	:	Kidd Liao
Test Mode	:	Mode 12	Channel	:	CH09 (2452 MHz)

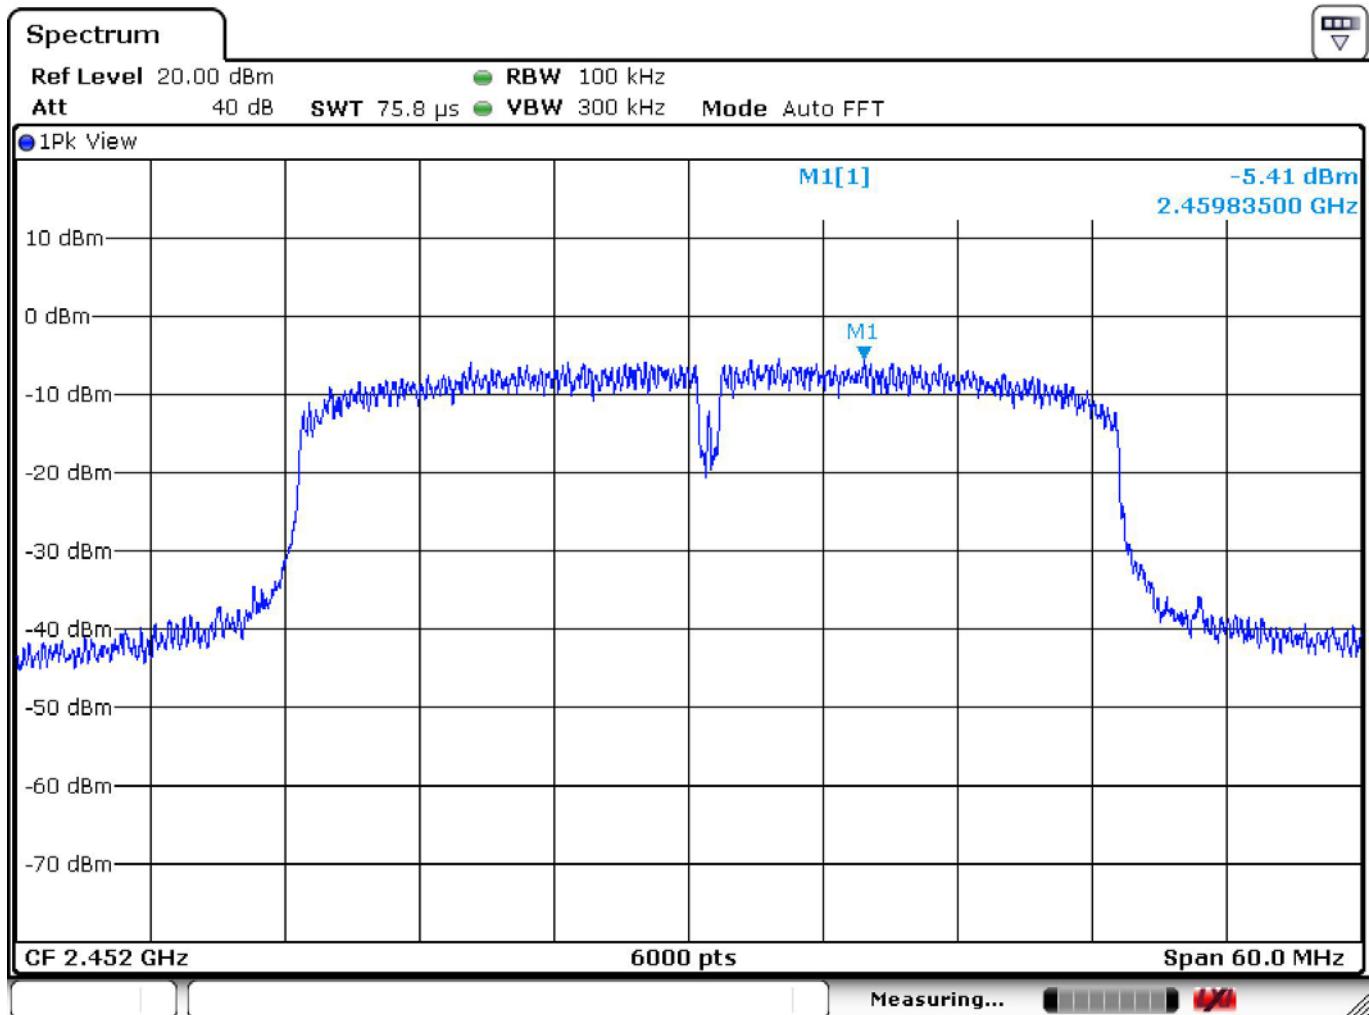

8 Antenna requirement

8.1 Limit (§ 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

8.2 Test Result

Compliance.

The intentional radiator must be professionally installed.