

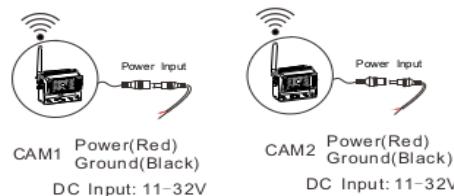


User Guide



I. Digital Wireless camera appearance and dimension(Unit: mm)

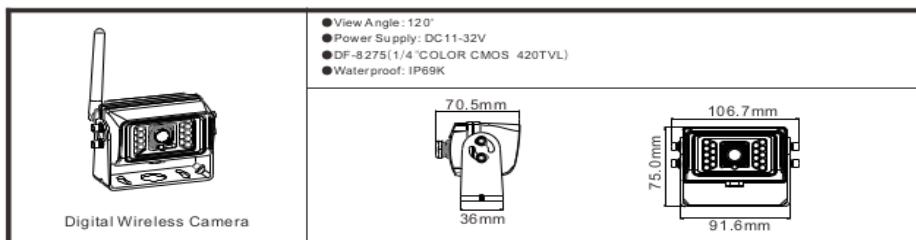

II. Digital wireless camera technical Parameters

CAMERA	COLOR CMOS CAMERA	
Image Pick-up Device	1/4"COLOR CMOS	
Picture Elements	PAL:640(H)×480(V)	NTCS:640(H)×480(V)
Horizontal Resolution	420TVL	
Minimum illumination	0 Lux At Night (IR LED ON)	
Lens furnished	Board lens 2.5mm	
Operation Frequency	2400 – 2483.5 MHz	
Modulation	2.4GHz FSK/GFSK	
Power Supply	DC11~32V	
Gain Control	Automatic	
S/N Ratio	More than 48db	
White Balance	Automatic	
Electronic Shutter Control	Automatic	
Transmit Power	17 dbm	
Operating Temperature	-20°C~+60°C	
Storage Temperature	-30°C~+80°C	

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.