



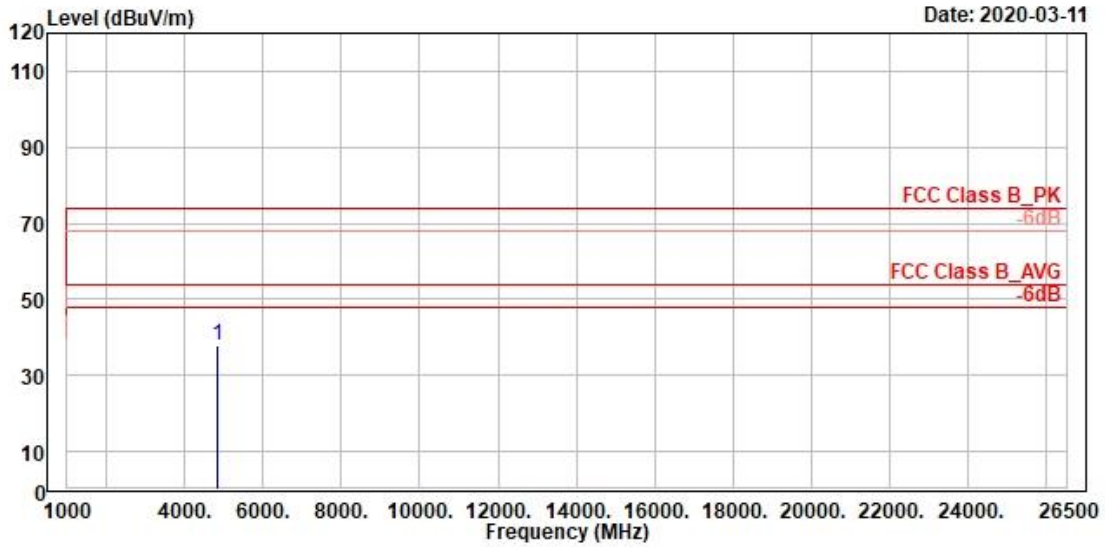

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK horizontal
 Test Engineer : Simon Tsai
 Model NO : WFI32E01PC
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : g_TX_2412MHz
 Power setting : 72

Sample & Ant info.in Appendix: #6 PCB Antenna


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	Level	Factor	Line	Limit			
		dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4824.00	37.85	47.23	-9.38	74.00	-36.15	100	133 Peak horizontal

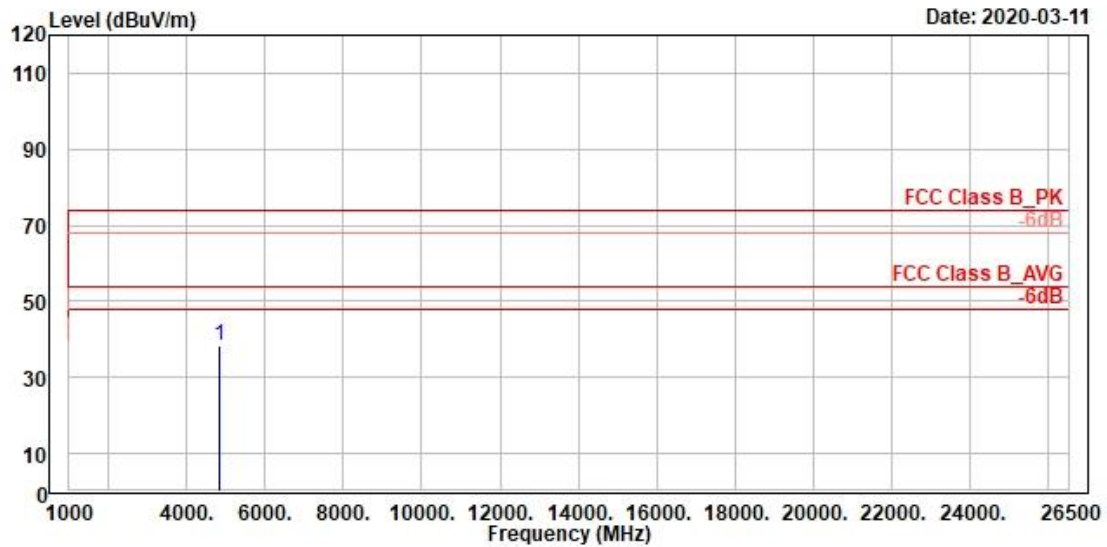

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK vertical
 Test Engineer : Simon Tsai
 Model NO : WFI32E01PC
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : g_TX_2412MHz
 Power setting : 72

Sample & Ant info.in Appendix: #6 PCB Antenna


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	Level	Factor	Line	Limit			
		dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4824.00	38.38	47.76	-9.38	74.00	-35.62	300	76 Peak vertical

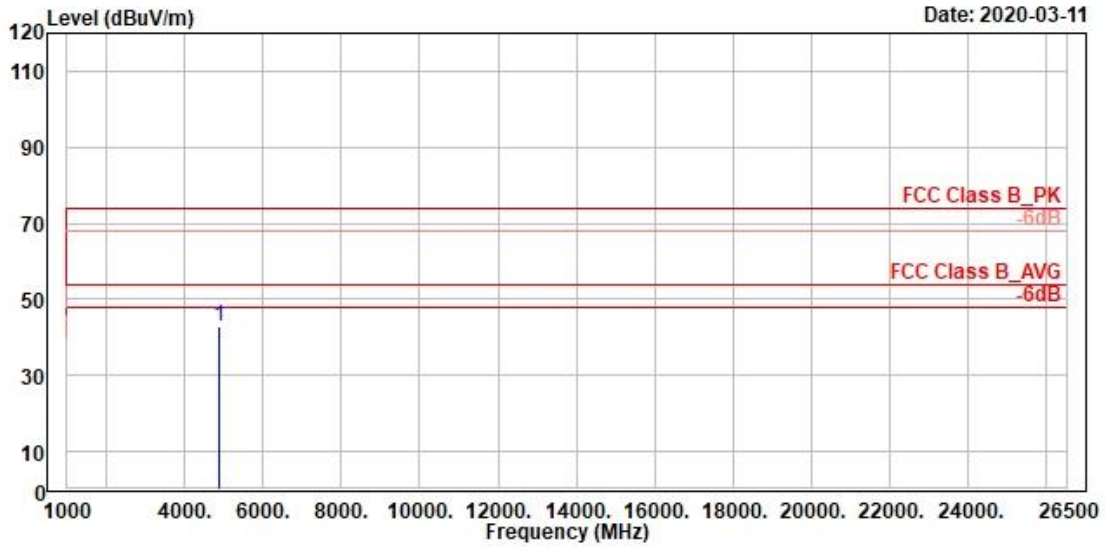

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01PC
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2437MHz
Power setting : 87

Sample & Ant info.in Appendix: #6 PCB Antenna


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4874.00	42.85	52.15	-9.30	74.00	-31.15	100	70 Peak horizontal

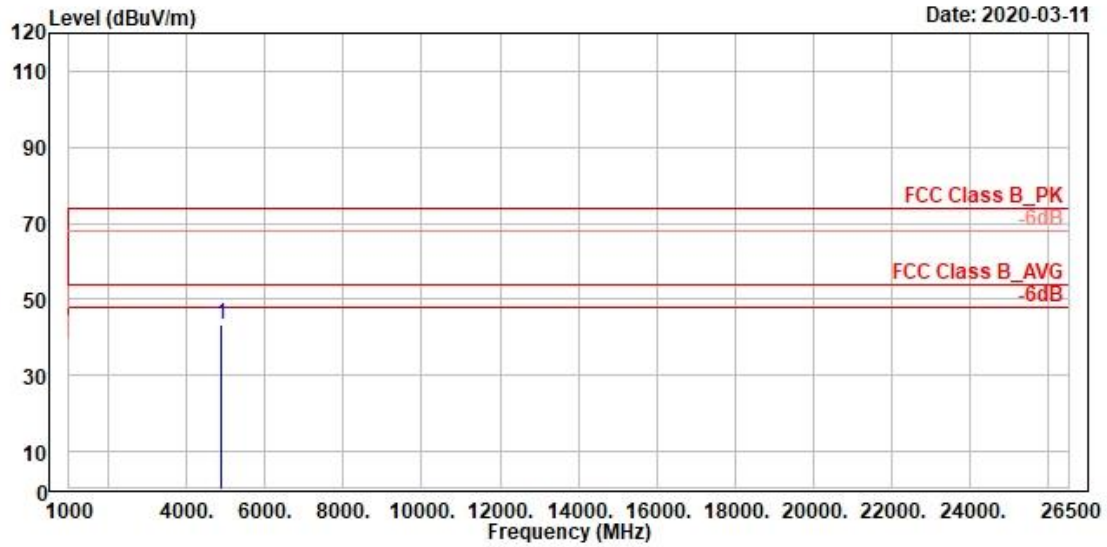

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK vertical
 Test Engineer : Simon Tsai
 Model NO : WFI32E01PC
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : g_TX_2437MHz
 Power setting : 87

Sample & Ant info.in Appendix: #6 PCB Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	Level	Factor	Line	Limit			
			dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4874.00	43.15	52.45	-9.30	74.00	-30.85	200	121 Peak	vertical

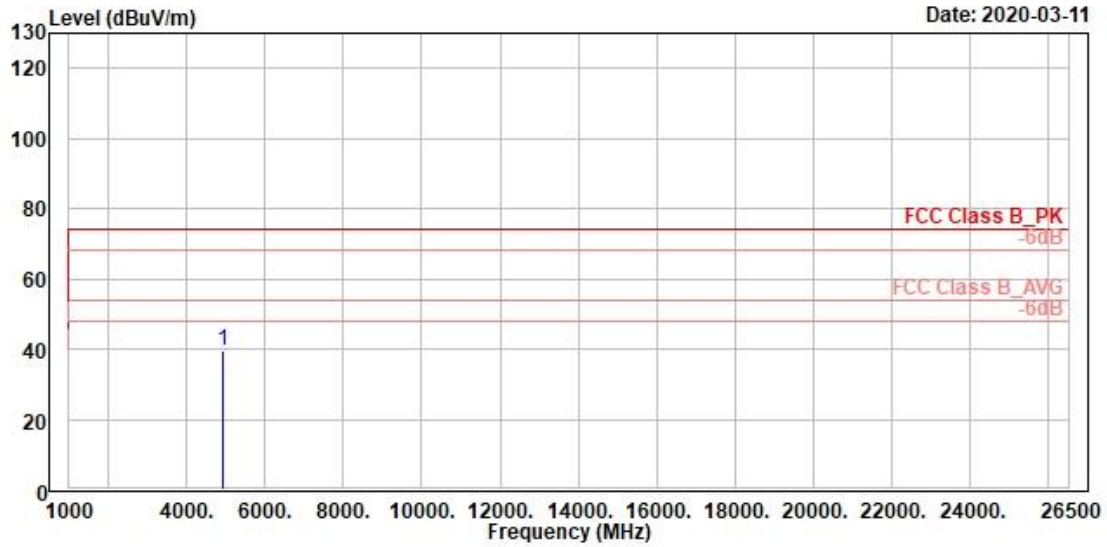

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01PC
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2462MHz
Power setting : 74

Sample & Ant info.in Appendix: #6 PCB Antenna


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	Level	Factor	Line	Limit			
		dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4924.00	39.39	48.61	-9.22	74.00	-34.61	100	129 Peak horizontal

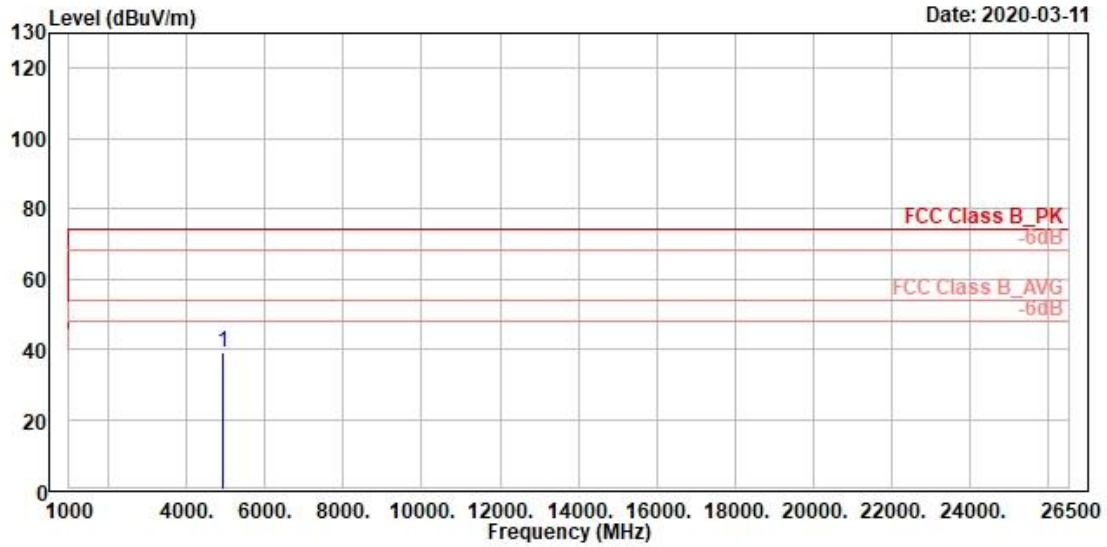

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01PC
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2462MHz
Power setting : 74

Sample & Ant info.in Appendix: #6 PCB Antenna


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	Level	Factor	Line	Limit			
		dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4924.00	39.12	48.34	-9.22	74.00	-34.88	100	24 Peak vertical

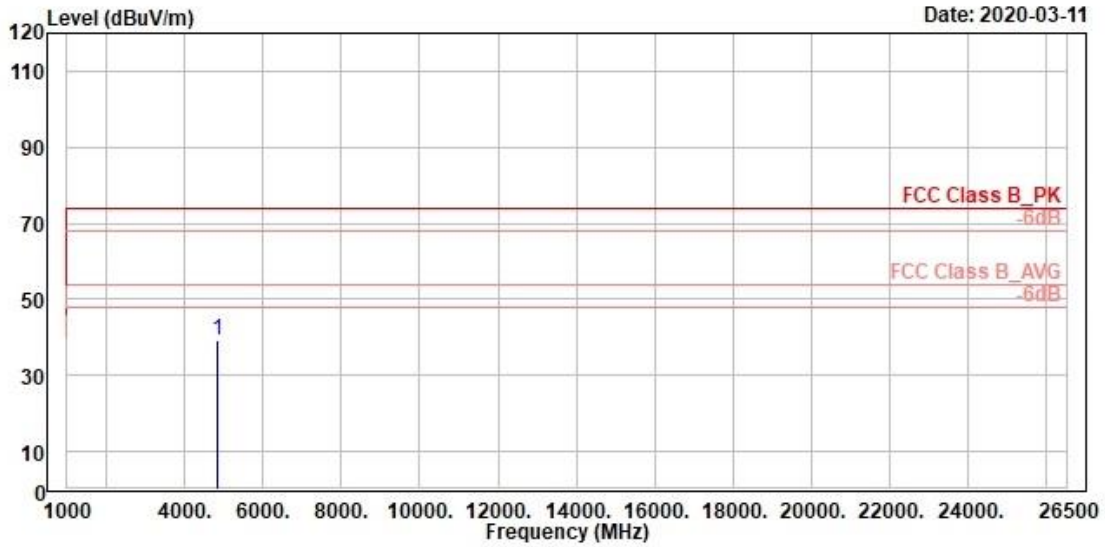

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK horizontal
 Test Engineer : Simon Tsai
 Model NO : WFI32E01PC
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : n20_TX_2412MHz
 Power setting : 68

Sample & Ant info.in Appendix: #6 PCB Antenna


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	Level	Factor	Line	Limit			
		dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4824.00	39.02	48.40	-9.38	74.00	-34.98	100	15 Peak horizontal

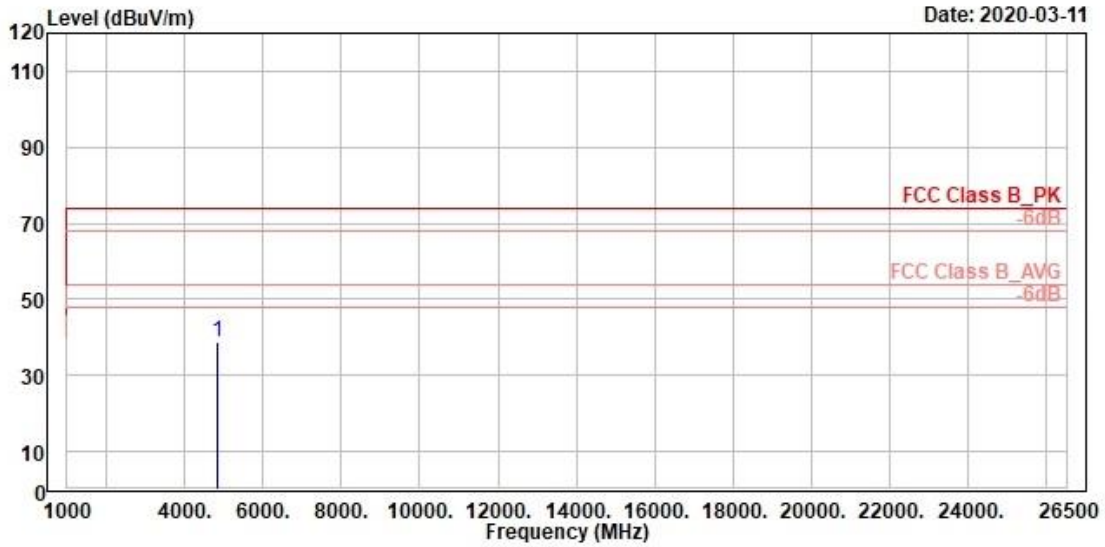

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01PC
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2412MHz
Power setting : 68

Sample & Ant info.in Appendix: #6 PCB Antenna


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	Level	Factor	Line	Limit			
		dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4824.00	38.81	48.19	-9.38	74.00	-35.19	275	360 Peak vertical

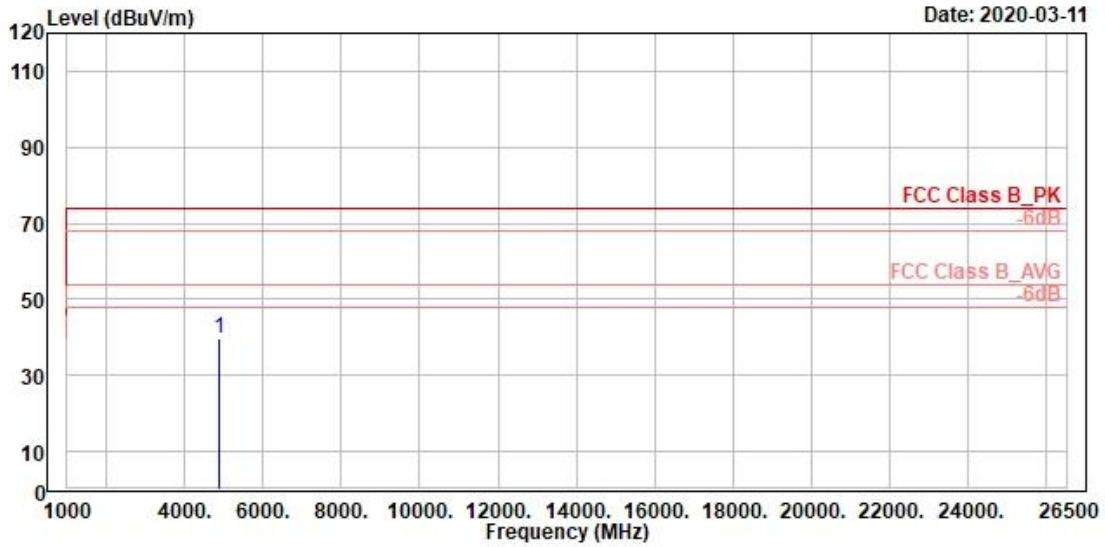

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK horizontal
 Test Engineer : Simon Tsai
 Model NO : WFI32E01PC
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : n20_TX_2437MHz
 Power setting : 87

Sample & Ant info.in Appendix: #6 PCB Antenna


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4874.00	39.59	48.89	-9.30	74.00	-34.41	100	78	Peak	horizontal

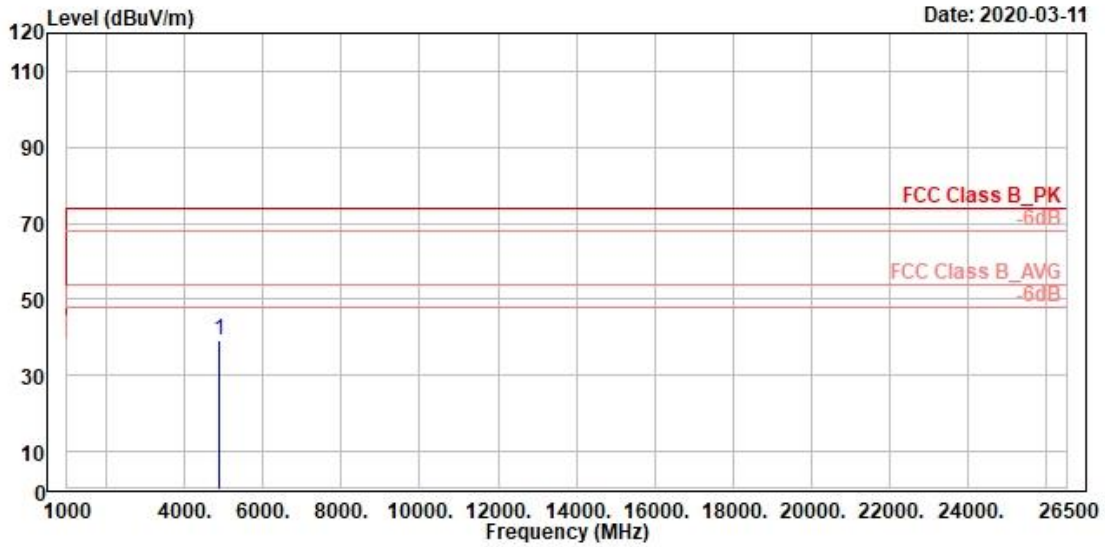

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK vertical
 Test Engineer : Simon Tsai
 Model NO : WFI32E01PC
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : n20_TX_2437MHz
 Power setting : 87

Sample & Ant info.in Appendix: #6 PCB Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	Level	Factor	Line	Limit			
			dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4874.00	39.30	48.60	-9.30	74.00	-34.70	100	291 Peak	vertical

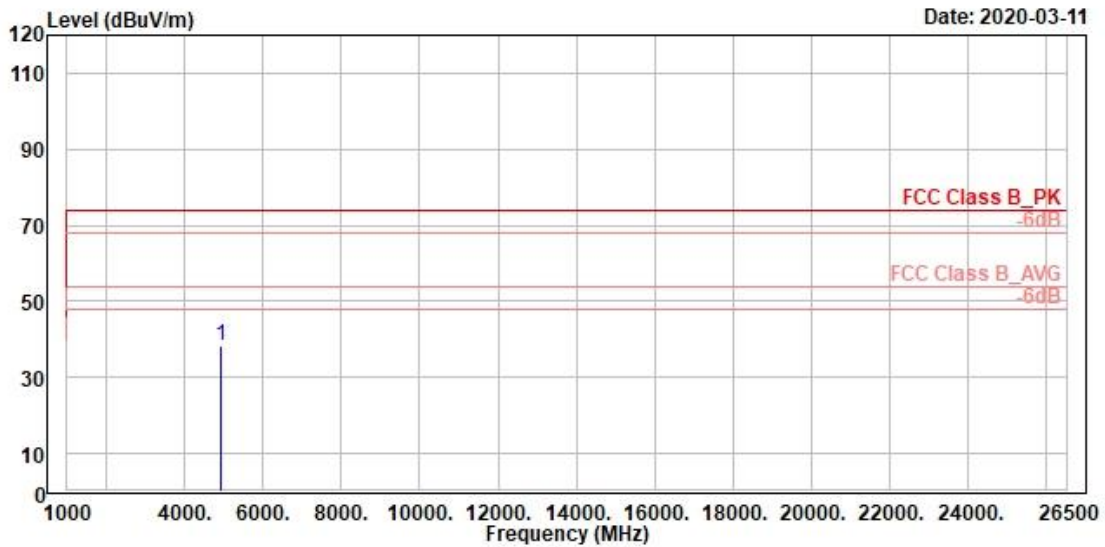

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK horizontal
 Test Engineer : Simon Tsai
 Model NO : WFI32E01PC
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : n20_TX_2462MHz
 Power setting : 71

Sample & Ant info.in Appendix: #6 PCB Antenna

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4924.00	38.12	47.34	-9.22	74.00	-35.88	300	115 Peak horizontal

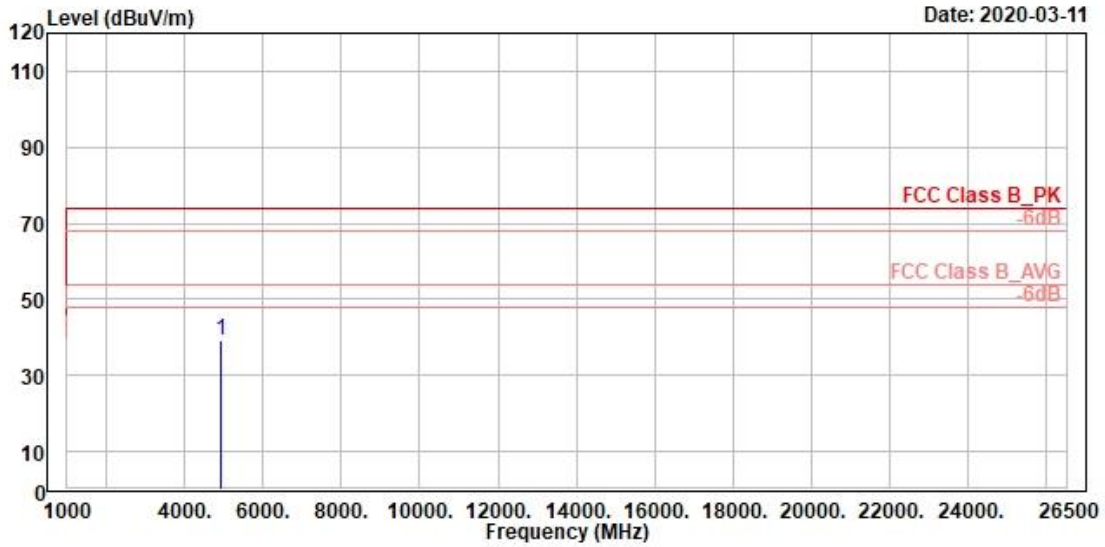

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01PC
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2462MHz
Power setting : 71


Sample & Ant info.in Appendix: #6 PCB Antenna

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	Level	Factor	Line	Limit			
		dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4924.00	39.08	48.30	-9.22	74.00	-34.92	100	56 Peak vertical

Spurious Emissions, RX Mode, 1GHz-26.5GHz, #6




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

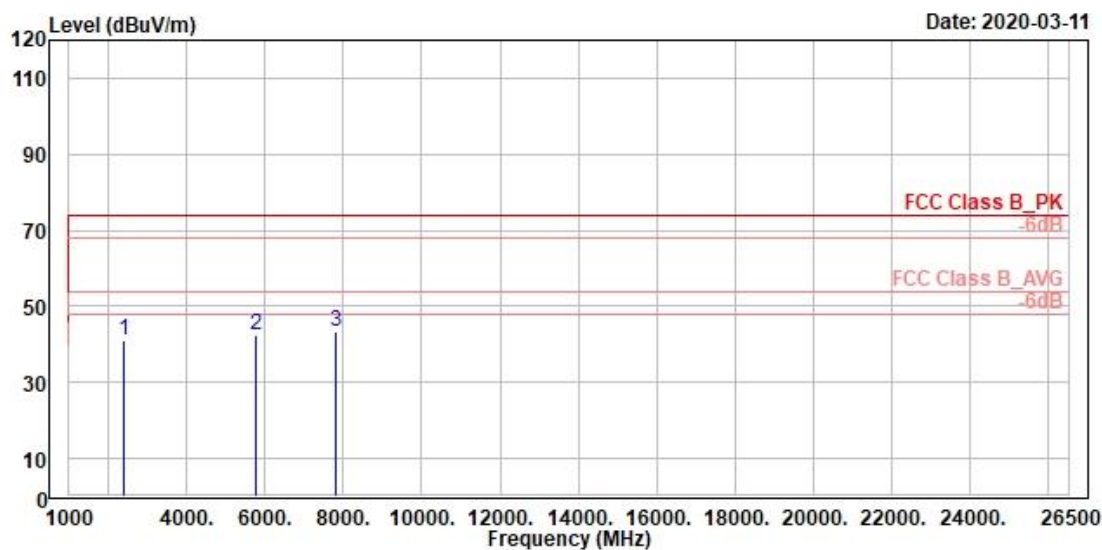

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01PC
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_RX_2412MHz

Sample & Ant info.in Appendix: #6 PCB Antenna

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	Level	Line	Limit				
			Factor						
			dB/m	dBuV/m	dB	cm	deg		
1	2397.00	41.19	55.13	-13.94	74.00	-32.81	200	248 Peak	horizontal
2	5764.00	42.26	50.27	-8.01	74.00	-31.74	100	360 Peak	horizontal
3	7827.00	43.49	49.77	-6.28	74.00	-30.51	100	316 Peak	horizontal

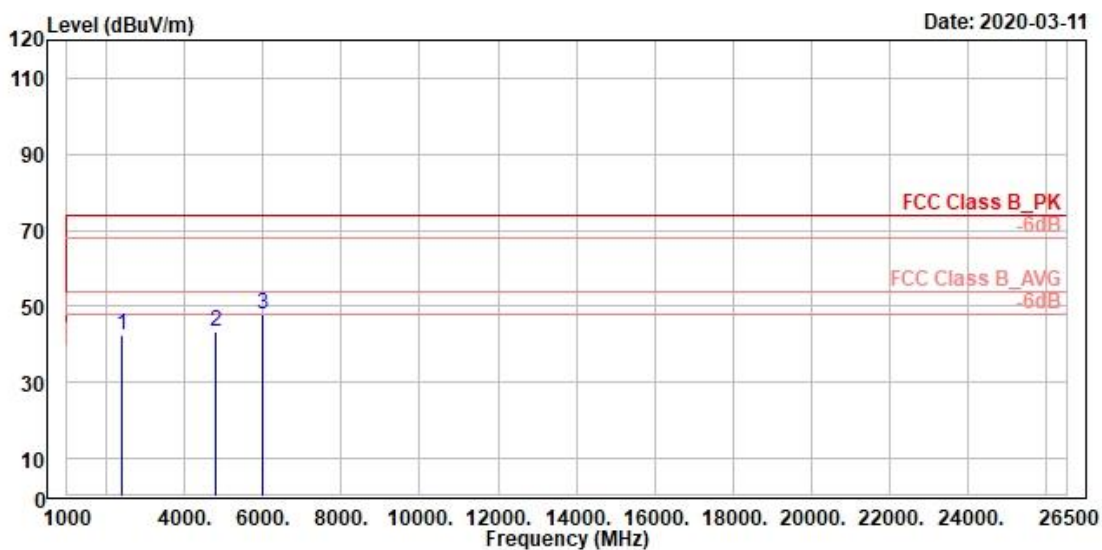


Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01PC
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_RX_2412MHz
Sample & Ant info.in Appendix: #6 PCB Antenna

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	Level	Line	Limit				
			Factor			cm	deg		
1	2393.00	42.58	56.53	-13.95	74.00	-31.42	100	361 Peak	vertical
2	4777.00	43.41	52.83	-9.42	74.00	-30.59	100	339 Peak	vertical
3	6000.00	47.82	55.68	-7.86	74.00	-26.18	200	114 Peak	vertical

Spurious Emissions, Band Edges, #61




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

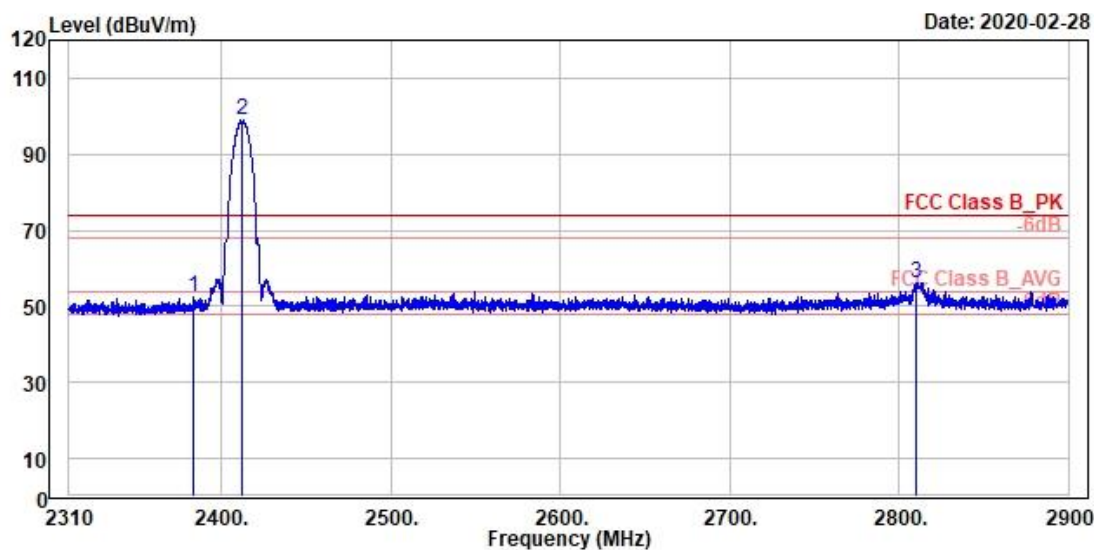


Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2412MHz
Power setting : 62

Sample & Ant info.in Appendix: #61 External Antenna

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Line	Limit					
			Factor							
			dB/m	dBuV/m	dB	cm	deg			
1	2383.75	52.62	15.47	37.15	74.00	-21.38	134	207 Peak	Horizontal	
2 *	2412.00	98.97	61.77	37.20	74.00	24.97	134	207 Peak	Horizontal	
3	2810.67	56.29	18.17	38.12	74.00	-17.71	134	207 Peak	Horizontal	

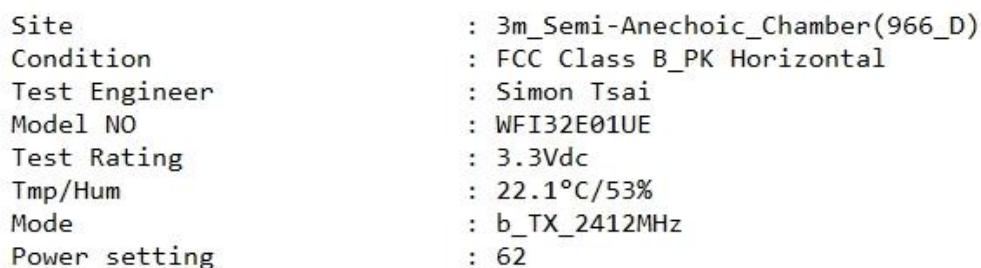


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
	2386.58	40.34	3.19	37.15	54.00	-13.66	134	207	Average	Horizontal	
*	2412.00	96.52	59.32	37.20	54.00	42.52	134	207	Average	Horizontal	
	2811.15	47.50	9.38	38.12	54.00	-6.50	134	207	Average	Horizontal	

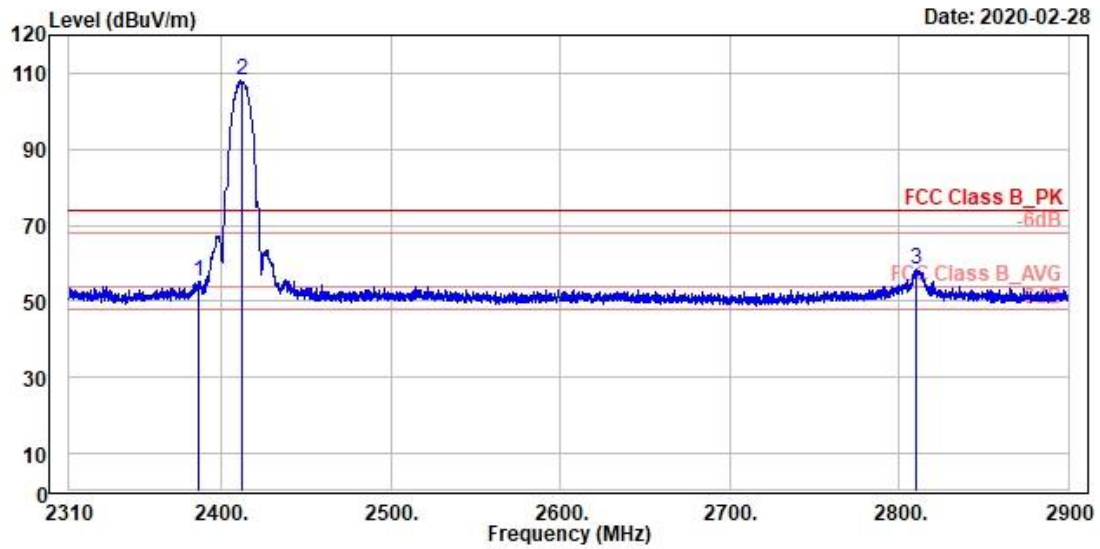

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2412MHz
Power setting : 62

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2386.70	55.30	18.15	37.15	74.00	-18.70	227	26 Peak	Vertical	
2 *	2412.00	108.22	71.02	37.20	74.00	34.22	227	26 Peak	Vertical	
3	2810.67	58.29	20.17	38.12	74.00	-15.71	227	26 Peak	Vertical	

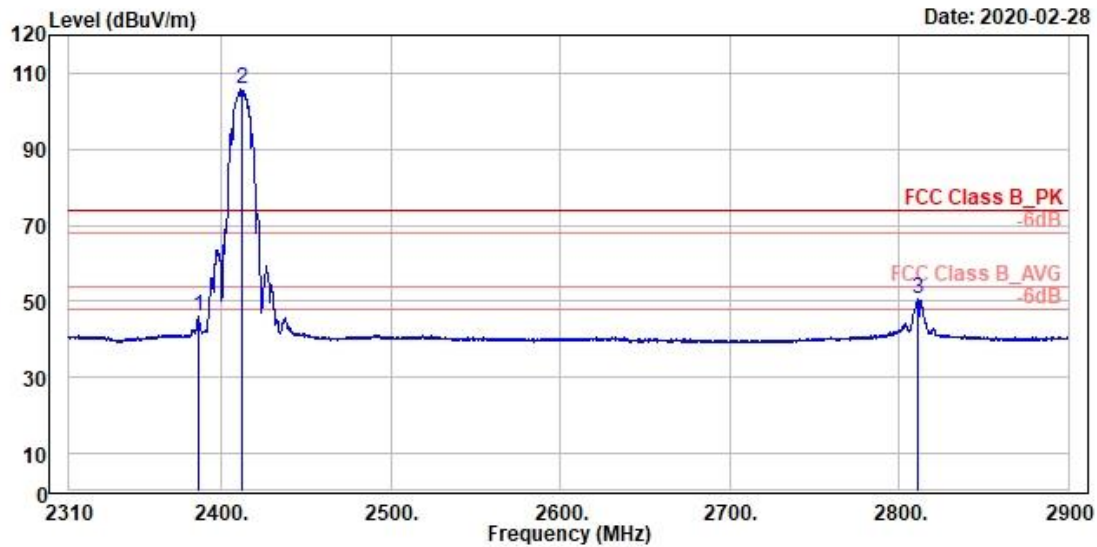

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2412MHz
Power setting : 62

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2386.11	46.04	8.89	37.15	54.00	-7.96	227	26 Average	Vertical	
2 *	2412.00	105.65	68.45	37.20	54.00	51.65	227	26 Average	Vertical	
3 !	2811.26	50.52	12.40	38.12	54.00	-3.48	227	26 Average	Vertical	

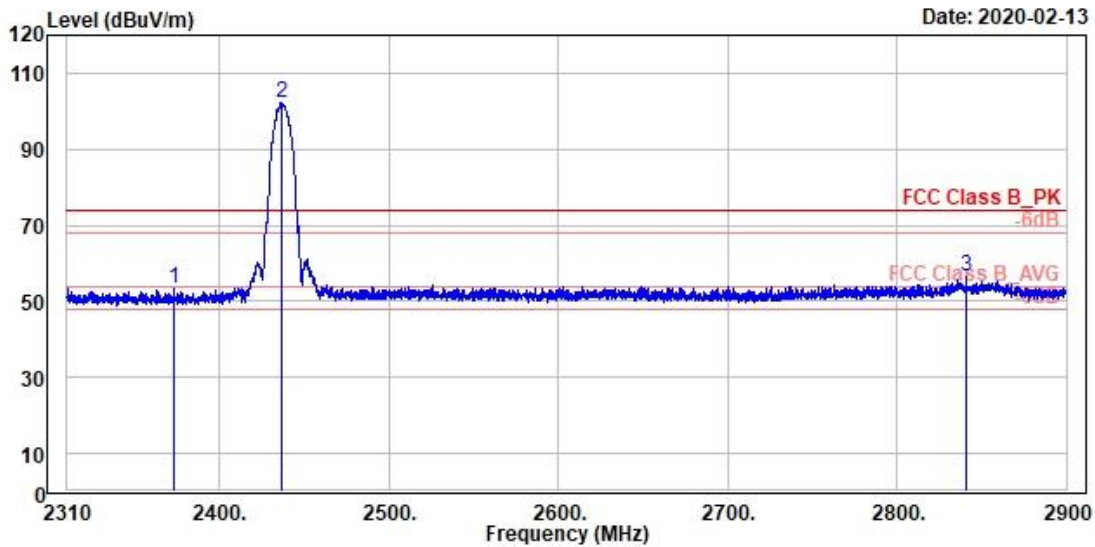

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2437MHz
Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2373.37	53.59	16.44	37.15	74.00	-20.41	168	159 Peak	Horizontal	
2 *	2437.00	102.03	64.70	37.33	74.00	28.03	168	159 Peak	Horizontal	
3	2841.24	56.40	18.30	38.10	74.00	-17.60	168	159 Peak	Horizontal	

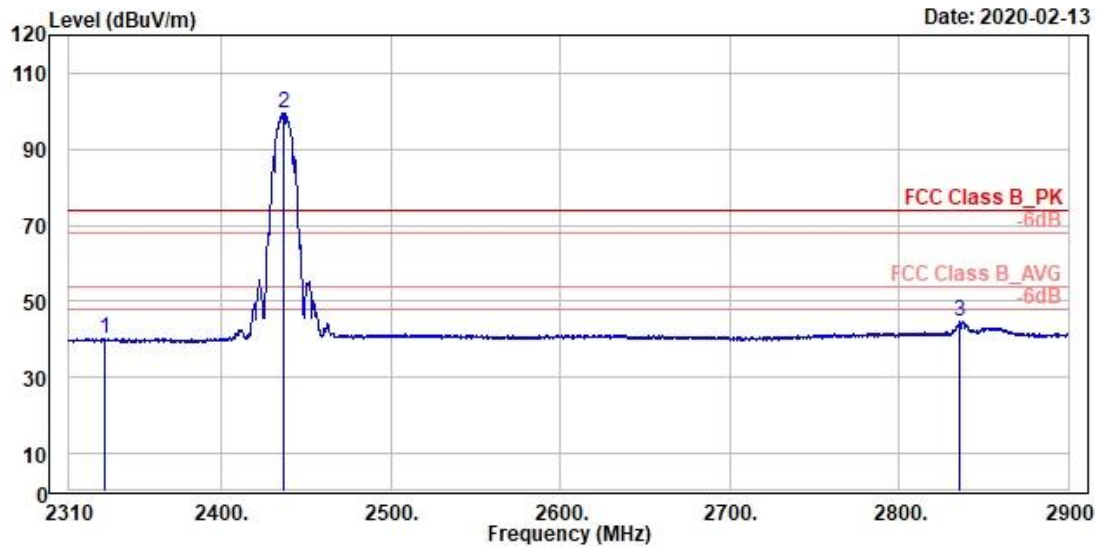

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2437MHz
Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2331.12	40.15	3.00	37.15	54.00	-13.85	168	159 Average	Horizontal	
2 *	2437.00	99.49	62.16	37.33	54.00	45.49	168	159 Average	Horizontal	
3	2836.04	44.94	6.84	38.10	54.00	-9.06	168	159 Average	Horizontal	

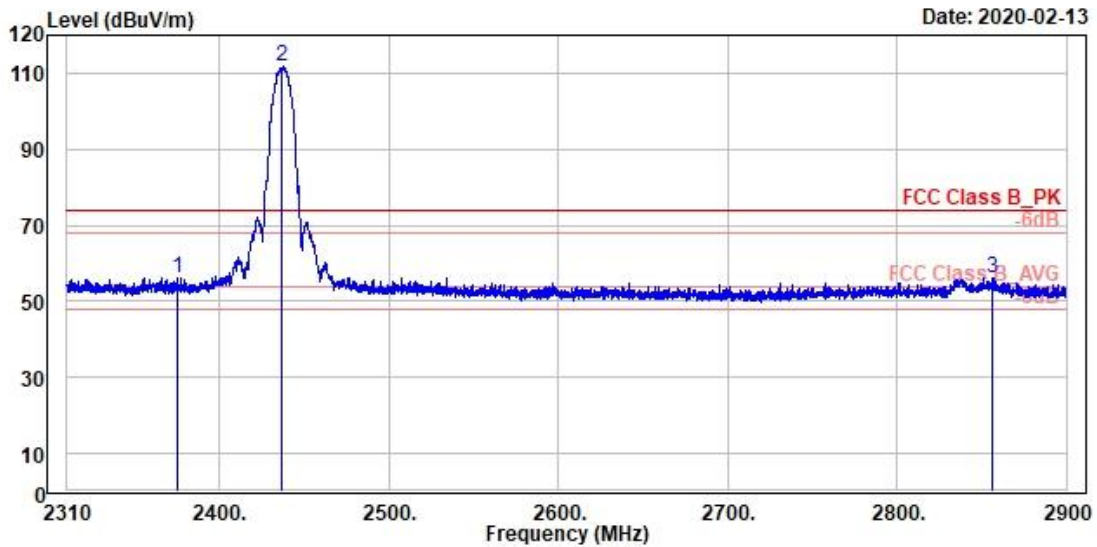

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2437MHz
Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2375.25	56.26	19.10	37.16	74.00	-17.74	100	111 Peak	Vertical	
2 *	2437.00	111.66	74.33	37.33	74.00	37.66	100	111 Peak	Vertical	
3	2856.46	56.06	17.98	38.08	74.00	-17.94	100	111 Peak	Vertical	

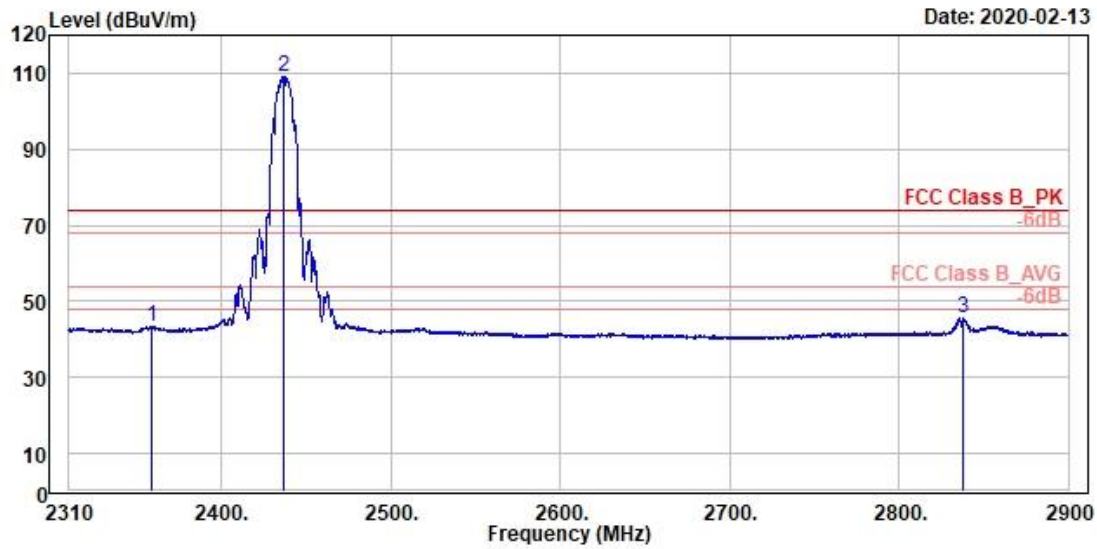

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2437MHz
Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2358.50	43.38	6.22	37.16	54.00	-10.62	100	111 Average	Vertical	
2 *	2437.00	109.12	71.79	37.33	54.00	55.12	100	111 Average	Vertical	
3	2837.93	45.52	7.43	38.09	54.00	-8.48	100	111 Average	Vertical	

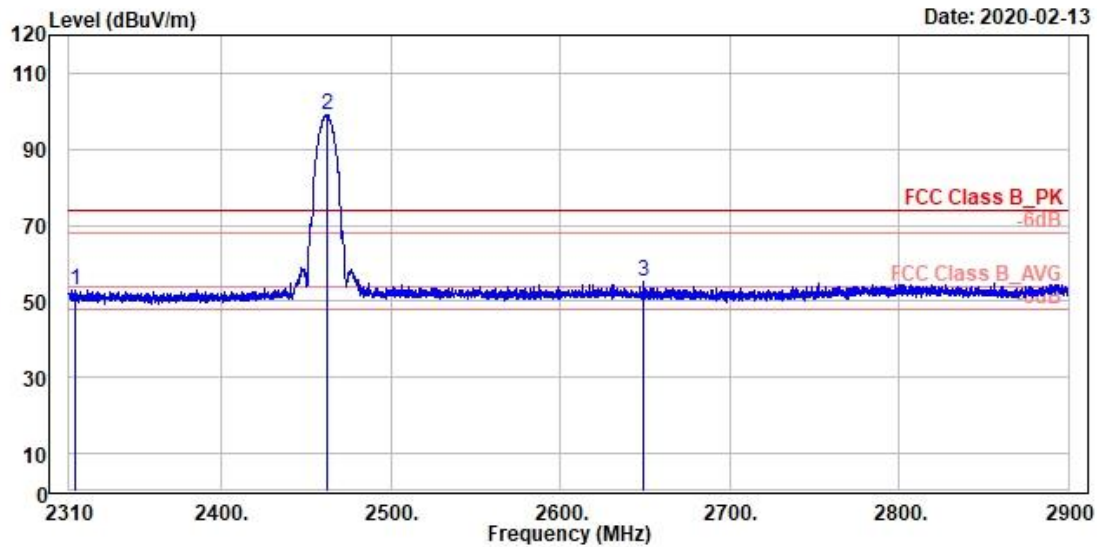

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK Horizontal
 Test Engineer : Simon Tsai
 Model NO : WFI32E01UE
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : b_TX_2462MHz
 Power setting : 66

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2313.30	52.92	15.79	37.13	74.00	-21.08	215	166 Peak	Horizontal	
2 *	2462.00	99.08	61.62	37.46	74.00	25.08	215	166 Peak	Horizontal	
3	2649.01	55.13	17.58	37.55	74.00	-18.87	215	166 Peak	Horizontal	

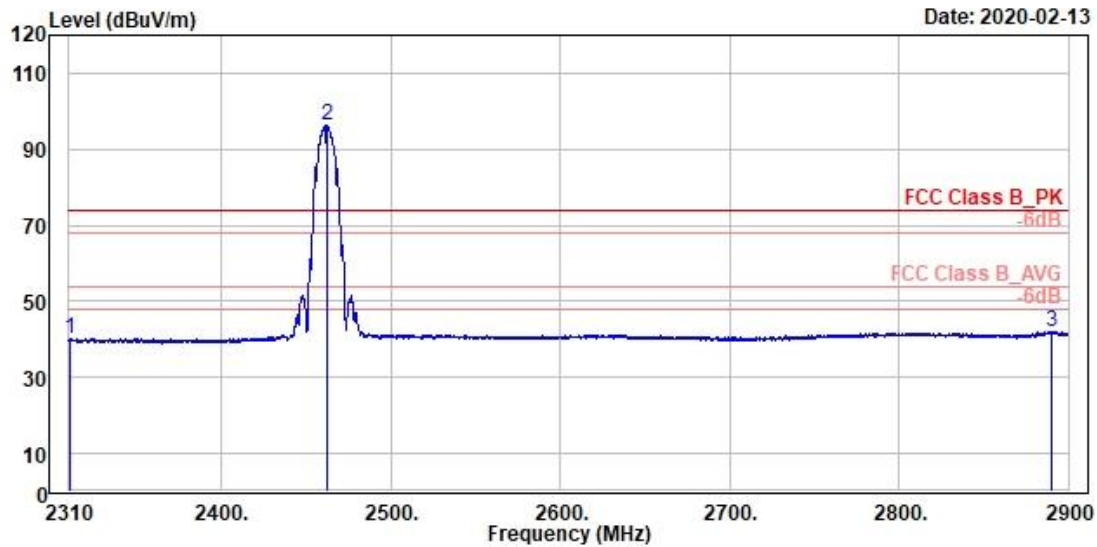

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2462MHz
Power setting : 66

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2310.35	40.19	3.07	37.12	54.00	-13.81	215	166 Average	Horizontal	
2 *	2462.00	96.42	58.96	37.46	54.00	42.42	215	166 Average	Horizontal	
3	2889.85	42.00	3.94	38.06	54.00	-12.00	215	166 Average	Horizontal	

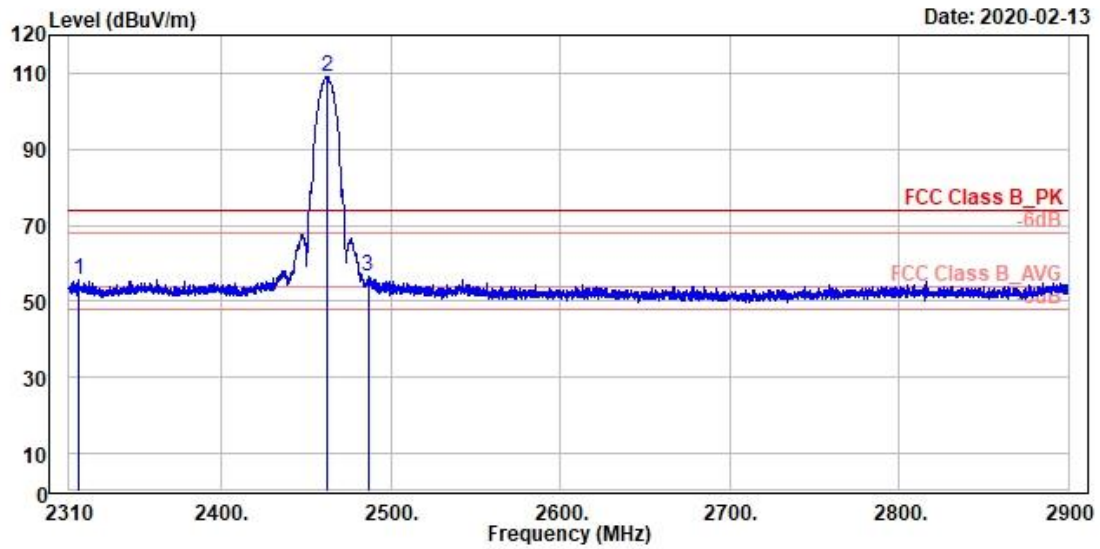

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2462MHz
Power setting : 66

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2315.90	55.64	18.51	37.13	74.00	-18.36	136	113 Peak	Vertical	
2 *	2462.00	109.04	71.58	37.46	74.00	35.04	136	113 Peak	Vertical	
3	2486.53	56.44	18.85	37.59	74.00	-17.56	136	113 Peak	Vertical	

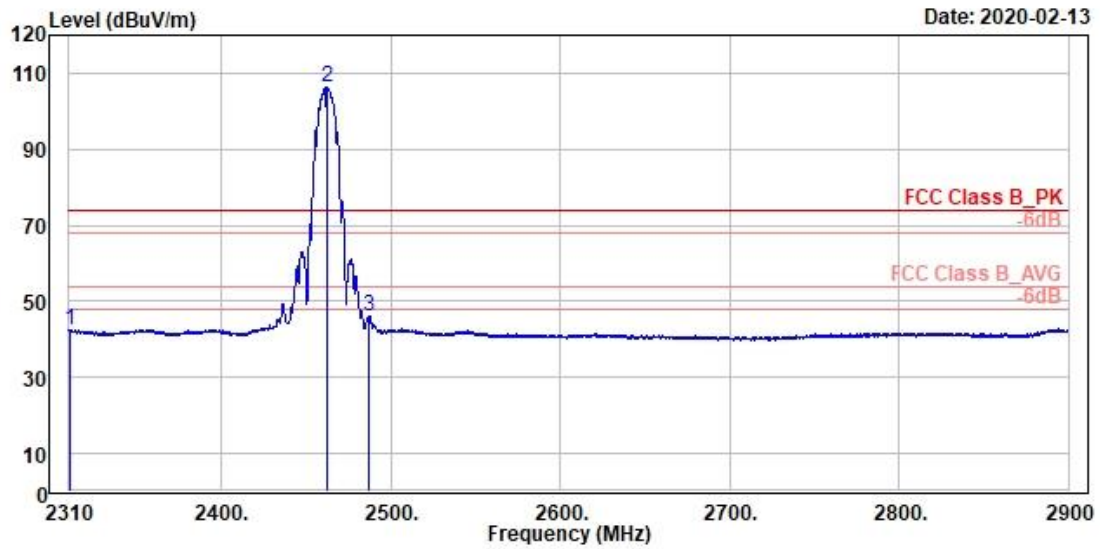

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2462MHz
Power setting : 66

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2310.35	42.53	5.41	37.12	54.00	-11.47	136	113 Average	Vertical	
2 *	2462.00	106.52	69.06	37.46	54.00	52.52	136	113 Average	Vertical	
3	2487.35	46.13	8.54	37.59	54.00	-7.87	136	113 Average	Vertical	

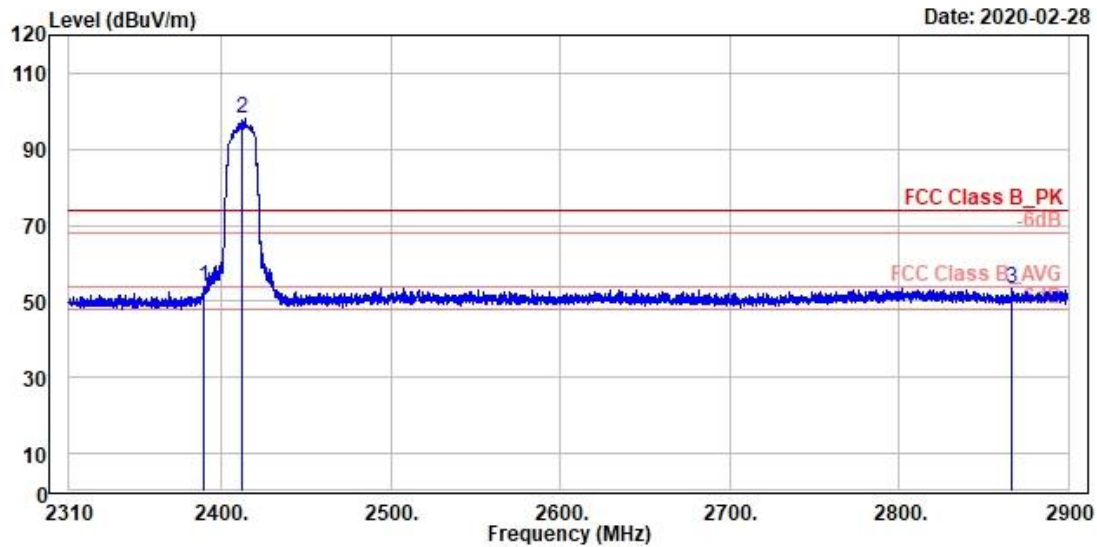

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2412MHz
Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2390.00	53.72	16.58	37.14	74.00	-20.28	177	219 Peak	Horizontal	
2 *	2412.00	97.97	60.77	37.20	74.00	23.97	177	219 Peak	Horizontal	
3	2866.72	53.42	15.34	38.08	74.00	-20.58	177	219 Peak	Horizontal	

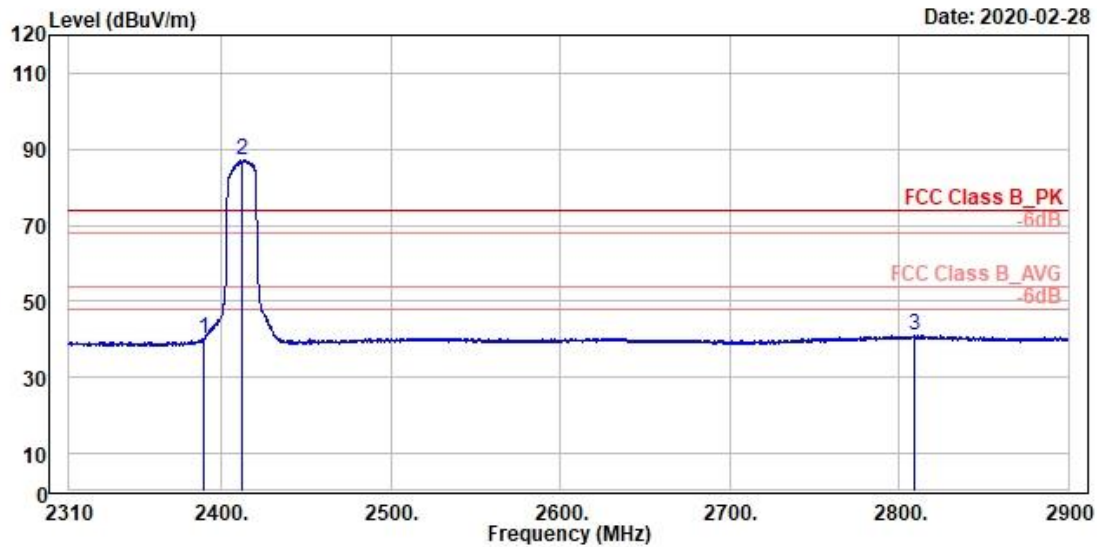

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2412MHz
Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2389.53	40.27	3.13	37.14	54.00	-13.73	177	219 Average	Horizontal	
2 *	2412.00	87.12	49.92	37.20	54.00	33.12	177	219 Average	Horizontal	
3	2809.26	40.93	2.81	38.12	54.00	-13.07	177	219 Average	Horizontal	

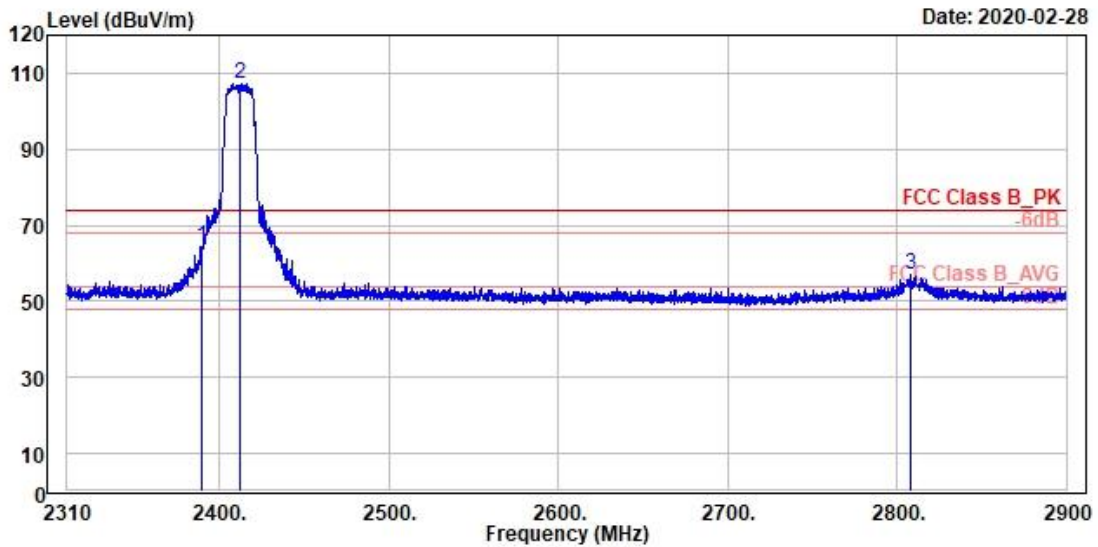

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2412MHz
Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2390.00	64.33	27.19	37.14	74.00	-9.67	100	121 Peak	Vertical	
2 *	2412.00	107.25	70.05	37.20	74.00	33.25	100	121 Peak	Vertical	
3	2807.96	56.87	18.75	38.12	74.00	-17.13	100	121 Peak	Vertical	

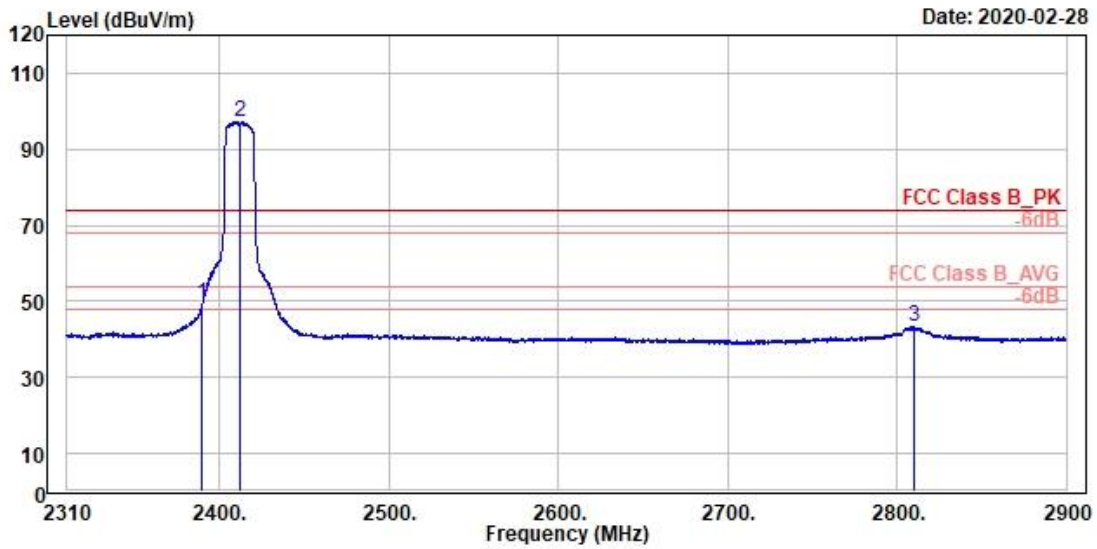

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2412MHz
Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Line	Limit					
			Factor							
1 !	2390.00	49.27	12.13	37.14	54.00	-4.73	100	121 Average	Vertical	
2 *	2412.00	97.21	60.01	37.20	54.00	43.21	100	121 Average	Vertical	
3	2810.67	43.40	5.28	38.12	54.00	-10.60	100	121 Average	Vertical	

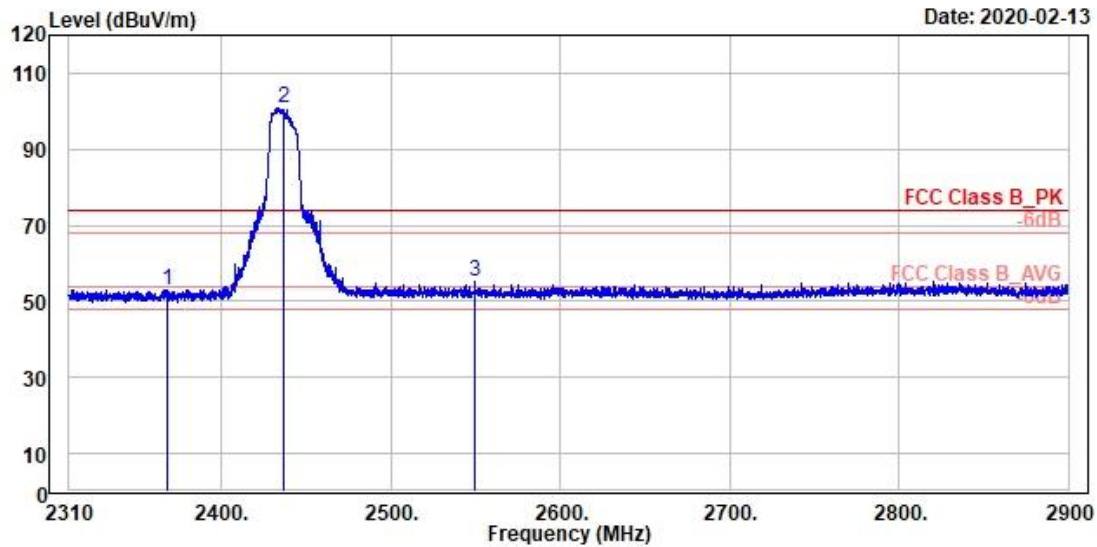

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2437MHz
Power setting : 87

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2367.94	53.05	15.89	37.16	74.00	-20.95	157	212 Peak	Horizontal	
2 *	2437.00	100.87	63.54	37.33	74.00	26.87	157	212 Peak	Horizontal	
3	2549.42	55.31	17.39	37.92	74.00	-18.69	157	212 Peak	Horizontal	

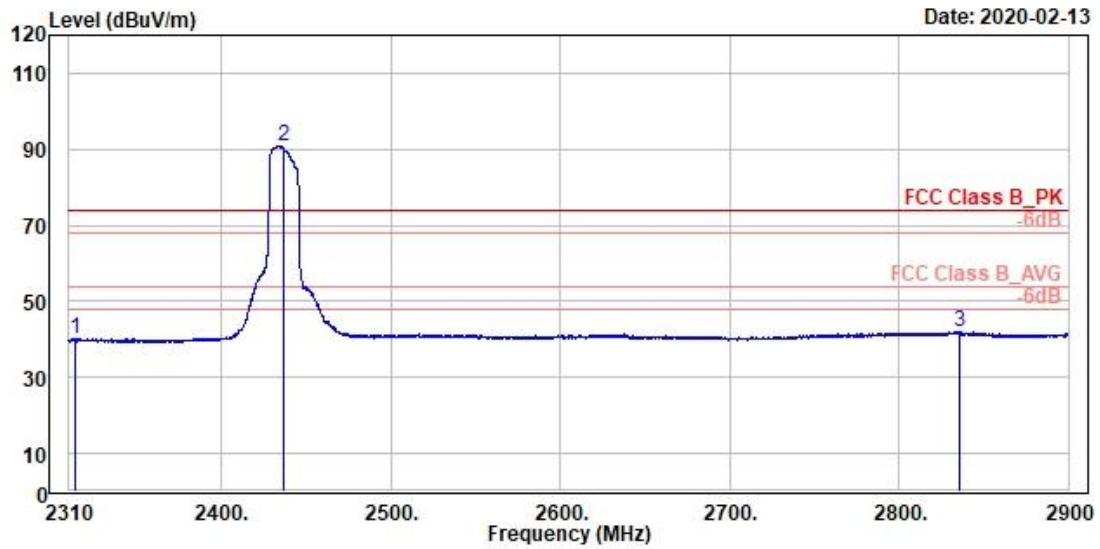

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2437MHz
Power setting : 87

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2313.30	40.23	3.10	37.13	54.00	-13.77	157	212 Average	Horizontal	
2 *	2437.00	91.02	53.69	37.33	54.00	37.02	157	212 Average	Horizontal	
3	2835.69	41.93	3.83	38.10	54.00	-12.07	157	212 Average	Horizontal	

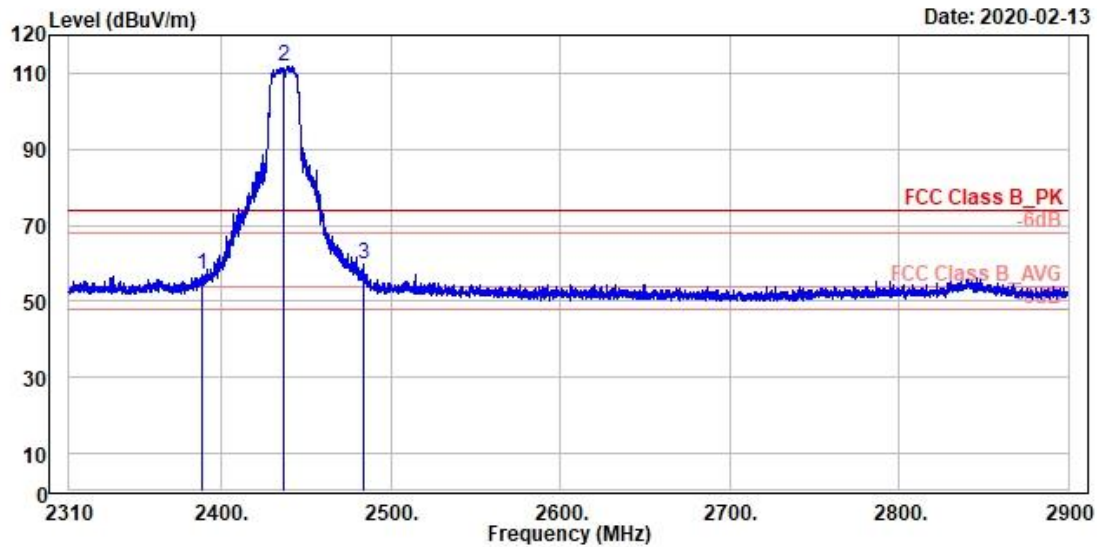

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2437MHz
Power setting : 87

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2388.82	56.98	19.84	37.14	74.00	-17.02	100	112 Peak	Vertical	
2 *	2437.00	111.99	74.66	37.33	74.00	37.99	100	112 Peak	Vertical	
3	2483.50	59.88	22.31	37.57	74.00	-14.12	100	112 Peak	Vertical	

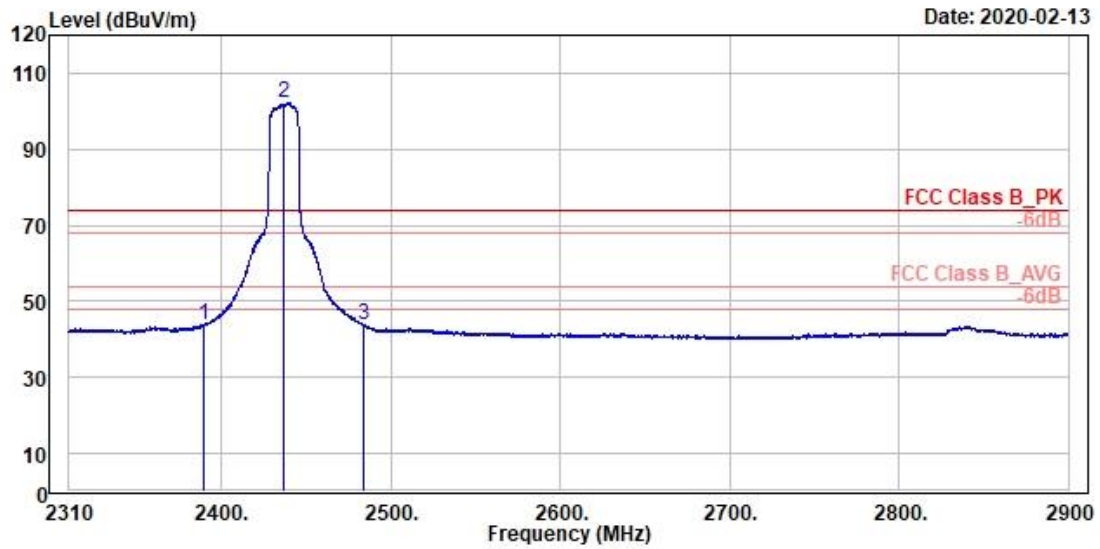

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2437MHz
Power setting : 87

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2389.53	43.95	6.81	37.14	54.00	-10.05	100	112 Average	Vertical	
2 *	2437.00	102.25	64.92	37.33	54.00	48.25	100	112 Average	Vertical	
3	2483.70	43.80	6.23	37.57	54.00	-10.20	100	112 Average	Vertical	

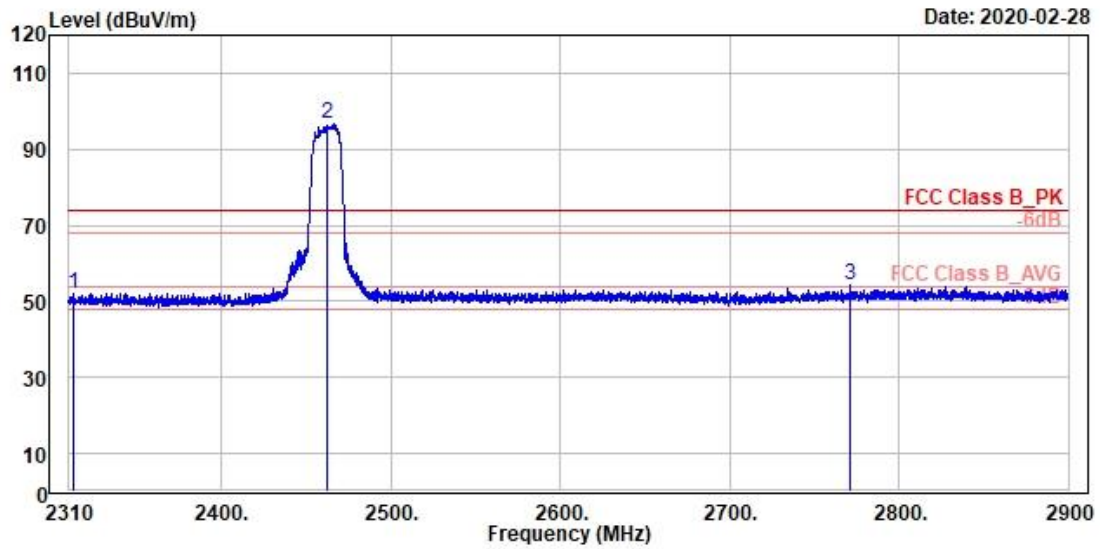

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2462MHz
Power setting : 74

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2312.60	52.22	15.09	37.13	74.00	-21.78	155	211 Peak	Horizontal	
2 *	2462.00	96.53	59.07	37.46	74.00	22.53	155	211 Peak	Horizontal	
3	2771.62	54.30	16.21	38.09	74.00	-19.70	155	211 Peak	Horizontal	

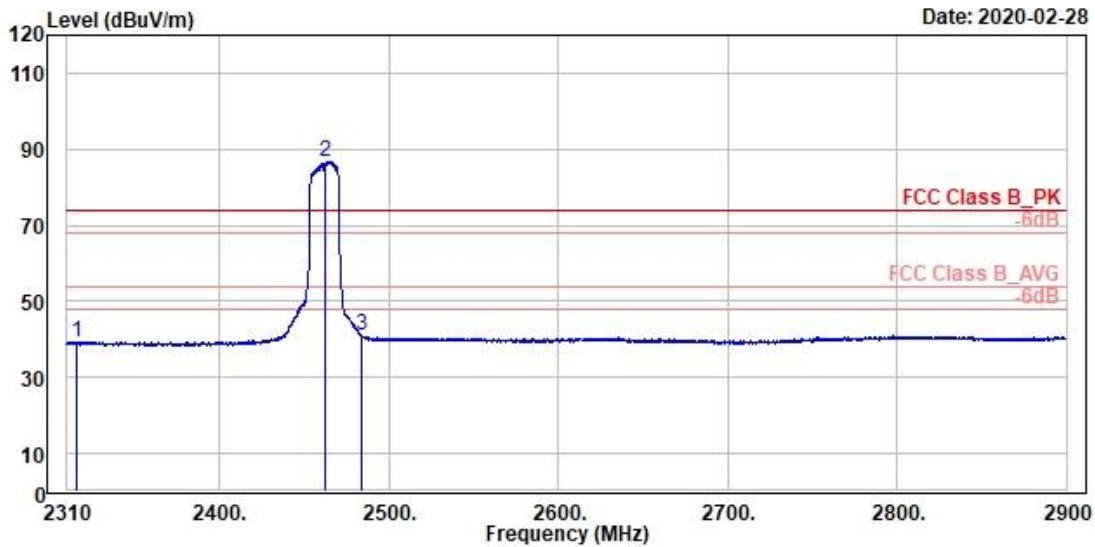

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2462MHz
Power setting : 74

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2315.55	39.41	2.28	37.13	54.00	-14.59	155	211 Average	Horizontal	
2 *	2462.00	86.66	49.20	37.46	54.00	32.66	155	211 Average	Horizontal	
3	2483.58	41.08	3.51	37.57	54.00	-12.92	155	211 Average	Horizontal	

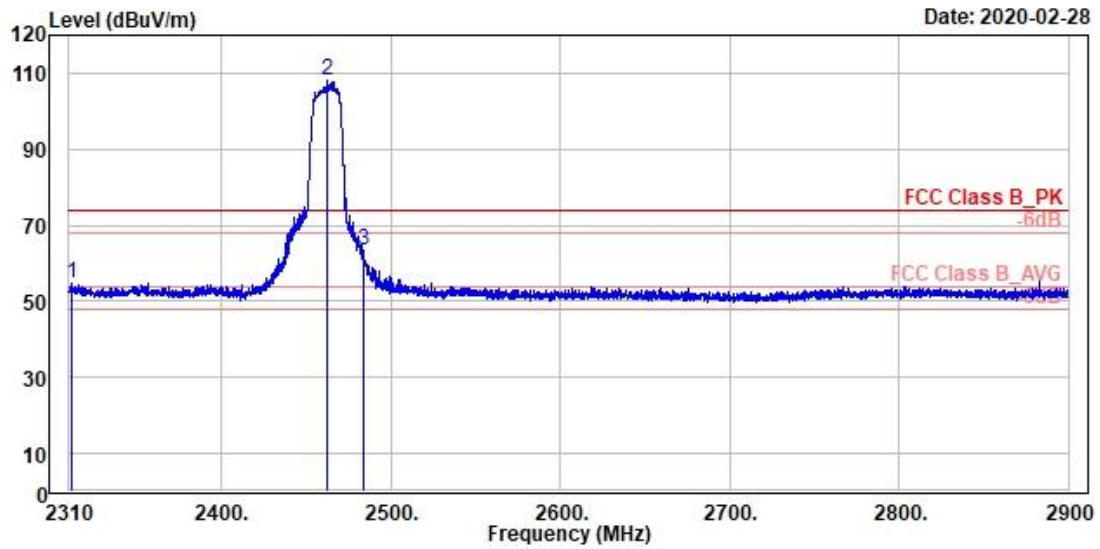

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK Vertical
 Test Engineer : Simon Tsai
 Model NO : WFI32E01UE
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : g_TX_2462MHz
 Power setting : 74

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2311.77	54.80	17.67	37.13	74.00	-19.20	136	292 Peak	Vertical	
2 *	2462.00	108.32	70.86	37.46	74.00	34.32	136	292 Peak	Vertical	
3	2483.46	63.30	25.73	37.57	74.00	-10.70	136	292 Peak	Vertical	

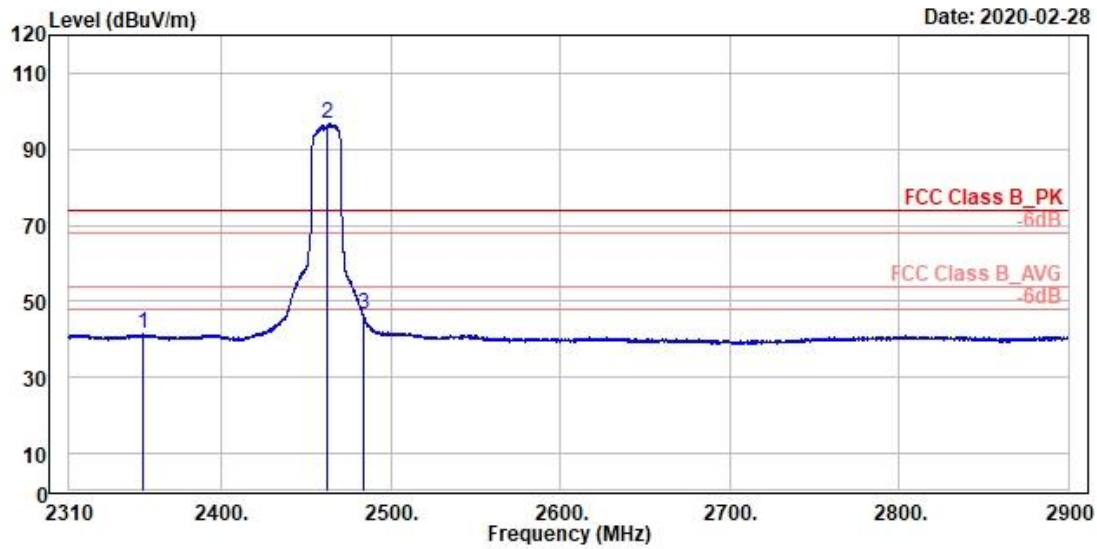

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2462MHz
Power setting : 74

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2353.78	41.44	4.27	37.17	54.00	-12.56	136	292 Average	Vertical	
2 *	2462.00	96.53	59.07	37.46	54.00	42.53	136	292 Average	Vertical	
3	2483.50	46.74	9.17	37.57	54.00	-7.26	136	292 Average	Vertical	

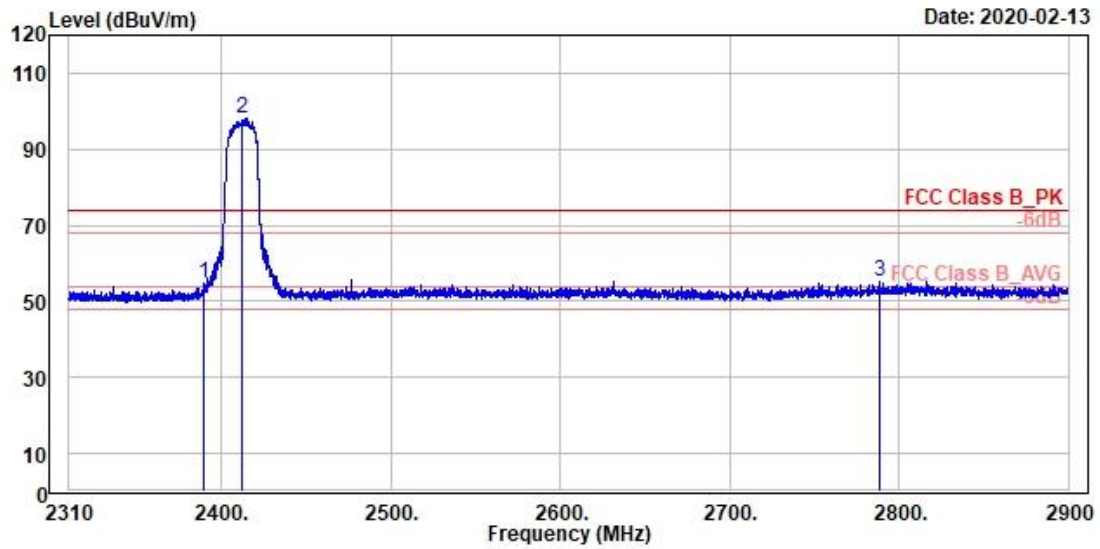

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2412MHz
Power setting : 68

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2390.00	54.65	17.51	37.14	74.00	-19.35	180	210 Peak	Horizontal	
2 *	2412.00	98.06	60.86	37.20	74.00	24.06	180	210 Peak	Horizontal	
3	2788.61	55.14	17.03	38.11	74.00	-18.86	180	210 Peak	Horizontal	

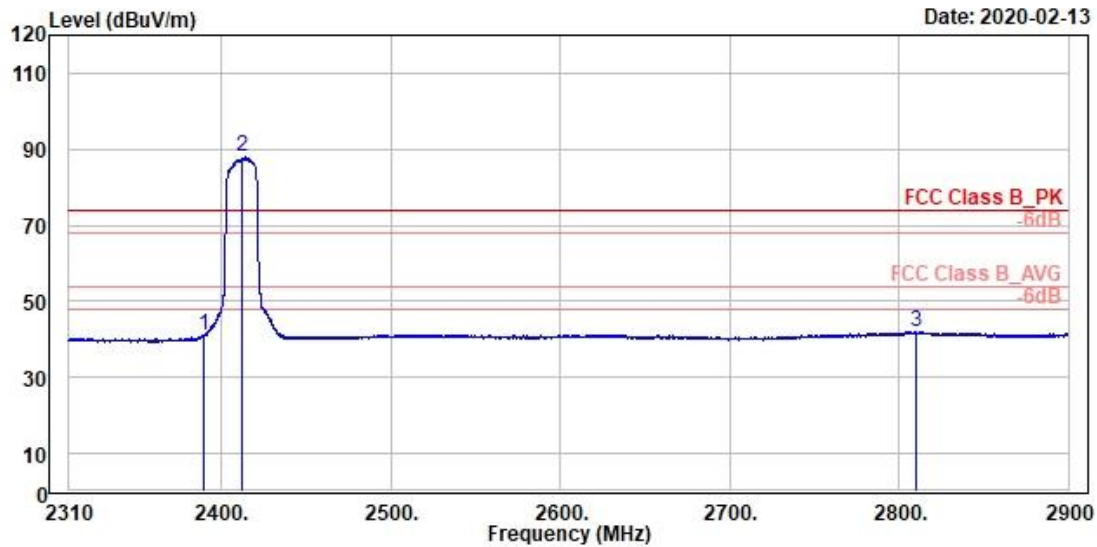

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2412MHz
Power setting : 68

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2389.41	41.15	4.01	37.14	54.00	-12.85	180	210 Average	Horizontal	
2 *	2412.00	87.88	50.68	37.20	54.00	33.88	180	210 Average	Horizontal	
3	2810.20	41.94	3.82	38.12	54.00	-12.06	180	210 Average	Horizontal	

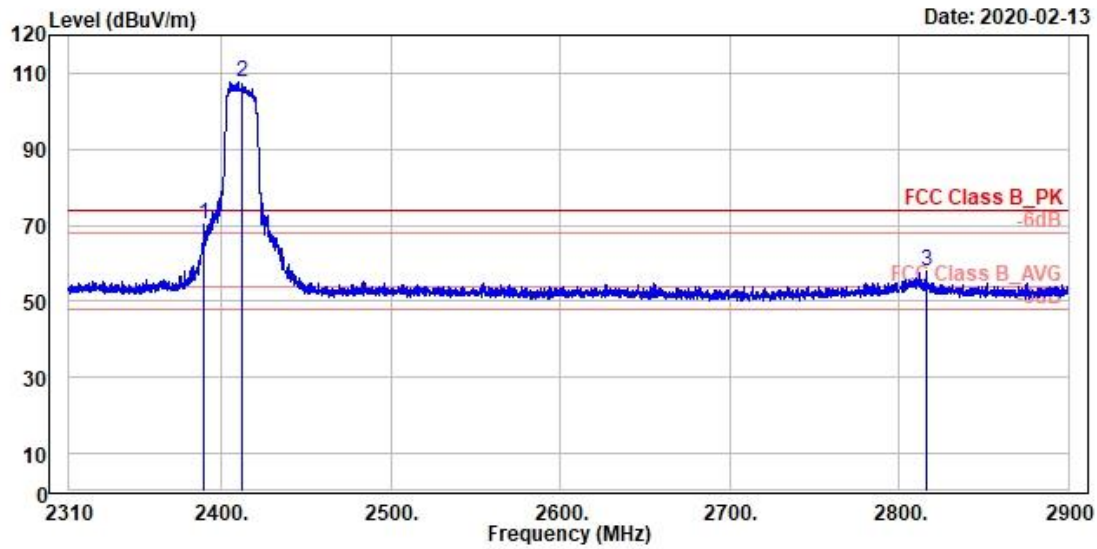

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2412MHz
Power setting : 68

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1 !	2389.53	70.12	32.98	37.14	74.00	-3.88	100	66 Peak	Vertical	
2 *	2412.00	107.67	70.47	37.20	74.00	33.67	100	66 Peak	Vertical	
3	2816.69	57.74	19.62	38.12	74.00	-16.26	100	66 Peak	Vertical	

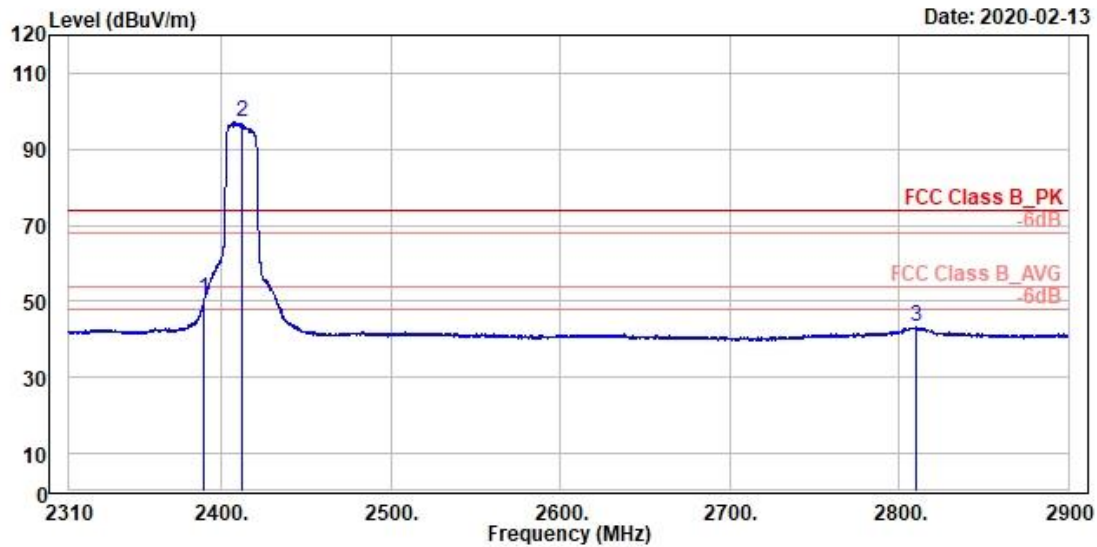

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2412MHz
Power setting : 68

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1 !	2390.00	50.64	13.50	37.14	54.00	-3.36	100	66 Average	Vertical	
2 *	2412.00	97.05	59.85	37.20	54.00	43.05	100	66 Average	Vertical	
3	2810.20	43.15	5.03	38.12	54.00	-10.85	100	66 Average	Vertical	

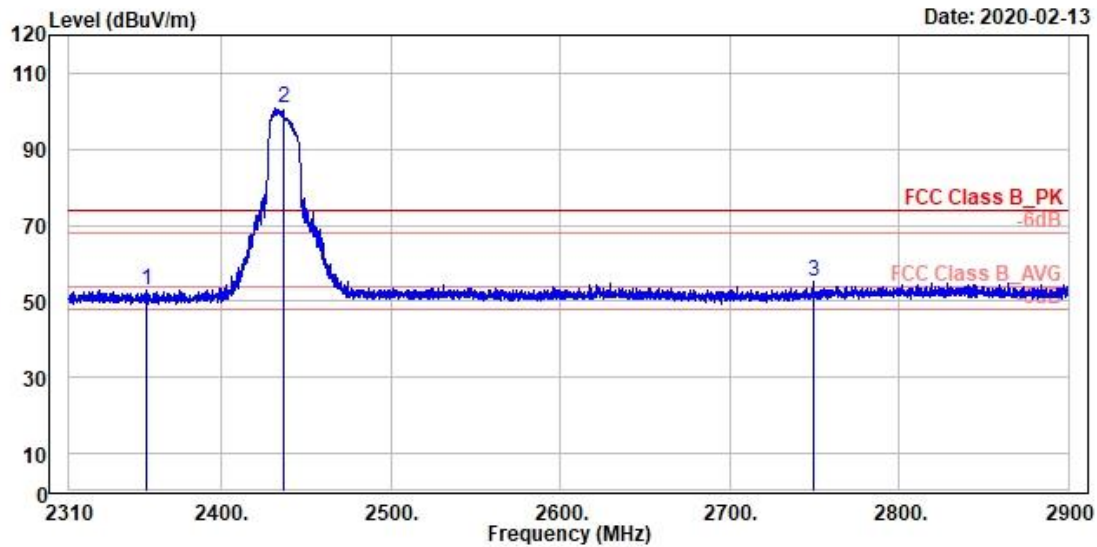

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2437MHz
Power setting : 87

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2355.90	52.96	15.79	37.17	74.00	-21.04	157	212 Peak	Horizontal	
2 *	2437.00	100.68	63.35	37.33	74.00	26.68	157	212 Peak	Horizontal	
3	2749.79	55.01	16.95	38.06	74.00	-18.99	157	212 Peak	Horizontal	

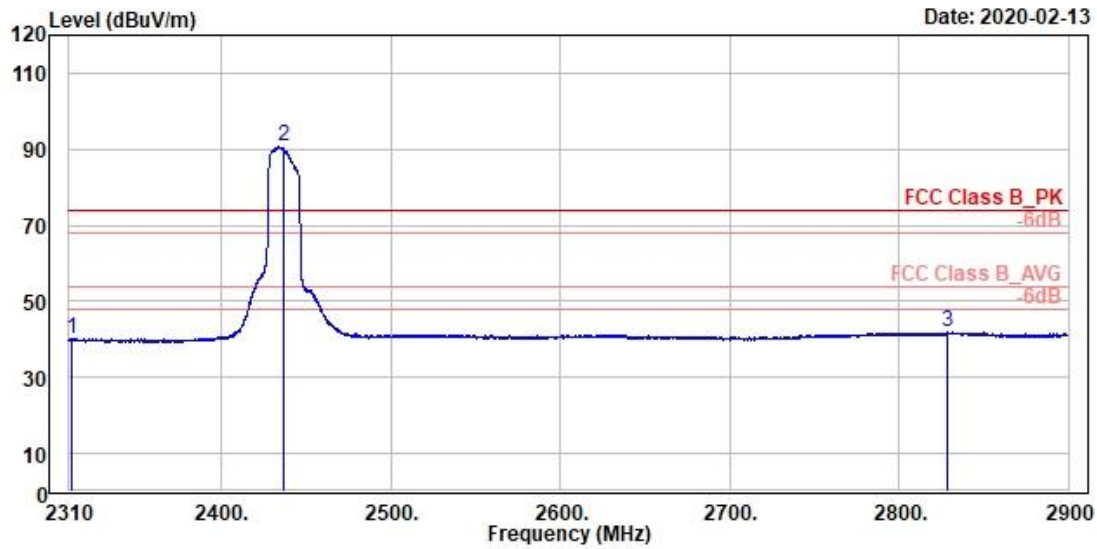

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2437MHz
Power setting : 87

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2311.65	40.14	3.01	37.13	54.00	-13.86	157	212 Average	Horizontal	
2 *	2437.00	90.62	53.29	37.33	54.00	36.62	157	212 Average	Horizontal	
3	2828.49	41.92	3.82	38.10	54.00	-12.08	157	212 Average	Horizontal	

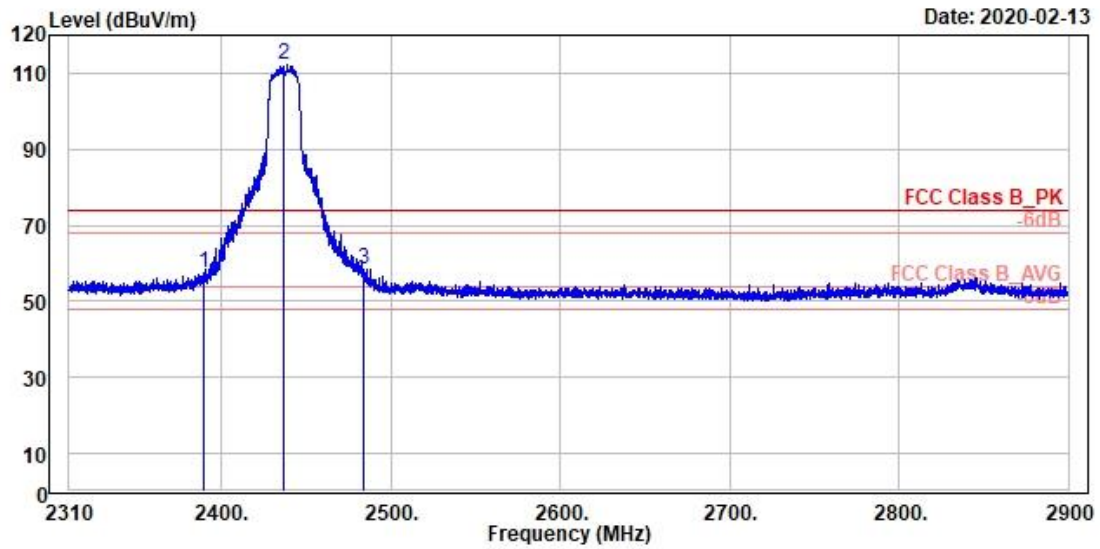

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2437MHz
Power setting : 87

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2389.18	57.36	20.22	37.14	74.00	-16.64	100	112 Peak	Vertical	
2 *	2437.00	112.20	74.87	37.33	74.00	38.20	100	112 Peak	Vertical	
3	2484.29	58.37	20.79	37.58	74.00	-15.63	100	112 Peak	Vertical	

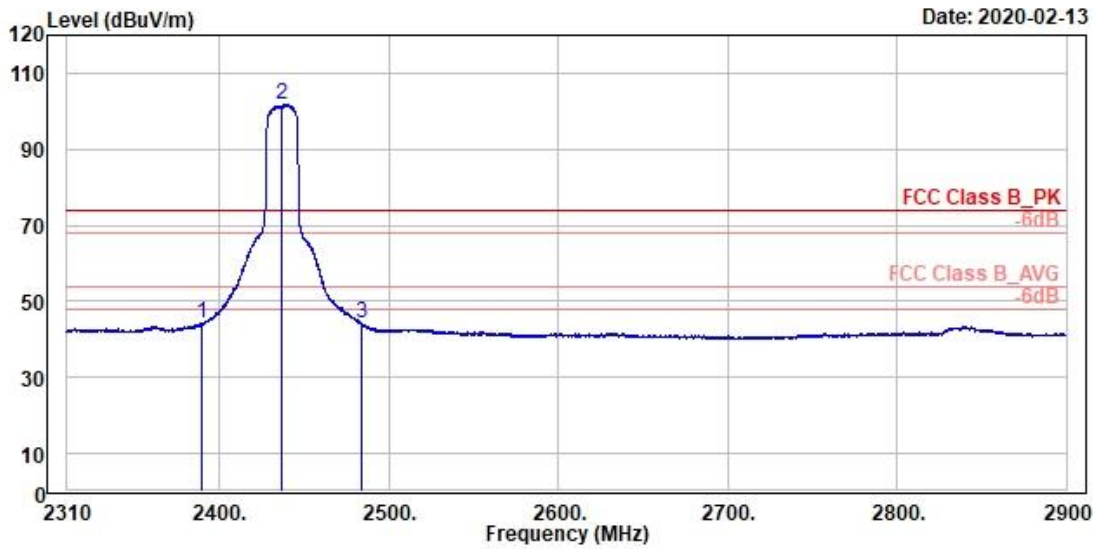

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2437MHz
Power setting : 87

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2389.77	44.16	7.02	37.14	54.00	-9.84	100	112 Average	Vertical	
2 *	2437.00	101.74	64.41	37.33	54.00	47.74	100	112 Average	Vertical	
3	2483.58	44.08	6.51	37.57	54.00	-9.92	100	112 Average	Vertical	

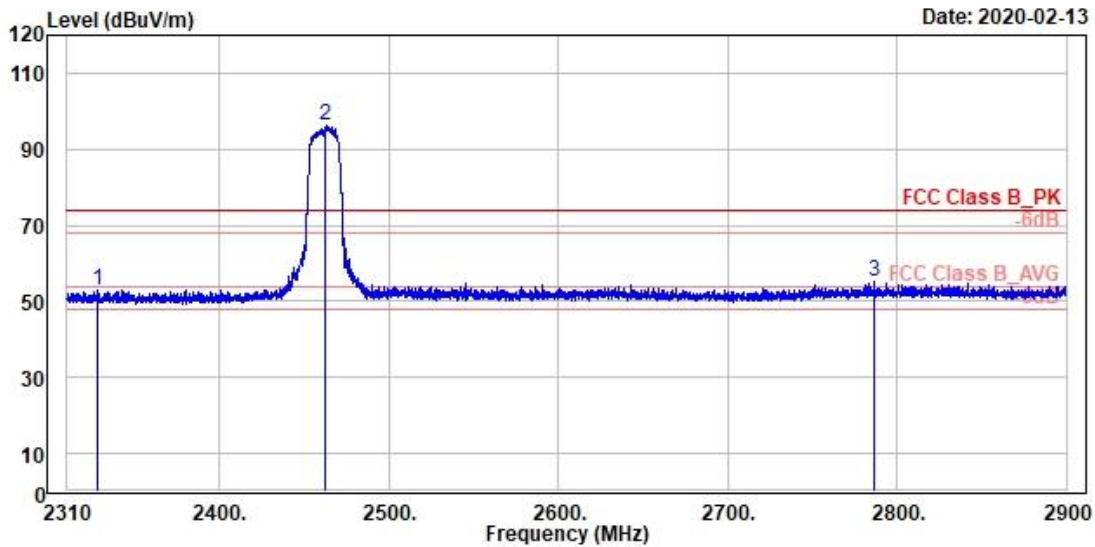

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK Horizontal
 Test Engineer : Simon Tsai
 Model NO : WFI32E01UE
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : n20_TX_2462MHz
 Power setting : 71

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2327.82	53.15	16.00	37.15	74.00	-20.85	155	214 Peak	Horizontal	
2 *	2462.00	96.17	58.71	37.46	74.00	22.17	155	214 Peak	Horizontal	
3	2786.48	55.17	17.06	38.11	74.00	-18.83	155	214 Peak	Horizontal	

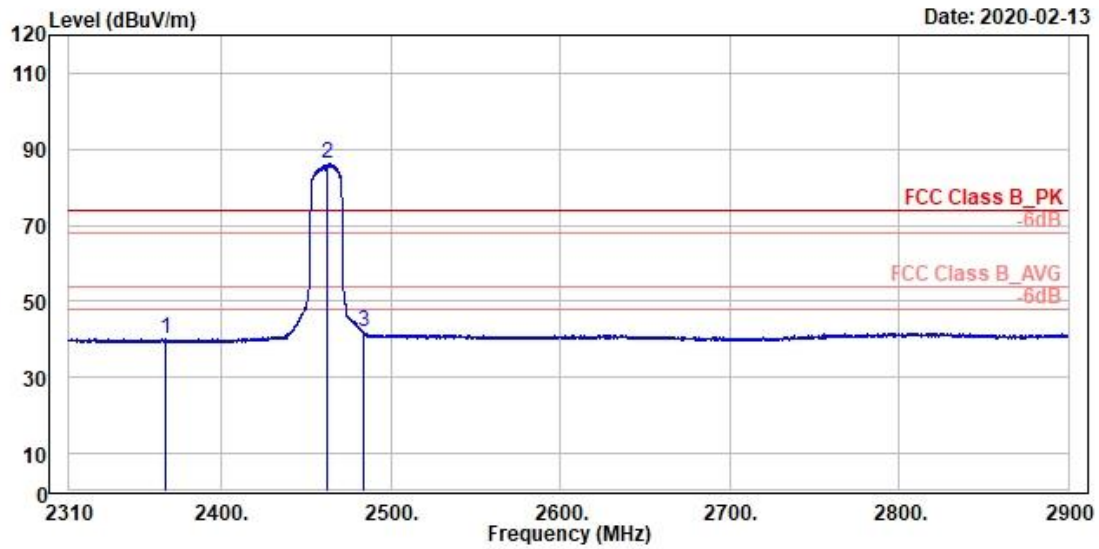

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2462MHz
Power setting : 71

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2366.76	40.09	2.93	37.16	54.00	-13.91	155	214 Average	Horizontal	
2 *	2462.00	86.10	48.64	37.46	54.00	32.10	155	214 Average	Horizontal	
3	2483.81	42.13	4.55	37.58	54.00	-11.87	155	214 Average	Horizontal	

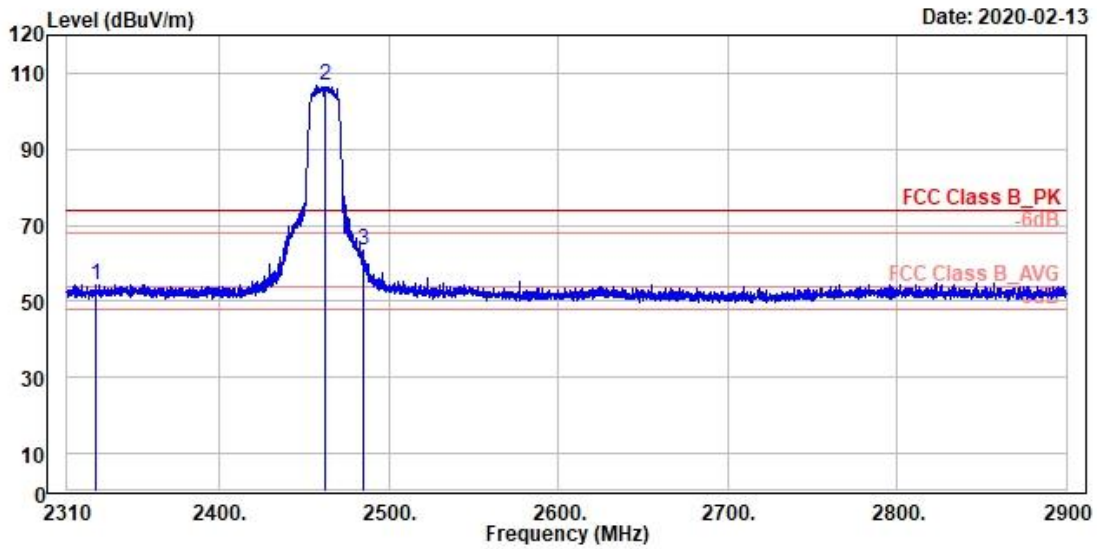

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK Vertical
 Test Engineer : Simon Tsai
 Model NO : WFI32E01UE
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : n20_TX_2462MHz
 Power setting : 71

Sample & Ant info.in Appendix: #61 External Antenna

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2327.11	54.41	17.26	37.15	74.00	-19.59	136	292 Peak	Vertical	
2 *	2462.00	106.98	69.52	37.46	74.00	32.98	136	292 Peak	Vertical	
3	2484.88	63.19	25.61	37.58	74.00	-10.81	136	292 Peak	Vertical	

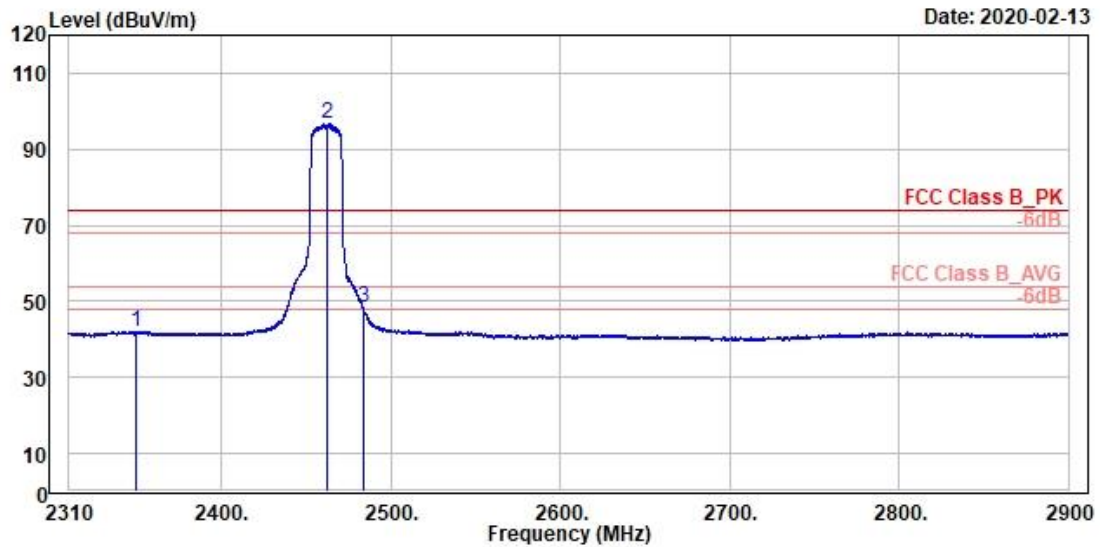

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK Vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : n20_TX_2462MHz
Power setting : 71


Sample & Ant info.in Appendix: #61 External Antenna

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2349.77	42.06	4.89	37.17	54.00	-11.94	136	292 Average	Vertical	
2 *	2462.00	96.72	59.26	37.46	54.00	42.72	136	292 Average	Vertical	
3 !	2483.50	48.55	10.98	37.57	54.00	-5.45	136	292 Average	Vertical	

Spurious Emissions, TX Mode, 1GHz-26.5GHz, #61




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

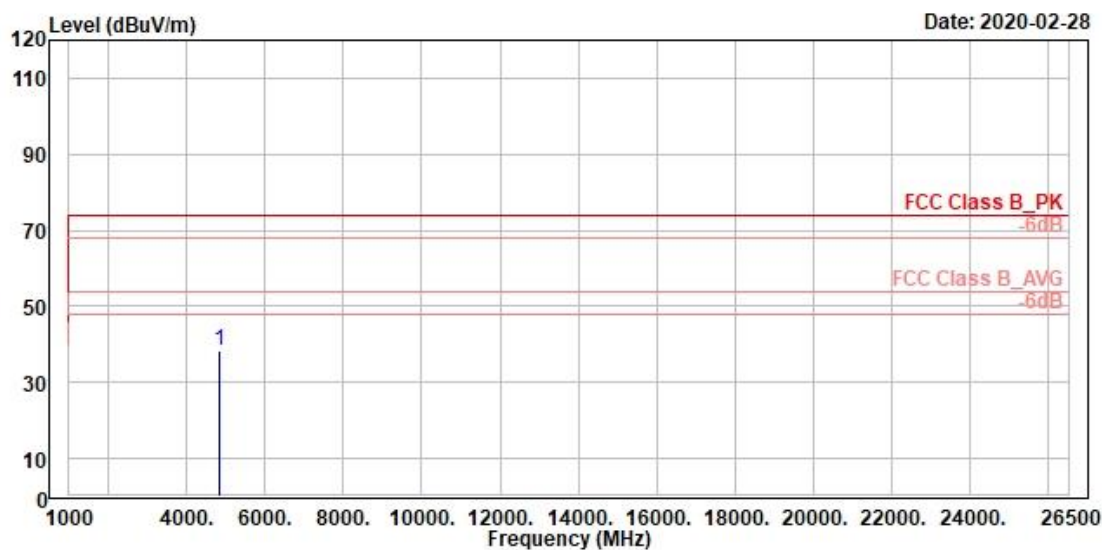

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2412MHz
Power setting : 62

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Line	Limit					
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4824.00	38.50	47.88	-9.38	74.00	-35.50	100	353 Peak	horizontal	

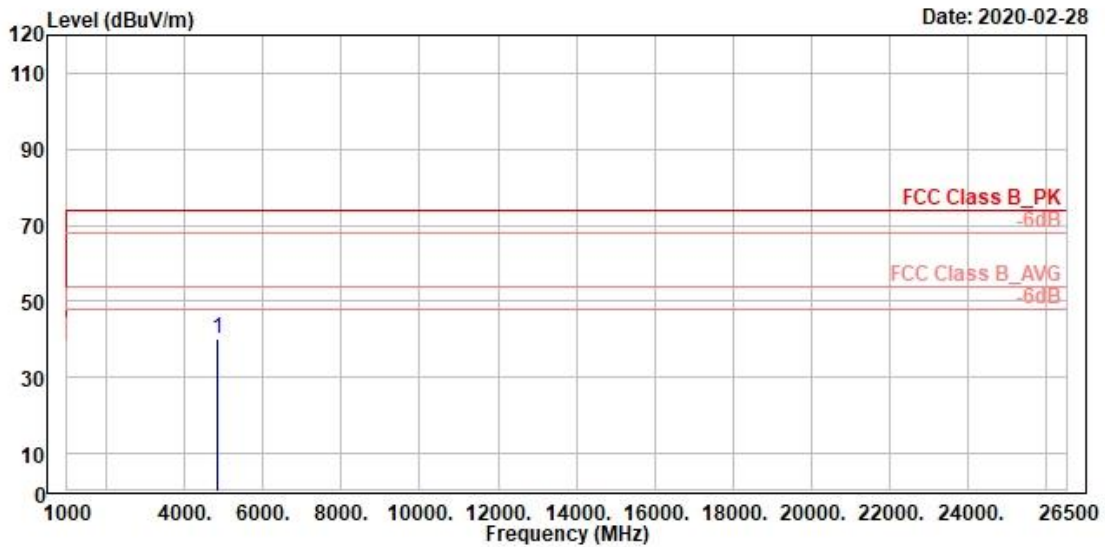

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK vertical
 Test Engineer : Simon Tsai
 Model NO : WFI32E01UE
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : b_TX_2412MHz
 Power setting : 62

Sample & Ant info.in Appendix: #61 External Antenna


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	Level	Factor	Line	Limit				
		dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4824.00	40.06	49.44	-9.38	74.00	-33.94	187	360 Peak	vertical

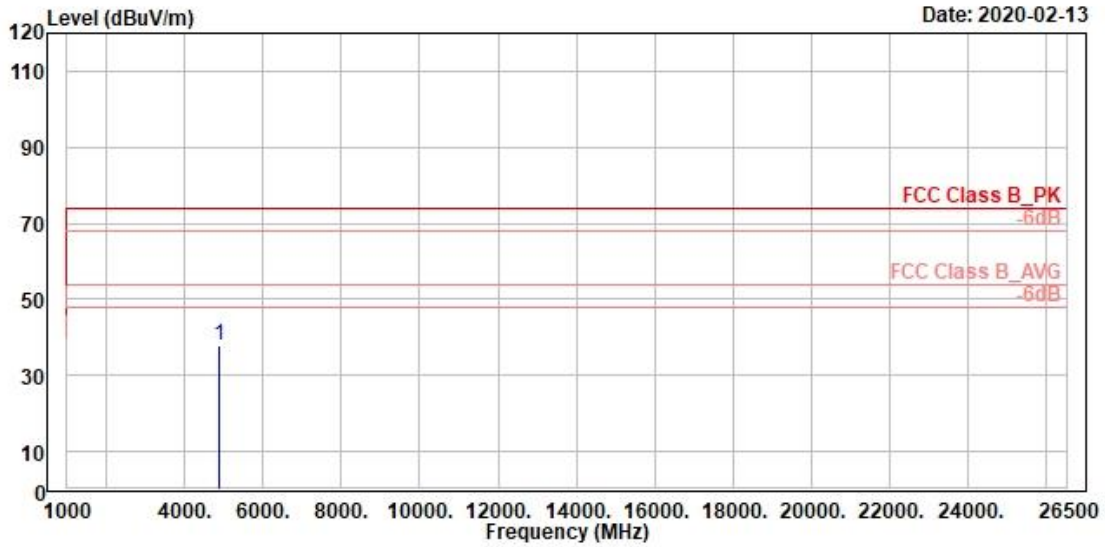

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK horizontal
 Test Engineer : Simon Tsai
 Model NO : WFI32E01UE
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : b_TX_2437MHz
 Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	Level	Factor	Line	Limit				
		dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4874.00	37.77	47.07	-9.30	74.00	-36.23	200	103 Peak	horizontal

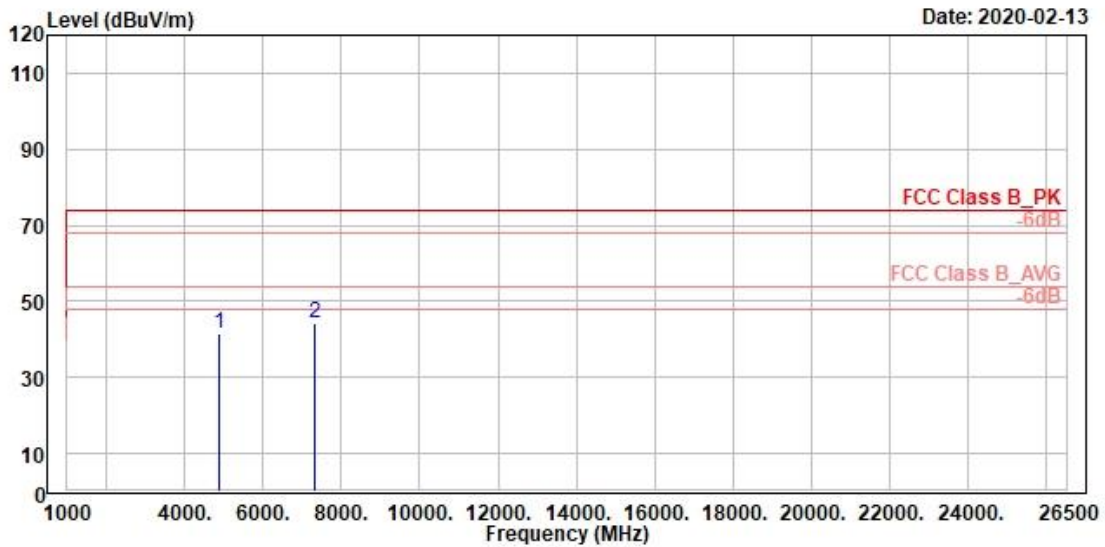

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK vertical
 Test Engineer : Simon Tsai
 Model NO : WFI32E01UE
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : b_TX_2437MHz
 Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Level	Factor	Line	Limit				
			dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4874.00	41.56	50.86	-9.30	74.00	-32.44	200	96 Peak	vertical	
2	7311.00	44.19	50.90	-6.71	74.00	-29.81	200	42 Peak	vertical	

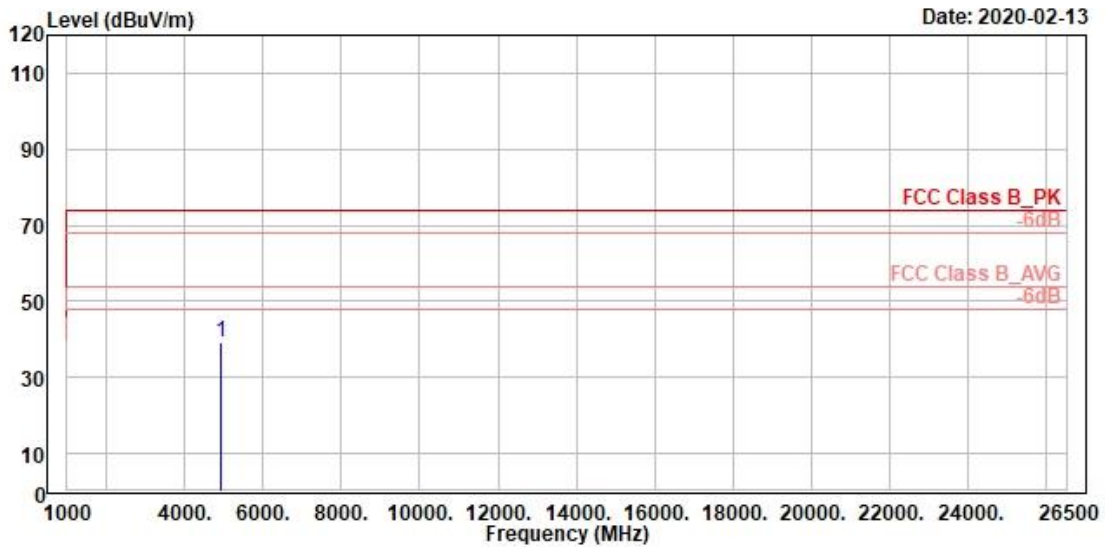

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK horizontal
 Test Engineer : Simon Tsai
 Model NO : WFI32E01UE
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : b_TX_2462MHz
 Power setting : 66

Sample & Ant info.in Appendix: #61 External Antenna


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	Level	Factor	Line	Limit				
		dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4924.00	39.16	48.38	-9.22	74.00	-34.84	100	102 Peak	horizontal

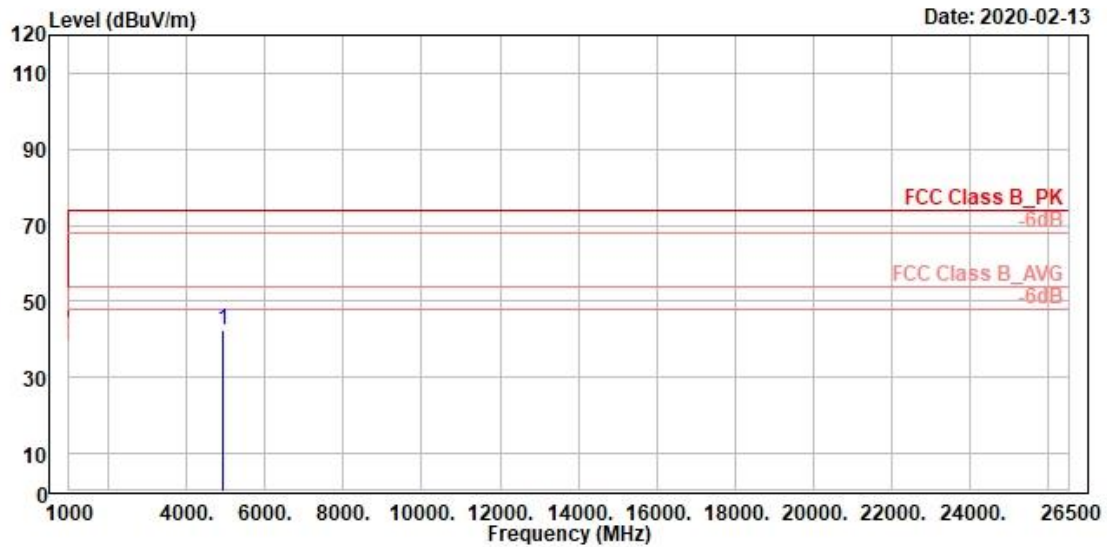

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK vertical
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : b_TX_2462MHz
Power setting : 66

Sample & Ant info.in Appendix: #61 External Antenna


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4924.00	42.27	51.49	-9.22	74.00	-31.73	200	6 Peak	vertical	

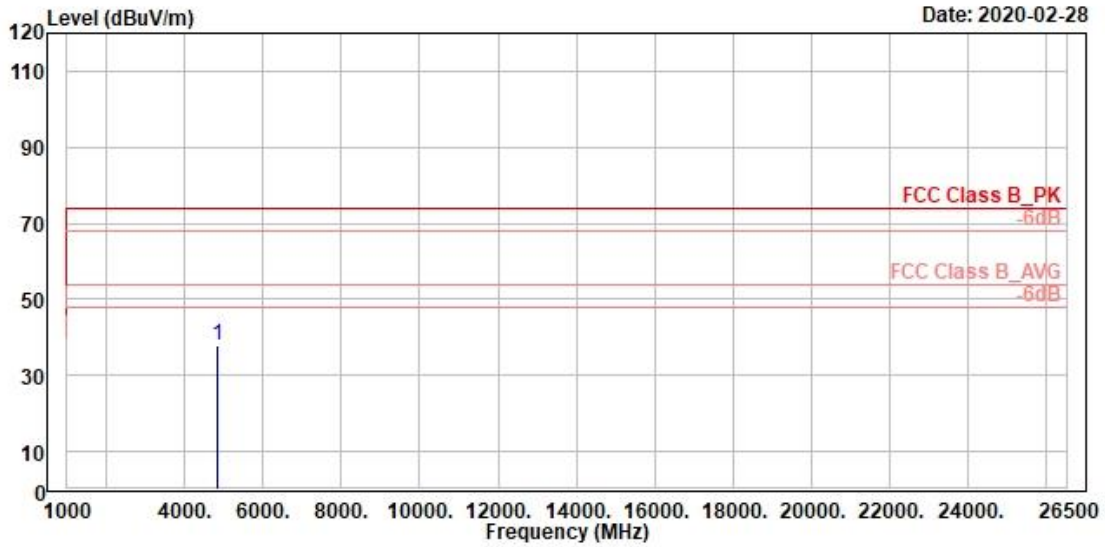

Site : 3m_Semi-Anechoic_Chamber(966_D)
Condition : FCC Class B_PK horizontal
Test Engineer : Simon Tsai
Model NO : WFI32E01UE
Test Rating : 3.3Vdc
Tmp/Hum : 22.1°C/53%
Mode : g_TX_2412MHz
Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	Level	Factor	Line	Limit				
		dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4824.00	37.91	47.29	-9.38	74.00	-36.09	200	324 Peak	horizontal

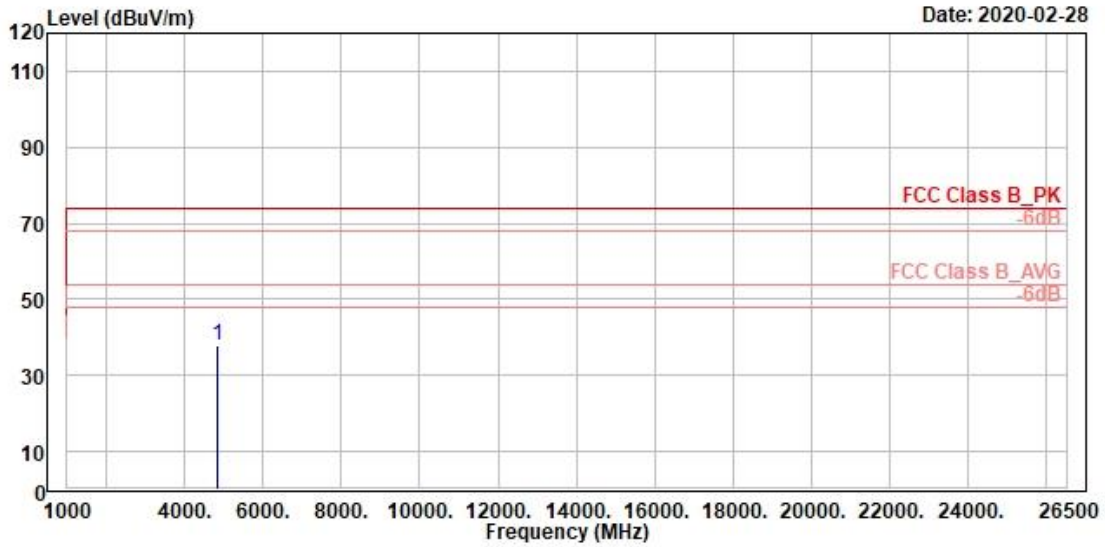

Site : 3m_Semi-Anechoic_Chamber(966_D)
 Condition : FCC Class B_PK vertical
 Test Engineer : Simon Tsai
 Model NO : WFI32E01UE
 Test Rating : 3.3Vdc
 Tmp/Hum : 22.1°C/53%
 Mode : g_TX_2412MHz
 Power setting : 72

Sample & Ant info.in Appendix: #61 External Antenna

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4824.00	37.82	47.20	-9.38	74.00	-36.18	100	88 Peak	vertical