

FCC TEST REPORT
for
Xiamen Prima Technology Inc.

Interactive Flat Panel

Model No.: LE-43PC**(* can be A~Z, 0~9 instead)

FCC ID: 2ADID-LE-43PC88

Prepared for : Xiamen Prima Technology Inc.
Address : No.178, Xinfeng Road, Xiamen, Fujian, P.R. China

Prepared by : Accurate Technology Co., Ltd.
Address : F1, Bldg. A&D, Changyuan New Material Port, Keyuan Rd.,
Science & Industry Park, Nanshan District Shenzhen
518057, P.R. China

Tel: +86-755-26503290
Fax: +86-755-26503396

Report No. : ATE20160704
Date of Test : May 7-10, 2016
Date of Report : May 12, 2016

TABLE OF CONTENTS

Description	Page
Test Report	
1. TEST RESULTS SUMMARY	4
2. GENERAL INFORMATION.....	5
2.1. Description of Device (EUT)	5
2.2. Accessory and Auxiliary Equipment	5
2.3. Description of Test Facility	6
2.4. Measurement Uncertainty	6
3. MEASURING DEVICE AND TEST EQUIPMENT	7
3.1. For Radiated Emission Measurement	7
3.2. The Equipment Used to Measure Conducted Disturbance (L.I.S.N).....	8
4. POWER LINE CONDUCTED MEASUREMENT	9
4.1. Block Diagram of Test Setup	9
4.2. Test mode description.....	9
4.3. Power Line Conducted Emission Measurement Limits	9
4.4. Configuration of EUT on Measurement.....	9
4.5. Operating Condition of EUT	10
4.6. Test Procedure.....	10
4.7. Power Line Conducted Emission Measurement Results	11
5. RADIATED EMISSION MEASUREMENT	41
5.1. Block Diagram of Test.....	41
5.2. Test mode description.....	41
5.3. Radiated Emission Limit (Class B).....	42
5.4. Manufacturer	42
5.5. Operating Condition of EUT	42
5.6. Test Procedure.....	43
5.7. Radiated Emission Noise Measurement Result	44
6. PHOTOGRAPHS	65
6.1. Photos of Radiated Emission Measurement	65
6.2. Photo of Conducted Emission Measurement.....	66
6.3. Photo of EUT	66

Test Report

Applicant : Xiamen Prima Technology Inc.
Manufacturer : Xiamen Prima Technology Inc.
EUT Description : Interactive Flat Panel
Model No. : LE-43PC**(* can be A~Z, 0~9 instead)
Trade Name : PRIMA

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart B Class B
ANSI C63.4: 2014


The device described above is tested by Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Accurate Technology Co., Ltd.

Date of Test : May 7-10, 2016

Date of Report: May 12, 2016

Prepared by :



(Bob Wang, Engineer)

Approved & Authorized Signer :



(Sean Liu, Manager)

1. TEST RESULTS SUMMARY

Test Items	Test Standard	Test Results
Power Line Conducted Emission	FCC Part 15 Subpart B	Pass
Radiated Emission	FCC Part 15 Subpart B	Pass

Remark: "N/A" Means not applicable

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product : Interactive Flat Panel

Model No. : LE-43PC**(* can be A~Z, 0~9 instead)

Test Voltage : INPUT: AC 100--240V~50/60Hz 1.2A

Trade Name : PRIMA

Remark(s) : The EUT highest operating frequency provided by Manufacturer is 1.2GHz, the radiated emission measurement shall be made up to 6 GHz.

Applicant : Xiamen Prima Technology Inc.
Address : No.178, Xinfeng Road, Xiamen, Fujian, P.R. China

Manufacturer : Xiamen Prima Technology Inc.
Address : Wanlida Industry Zone Building C, Nanjing Fujian, P.R. China.

Date of sample receiver : May 4, 2016

Date of Test : May 7-10, 2016

2.2. Accessory and Auxiliary Equipment

PC : Manufacturer: DELL
M/N: DMC
S/N: HZXLM1

media player : Manufacturer: TOSHIBA
M/N: STOR.E TV+
S/N: 101200005

USB Memory Disk : Manufacturer: Smartocean
M/N: 3611

2.3. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC

The Registration Number is 253065

Listed by FCC

The Registration Number is 752051

Listed by Industry Canada

The Registration Number is 5077A-1

Listed by Industry Canada

The Registration Number is 5077A-2

Accredited by China National Accreditation Committee for Laboratories

The Certificate Registration Number is L3193

Name of Firm : Accurate Technology Co., Ltd.

Site Location : F1, Bldg. A&D, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan District, Shenzhen
518057, P.R. China

2.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Power Disturbance Expanded Uncertainty = 2.92 dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan.09, 2016	1 Year
2.	Spectrum Analyzer	Rohde&Schwarz	FSV40	101495	Jan.09, 2016	1 Year
3.	Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan.09, 2016	1 Year
4.	Test Receiver	Rohde& Schwarz	ESPI	100396/003	Jan.09, 2016	1 Year
5.	Test Receiver	Rohde& Schwarz	ESPI	101526/003	Jan.09, 2016	1 Year
6.	Test Receiver	Rohde& Schwarz	ESR	101817	Jan.09, 2016	1 Year
7.	Bilog Antenna	Schwarzbeck	VULB9163	9163-194	Jan.14, 2016	1 Year
8.	Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan.14, 2016	1 Year
9.	Log.-Per.Antenna	Schwarzbeck	VUSLP 9111B	9111B-074	Jan.14, 2016	1 Year
10.	Biconical Broad Band Antenna	Schwarzbeck	VHBB 9124+BBA 9106	9124-617	Jan.14, 2016	1 Year
11.	Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan.14, 2016	1 Year
12.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan.14, 2016	1 Year
13.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Jan.14, 2016	1 Year
14.	Vertical Active Monopole Antenna	Schwarzbeck	VAMP 9243	9243-370	Jan.14, 2016	1 Year
15.	RF Switching Unit+PreAMP	Compliance Direction	RSU-M2	38322	Jan.09, 2016	1 Year
16.	Pre-Amplifier	Agilent	8447D	294A10619	Jan.09, 2016	1 Year
17.	Pre-Amplifier	Rohde&Schwarz	CBLU11835 40-01	3791	Jan.09, 2016	1 Year
18.	50 Coaxial Switch	Anritsu Corp	MP59B	6200237248	Jan.09, 2016	1 Year
19.	50 Coaxial Switch	Anritsu Corp	MP59B	6200506474	Jan.09, 2016	1 Year
20.	RF Coaxial Cable	Schwarzbeck	N-5m	No.1	Jan.09, 2016	1 Year
21.	RF Coaxial Cable	Schwarzbeck	N-1m	No.6	Jan.09, 2016	1 Year
22.	RF Coaxial Cable	Schwarzbeck	N-1m	No.7	Jan.09, 2016	1 Year
23.	RF Coaxial Cable	SUHNER	N-3m	No.8	Jan.09, 2016	1 Year
24.	RF Coaxial Cable	RESENBERGER	N-3.5m	No.9	Jan.09, 2016	1 Year
25.	RF Coaxial Cable	SUHNER	N-6m	No.10	Jan.09, 2016	1 Year
26.	RF Coaxial Cable	RESENBERGER	N-12m	No.11	Jan.09, 2016	1 Year
27.	RF Coaxial Cable	RESENBERGER	N-0.5m	No.12	Jan.09, 2016	1 Year
28.	RF Coaxial Cable	SUHNER	N-2m	No.13	Jan.09, 2016	1 Year
29.	RF Coaxial Cable	SUHNER	N-0.5m	No.15	Jan.09, 2016	1 Year
30.	RF Coaxial Cable	SUHNER	N-2m	No.16	Jan.09, 2016	1 Year
31.	RF Coaxial Cable	RESENBERGER	N-6m	No.17	Jan.09, 2016	1 Year


3.2. The Equipment Used to Measure Conducted Disturbance (L.I.S.N)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCS30	100307	Jan.09, 2016	1 Year
2.	Test Receiver	Rohde & Schwarz	ESPI3	100396/003	Jan.09, 2016	1 Year
3.	Test Receiver	Rohde & Schwarz	ESPI3	101526/003	Jan.09, 2016	1 Year
4.	L.I.S.N.	Schwarzbeck	NLSK8126	8126431	Jan.09, 2016	1 Year
5.	L.I.S.N.	Rohde & Schwarz	ESH3-Z5	100305	Jan.09, 2016	1 Year
6.	L.I.S.N.	Rohde & Schwarz	ESH3-Z5	100310	Jan.09, 2016	1 Year
7.	L.I.S.N.	Rohde & Schwarz	ESH3-Z6	100132	Jan.09, 2016	1 Year
8.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100305	Jan.09, 2016	1 Year
9.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100312	Jan.09, 2016	1 Year
10.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100815	Jan.09, 2016	1 Year
11.	50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283936	Jan.09, 2016	1 Year
12.	50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283933	Jan.09, 2016	1 Year
13.	50Ω Coaxial Switch	Anritsu Corp	MP59B	6200506474	Jan.09, 2016	1 Year
14.	VOLTAGE PROBE	Schwarzbeck	TK9416	N/A	Jan.09, 2016	1 Year
15.	RF CURRENT PROBE	Rohde & Schwarz	EZ-17	100048	Jan.09, 2016	1 Year
16.	8-Wire Impedance Stabilisation Network	Schwarzbeck	CAT5 8158	8158-0035	Jan.09, 2016	1 Year
17.	RF Coaxial Cable	SUHNER	N-2m	No.2	Jan.09, 2016	1 Year
18.	RF Coaxial Cable	SUHNER	N-2m	No.3	Jan.09, 2016	1 Year
19.	RF Coaxial Cable	SUHNER	N-2m	No.14	Jan.09, 2016	1 Year

Expanded Uncertainty: U= 2.23dB, k=2

4. POWER LINE CONDUCTED MEASUREMENT

4.1. Block Diagram of Test Setup

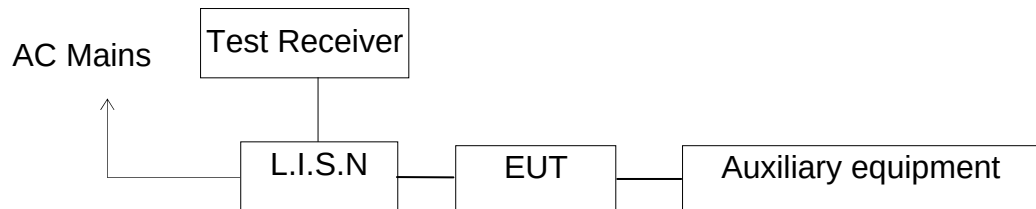

(EUT: Interactive Flat Panel)

4.2. Test mode description

Test mode 1: USB IN
 Test mode 2: AV IN
 Test mode 3: VGA IN
 Test mode 4: DP IN
 Test mode 5: HDMI IN

4.3. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

4.4. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

4.5. Operating Condition of EUT

4.5.1. Setup the EUT and simulator as shown as Section 4.1.

4.5.2. Turn on the power of all equipment.

4.5.3. Let the EUT work in test mode and measure it.

4.6. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

4.7.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Test mode : USB IN								
Test voltage : 120V/60Hz								
MEASUREMENT RESULT: "PR-0507-0019_fin"								
2016-5-7 16:27								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.192000	46.70	10.6	64	17.2	QP	N	GND	
3.584000	36.80	11.7	56	19.2	QP	N	GND	
5.195000	25.00	11.8	60	35.0	QP	N	GND	
MEASUREMENT RESULT: "PR-0507-0019_fin2"								
2016-5-7 16:27								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.500000	35.70	11.5	46	10.3	AV	N	GND	
3.584000	26.70	11.7	46	19.3	AV	N	GND	
24.000500	30.00	12.0	50	20.0	AV	N	GND	
MEASUREMENT RESULT: "PR-0507-0020_fin"								
2016-5-7 16:33								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.152000	48.80	10.4	66	17.1	QP	L1	GND	
3.111500	33.00	11.7	56	23.0	QP	L1	GND	
5.325500	23.90	11.8	60	36.1	QP	L1	GND	
MEASUREMENT RESULT: "PR-0507-0020_fin2"								
2016-5-7 16:33								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.496000	35.80	11.5	46	10.3	AV	L1	GND	
3.543500	25.40	11.7	46	20.6	AV	L1	GND	
24.000500	29.30	12.0	50	20.7	AV	L1	GND	

Test mode : AV IN								
Test voltage: 120V/60Hz								
MEASUREMENT RESULT: "PR-0507-0013_fin"								
2016-5-7 16:11								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.154000	54.50	10.4	66	11.3	QP	L1	GND	
2.558000	36.80	11.7	56	19.2	QP	L1	GND	
5.150000	30.90	11.8	60	29.1	QP	L1	GND	
MEASUREMENT RESULT: "PR-0507-0013_fin2"								
2016-5-7 16:11								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.500000	34.60	11.5	46	11.4	AV	L1	GND	
2.144000	30.60	11.7	46	15.4	AV	L1	GND	
24.000500	28.20	12.0	50	21.8	AV	L1	GND	
MEASUREMENT RESULT: "PR-0507-0014_fin"								
2016-5-7 16:14								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.150000	53.00	10.3	66	13.0	QP	N	GND	
3.525500	37.50	11.7	56	18.5	QP	N	GND	
5.550500	24.60	11.8	60	35.4	QP	N	GND	
MEASUREMENT RESULT: "PR-0507-0014_fin2"								
2016-5-7 16:14								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.490000	35.00	11.5	46	11.2	AV	N	GND	
3.386000	25.80	11.7	46	20.2	AV	N	GND	
24.000500	27.70	12.0	50	22.3	AV	N	GND	

Test mode : VGA IN								
Test voltage: 120V/60Hz								
MEASUREMENT RESULT: "PR-0507-0017_fin"								
2016-5-7 16:22								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.158000	49.00	10.4	66	16.6	QP	L1	GND	
3.512000	36.90	11.7	56	19.1	QP	L1	GND	
5.213000	25.40	11.8	60	34.6	QP	L1	GND	
MEASUREMENT RESULT: "PR-0507-0017_fin2"								
2016-5-7 16:22								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.500000	35.60	11.5	46	10.4	AV	L1	GND	
2.234000	30.20	11.7	46	15.8	AV	L1	GND	
24.000500	29.60	12.0	50	20.4	AV	L1	GND	
MEASUREMENT RESULT: "PR-0507-0018_fin"								
2016-5-7 16:25								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.156000	50.60	10.4	66	15.1	QP	N	GND	
3.588500	36.70	11.7	56	19.3	QP	N	GND	
5.199500	24.90	11.8	60	35.1	QP	N	GND	
MEASUREMENT RESULT: "PR-0507-0018_fin2"								
2016-5-7 16:25								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.496000	35.80	11.5	46	10.3	AV	N	GND	
3.512000	26.50	11.7	46	19.5	AV	N	GND	
24.000500	30.00	12.0	50	20.0	AV	N	GND	

Test mode : DP IN								
Test voltage: 120V/60Hz								
MEASUREMENT RESULT: "PR-0507-0011_fin"								
2016-5-7 16:05								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.154000	56.50	10.4	66	9.3	QP	N	GND	
2.607500	37.40	11.7	56	18.6	QP	N	GND	
5.352500	31.50	11.8	60	28.5	QP	N	GND	
MEASUREMENT RESULT: "PR-0507-0011_fin2"								
2016-5-7 16:05								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.166000	39.60	10.4	55	15.6	AV	N	GND	
2.918000	30.20	11.7	46	15.8	AV	N	GND	
24.000500	28.30	12.0	50	21.7	AV	N	GND	
MEASUREMENT RESULT: "PR-0507-0012_fin"								
2016-5-7 16:08								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.150000	55.00	10.3	66	11.0	QP	L1	GND	
3.485000	36.40	11.7	56	19.6	QP	L1	GND	
5.235500	31.90	11.8	60	28.1	QP	L1	GND	
MEASUREMENT RESULT: "PR-0507-0012_fin2"								
2016-5-7 16:08								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.506000	33.90	11.5	46	12.1	AV	L1	GND	
2.864000	29.60	11.7	46	16.4	AV	L1	GND	
24.000500	29.30	12.0	50	20.7	AV	L1	GND	

Test mode : HDMI IN								
Test voltage: 120V/60Hz								
MEASUREMENT RESULT: "PR-0507-0015_fin"								
2016-5-7 16:16								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.154000	52.60	10.4	66	13.2	QP	N	GND	
3.512000	37.70	11.7	56	18.3	QP	N	GND	
5.285000	26.30	11.8	60	33.7	QP	N	GND	
MEASUREMENT RESULT: "PR-0507-0015_fin2"								
2016-5-7 16:16								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.494000	35.30	11.5	46	10.8	AV	N	GND	
2.189000	30.20	11.7	46	15.8	AV	N	GND	
24.000500	28.10	12.0	50	21.9	AV	N	GND	
MEASUREMENT RESULT: "PR-0507-0016_fin"								
2016-5-7 16:19								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.150000	51.00	10.3	66	15.0	QP	L1	GND	
3.633500	36.90	11.7	56	19.1	QP	L1	GND	
5.294000	26.70	11.8	60	33.3	QP	L1	GND	
MEASUREMENT RESULT: "PR-0507-0016_fin2"								
2016-5-7 16:19								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.492000	35.50	11.5	46	10.6	AV	L1	GND	
3.543500	27.30	11.7	46	18.7	AV	L1	GND	
24.000500	28.30	12.0	50	21.7	AV	L1	GND	

Test mode : USB IN								
Test voltage: 240V/60Hz								
MEASUREMENT RESULT: "PR-0507-0001_fin"								
2016-5-7 14:25								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.152000	56.40	10.4	66	9.5	QP	L1	GND	
2.742500	37.80	11.7	56	18.2	QP	L1	GND	
5.568500	31.80	11.8	60	28.2	QP	L1	GND	
MEASUREMENT RESULT: "PR-0507-0001_fin2"								
2016-5-7 14:25								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.160000	35.30	10.4	56	20.2	AV	L1	GND	
2.832500	31.40	11.7	46	14.6	AV	L1	GND	
5.568500	25.30	11.8	50	24.7	AV	L1	GND	
MEASUREMENT RESULT: "PR-0507-0002_fin"								
2016-5-7 14:27								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.164000	55.60	10.4	65	9.7	QP	N	GND	
2.540000	38.80	11.7	56	17.2	QP	N	GND	
5.199500	33.10	11.8	60	26.9	QP	N	GND	
MEASUREMENT RESULT: "PR-0507-0002_fin2"								
2016-5-7 14:27								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.476000	35.30	11.4	46	11.1	AV	N	GND	
2.585000	32.80	11.7	46	13.2	AV	N	GND	
5.253500	27.00	11.8	50	23.0	AV	N	GND	

Test mode : AV IN								
Test voltage: 240V/60Hz								
MEASUREMENT RESULT: "PR-0507-0005_fin"								
2016-5-7 15:25								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.152000	47.60	10.4	66	18.3	QP	L1	GND	
1.956000	32.90	11.7	56	23.1	QP	L1	GND	
5.231000	22.10	11.8	60	37.9	QP	L1	GND	
MEASUREMENT RESULT: "PR-0507-0005_fin2"								
2016-5-7 15:25								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.500000	36.30	11.5	46	9.7	AV	L1	GND	
3.467000	25.80	11.7	46	20.2	AV	L1	GND	
24.000500	28.00	12.0	50	22.0	AV	L1	GND	
MEASUREMENT RESULT: "PR-0507-0006_fin"								
2016-5-7 15:27								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.168000	47.30	10.5	65	17.8	QP	N	GND	
3.102500	34.10	11.7	56	21.9	QP	N	GND	
24.000500	29.10	12.0	60	30.9	QP	N	GND	
MEASUREMENT RESULT: "PR-0507-0006_fin2"								
2016-5-7 15:27								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.500000	36.50	11.5	46	9.5	AV	N	GND	
3.165500	24.40	11.7	46	21.6	AV	N	GND	
24.000500	27.50	12.0	50	22.5	AV	N	GND	

Test mode : VGA IN								
Test voltage: 240V/60Hz								
MEASUREMENT RESULT: "PR-0507-0007_fin"								
2016-5-7 15:30								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.162000	48.60	10.4	65	16.8	QP	N	GND	
3.372500	34.30	11.7	56	21.7	QP	N	GND	
5.186000	22.30	11.8	60	37.7	QP	N	GND	
MEASUREMENT RESULT: "PR-0507-0007_fin2"								
2016-5-7 15:30								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.500000	36.40	11.5	46	9.6	AV	N	GND	
3.372500	25.40	11.7	46	20.6	AV	N	GND	
24.000500	28.00	12.0	50	22.0	AV	N	GND	
MEASUREMENT RESULT: "PR-0507-0008_fin"								
2016-5-7 15:32								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.492000	38.20	11.5	56	17.9	QP	L1	GND	
3.552500	34.40	11.7	56	21.6	QP	L1	GND	
5.132000	22.70	11.8	60	37.3	QP	L1	GND	
MEASUREMENT RESULT: "PR-0507-0008_fin2"								
2016-5-7 15:32								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.502000	36.30	11.5	46	9.7	AV	L1	GND	
3.413000	26.20	11.7	46	19.8	AV	L1	GND	
24.000500	28.00	12.0	50	22.0	AV	L1	GND	

Test mode : DP IN

Test voltage: 240V/60Hz

MEASUREMENT RESULT: "PR-0507-0009_fin"

2016-5-7 15:34

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.164000	46.30	10.4	65	19.0	QP	L1	GND
1.860000	31.30	11.7	56	24.7	QP	L1	GND
24.000500	29.20	12.0	60	30.8	QP	L1	GND

MEASUREMENT RESULT: "PR-0507-0009_fin2"

2016-5-7 15:34

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.502000	36.30	11.5	46	9.7	AV	L1	GND
2.090000	29.40	11.7	46	16.6	AV	L1	GND
24.000500	27.80	12.0	50	22.2	AV	L1	GND

MEASUREMENT RESULT: "PR-0507-0010_fin"

2016-5-7 15:38

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.164000	48.20	10.4	65	17.1	QP	N	GND
0.504000	40.00	11.5	56	16.0	QP	N	GND
1.920000	31.80	11.7	56	24.2	QP	N	GND

MEASUREMENT RESULT: "PR-0507-0010_fin2"

2016-5-7 15:38

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.500000	36.30	11.5	46	9.7	AV	N	GND
3.467000	25.60	11.7	46	20.4	AV	N	GND
24.000500	27.50	12.0	50	22.5	AV	N	GND

Test mode : HDMI IN								
Test voltage: 240V/60Hz								
MEASUREMENT RESULT: "PR-0507-004_fin"								
2016-5-7 14:32								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.150000	46.10	10.3	66	19.9	QP	L1	GND	
0.194000	58.10	10.6	64	5.8	QP	L1	GND	
3.651500	43.50	11.7	56	12.5	QP	L1	GND	
MEASUREMENT RESULT: "PR-0507-004_fin2"								
2016-5-7 14:32								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.198000	42.60	10.6	54	11.1	AV	L1	GND	
3.561500	34.80	11.7	46	11.2	AV	L1	GND	
4.272500	31.00	11.8	46	15.0	AV	L1	GND	
MEASUREMENT RESULT: "PR-0507-0003_fin"								
2016-5-7 14:30								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.160000	55.00	10.4	66	10.5	QP	N	GND	
2.828000	35.60	11.7	56	20.4	QP	N	GND	
5.177000	31.30	11.8	60	28.7	QP	N	GND	
MEASUREMENT RESULT: "PR-0507-0003_fin2"								
2016-5-7 14:30								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.470000	34.90	11.4	47	11.6	AV	N	GND	
2.220500	32.40	11.7	46	13.6	AV	N	GND	
5.154500	25.00	11.8	50	25.0	AV	N	GND	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: DP IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: N 120V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 16:04:22

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

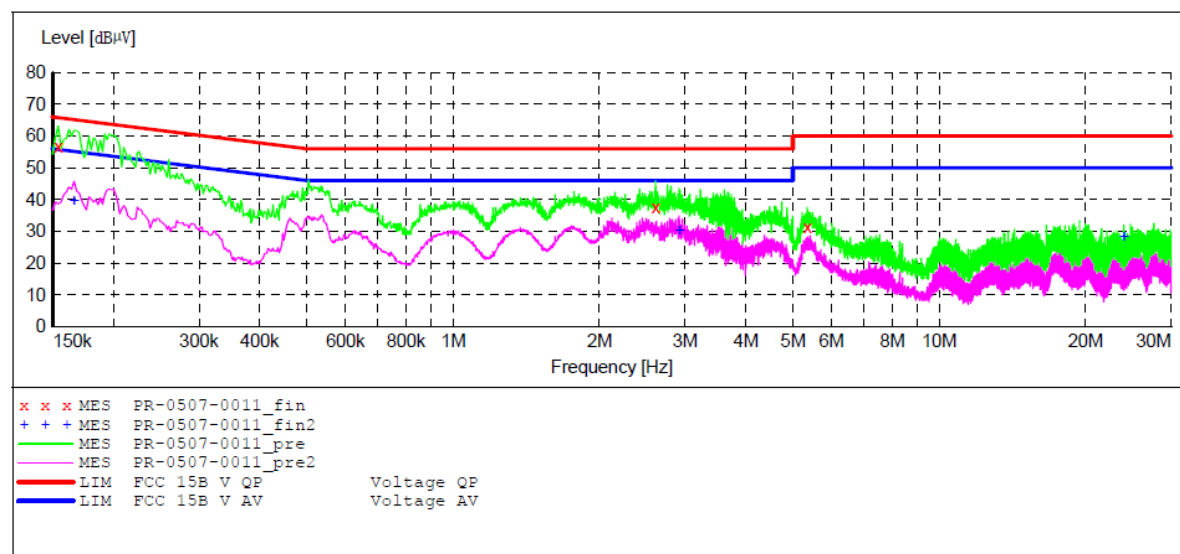

MEASUREMENT RESULT: "PR-0507-0011_fin"

2016-5-7 16:05

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154000	56.50	10.4	66	9.3	QP	N	GND
2.607500	37.40	11.7	56	18.6	QP	N	GND
5.352500	31.50	11.8	60	28.5	QP	N	GND

MEASUREMENT RESULT: "PR-0507-0011_fin2"

2016-5-7 16:05

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.166000	39.60	10.4	55	15.6	AV	N	GND
2.918000	30.20	11.7	46	15.8	AV	N	GND
24.000500	28.30	12.0	50	21.7	AV	N	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: DP IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: L 120V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 16:06:34

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

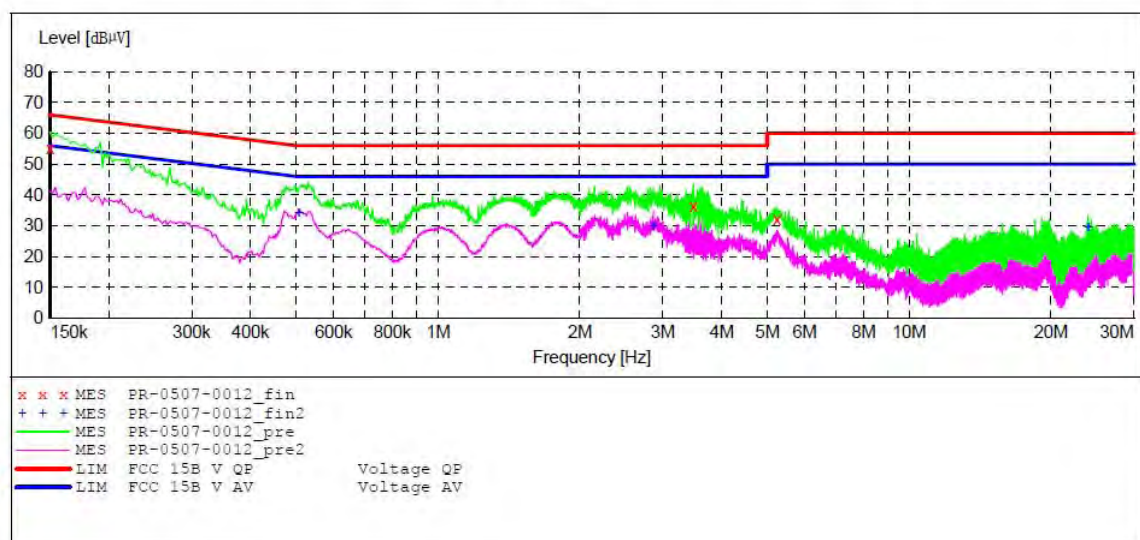

MEASUREMENT RESULT: "PR-0507-0012_fin"

2016-5-7 16:08

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	55.00	10.3	66	11.0	QP	L1	GND
3.485000	36.40	11.7	56	19.6	QP	L1	GND
5.235500	31.90	11.8	60	28.1	QP	L1	GND

MEASUREMENT RESULT: "PR-0507-0012_fin2"

2016-5-7 16:08

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.506000	33.90	11.5	46	12.1	AV	L1	GND
2.864000	29.60	11.7	46	16.4	AV	L1	GND
24.000500	29.30	12.0	50	20.7	AV	L1	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: AV IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: L 120V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 16:09:05

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

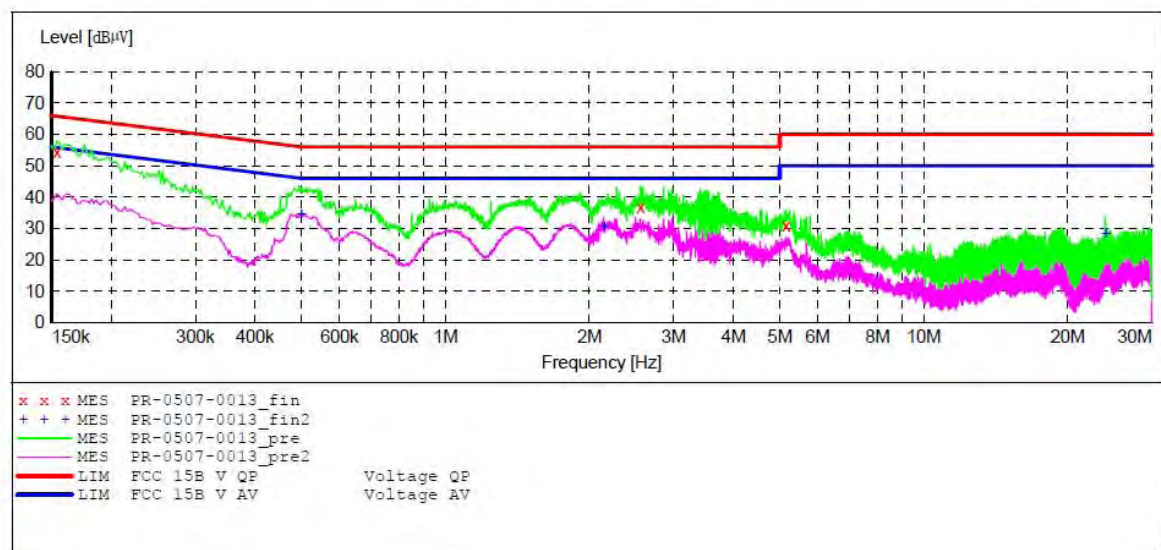

MEASUREMENT RESULT: "PR-0507-0013_fin"

2016-5-7 16:11

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154000	54.50	10.4	66	11.3	QP	L1	GND
2.558000	36.80	11.7	56	19.2	QP	L1	GND
5.150000	30.90	11.8	60	29.1	QP	L1	GND

MEASUREMENT RESULT: "PR-0507-0013_fin2"

2016-5-7 16:11

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.500000	34.60	11.5	46	11.4	AV	L1	GND
2.144000	30.60	11.7	46	15.4	AV	L1	GND
24.000500	28.20	12.0	50	21.8	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: AV IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: N 120V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 16:12:39

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

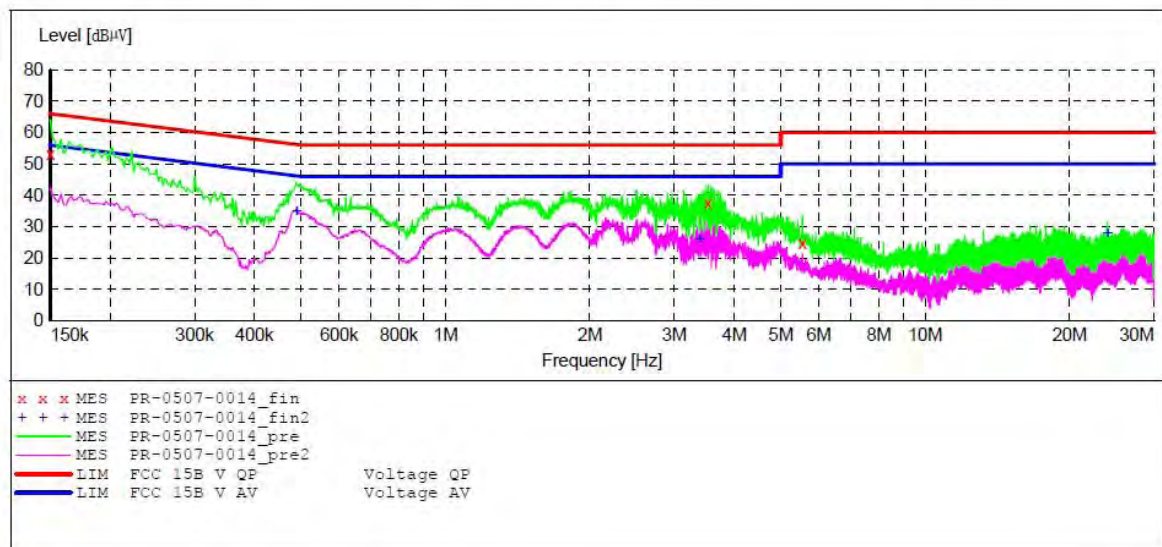

MEASUREMENT RESULT: "PR-0507-0014_fin"

2016-5-7 16:14

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	53.00	10.3	66	13.0	QP	N	GND
3.525500	37.50	11.7	56	18.5	QP	N	GND
5.550500	24.60	11.8	60	35.4	QP	N	GND

MEASUREMENT RESULT: "PR-0507-0014_fin2"

2016-5-7 16:14

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.490000	35.00	11.5	46	11.2	AV	N	GND
3.386000	25.80	11.7	46	20.2	AV	N	GND
24.000500	27.70	12.0	50	22.3	AV	N	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: HDMI IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: N 120V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 16:14:50

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

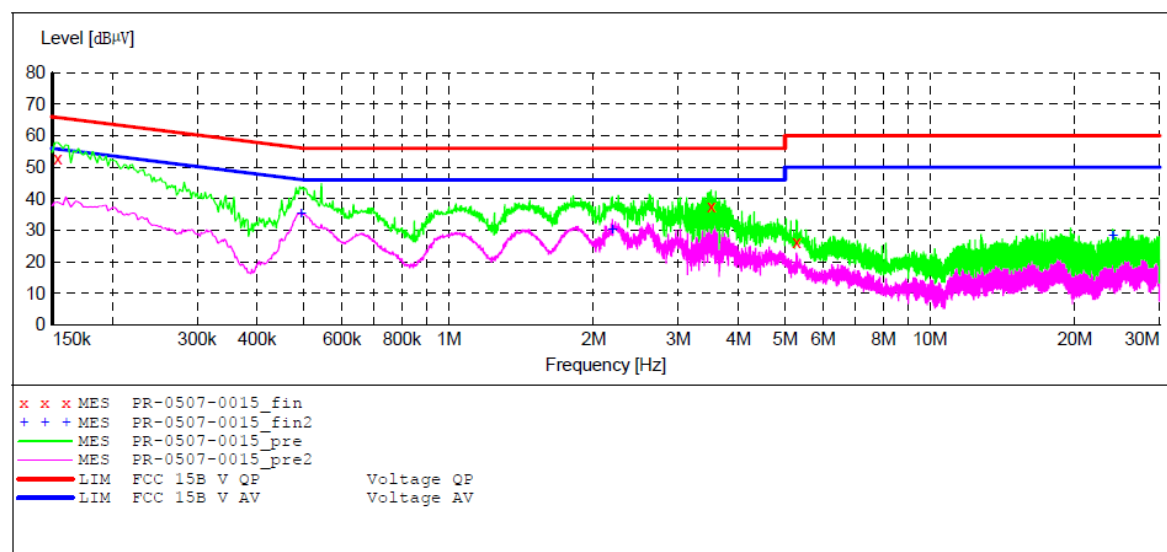

MEASUREMENT RESULT: "PR-0507-0015_fin"

2016-5-7 16:16

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154000	52.60	10.4	66	13.2	QP	N	GND
3.512000	37.70	11.7	56	18.3	QP	N	GND
5.285000	26.30	11.8	60	33.7	QP	N	GND

MEASUREMENT RESULT: "PR-0507-0015_fin2"

2016-5-7 16:16

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.494000	35.30	11.5	46	10.8	AV	N	GND
2.189000	30.20	11.7	46	15.8	AV	N	GND
24.000500	28.10	12.0	50	21.9	AV	N	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: HDMI IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: L 120V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 16:17:47

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

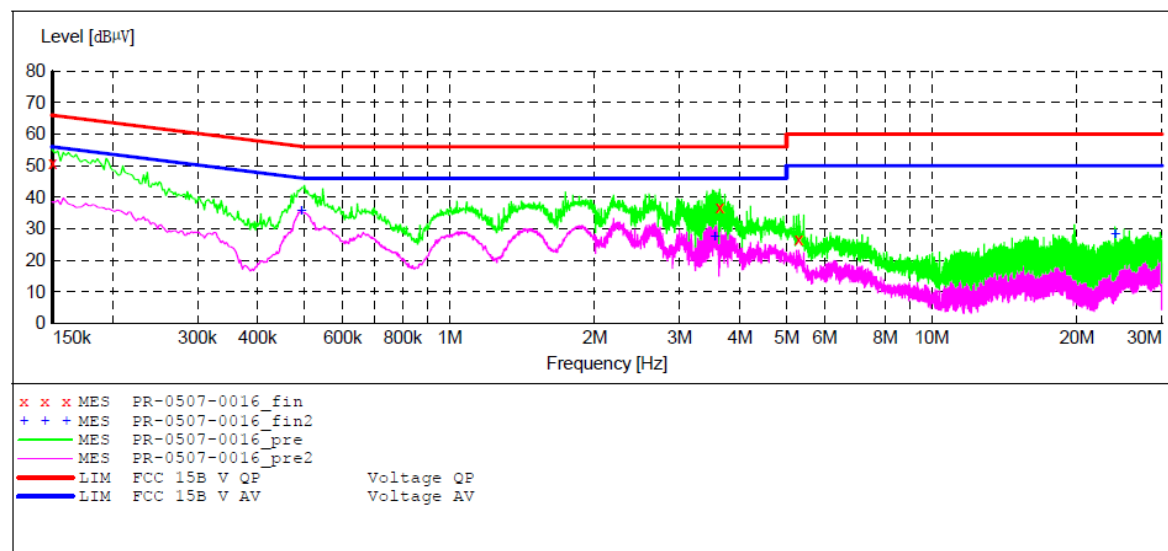

MEASUREMENT RESULT: "PR-0507-0016_fin"

2016-5-7 16:19

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	51.00	10.3	66	15.0	QP	L1	GND
3.633500	36.90	11.7	56	19.1	QP	L1	GND
5.294000	26.70	11.8	60	33.3	QP	L1	GND

MEASUREMENT RESULT: "PR-0507-0016_fin2"

2016-5-7 16:19

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.492000	35.50	11.5	46	10.6	AV	L1	GND
3.543500	27.30	11.7	46	18.7	AV	L1	GND
24.000500	28.30	12.0	50	21.7	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: VGA IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: L 120V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 16:20:15

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

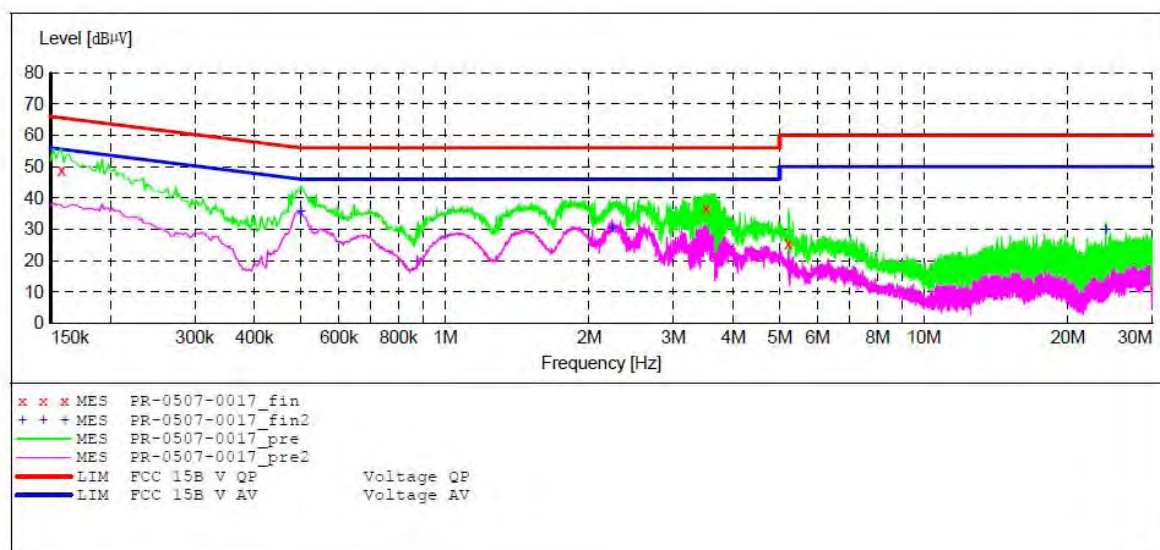

MEASUREMENT RESULT: "PR-0507-0017_fin"

2016-5-7 16:22

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.158000	49.00	10.4	66	16.6	QP	L1	GND
3.512000	36.90	11.7	56	19.1	QP	L1	GND
5.213000	25.40	11.8	60	34.6	QP	L1	GND

MEASUREMENT RESULT: "PR-0507-0017_fin2"

2016-5-7 16:22

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.500000	35.60	11.5	46	10.4	AV	L1	GND
2.234000	30.20	11.7	46	15.8	AV	L1	GND
24.000500	29.60	12.0	50	20.4	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: VGA IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: N 120V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 16:23:27

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

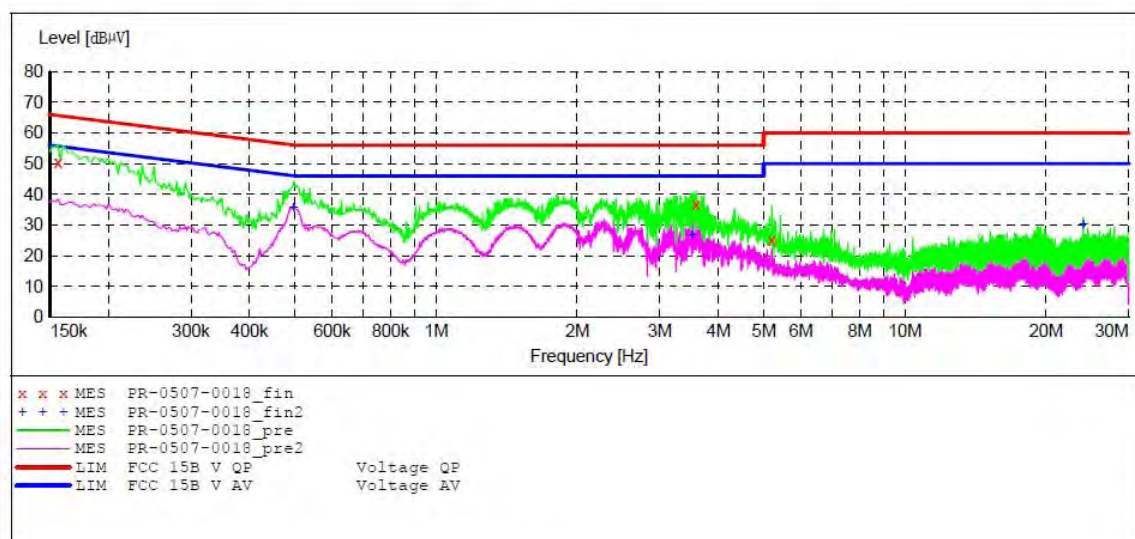

MEASUREMENT RESULT: "PR-0507-0018_fin"

2016-5-7 16:25

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.156000	50.60	10.4	66	15.1	QP	N	GND
3.588500	36.70	11.7	56	19.3	QP	N	GND
5.199500	24.90	11.8	60	35.1	QP	N	GND

MEASUREMENT RESULT: "PR-0507-0018_fin2"

2016-5-7 16:25

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.496000	35.80	11.5	46	10.3	AV	N	GND
3.512000	26.50	11.7	46	19.5	AV	N	GND
24.000500	30.00	12.0	50	20.0	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: USB IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: N 120V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 16:26:05

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

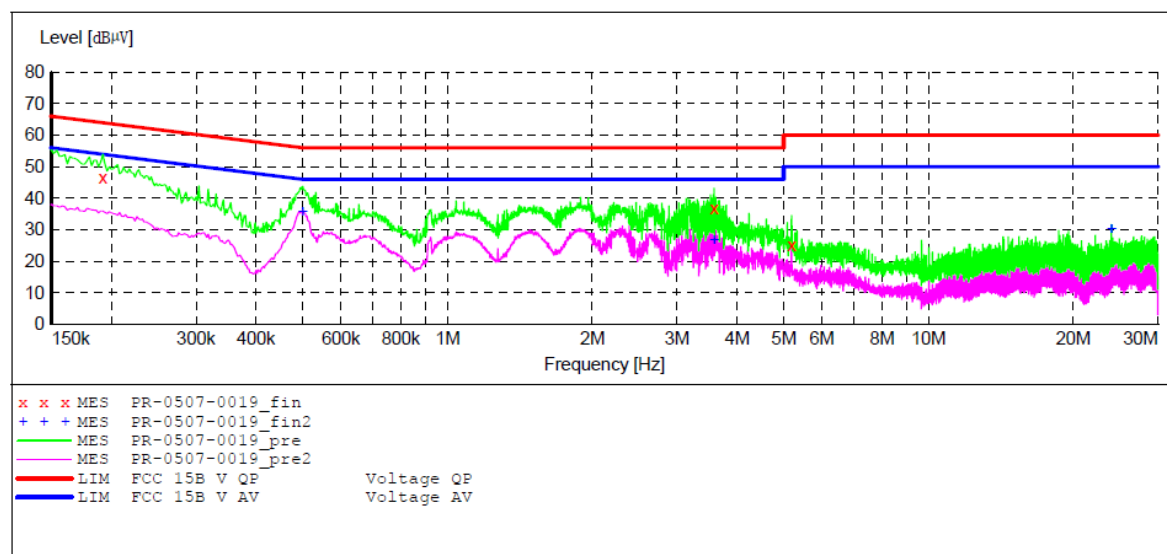

MEASUREMENT RESULT: "PR-0507-0019_fin"

2016-5-7 16:27

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.192000	46.70	10.6	64	17.2	QP	N	GND
3.584000	36.80	11.7	56	19.2	QP	N	GND
5.195000	25.00	11.8	60	35.0	QP	N	GND

MEASUREMENT RESULT: "PR-0507-0019_fin2"

2016-5-7 16:27

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.500000	35.70	11.5	46	10.3	AV	N	GND
3.584000	26.70	11.7	46	19.3	AV	N	GND
24.000500	30.00	12.0	50	20.0	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: USB IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: L 120V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 16:28:43

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

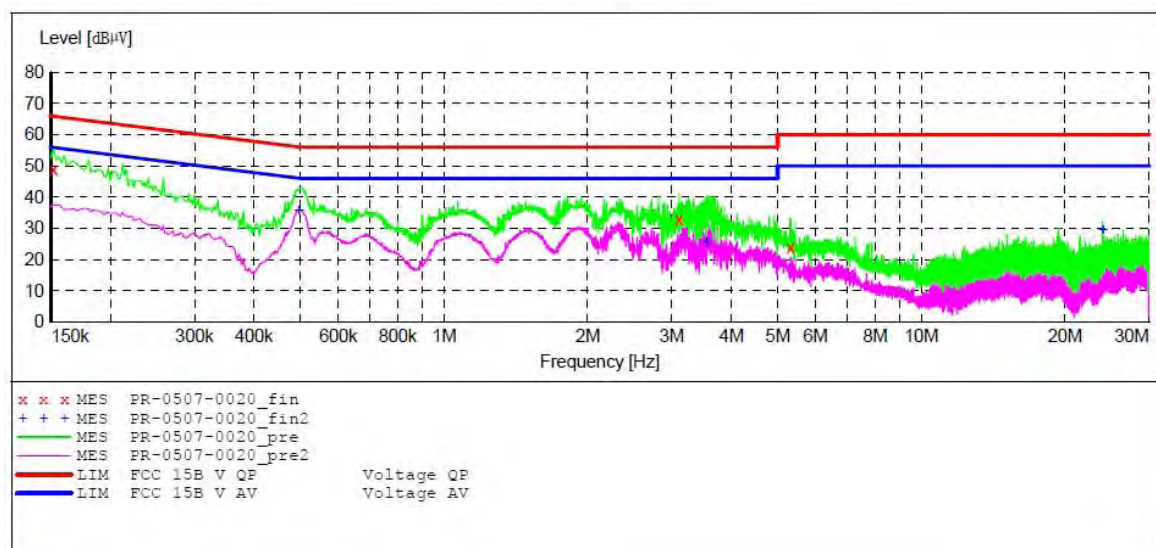

MEASUREMENT RESULT: "PR-0507-0020_fin"

2016-5-7 16:33

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.152000	48.80	10.4	66	17.1	QP	L1	GND
3.111500	33.00	11.7	56	23.0	QP	L1	GND
5.325500	23.90	11.8	60	36.1	QP	L1	GND

MEASUREMENT RESULT: "PR-0507-0020_fin2"

2016-5-7 16:33

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.496000	35.80	11.5	46	10.3	AV	L1	GND
3.543500	25.40	11.7	46	20.6	AV	L1	GND
24.000500	29.30	12.0	50	20.7	AV	L1	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: USB IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: L 240V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 14:22:31

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

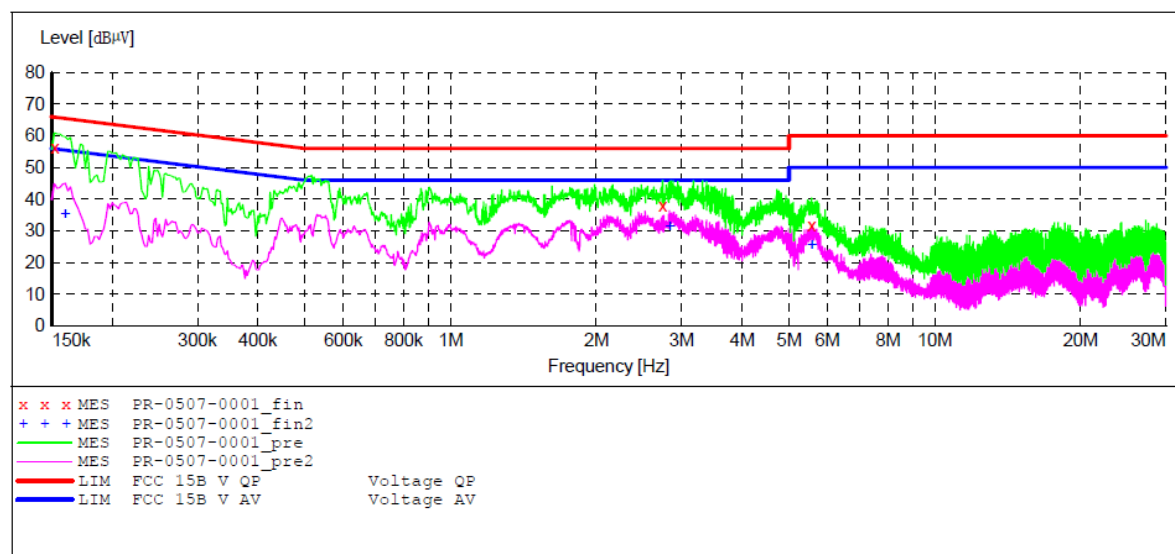

MEASUREMENT RESULT: "PR-0507-0001_fin"

2016-5-7 14:25

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.152000	56.40	10.4	66	9.5	QP	L1	GND
2.742500	37.80	11.7	56	18.2	QP	L1	GND
5.568500	31.80	11.8	60	28.2	QP	L1	GND

MEASUREMENT RESULT: "PR-0507-0001_fin2"

2016-5-7 14:25


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.160000	35.30	10.4	56	20.2	AV	L1	GND
2.832500	31.40	11.7	46	14.6	AV	L1	GND
5.568500	25.30	11.8	50	24.7	AV	L1	GND

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: USB IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: N 240V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 14:26:09

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

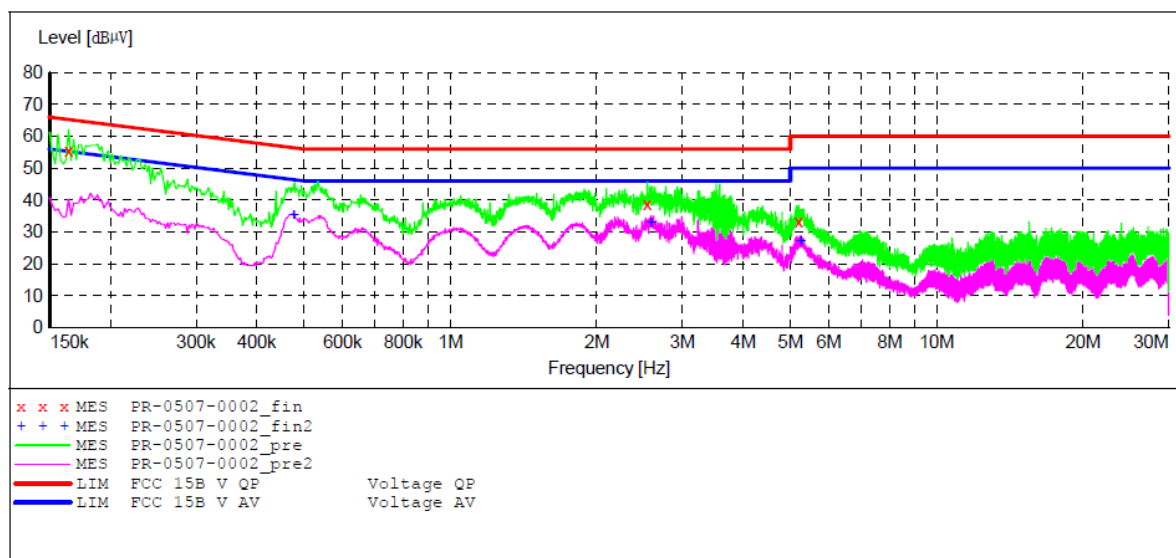

MEASUREMENT RESULT: "PR-0507-0002_fin"

2016-5-7 14:27

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.164000	55.60	10.4	65	9.7	QP	N	GND
2.540000	38.80	11.7	56	17.2	QP	N	GND
5.199500	33.10	11.8	60	26.9	QP	N	GND

MEASUREMENT RESULT: "PR-0507-0002_fin2"

2016-5-7 14:27

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.476000	35.30	11.4	46	11.1	AV	N	GND
2.585000	32.80	11.7	46	13.2	AV	N	GND
5.253500	27.00	11.8	50	23.0	AV	N	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: AV IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: L 240V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 15:22:12

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

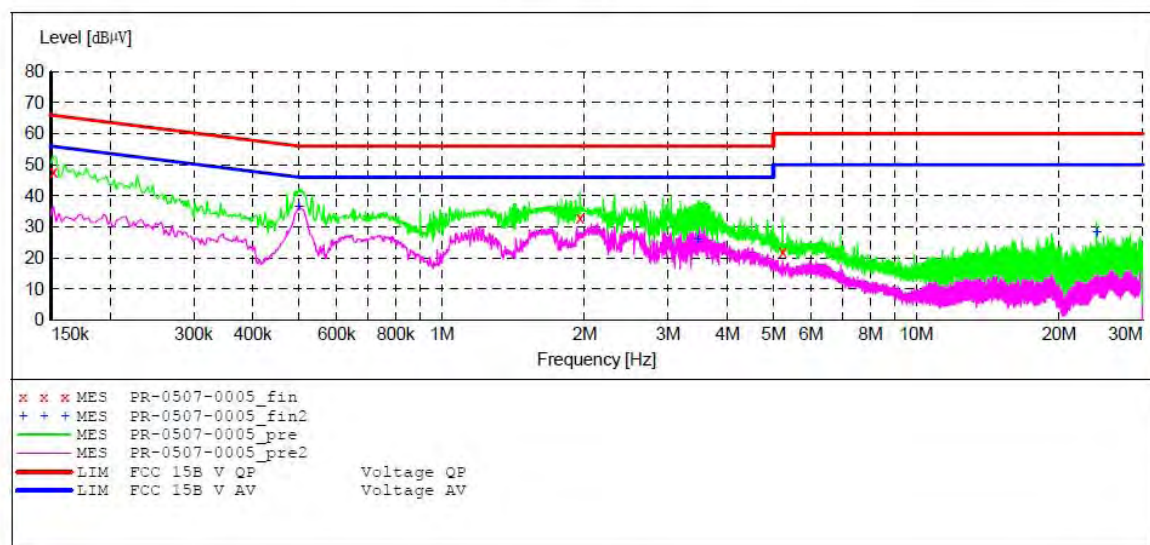

MEASUREMENT RESULT: "PR-0507-0005_fin"

2016-5-7 15:25

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.152000	47.60	10.4	66	18.3	QP	L1	GND
1.956000	32.90	11.7	56	23.1	QP	L1	GND
5.231000	22.10	11.8	60	37.9	QP	L1	GND

MEASUREMENT RESULT: "PR-0507-0005_fin2"

2016-5-7 15:25

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.500000	36.30	11.5	46	9.7	AV	L1	GND
3.467000	25.80	11.7	46	20.2	AV	L1	GND
24.000500	28.00	12.0	50	22.0	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: AV IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: N 240V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 15:25:49

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

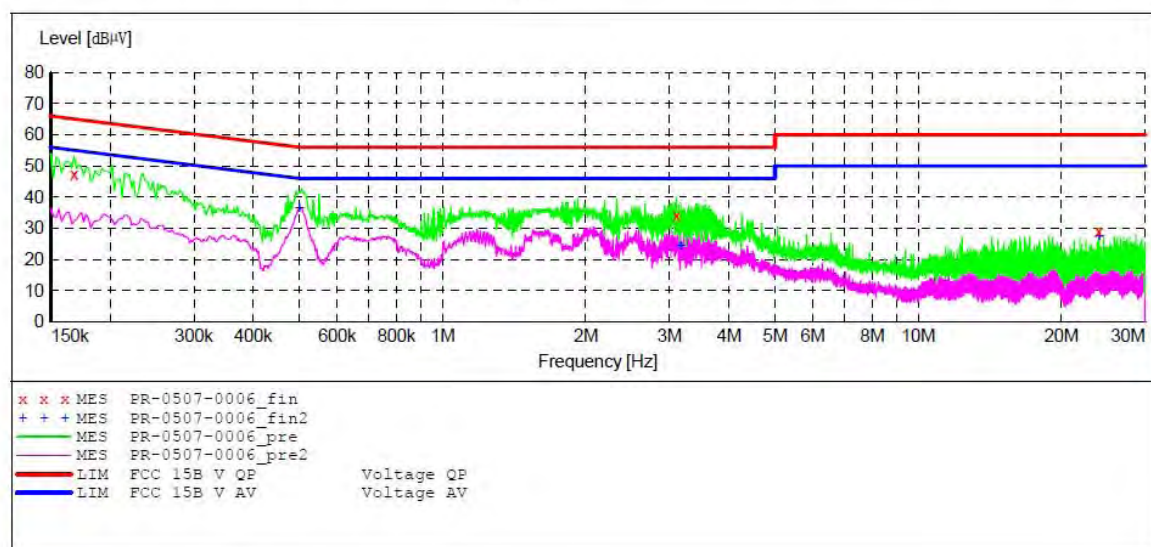

MEASUREMENT RESULT: "PR-0507-0006_fin"

2016-5-7 15:27

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	47.30	10.5	65	17.8	QP	N	GND
3.102500	34.10	11.7	56	21.9	QP	N	GND
24.000500	29.10	12.0	60	30.9	QP	N	GND

MEASUREMENT RESULT: "PR-0507-0006_fin2"

2016-5-7 15:27

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.500000	36.50	11.5	46	9.5	AV	N	GND
3.165500	24.40	11.7	46	21.6	AV	N	GND
24.000500	27.50	12.0	50	22.5	AV	N	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: VGA IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: N 240V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 15:28:27

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

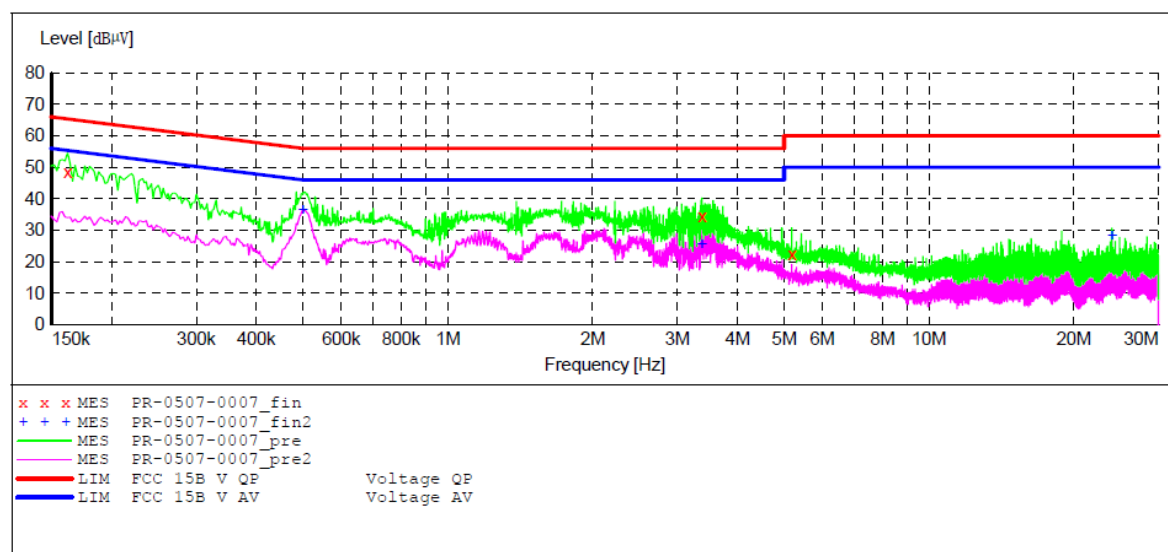

MEASUREMENT RESULT: "PR-0507-0007_fin"

2016-5-7 15:30

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.162000	48.60	10.4	65	16.8	QP	N	GND
3.372500	34.30	11.7	56	21.7	QP	N	GND
5.186000	22.30	11.8	60	37.7	QP	N	GND

MEASUREMENT RESULT: "PR-0507-0007_fin2"

2016-5-7 15:30

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.500000	36.40	11.5	46	9.6	AV	N	GND
3.372500	25.40	11.7	46	20.6	AV	N	GND
24.000500	28.00	12.0	50	22.0	AV	N	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: VGA IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: L 240V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 15:30:41

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

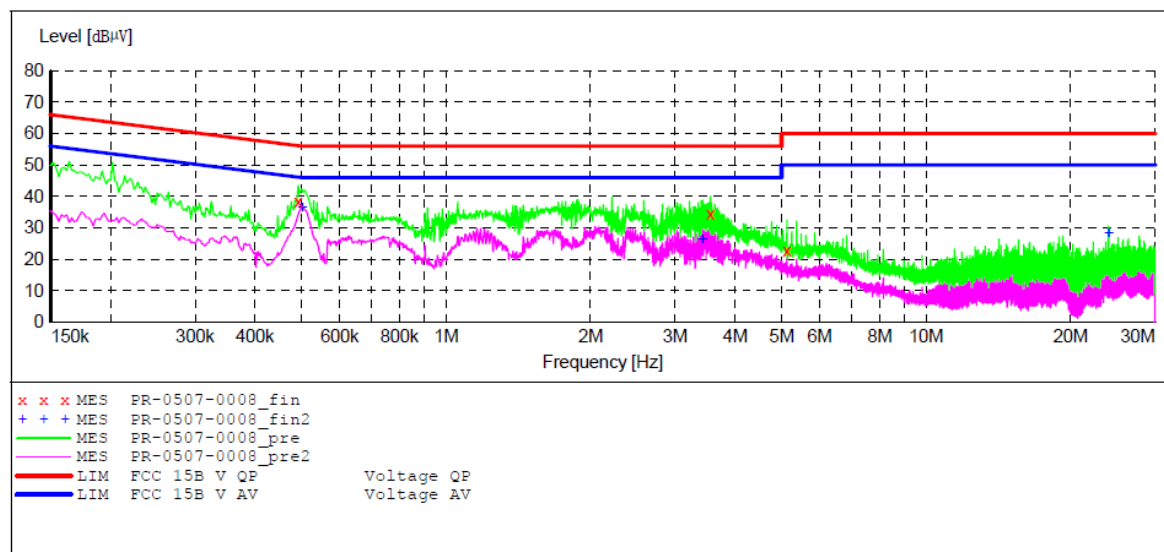

MEASUREMENT RESULT: "PR-0507-0008_fin"

2016-5-7 15:32

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.492000	38.20	11.5	56	17.9	QP	L1	GND
3.552500	34.40	11.7	56	21.6	QP	L1	GND
5.132000	22.70	11.8	60	37.3	QP	L1	GND

MEASUREMENT RESULT: "PR-0507-0008_fin2"

2016-5-7 15:32

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.502000	36.30	11.5	46	9.7	AV	L1	GND
3.413000	26.20	11.7	46	19.8	AV	L1	GND
24.000500	28.00	12.0	50	22.0	AV	L1	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: DP IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: L 240V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 15:33:06

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

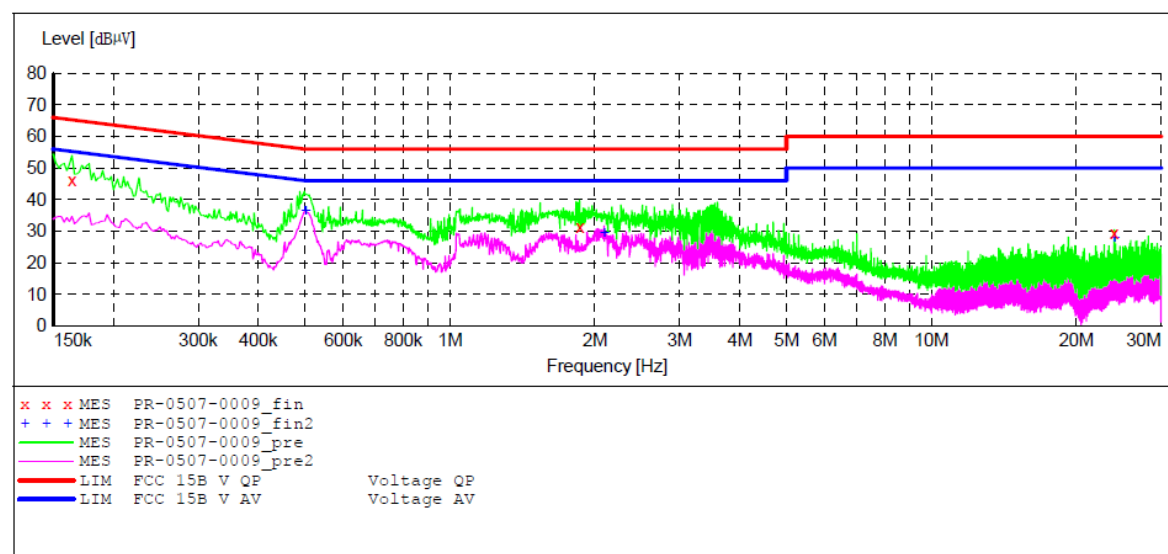

MEASUREMENT RESULT: "PR-0507-0009_fin"

2016-5-7 15:34

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.164000	46.30	10.4	65	19.0	QP	L1	GND
1.860000	31.30	11.7	56	24.7	QP	L1	GND
24.000500	29.20	12.0	60	30.8	QP	L1	GND

MEASUREMENT RESULT: "PR-0507-0009_fin2"

2016-5-7 15:34

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.502000	36.30	11.5	46	9.7	AV	L1	GND
2.090000	29.40	11.7	46	16.6	AV	L1	GND
24.000500	27.80	12.0	50	22.2	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: DP IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: N 240V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 15:37:34

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

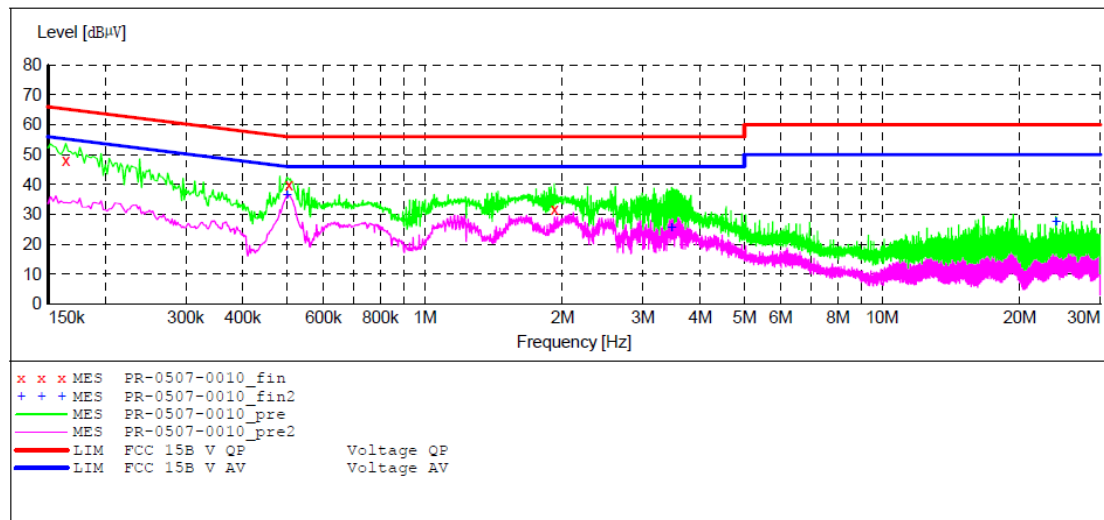

MEASUREMENT RESULT: "PR-0507-0010_fin"

2016-5-7 15:38

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.164000	48.20	10.4	65	17.1	QP	N	GND
0.504000	40.00	11.5	56	16.0	QP	N	GND
1.920000	31.80	11.7	56	24.2	QP	N	GND

MEASUREMENT RESULT: "PR-0507-0010_fin2"

2016-5-7 15:38

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.500000	36.30	11.5	46	9.7	AV	N	GND
3.467000	25.60	11.7	46	20.4	AV	N	GND
24.000500	27.50	12.0	50	22.5	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: HDMI IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: L 240V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 14:30:55

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

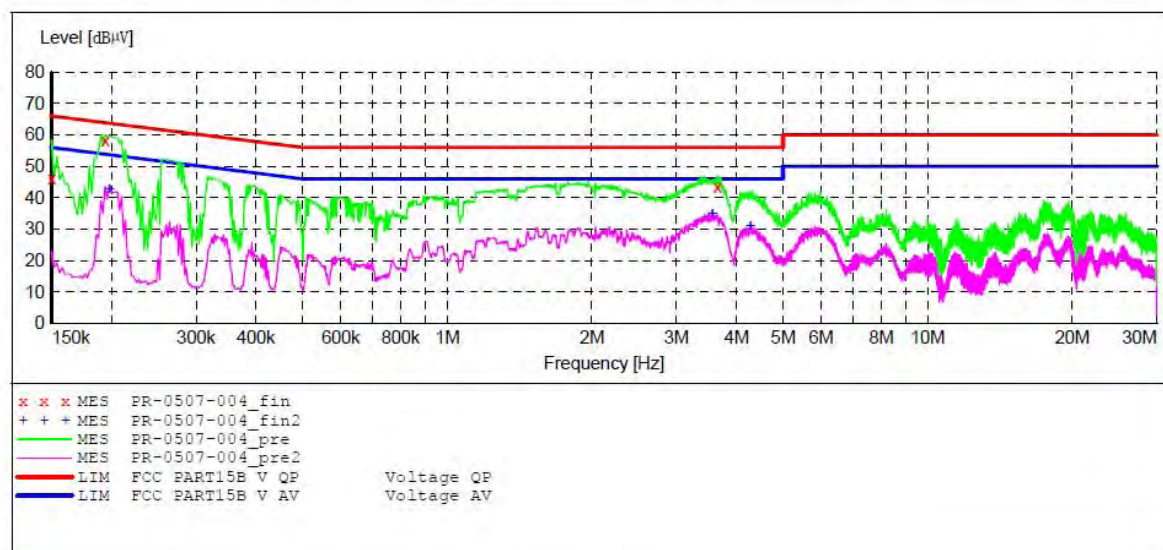

MEASUREMENT RESULT: "PR-0507-004_fin"

2016-5-7 14:32

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	46.10	10.3	66	19.9	QP	L1	GND
0.194000	58.10	10.6	64	5.8	QP	L1	GND
3.651500	43.50	11.7	56	12.5	QP	L1	GND

MEASUREMENT RESULT: "PR-0507-004_fin2"

2016-5-7 14:32

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.198000	42.60	10.6	54	11.1	AV	L1	GND
3.561500	34.80	11.7	46	11.2	AV	L1	GND
4.272500	31.00	11.8	46	15.0	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: Interactive Flat Panel M/N:LE-43PC88
 Manufacturer: PRIMA
 Operating Condition: HDMI IN
 Test Site: 2#Shielding Room
 Operator: DING
 Test Specification: N 240V/60Hz
 Comment: Report NO.:ATE20160704
 Start of Test: 2016-5-7 / 14:28:36

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

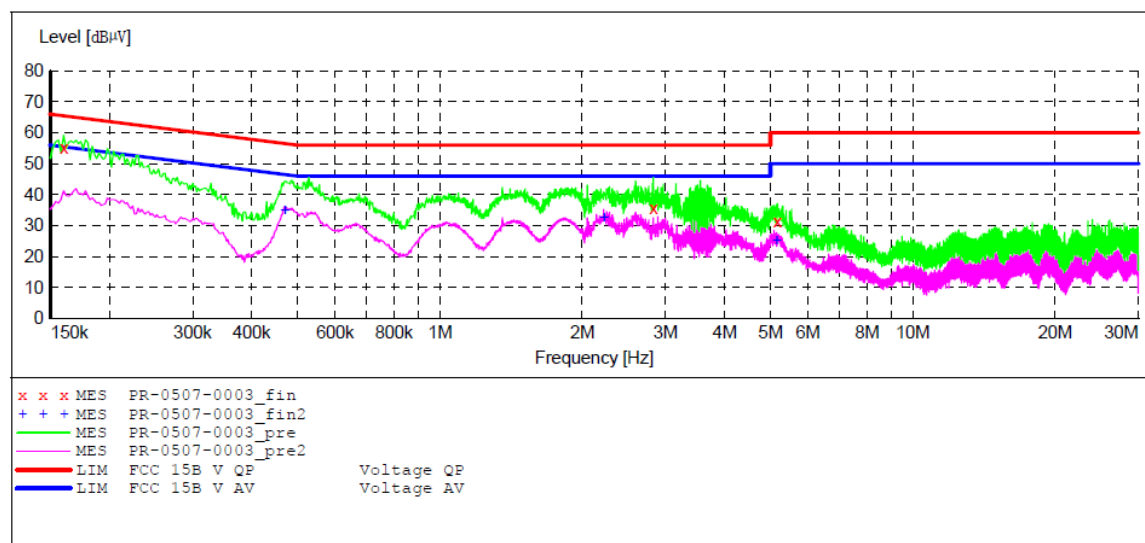

MEASUREMENT RESULT: "PR-0507-0003_fin"

2016-5-7 14:30

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.160000	55.00	10.4	66	10.5	QP	N	GND
2.828000	35.60	11.7	56	20.4	QP	N	GND
5.177000	31.30	11.8	60	28.7	QP	N	GND

MEASUREMENT RESULT: "PR-0507-0003_fin2"


2016-5-7 14:30

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.470000	34.90	11.4	47	11.6	AV	N	GND
2.220500	32.40	11.7	46	13.6	AV	N	GND
5.154500	25.00	11.8	50	25.0	AV	N	GND

5. RADIATED EMISSION MEASUREMENT


5.1. Block Diagram of Test

5.1.1. Block diagram of connection between the EUT and simulators

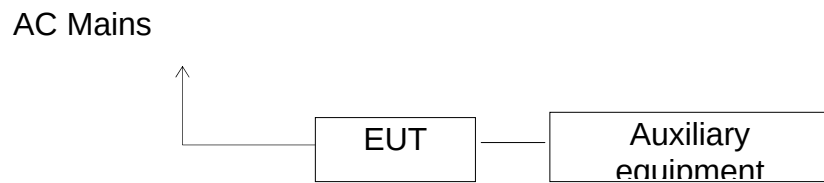

(EUT: Interactive Flat Panel)

5.1.2. Block diagram of test setup (In chamber)

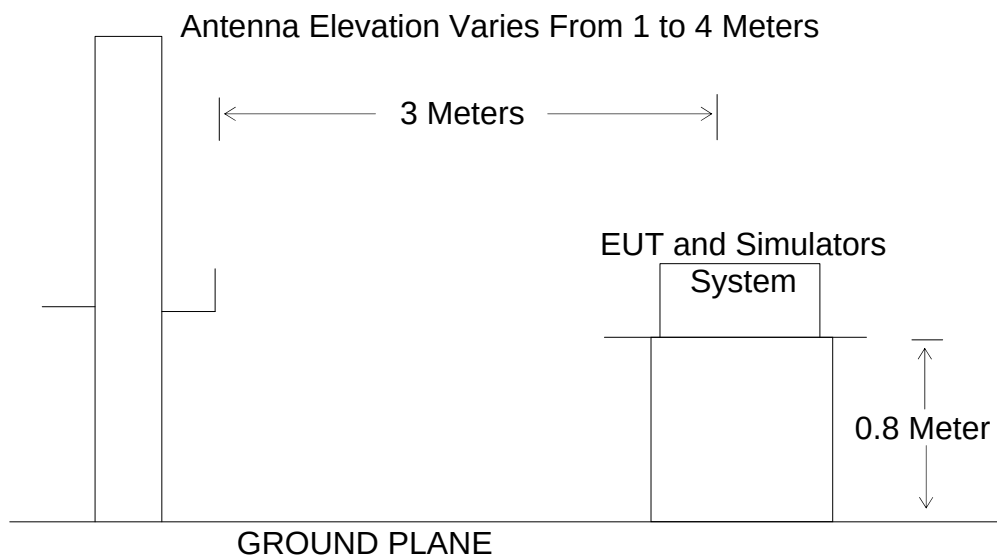

5.2. Test mode description

- Test mode 1: USB IN
- Test mode 2: AV IN
- Test mode 3: VGA IN
- Test mode 4: DP IN
- Test mode 5: HDMI IN

5.3. Radiated Emission Limit (Class B)

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V/m})$
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0
Remark: (1) Emission level $\text{dB}(\mu\text{V}) = 20 \log$ Emission level $\mu\text{V/m}$. (2) The smaller limit shall apply at the cross point between two frequency bands. (3) Distance is the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.			

5.4. Manufacturer

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.4.1. Interactive Flat Panel (EUT)

Model Number: LE-43PC88

Manufacturer: Xiamen Prima Technology Inc.

5.5. Operating Condition of EUT

5.5.1. Setup the EUT and simulator as shown as Section 5.1

5.5.2. Turn on the power of all equipment.

5.5.3. Let the EUT work in test mode and measure it.

5.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2014 on radiated emission measurement.

The bandwidth of the EMI test receiver (R&S ESCS30) is set at 120kHz.

The frequency range from 30MHz to 6000MHz is checked.

Note:The EUT highest operating frequency provided by Manufacturer is 1.2GHz, the radiated emission measurement shall be made up to 6 GHz.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705–108	1000.
108–500	2000.
500–1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

5.7.Radiated Emission Noise Measurement Result

PASS.

The frequency range from 30MHz to 6000MHz is investigated.

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.

Below 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #360

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: USB IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 19/48/25

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

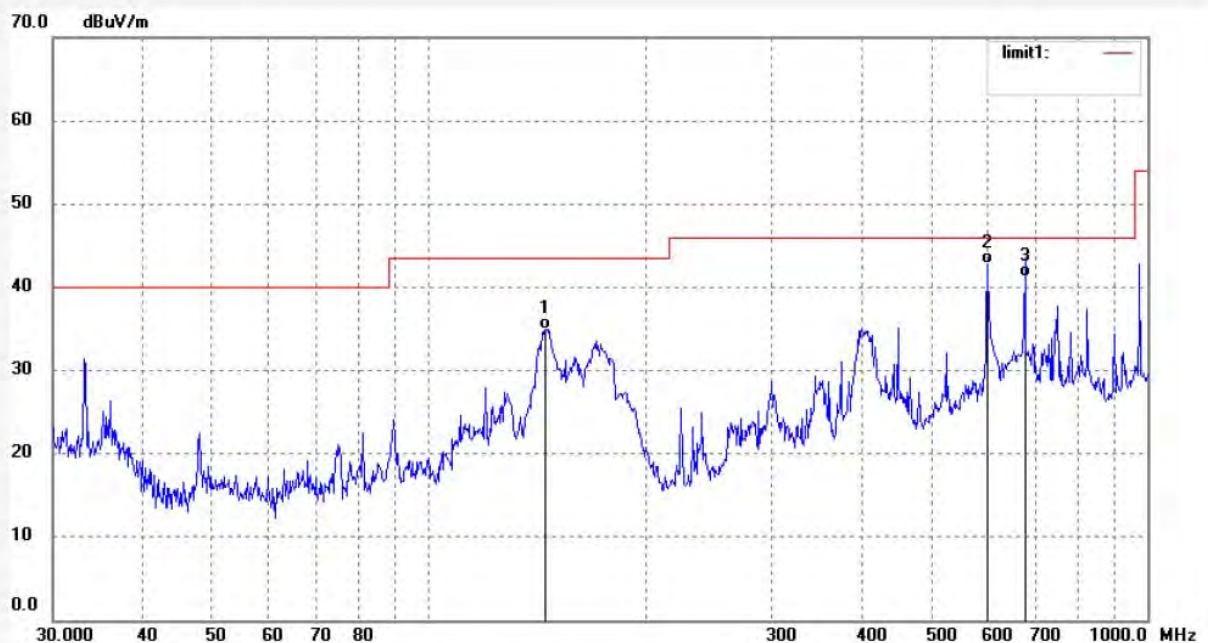

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	145.3506	50.19	-15.23	34.96	43.50	-8.54	QP			
2	599.3212	45.82	-2.97	42.85	46.00	-3.15	QP			
3	675.2080	43.25	-2.07	41.18	46.00	-4.82	QP			

Job No.: DING #361

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: USB IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 19/50/29

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

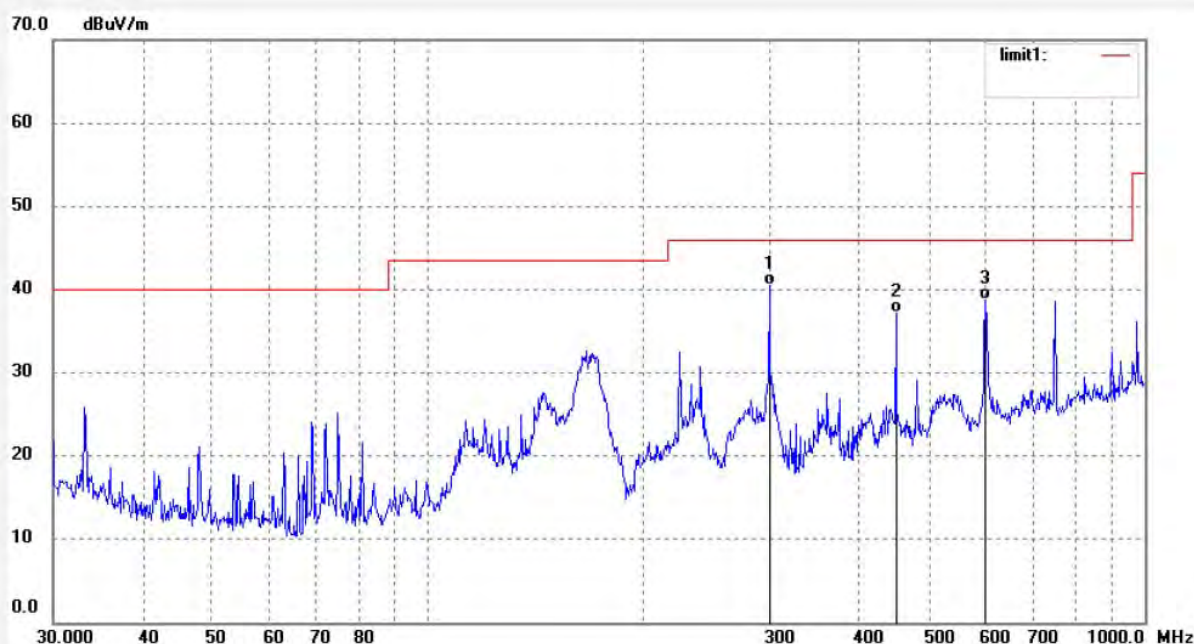

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	299.3158	49.77	-9.29	40.48	46.00	-5.52	QP			
2	449.5558	42.99	-5.78	37.21	46.00	-8.79	QP			
3	599.3212	41.65	-2.97	38.68	46.00	-7.32	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20160704

Page 47 of 76

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #362

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: VGA IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 19/51/41

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

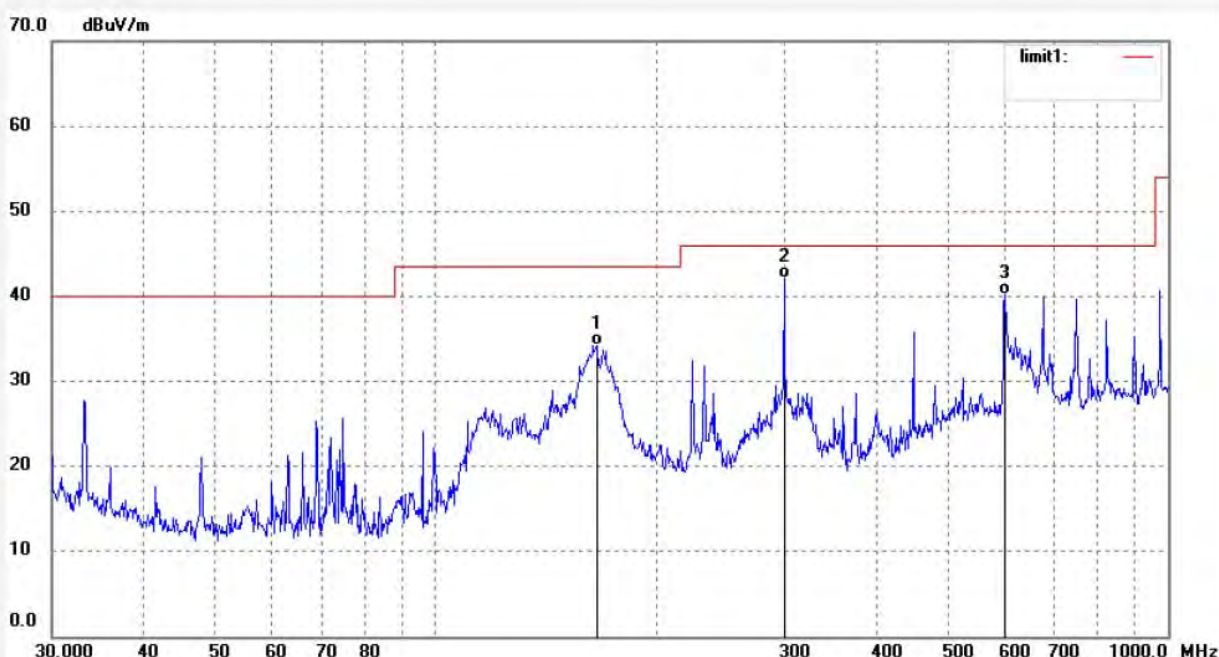

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	166.0680	48.58	-14.30	34.28	43.50	-9.22	QP			
2	299.3158	51.40	-9.29	42.11	46.00	-3.89	QP			
3	599.3212	43.08	-2.97	40.11	46.00	-5.89	QP			

Job No.: DING #363

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: VGA IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 19/53/16

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

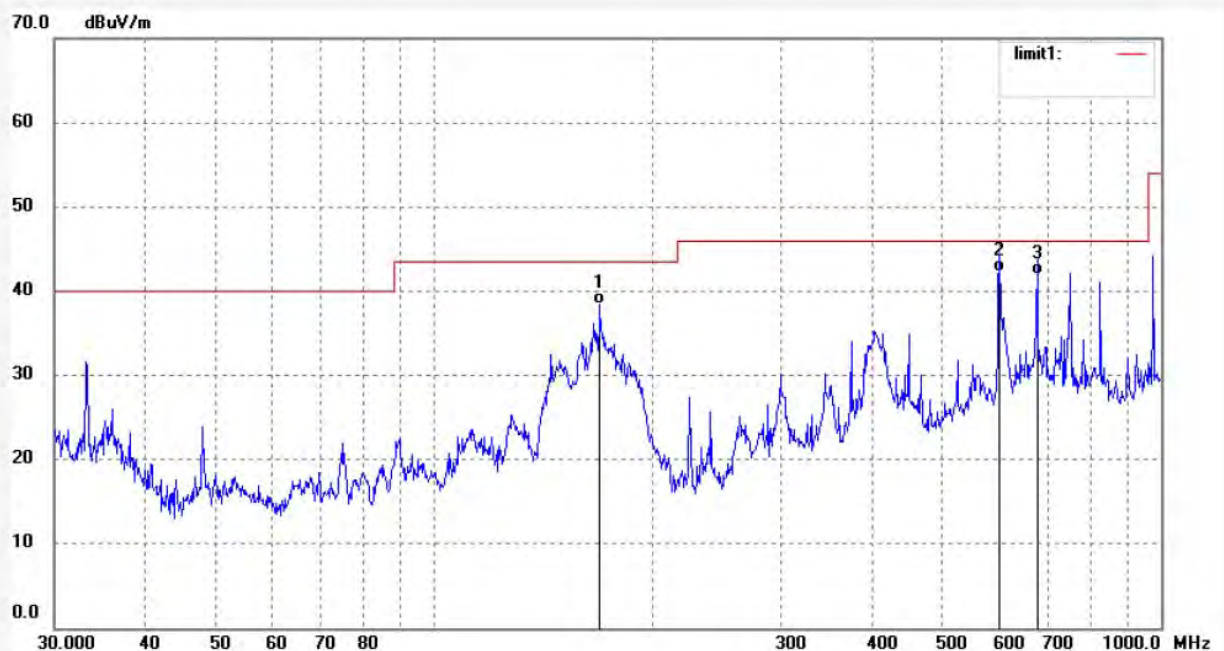

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	169.0054	52.29	-13.84	38.45	43.50	-5.05	QP			
2	599.3212	45.21	-2.97	42.24	46.00	-3.76	QP			
3	675.2080	43.96	-2.07	41.89	46.00	-4.11	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #364

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: HDMI IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 19/55/26

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

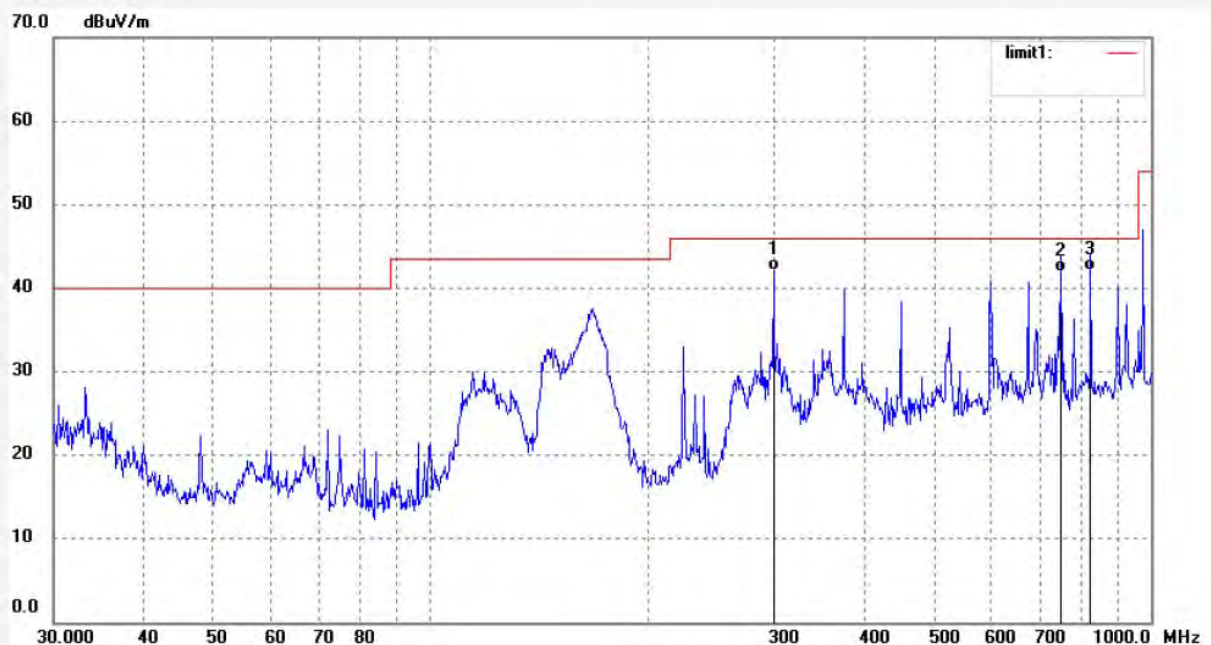

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	299.3158	51.42	-9.29	42.13	46.00	-3.87	QP			
2	750.1083	42.96	-1.03	41.93	46.00	-4.07	QP			
3	824.5968	41.68	0.42	42.10	46.00	-3.90	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #365

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: HDMI IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 19/56/36

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

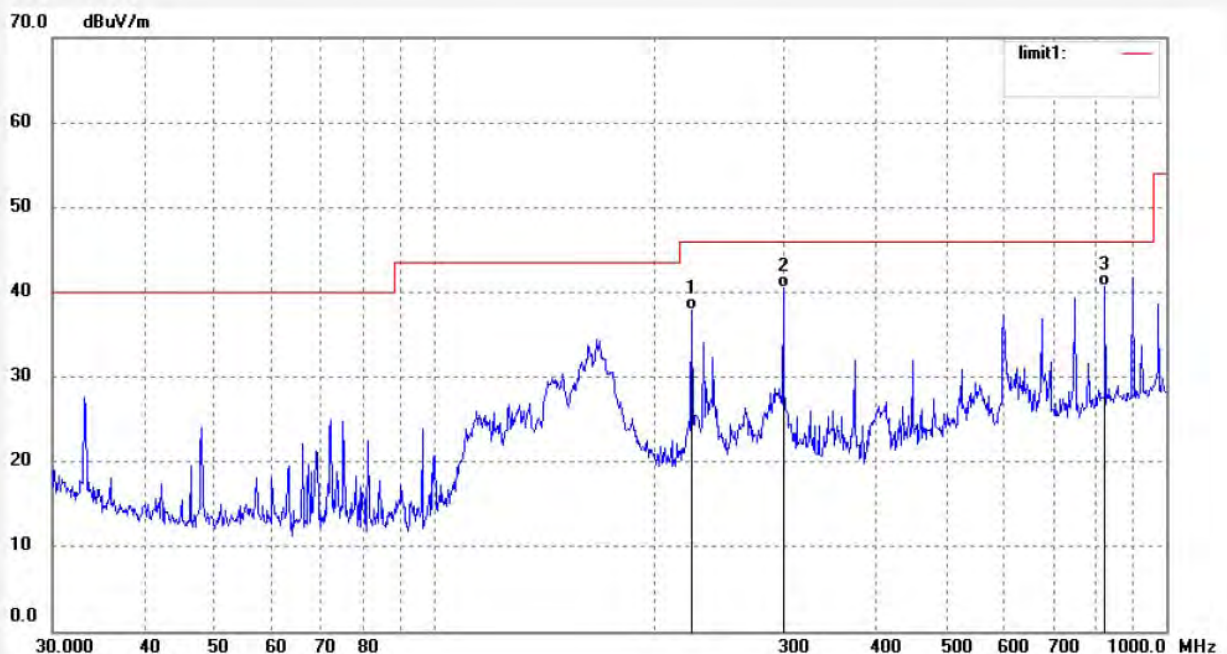

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	224.5193	49.32	-11.46	37.86	46.00	-8.14	QP			
2	299.3158	49.72	-9.29	40.43	46.00	-5.57	QP			
3	824.5968	40.27	0.42	40.69	46.00	-5.31	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #366

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: AV IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 19/59/03

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

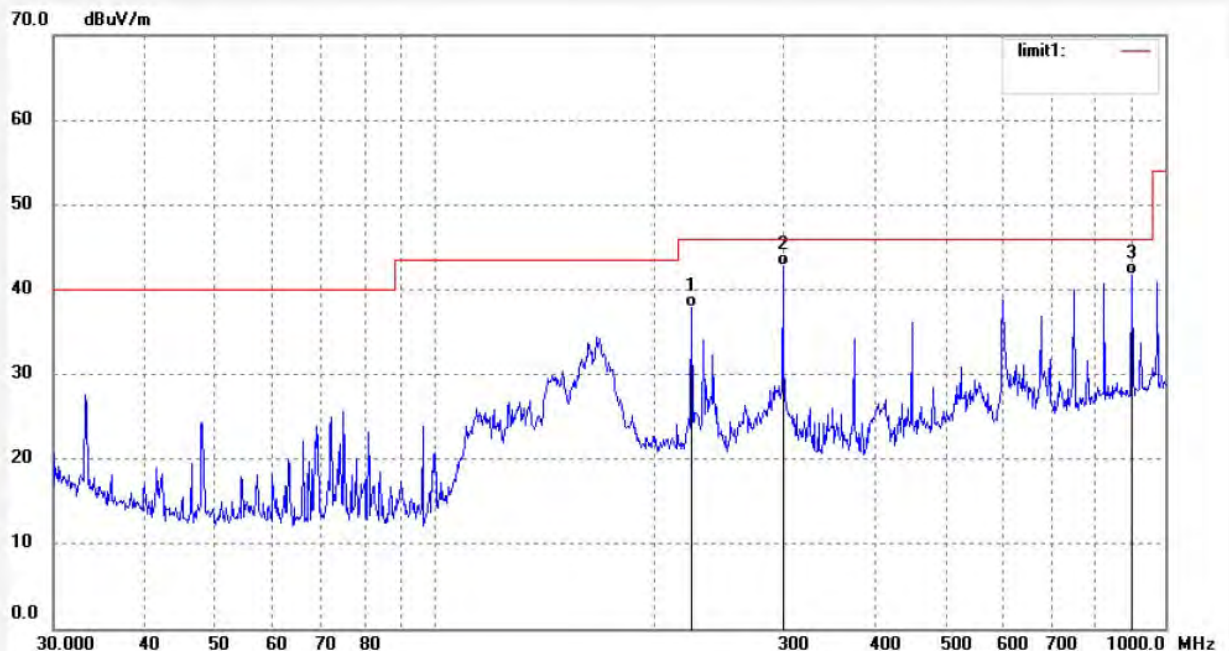

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	224.5192	49.32	-11.46	37.86	46.00	-8.14	QP			
2	299.3158	52.08	-9.29	42.79	46.00	-3.21	QP			
3	900.1473	40.48	1.28	41.76	46.00	-4.24	QP			

Job No.: DING #367

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: AV IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/00/54

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

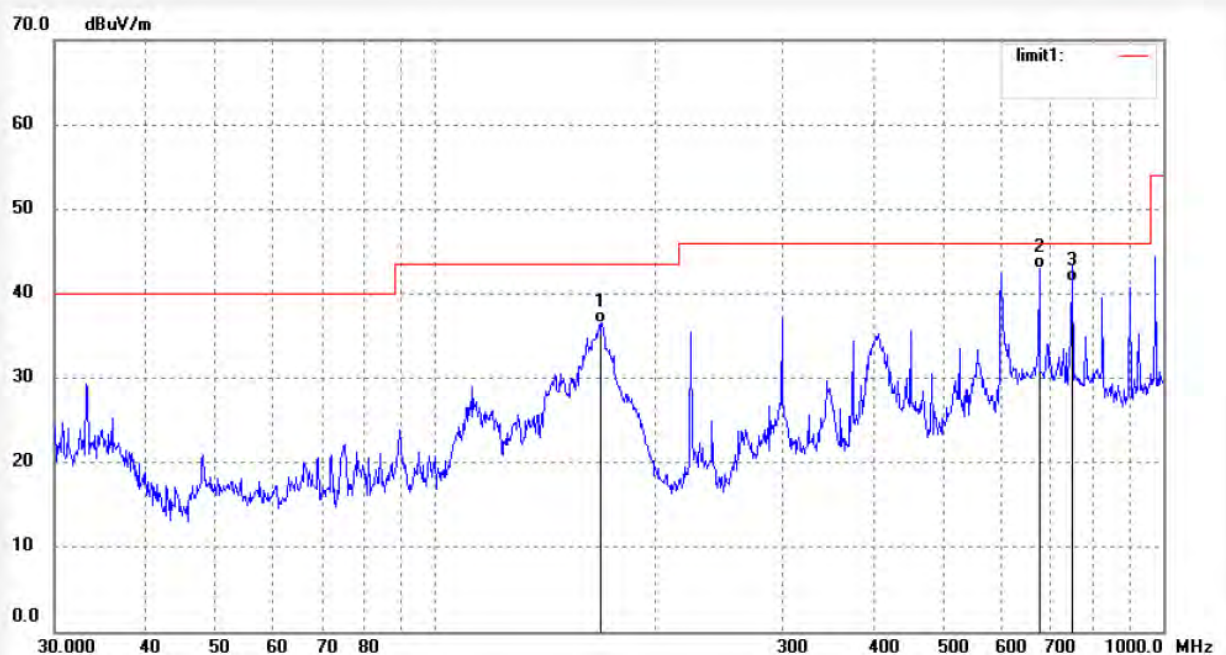

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	169.0054	50.29	-13.84	36.45	43.50	-7.05	QP			
2	675.2080	45.03	-2.07	42.96	46.00	-3.04	QP			
3	750.1083	42.35	-1.03	41.32	46.00	-4.68	QP			

Job No.: DING #368

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: DP IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/02/39

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

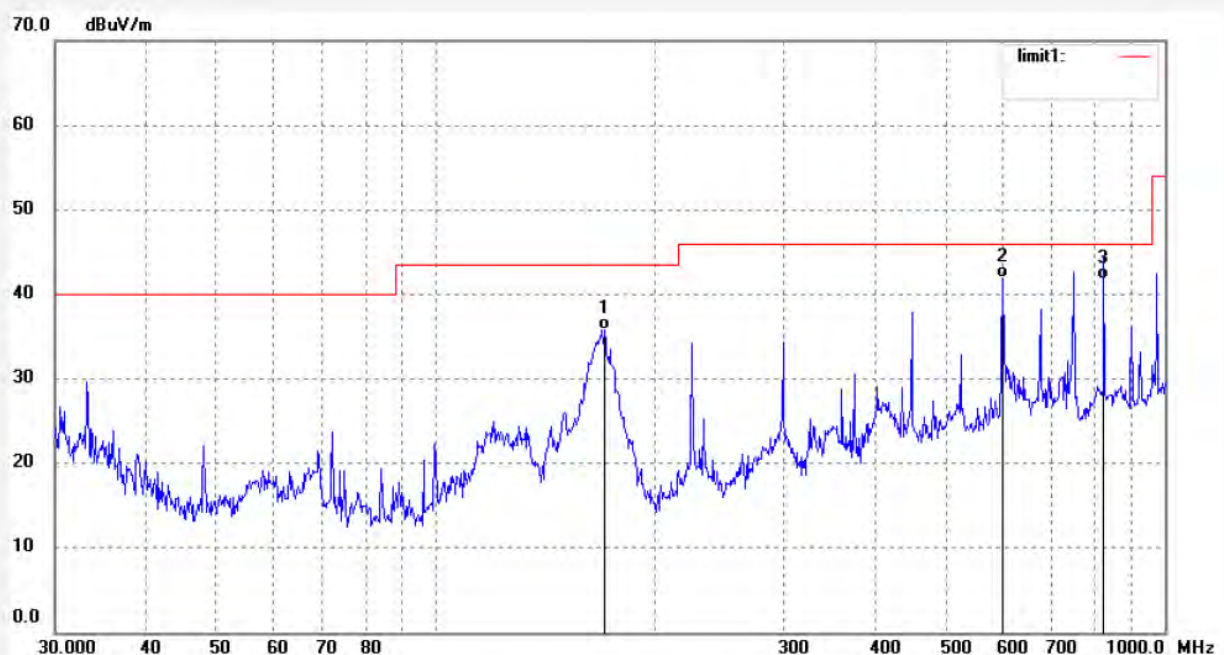

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	170.1948	49.49	-13.68	35.81	43.50	-7.69	QP			
2	599.3212	44.84	-2.97	41.87	46.00	-4.13	QP			
3	824.5968	41.35	0.42	41.77	46.00	-4.23	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20160704

Page 54 of 76

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #369

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: DP IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/04/18

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

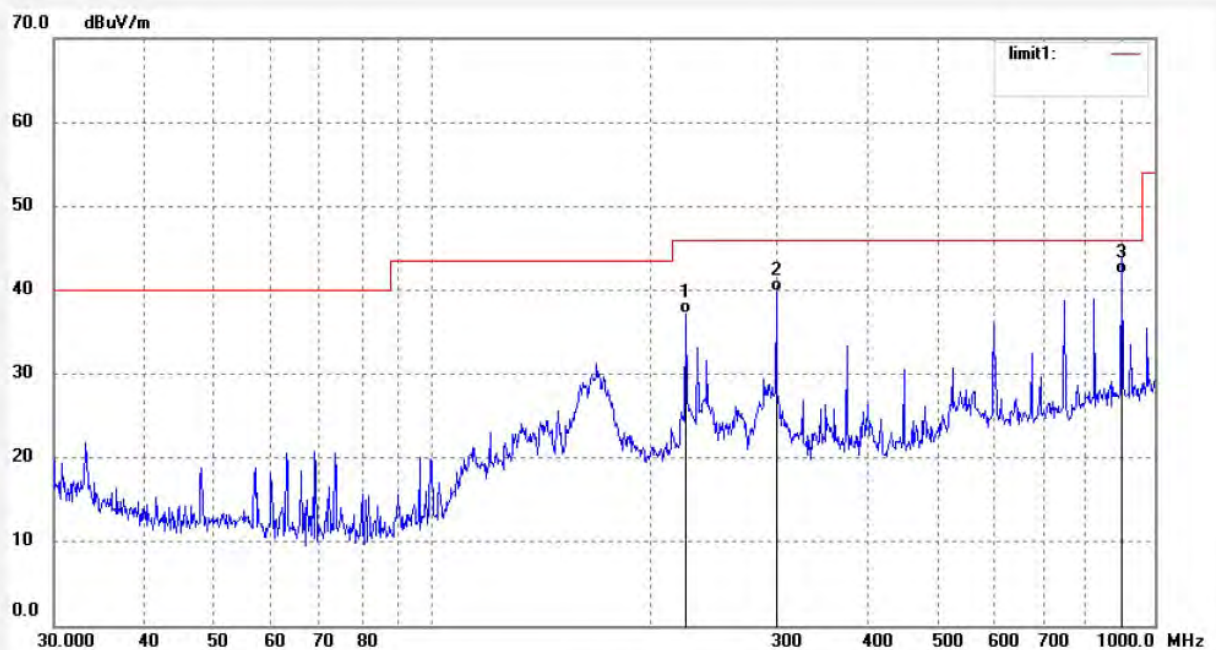

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	224.5193	48.59	-11.46	37.13	46.00	-8.87	QP			
2	299.3158	49.12	-9.29	39.83	46.00	-6.17	QP			
3	900.1474	40.68	1.28	41.96	46.00	-4.04	QP			

Above 1GHz


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #370

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: DP IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/07/19

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

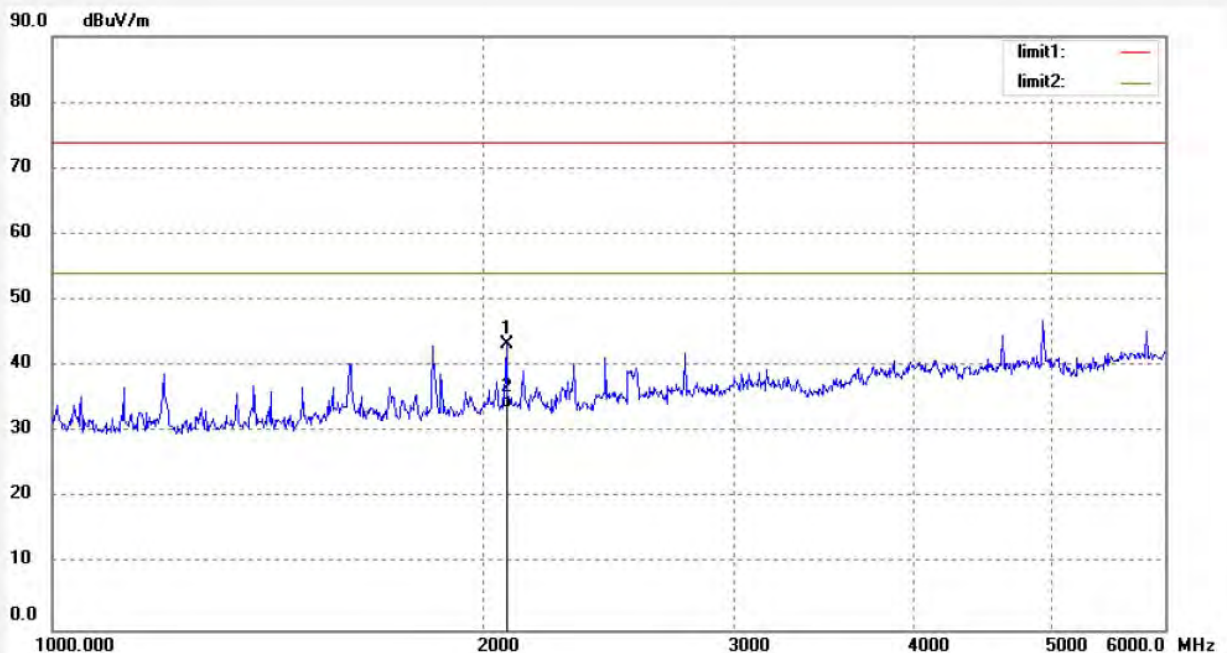

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2077.235	52.01	-8.69	43.32	74.00	-30.68	peak			
2	2077.235	42.25	-8.69	33.56	54.00	-20.44	AVG			

Job No.: DING #371

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: DP IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/08/57

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

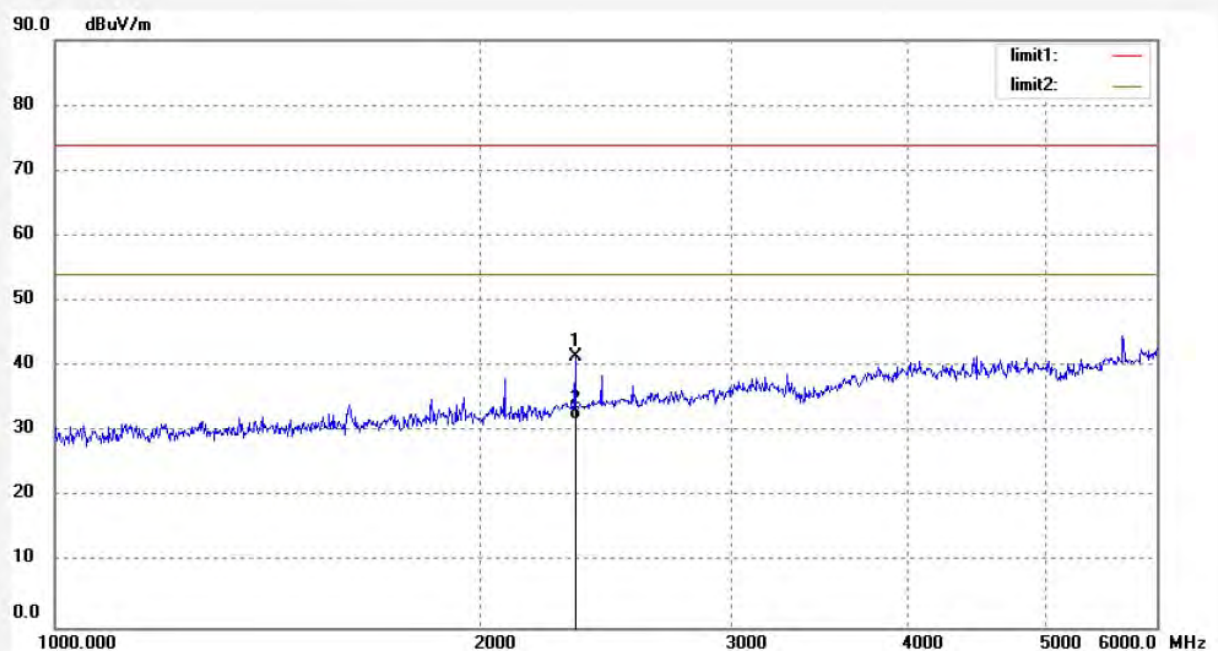

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2329.632	49.42	-7.80	41.62	74.00	-32.38	peak			
2	2329.632	39.68	-7.80	31.88	54.00	-22.12	AVG			

Job No.: DING #372

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: VGA IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/09/45

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

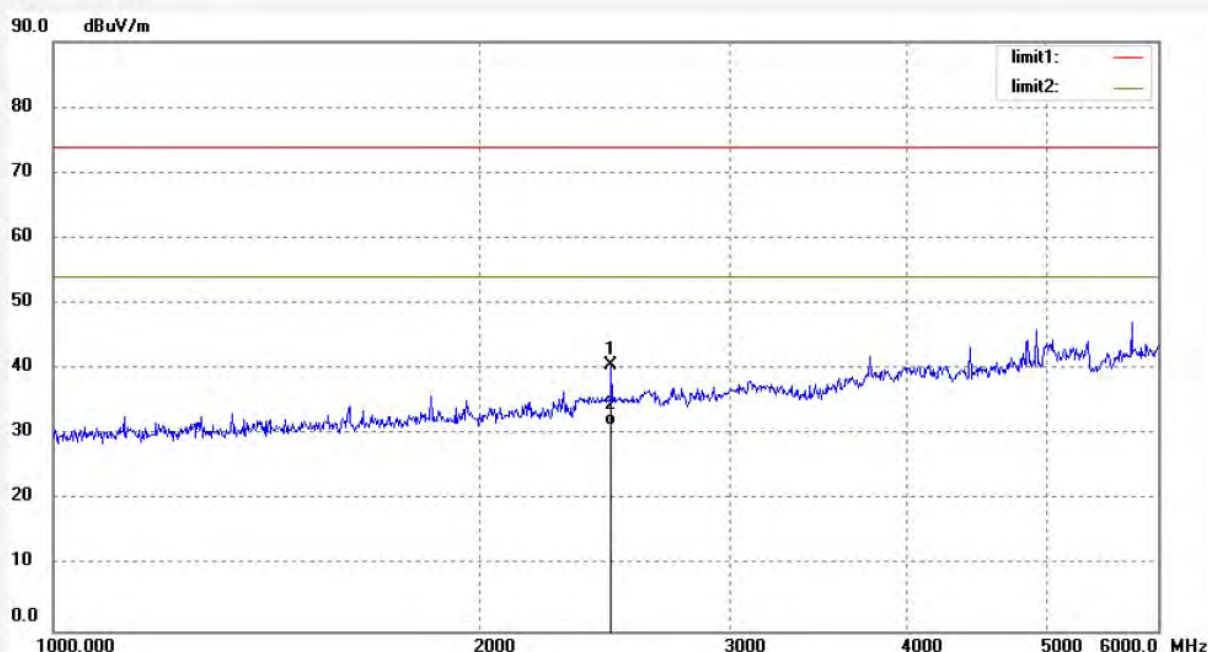

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2471.533	47.92	-7.36	40.56	74.00	-33.44	peak			
2	2471.533	38.69	-7.36	31.33	54.00	-22.67	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20160704

Page 58 of 76

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #373

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: VGA IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/11/11

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

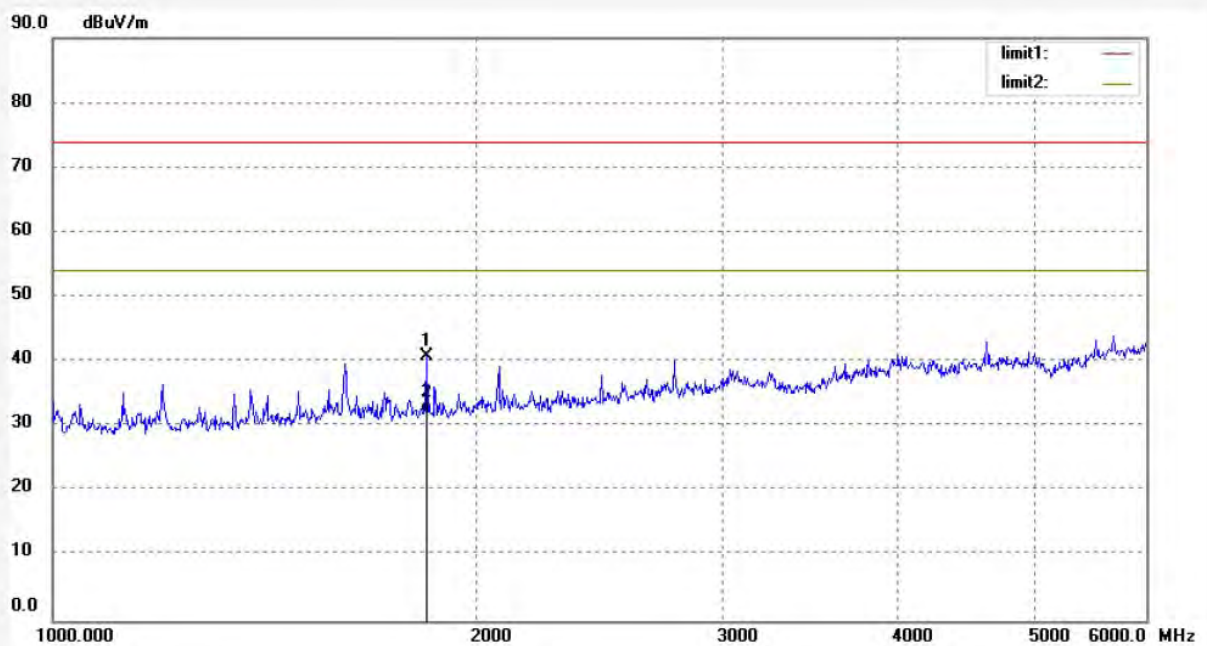

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1845.558	50.33	-9.58	40.75	74.00	-33.25	peak			
2	1845.558	41.65	-9.58	32.07	54.00	-21.93	AVG			

Job No.: DING #374

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: HDMI IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/12/07

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

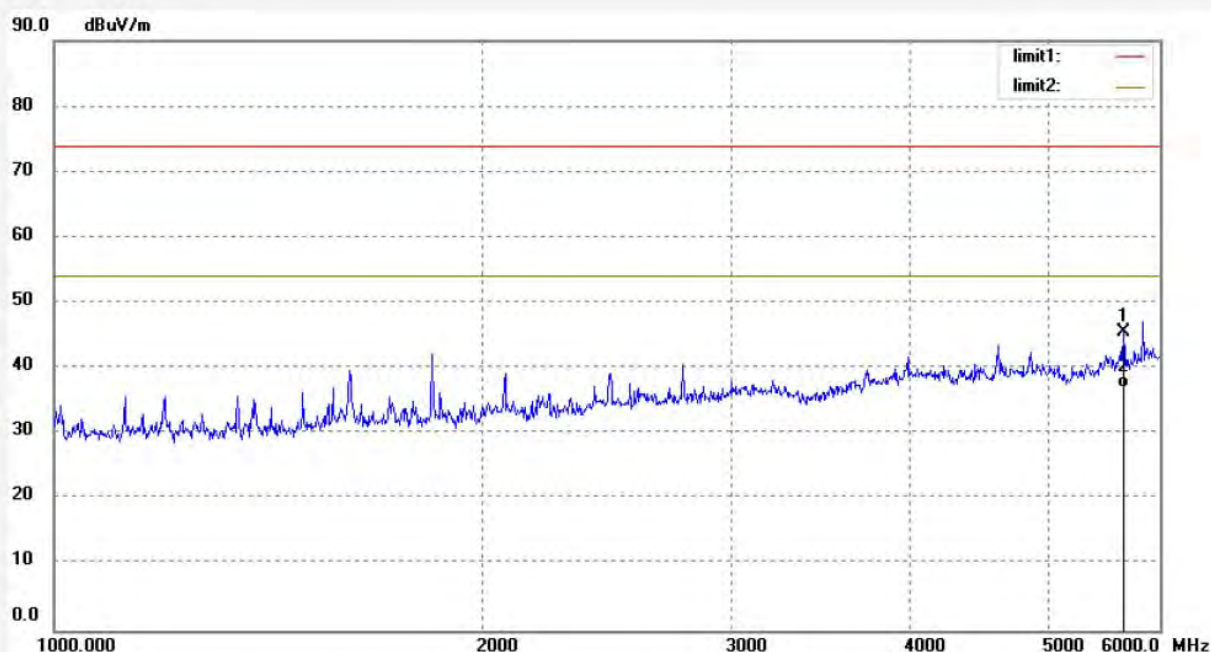

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5655.516	44.38	1.27	45.65	74.00	-28.35	peak			
2	5655.516	35.68	1.27	36.95	54.00	-17.05	AVG			

Job No.: DING #375

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: HDMI IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/13/27

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

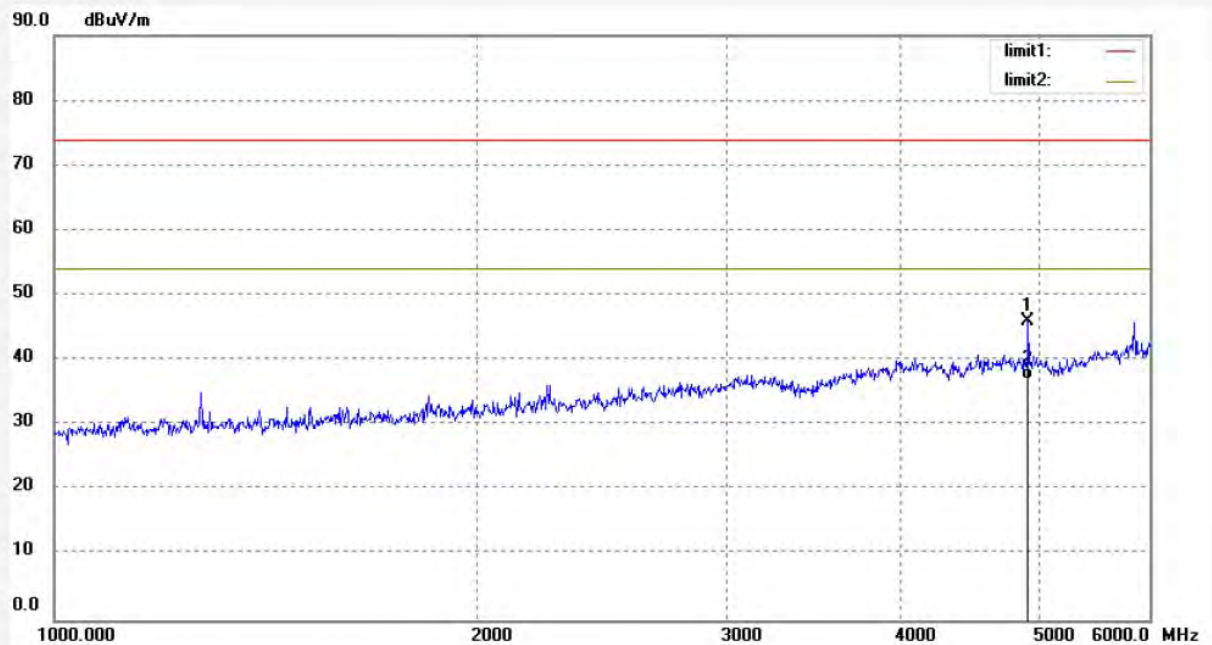

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4917.863	45.65	0.33	45.98	74.00	-28.02	peak			
2	4917.863	36.59	0.33	36.92	54.00	-17.08	AVG			

Job No.: DING #376

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: AV IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/14/14

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

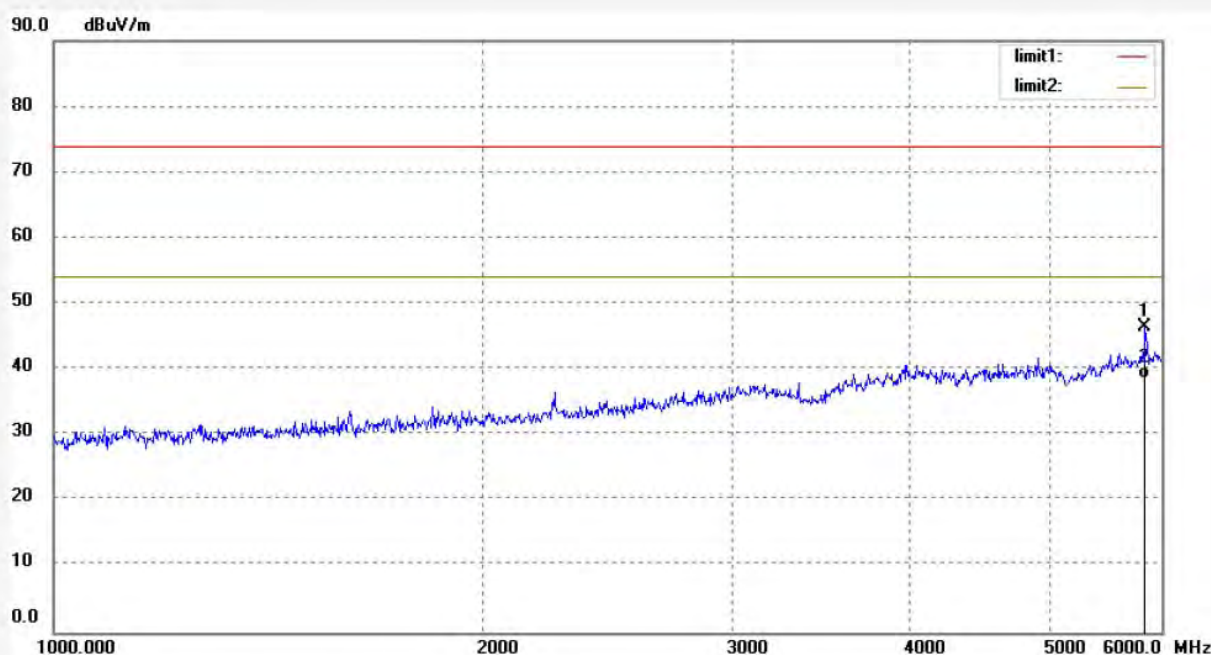


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5840.889	44.56	1.97	46.53	74.00	-27.47	peak			
2	5840.889	36.64	1.97	38.61	54.00	-15.39	AVG			

Job No.: DING #377
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Interactive Flat Panel
Mode: AV IN
Model: LE-43PC88
Manufacturer: PRIMA

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/05/10/
Time: 20/14/56
Engineer Signature: Ding
Distance: 3m

Note: Report NO.:ATE20160704

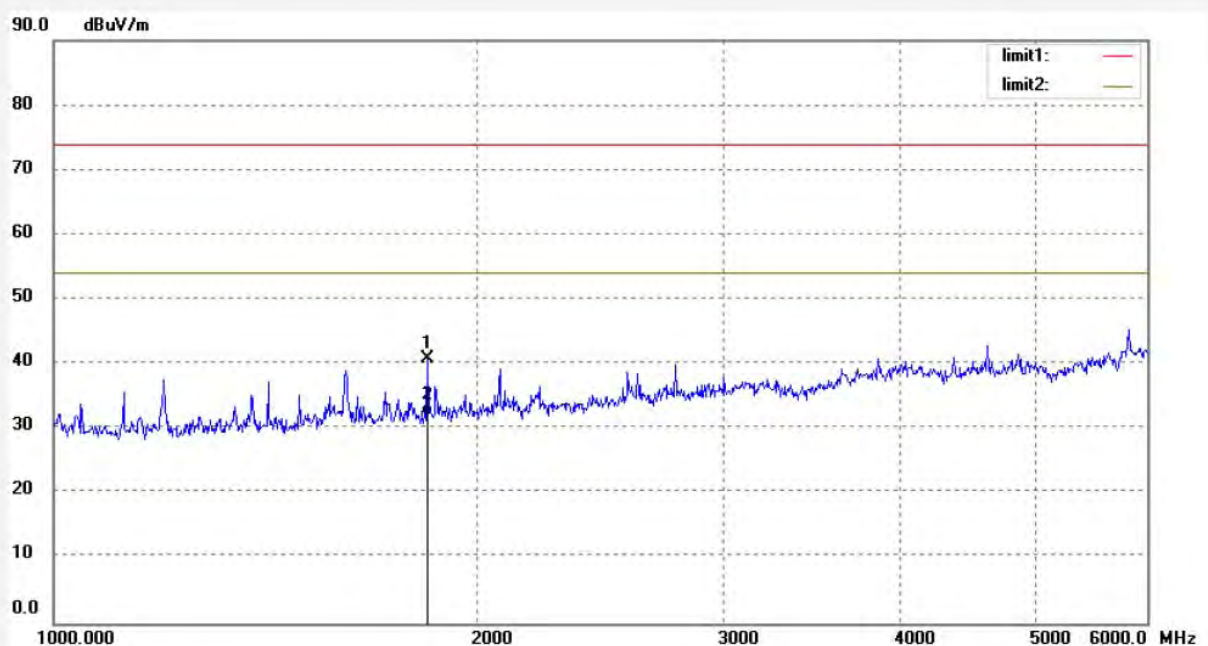

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1845.558	50.38	-9.58	40.80	74.00	-33.20	peak			
2	1845.558	41.68	-9.58	32.10	54.00	-21.90	AVG			

Job No.: DING #378

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: USB IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/15/52

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

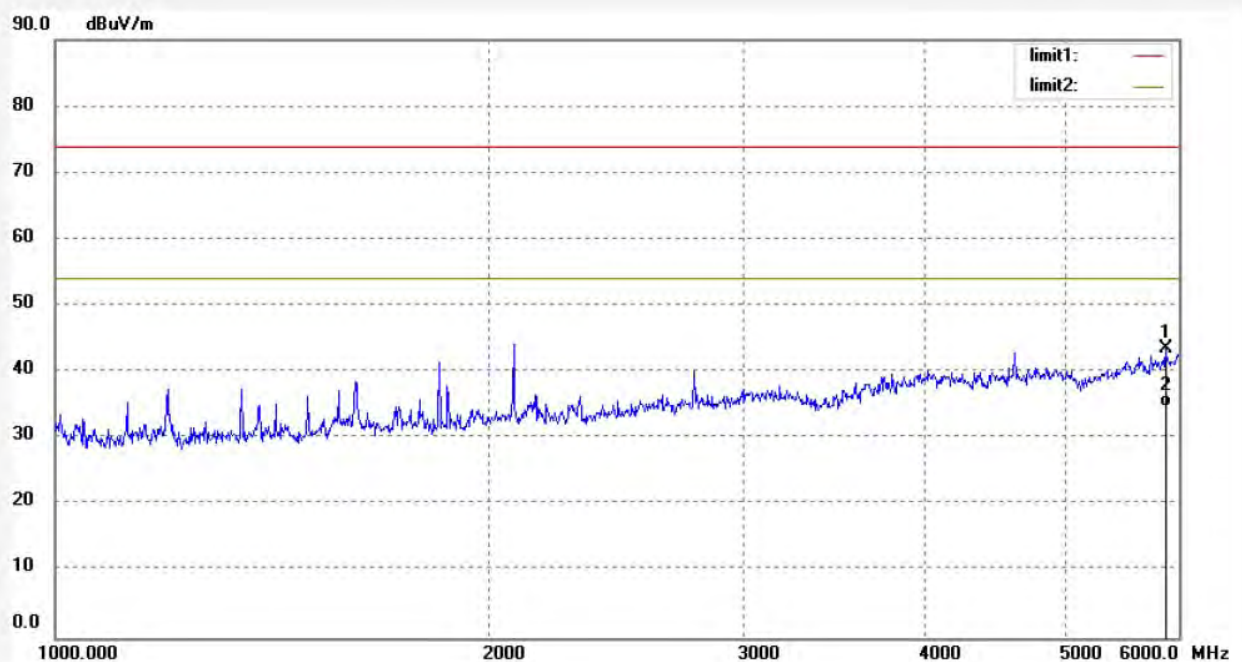

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5872.370	41.55	1.95	43.50	74.00	-30.50	peak			
2	5872.370	32.87	1.95	34.82	54.00	-19.18	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20160704

Page 64 of 76

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #379

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: USB IN

Model: LE-43PC88

Manufacturer: PRIMA

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/05/10/

Time: 20/16/28

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20160704

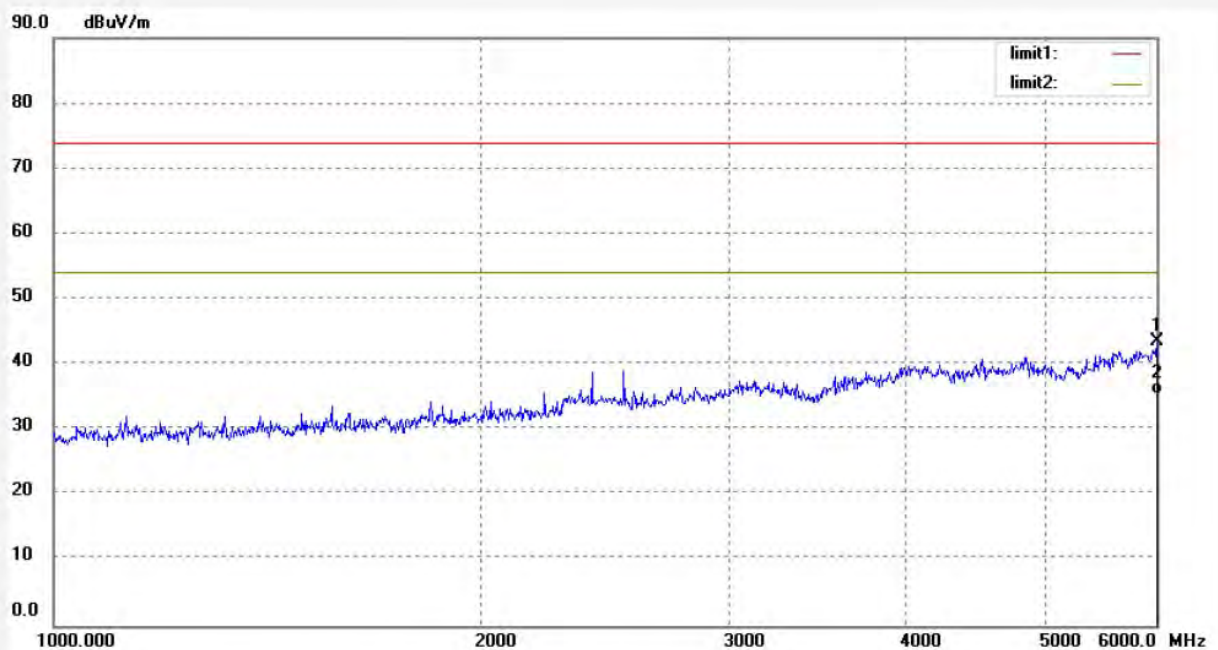

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	6000.000	41.27	2.30	43.57	74.00	-30.43	peak			
2	6000.000	33.25	2.30	35.55	54.00	-18.45	AVG			

6. PHOTOGRAPHS

6.1.Photos of Radiated Emission Measurement



6.2.Photo of Conducted Emission Measurement



6.3.Photo of EUT











