

Job No.: STAR2017 #933

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 165-AC 20MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 18/43/47

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

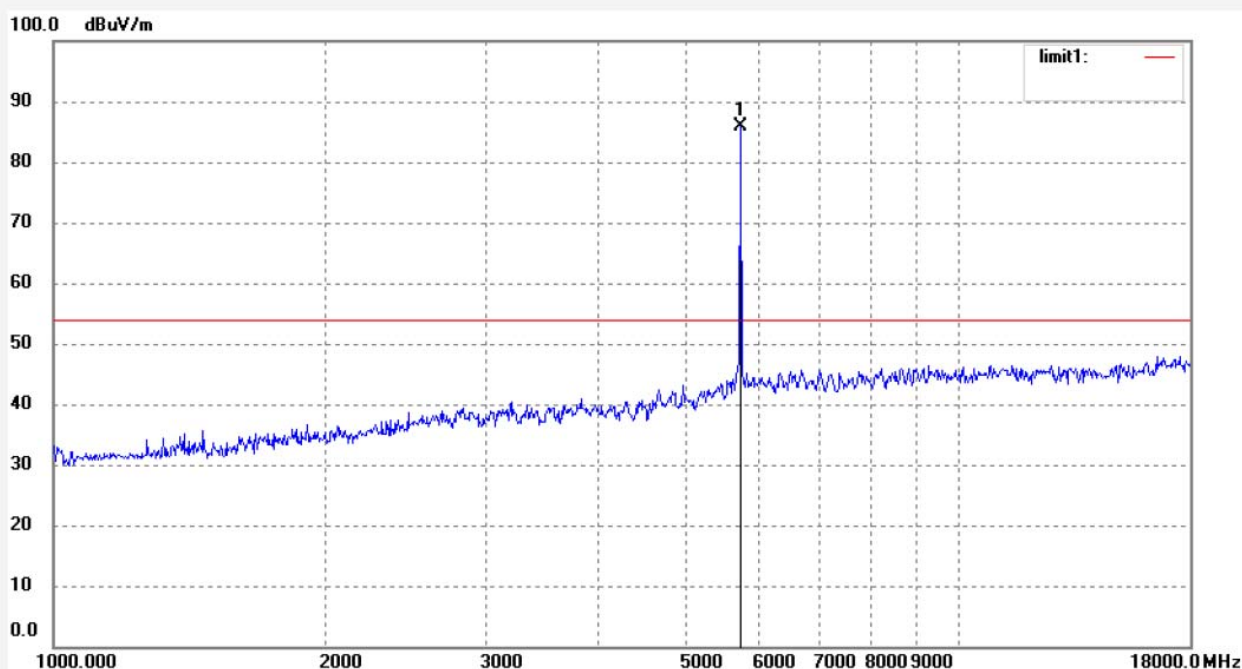

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5825.040	83.02	2.76	85.78			peak	200	152	

Job No.: STAR2017 #934

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 38-N 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 18/48/22

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

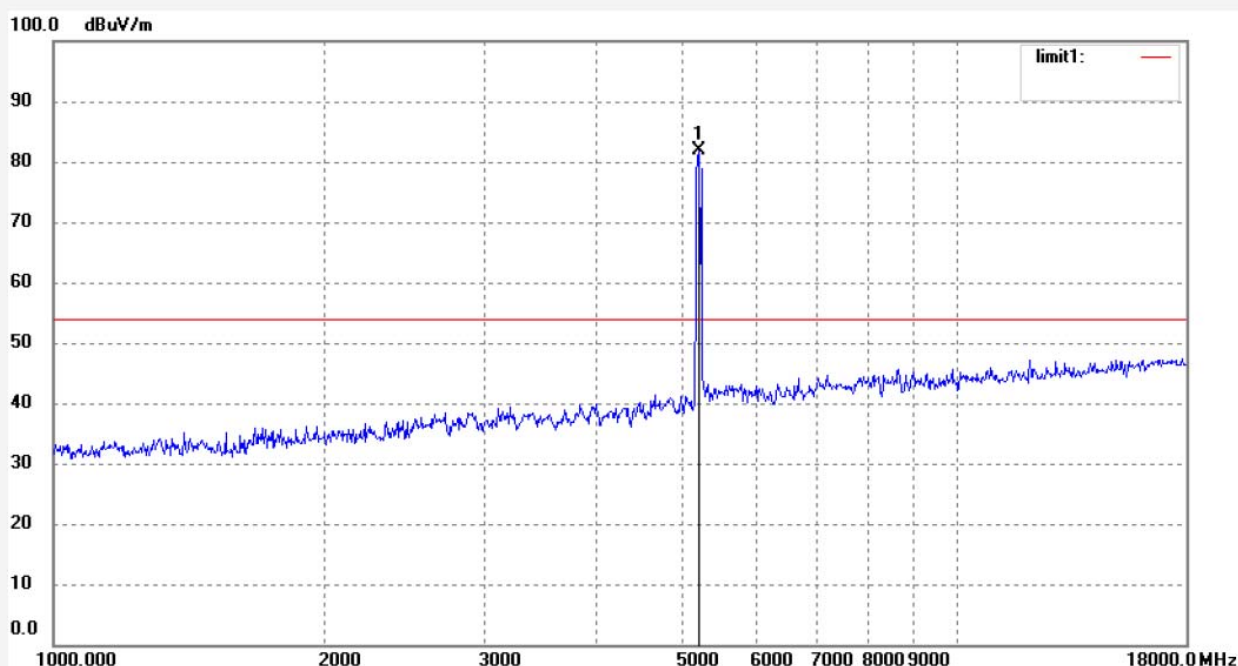

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5190.089	79.73	2.09	81.82			peak	200	100	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2017 #935

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 38-N 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 18/49/59

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

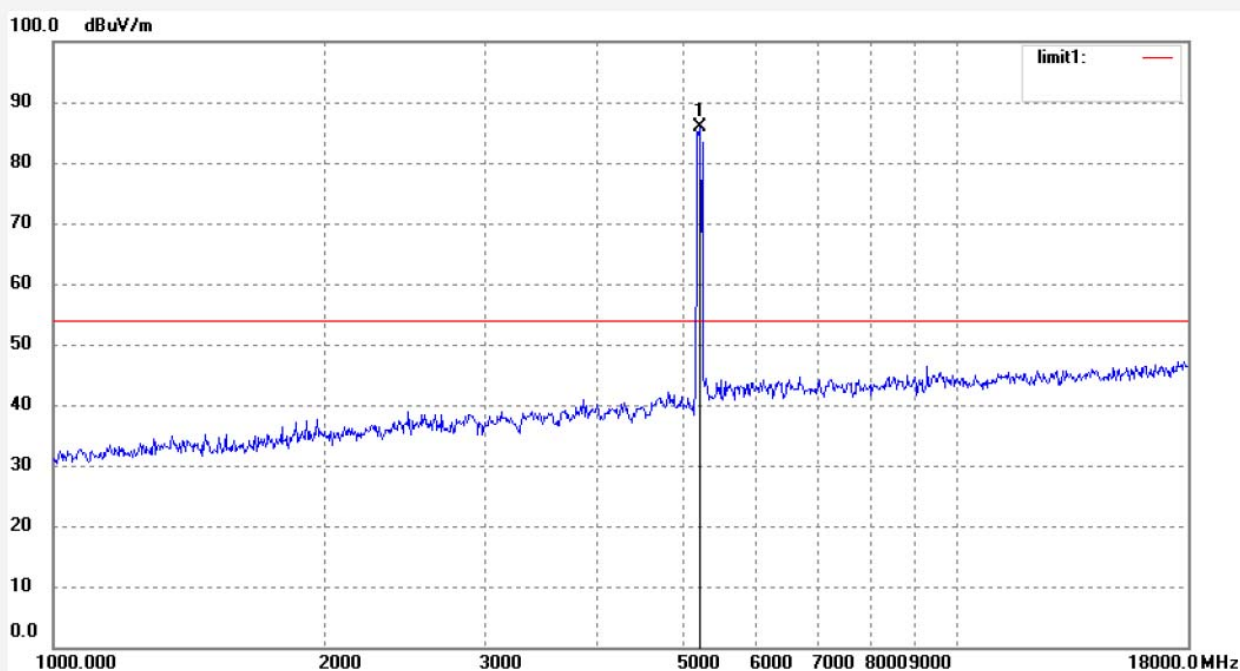


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5190.089	83.75	2.09	85.84			peak	150	109	

Job No.: STAR2017 #937
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 46-N 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 18/54/47
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

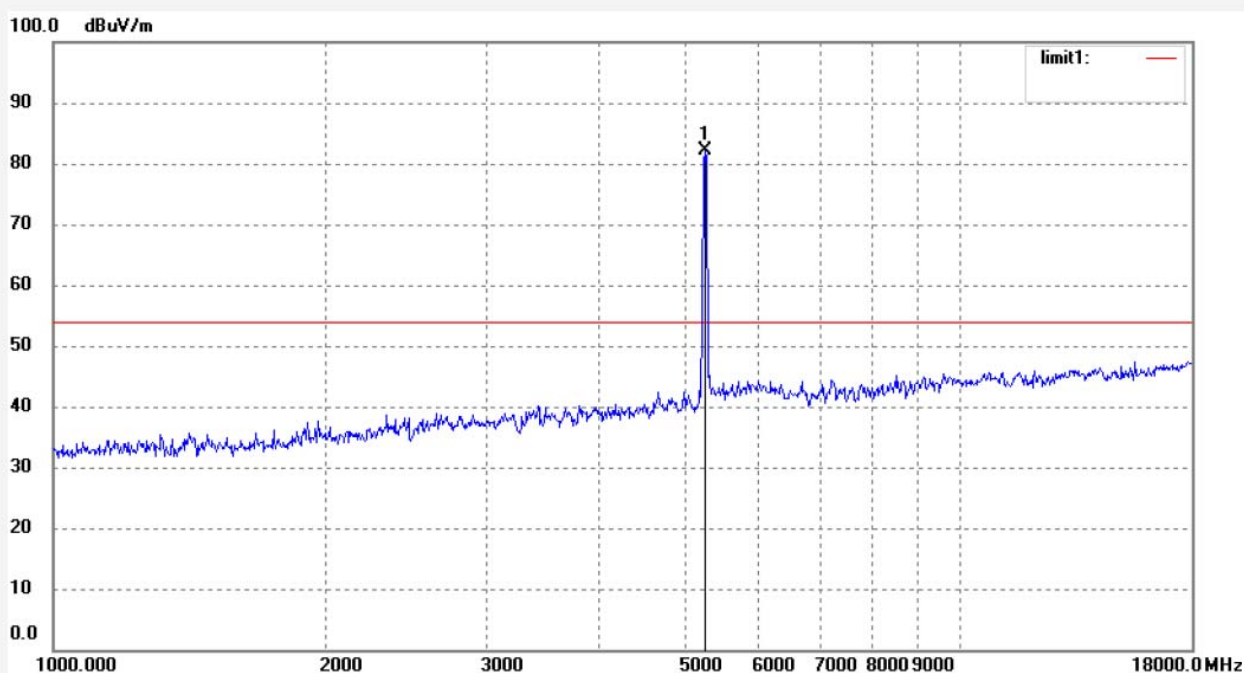

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5230.442	80.07	2.15	82.22			peak	200	107	

Job No.: STAR2017 #936

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 46-N 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 18/52/59

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

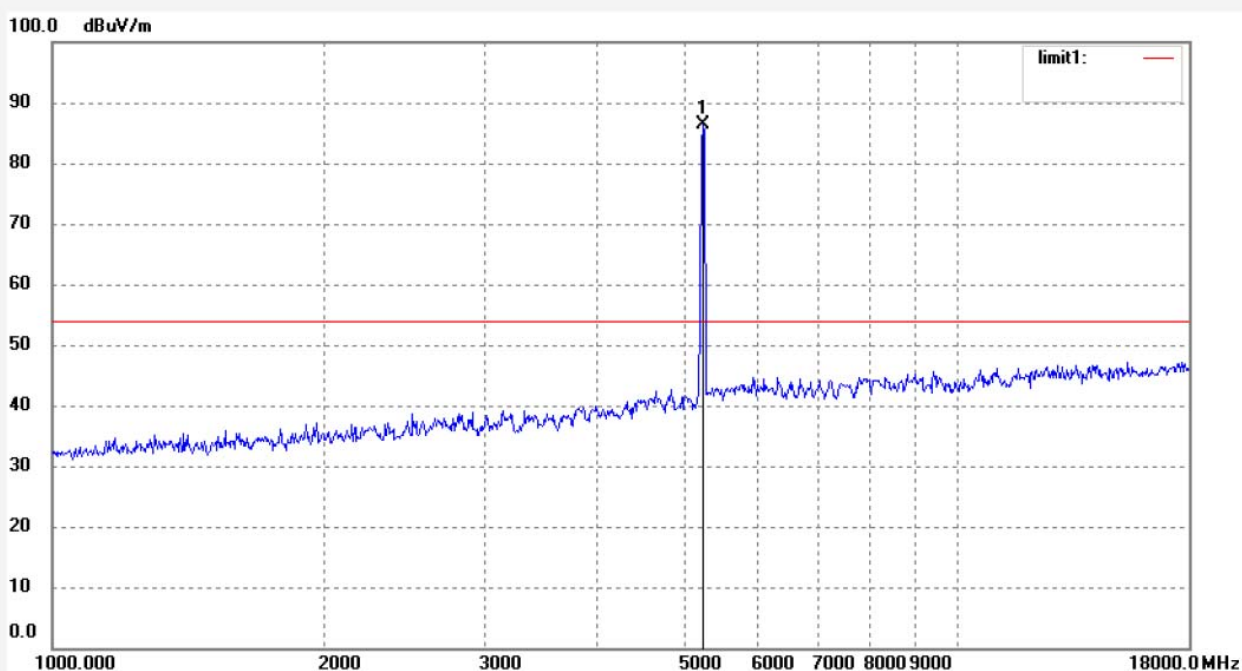


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5230.442	84.28	2.15	86.43			peak	150	90	

Job No.: STAR2017 #938
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 151-N 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 18/56/58
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

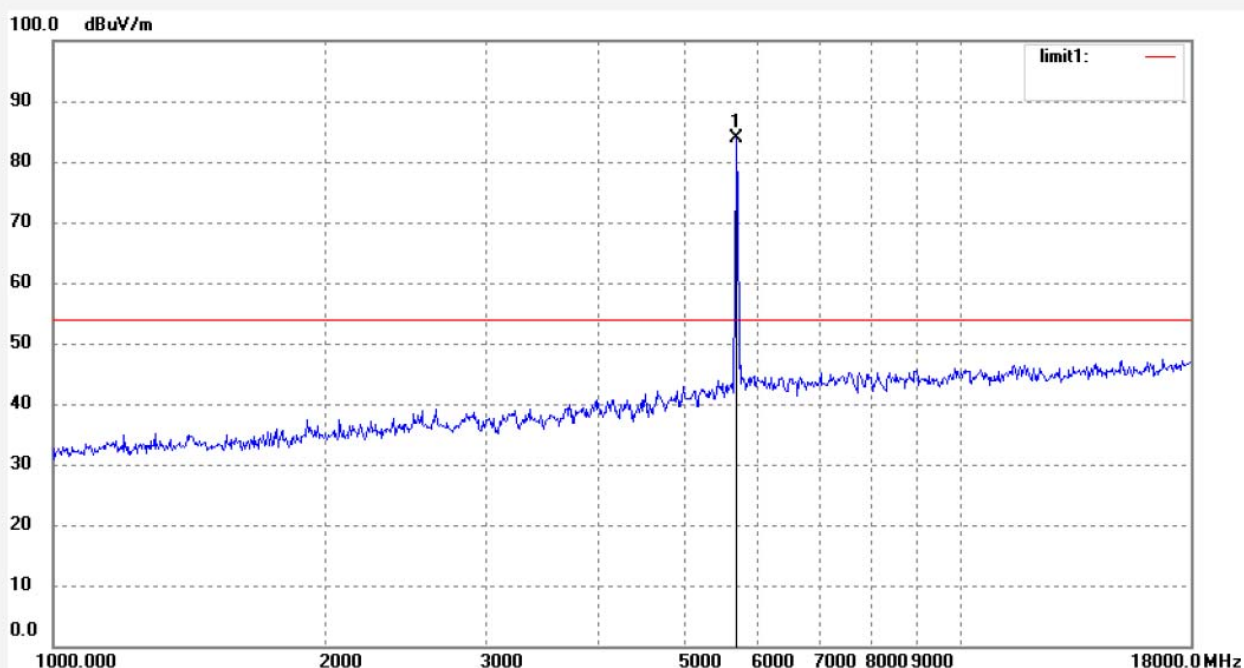

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5755.024	81.14	2.68	83.82			peak	200	199	

Job No.: STAR2017 #939

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 151-N 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 18/58/28

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

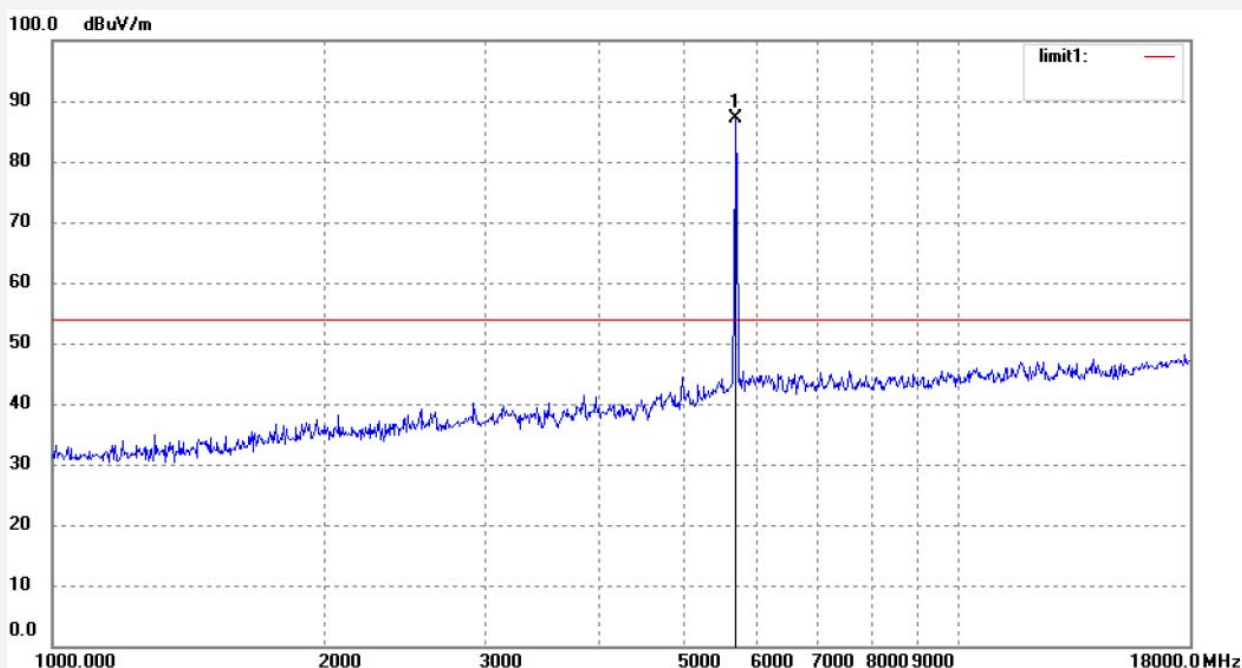


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5755.045	84.48	2.69	87.17			peak	150	137	

Job No.: STAR2017 #941
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 159-N 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/02/20
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

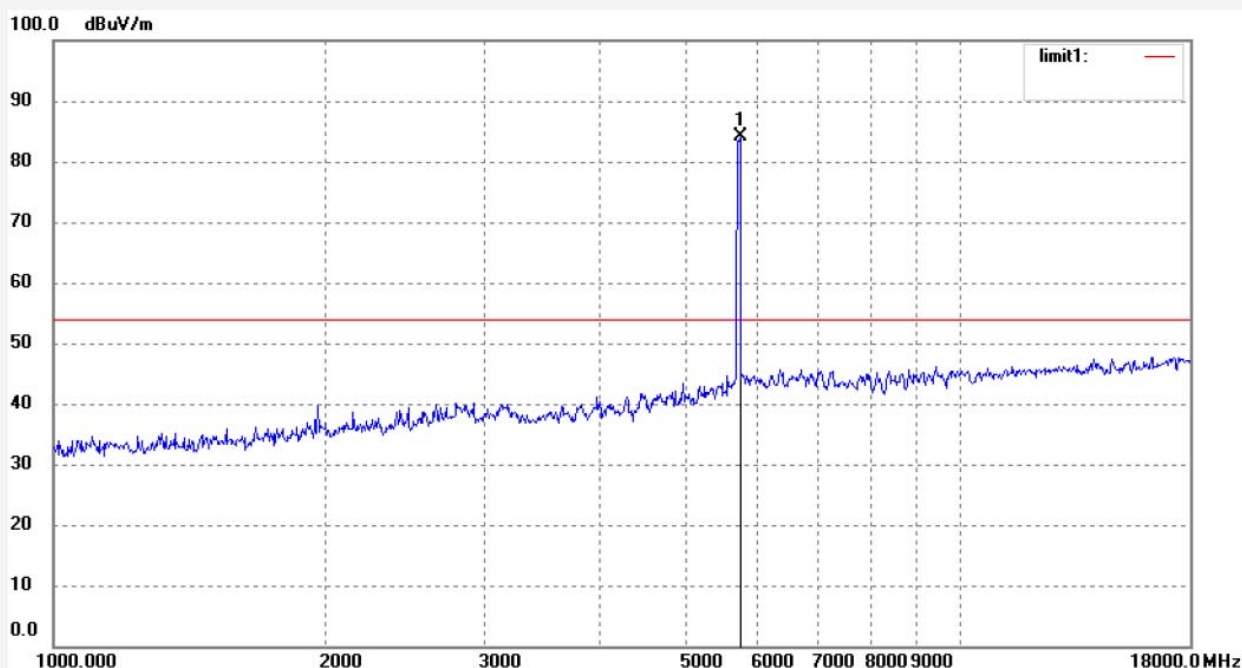


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5795.200	81.31	2.76	84.07			peak	200	174	

Job No.: STAR2017 #940
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 159-N 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/00/31
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

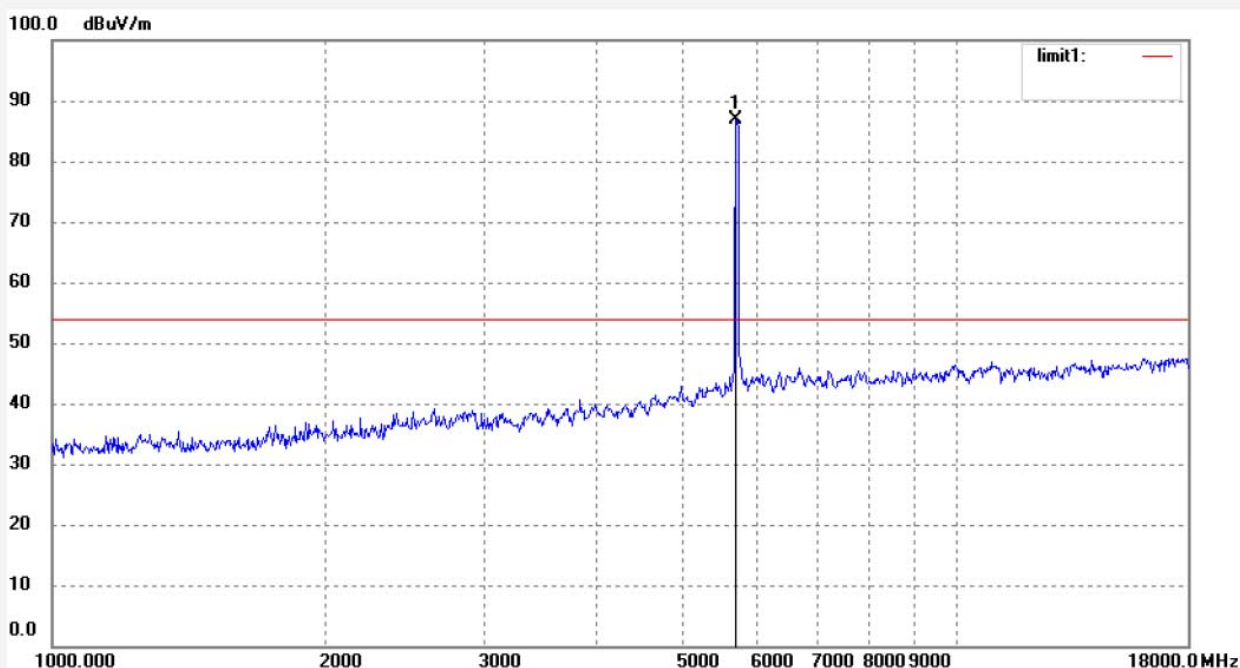


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5795.015	84.09	2.72	86.81			peak	150	200	

Job No.: STAR2017 #942
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 38-AC 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/05/16
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

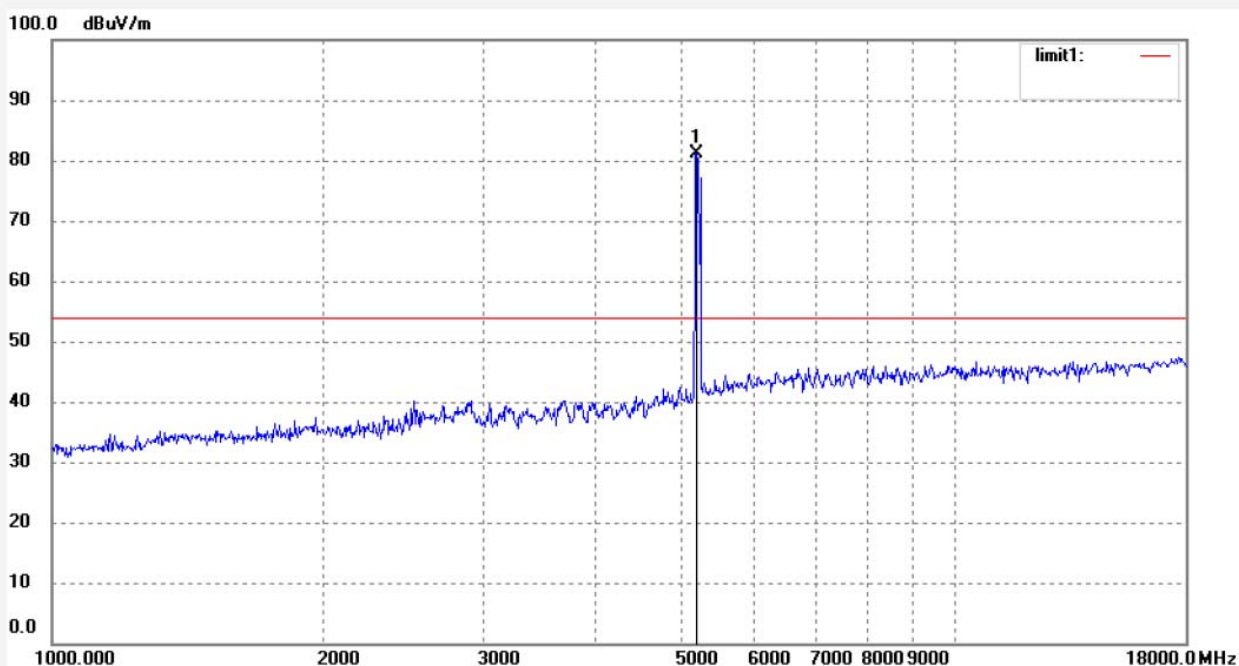

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5190.093	79.11	2.07	81.18			peak	200	166	

Job No.: STAR2017 #943

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 38-AC 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/06/58

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

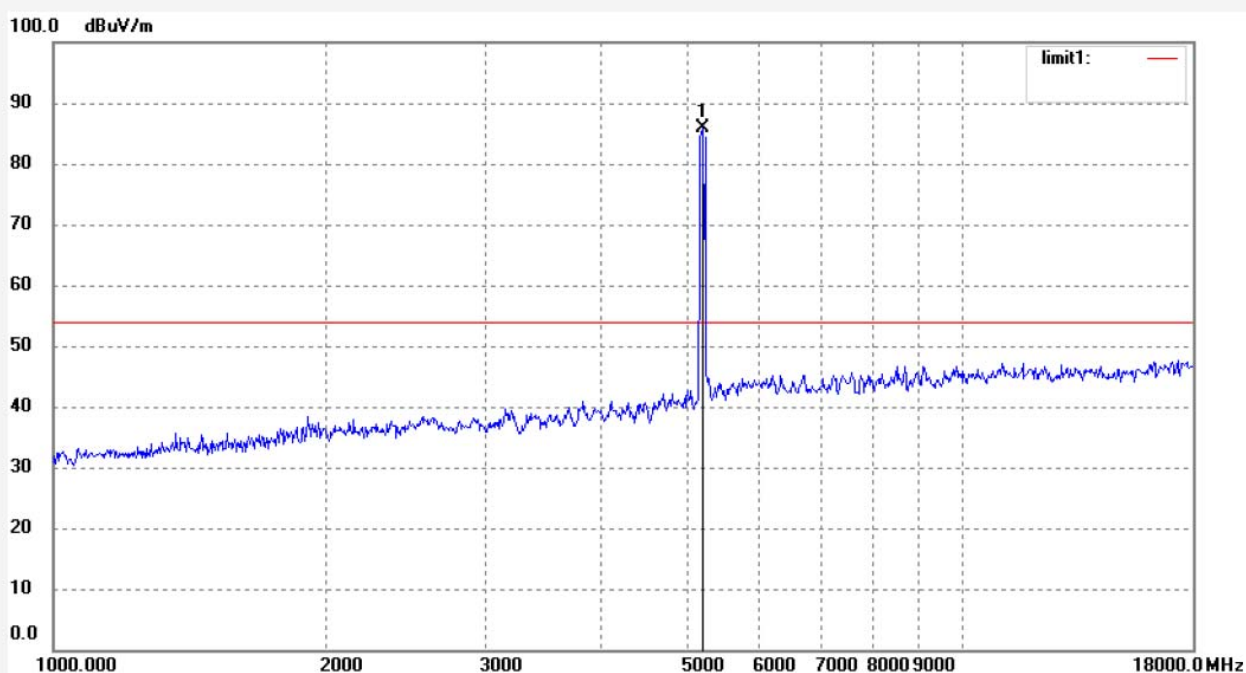


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5190.089	83.67	2.09	85.76			peak	150	207	

Job No.: STAR2017 #945
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 46-AC 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/11/06
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

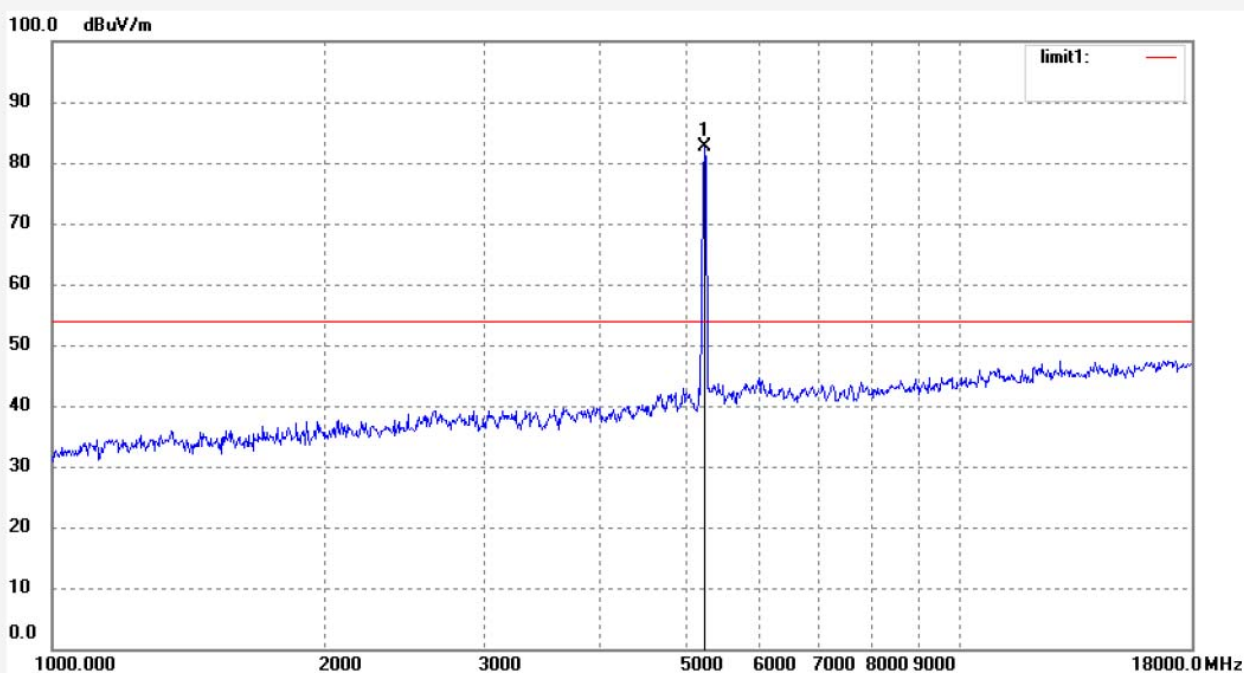

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5230.442	80.51	2.15	82.66			peak	200	179	

Job No.: STAR2017 #944

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 46-AC 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/09/22

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

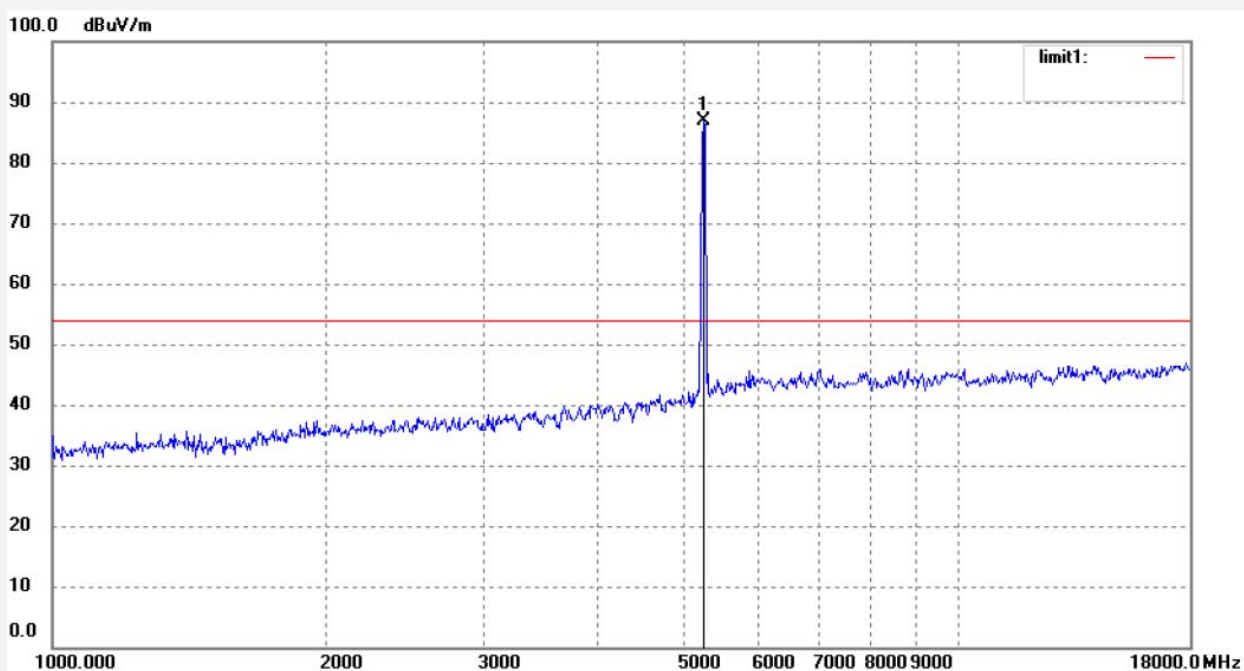

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5230.442	84.72	2.15	86.87			peak	150	239	

Job No.: STAR2017 #946

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 151-AC 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/13/40

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

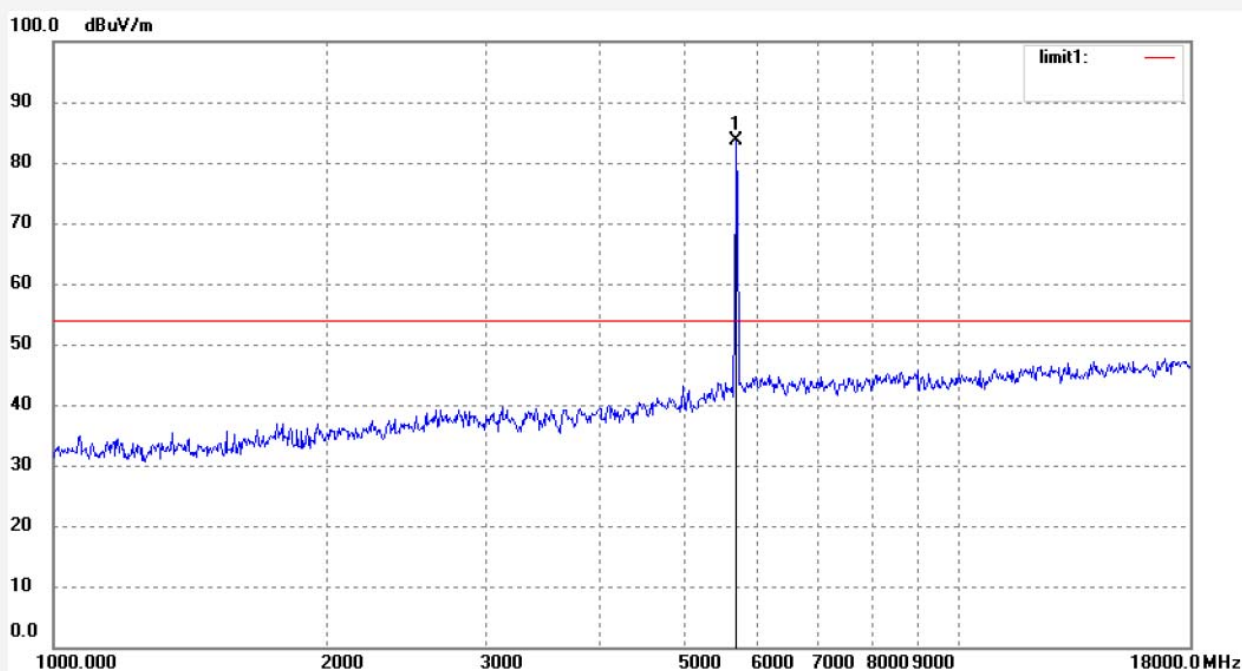

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5755.345	80.87	2.69	83.56			peak	200	146	

Job No.: STAR2017 #947

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 151-AC 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/15/20

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

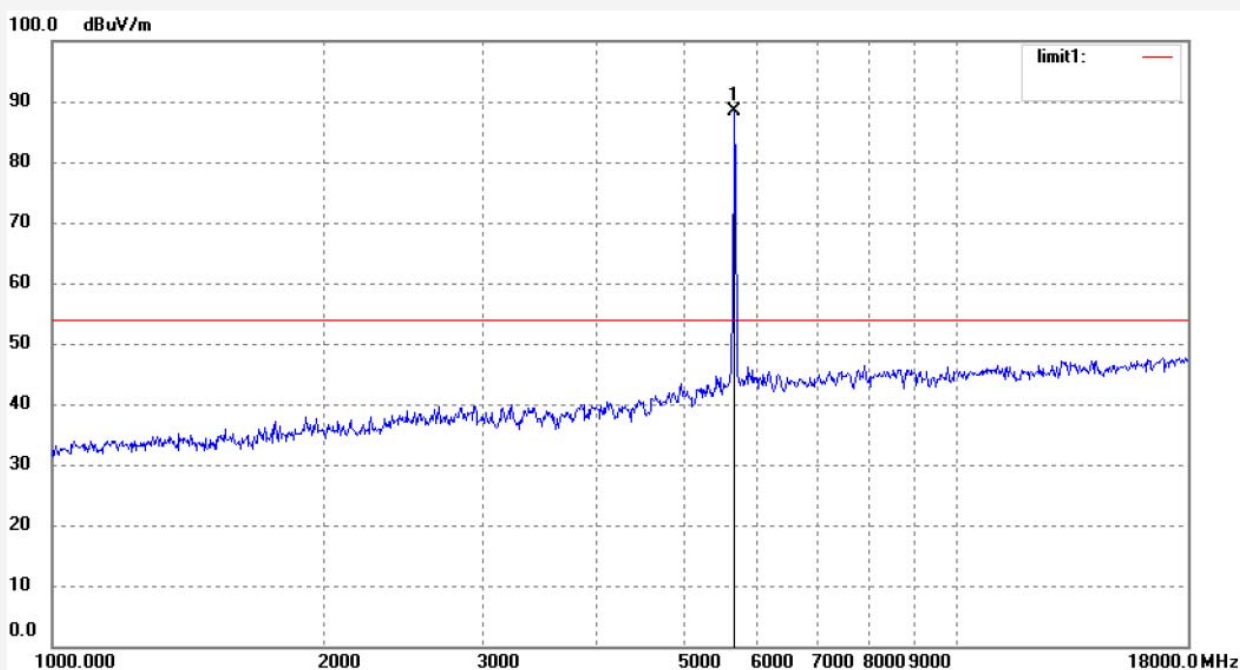

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5755.345	85.57	2.69	88.26			peak	150	41	

Job No.: STAR2017 #949

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 159-AC 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/18/48

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

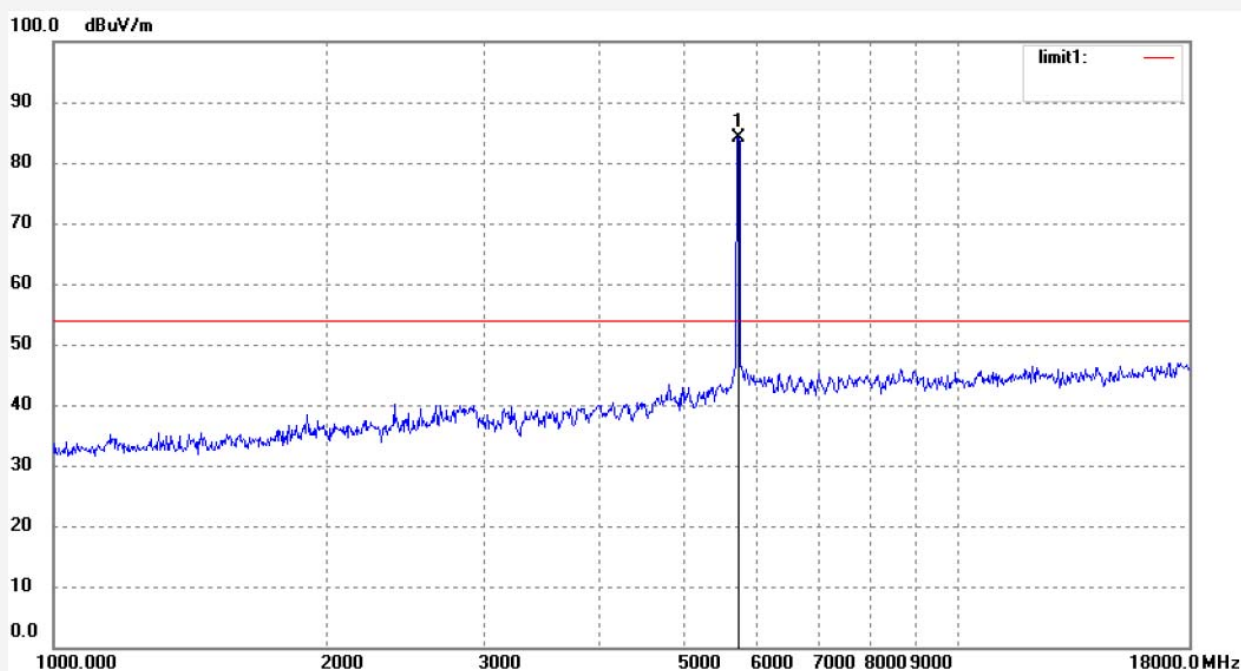

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5795.033	81.39	2.75	84.14			peak	200	134	

Job No.: STAR2017 #948

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 159-AC 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/17/21

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

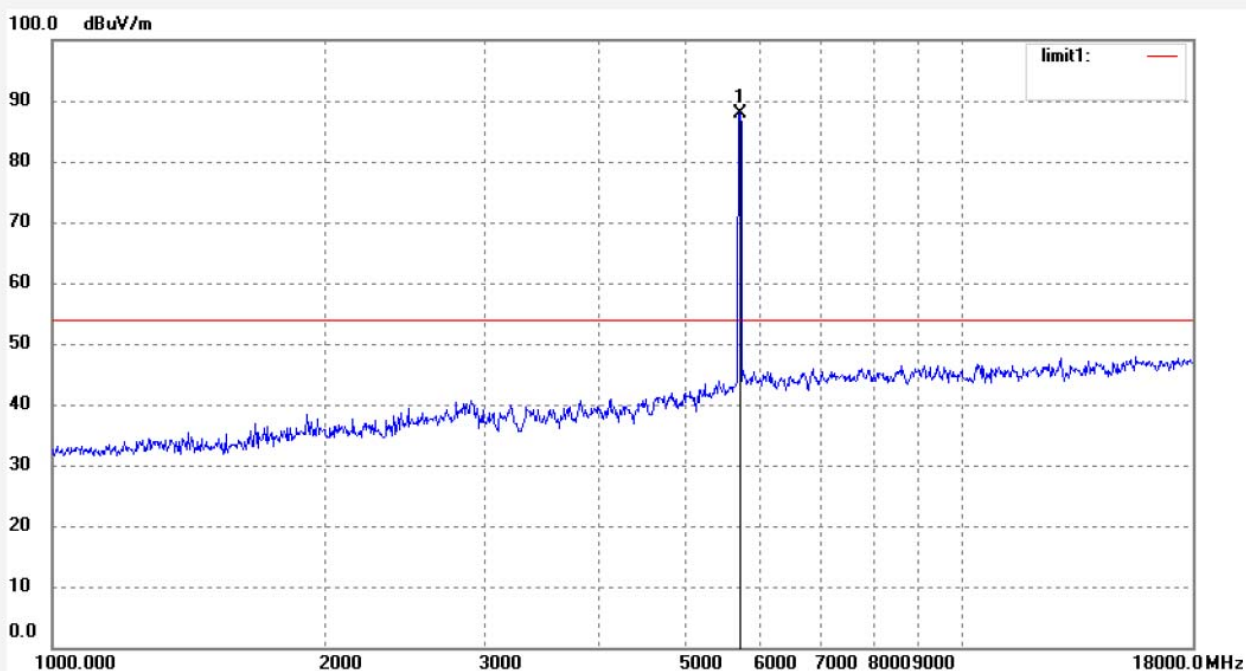


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5795.033	85.16	2.75	87.91			peak	150	76	

Job No.: STAR2017 #950
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 36-A
Model: M632USA1

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/21/57
Engineer Signature: star
Distance: 3m

Manufacturer: Xiamen Prima Technology Inc.

Note: Report NO.:ATE20172554

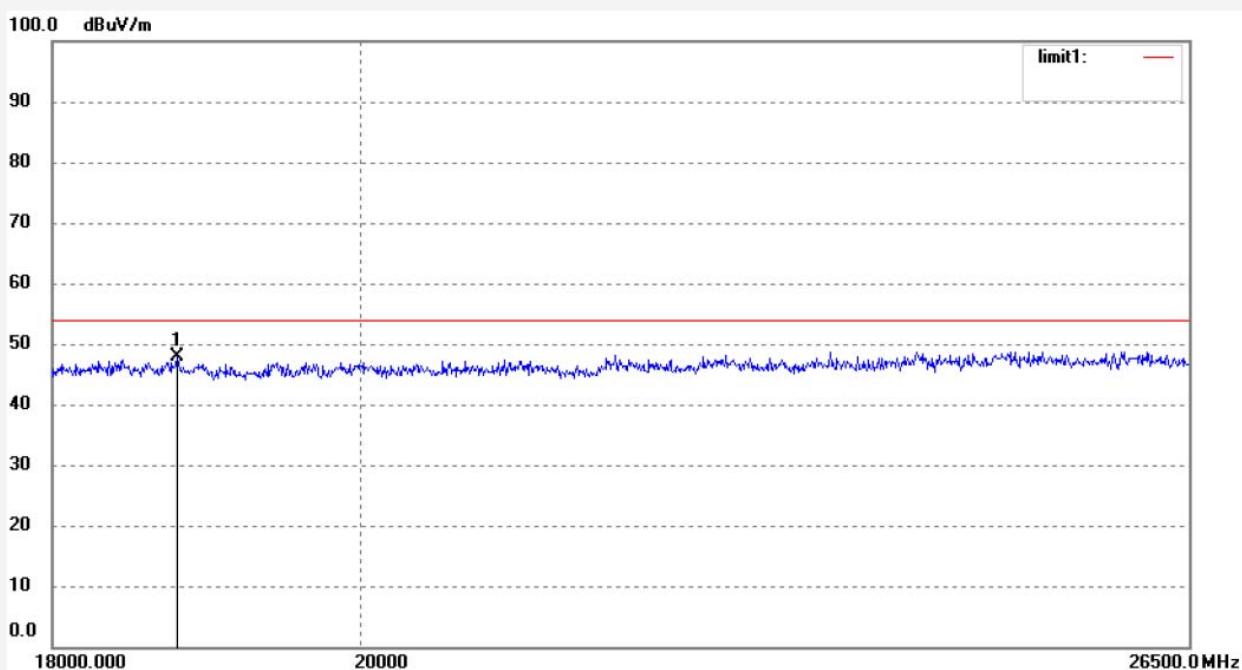

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18783.936	69.04	-21.21	47.83	74.00	-26.17	peak	200	83	

Job No.: STAR2017 #951

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 36-A

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/22/34

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

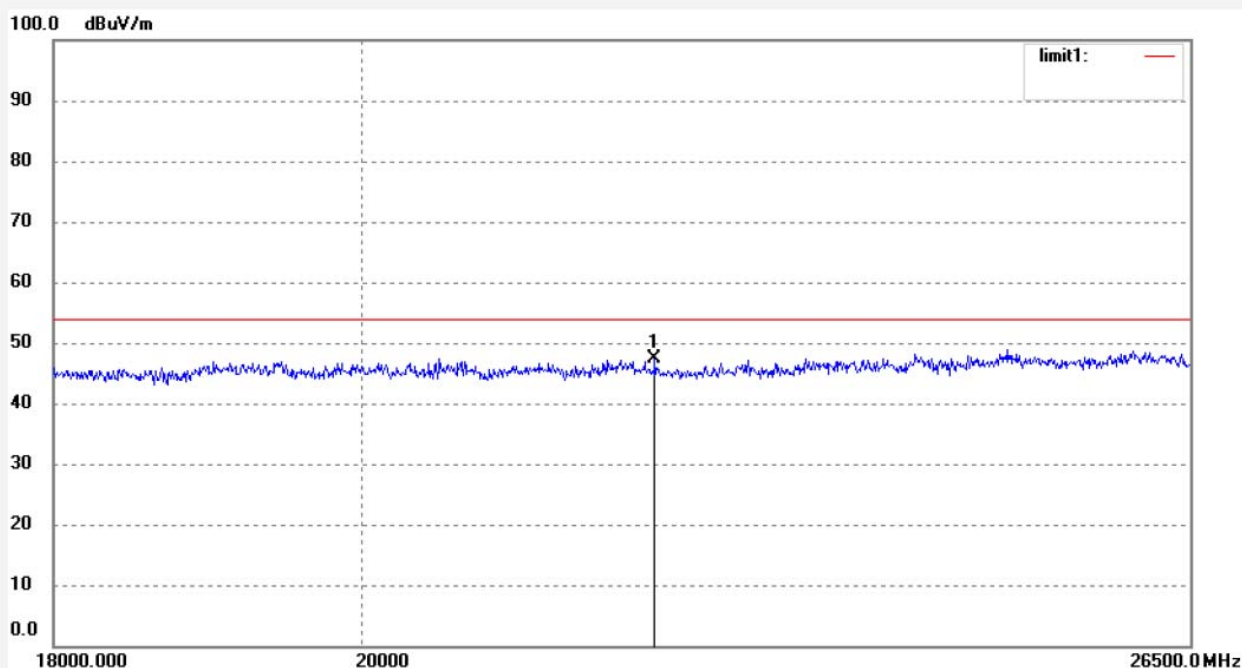

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	22087.175	67.76	-20.35	47.41	74.00	-26.59	peak	150	118	

Job No.: STAR2017 #953

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 48-A

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/25/27

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

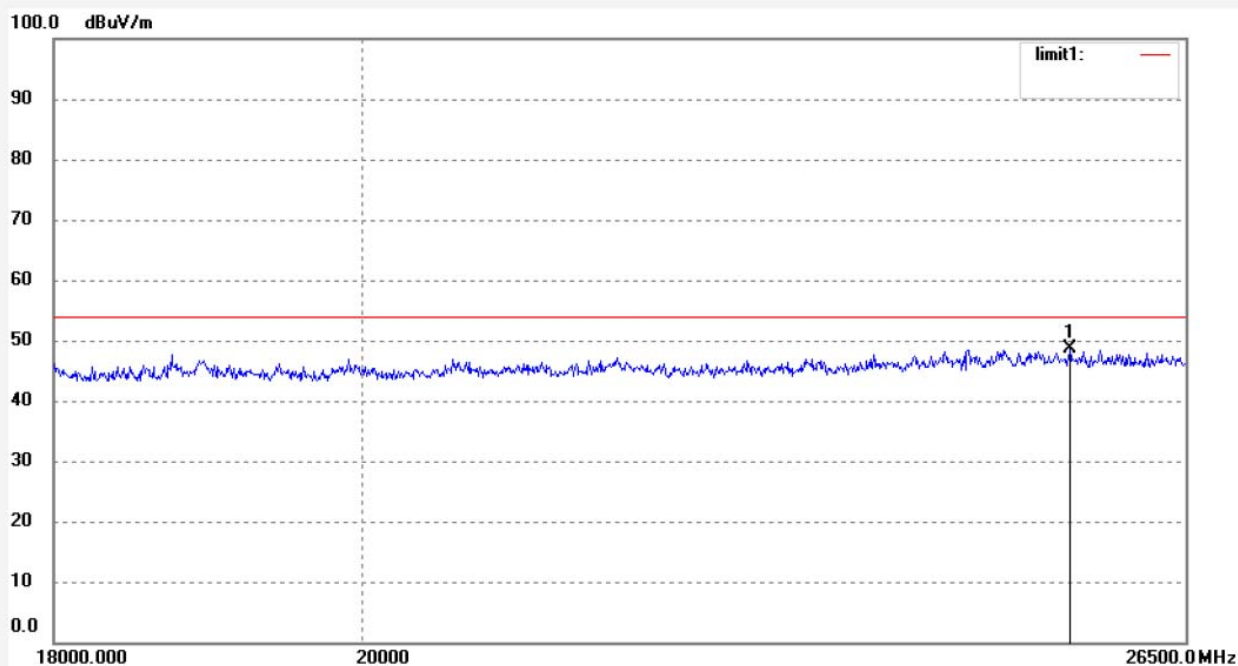

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25472.892	68.13	-19.46	48.67	74.00	-25.33	peak	200	69	

Job No.: STAR2017 #952

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 48-A

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/24/33

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

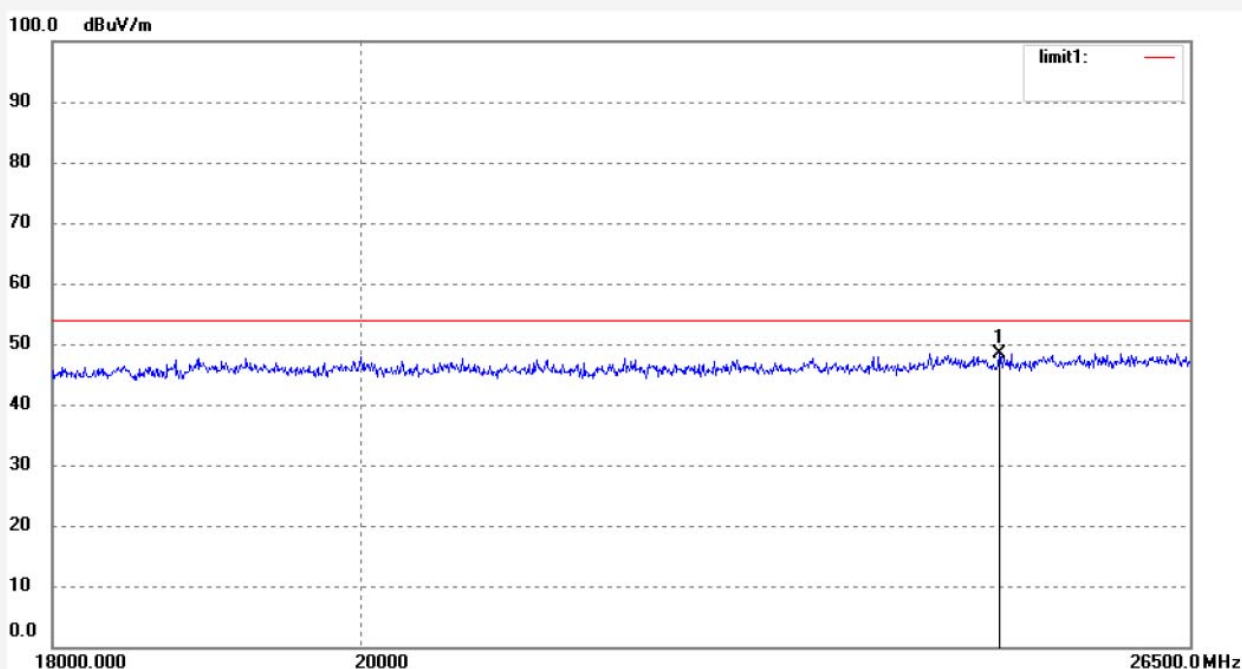

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24839.229	68.09	-19.62	48.47	74.00	-25.53	peak	150	271	

Job No.: STAR2017 #954

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 149-A

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/26/19

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

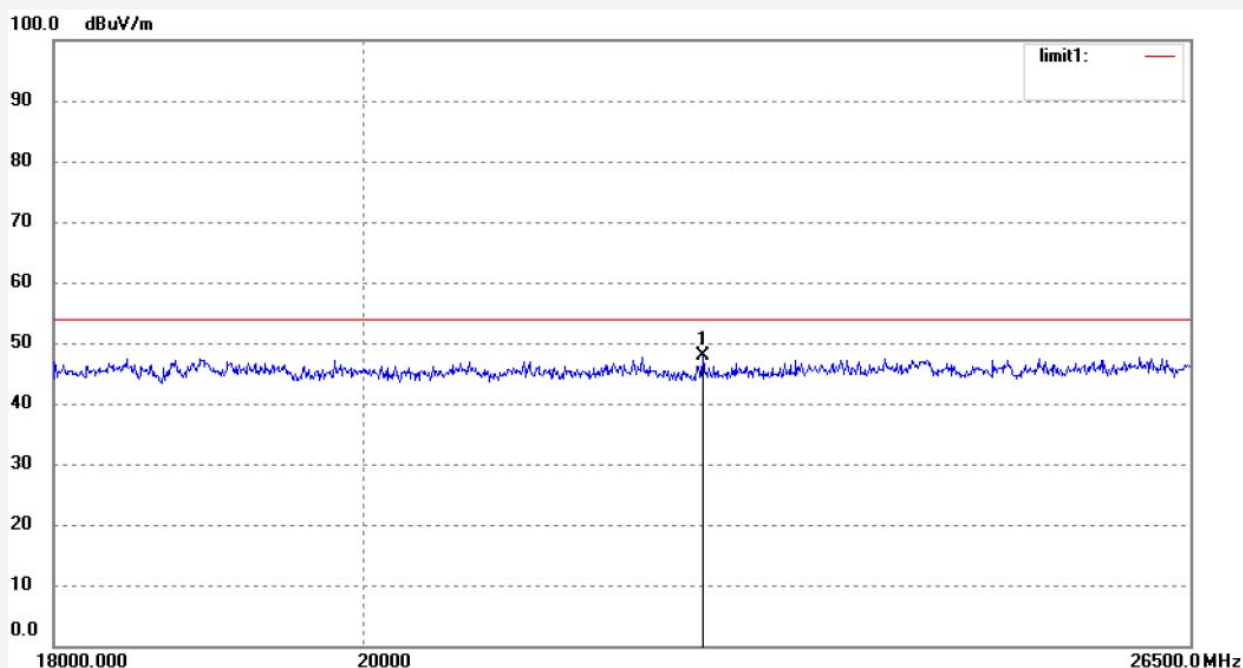

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	22449.631	68.08	-20.25	47.83	74.00	-26.17	peak	200	183	

Job No.: STAR2017 #955

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 149-A

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/27/07

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

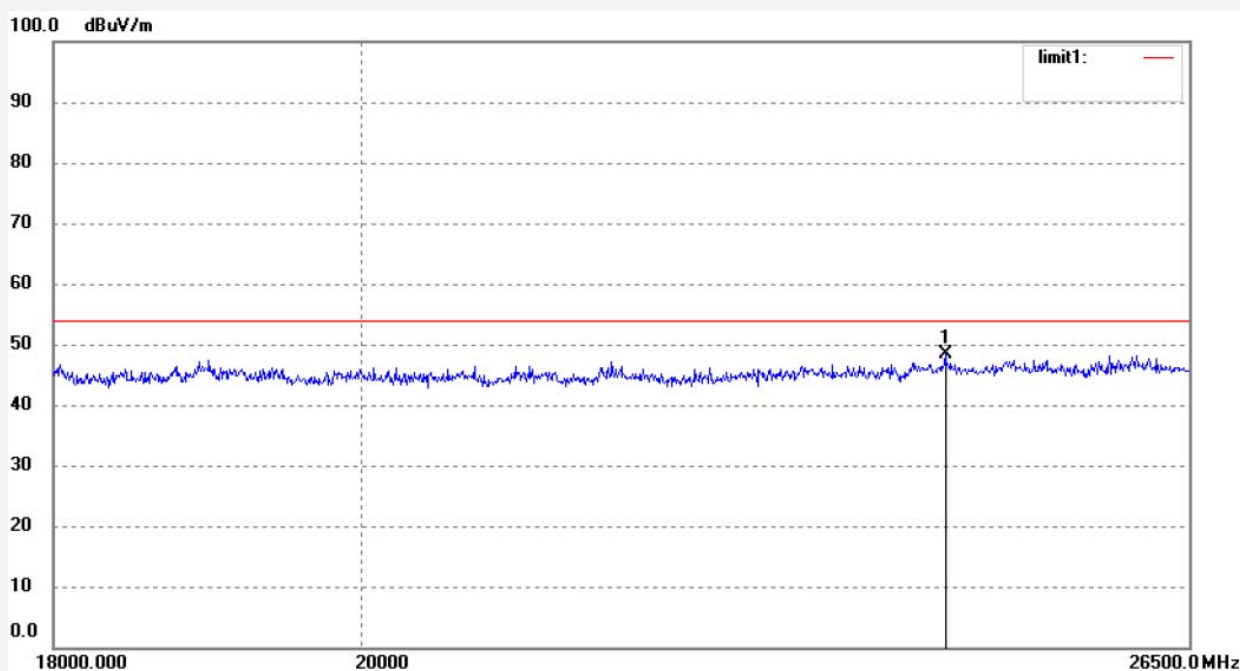

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24390.884	68.00	-19.74	48.26	74.00	-25.74	peak	150	130	

Job No.: STAR2017 #957

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 165-A

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/28/48

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

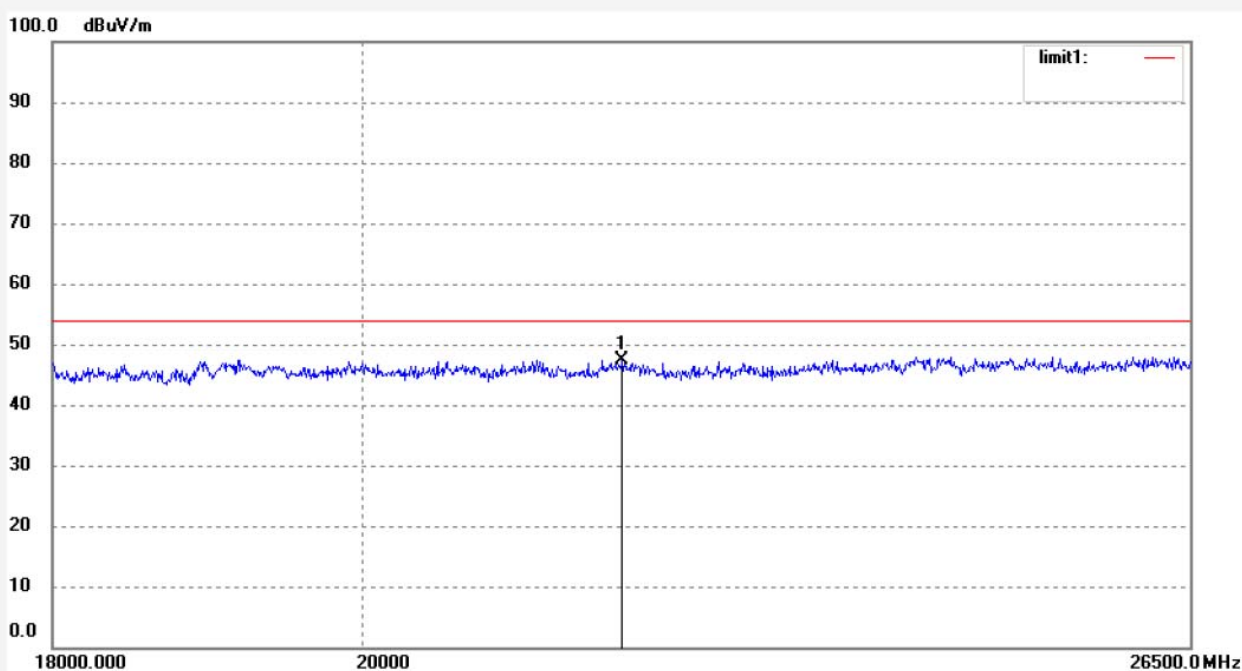


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	21848.796	67.82	-20.41	47.41	74.00	-26.59	peak	200	100	

Job No.: STAR2017 #956
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 165-A
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/27/55
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

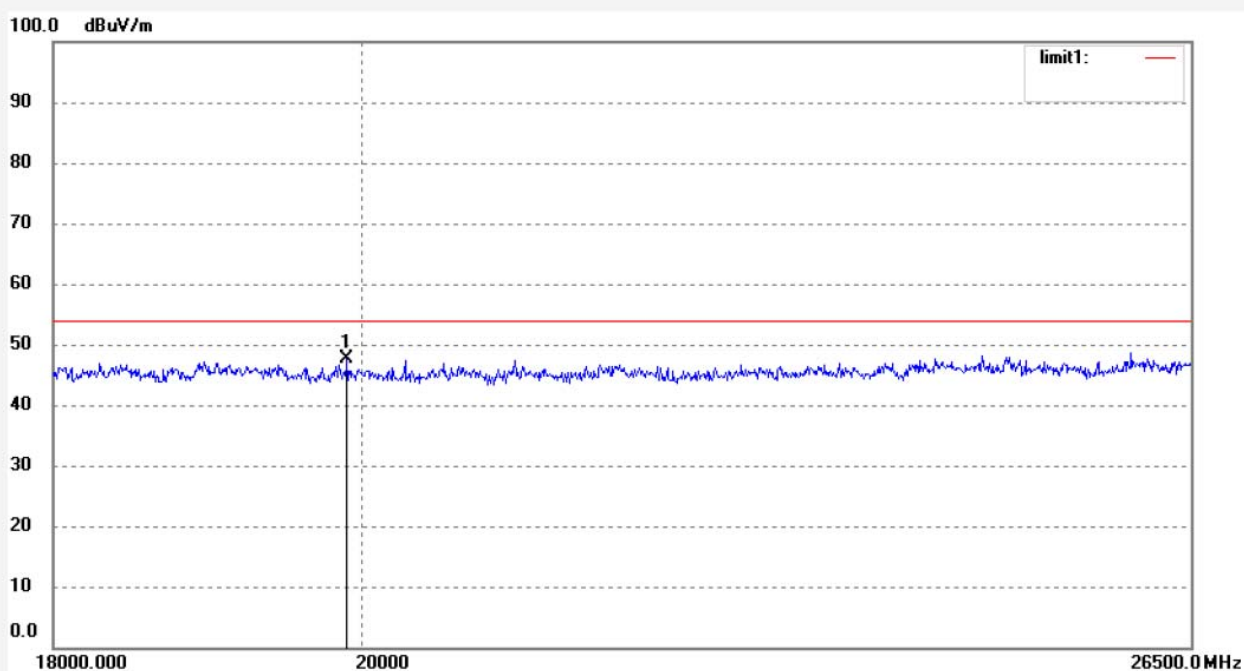


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	19892.826	68.44	-20.92	47.52	74.00	-26.48	peak	150	188	

Job No.: STAR2017 #958
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 36-N 20MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/29/44
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

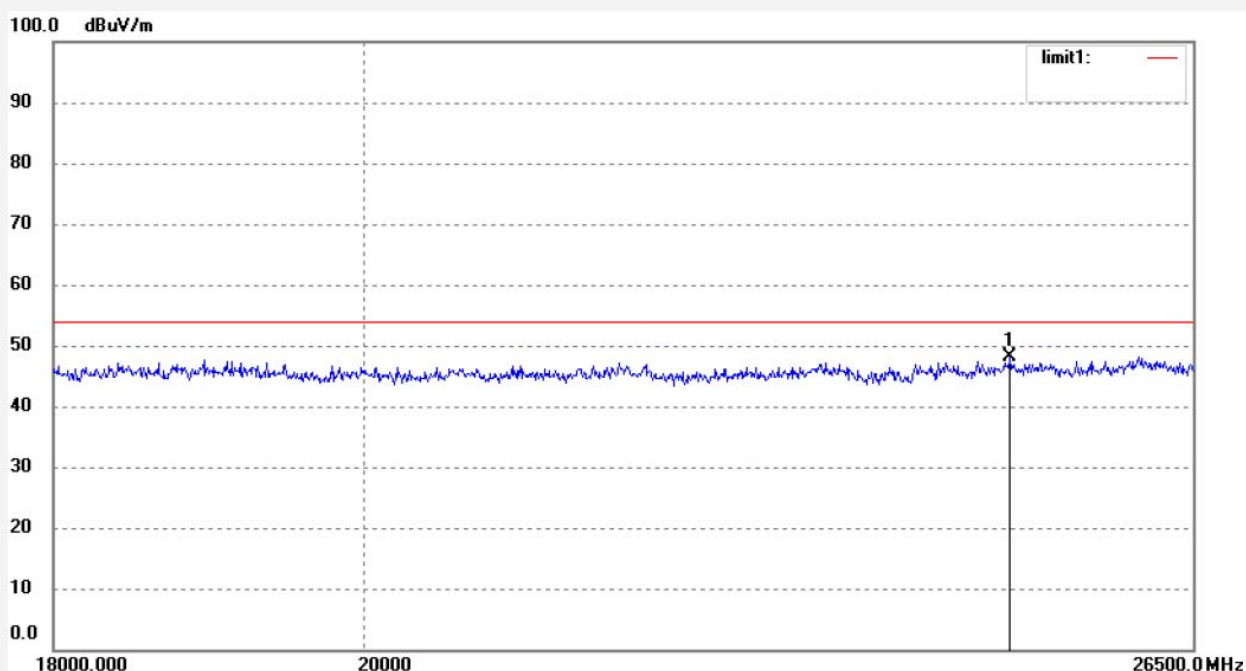

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24906.705	67.71	-19.60	48.11	74.00	-25.89	peak	200	104	

Job No.: STAR2017 #959

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 36-N 20MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/30/39

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

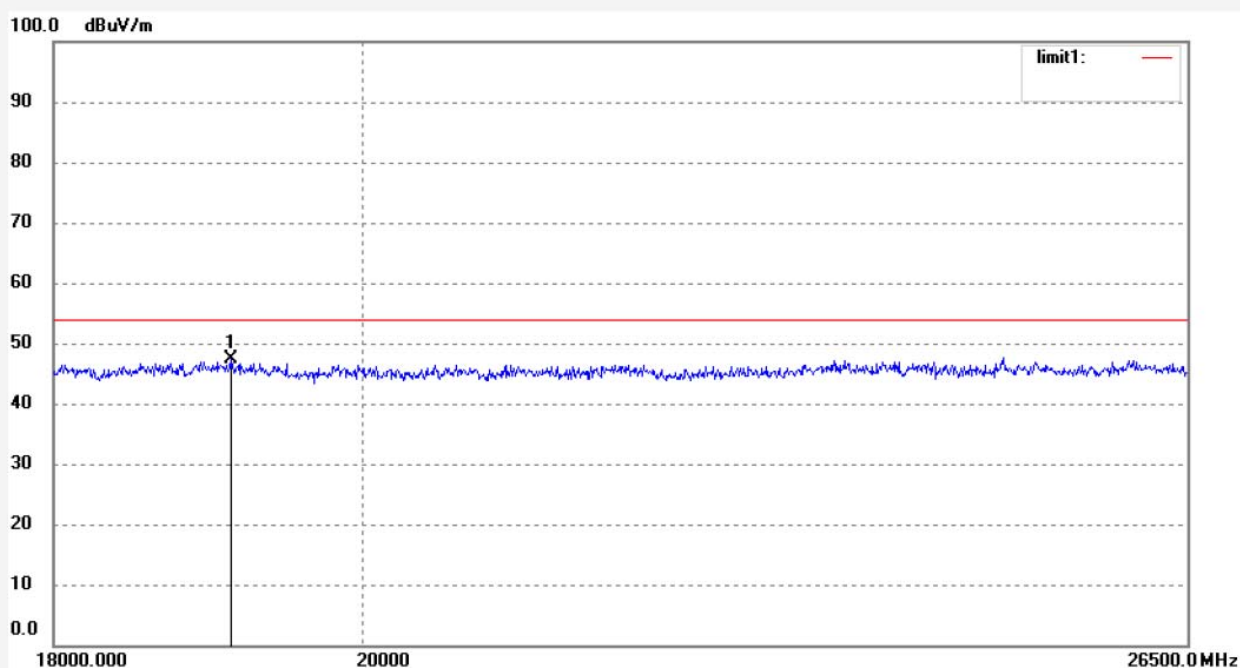

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	19121.804	68.53	-21.13	47.40	74.00	-26.60	peak	150	216	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2017 #961
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 48-N 20MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/32/17
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

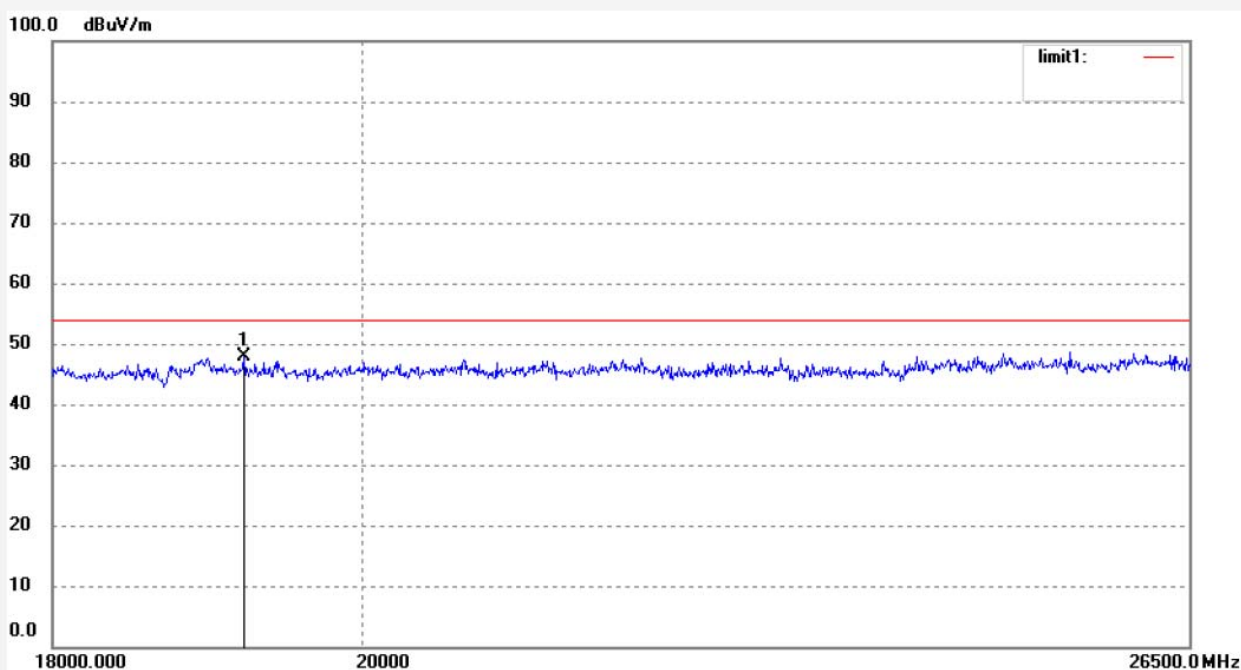

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	19210.939	68.86	-21.10	47.76	74.00	-26.24	peak	200	109	

Job No.: STAR2017 #960

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 48-N 20MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/31/30

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

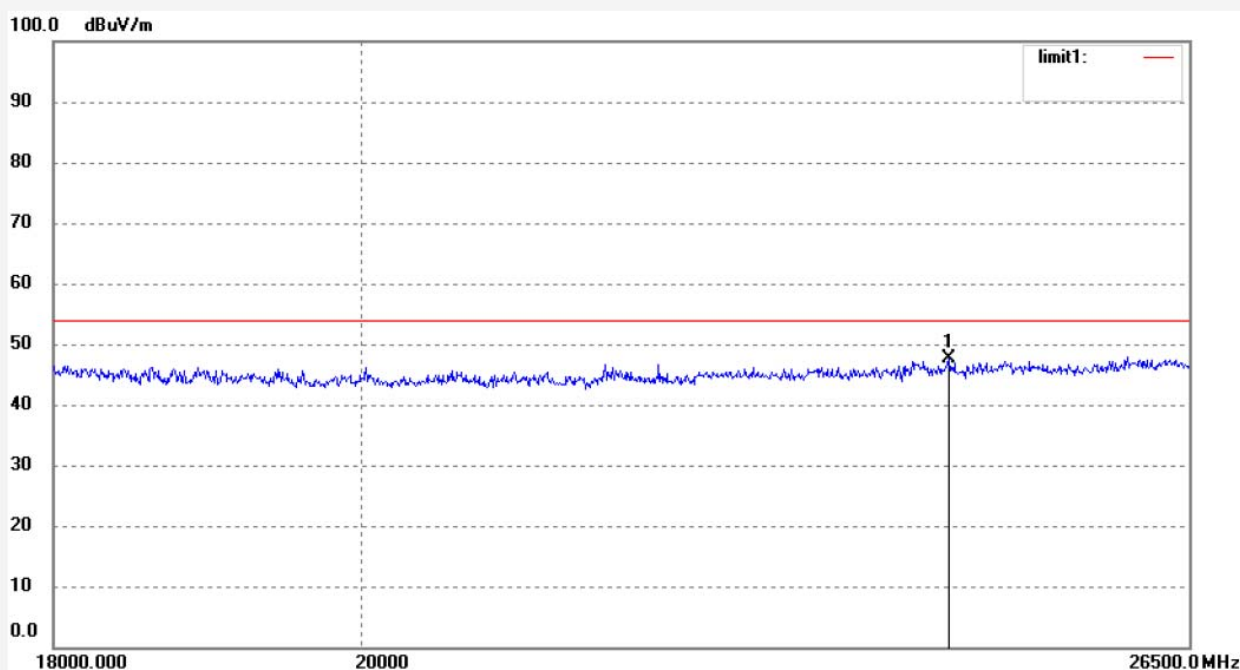

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24419.258	67.34	-19.73	47.61	74.00	-26.39	peak	150	175	

Job No.: STAR2017 #962

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 149-N 20MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/34/58

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

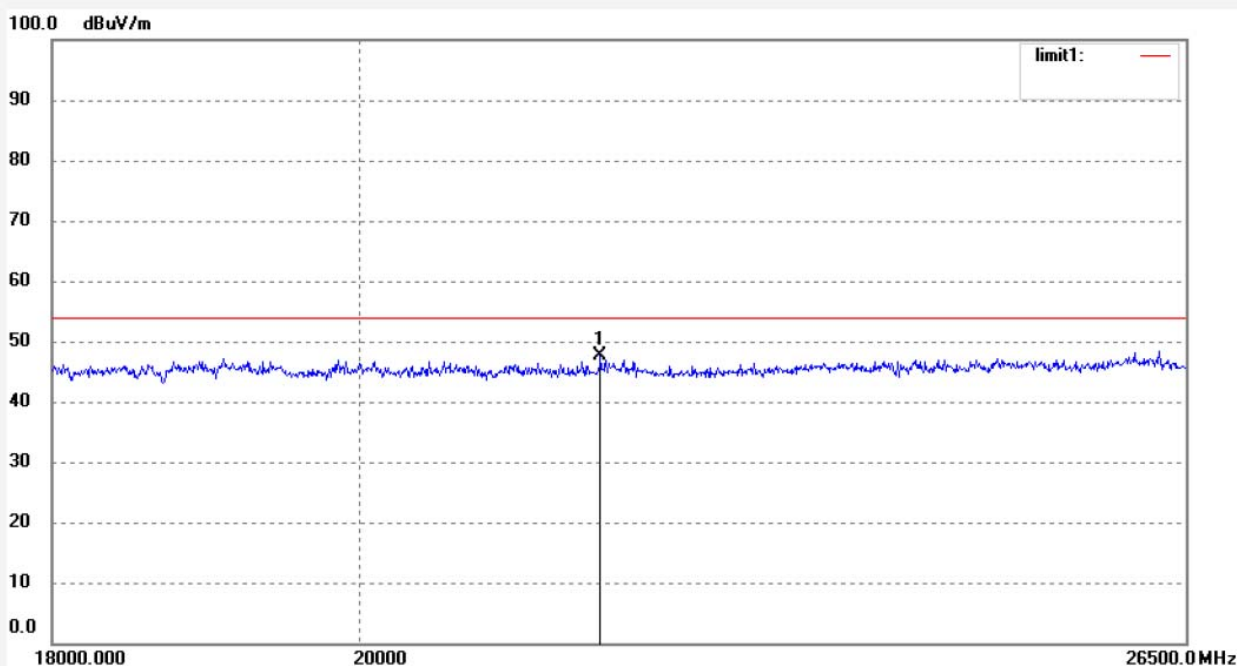

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	21705.322	68.00	-20.44	47.56	74.00	-26.44	peak	200	178	