



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2017 #963

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 149-N 20MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/35/38

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

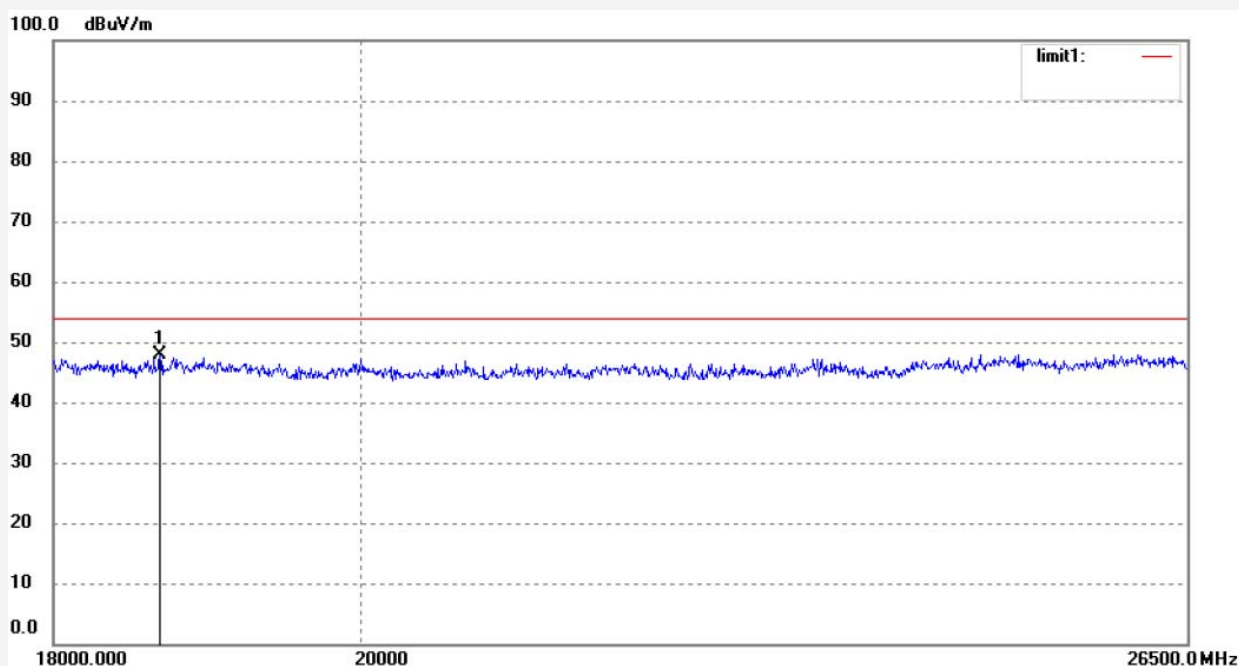

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18667.822	69.23	-21.25	47.98	74.00	-26.02	peak	150	288	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2017 #965

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 165-N 20MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/36/59

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

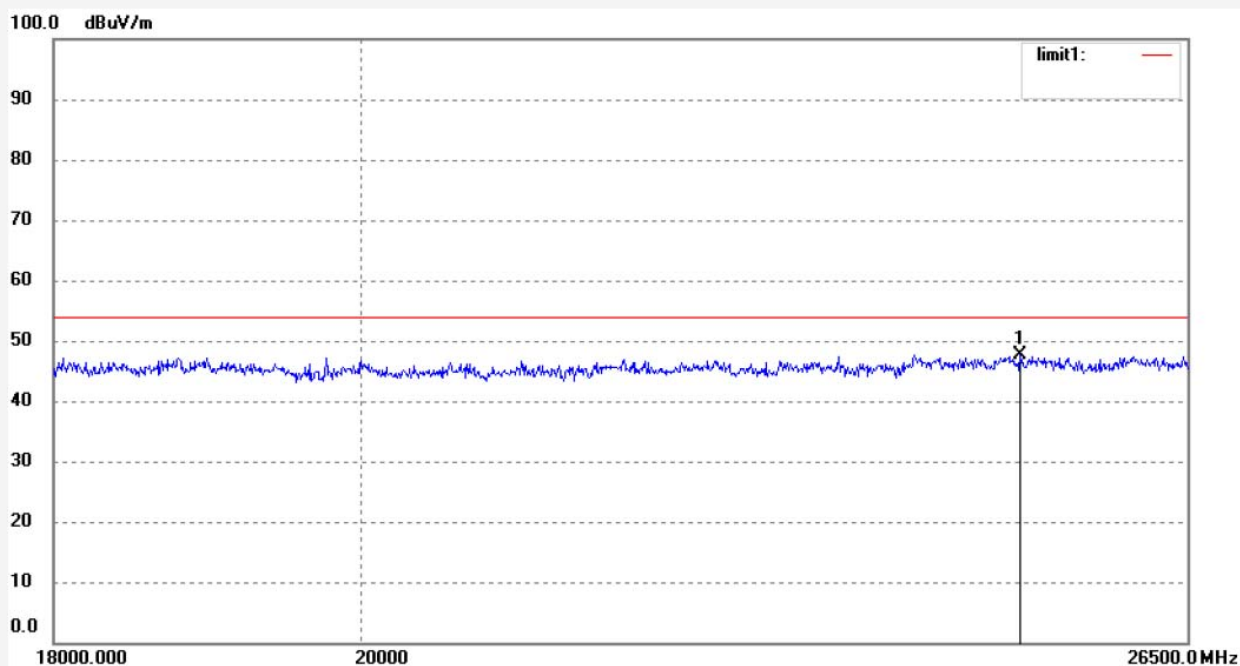


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25032.505	67.27	-19.57	47.70	74.00	-26.30	peak	200	140	

Job No.: STAR2017 #964
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 165-N 20MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/36/24
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

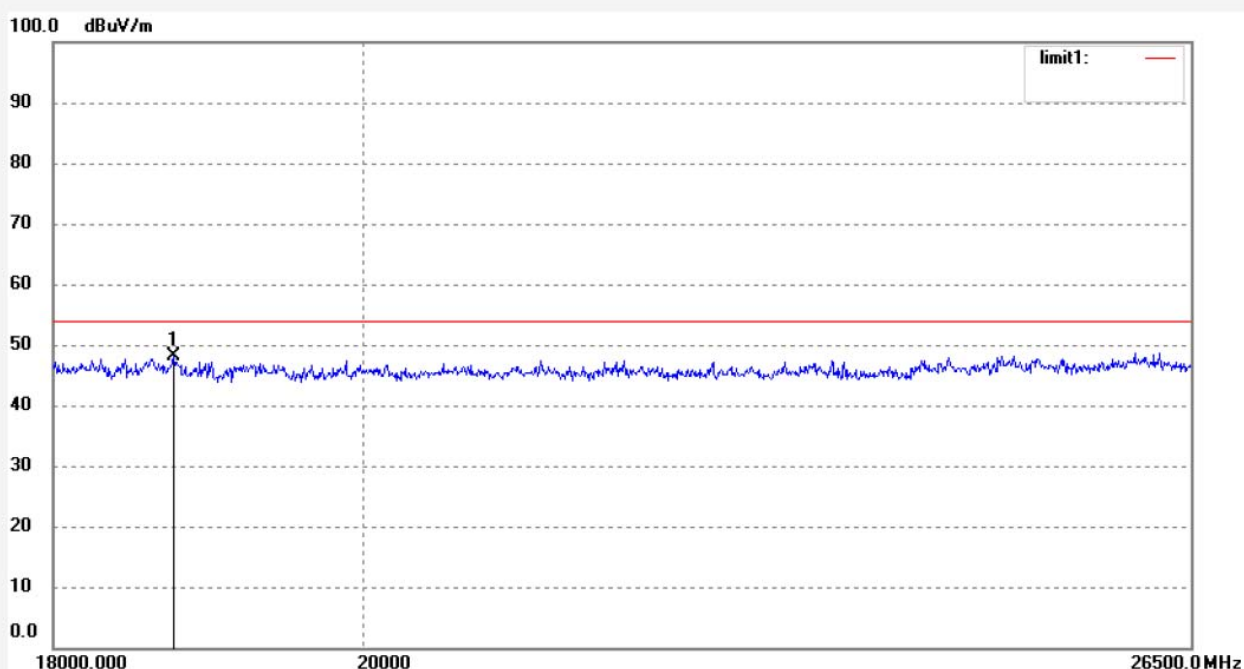

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18754.840	69.27	-21.22	48.05	74.00	-25.95	peak	150	199	

Job No.: STAR2017 #966

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 36-AC 20MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/37/59

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

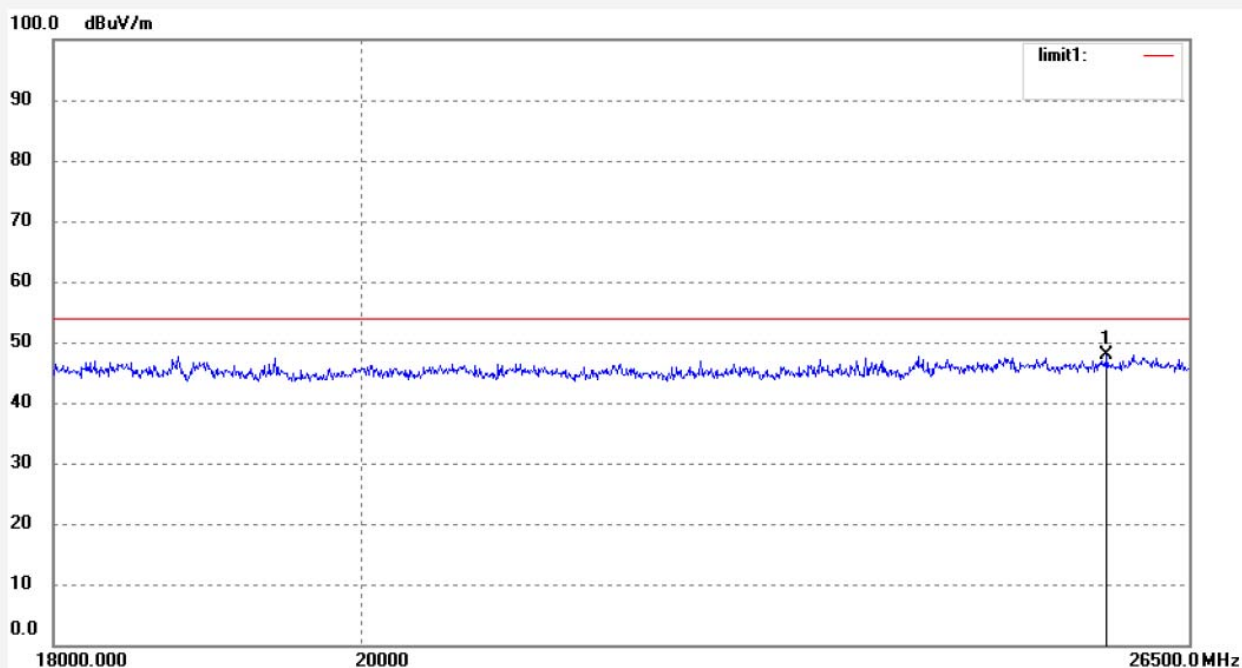

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25770.780	67.31	-19.38	47.93	74.00	-26.07	peak	200	299	

Job No.: STAR2017 #967

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 36-AC 20MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/38/31

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

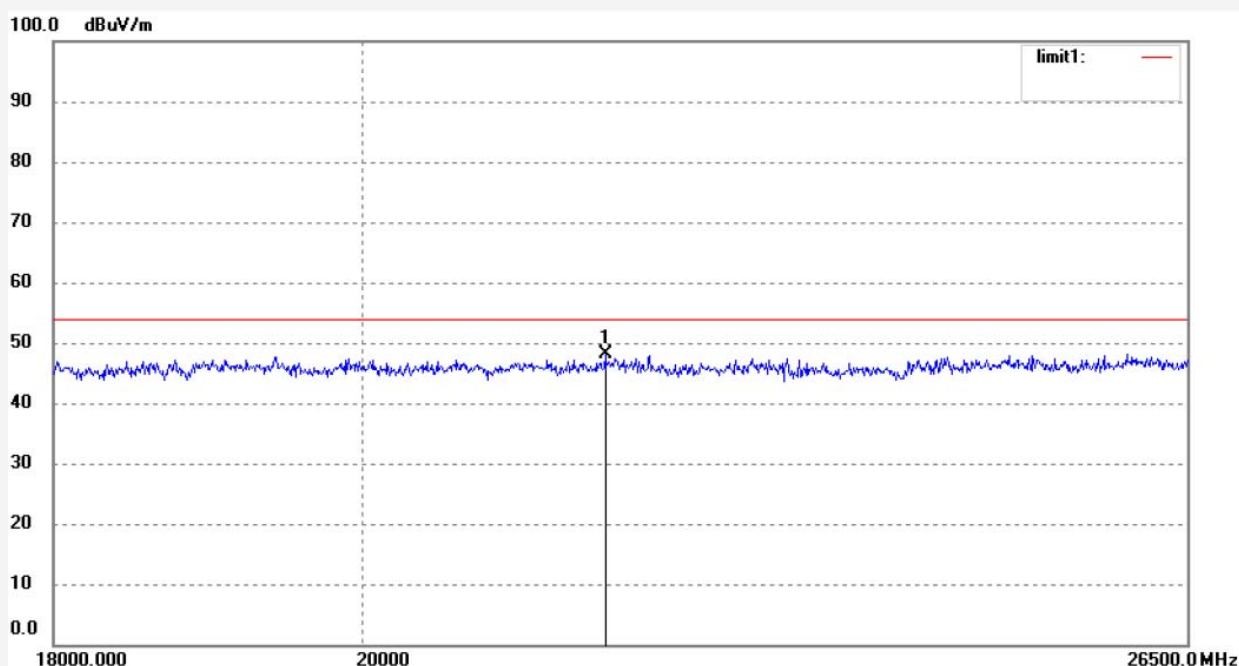

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	21730.572	68.49	-20.44	48.05	74.00	-25.95	peak	150	99	

Job No.: STAR2017 #969

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 48-AC 20MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/40/19

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

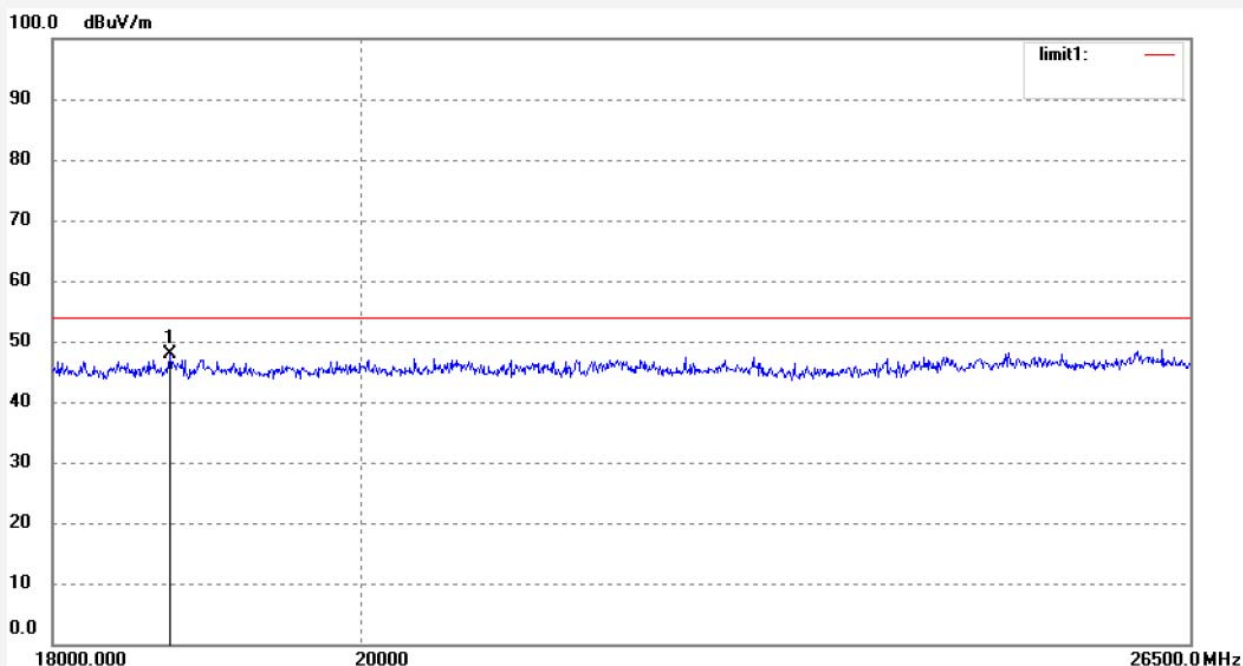

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18733.048	69.16	-21.23	47.93	74.00	-26.07	peak	200	119	

Job No.: STAR2017 #968

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 48-AC 20MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/39/40

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

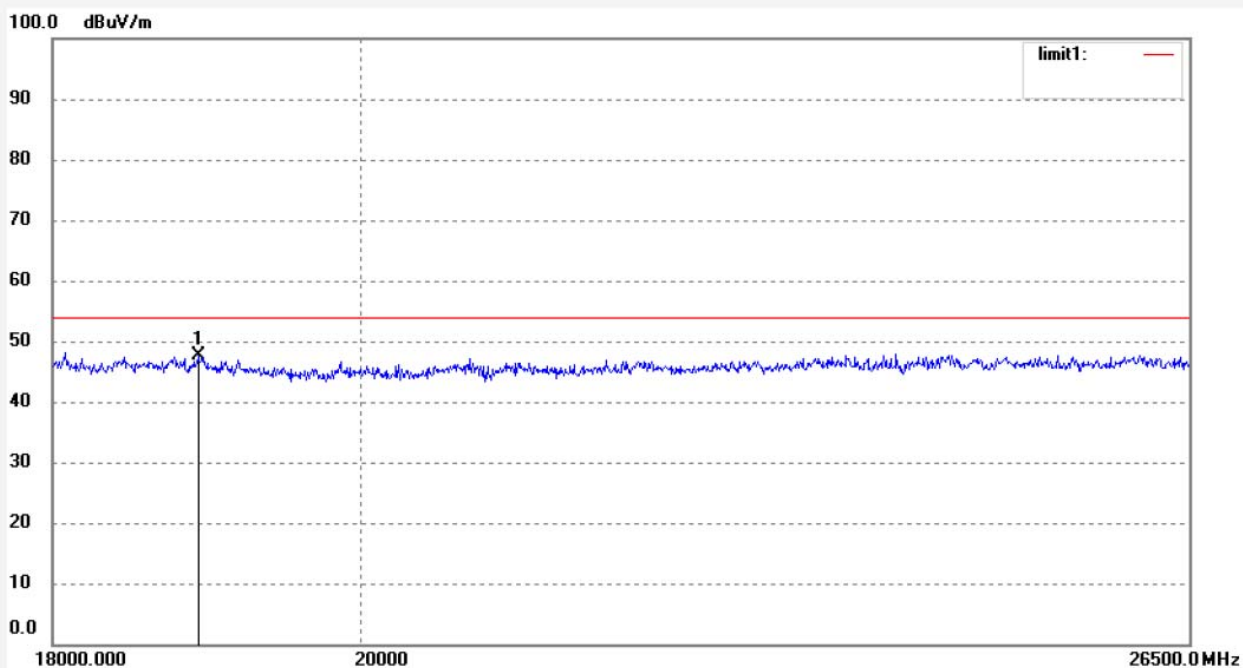

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18915.429	68.85	-21.18	47.67	74.00	-26.33	peak	150	142	

Job No.: STAR2017 #970

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 149-AC 20MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/41/09

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

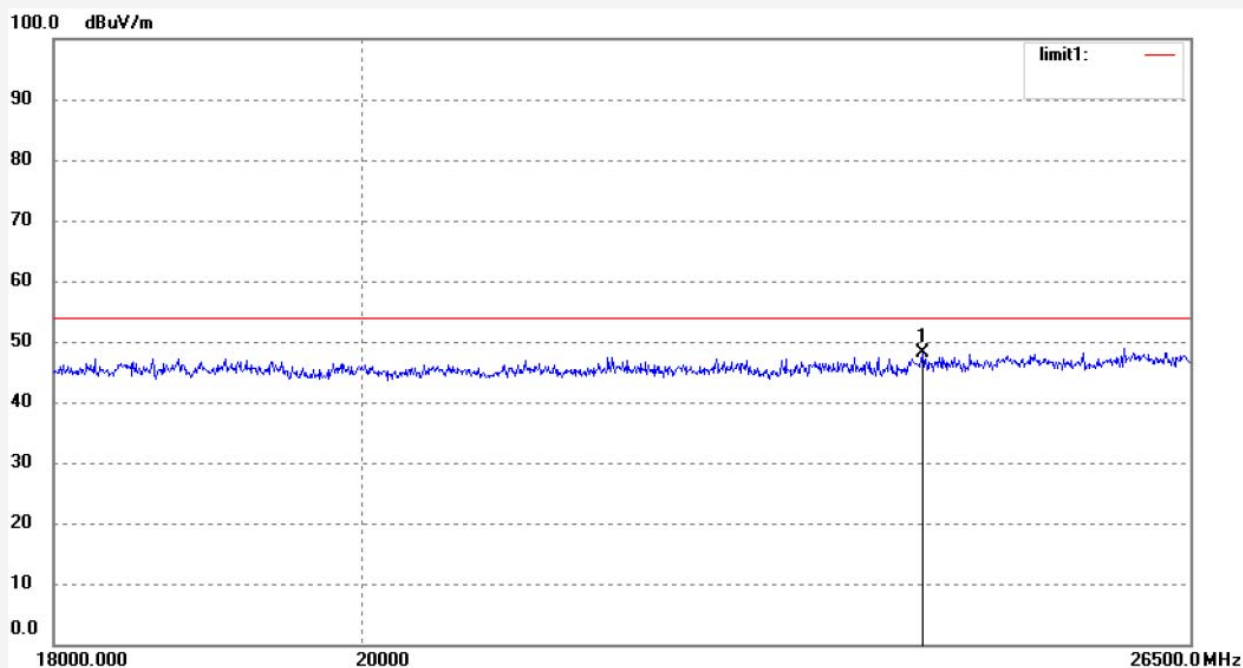


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24193.184	67.94	-19.79	48.15	74.00	-25.85	peak	200	181	

Job No.: STAR2017 #971
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 149-AC 20MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/41/56
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

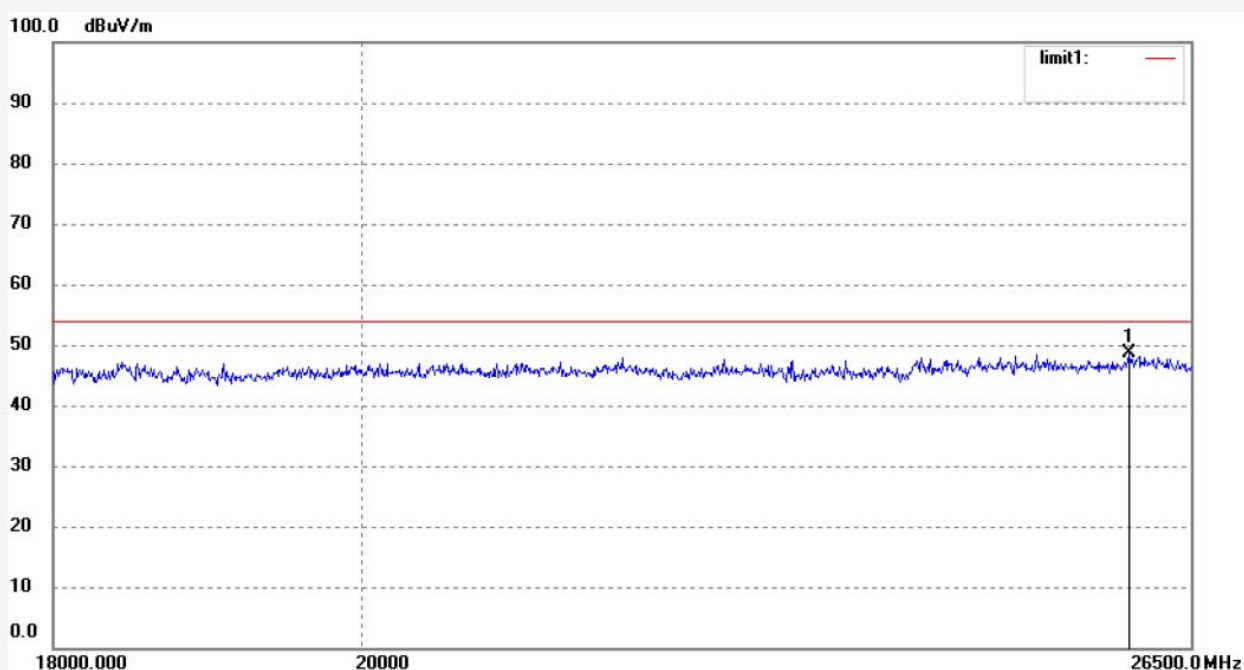


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25951.181	68.05	-19.33	48.72	74.00	-25.28	peak	150	143	

Job No.: STAR2017 #973
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 165-AC 20MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/43/41
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

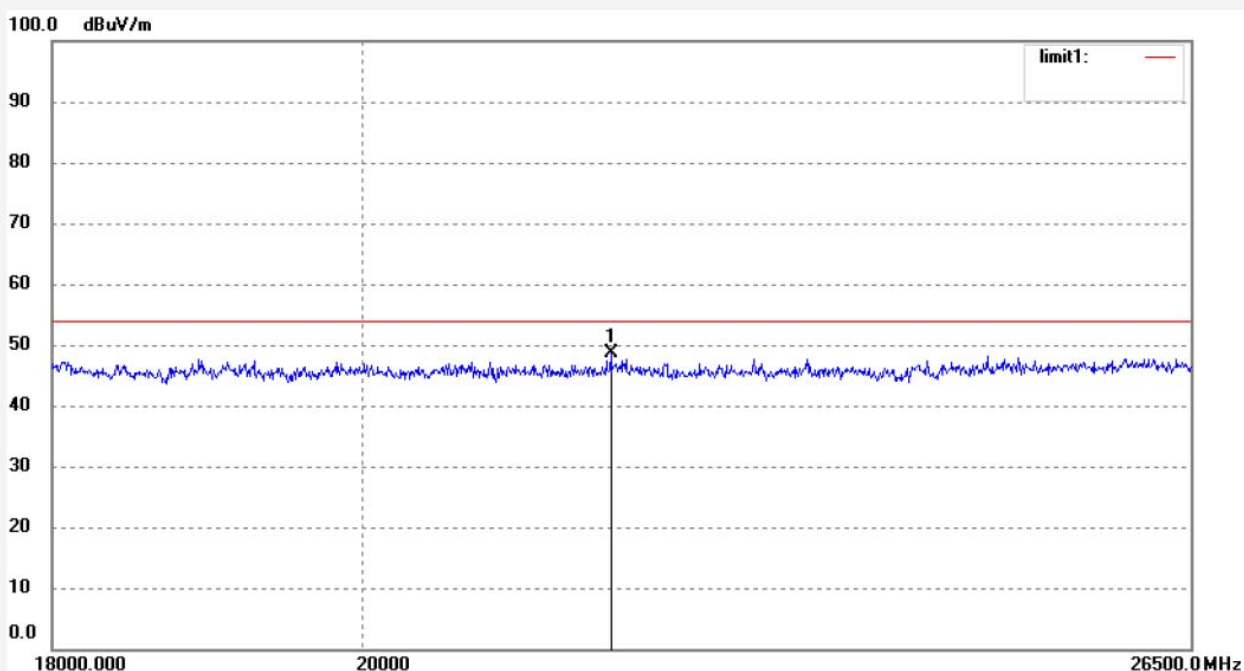


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	21764.285	69.06	-20.43	48.63	74.00	-25.37	peak	200	83	

Job No.: STAR2017 #972
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 165-AC 20MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/42/53
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

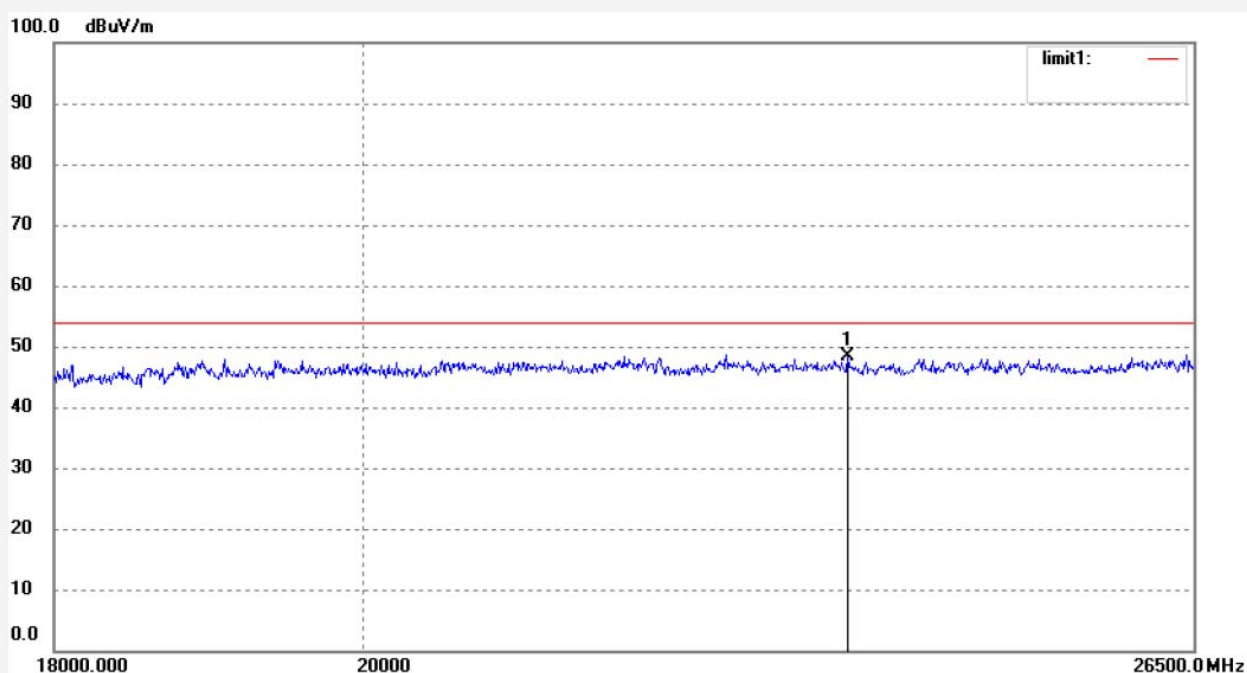


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	23563.942	68.25	-19.96	48.29	74.00	-25.71	peak	150	74	

Job No.: STAR2017 #974
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 38-N 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/44/42
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

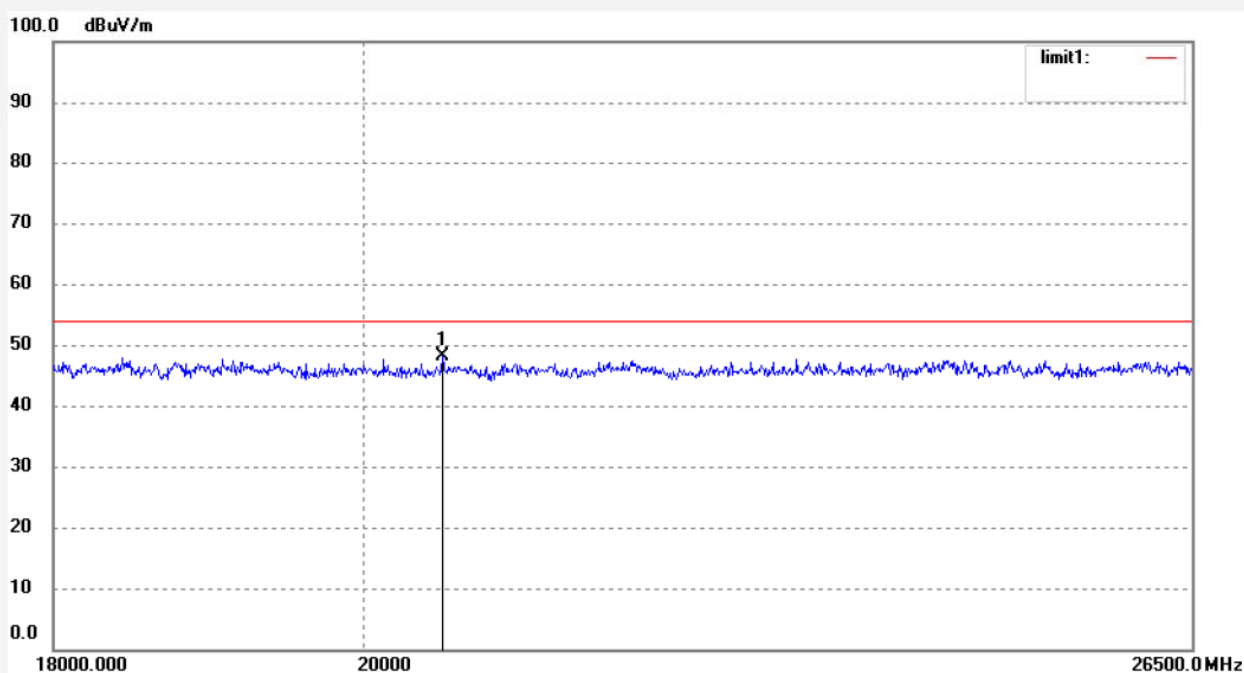

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	20543.111	68.97	-20.75	48.22	74.00	-25.78	peak	200	140	

Job No.: STAR2017 #975

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 38-N 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/45/26

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

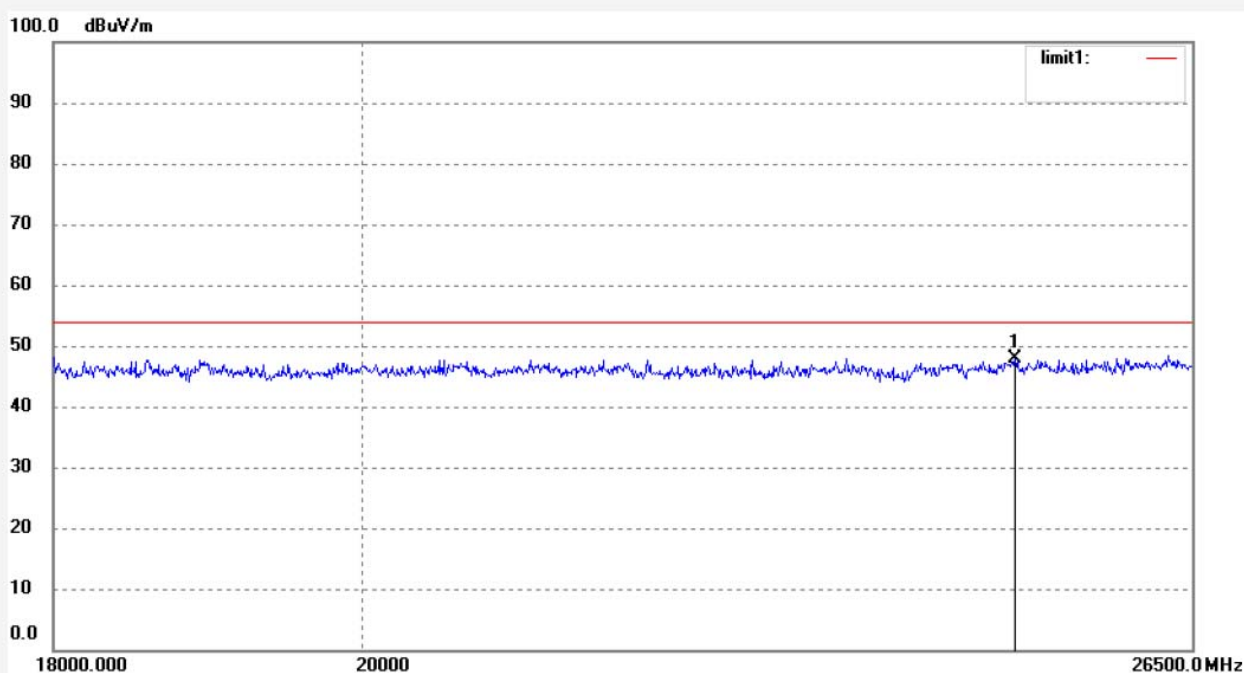


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24955.014	67.57	-19.59	47.98	74.00	-26.02	peak	150	295	

Job No.: STAR2017 #977
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 46-N 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/47/22
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

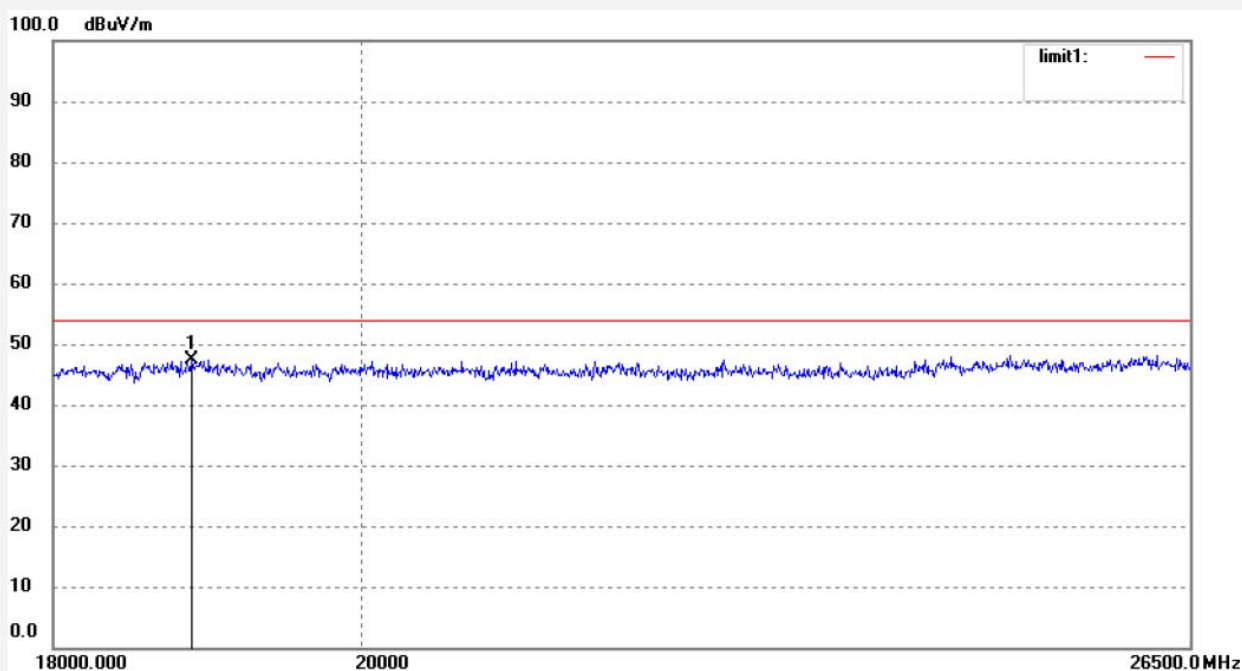

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18871.496	68.60	-21.19	47.41	74.00	-26.59	peak	200	48	

Job No.: STAR2017 #976

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 46-N 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/46/36

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

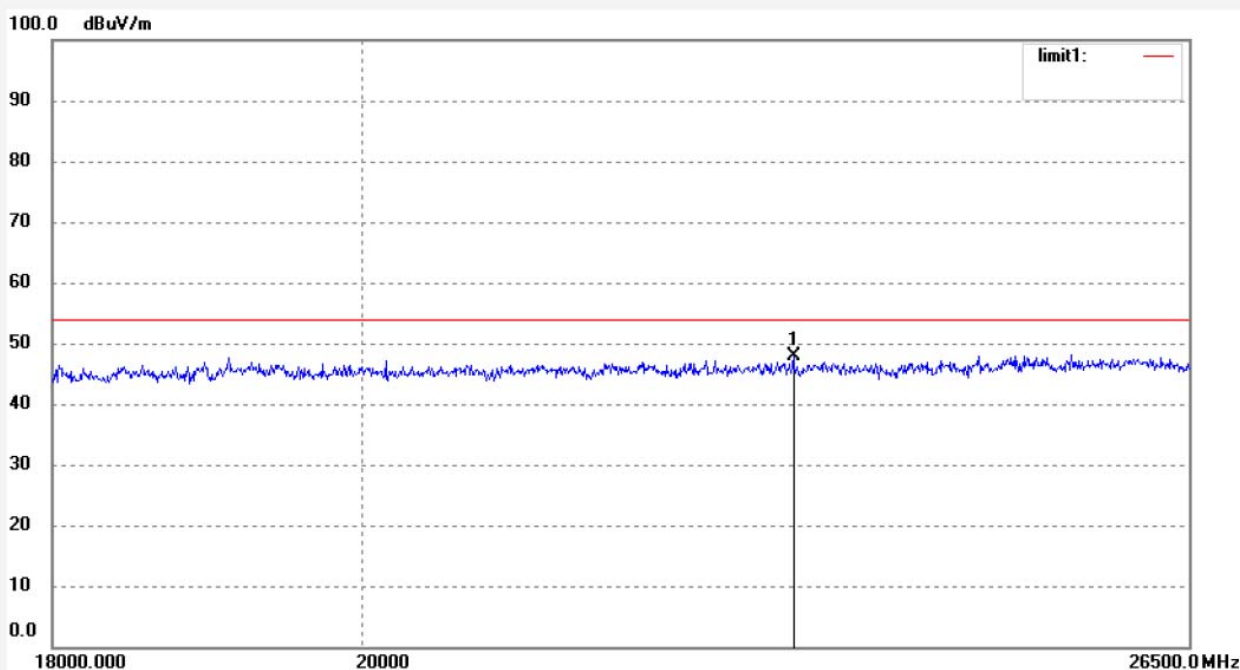

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	23165.534	67.89	-20.06	47.83	74.00	-26.17	peak	150	51	

Job No.: STAR2017 #978

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 151-N 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/48/09

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

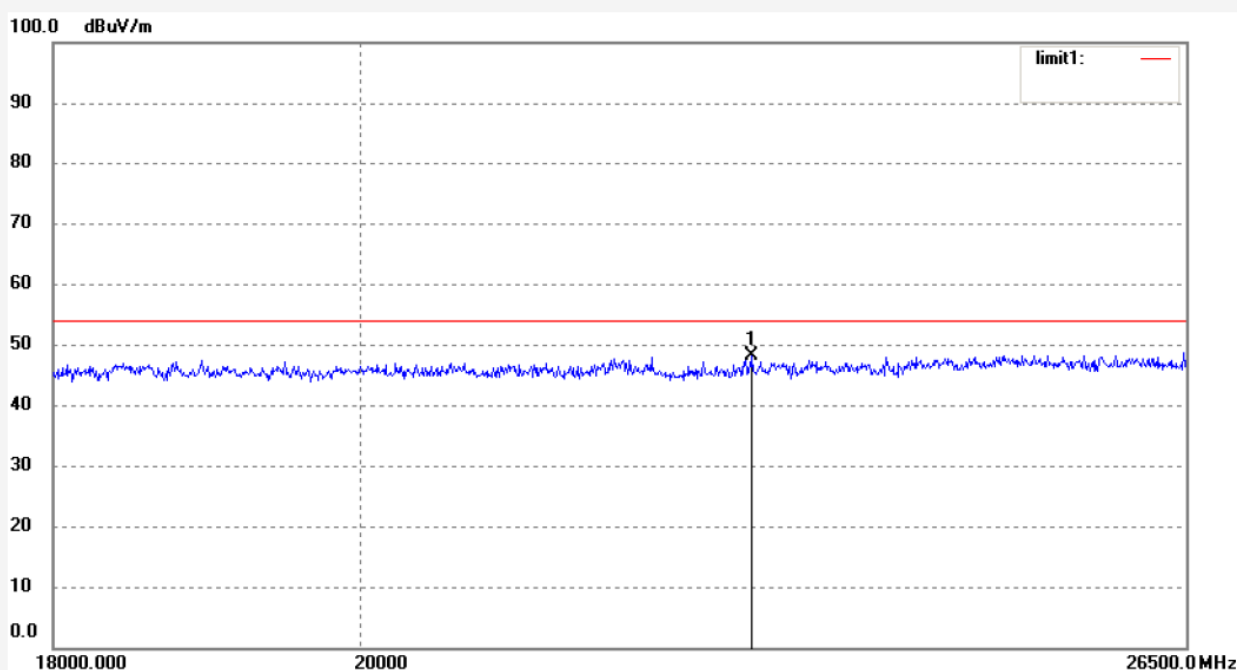


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	22853.433	68.22	-20.15	48.07	74.00	-25.93	peak	200	192	

Job No.: STAR2017 #979
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 151-N 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/48/58
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

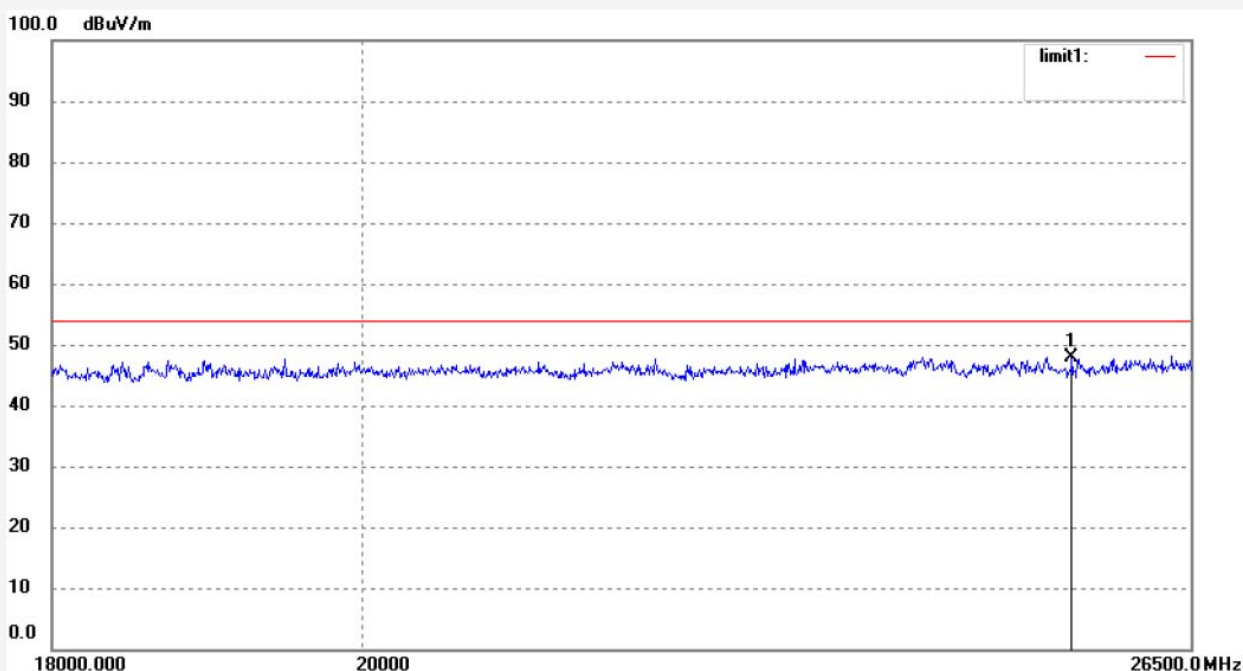


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25453.156	67.43	-19.46	47.97	74.00	-26.03	peak	150	177	

Job No.: STAR2017 #981
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 159-N 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/50/24
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

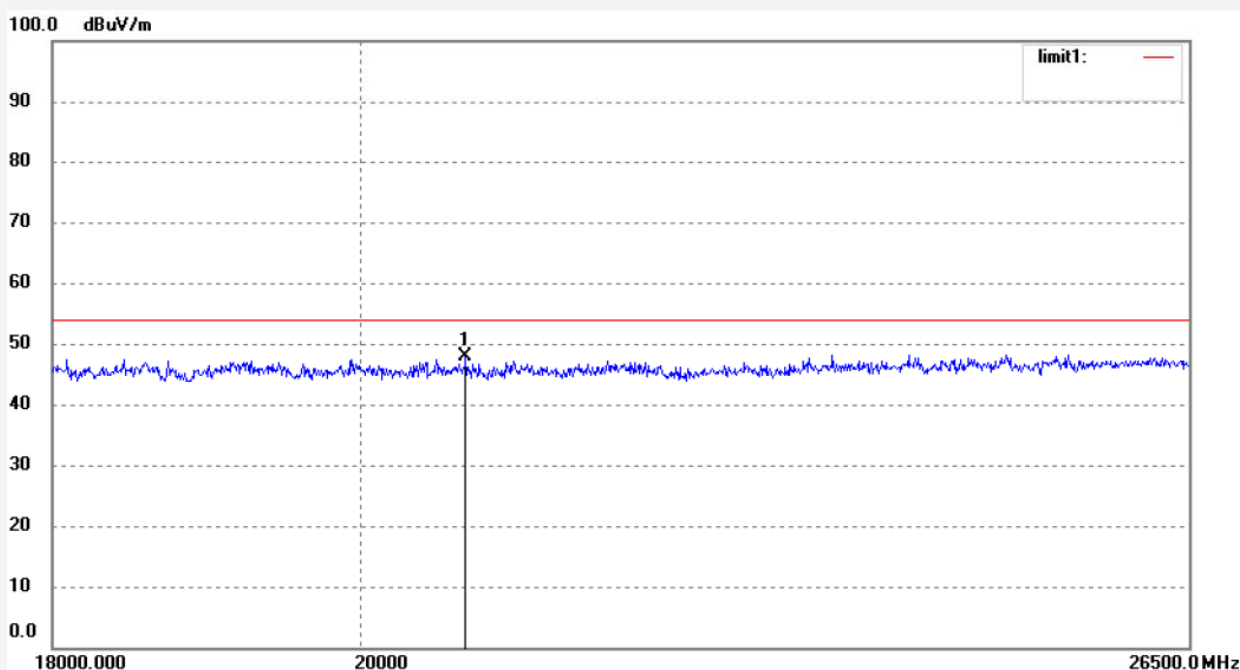


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	20719.012	68.68	-20.70	47.98	74.00	-26.02	peak	200	179	

Job No.: STAR2017 #980
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 159-N 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/49/42
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

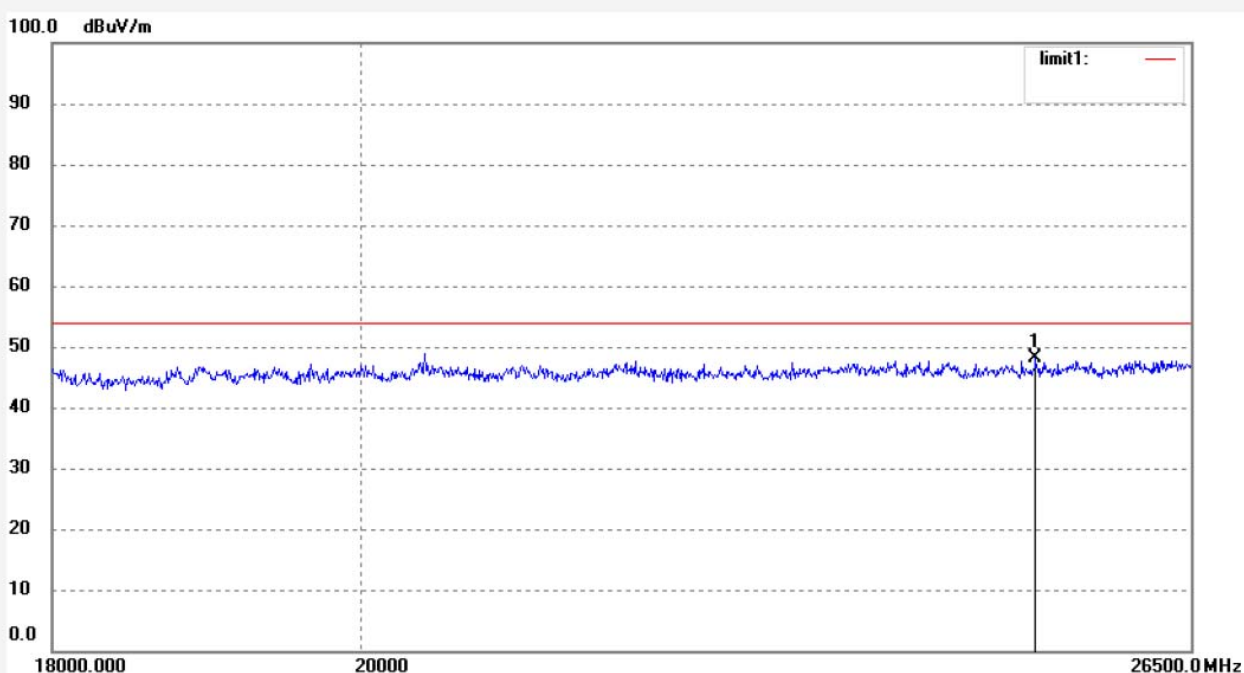

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25139.447	67.71	-19.54	48.17	74.00	-25.83	peak	150	88	

Job No.: STAR2017 #982

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 38-AC 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/51/11

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

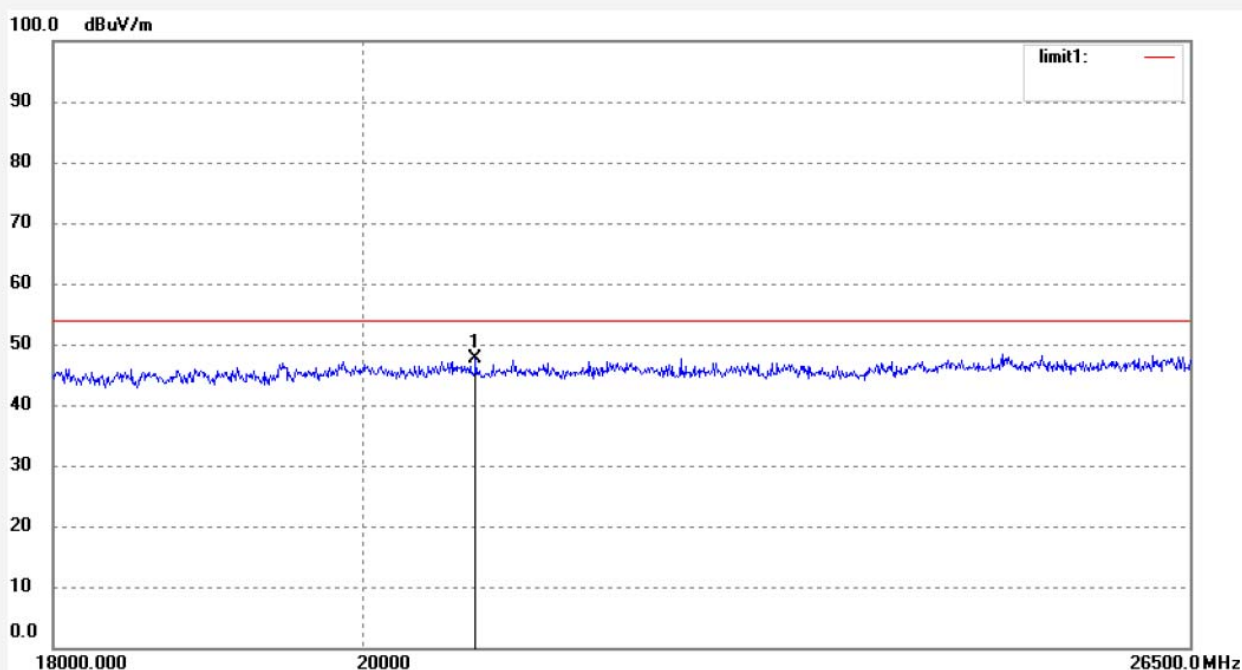


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	20783.348	68.35	-20.68	47.67	74.00	-26.33	peak	200	105	

Job No.: STAR2017 #983
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 38-AC 40MHz
Model: M632USA1

Polarization: Vertical
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/51/53
Engineer Signature: star
Distance: 3m

Manufacturer: Xiamen Prima Technology Inc.

Note: Report NO.:ATE20172554

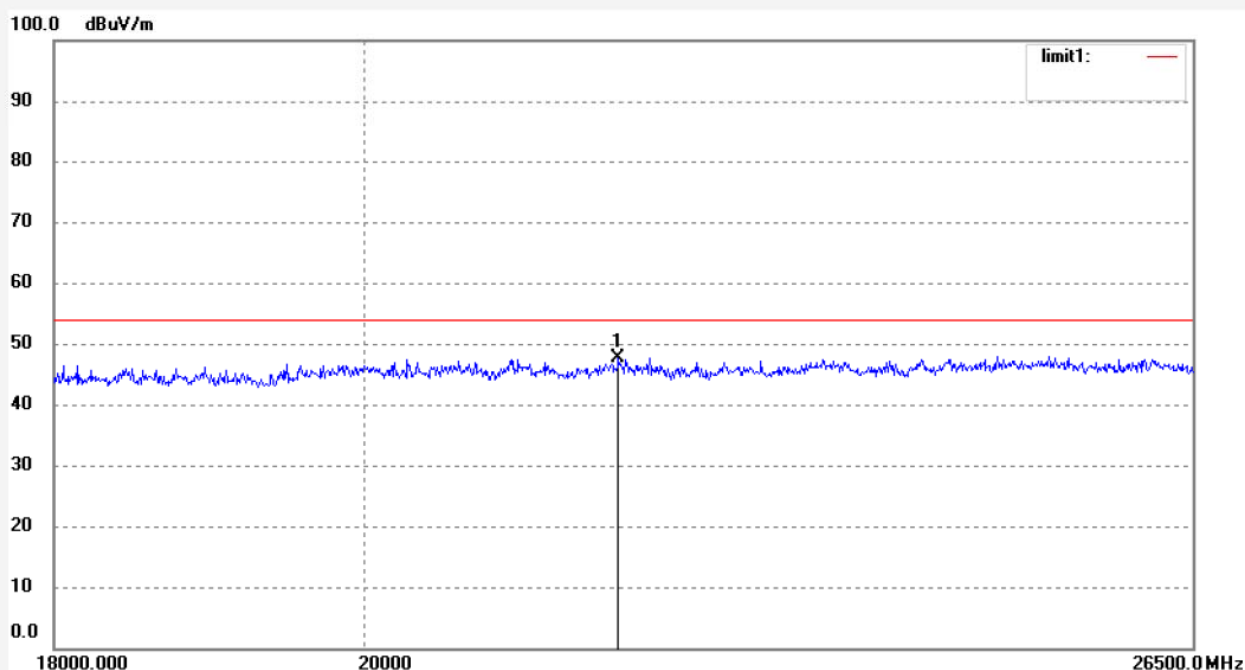


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	21806.499	67.98	-20.42	47.56	74.00	-26.44	peak	150	56	

Job No.: STAR2017 #985
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 46-AC 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/53/24
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

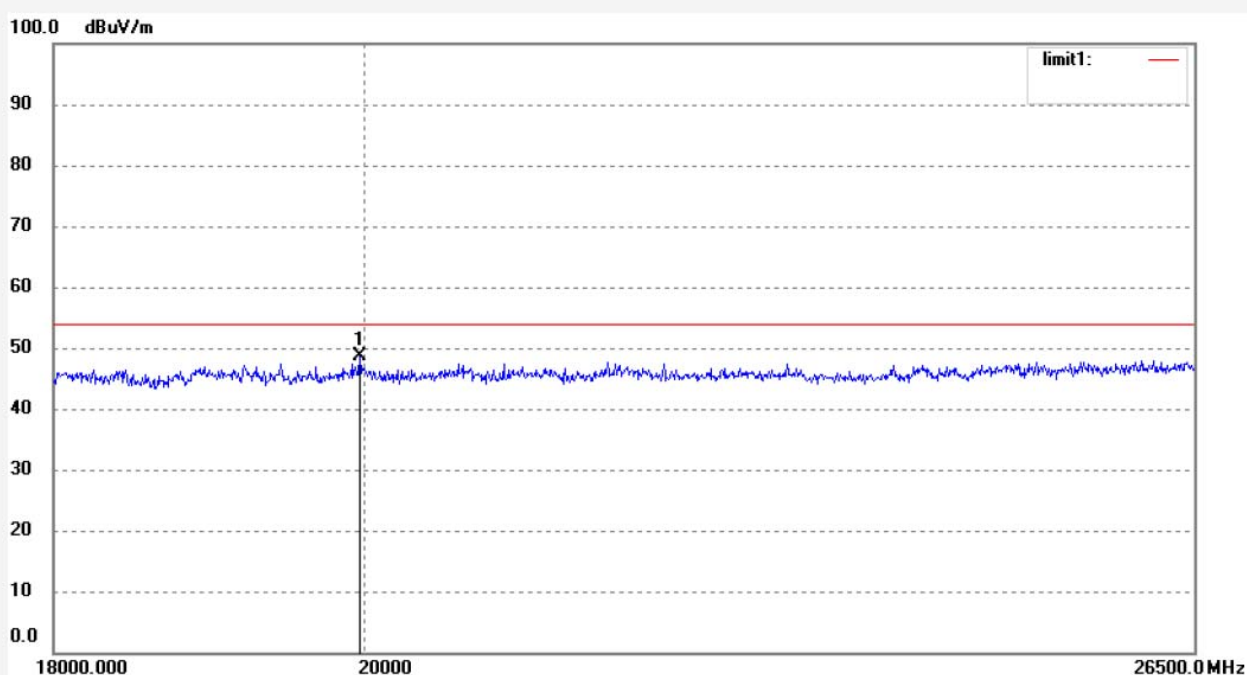


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	19970.070	69.45	-20.90	48.55	74.00	-25.45	peak	200	106	

Job No.: STAR2017 #984
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 46-AC 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/52/38
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

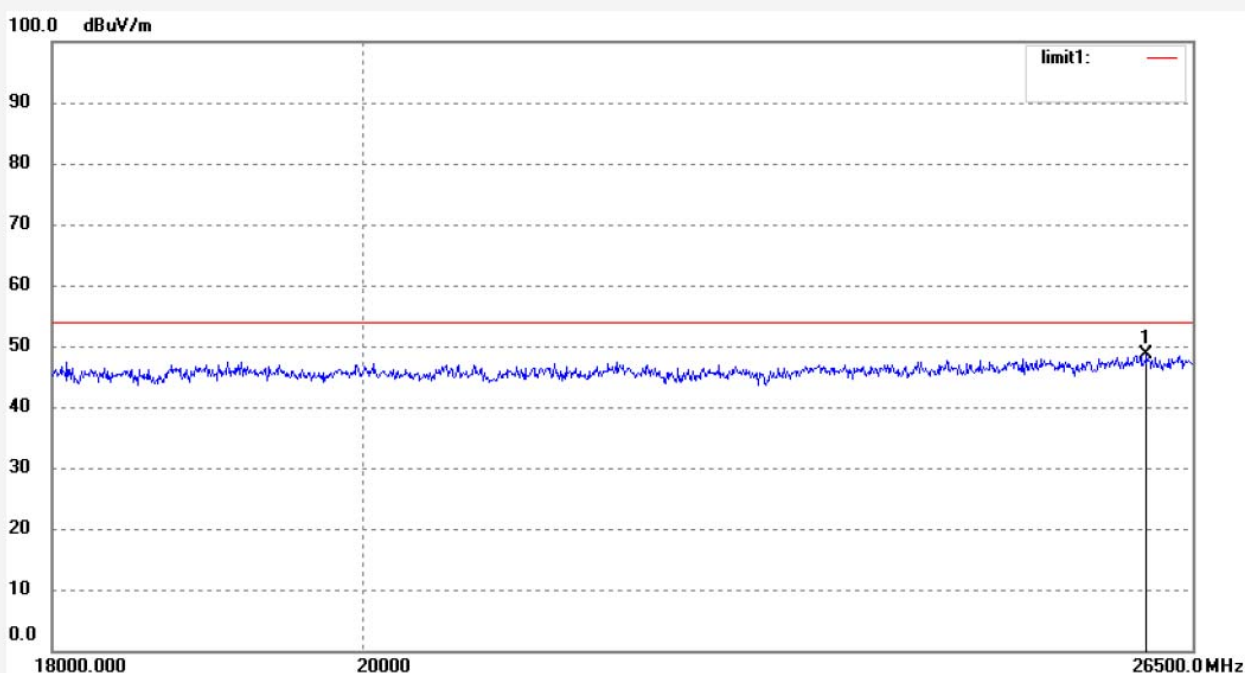


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26092.367	32.73	15.94	48.67	74.00	-25.33	peak	150	89	

Job No.: STAR2017 #986
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 151-AC 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/54/10
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

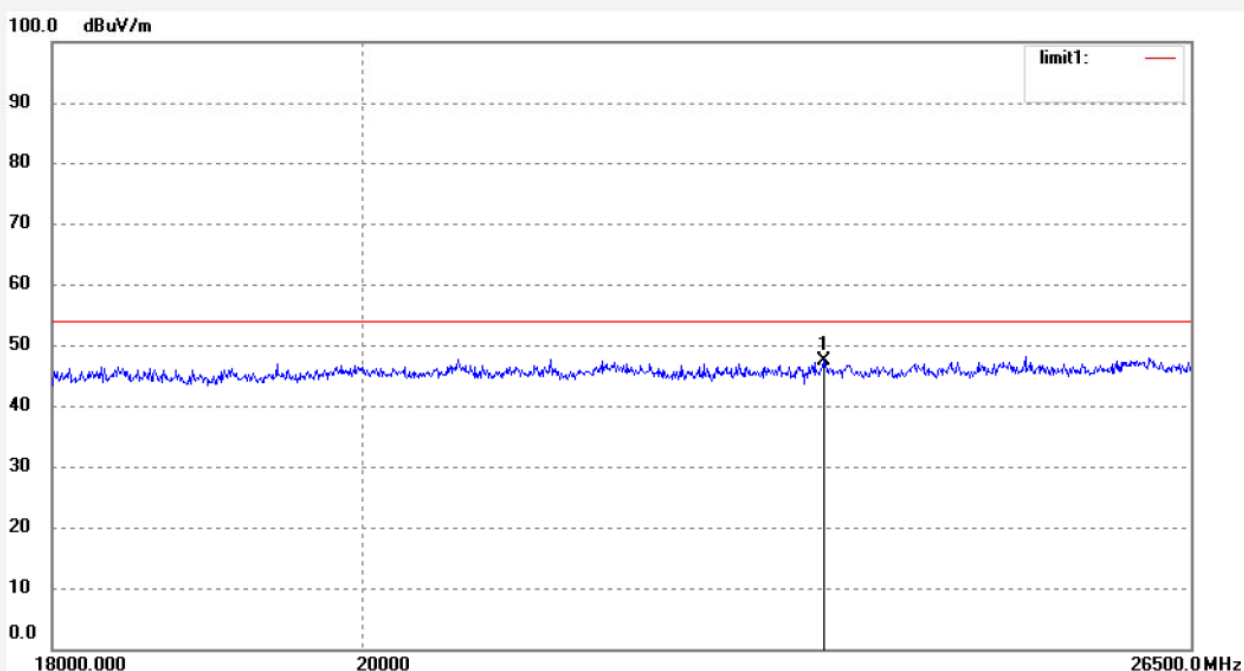

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	23391.068	67.47	-20.01	47.46	74.00	-26.54	peak	200	147	

Job No.: STAR2017 #987

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 151-AC 40MHz

Model: M632USA1

Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical

Power Source: DC 3.3V


Date: 2018/01/23

Time: 19/54/55

Engineer Signature: star

Distance: 3m

Note: Report NO.:ATE20172554

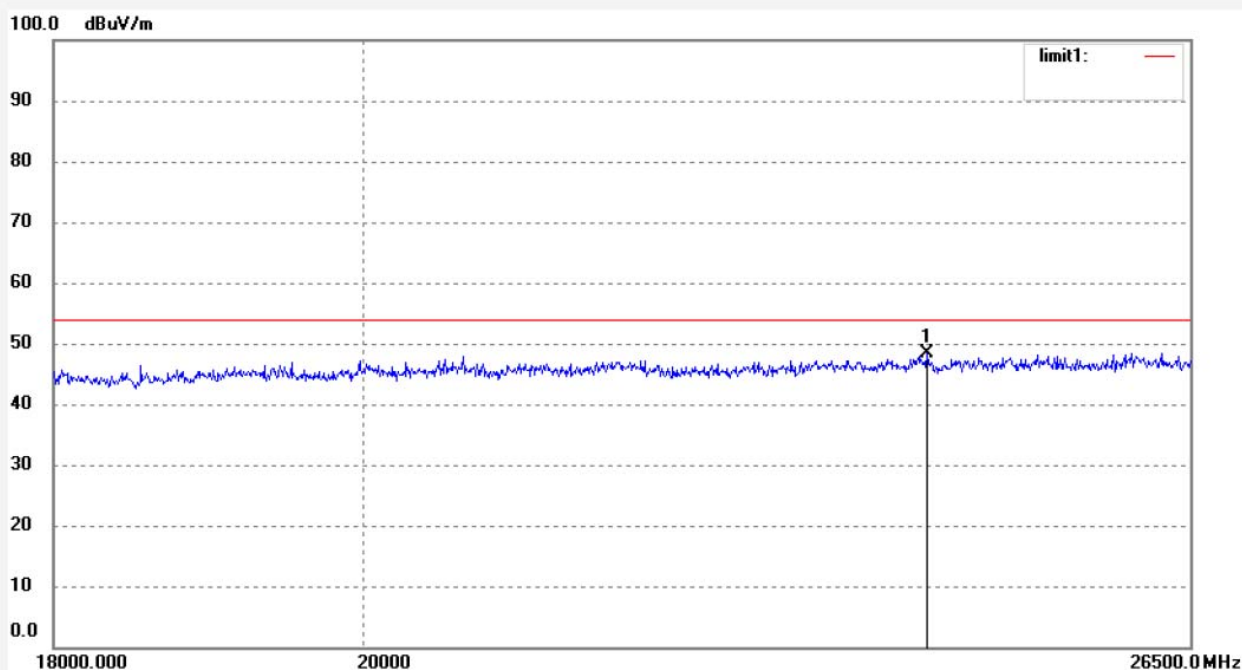


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24230.717	68.16	-19.78	48.38	74.00	-25.62	peak	150	254	

Job No.: STAR2017 #989
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 159-AC 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/56/24
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

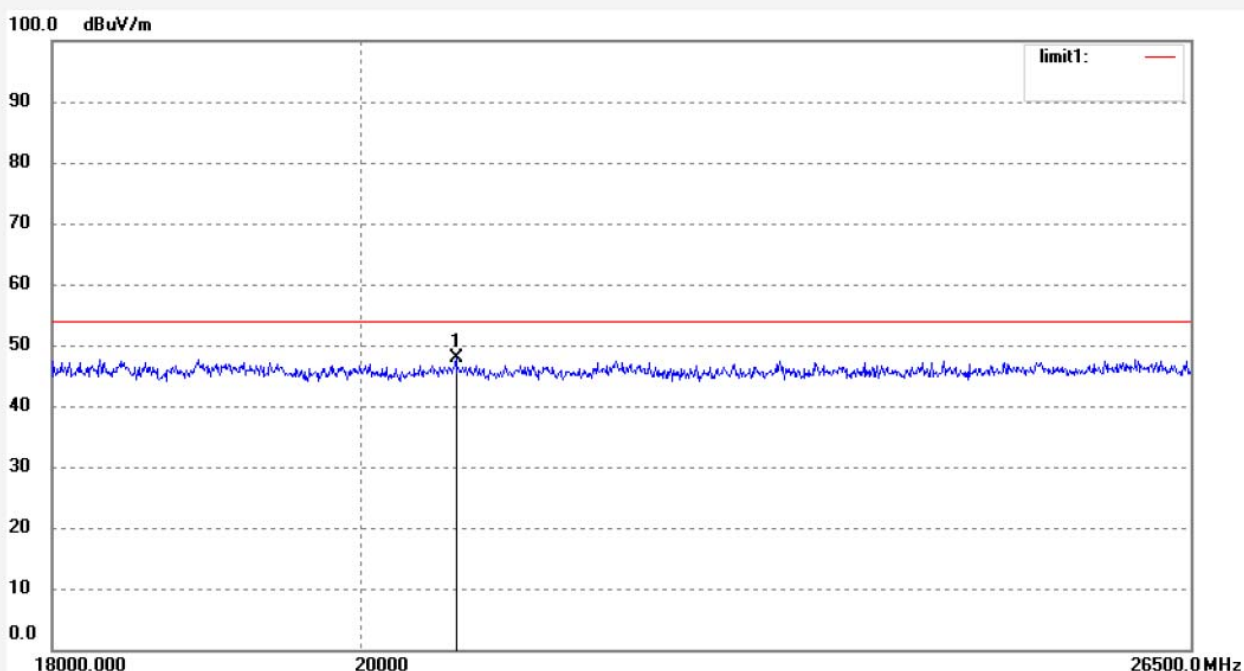


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	20646.871	68.63	-20.73	47.90	74.00	-26.10	peak	200	186	

Job No.: STAR2017 #988
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 159-AC 40MHz
Model: M632USA1
Manufacturer: Xiamen Prima Technology Inc.

Polarization: Vertical
Power Source: DC 3.3V
Date: 2018/01/23
Time: 19/55/36
Engineer Signature: star
Distance: 3m

Note: Report NO.:ATE20172554

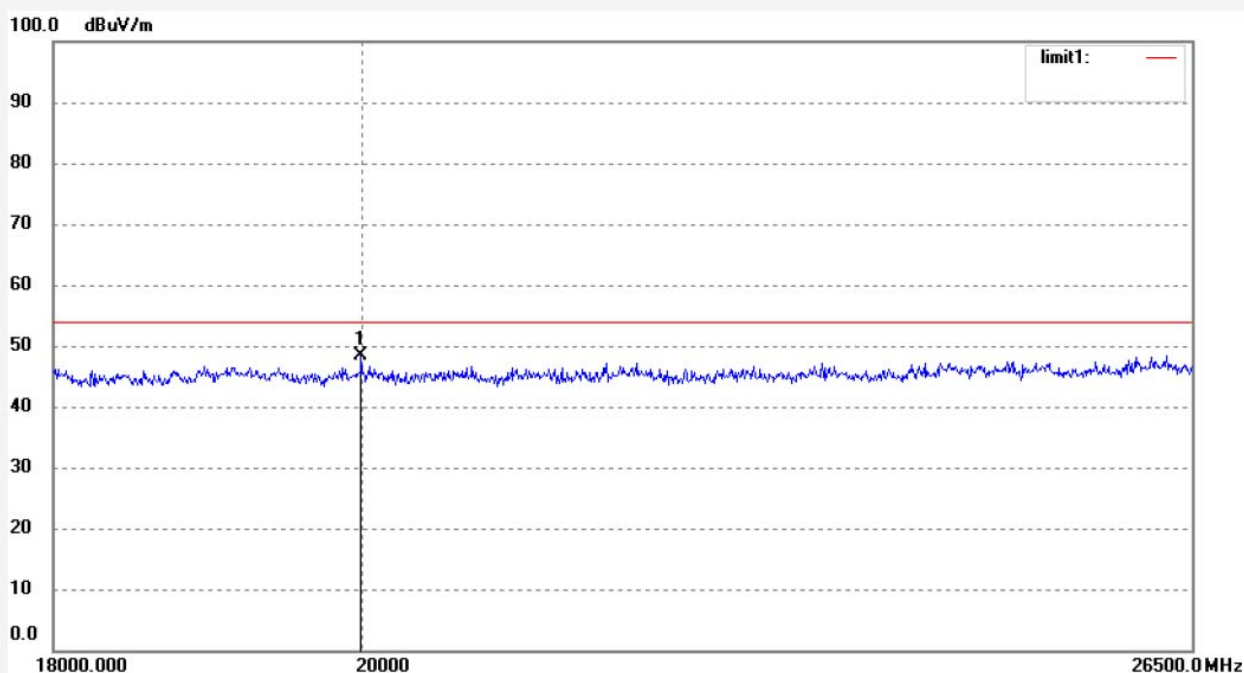

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	19985.554	69.34	-20.90	48.44	74.00	-25.56	peak	150	209	


Test mode: 802.11a,N20,ac TX Frequency: 5180MHz, 5240MHz

The EUT is tested radiation emission at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Horizontal
 Operator Name:
 Comment:


Copy of FCC Electric Field Strength 26.5-40GHz

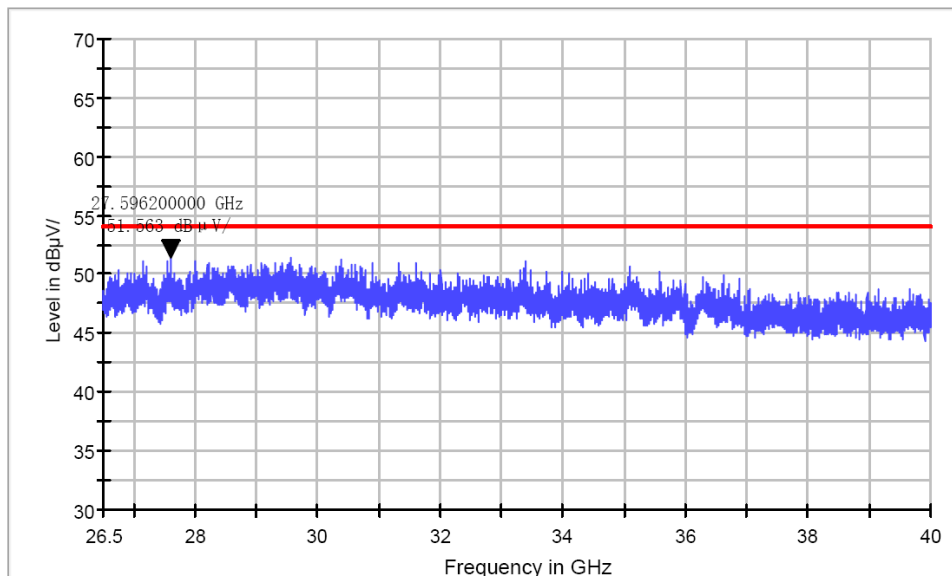

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Vertical
 Operator Name:
 Comment:

Copy of FCC Electric Field Strength 26.5-40GHz

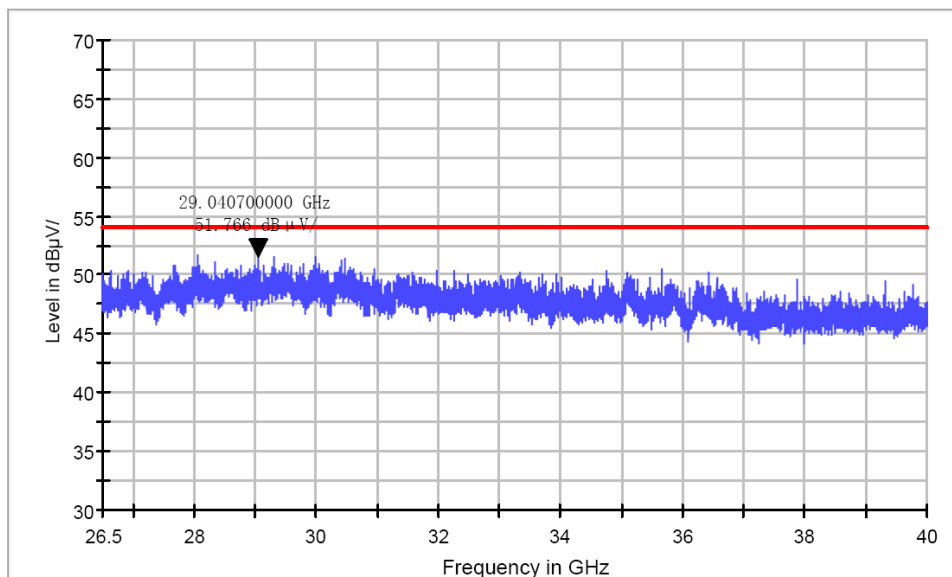


Test mode: 802.11a,N20,ac TX Frequency: 5745MHz, 5825MHz

The EUT is tested radiation emission at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Horizontal
 Operator Name:
 Comment:


Copy of FCC Electric Field Strength 26.5-40GHz

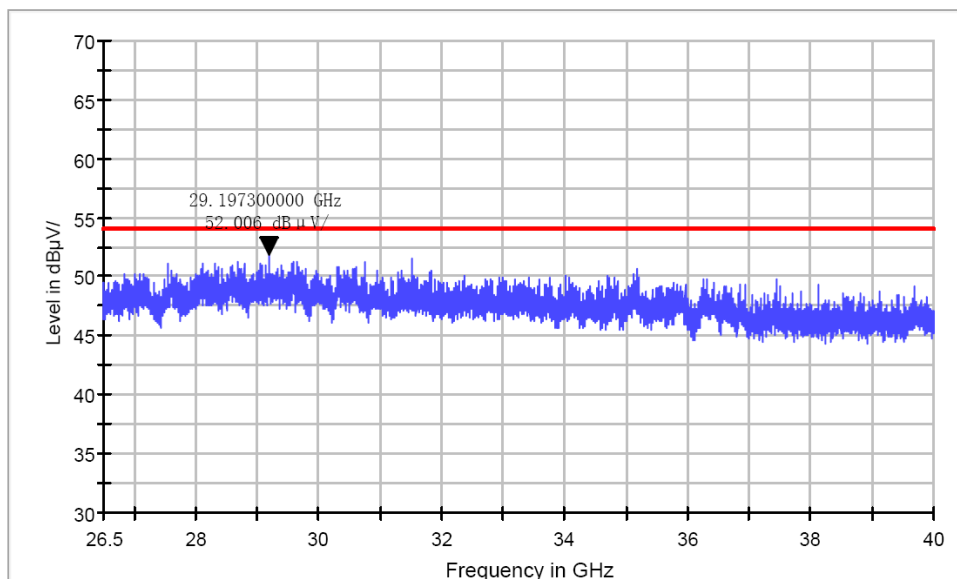

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Vertical
 Operator Name:
 Comment:

Copy of FCC Electric Field Strength 26.5-40GHz

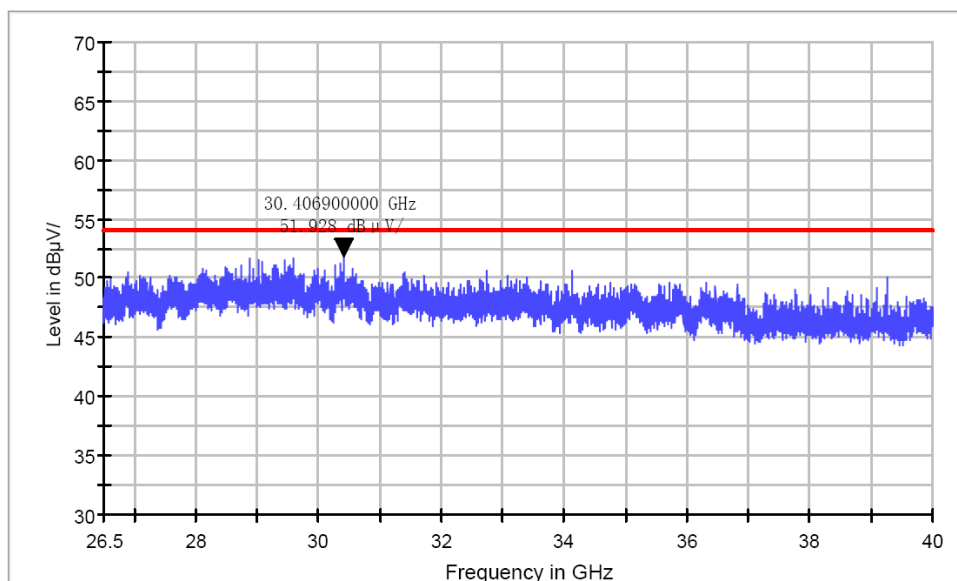


Test mode: 802.11N40,ac TX Frequency: 5190MHz, 5230MHz

The EUT is tested radiation emission at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Horizontal
 Operator Name:
 Comment:

Copy of FCC Electric Field Strength 26.5-40GHz

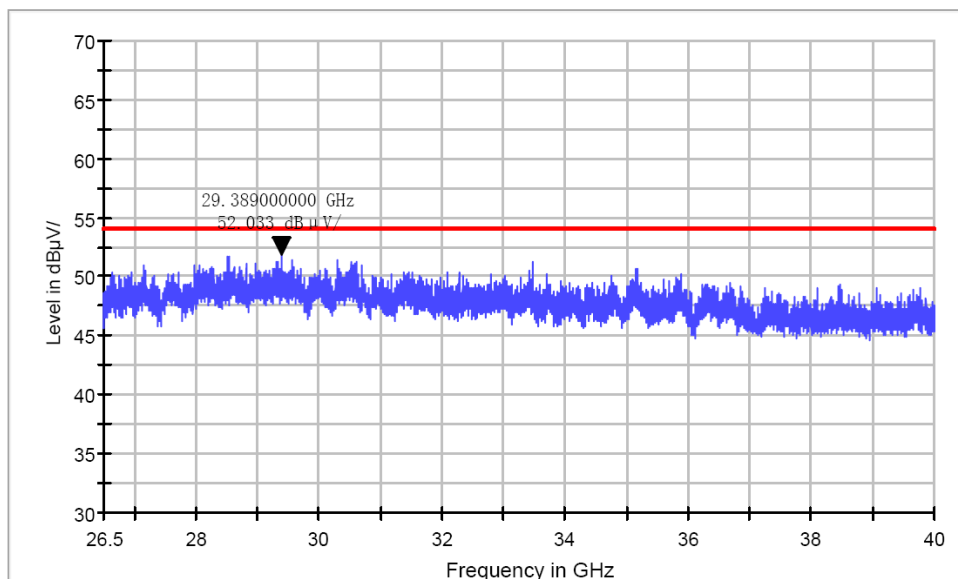

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Vertical
 Operator Name:
 Comment:

Copy of FCC Electric Field Strength 26.5-40GHz

