


Job No.: STAR2017 #986
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 151-AC 40MHz
Model: WPC0GR2231R
Manufacturer: Prima

Polarization: Horizontal
Power Source: DC 12V
Date: 17/10/16/
Time: 19/54/10
Engineer Signature: star
Distance: 3m

Note: Report No.:ATE20171984

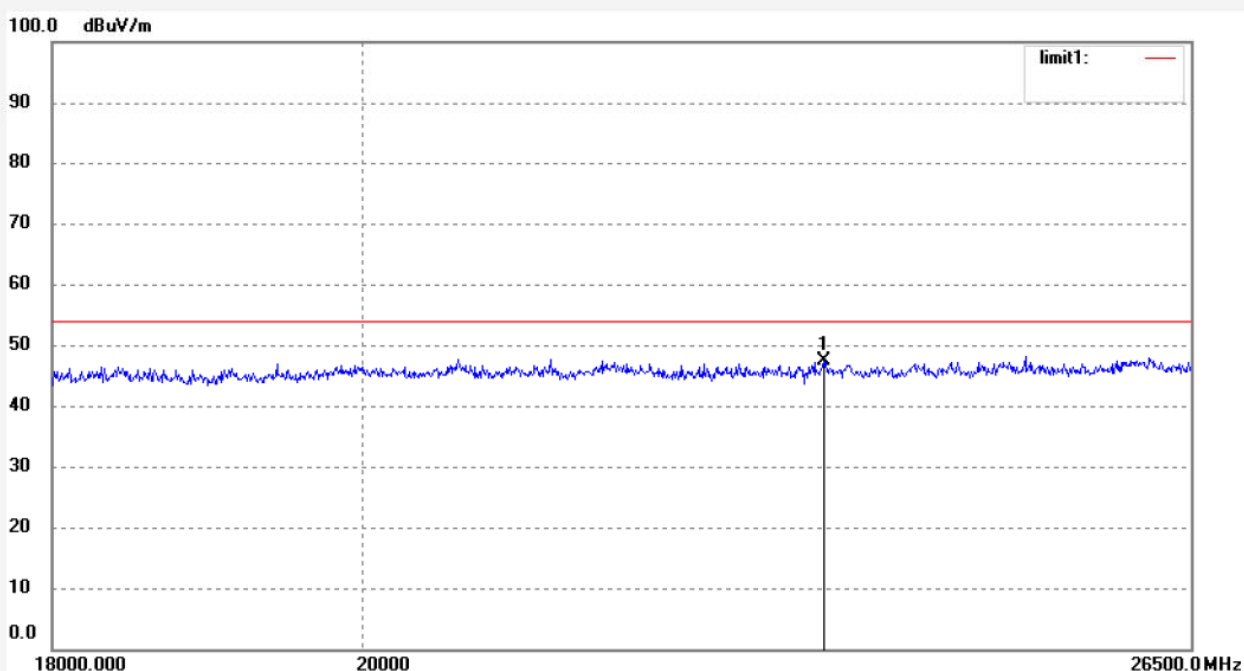

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	23391.068	67.47	-20.01	47.46	74.00	-26.54	peak	200	147	

Job No.: STAR2017 #987

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 151-AC 40MHz

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Vertical

Power Source: DC 12V


Date: 17/10/16/

Time: 19/54/55

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

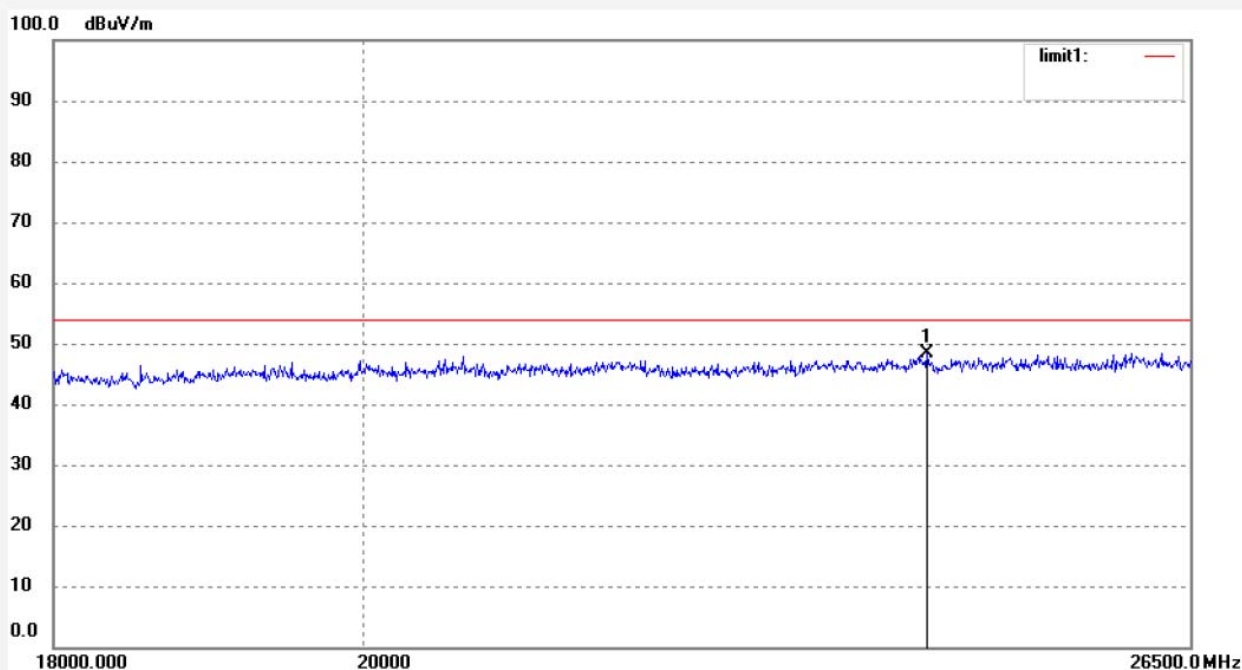


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24230.717	68.16	-19.78	48.38	74.00	-25.62	peak	150	254	

Job No.: STAR2017 #989
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 159-AC 40MHz
Model: WPC0GR2231R
Manufacturer: Prima

Polarization: Horizontal
Power Source: DC 12V
Date: 17/10/16/
Time: 19/56/24
Engineer Signature: star
Distance: 3m

Note: Report No.:ATE20171984

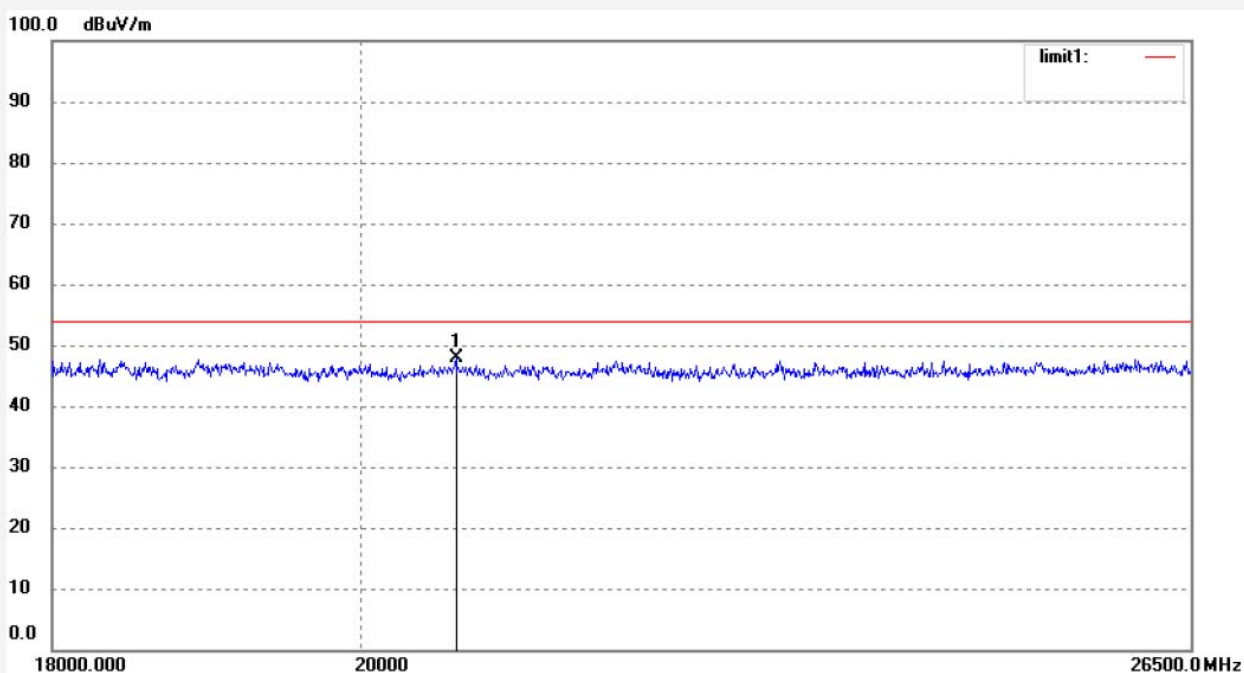


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	20646.871	68.63	-20.73	47.90	74.00	-26.10	peak	200	186	

Job No.: STAR2017 #988
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 159-AC 40MHz
Model: WPC0GR2231R
Manufacturer: Prima

Polarization: Vertical
Power Source: DC 12V
Date: 17/10/16/
Time: 19/55/36
Engineer Signature: star
Distance: 3m

Note: Report No.:ATE20171984

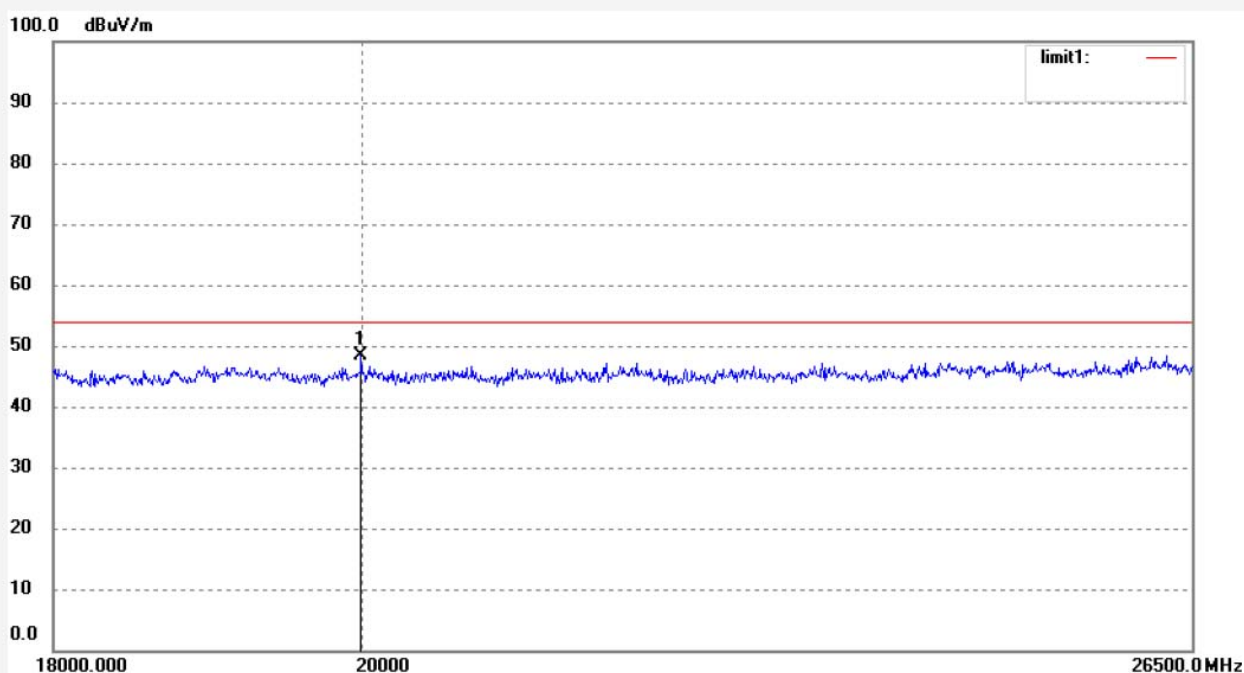

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	19985.554	69.34	-20.90	48.44	74.00	-25.56	peak	150	209	


Test mode: 802.11a,N20,ac TX Frequency: 5180MHz, 5240MHz

The EUT is tested radiation emission at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Horizontal
 Operator Name:
 Comment:


Copy of FCC Electric Field Strength 26.5-40GHz

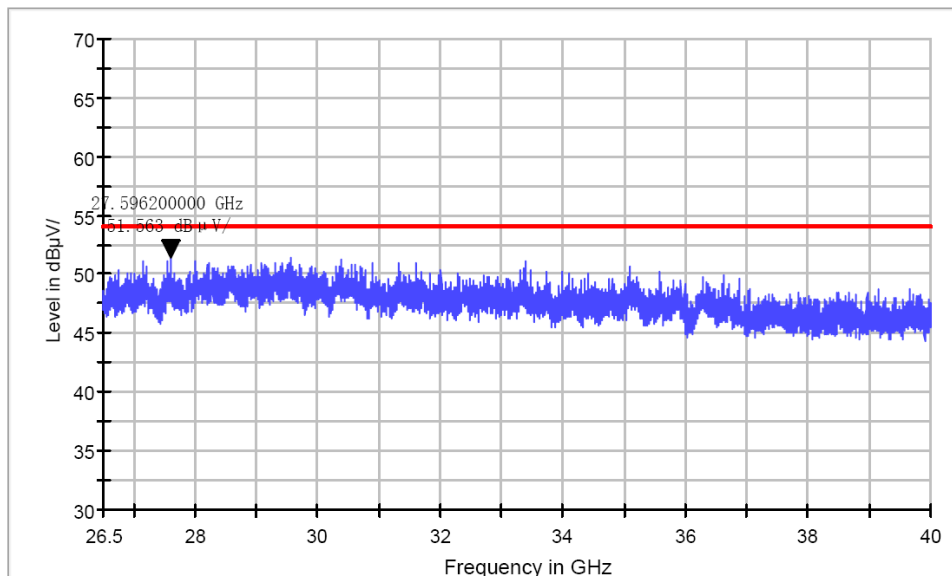

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Vertical
 Operator Name:
 Comment:

Copy of FCC Electric Field Strength 26.5-40GHz

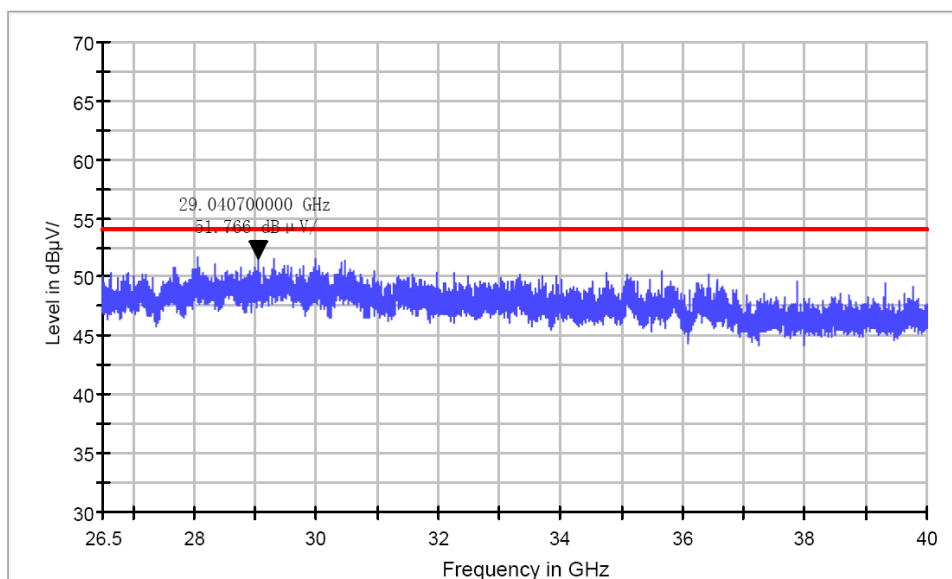


Test mode: 802.11a,N20,ac TX Frequency: 5745MHz, 5825MHz

The EUT is tested radiation emission at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Horizontal
 Operator Name:
 Comment:


Copy of FCC Electric Field Strength 26.5-40GHz

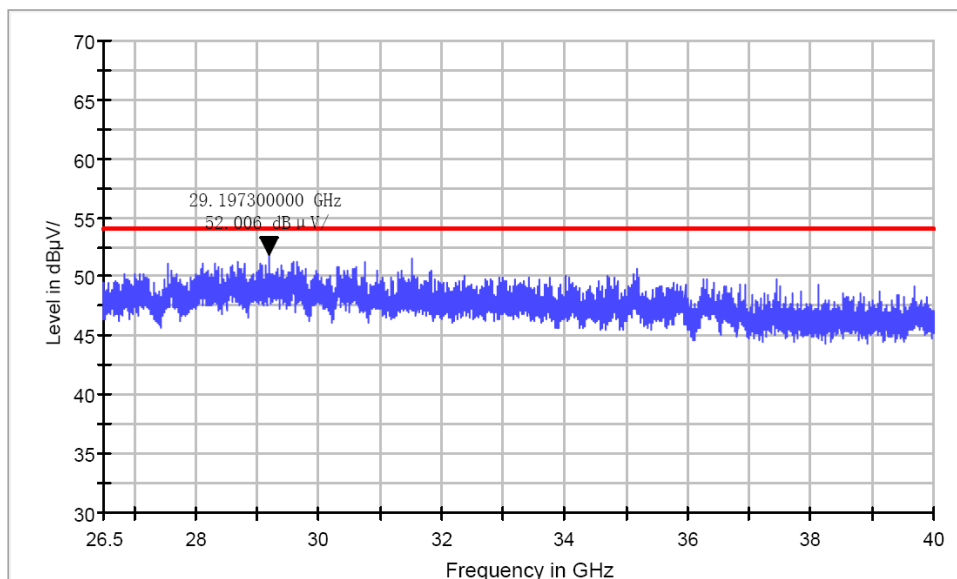

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Vertical
 Operator Name:
 Comment:

Copy of FCC Electric Field Strength 26.5-40GHz

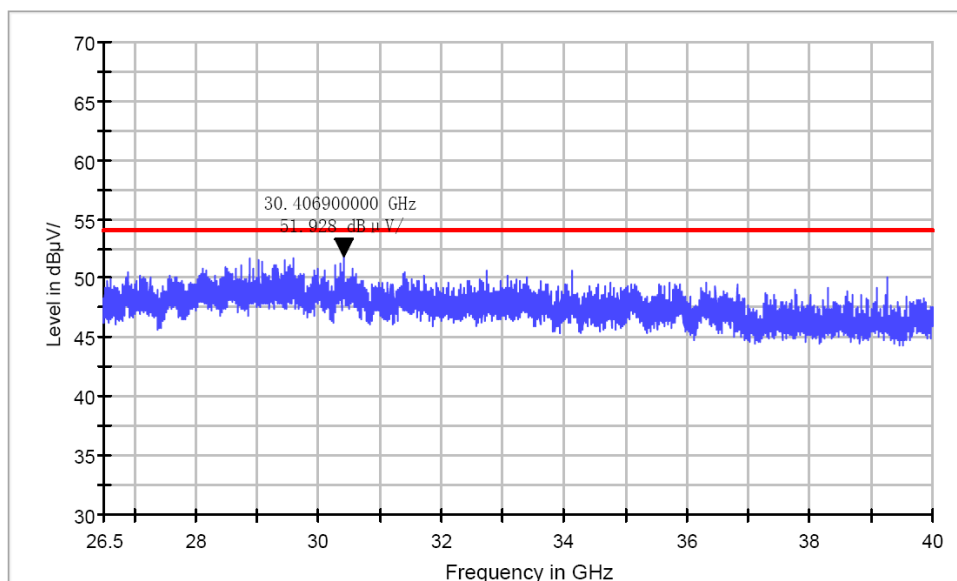


Test mode: 802.11N40,ac **TX Frequency: 5190MHz, 5230MHz**

The EUT is tested radiation emission at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Horizontal
 Operator Name:
 Comment:


Copy of FCC Electric Field Strength 26.5-40GHz

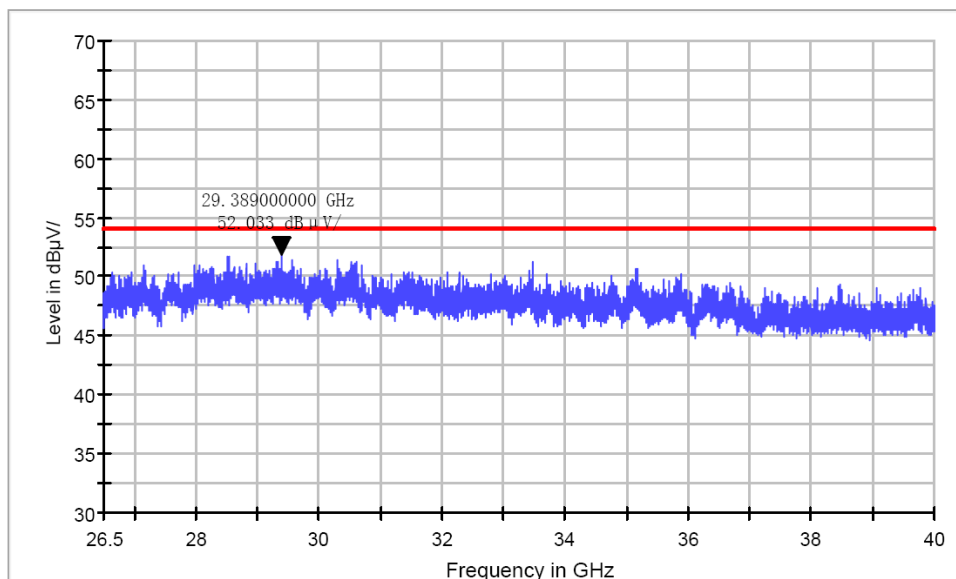

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Vertical
 Operator Name:
 Comment:

Copy of FCC Electric Field Strength 26.5-40GHz

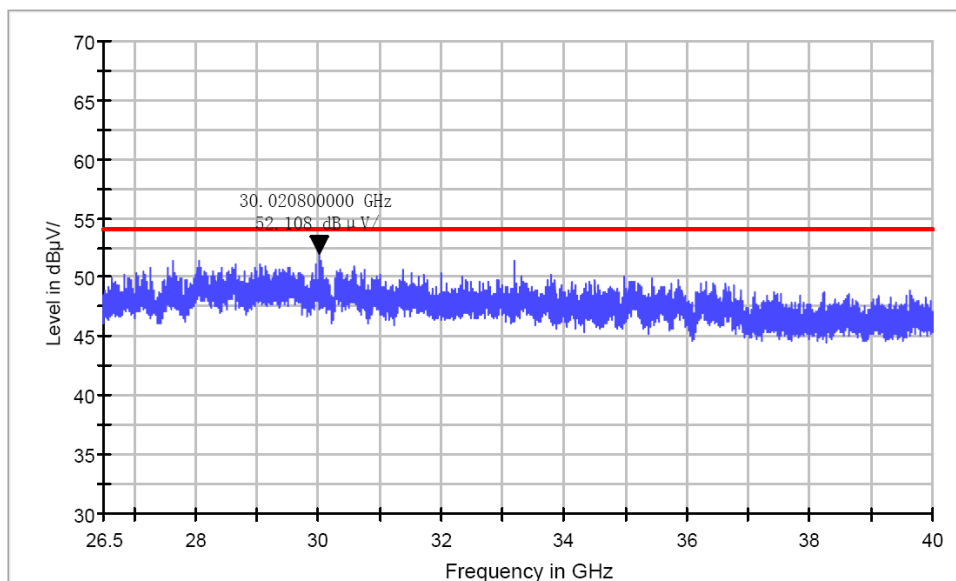


Test mode: 802.11N40,ac **TX Frequency: 5755MHz, 5795MHz**

The EUT is tested radiation emission at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots

Common Information

Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Horizontal
 Operator Name:
 Comment:


Copy of FCC Electric Field Strength 26.5-40GHz

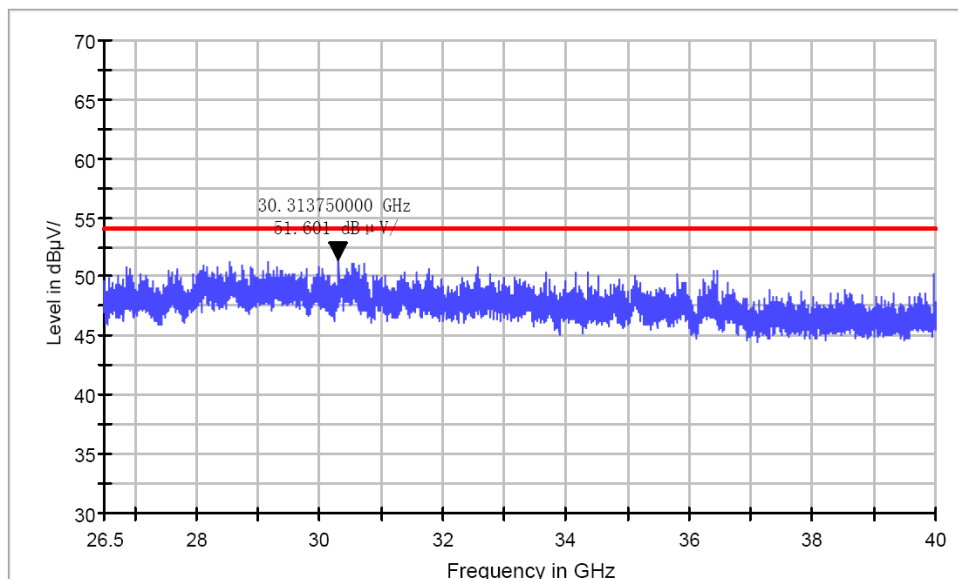

Common Information


Test Site: SMQ EMC Lab.
 Environment Conditions:
 Antenna Polarization: Vertical
 Operator Name:
 Comment:

Copy of FCC Electric Field Strength 26.5-40GHz

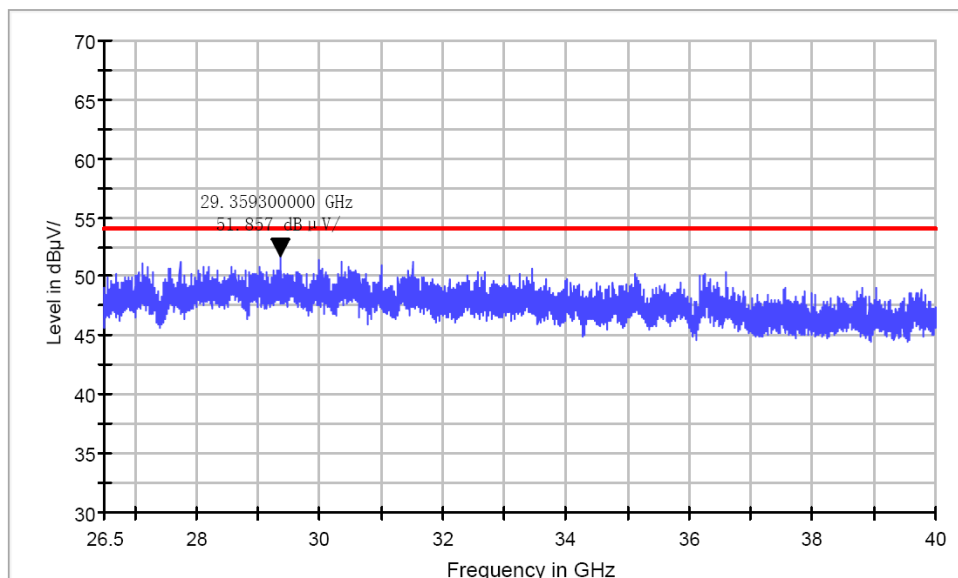

11.BAND EDGE COMPLIANCE TEST

11.1.Block Diagram of Test Setup



11.2.The Requirement For Unwanted Emissions in the Restricted Bands

1. For all measurements, follow the requirements in section II.G.3., “General Requirements for Unwanted Emissions Measurements.
2. At frequencies below 1000 MHz, use the procedure described in section II.G.4., “Procedure for Unwanted Emissions Measurements Below 1000 MHz.”
3. At frequencies above 1000 MHz, measurements performed using the peak and average measurement procedures described in sections II.G.5. and II.G.6, respectively, must satisfy the respective peak and average limits.
If all peak measurements satisfy the average limit, then average measurements are not required.
4. For conducted measurements above 1000 MHz, EIRP shall be computed as specified in section II.G.3.b) and then field strength shall be computed as follows (see KDB Publication 412172):

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77,$$
 where E = field strength and d = distance at which field strength limit is specified in the rules;

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2, \text{ for } d = 3 \text{ meters}.$$

11.3.EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 5150-5250 and 5725-5825MHz .

11.5. Test Procedure

Conducted Band Edge:

11.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

11.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

Radiate Band Edge:

11.5.3. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.

11.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

11.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

11.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:


11.5.7. RBW=1MHz, VBW=1MHz

11.5.8. The band edges was measured and recorded.


11.6. Test Result

PASS


ANT 1(11A)

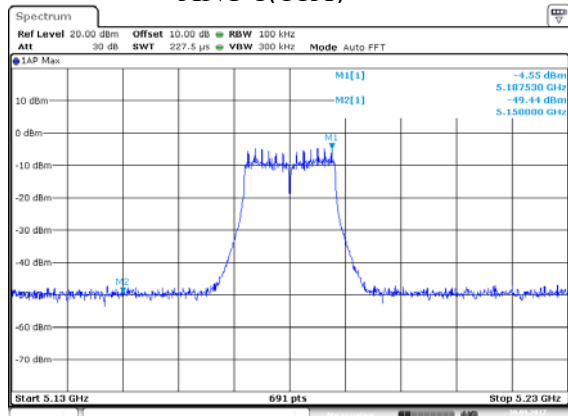


Date: 30.SEP.2017 17:08:02

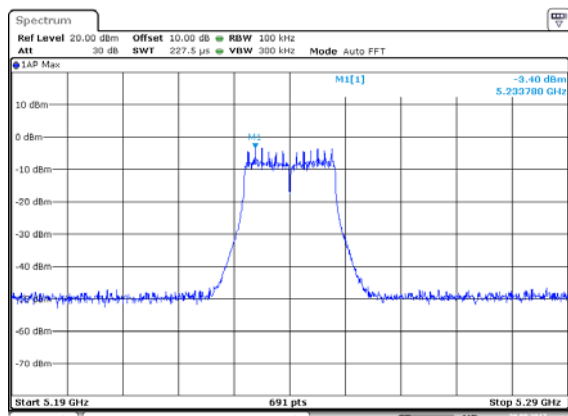

Date: 30.SEP.2017 17:10:25

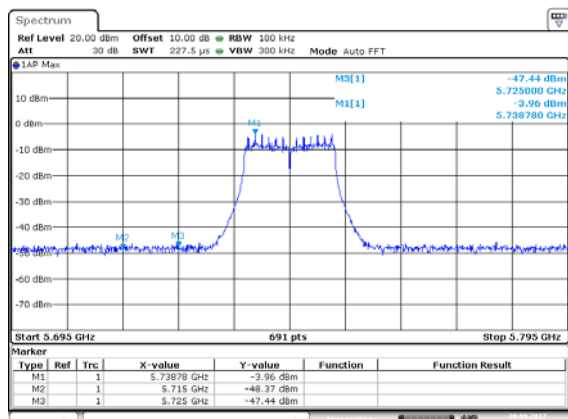


Date: 30.SEP.2017 17:12:50

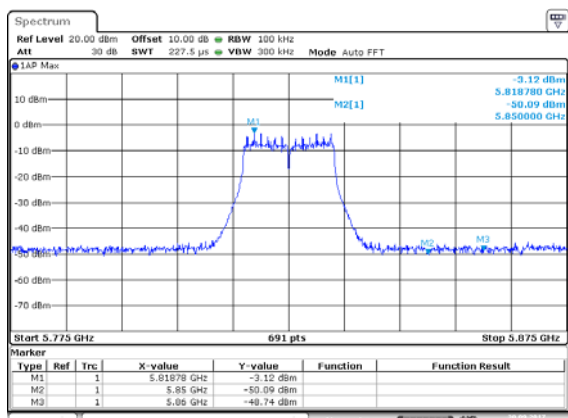


Date: 30.SEP.2017 17:14:55


ANT 2(11A)

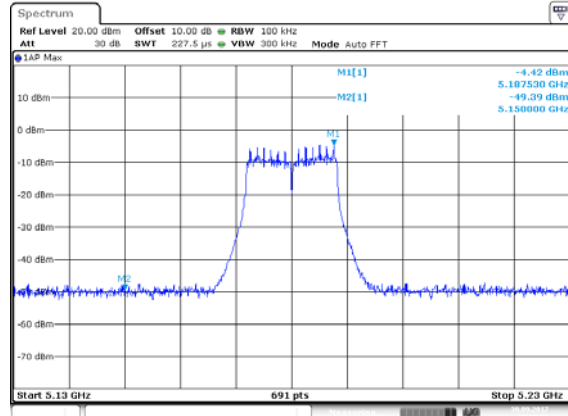


Date: 30.SEP.2017 17:08:57

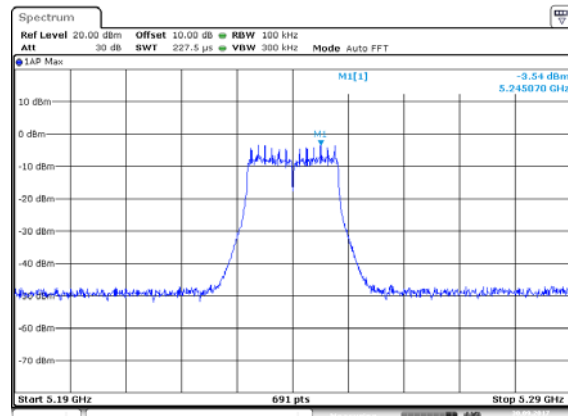

Date: 30.SEP.2017 17:11:00

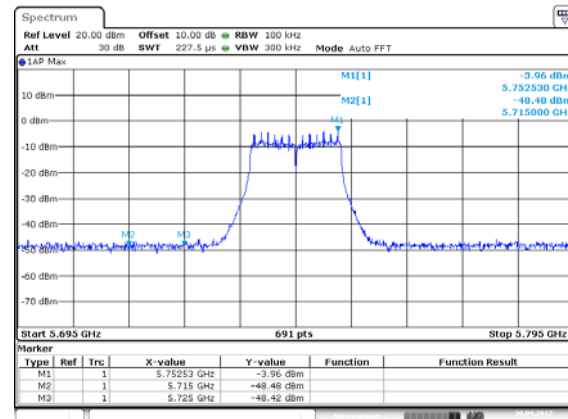


Date: 30.SEP.2017 17:13:26

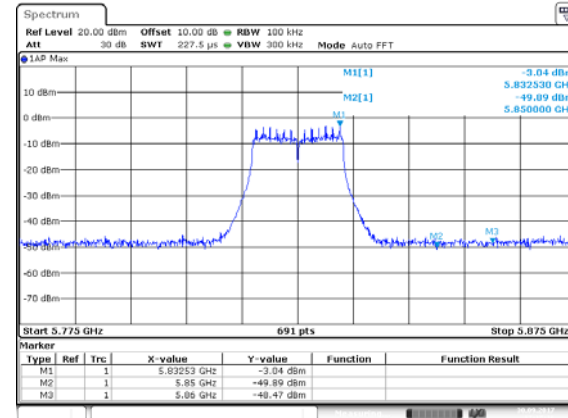


Date: 30.SEP.2017 17:15:17


ANT 1(11N20)

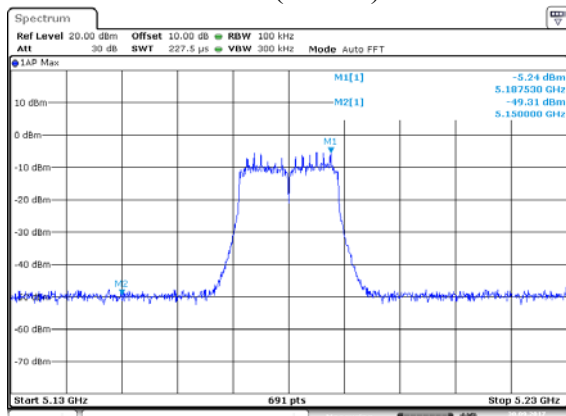


Date: 30.SEP.2017 17:26:08

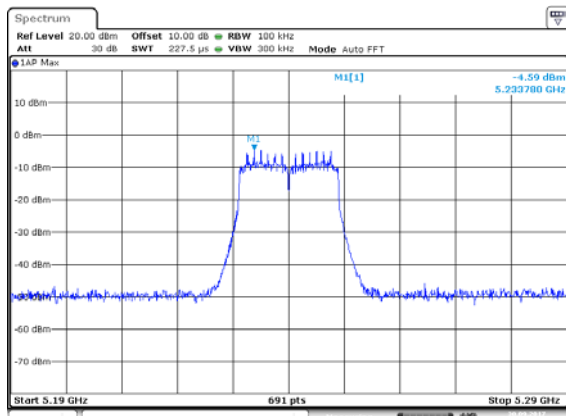

Date: 30.SEP.2017 17:22:25

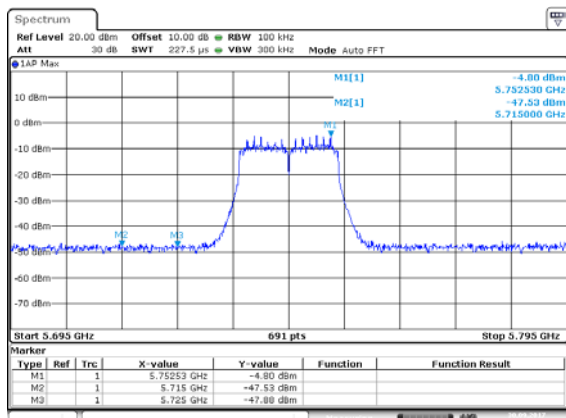


Date: 30.SEP.2017 17:21:02

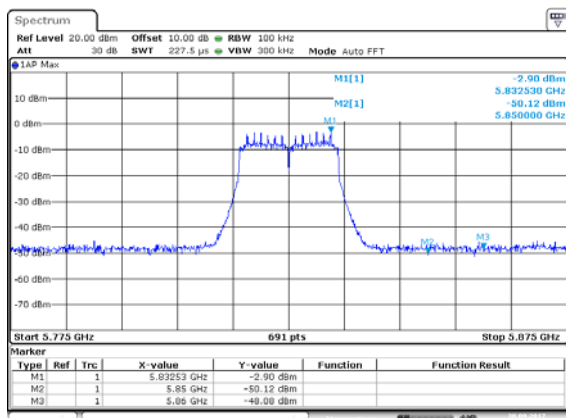


Date: 30.SEP.2017 17:16:34


ANT 2(11N20)

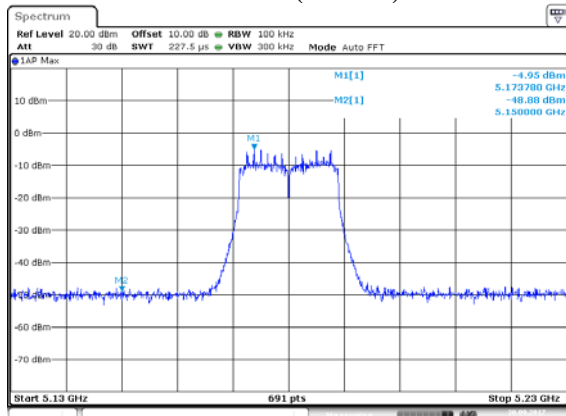


Date: 30.SEP.2017 17:25:47

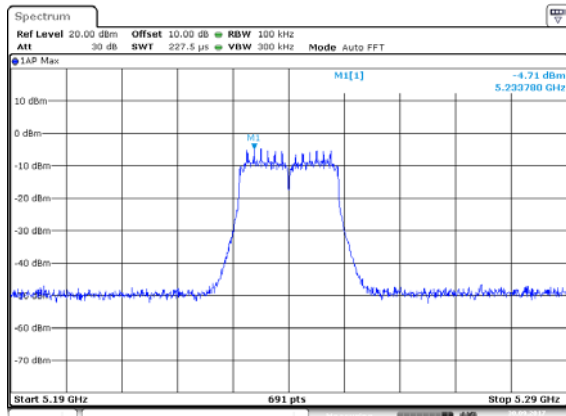

Date: 30.SEP.2017 17:22:49

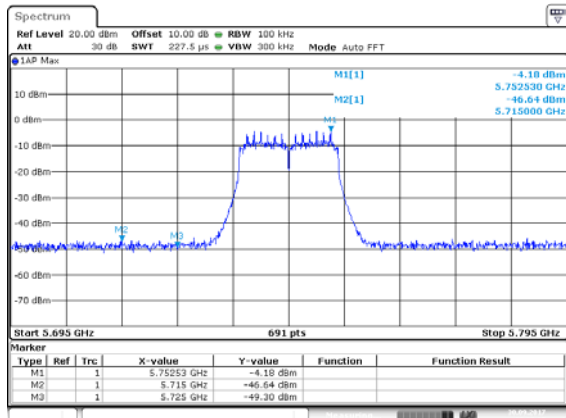


Date: 30.SEP.2017 17:20:25

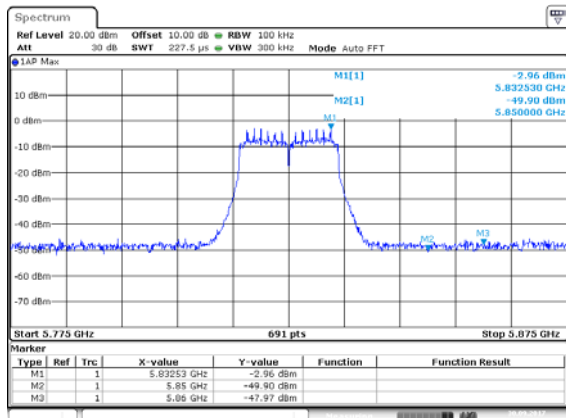


Date: 30.SEP.2017 17:16:12


ANT 1(11AC20)

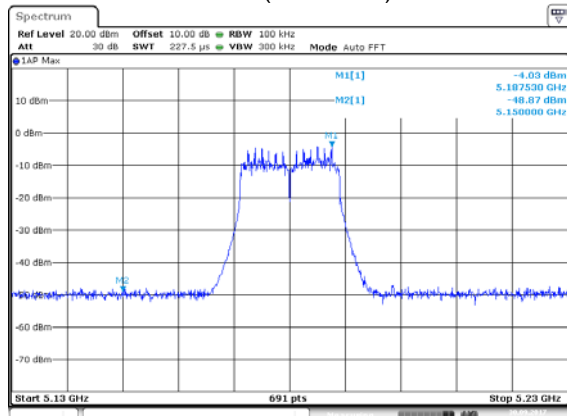


Date: 30.SEP.2017 17:24:59

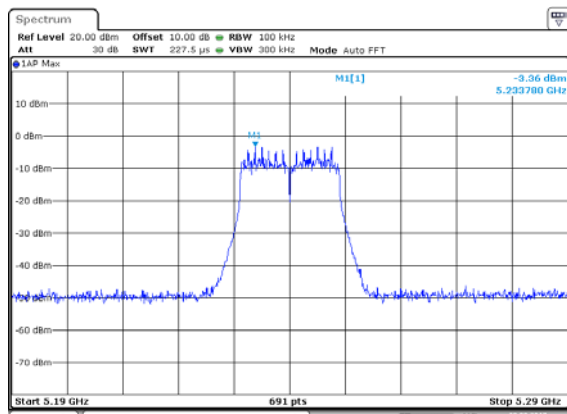

Date: 30.SEP.2017 17:23:31

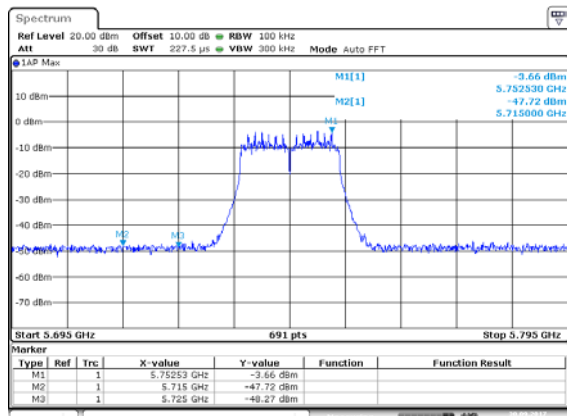


Date: 30.SEP.2017 17:19:28

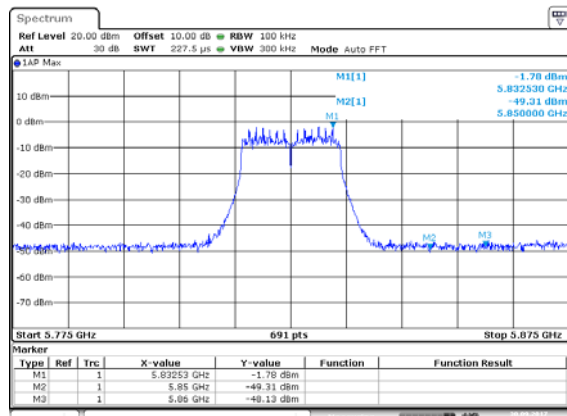


Date: 30.SEP.2017 17:17:19


ANT 2(11AC20)

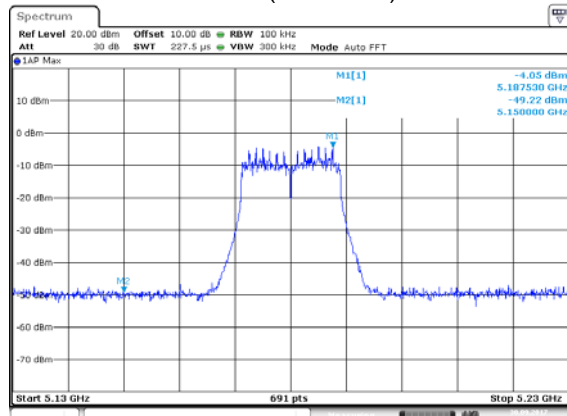


Date: 30.SEP.2017 17:25:29

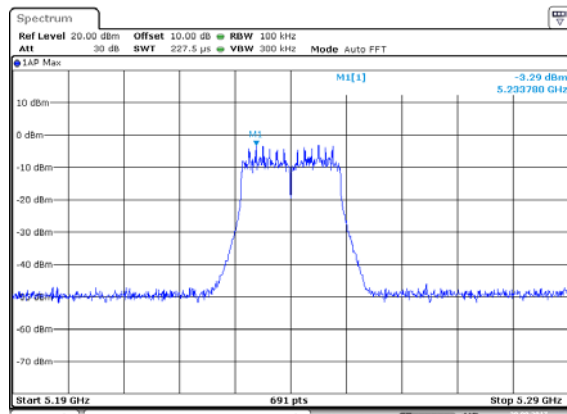

Date: 30.SEP.2017 17:23:54

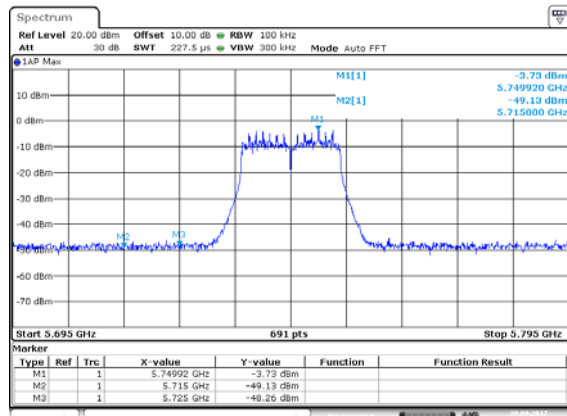


Date: 30.SEP.2017 17:19:53

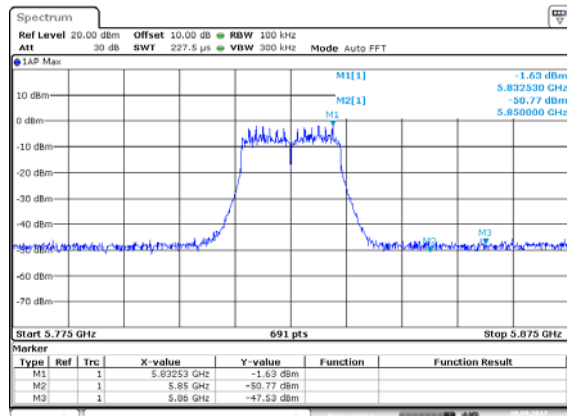


Date: 30.SEP.2017 17:17:58


ANT 1(11N40)

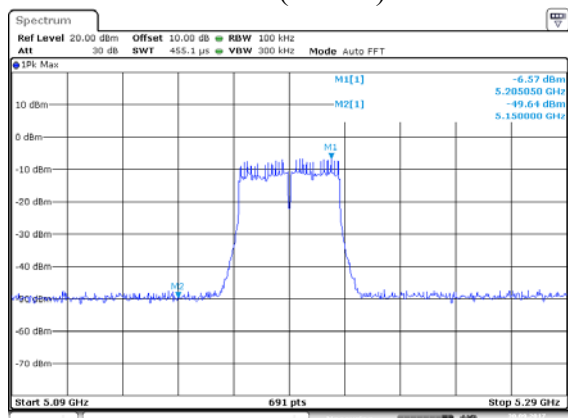


Date: 30.SEP.2017 17:28:39

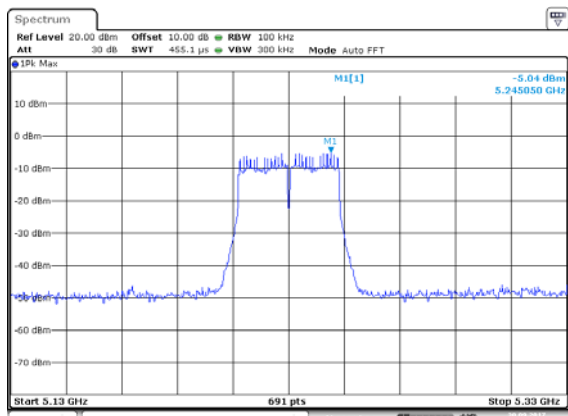

Date: 30.SEP.2017 17:31:59

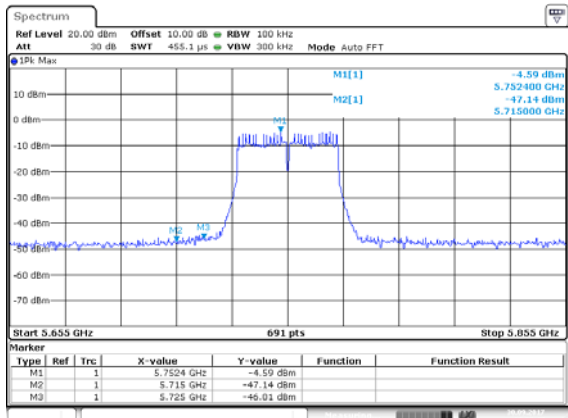


Date: 30.SEP.2017 17:33:47

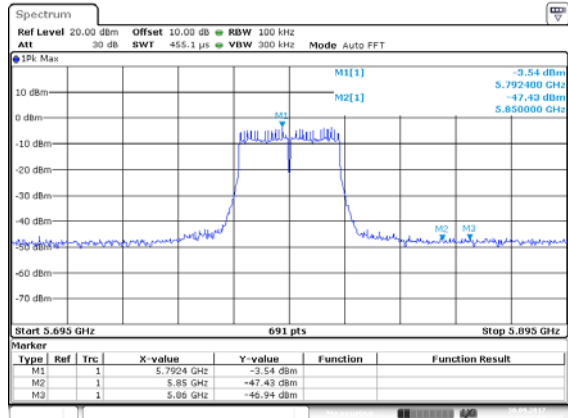


Date: 30.SEP.2017 17:36:52


ANT 2(11N40)

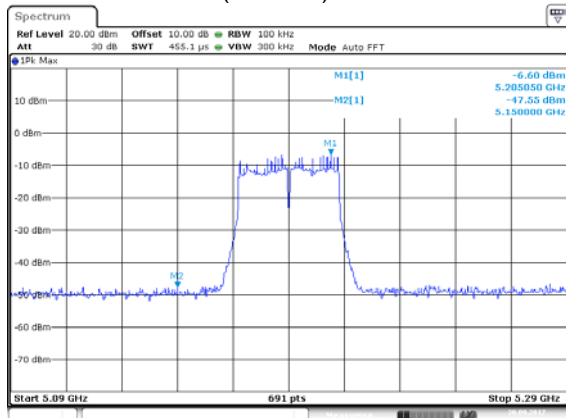


Date: 30.SEP.2017 17:29:20

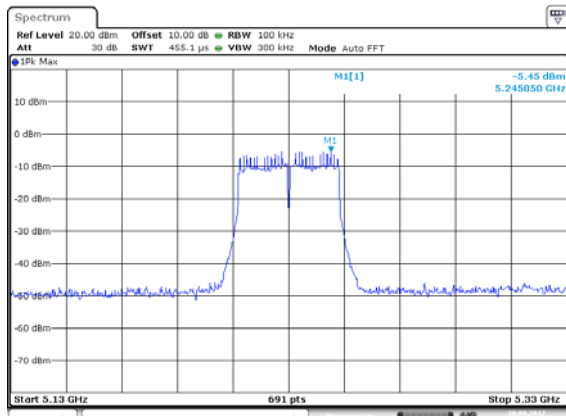

Date: 30.SEP.2017 17:32:23

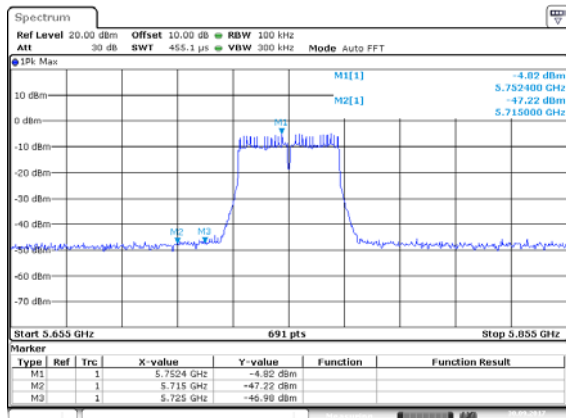


Date: 30.SEP.2017 17:34:09

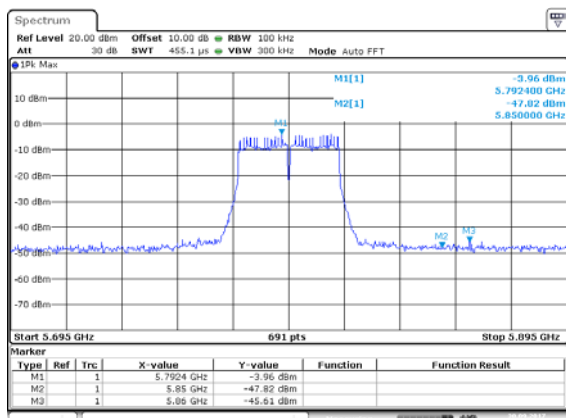


Date: 30.SEP.2017 17:37:20


ANT 1(11AC40)

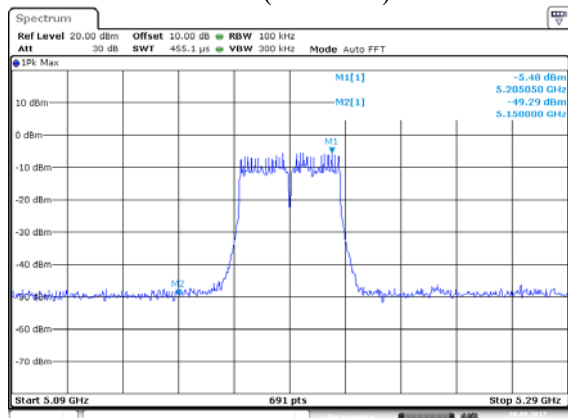


Date: 30.SEP.2017 17:30:18

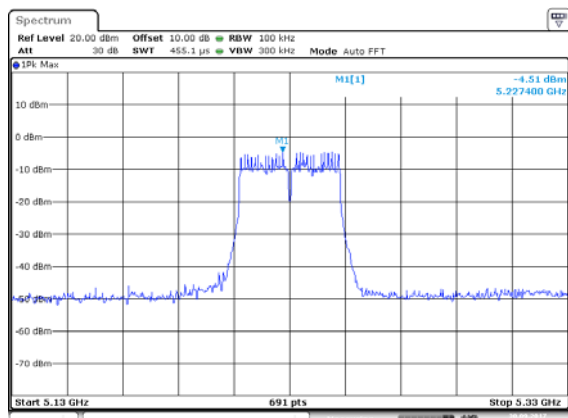

Date: 30.SEP.2017 17:31:17

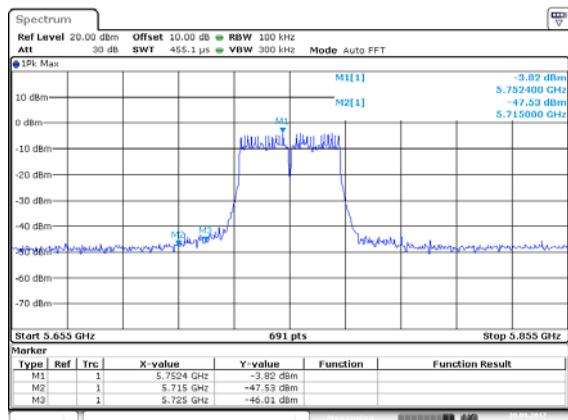


Date: 30.SEP.2017 17:34:38

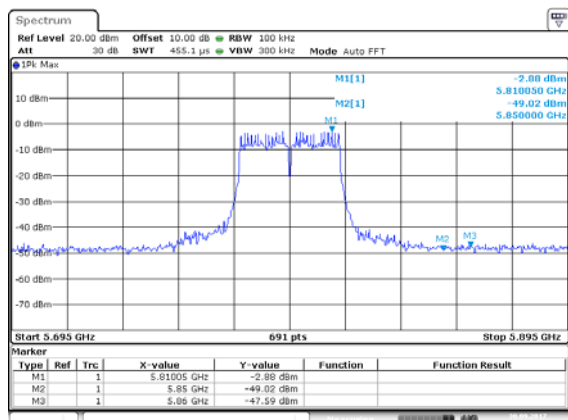


Date: 30.SEP.2017 17:36:23


ANT 2(11AC40)

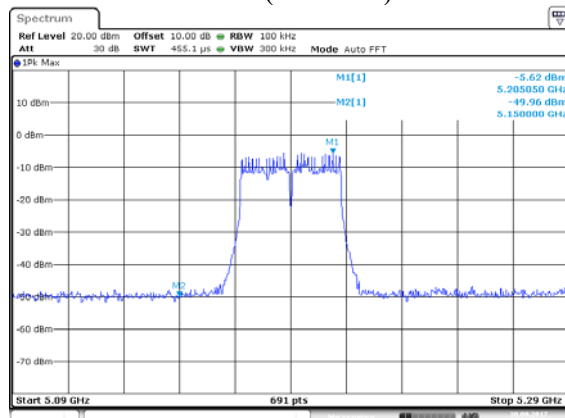


Date: 30.SEP.2017 17:29:57

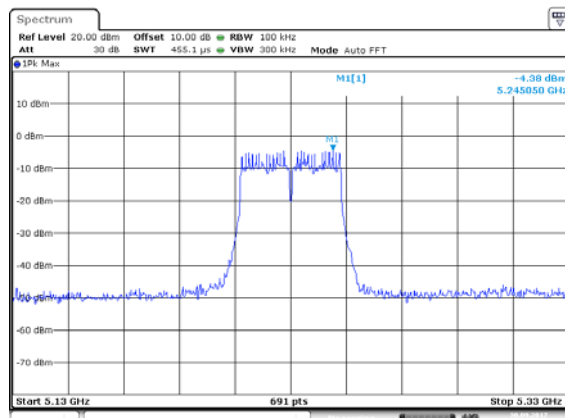

Date: 30.SEP.2017 17:31:31

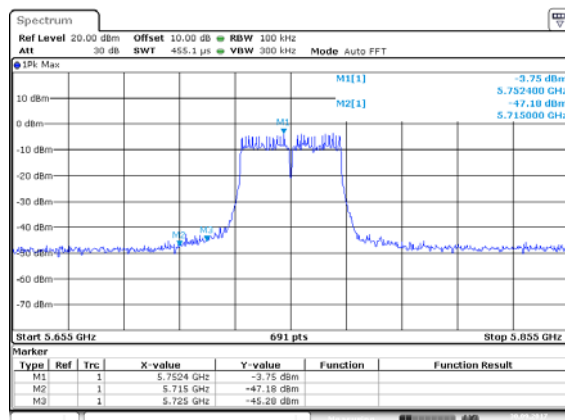

Date: 30.SEP.2017 17:34:57

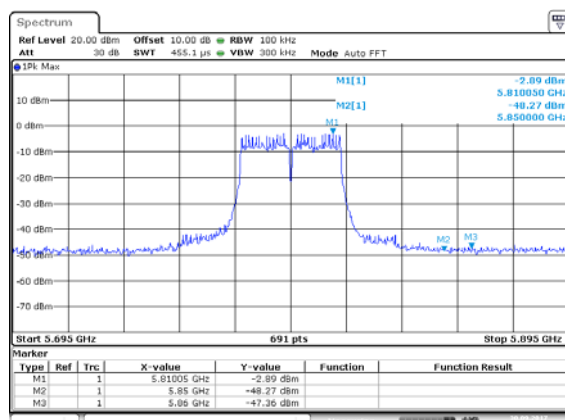

Date: 30.SEP.2017 17:36:06

Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.
4. The EUT is tested radiation emission at each test mode (802.11a/ac/n) in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots.
5. The average measurement was not performed when peak measured data under the limit of average detection.

Test mode: 802.11a TX Frequency: 5180MHz, 5240MHz, 5745MHz, 5825MHz

The EUT is tested Radiated Band Edge at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2017 #990

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 36-A

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Horizontal

Power Source: DC 12V


Date: 17/10/17/

Time: 8/50/23

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

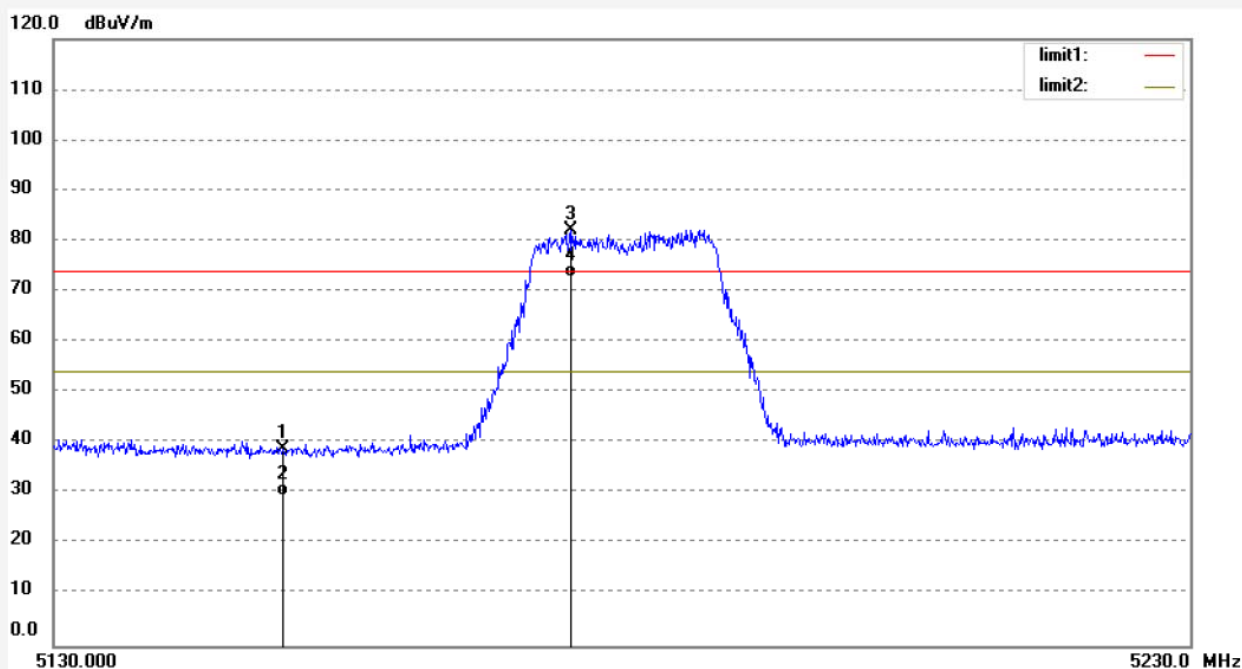

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	36.74	2.04	38.78	74.00	-35.22	peak	200	179	
2	5150.000	27.64	2.04	29.68	54.00	-24.32	AVG	200	168	
3	5175.252	80.08	2.07	82.15			peak	200	162	
4	5175.252	70.69	2.07	72.76			AVG	200	158	

Job No.: star2017 #991

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 36-A

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Vertical

Power Source: DC 12V


Date: 17/10/17/

Time: 8/53/35

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

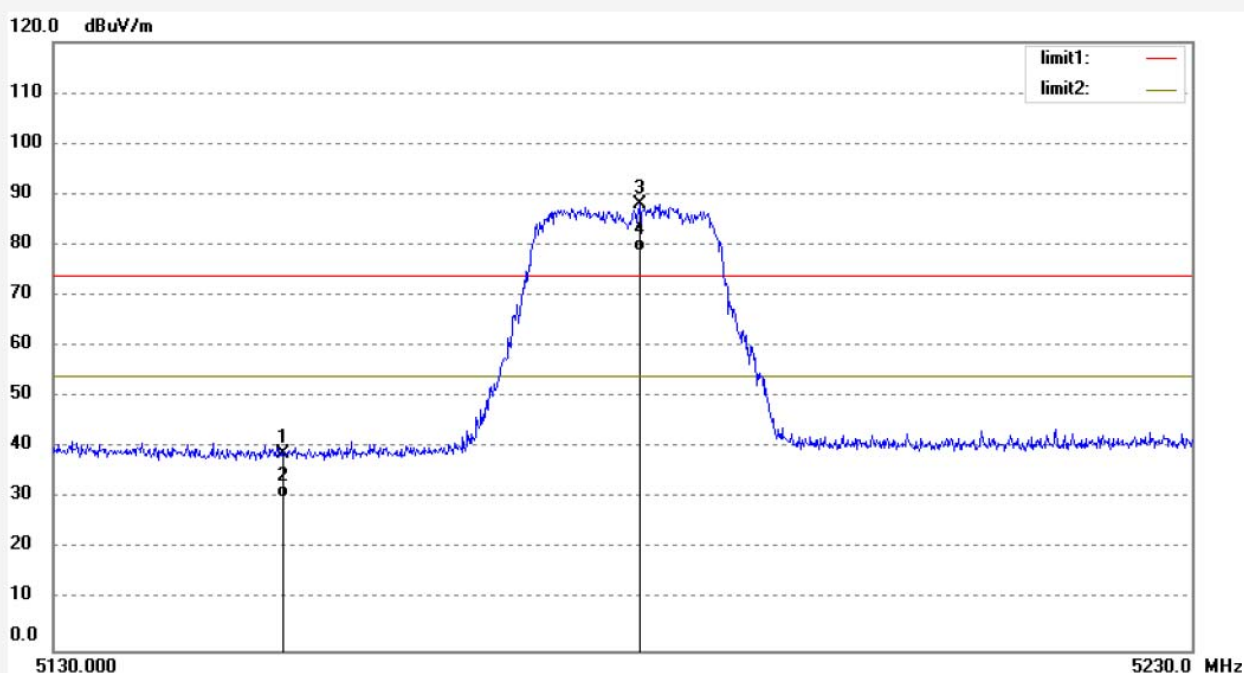

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	36.72	2.04	38.76	74.00	-35.24	peak	150	222	
2	5150.000	28.00	2.04	30.04	54.00	-23.96	AVG	150	241	
3	5181.262	85.94	2.07	88.01			peak	150	287	
4	5181.262	76.59	2.07	78.66			AVG	150	198	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2017 #993
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 48-A
Model: WPC0GR2231R
Manufacturer: Prima

Polarization: Horizontal
Power Source: DC 12V
Date: 17/10/17/
Time: 8/56/54
Engineer Signature: star
Distance: 3m

Note: Report No.:ATE20171984

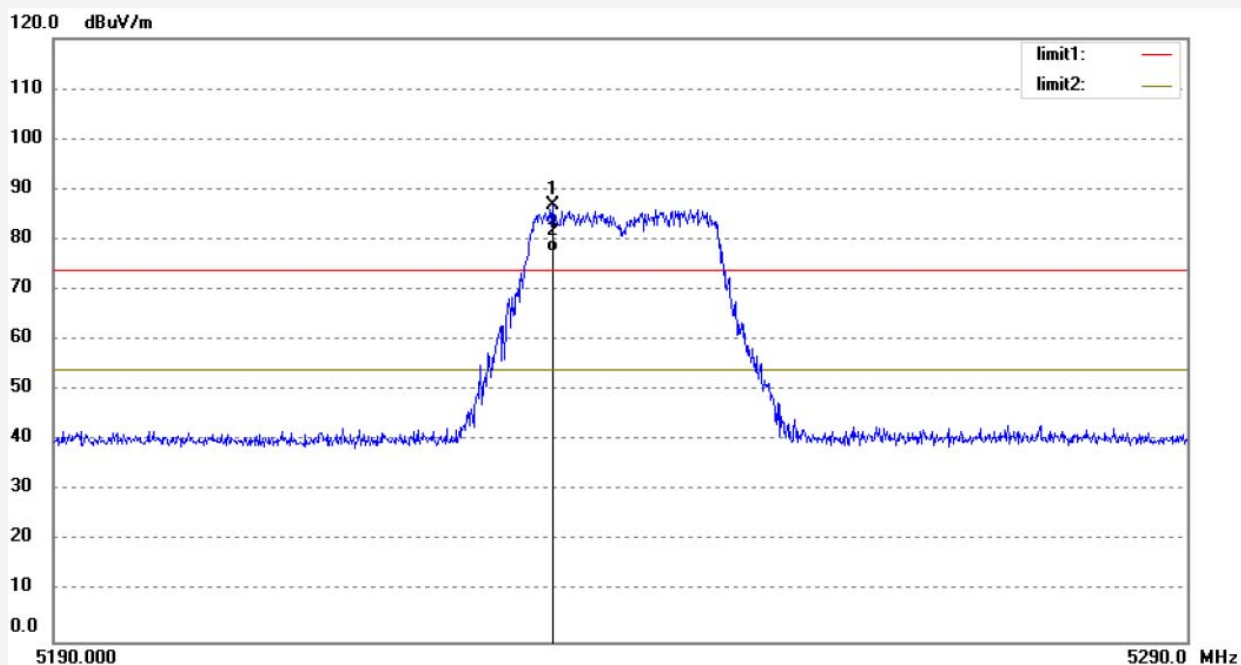

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5233.853	84.64	2.14	86.78			peak	200	171	
2	5233.853	75.56	2.14	77.70			AVG	200	197	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2017 #992

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 48-A

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Vertical

Power Source: DC 12V


Date: 17/10/17/

Time: 8/56/07

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

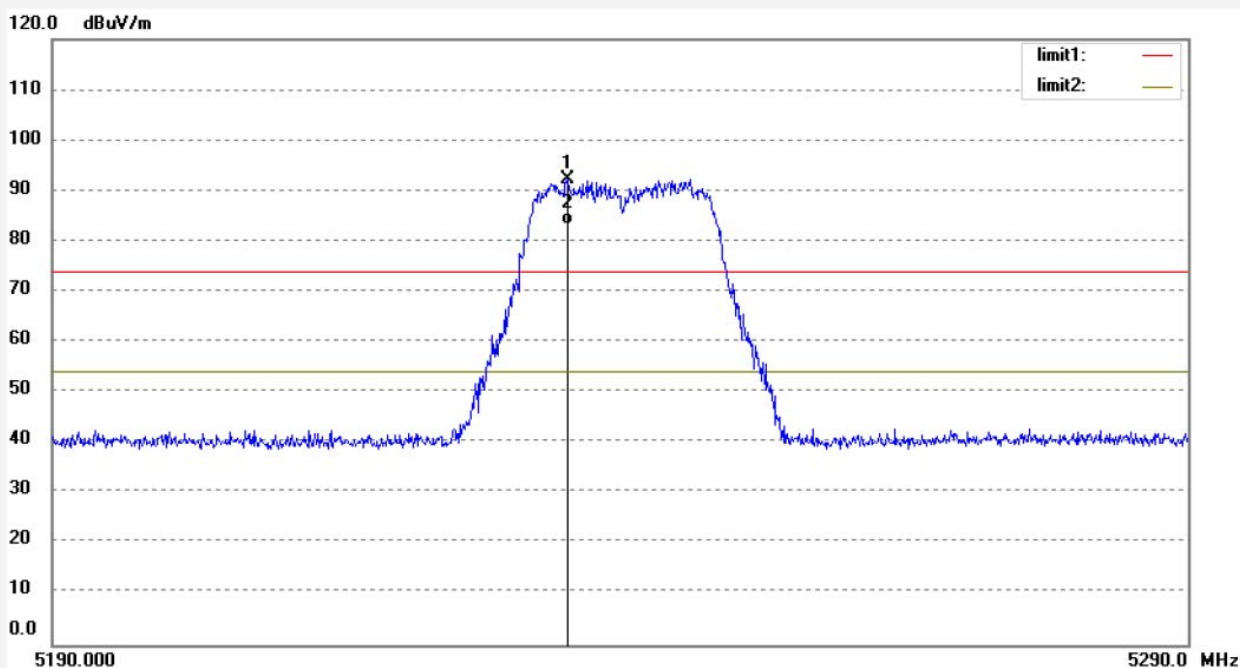

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5235.154	90.20	2.14	92.34			peak	150	74	
2	5235.154	81.17	2.14	83.31			AVG	150	125	

Job No.: star2017 #994

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 149-A

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Horizontal

Power Source: DC 12V


Date: 17/10/17/

Time: 8/58/53

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

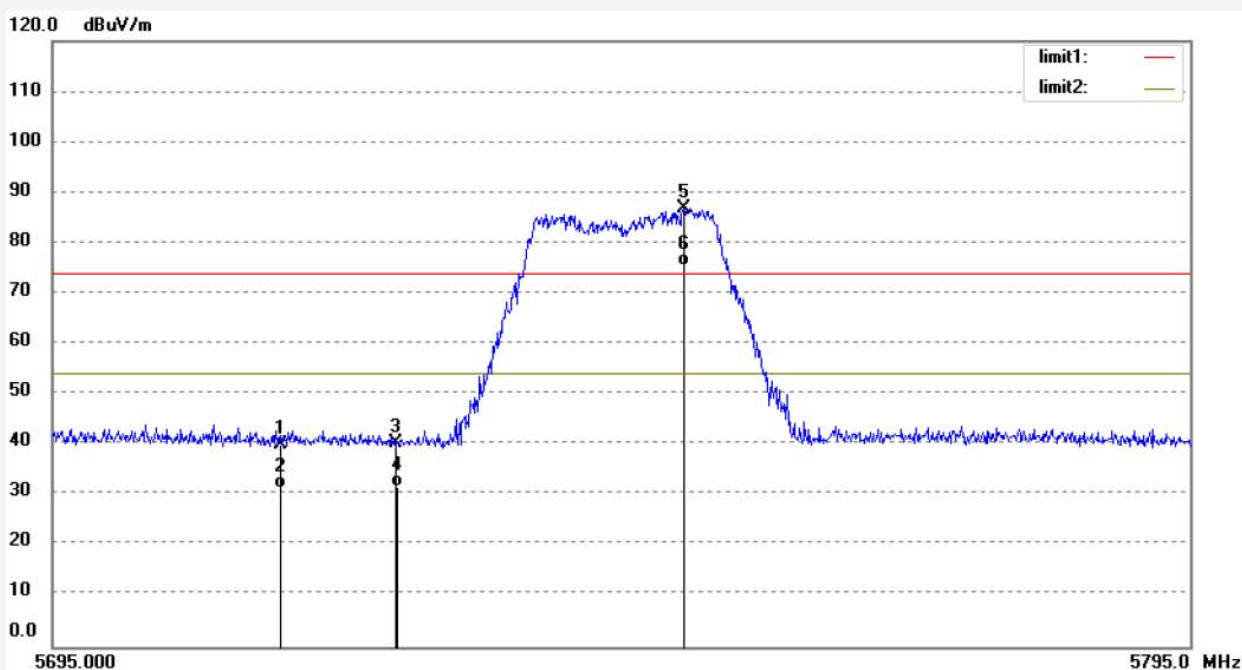

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	37.42	2.74	40.16	74.00	-33.84	peak	200	241	
2	5715.000	28.57	2.74	31.31	54.00	-22.69	AVG	200	234	
3	5725.000	37.71	2.75	40.46	74.00	-33.54	peak	200	198	
4	5725.000	29.05	2.75	31.80	54.00	-22.20	AVG	200	98	
5	5750.296	83.98	2.79	86.77			peak	200	167	
6	5750.296	72.69	2.79	75.48			AVG	200	177	

Job No.: star2017 #995

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 149-A

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Vertical

Power Source: DC 12V


Date: 17/10/17/

Time: 8/59/38

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

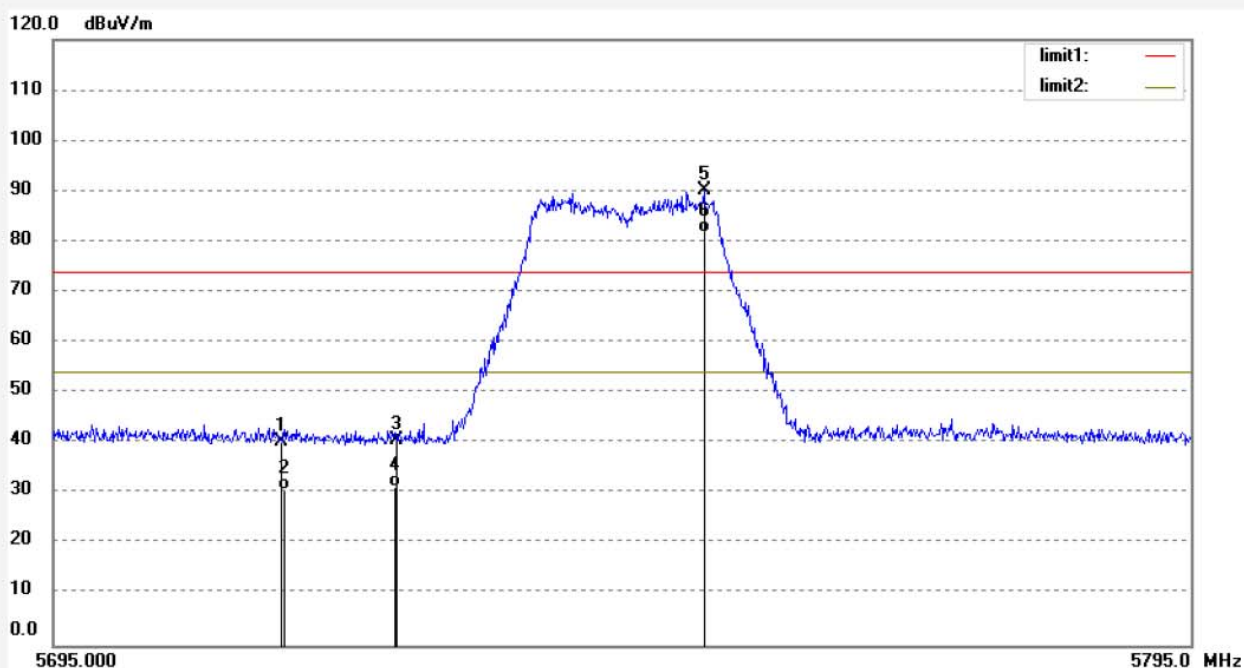

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	37.71	2.74	40.45	74.00	-33.55	peak	150	158	
2	5715.000	28.14	2.74	30.88	54.00	-23.12	AVG	150	167	
3	5725.000	37.90	2.75	40.65	74.00	-33.35	peak	150	180	
4	5725.000	28.63	2.75	31.38	54.00	-22.62	AVG	150	162	
5	5752.001	87.27	2.79	90.06			peak	150	164	
6	5752.001	78.95	2.79	81.74			AVG	150	78	

Job No.: star2017 #997

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 165-A

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Horizontal

Power Source: DC 12V


Date: 17/10/17/

Time: 9/02/50

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

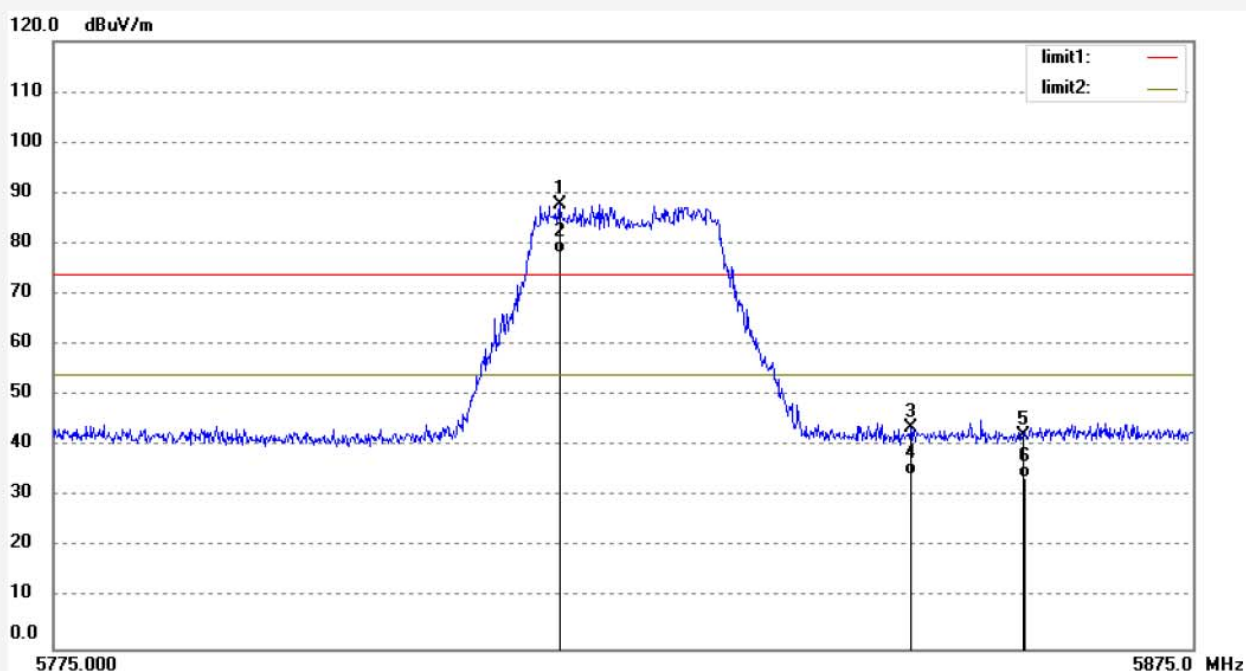

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5819.277	84.99	2.89	87.88			peak	200	49	
2	5819.277	75.36	2.89	78.25			AVG	200	355	
3	5850.000	40.72	2.93	43.65	74.00	-30.35	peak	200	254	
4	5850.000	31.27	2.93	34.20	54.00	-19.80	AVG	200	135	
5	5860.000	39.19	2.95	42.14	74.00	-31.86	peak	200	114	
6	5860.000	30.88	2.95	33.83	54.00	-20.17	AVG	200	68	

Job No.: star2017 #996

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 165-A

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Vertical

Power Source: DC 12V


Date: 17/10/17/

Time: 9/01/50

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

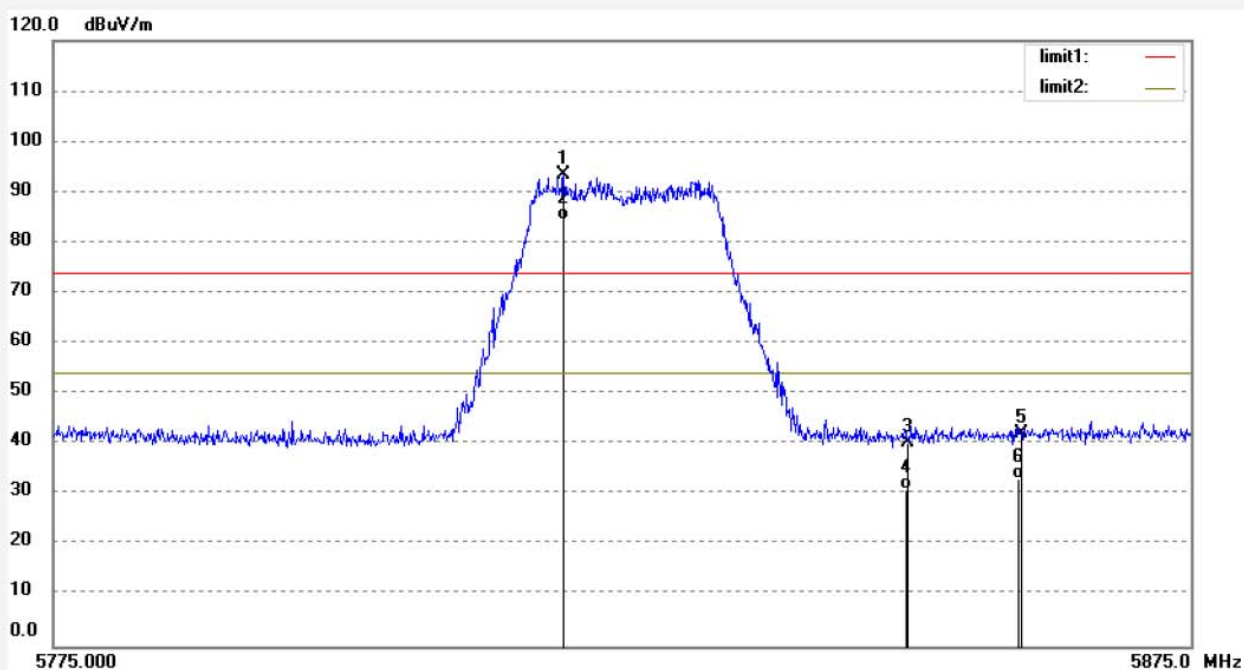

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5819.677	90.56	2.89	93.45			peak	150	97	
2	5819.677	81.65	2.89	84.54			AVG	150	137	
3	5850.000	37.36	2.93	40.29	74.00	-33.71	peak	150	127	
4	5850.000	28.14	2.93	31.07	54.00	-22.93	AVG	150	119	
5	5860.000	39.28	2.95	42.23	74.00	-31.77	peak	150	108	
6	5860.000	30.29	2.95	33.24	54.00	-20.76	AVG	150	97	

Test mode: 802.11n20 TX Frequency: 5180MHz, 5240MHz, 5745MHz, 5825MHz

The EUT is tested Radiated Band Edge at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2017 #998

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 36-N 20MHz

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Horizontal

Power Source: DC 12V


Date: 17/10/17/

Time: 9/05/40

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

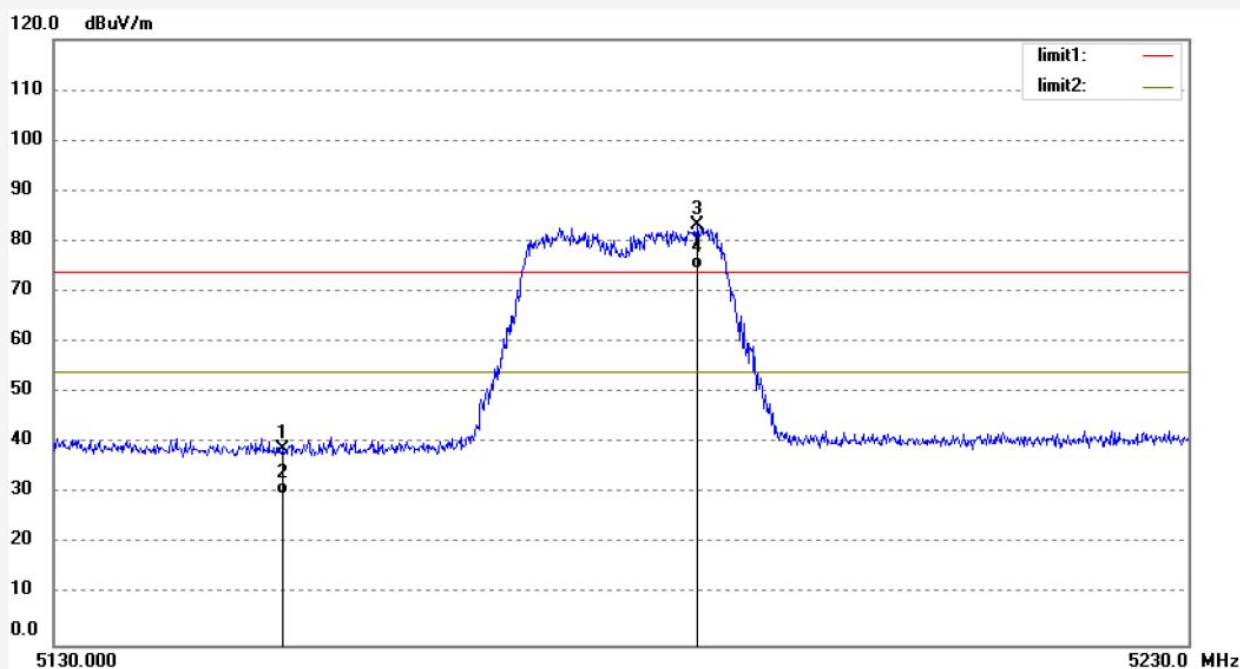

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	36.69	2.04	38.73	74.00	-35.27	peak	200	69	
2	5150.000	27.69	2.04	29.73	54.00	-24.27	AVG	200	256	
3	5186.476	81.24	2.08	83.32			peak	200	47	
4	5186.476	72.36	2.08	74.44			AVG	200	177	

Job No.: star2017 #999

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 36-N 20MHz

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Vertical

Power Source: DC 12V


Date: 17/10/17/

Time: 9/06/28

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

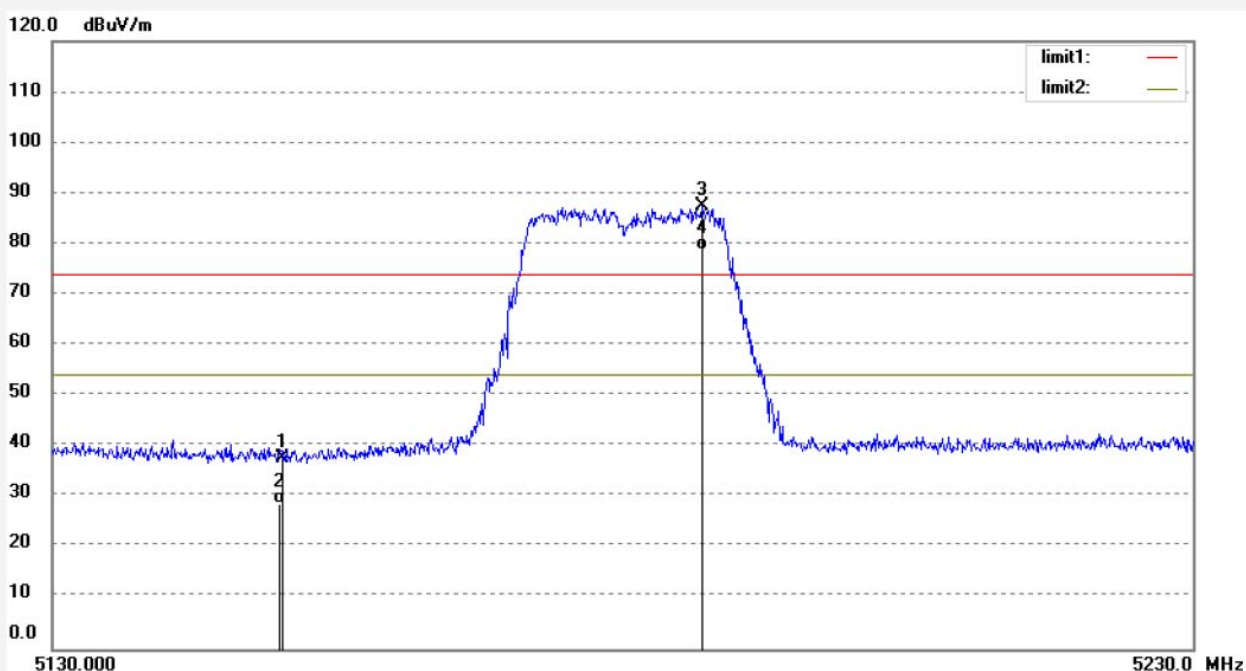

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	35.72	2.04	37.76	74.00	-36.24	peak	150	87	
2	5150.000	26.74	2.04	28.78	54.00	-25.22	AVG	150	141	
3	5186.777	85.25	2.08	87.33			peak	150	166	
4	5186.777	76.53	2.08	78.61			AVG	150	158	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2017 #1001	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 12V
Test item: Radiation Test	Date: 17/10/17/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 9/08/45
EUT: WiFi module	Engineer Signature: star
Mode: TX Channel 48-N 20MHz	Distance: 3m
Model: WPC0GR2231R	
Manufacturer: Prima	

Note: Report No.:ATE20171984

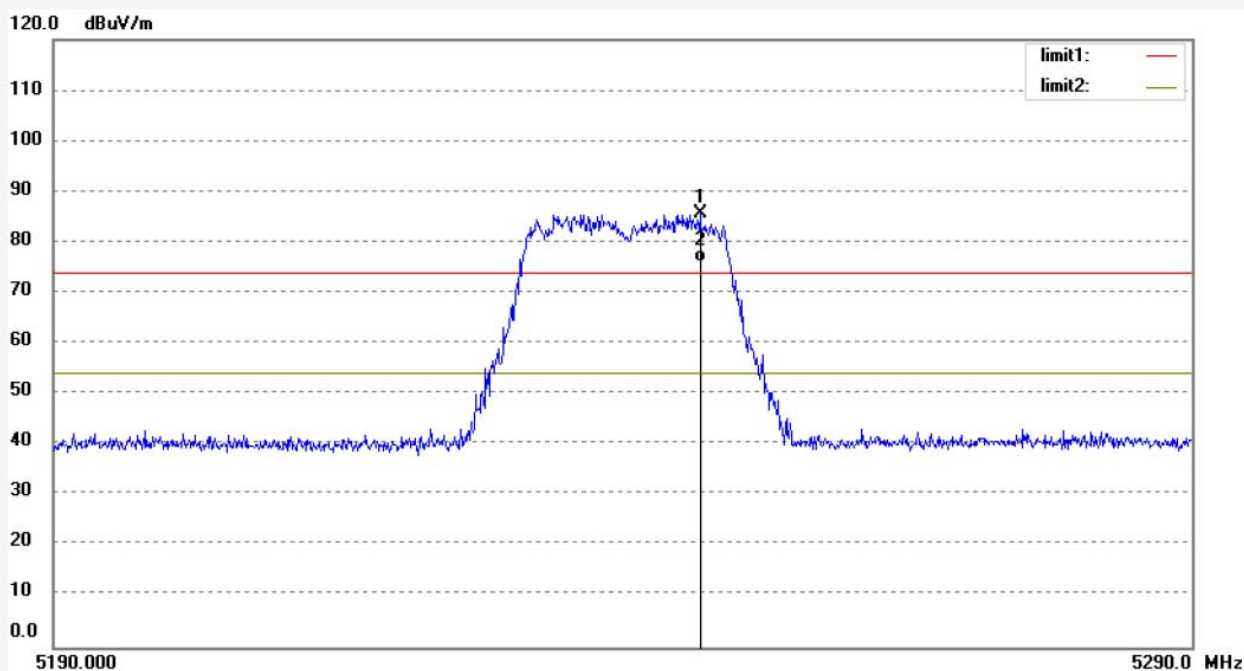


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5246.579	83.59	2.16	85.75			peak	200	46	
2	5246.579	73.90	2.16	76.06			AVG	200	29	

Job No.: star2017 #1000
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: WiFi module
Mode: TX Channel 48-N 20MHz
Model: WPC0GR2231R
Manufacturer: Prima

Polarization: Vertical
Power Source: DC 12V
Date: 17/10/17/
Time: 9/08/03
Engineer Signature: star
Distance: 3m

Note: Report No.:ATE20171984

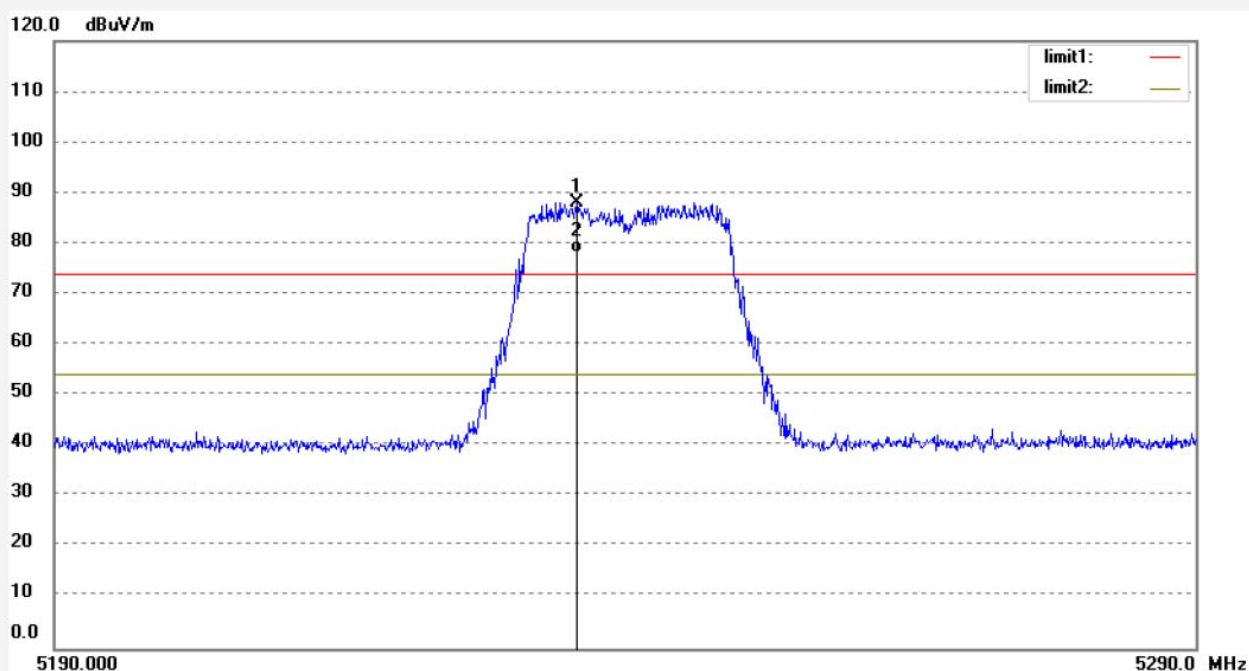

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5235.555	85.87	2.14	88.01			peak	150	132	
2	5235.555	76.11	2.14	78.25			AVG	150	98	

Job No.: star2017 #1002

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 149-N 20MHz

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Horizontal

Power Source: DC 12V


Date: 17/10/17/

Time: 9/09/52

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

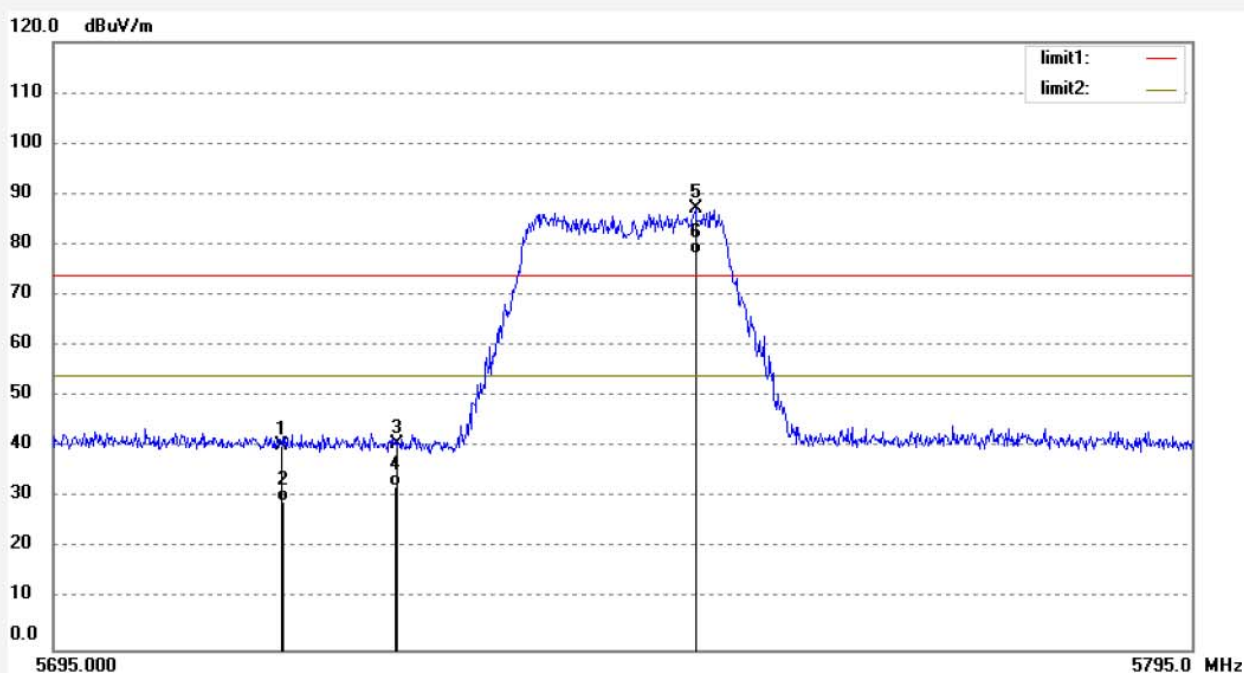

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	37.63	2.74	40.37	74.00	-33.63	peak	200	179	
2	5715.000	26.47	2.74	29.21	54.00	-24.79	AVG	200	266	
3	5725.000	38.01	2.75	40.76	74.00	-33.24	peak	200	264	
4	5725.000	29.53	2.75	32.28	54.00	-21.72	AVG	200	198	
5	5751.199	84.23	2.79	87.02			peak	200	287	
6	5751.199	75.28	2.79	78.07			AVG	200	345	

Job No.: star2017 #1003

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 149-N 20MHz

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Vertical

Power Source: DC 12V


Date: 17/10/17/

Time: 9/10/45

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

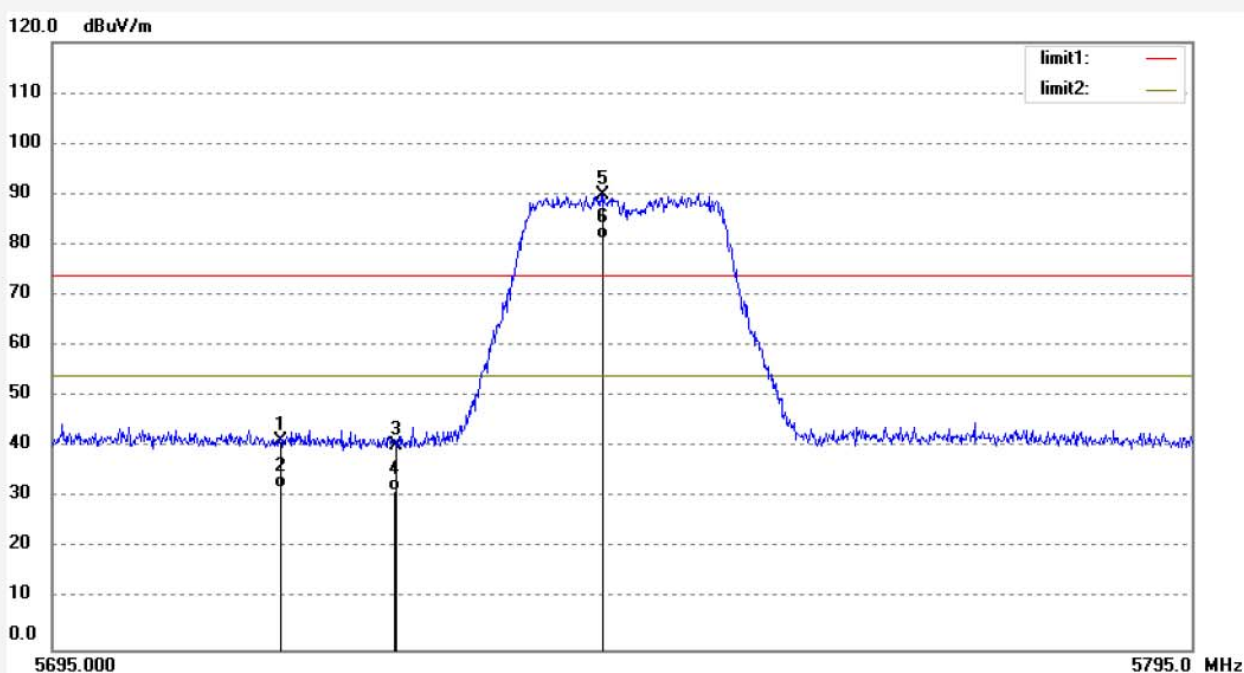

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	38.62	2.74	41.36	74.00	-32.64	peak	150	249	
2	5715.000	29.31	2.74	32.05	54.00	-21.95	AVG	150	162	
3	5725.000	37.63	2.75	40.38	74.00	-33.62	peak	150	177	
4	5725.000	28.56	2.75	31.31	54.00	-22.69	AVG	150	107	
5	5743.180	87.16	2.78	89.94			peak	150	97	
6	5743.180	78.44	2.78	81.22			AVG	150	47	

Job No.: star2017 #1005

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: WiFi module

Mode: TX Channel 165-N 20MHz

Model: WPC0GR2231R

Manufacturer: Prima

Polarization: Horizontal

Power Source: DC 12V


Date: 17/10/17/

Time: 9/14/42

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20171984

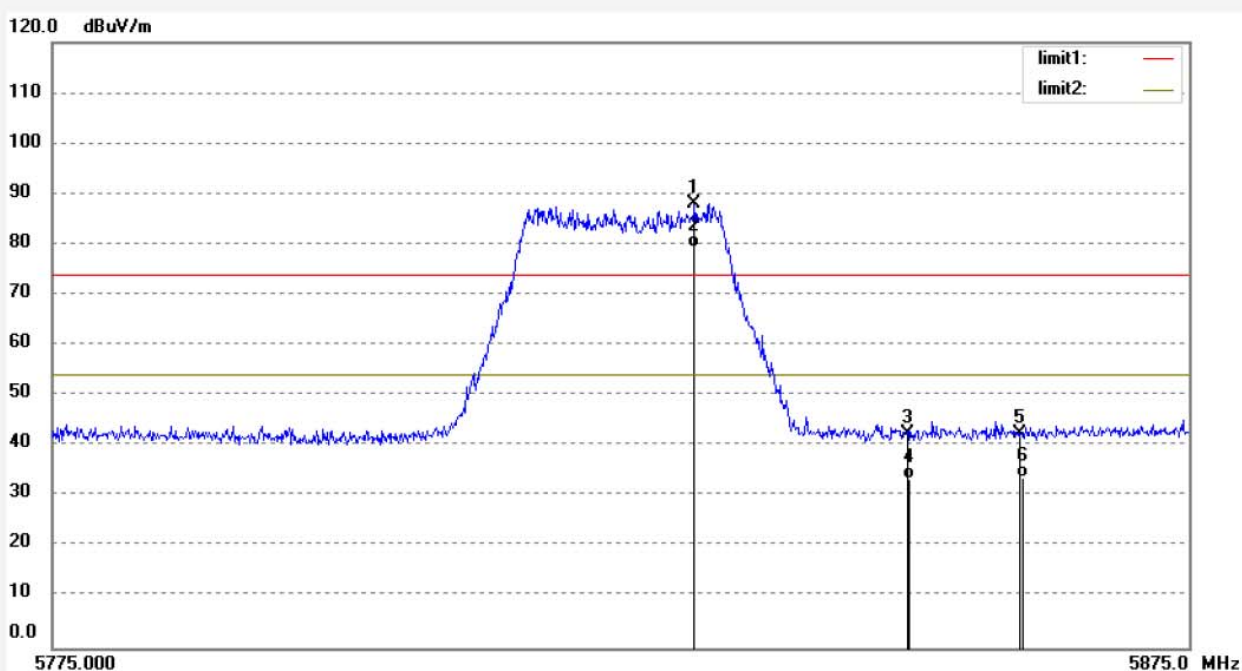

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5831.302	85.28	2.90	88.18			peak	200	187	
2	5831.302	76.58	2.90	79.48			AVG	200	304	
3	5850.000	39.44	2.93	42.37	74.00	-31.63	peak	200	247	
4	5850.000	30.57	2.93	33.50	54.00	-20.50	AVG	200	216	
5	5860.000	39.38	2.95	42.33	74.00	-31.67	peak	200	248	
6	5860.000	30.69	2.95	33.64	54.00	-20.36	AVG	200	117	