



**FCC PART 15.247
TEST REPORT
On Behalf of
Xiamen Prima Technology Inc.**

NO.333,Shangtang North Road,Xiang'an District, Xiamen, Fujian,China

FCC ID: 2ADID-WXT23M2001

Model: WXT23M2001

June 11, 2025

This Report Concerns: ☒ Original Report	Equipment Type: WIFI module
Test Engineer: LBi Li / LBi Li	
Report Number: QCT25ER-0091E-03	
Test Date: May 21 ~ June 4, 2025	
Test Result: Pass	
Reviewed By: Vincent Yang / Vincent Yang	
Approved By: Kendy Wang / Kendy Wang	
Prepared By: Shenzhen QC Testing Laboratory Co., Ltd. East of 1/F., Building E, Xinghong Science Park, No.111, Shuiku Road, Fenghuanggang, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-23008269 Fax: 0755-23726780	





Table of Contents

1. GENERAL INFORMATION	5
1.1 Product Description for Equipment under Test (EUT)	5
1.2 System Test Configuration	6
1.3 Test Facility	7
1.4 Measurement Uncertainty	7
2. SUMMARY OF TEST RESULTS	8
3. LIST OF TEST AND MEASUREMENT INSTRUMENTS	9
3.1 Conducted Emission Test	9
3.2 Radiated Emission Test	9
3.3 RF Conducted test	10
4. ANTENNA REQUIREMENT	11
5. CONDUCTED EMISSIONS	12
5.1 Applicable Standard	12
5.2 Limit	12
5.3 Test setup	12
5.4 EMI Test Receiver Setup	12
5.5 Test procedure	12
5.6 Test Data	12
6. CONDUCTED PEAK OUTPUT POWER	15
6.1 Applicable Standard	15
6.2 Limit	15
6.3 Test setup	15
6.4 Test Procedure	15
6.5 Test Data	16
7. CHANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH	17
7.1 Applicable Standard	17
7.2 Limit	17
7.3 Test setup	17
7.4 Test Procedure	17
7.5 Test Data	18
8. POWER SPECTRAL DENSITY	56
8.1 Applicable Standard	56
8.2 Limit	56
8.3 Test setup	56
8.4 Test Procedure	56
8.5 Test Data	56



9. SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS.....76

9.1	Conducted Emission Method.....	76
9.2	Radiated Emission Method.....	139



Report Number

Description

Issued Date

QCT25ER-0091E-03

Initial Issue

2025-6-11



1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Description	WIFI module
Model No.	WXT23M2001
Tested Model	WXT23M2001
Sample(s) Status	Engineer sample
Operation Frequency:	802.11b/802.11g/802.11n(HT20)/802.11ax(HE20): 2412MHz~2462MHz 802.11n(HT40)/802.11ax(HE40): 2422MHz~2452MHz
Channel numbers:	802.11b/802.11g /802.11n(HT20)/802.11ax(HE20): 11 802.11n(HT40)/802.11ax(HE40):7
Channel separation:	5MHz
Modulation type:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(HT20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing (OFDM) 802.11ax(HE20)/802.11ax(HE40): (OFDMA)
Antenna Type:	PCB Antenna
Antenna gain*1:	Ant 1: 2.78dBi Ant 2: -4.56dBi Note: Ant 1 and Ant 2 support MIMO mode, so directional gain value as below: $\text{Directional Gain}=10*\log[(10^{2.78/20}+10^{-4.56/20})^2/2]=2.87\text{dBi}$
Power supply:	5V DC (Powered by USB Port)
Trade Mark:	Prima
Applicant:	Xiamen Prima Technology Inc.
Address:	NO.333,Shangtang North Road,Xiang' an District, Xiamen, Fujian,China
Manufacturer:	Xiamen Prima Technology Inc.
Address:	NO.333,Shangtang North Road,Xiang' an District, Xiamen, Fujian,China
Sample No.:	Y25E0091E01WC

Note: *1This information provided by Manufacturer, SZ QC Lab is not responsible for the accuracy of this information.

1.2 System Test Configuration

1.2.1 Channel List

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20) /802.11ax(HE20)	802.11n(HT40) /802.11ax(HE40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

1.2.2 EUT Exercise Software

The device was tested with the worst case was performed as below:

Test Mode	Data Rate	Ant1 Power Level	Ant2 Power Level
802.11b	1Mbps	13	13
802.11g	6Mbps	8	8
802.11n(HT20)-MIMO	MCS0	5	5
802.11n(HT40)-MIMO	MCS0	3	3
802.11ax(HE20)-MIMO	MCS0	5	5
802.11ax(HE40)-MIMO	MCS0	3	3

" QATool_Dbg " exercise software was made to the EUT tested, The software and power level was provided by the applicant.

1.2.3 Support Equipment

Manufacturer	Description	Model	Serial Number
Dell	Notebook PC	Inspiron 15 3511	13764488907
Dell	Notebook PC 65W-AC ADAPTER	HA65NS5-00	A065R073L
Un-Known	USB Cable	Un-Known	Un-Known



1.2.4 Test mode and test voltage

1. Transmitting mode: Keep the EUT in continuously transmitting.
2. 802.11ax mode only support Full RU.
3. Test voltage: 5V DC (Powered by USB Port)

1.3 Test Facility

Test Firm : Shenzhen QC Testing Laboratory Co., Ltd.

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements.

This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS – Registration No.: L8464

The EMC Laboratory has been accredited by CNAS, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

A2LA Certificate Number: 6759.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 561109

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 29628

CAB identifier: CN0141

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

1.4 Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 1.42 \times 10^{-4}\%$
RF output power, conducted	$\pm 1.06\text{dB}$
Power Spectral Density, conducted	$\pm 1.06\text{dB}$
Unwanted Emissions, conducted	$\pm 2.51\text{dB}$
AC Power Line Conducted Emission	$\pm 1.80\text{dB}$
Radiated Spurious Emission test (9kHz-30MHz)	$\pm 2.66\text{dB}$
Radiated Spurious Emission test (30MHz-1000MHz)	$\pm 4.04\text{dB}$
Radiated Spurious Emission test (1000MHz-18000MHz)	$\pm 4.70\text{ dB}$
Radiated Spurious Emission test (18GHz-40GHz)	$\pm 4.80\text{dB}$
Temperature	$\pm 0.8^{\circ}\text{C}$
Humidity	$\pm 3.2\%$
DC and low frequency voltages	$\pm 0.1\%$
Time	$\pm 5\%$
Duty cycle	$\pm 5\%$

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



2. Summary of Test Results

Test Item	Section	Result
Antenna Requirement	FCC part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	FCC part 15.207	Pass
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass
Channel Bandwidth & 99% Occupied Bandwidth	FCC part 15.247 (a)(2)	Pass
Power Spectral Density	FCC part 15.247 (e)	Pass
Conducted Unwanted Emissions & Band Edge	FCC part 15.247(d)	Pass
Spurious Emissions	FCC part 15.205/15.209	Pass

- Note:
1. In the configuration tested, the EUT complied with the standards specified above.
 2. Test according to ANSI C63.10:2013
 3. All indications of Pass/Fail in this report are opinions expressed by Shenzhen QC Testing Laboratory Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



3. List of Test and Measurement Instruments

3.1 Conducted Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	EMI Test Receiver	Rohde&Schwarz	ESIB 7	2277573376	2025.03.17	2026.03.16
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	101820	2024.08.06	2025.08.05
3	Artificial Mains Network	SCHWARZBECK	NSLK8126	8126200	2024.08.06	2025.08.05
4	PULSE LIMITER	Rohde&Schwarz	ESH3-Z2	100058	2025.03.18	2026.03.17

Conducted Emission Measurement Software: TS+ JS32-CE Ver 5.0.0

3.2 Radiated Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1.	EMI Test Receiver	Rohde&Schwarz	ESIB 7	2277573376	2025.03.17	2026.03.16
2.	EMI Test Receiver	Rohde&Schwarz	ESPI3	101131	2025.03.17	2026.03.16
3.	Spectrum Analyzer	Rohde&Schwarz	FSV 40	101458	2025.03.18	2026.03.17
4.	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9168	VULB9168-588	2025.03.22	2026.03.21
5.	Loop Antenna	EMCO	6502	2133	2025.03.19	2026.03.18
6.	horn antenna	SCHWARZBECK	BBHA9120D	2069	2024.08.10	2025.08.09
7.	Horn Antenna	COM-MW	ZLB7-18-40G-950	12221225	2024.08.10	2026.08.09
8.	Pre-amplifier	MITEQ	TTA0001-18	2063645	2025.03.17	2026.03.16
9.	Pre-amplifier	MITEQ	TTA1800-30-HG	2063644	2025.03.17	2026.03.16
10.	Pre-amplifier	COM-MW	DLAN-18000-40000-02	10229104	2025.03.22	2026.03.21
11.	966 Camber	ZhongYU	9*6*6	/	2023.05.08	2026.05.07

Radiated Emission Measurement Software: EZ_EMC Ver QCT03A2 RE+



3.3 RF Conducted test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1.	Wideband Radio Communication Tester	Rohde & Schwarz	CW500	151583	2025.03.18	2026.03.17
2.	Spectrum Analyzer	ROHDE&SCHWARZ	FSV 40	101458	2025.03.18	2026.03.17
3.	Signal Generator	Agilent	N5182A	MY50141563	2025.03.18	2026.03.17
4.	RF Automatic Test System	MW	MW100-RFCB/ MW100-PSB	MW2007004	2025.03.18	2026.03.17

RF Conducted Measurement Software: MTS 8310 Ver 2.0.0.0



4. Antenna requirement

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

EUT Antenna: The Antenna is PCB Antenna, the best case gain of the antenna ant1 is 2.78dBi and ant 2 is -4.56dBi, areference to the Internal photo for details.

5. Conducted Emissions

5.1 Applicable Standard


FCC Part15 C Section 15.207

5.2 Limit

Frequency range (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Note *: The level decreases linearly with the logarithm of the frequency.

5.3 Test setup

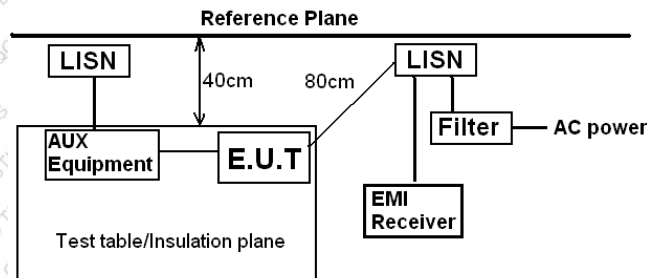

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

5.4 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.
RBW=9 kHz, VBW=30 kHz, Sweep time=auto

5.5 Test procedure

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

5.6 Test Data


Temperature	26.1°C	Humidity	59%
ATM Pressure	101.1kPa	Antenna Gain	Ant 1: 2.78dBi Ant 2: -4.56dBi
Test by	LBi Li	Test result	PASS



Measurement data:

Pre-scan all test modes, found worst case at 802.11ax20_MIMO 2412MHz TX, and so only show the test result of 802.11ax20_MIMO 2412MHz TX.

Line:

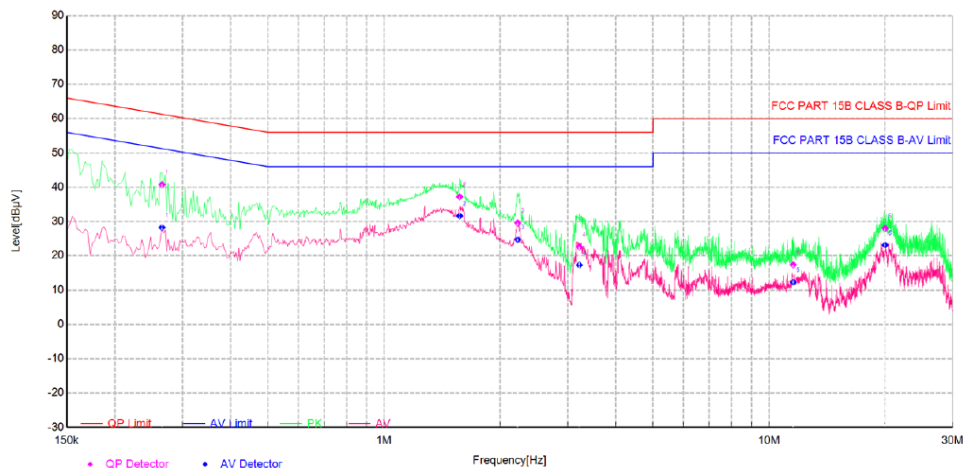


Final Data List

NO.	Freq. [MHz]	Factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Phase	Verdict
1	0.2650	10.69	40.77	61.27	20.50	28.28	51.27	22.99	L	PASS
2	1.5725	10.67	37.22	56.00	18.78	31.65	46.00	14.35	L	PASS
3	2.2250	10.70	29.59	56.00	26.41	24.70	46.00	21.30	L	PASS
4	3.2150	10.71	22.59	56.00	33.41	17.28	46.00	28.72	L	PASS
5	11.5490	10.86	17.37	60.00	42.63	12.29	50.00	37.71	L	PASS
6	20.0225	10.91	28.04	60.00	31.96	23.11	50.00	26.89	L	PASS



Neutral:

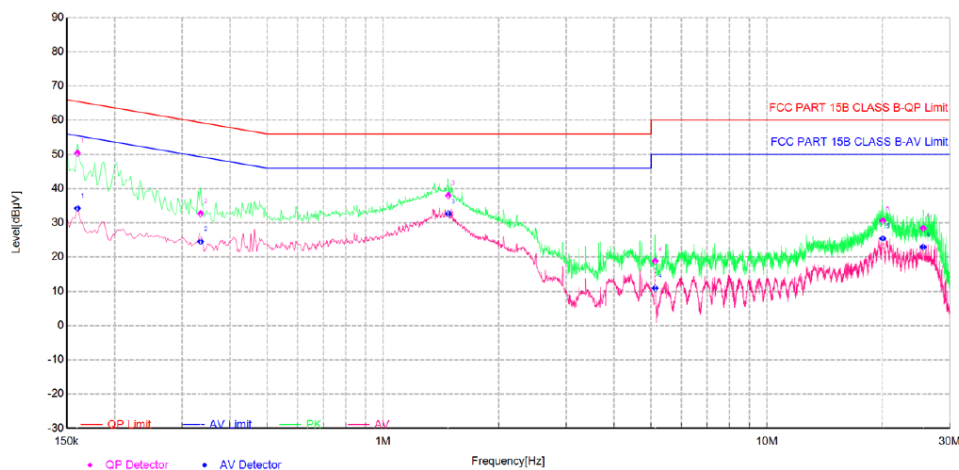

Final Data List

NO.	Freq. [MHz]	Factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Phase	Verdict
1	0.1600	10.47	50.40	65.46	15.06	34.28	55.46	21.18	N	PASS
2	0.3350	10.77	32.71	59.33	26.62	24.57	49.33	24.76	N	PASS
3	1.4800	10.63	37.99	56.00	18.01	32.66	46.00	13.34	N	PASS
4	5.1185	10.56	18.82	60.00	41.18	10.95	50.00	39.05	N	PASS
5	20.0450	10.89	30.65	60.00	29.35	25.44	50.00	24.56	N	PASS
6	25.5440	10.80	28.41	60.00	31.59	22.94	50.00	27.06	N	PASS

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

6. Conducted Peak Output Power

6.1. Applicable Standard


FCC Part15 C Section 15.247 (b)(3)

6.2. Limit

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

6.3. Test setup

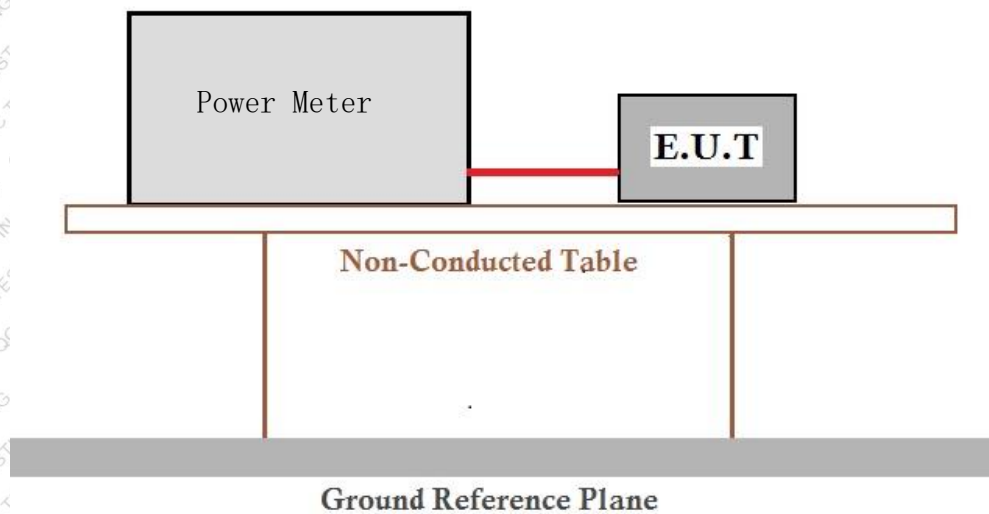

6.4. Test Procedure

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.



6.5. Test Data

Temperature	22.1 °C	Humidity	46 %
ATM Pressure	101.1kPa	Antenna Gain	Ant 1: 2.78dBi Ant 2: -4.56dBi
Test by	LBi Li	Test result	PASS

Please refer to following table and plots.

Output Power:

Modulation	CH No.	Frequency (MHz)	Output Power(dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Sum		
802.11b	01	2412	15.35	15.06	---	≤30	PASS
	06	2437	15.14	15.3	---	≤30	PASS
	11	2462	14.94	15.45	---	≤30	PASS
802.11g	01	2412	15.8	15.4	---	≤30	PASS
	06	2437	15.51	15.67	---	≤30	PASS
	11	2462	15.34	15.86	---	≤30	PASS
802.11n(HT20)	01	2412	13.02	12.37	15.72	≤30	PASS
	06	2437	12.99	12.79	15.90	≤30	PASS
	11	2462	12.78	12.98	15.89	≤30	PASS
802.11n(HT40)	03	2422	12.73	12.54	15.65	≤30	PASS
	06	2437	12.72	12.55	15.65	≤30	PASS
	09	2452	12.71	12.78	15.76	≤30	PASS
802.11ax(HE20)	01	2412	13.65	13.13	16.41	≤30	PASS
	06	2437	13.46	13.52	16.50	≤30	PASS
	11	2462	13.21	13.42	16.33	≤30	PASS
802.11ax(HE40)	03	2422	13.66	13.55	16.62	≤30	PASS
	06	2437	13.44	13.51	16.49	≤30	PASS
	09	2452	13.38	13.65	16.53	≤30	PASS

7. Channel Bandwidth & 99% Occupied Bandwidth


7.1. Applicable Standard

FCC Part15 C Section 15.247 (a)(2)

7.2. Limit

The minimum 6 dB bandwidth shall be 500 kHz.

7.3. Test setup

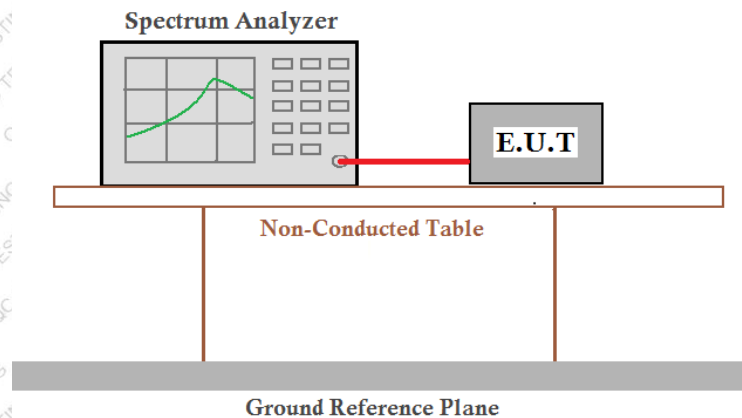

7.4. Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

•DTS bandwidth

The steps for the first option are as follows:

- Set RBW = 100 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.



- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.5. Test Data

Temperature	22.1 °C	Humidity	46 %
ATM Pressure	101.1kPa	Antenna Gain	Ant 1: 2.78dBi Ant 2: -4.56dBi
Test by	LBi Li	Test result	PASS

Please refer to following table and plots.

**DTS Bandwidth:**


Modulation	CH No.	Frequency (MHz)	DTS Bandwidth (MHz)		Limit (MHz)	Verdict
			Ant1	Ant2		
802.11b	01	2412	8.019	8.034	0.5	PASS
	06	2437	8.031	8.007	0.5	PASS
	11	2462	7.989	7.551	0.5	PASS
802.11g	01	2412	15.114	15.258	0.5	PASS
	06	2437	15.792	15.633	0.5	PASS
	11	2462	15.771	15.657	0.5	PASS
802.11n(HT20)	01	2412	15.666	15.054	0.5	PASS
	06	2437	16.869	16.05	0.5	PASS
	11	2462	16.911	16.296	0.5	PASS
802.11n(HT40)	03	2422	34.446	35.082	0.5	PASS
	06	2437	35.04	35.106	0.5	PASS
	09	2452	35.022	33.726	0.5	PASS
802.11ax(HE20)	01	2412	16.515	17.793	0.5	PASS
	06	2437	17.649	16.974	0.5	PASS
	11	2462	17.394	17.004	0.5	PASS
802.11ax(HE40)	03	2422	37.53	35.562	0.5	PASS
	06	2437	36.534	37.122	0.5	PASS
	09	2452	31.386	35.088	0.5	PASS

99% Occupied Bandwidth:


Modulation	CH No.	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	Verdict
			Ant1	Ant2		
802.11b	01	2412	12.44	12.608	---	PASS
	06	2437	12.392	12.536	---	PASS
	11	2462	12.395	12.506	---	PASS
802.11g	01	2412	16.387	16.39	---	PASS
	06	2437	16.687	16.72	---	PASS
	11	2462	16.705	16.756	---	PASS
802.11n(HT20)	01	2412	17.53	17.518	---	PASS
	06	2437	17.755	17.89	---	PASS
	11	2462	17.791	17.878	---	PASS
802.11n(HT40)	03	2422	36.02	35.996	---	PASS
	06	2437	35.936	36.128	---	PASS
	09	2452	35.972	35.99	---	PASS
802.11ax(HE20)	01	2412	18.796	18.781	---	PASS
	06	2437	18.892	18.916	---	PASS
	11	2462	18.919	18.877	---	PASS
802.11ax(HE40)	03	2422	37.628	37.598	---	PASS
	06	2437	37.52	37.694	---	PASS
	09	2452	37.214	37.484	---	PASS



-6dB Bandwidth NVNT b 2412MHz Ant1

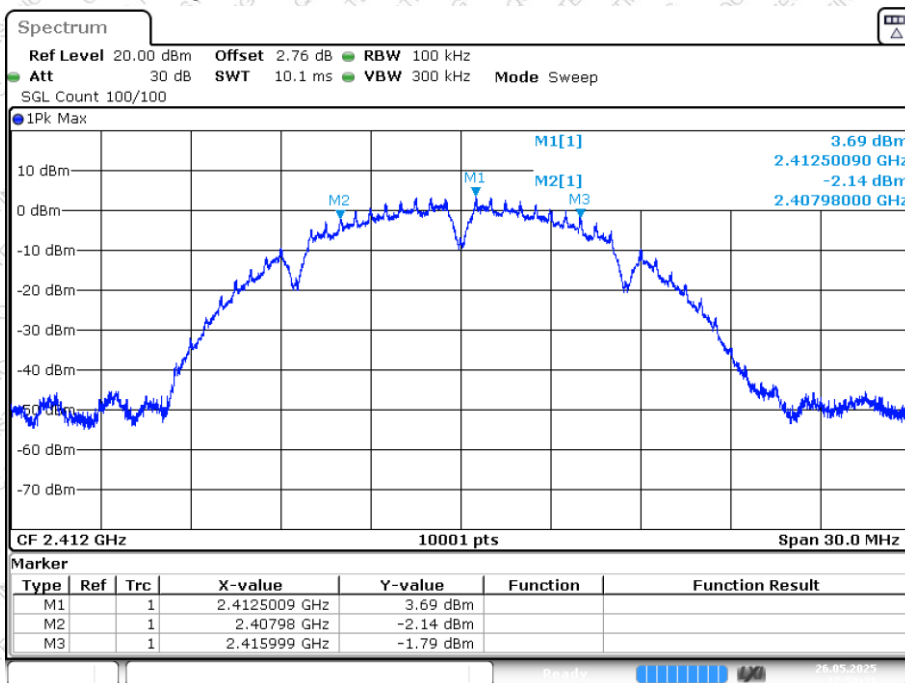


-6dB Bandwidth NVNT b 2437MHz Ant1

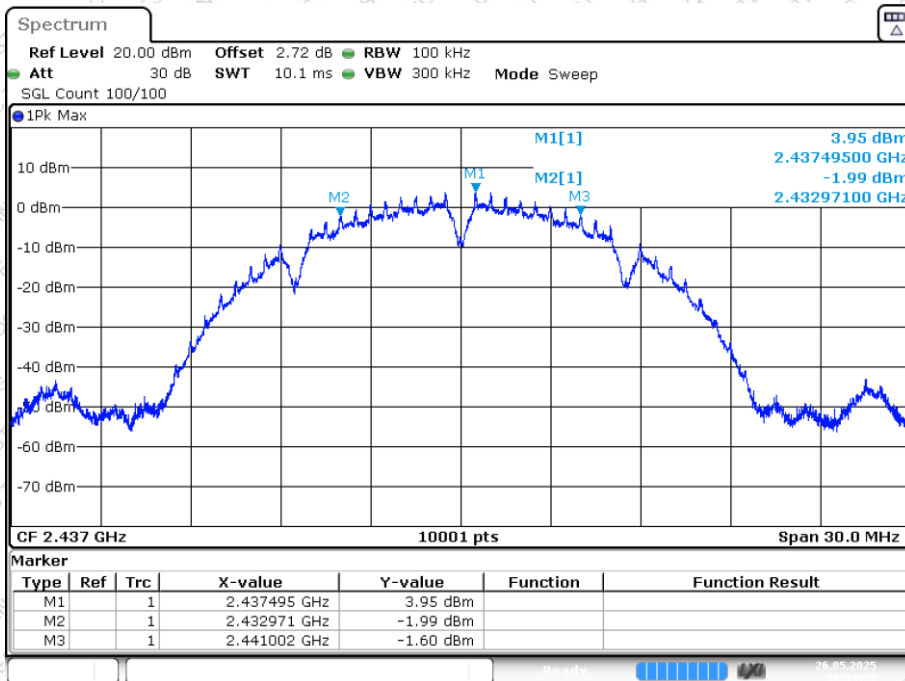




-6dB Bandwidth NVNT b 2462MHz Ant1

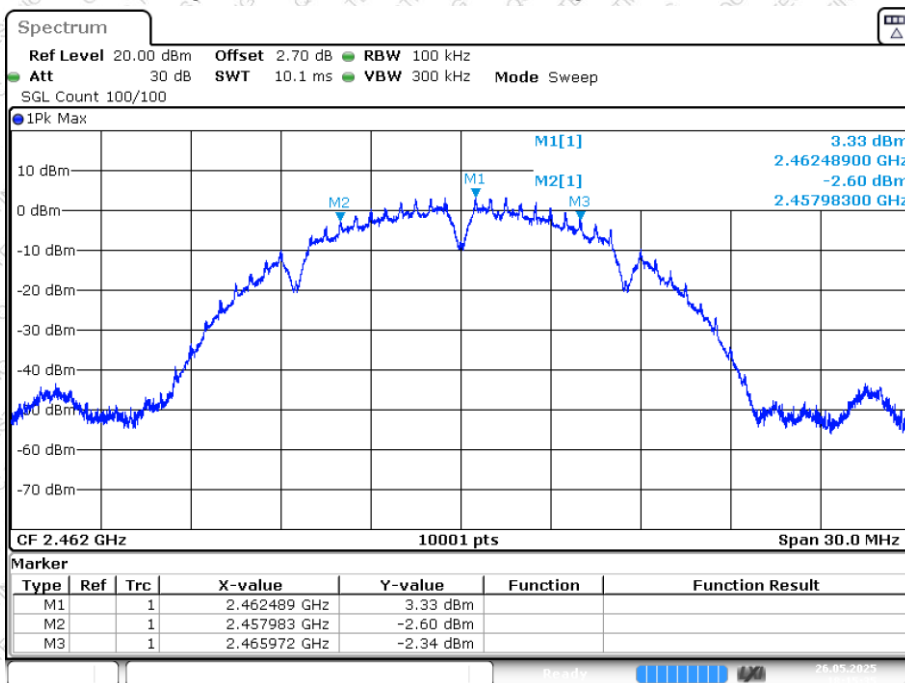


-6dB Bandwidth NVNT b 2412MHz Ant2

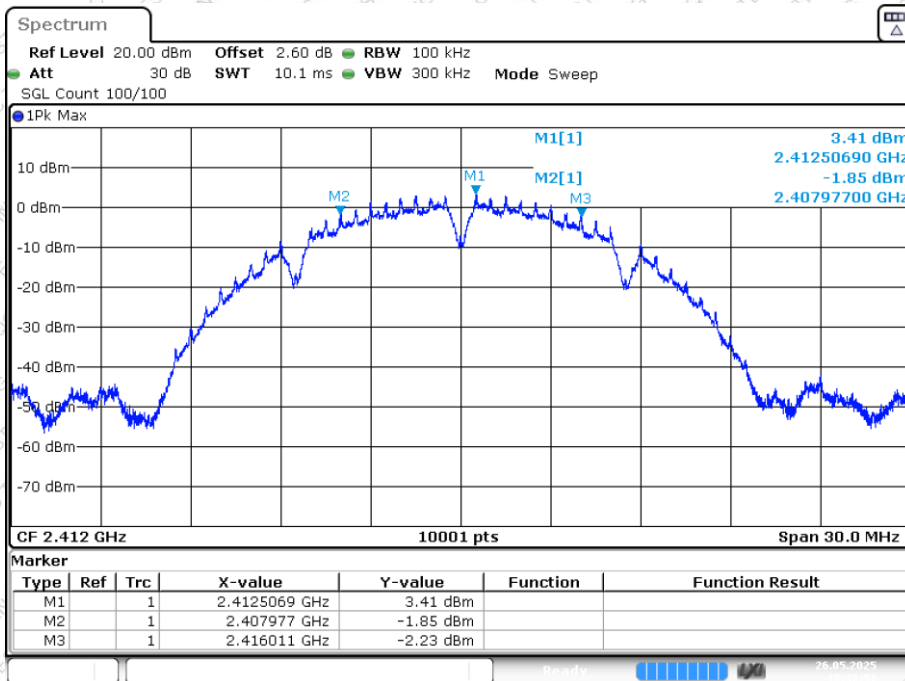




-6dB Bandwidth NVNT b 2437MHz Ant2

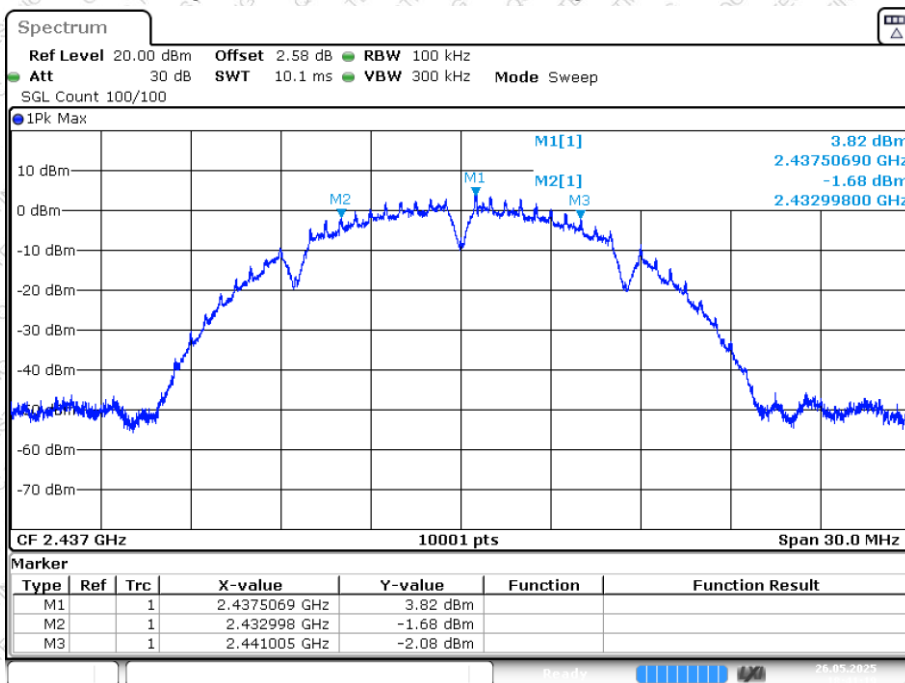


-6dB Bandwidth NVNT b 2462MHz Ant2

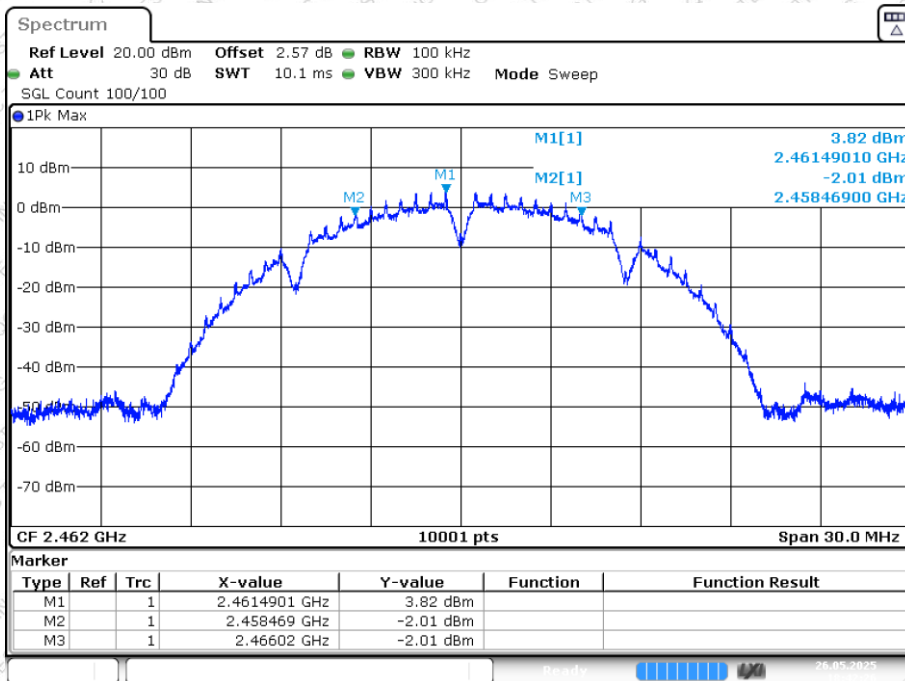




-6dB Bandwidth NVNT g 2412MHz Ant1

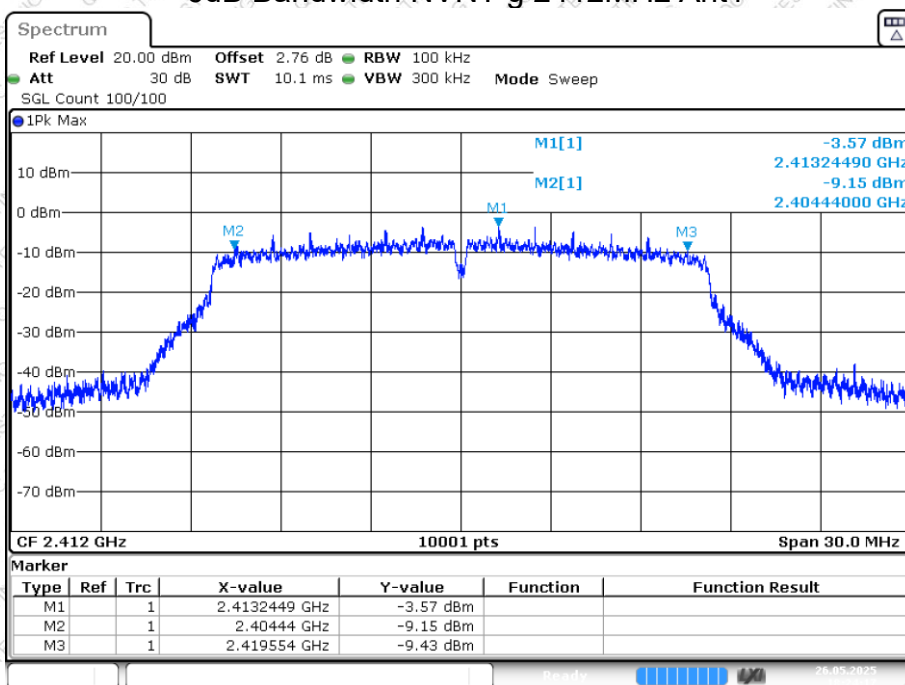


-6dB Bandwidth NVNT g 2437MHz Ant1

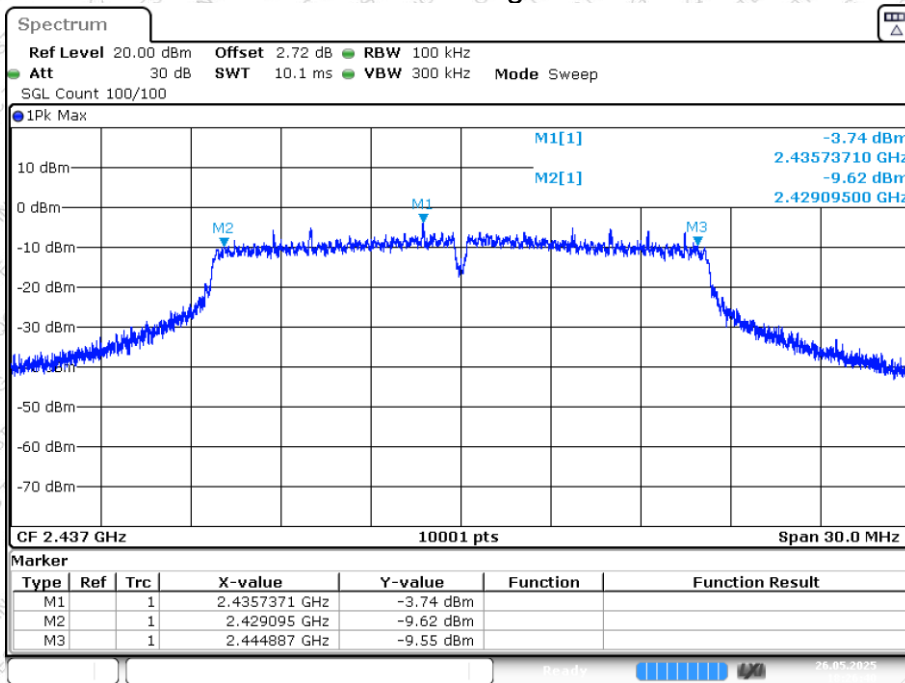




-6dB Bandwidth NVNT g 2462MHz Ant1

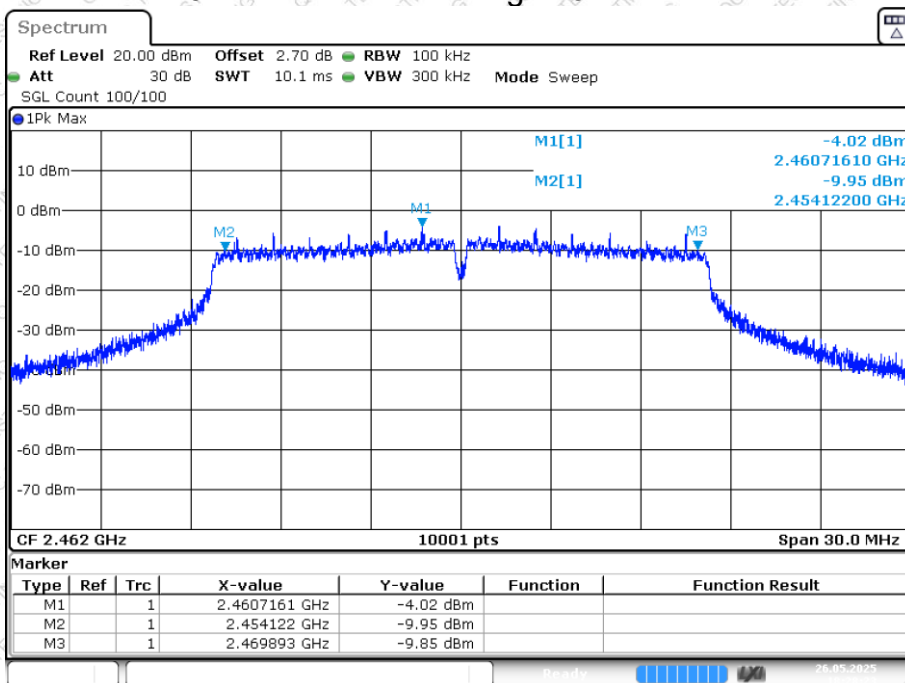


-6dB Bandwidth NVNT g 2412MHz Ant2

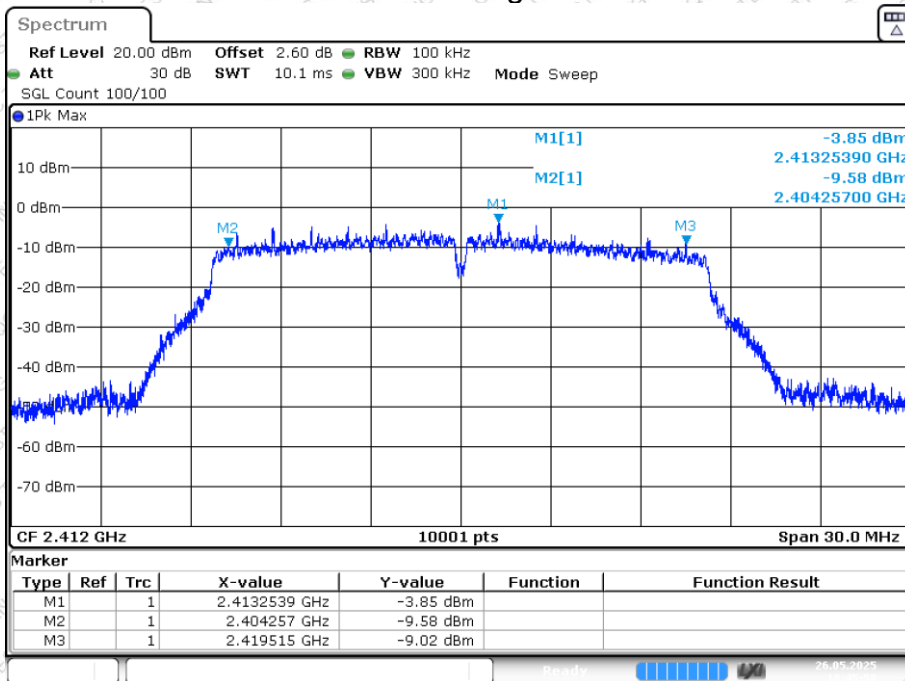




-6dB Bandwidth NVNT g 2437MHz Ant2

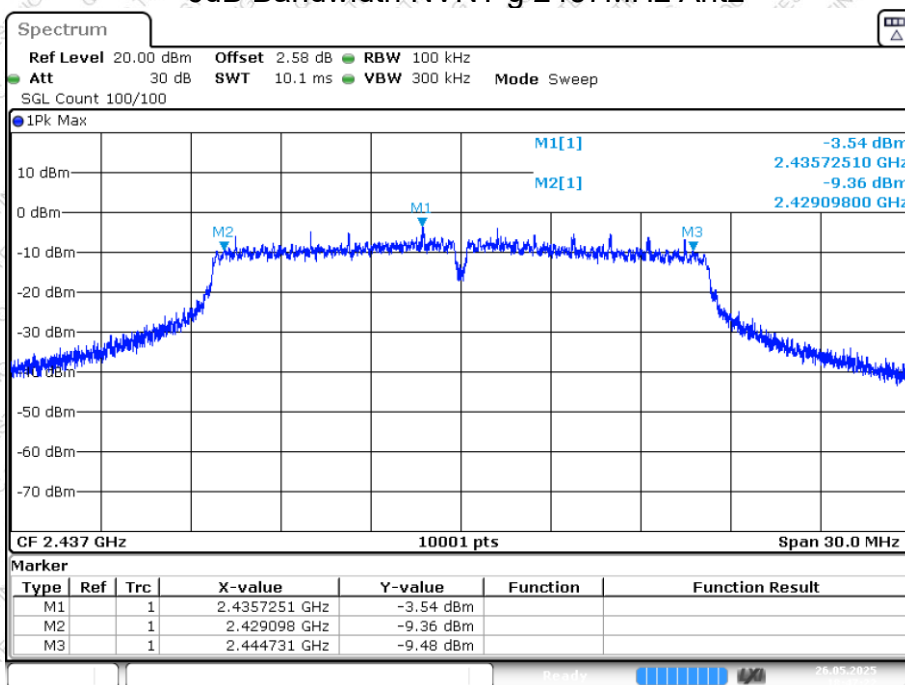


-6dB Bandwidth NVNT g 2462MHz Ant2

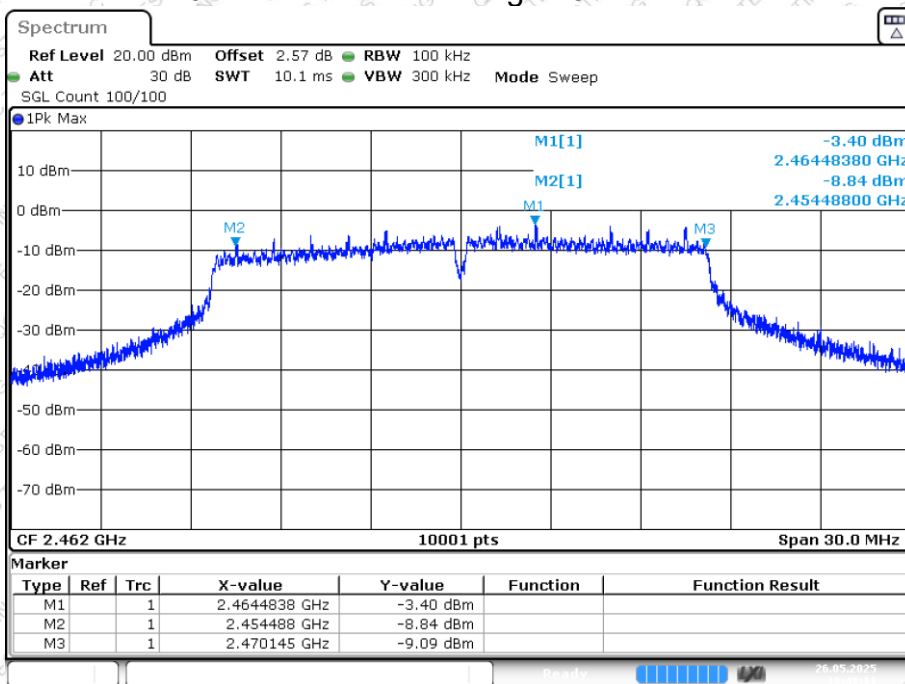




-6dB Bandwidth NVNT n20 2412MHz Ant1

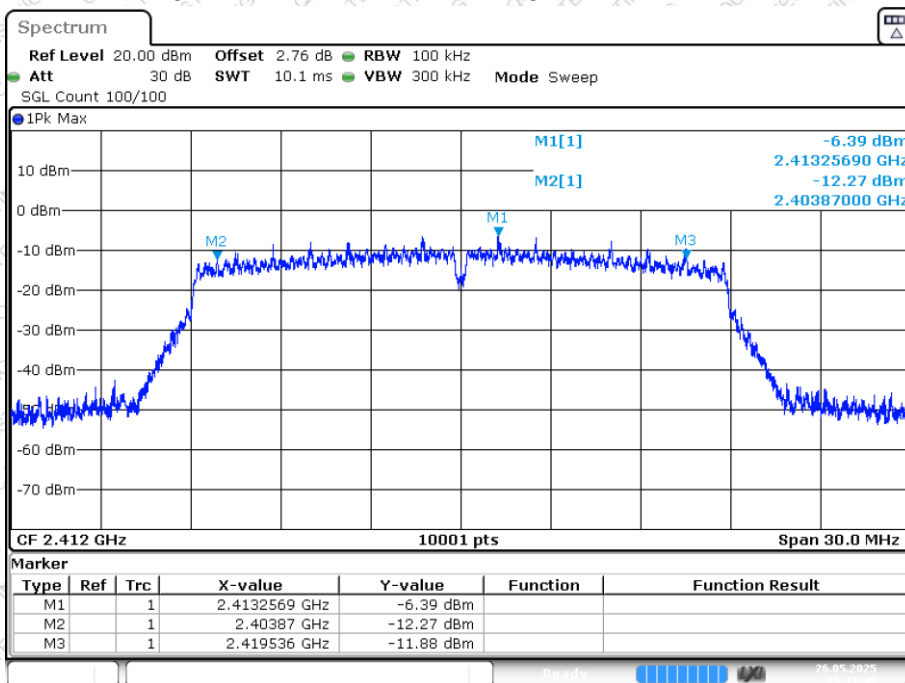


-6dB Bandwidth NVNT n20 2412MHz Ant2

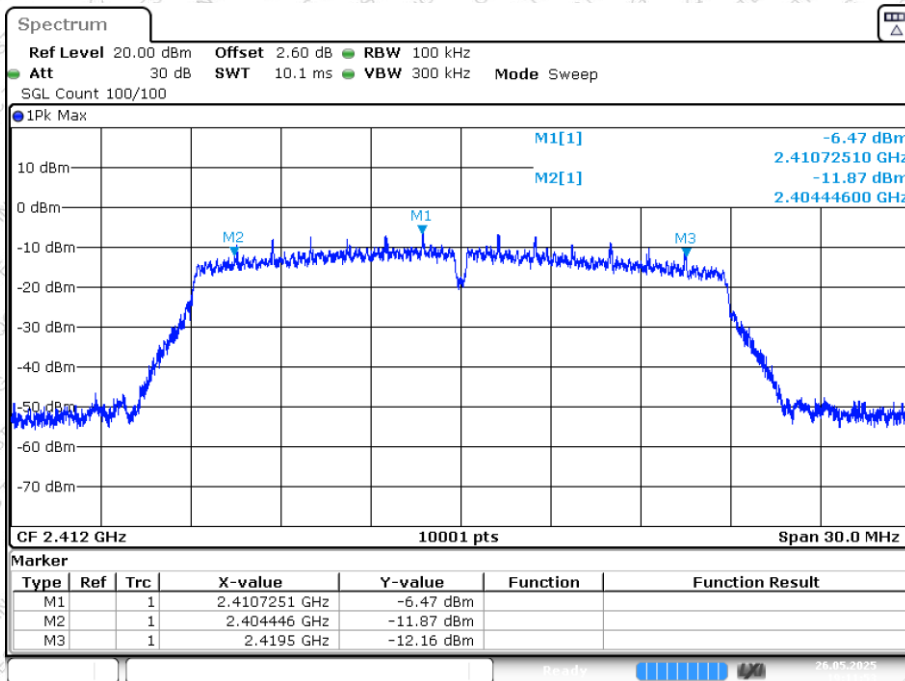




-6dB Bandwidth NVNT n20 2437MHz Ant1

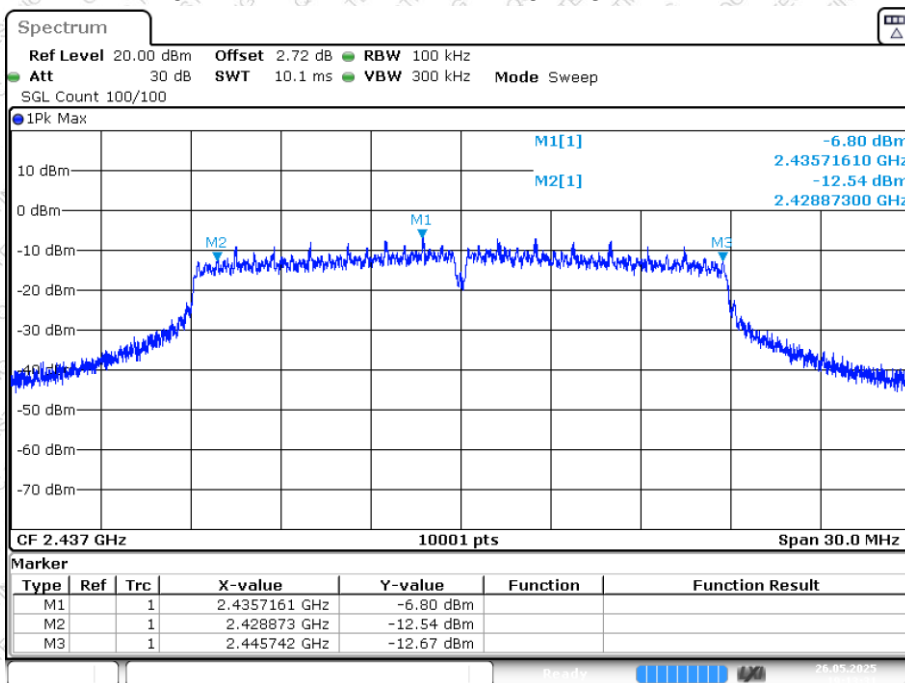


-6dB Bandwidth NVNT n20 2437MHz Ant2

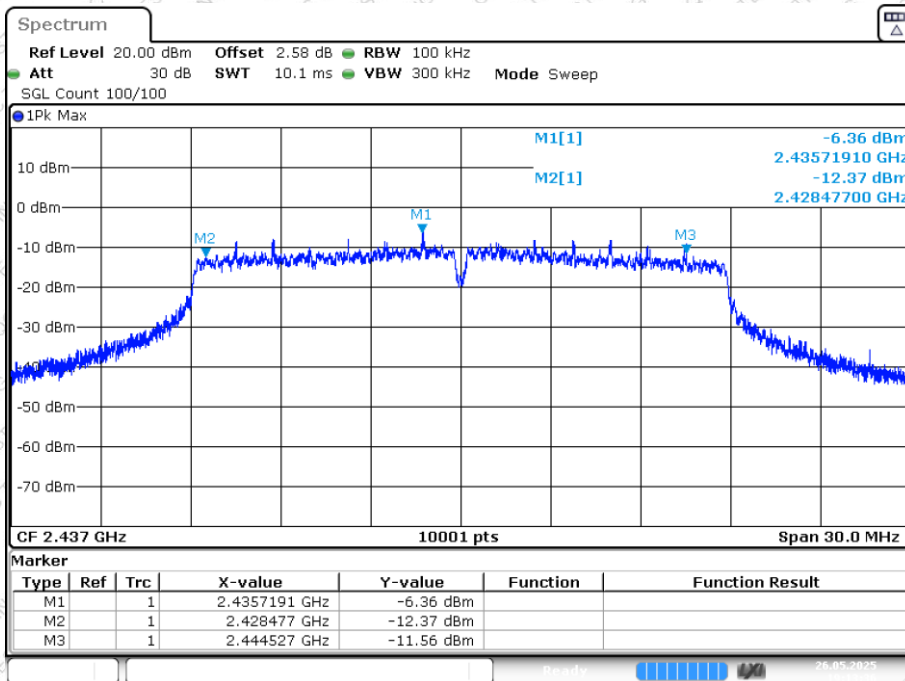




-6dB Bandwidth NVNT n20 2462MHz Ant1

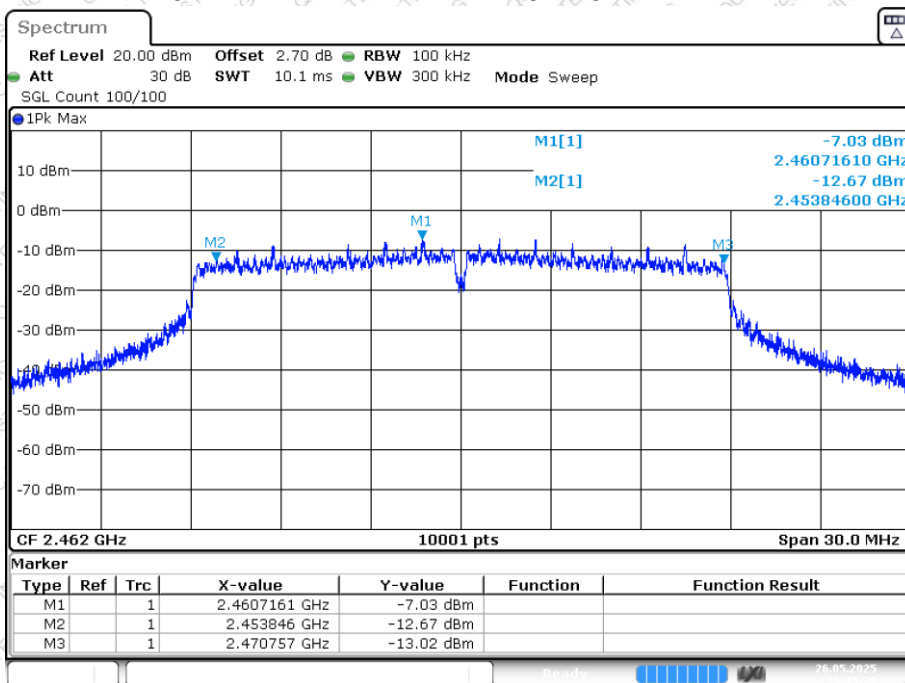


-6dB Bandwidth NVNT n20 2462MHz Ant2

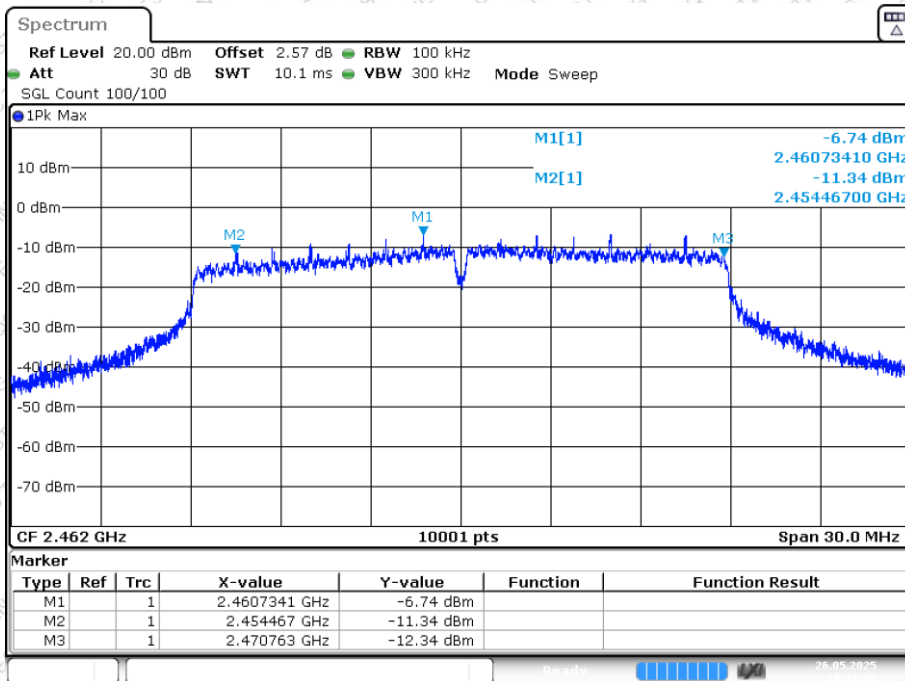




-6dB Bandwidth NVNT n40 2422MHz Ant1

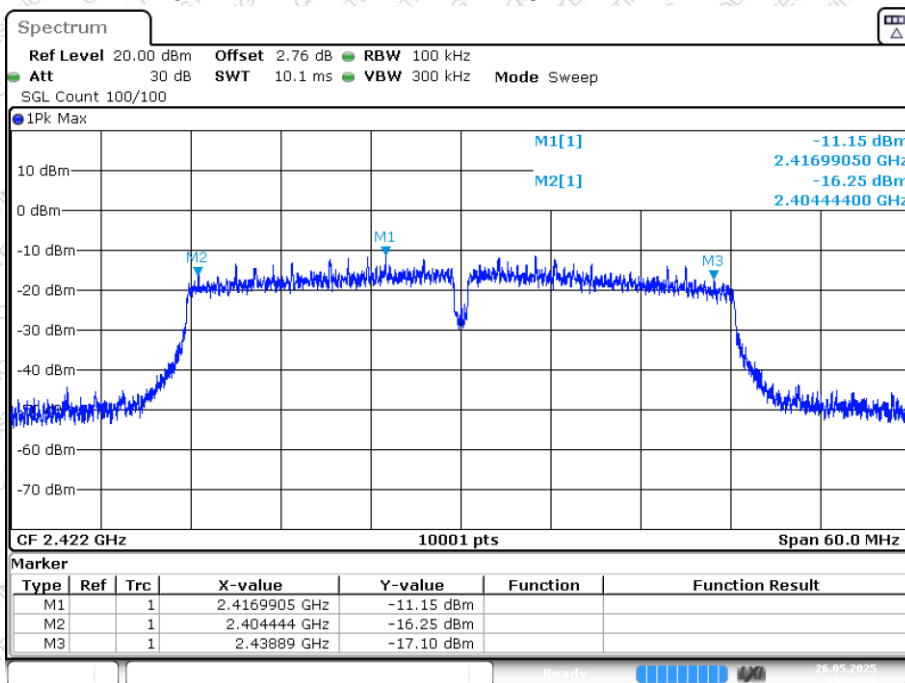


-6dB Bandwidth NVNT n40 2422MHz Ant2

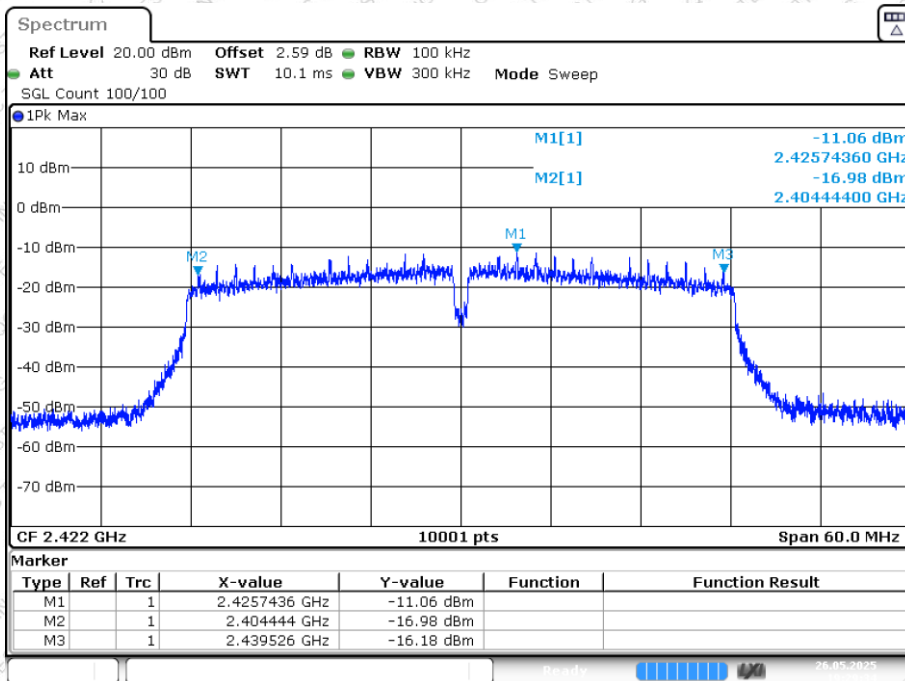




-6dB Bandwidth NVNT n40 2437MHz Ant1

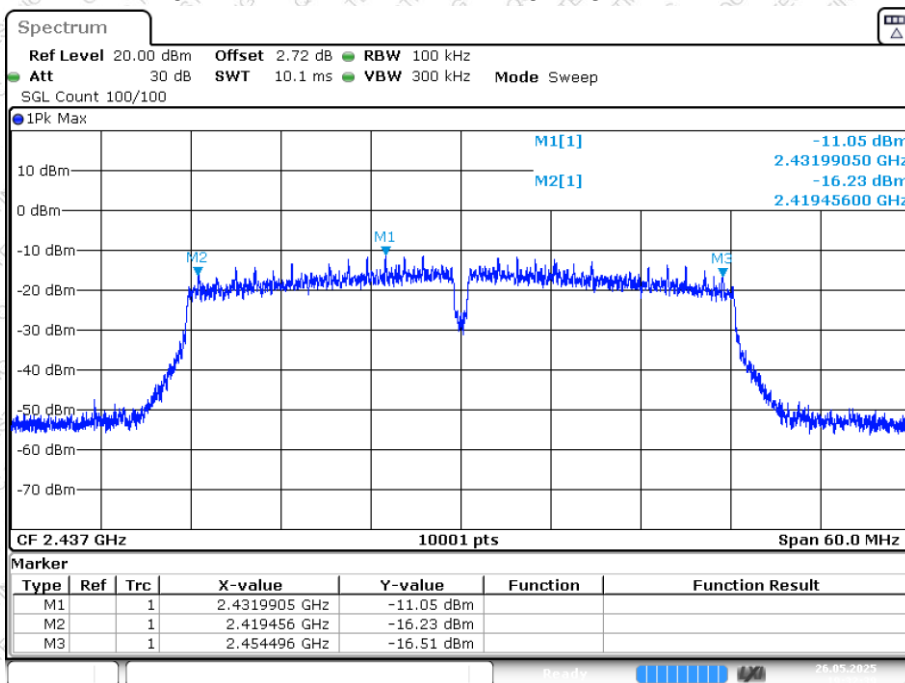


-6dB Bandwidth NVNT n40 2437MHz Ant2

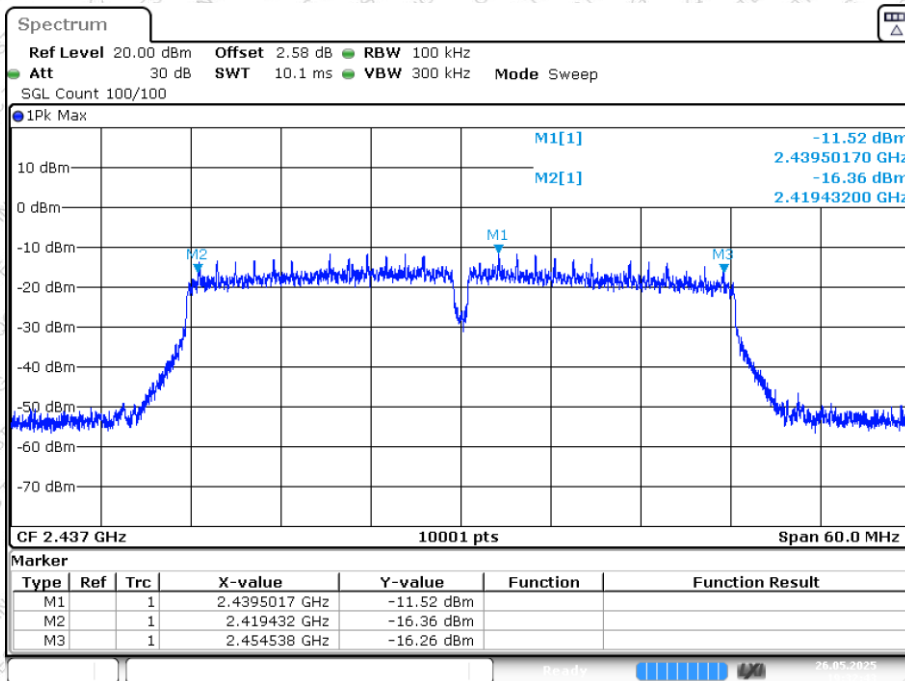




-6dB Bandwidth NVNT n40 2452MHz Ant1

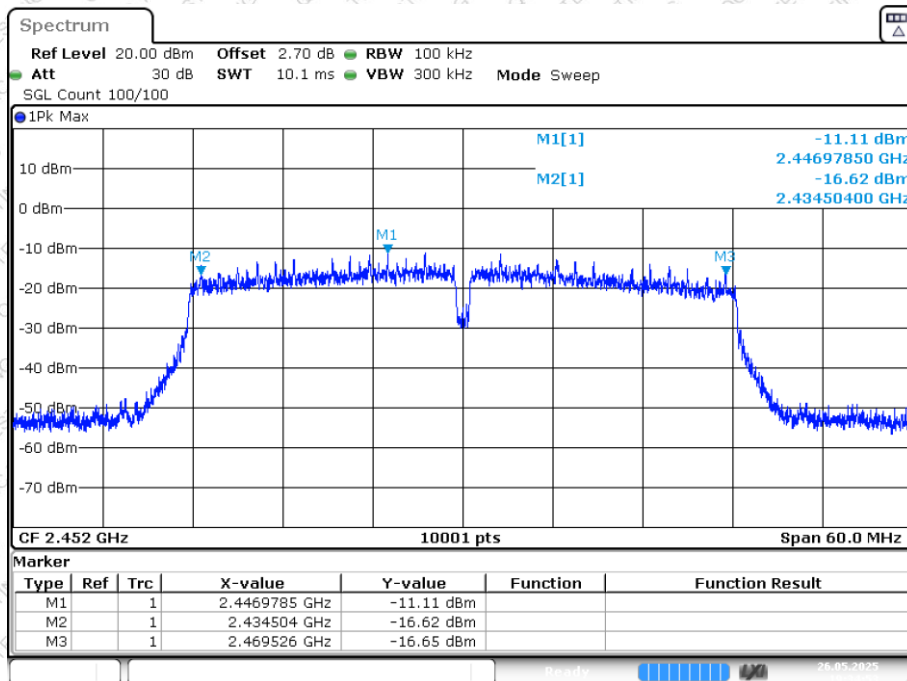


-6dB Bandwidth NVNT n40 2452MHz Ant2

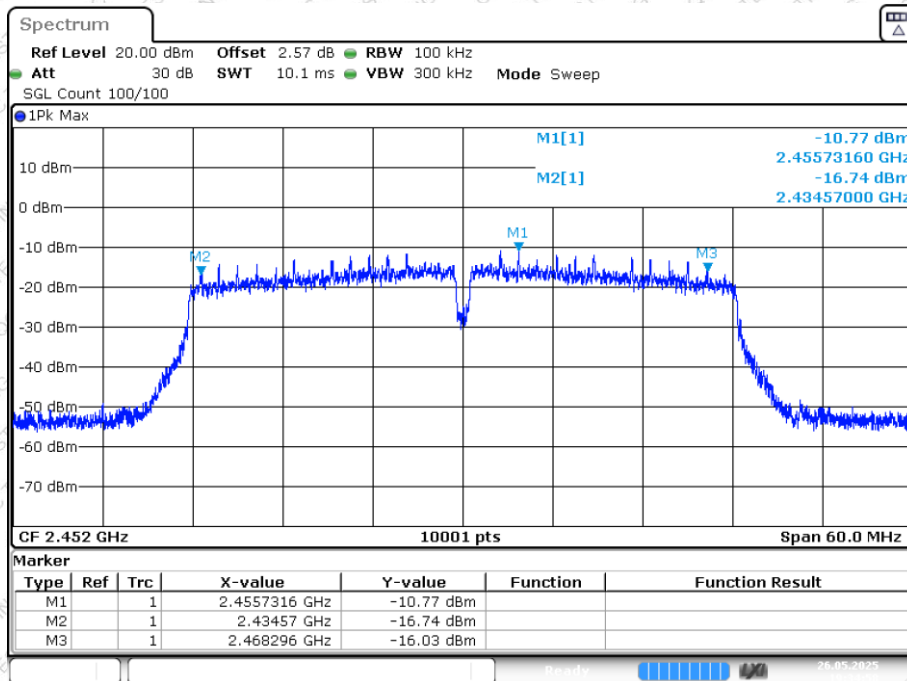




-6dB Bandwidth NVNT ax20 2412MHz Ant1

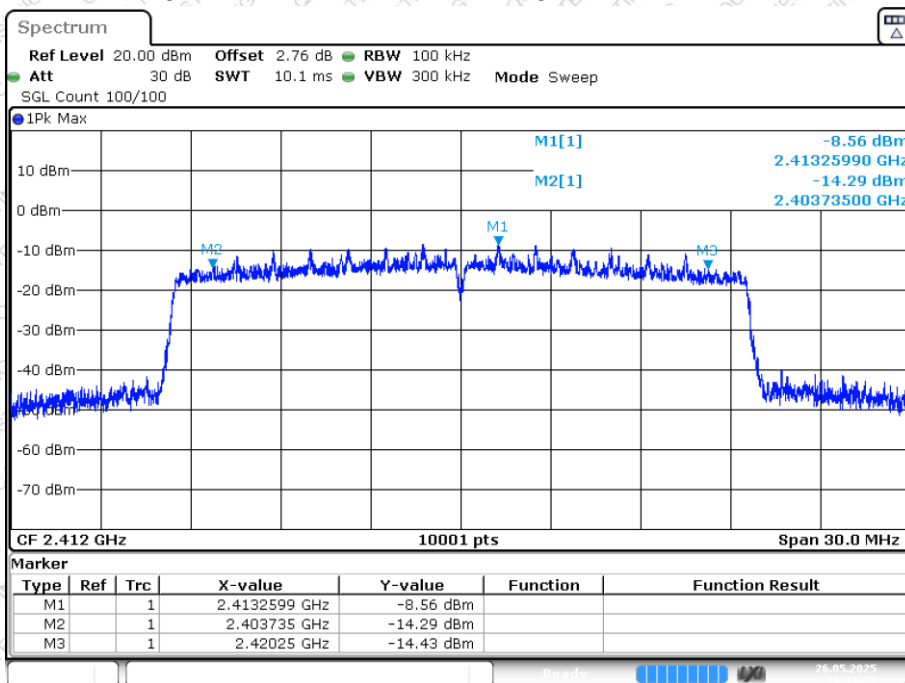


-6dB Bandwidth NVNT ax20 2412MHz Ant2

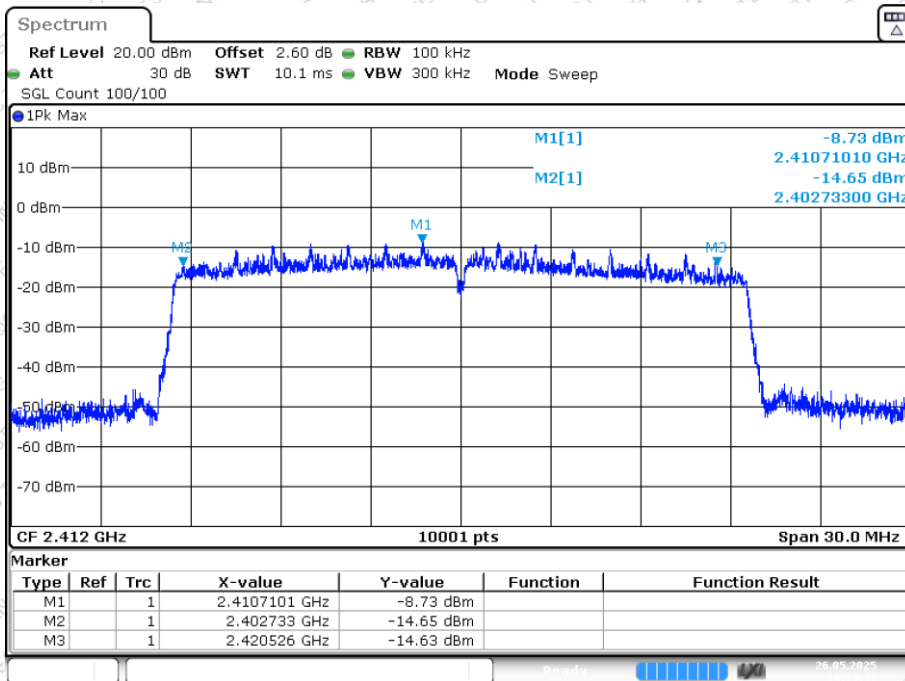




-6dB Bandwidth NVNT ax20 2437MHz Ant1

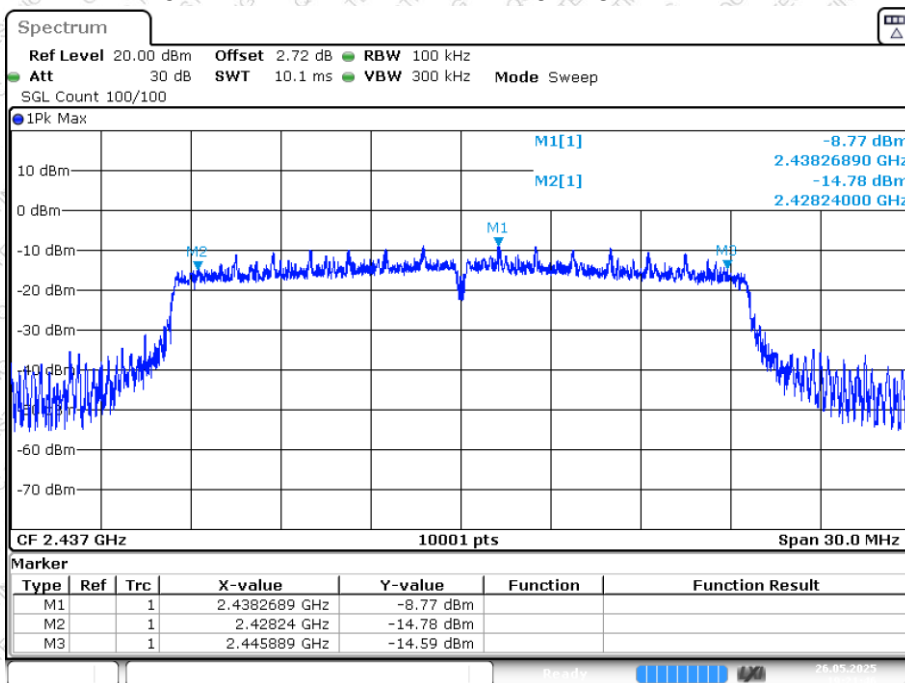


-6dB Bandwidth NVNT ax20 2437MHz Ant2

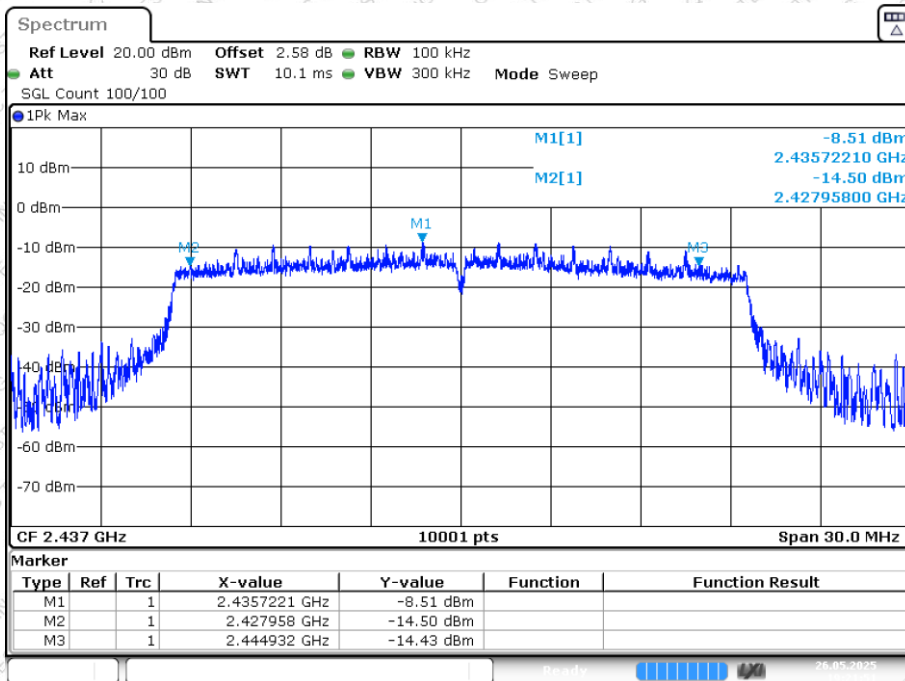




-6dB Bandwidth NVNT ax20 2462MHz Ant1

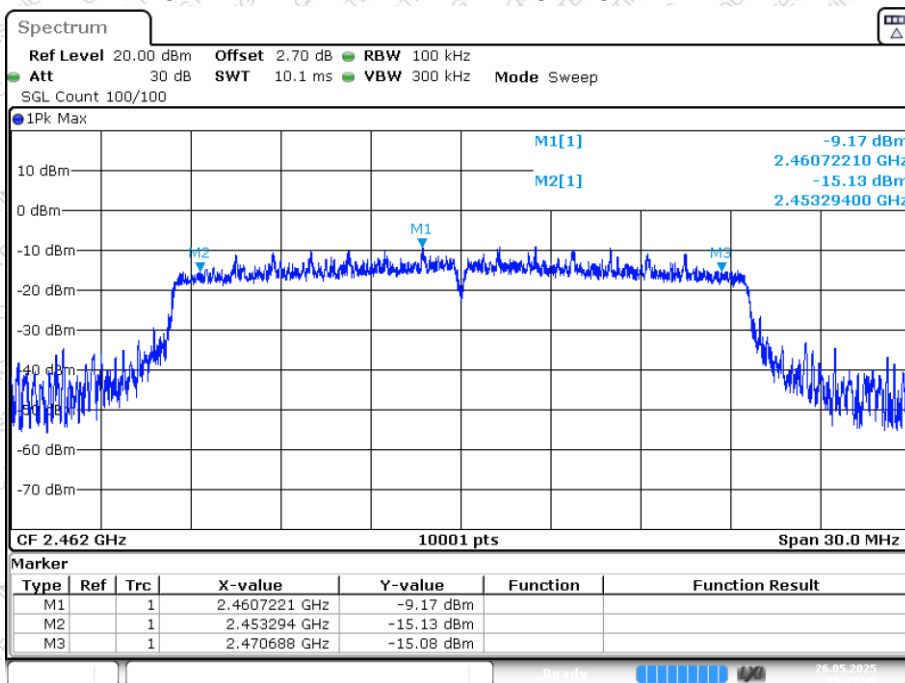


-6dB Bandwidth NVNT ax20 2462MHz Ant2

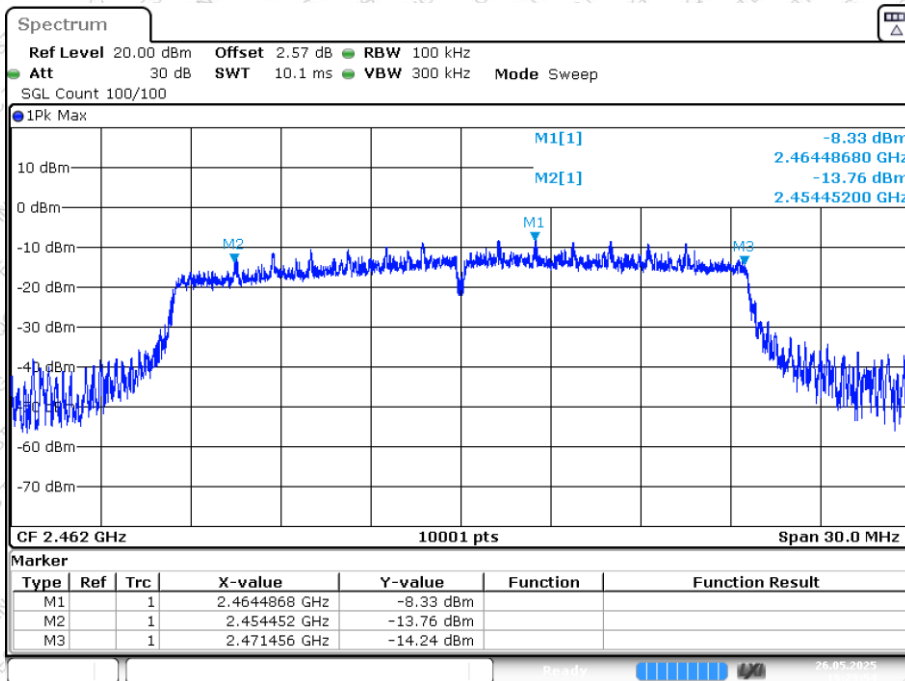




-6dB Bandwidth NVNT ax40 2422MHz Ant1

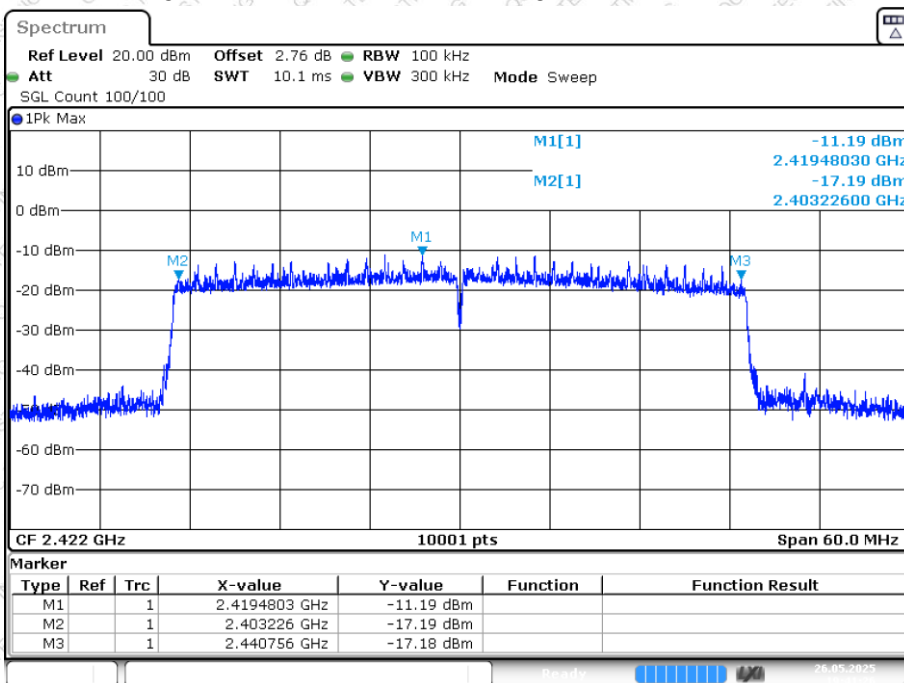


-6dB Bandwidth NVNT ax40 2422MHz Ant2

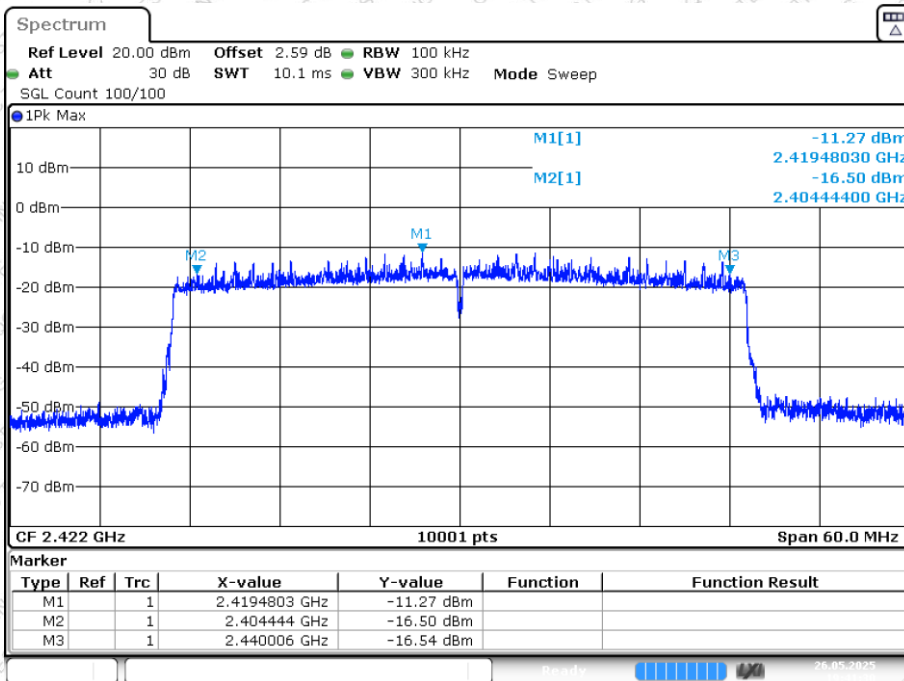




-6dB Bandwidth NVNT ax40 2437MHz Ant1

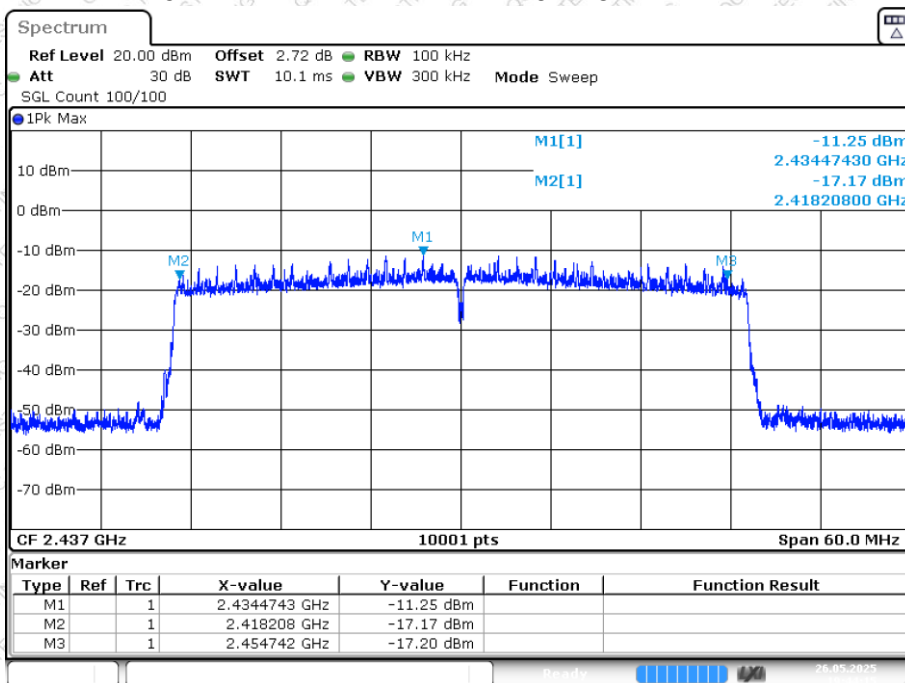


-6dB Bandwidth NVNT ax40 2437MHz Ant2

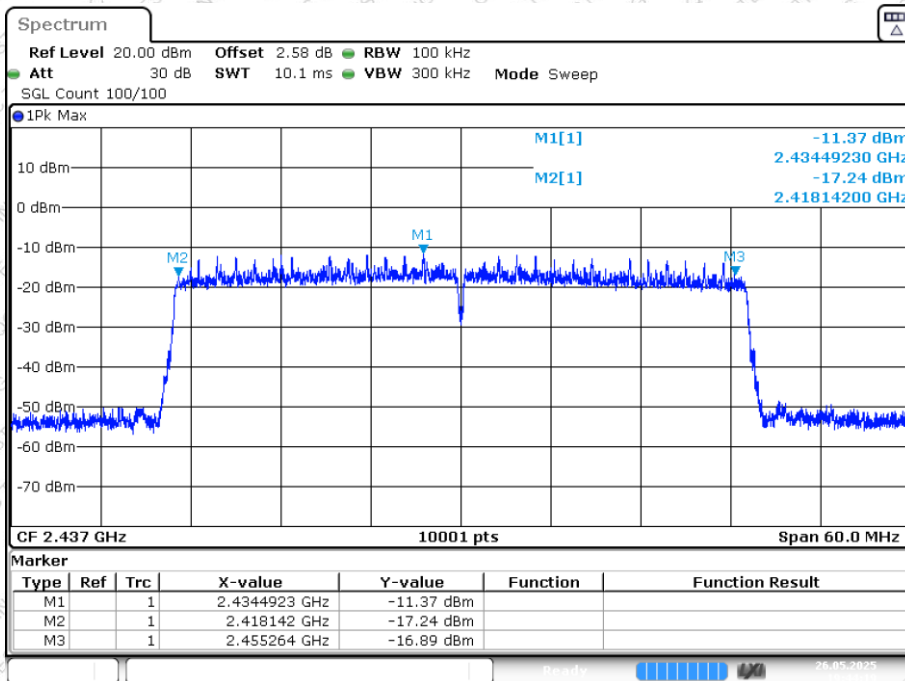




-6dB Bandwidth NVNT ax40 2452MHz Ant1

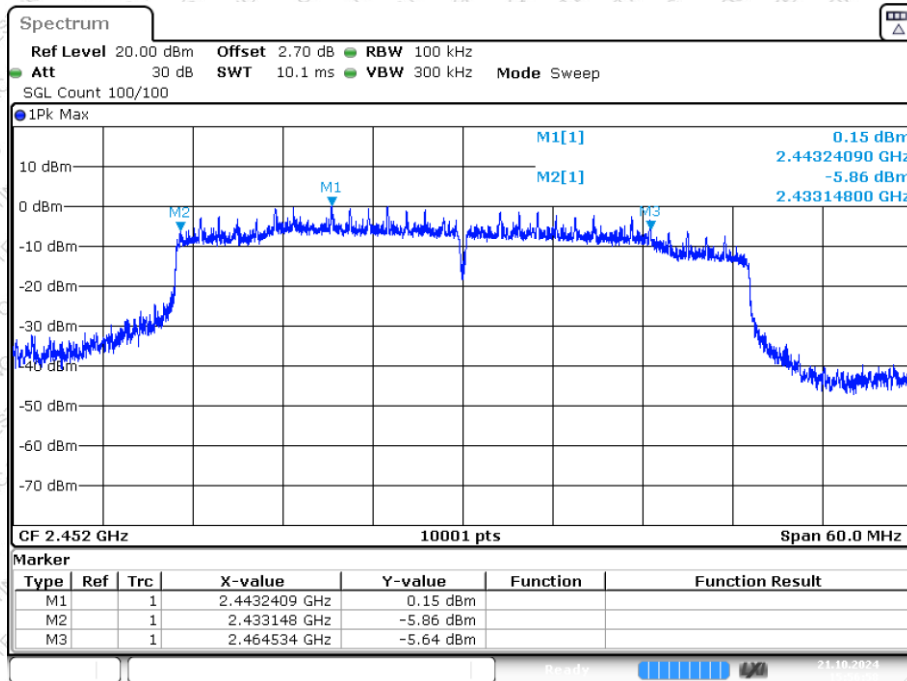


-6dB Bandwidth NVNT ax40 2452MHz Ant2

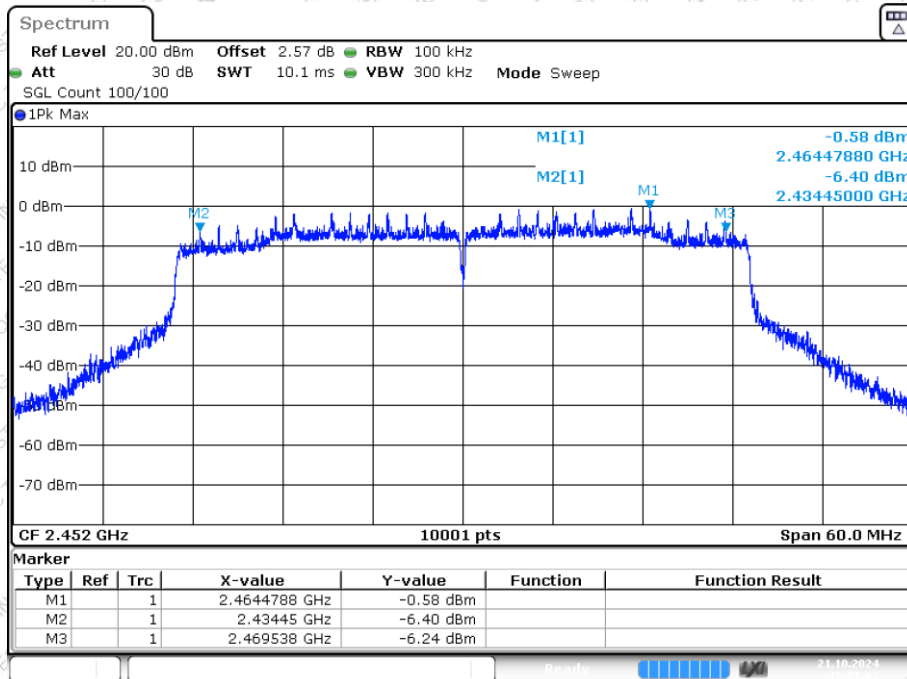




OBW NVNT b 2412MHz Ant1

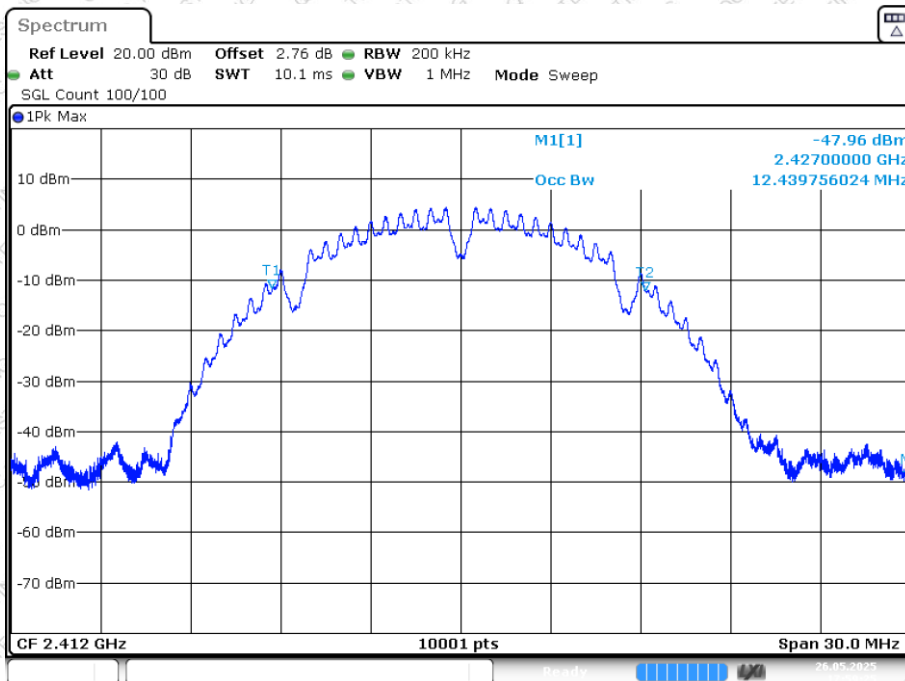


OBW NVNT b 2437MHz Ant1

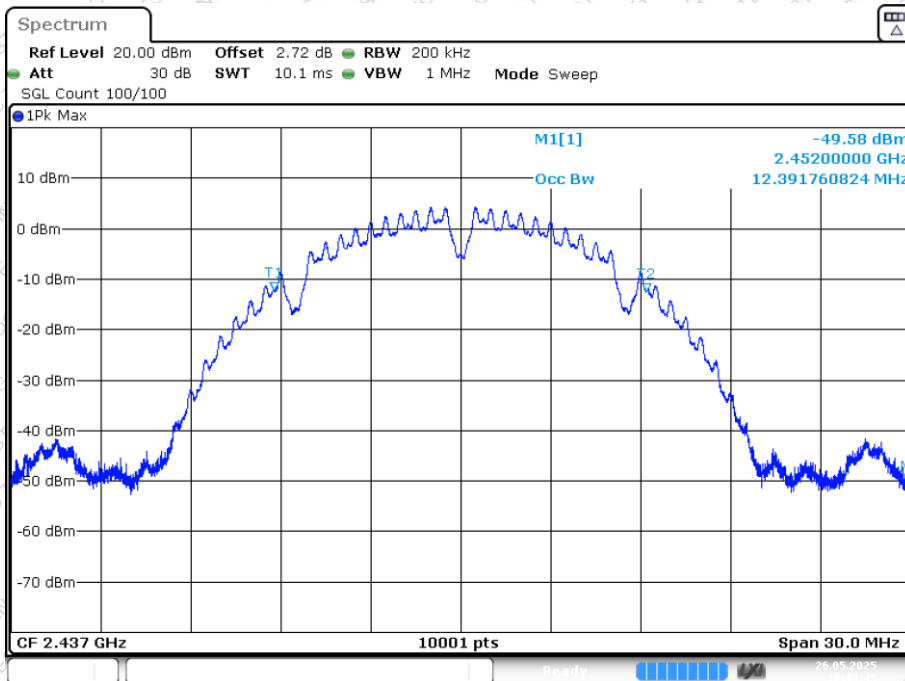




OBW NVNT b 2462MHz Ant1

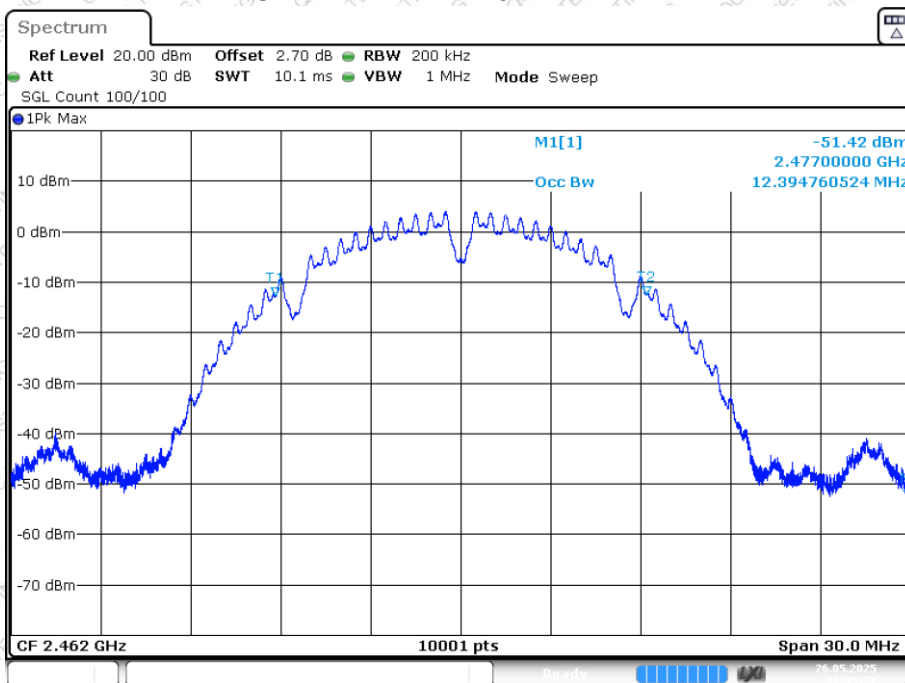


OBW NVNT b 2412MHz Ant2

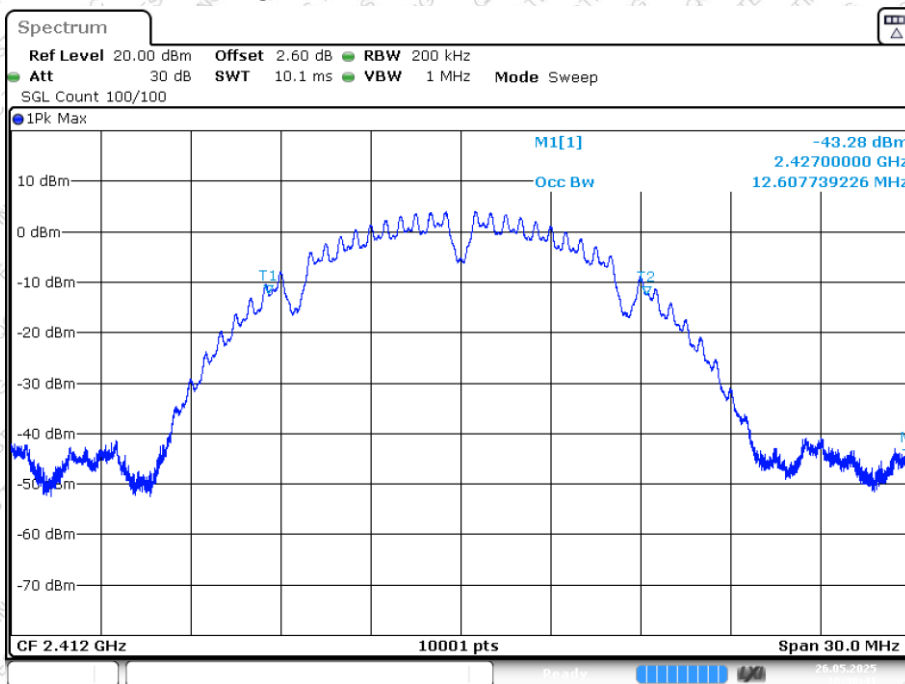




OBW NVNT b 2437MHz Ant2

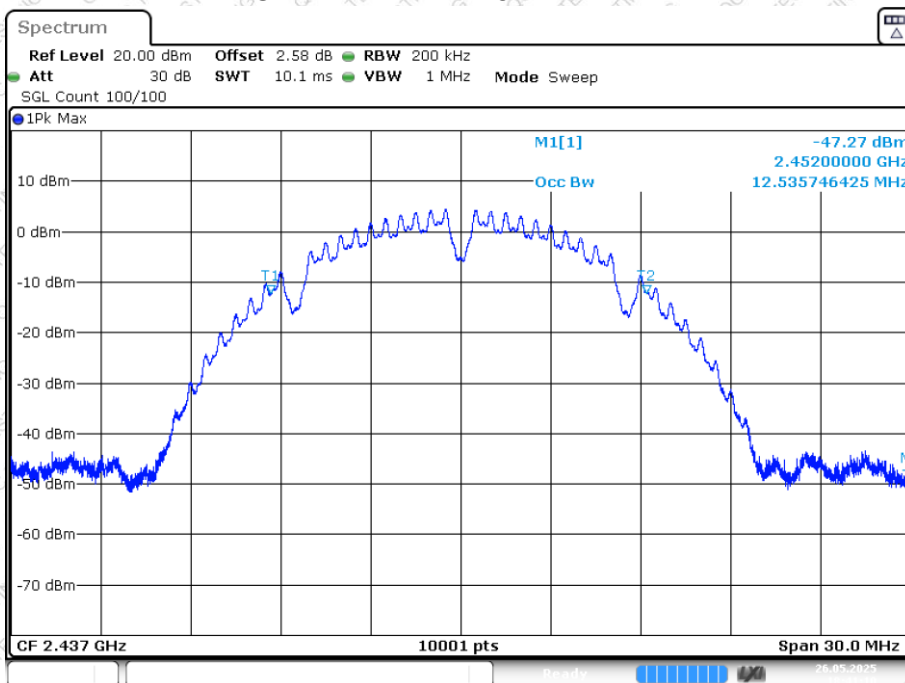


OBW NVNT b 2462MHz Ant2

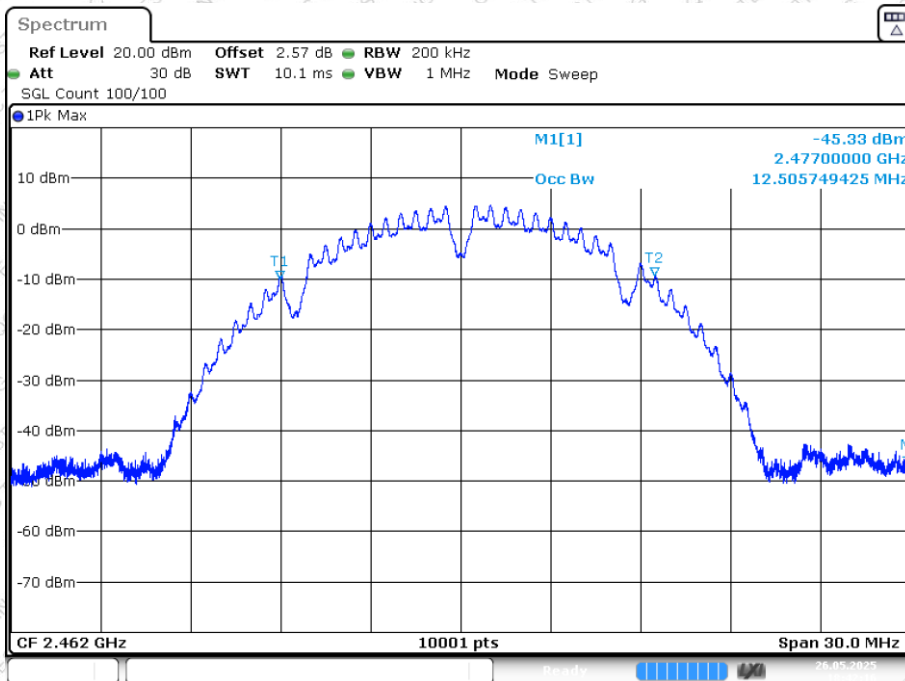




OBW NVNT g 2412MHz Ant1

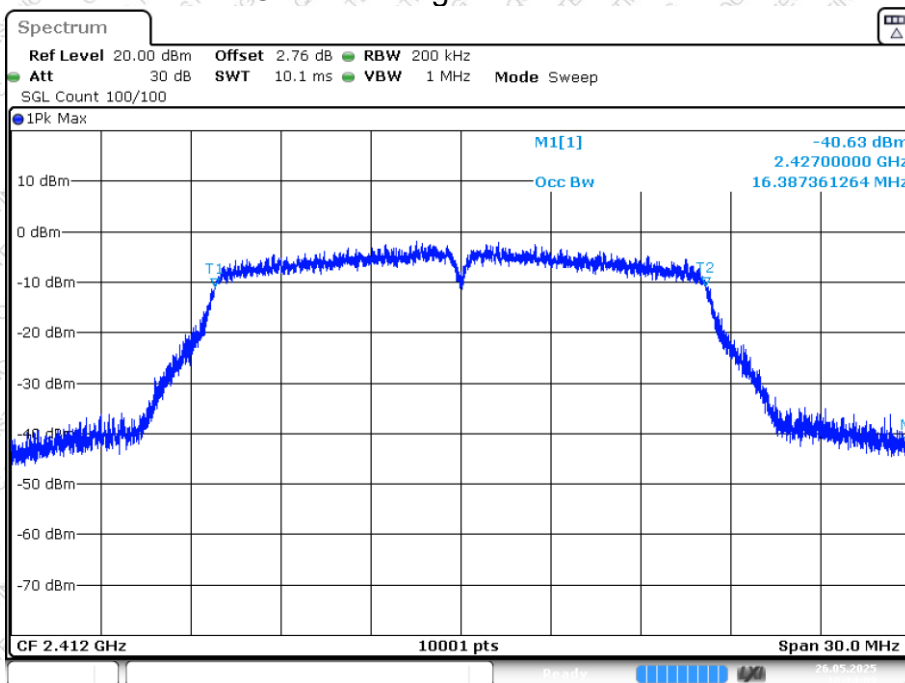


OBW NVNT g 2437MHz Ant1

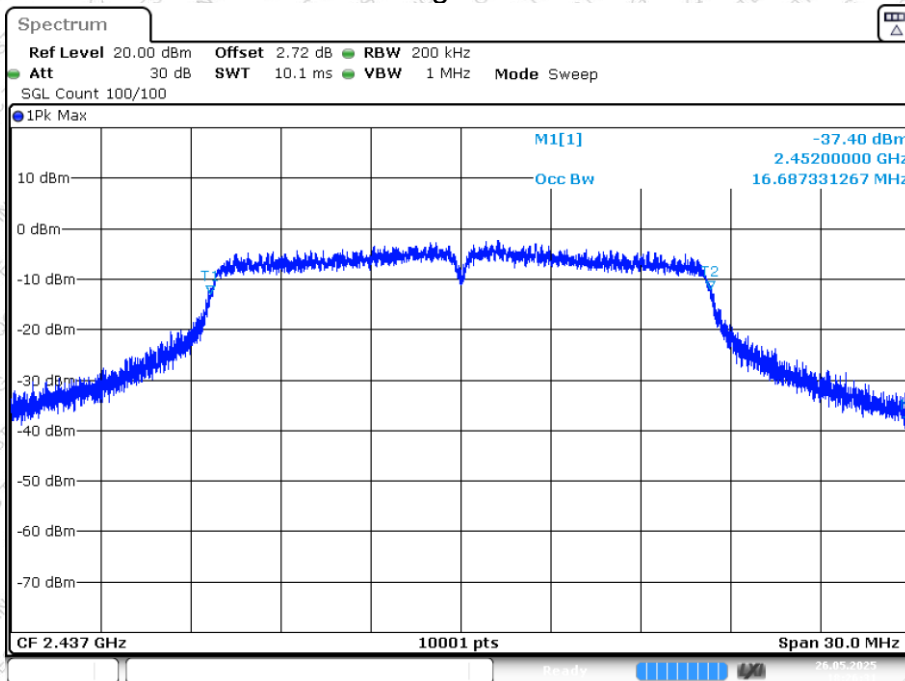




OBW NVNT g 2462MHz Ant1

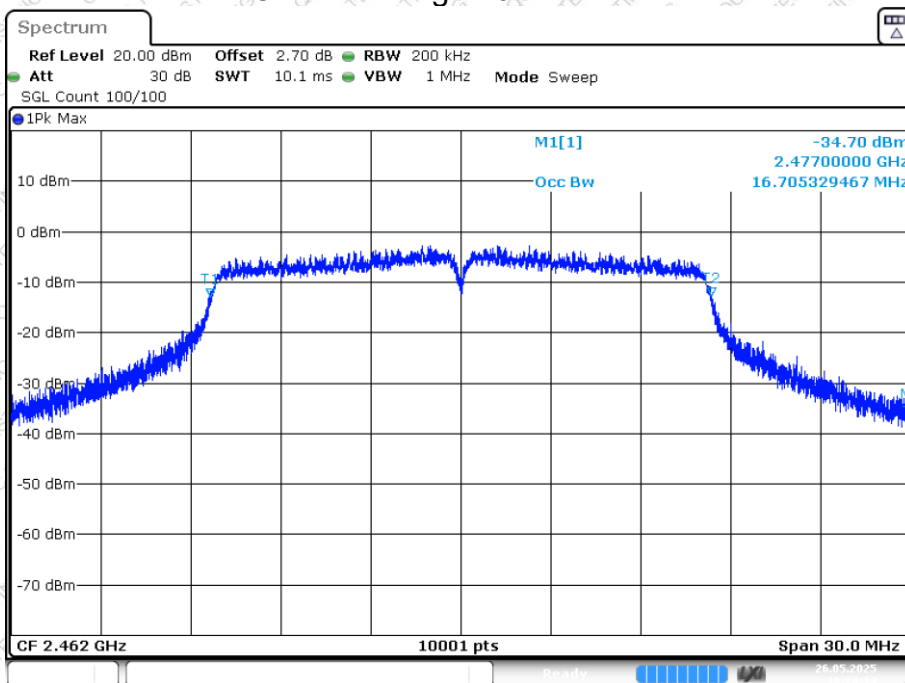

Date: 26.MAY.2025 18:28:14


OBW NVNT g 2412MHz Ant2

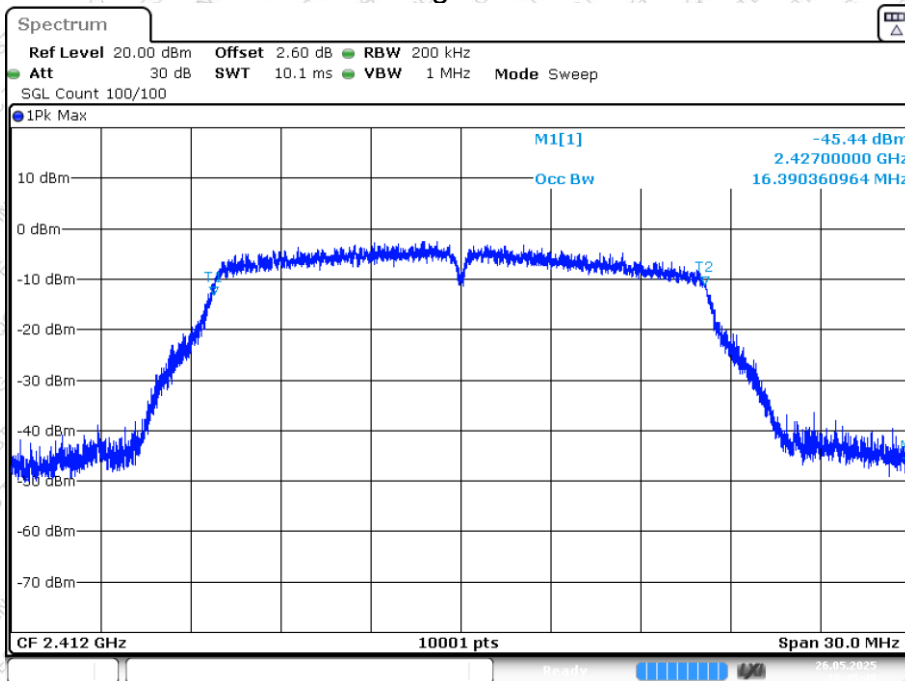

Date: 26.MAY.2025 18:45:49




OBW NVNT g 2437MHz Ant2

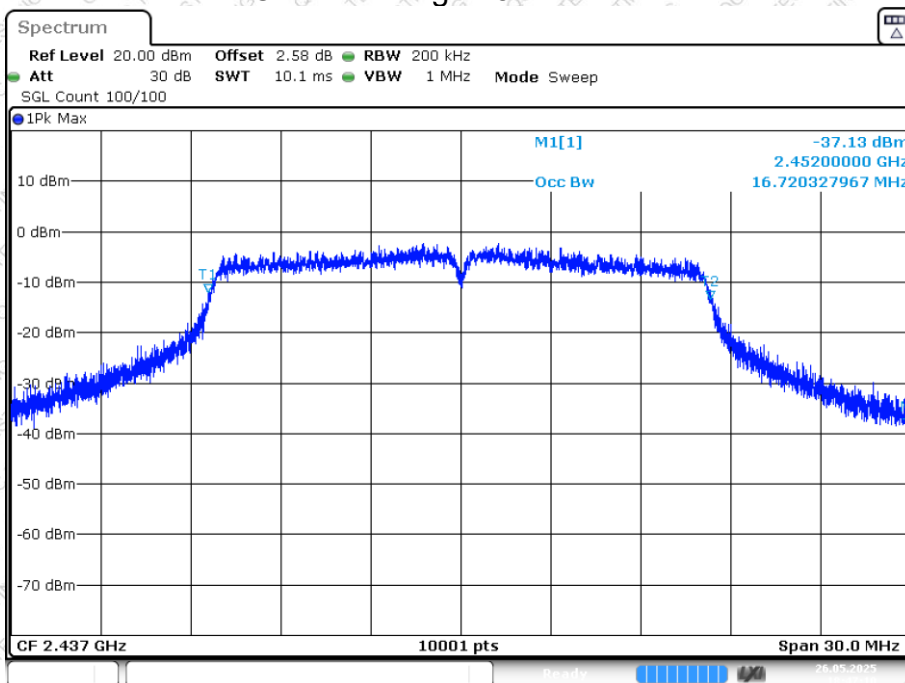

Date: 26 MAY 2025 18:47:11


OBW NVNT g 2462MHz Ant2

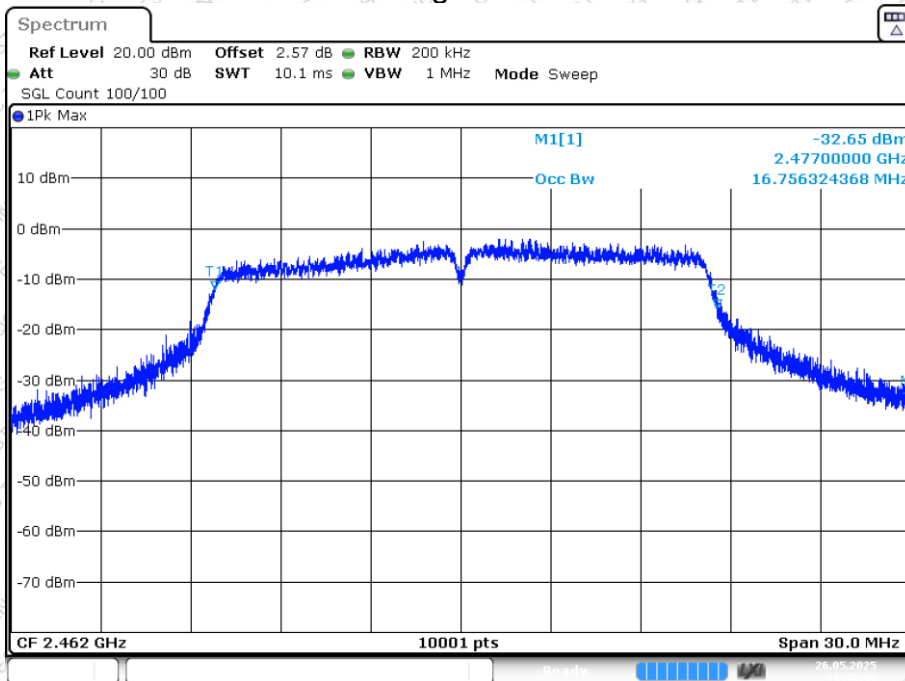


Date: 26 MAY 2025 18:48:59



OBW NVNT n20 2412MHz Ant1

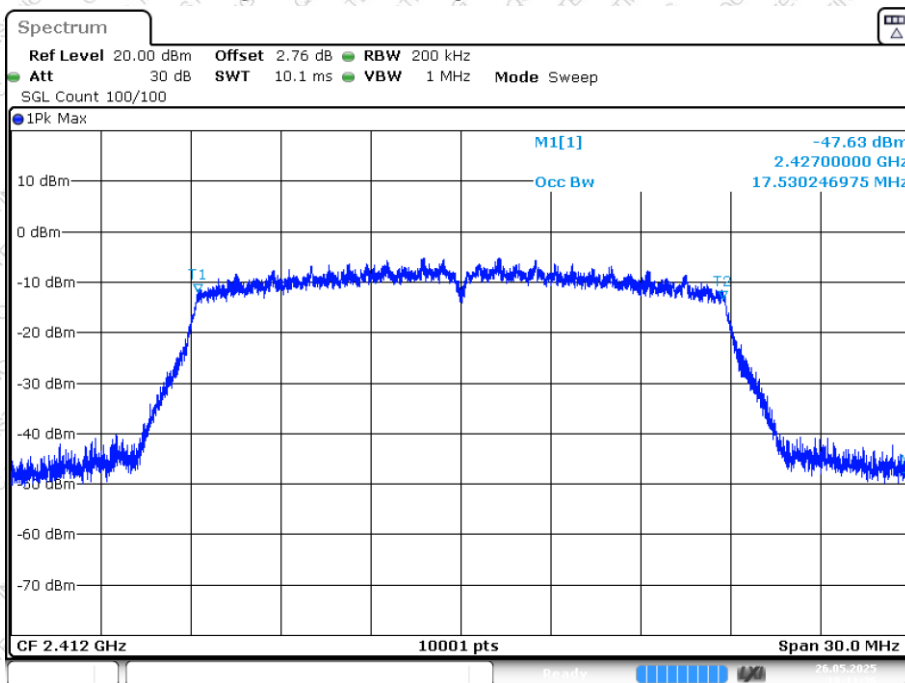


OBW NVNT n20 2412MHz Ant2

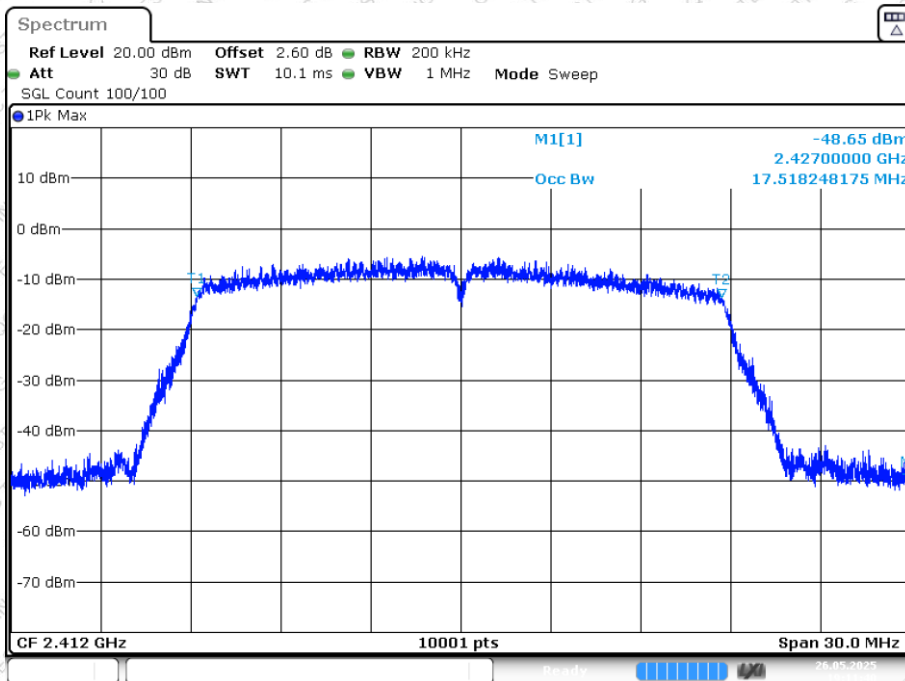




OBW NVNT n20 2437MHz Ant1

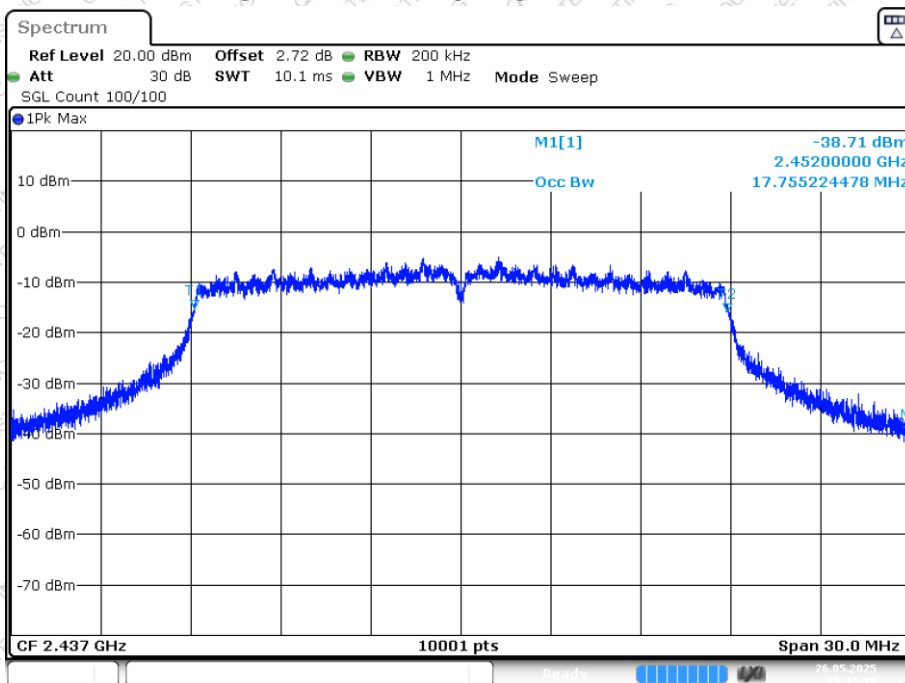

Date: 26.MAY.2025 19:13:19


OBW NVNT n20 2437MHz Ant2

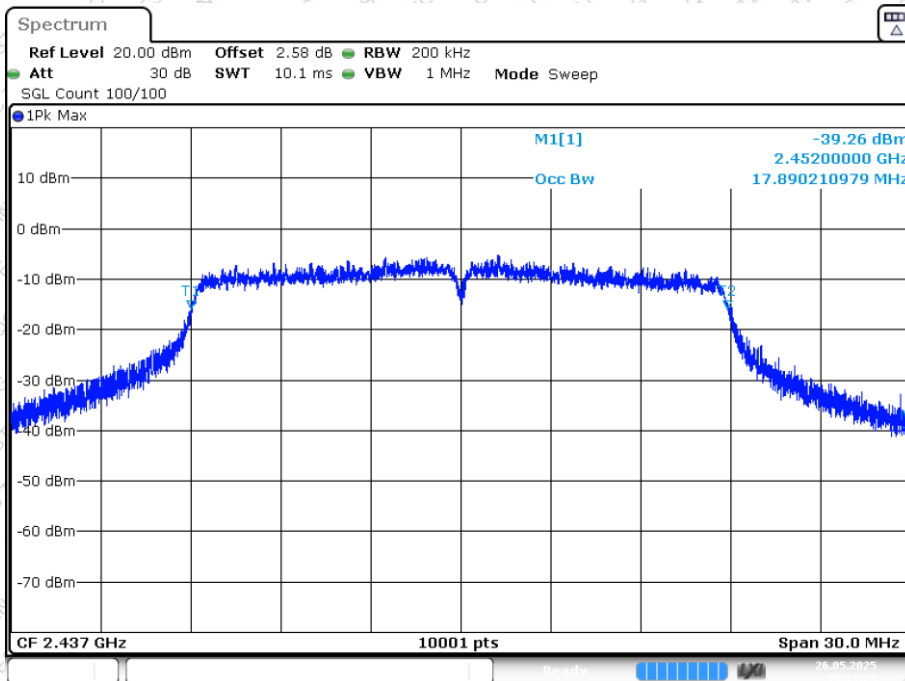


Date: 26.MAY.2025 19:13:23



OBW NVNT n20 2462MHz Ant1

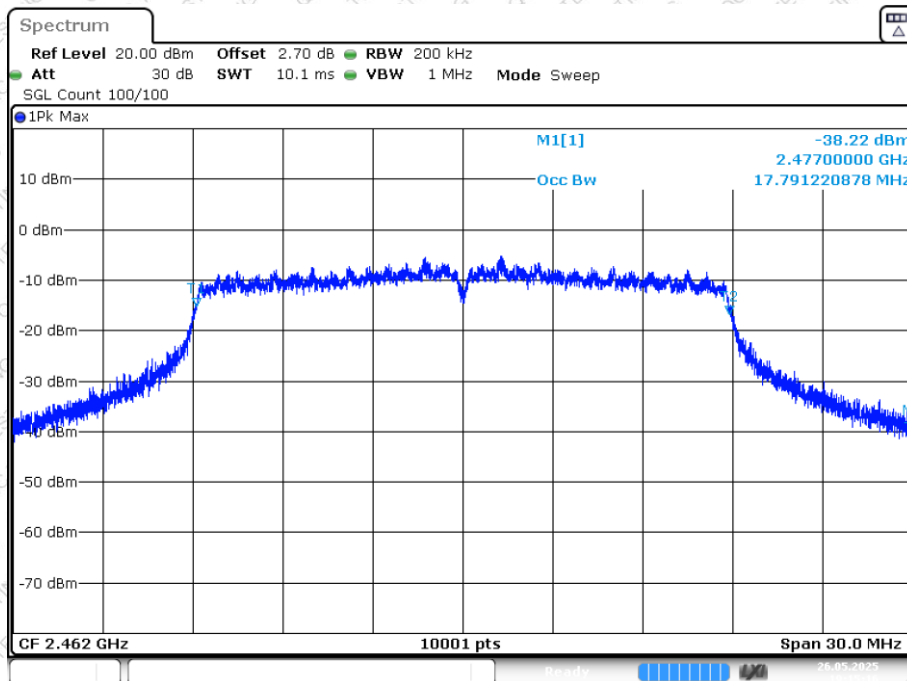


OBW NVNT n20 2462MHz Ant2

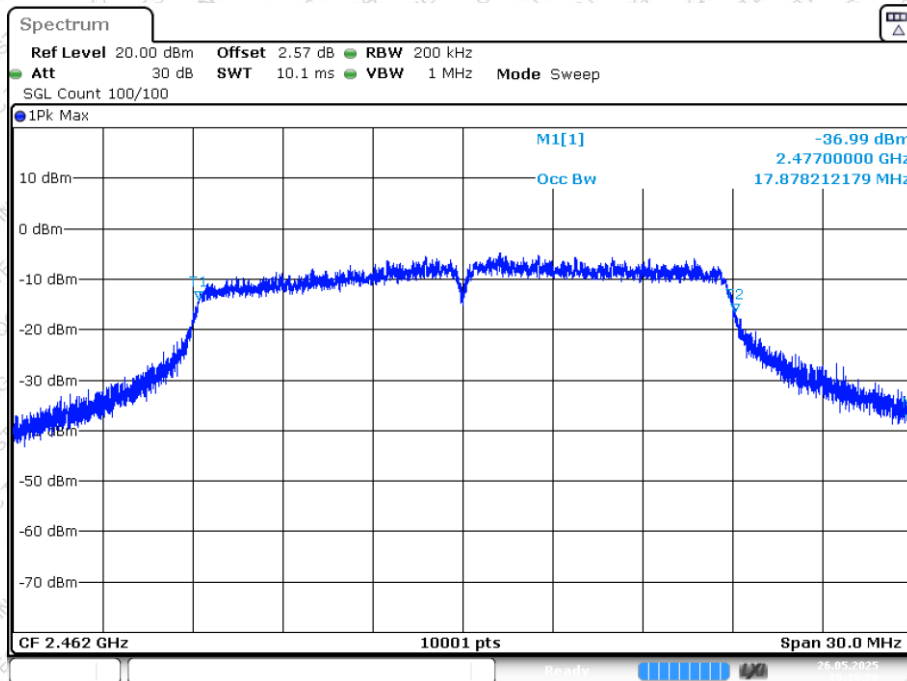




OBW NVNT n40 2422MHz Ant1

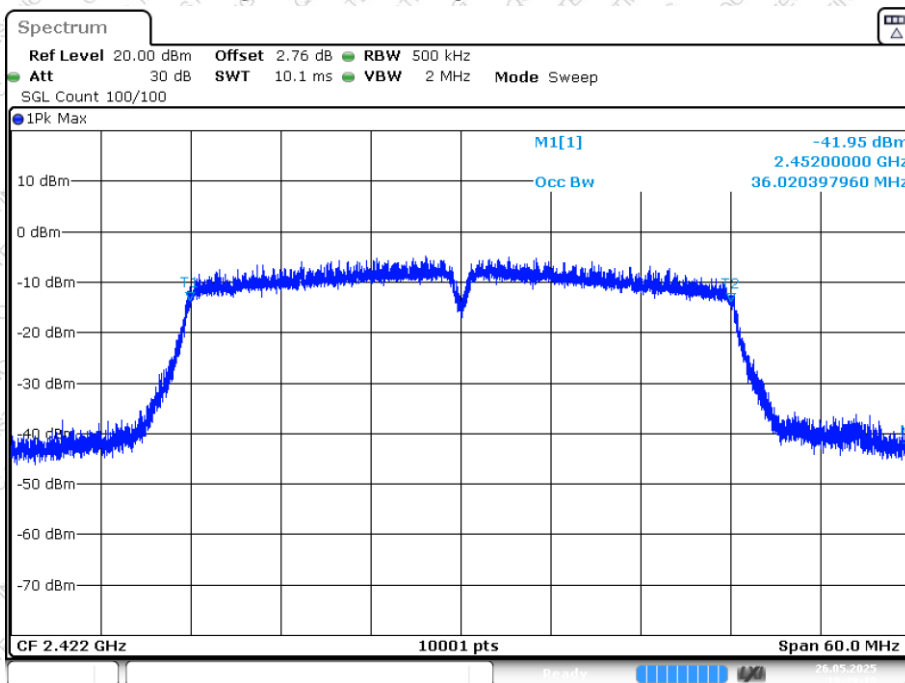


OBW NVNT n40 2422MHz Ant2

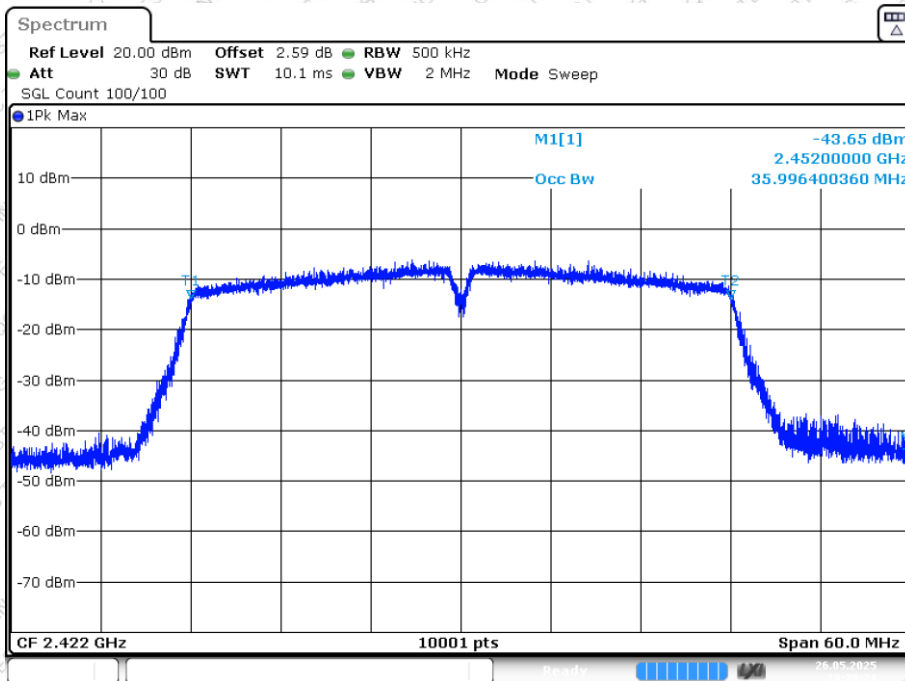




OBW NVNT n40 2437MHz Ant1

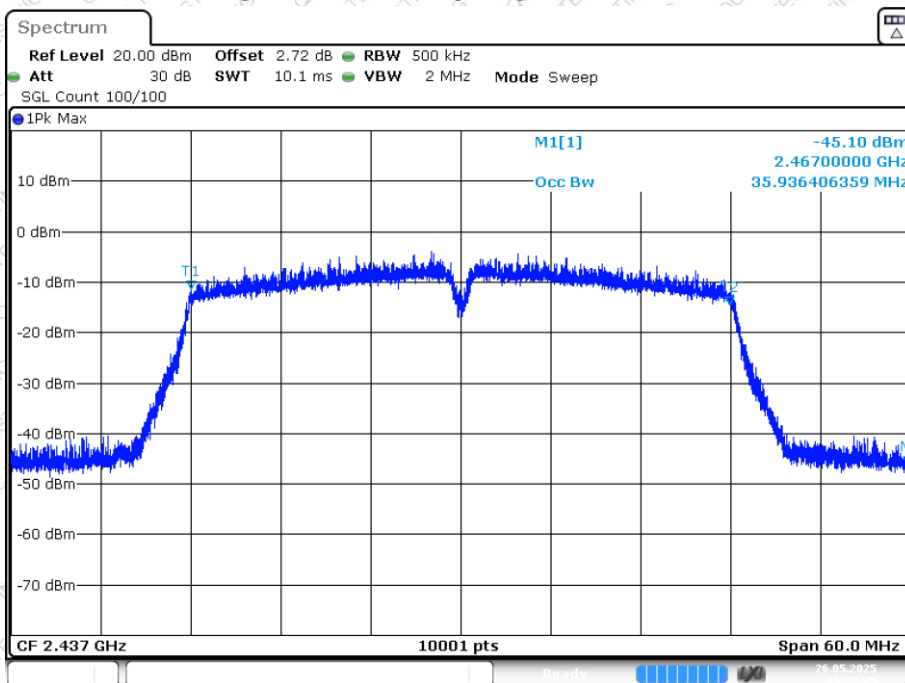


OBW NVNT n40 2437MHz Ant2

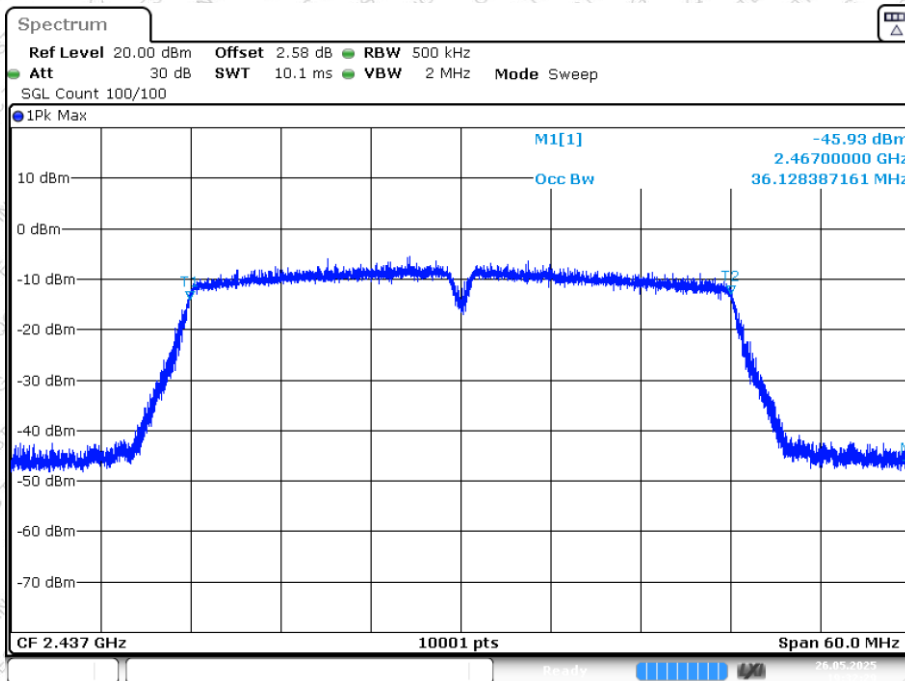




OBW NVNT n40 2452MHz Ant1

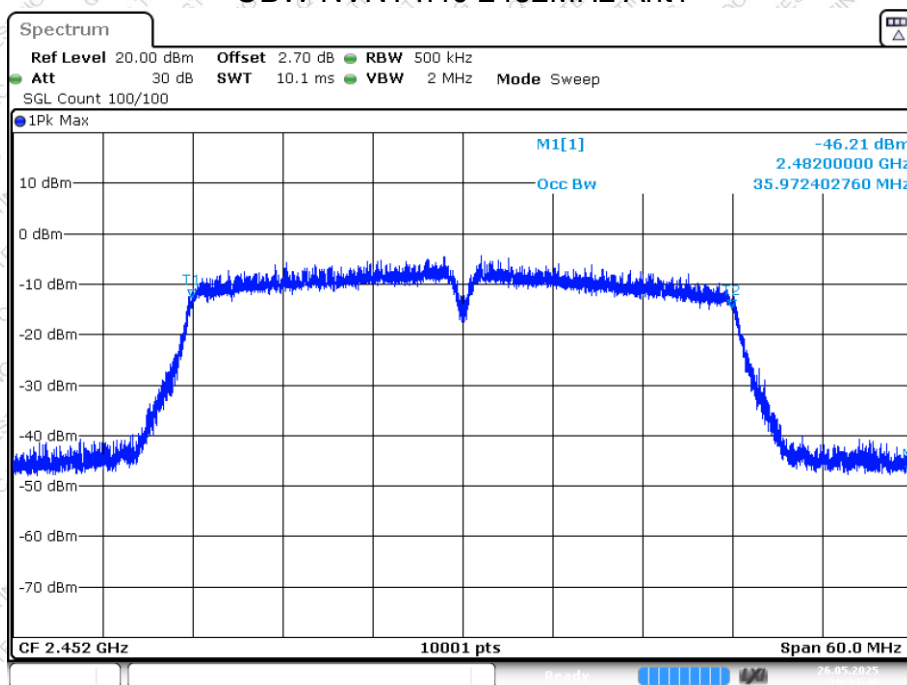


OBW NVNT n40 2452MHz Ant2

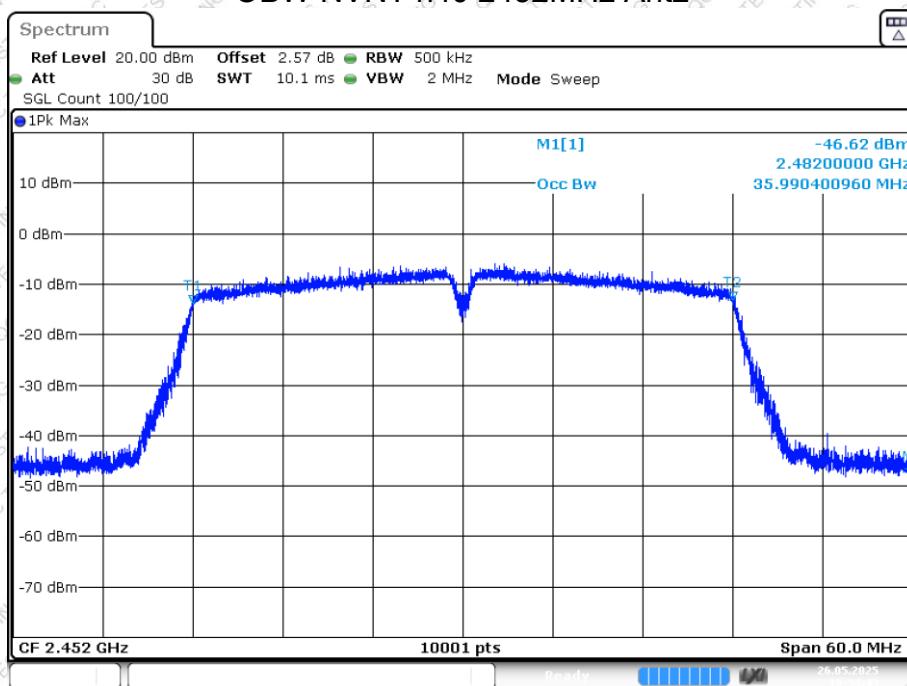



OBW NVNT ax20 2412MHz Ant1

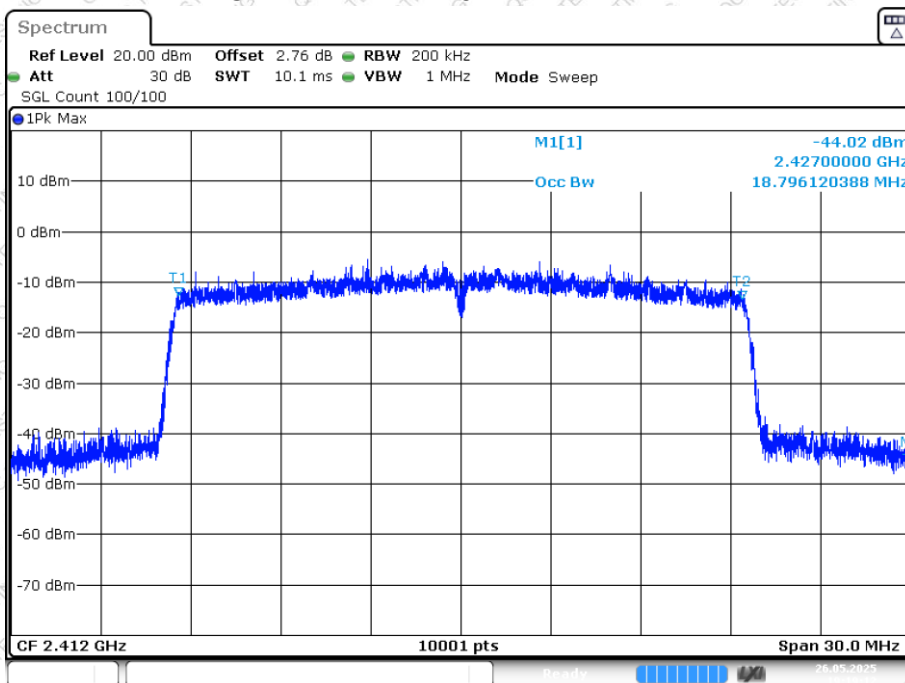

OBW NVNT ax20 2412MHz Ant2

