RF TEST REPORT



Report No.: 15071019-FCC-R3
Supersede Report No.: N/A

Applicant	Sun Cupid	Technology (Hk	() Ltd.	
Product Name	LTE Moblie	phone		
Model No.	N4L			
Serial No.	N/A			
Test Standard	FCC Part 1	5.247: 2014, AN	NSI C63.10: 20)13
Test Date	July 30 to A	lugust 13, 2015		
Issue Date	November	05, 2015		
Test Result	Pass	Fail		
Equipment compl	ied with the	specification	V	
Equipment did no	t comply with	n the specification	on 🗆	
Winnie.Zh	emg	David Hu	iang	
Winnie Zh Test Engir		David H Checke		
	This test	report may be r	eproduced in 1	

Issued by:

Test result presented in this test report is applicable to the tested sample only

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report No.	15071019-FCC-R3
Page	2 of 54

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report No.	15071019-FCC-R3
Page	3 of 54

This page has been left blank intentionally.



Test Report No.	15071019-FCC-R3
Page	4 of 54

CONTENTS

1.	REPORT REVISION HISTORY	5
2.	CUSTOMER INFORMATION	E
3.	TEST SITE INFORMATION	5
4.	EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5.	TEST SUMMARY	9
6.	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1	ANTENNA REQUIREMENT	10
6.2	DTS (6 DB&20 DB) CHANNEL BANDWIDTH	11
6.3	MAXIMUM OUTPUT POWER	17
6.4	POWER SPECTRAL DENSITY	21
6.5	BAND-EDGE & UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS	25
6.6	AC POWER LINE CONDUCTED EMISSIONS	31
6.7	RADIATED SPURIOUS EMISSIONS	37
INA	NEX A. TEST INSTRUMENT	42
ANI	NEX B. EUT AND TEST SETUP PHOTOGRAPHS	43
INA	NEX C. TEST SETUP AND SUPPORTING EQUIPMENT	49
ANI	NEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	53
A N.I.	NEVE DECLADATION OF CIMILADITY	5.4



Test Report No.	15071019-FCC-R3
Page	5 of 54

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15071019-FCC-R3	NONE	Original	November 05, 2015
			_

2. Customer information

Applicant Name	Sun Cupid Technology (HK) Ltd.
Applicant Add	16/F, CEO Tower, 77 Wing Hong St, Cheung Sha Wan, Kowloon
Manufacturer	SUNCUPID (SHENZHEN) ELECTRONIC LTD
Manufacturer Add	Baolong Industrial City, Longgang District, Shenzhen Hi-Tech Road, Building 1, A 7

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
Lab Address	South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong
	China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0



Test Report No.	15071019-FCC-R3
Page	6 of 54

4. Equipment under Test (EUT) Information

Description of EUT: LTE Moblie p

Main Model: N4L

Serial Model: N/A

Date EUT received: July 29, 2015

Test Date(s): July 30 to August 13, 2015

Equipment Category : DTS

GSM850: 0.08 dBi PCS1900: 0.8 dBi

UMTS-FDD Band V: 0.08 dBi UMTS-FDD Band IV: 0.73 dBi UMTS-FDD Band II: 0.89 dBi Bluetooth/BLE: 0.93 dBi

WIFI(2.4G): 0.93 dBi

Antenna Gain: WIFI(5G): 1.82 dBi

LTE Band 2: 0.88 dBi LTE Band 4: 0.75 dBi LTE Band 5: 0.07 dBi LTE Band 12: -1.73 dBi LTE Band 17: -1.73 dBi

GPS:-0.32dBi

GSM / GPRS: GMSK EGPRS: GMSK, 8PSK

UMTS-FDD: QPSK, 16QAM 802.11a/b/g/n: DSSS, OFDM

Type of Modulation:

Bluetooth: GFSK, π /4DQPSK, 8DPSK

BLE: GFSK

LTE Band: QPSK, 16QAM

GPS:BPSK



Test Report No.	15071019-FCC-R3
Page	7 of 54

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz

PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz

UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz

UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz;

RX: 2112.4 ~ 2152.6 MHz

UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz;

RX: 1932.4 ~ 1987.6 MHz

WIFI:802.11b/g/n(20M): 2412-2462 MHz

RF Operating Frequency (ies): WIFI:802.11n(40M): 2422-2452 MHz

WIFI:802.11a,n(20,40M): 5150-5250 MH

Bluetooth& BLE: 2402-2480 MHz

LTE Band 2 TX: $1852.5 \sim 1907.5$ MHz; RX: $1932.5 \sim 1987.5$ MHz LTE Band 4 TX: $1712.5 \sim 1752.5$ MHz; RX: $2112.5 \sim 2152.5$ MHz LTE Band 5 TX: $826.5 \sim 846.5$ MHz; RX: $871.5 \sim 891.5$ MHz LTE Band 12 TX: $699.7 \sim 715.3$ MHz; RX: $729.7 \sim 745.3$ MHz LTE Band 17 TX: $706.5 \sim 713.5$ MHz; RX: $736.5 \sim 743.5$ MHz

GPS RX:1575.42 MHz

802.11b:9.12dBm

802.11g:8.95dBm

Max. Output Power: 802.11n(20M):8.80dBm

802.11n(40M):9.12dBm

GSM 850: 124CH

PCS1900: 299CH

UMTS-FDD Band V: 102CH

UMTS-FDD Band IV: 202CH

UMTS-FDD Band II: 277CH

Number of Channels:

WIFI:802.11b/g/n(20M): 11CH

WIFI:802.11n(40M): 7CH

Bluetooth: 79CH

BLE: 40CH GPS:1CH

Port: Power Port, Earphone Port, USB Port



Test Report No.	15071019-FCC-R3
Page	8 of 54

Battery:

Model:NUBN4

Spec: 3.8V,2150mAh,10.0Wh

Input Power: Adapter:

Model:KNC005N-050100U

Input: AC100-240V; 50/60Hz; 0.2A Max

Output: DC 5.0V,1A

Trade Name : NUU

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: 2ADINNUUN4L



Test Report No.	15071019-FCC-R3
Page	9 of 54

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB&20 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-



Test Report No.	15071019-FCC-R3
Page	10 of 54

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 3 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI, the gain is 0.93dBi for Bluetooth/BLE/WIFI. A permanently attached PIFA antenna for GSM/PCS/LTE and UMTS, the gain is 0.08dBi for GSM850, 0.8dBi for PCS1900,0.08dBi for UMTS-FDD Band V, 0.73dBi for UMTS-FDD Band IV,0.89dBi for UMTS-FDD Band II,0.88dBi for LTE Band 2,0.75dBi for LTE Band 4, 0.07dBi for LTE Band5,-1.73dBi for LTE Band 12, -1.73dBi for LTE Band 17.

A permanently attached PIFA antenna for GPS, the gain is -0.32dBi for GPS.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.



Test Report No.	15071019-FCC-R3
Page	11 of 54

6.2 DTS (6 dB&20 dB) Channel Bandwidth

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	August 06, 2015
Tested By :	Winnie Zhang

			Γ	
Spec	Item	Requirement Applica		
§ 15.247(a)(2)	a)	6dB BW≥ 500kHz; 20dB BW≥ 500kHz;	~	
RSS Gen(4.6.1)	b)	99% BW: For FCC reference only; required by IC.	~	
Test Setup	Spectrum Analyzer EUT			
	55807	4 D01 DTS MEAS Guidance v03r02, 8.1 DTS bandwidth		
	6dB b	andwidth_		
	a) Se	t RBW = 100 kHz.		
	b) Set the video bandwidth (VBW) ≥ 3 × RBW.			
	c) Detector = Peak.			
	d) Trace mode = max hold.			
	e) Sweep = auto couple.			
	f) Allow the trace to stabilize.			
	g) Measure the maximum width of the emission that is constrained by the freq			
Test Procedure	uencies associated with the two outermost amplitude points (upper and lower fr			
restriocedure	equencies) that are attenuated by 6 dB relative to the maximum level measure			
	d in the fundamental emission.			
	20dB bandwidth			
	C63.10 Occupied Bandwidth (OBW=20dB bandwidth)			
	1. Set RBW = 1%-5% OBW.			
	2. Set the video bandwidth (VBW) ≥ 3 x RBW.			
	3. Set the span range between 2 times and 5 times of the OBW.			
	4. Sweep time=Auto, Detector=PK, Trace=Max hold.			
		nce the reference level is established, the equipment is con-	ditioned with t	
	ypical modulating signals to produce the worst-			



Test Report No.	15071019-FCC-R3
Page	12 of 54

	case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed
	wireless device, measure the bandwidth at the 20 dB levels with respect to the
	reference level.
Remark	
Result	Pass

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}

Measurement result


Test mode	СН	Freq (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
	Low	2412	10.112	16.412	≥ 0.5
802.11b	Mid	2437	10.090	16.389	≥ 0.5
	High	2462	10.065	16.389	≥ 0.5
	Low	2412	16.503	19.350	≥ 0.5
802.11g	Mid	2437	16.486	19.255	≥ 0.5
	High	2462	16.474	19.203	≥ 0.5
000 115	Low	2412	17.677	19.664	≥ 0.5
802.11n	Mid	2437	17.716	19.661	≥ 0.5
(20M)	High	2462	17.719	19.741	≥ 0.5
000.44	Low	2422	36.199	38.622	≥ 0.5
802.11n	Mid	2437	36.341	38.553	≥ 0.5
(40M)	High	2452	36.353	38.583	≥ 0.5



Test Report No.	15071019-FCC-R3
Page	13 of 54


Test Plots


6dB Bandwidth measurement result

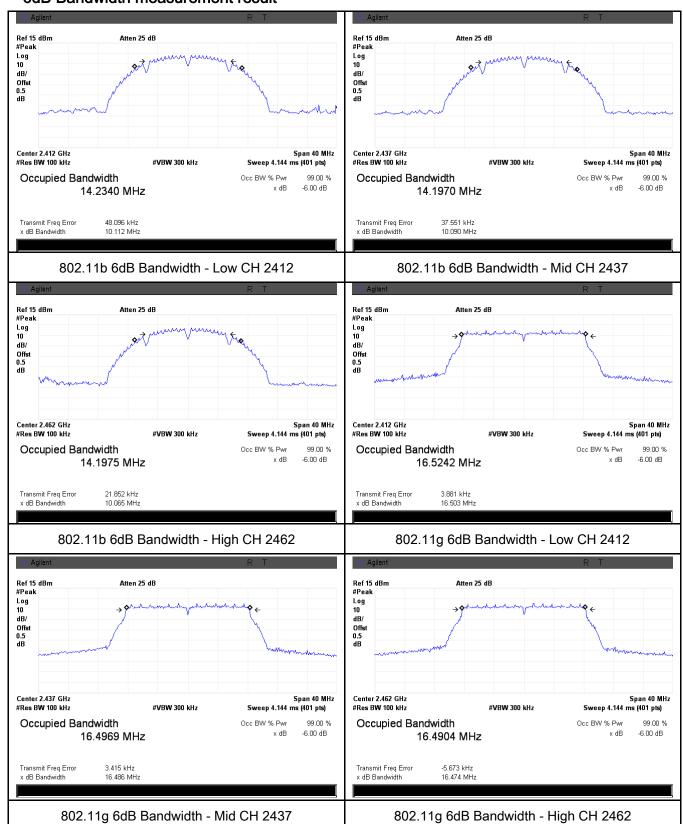




Test Report No.	15071019-FCC-R3
Page	14 of 54







802.11n20 6dB Bandwidth - Low CH 2412




802.11n20 6dB Bandwidth - Mid CH 2437



802.11n20 6dB Bandwidth - High CH 2462



802.11n40 6dB Bandwidth - Low CH 2422




802.11n40 6dB Bandwidth - Mid CH 2437


802.11n40 6dB Bandwidth - High CH 2452




Test Report No.	15071019-FCC-R3
Page	15 of 54


20 dB Bandwidth measurement result

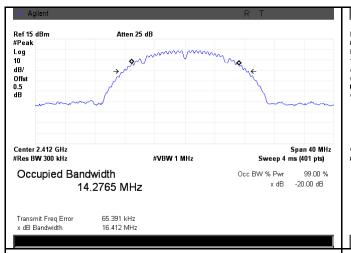





802.11b 20dB Bandwidth - Low CH 2412





802.11b 20dB Bandwidth - High CH 2462







802.11g 20dB Bandwidth - Mid CH 2437

802.11g 20dB Bandwidth - High CH 2462



Test Report No.	15071019-FCC-R3
Page	16 of 54






802.11n20 20dB Bandwidth - Low CH 2412

Atten 25 dB #Peak Log 10 dB/ Offst 0.5 dB Center 2.462 GHz #Res BW 300 kHz Span 40 MHz #VBW 1 MHz Sweep 4 ms (401 pts) Occupied Bandwidth Occ BW % Pwr 99.00 % -20.00 dB x dB 17.9070 MHz Transmit Freg Error 31.654 kHz


802.11n20 20dB Bandwidth - Mid CH 2437




802.11n20 20dB Bandwidth - High CH 2462

19.741 MHz

x dB Bandwidth



802.11n40 20dB Bandwidth - Low CH 2422



802.11n40 20dB Bandwidth - Mid CH 2437

802.11n40 20dB Bandwidth - High CH 2452



Test Report No.	15071019-FCC-R3
Page	17 of 54

6.3 Maximum Output Power

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	August 06, 2015
Tested By :	Winnie Zhang

Requirement(s):

Snoo	Ite	e Requirement					
Spec	m						
	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt					
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt					
§15.247(b)	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.					
(2),RSS210	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt					
(A8.4)	e)	FHSS in 902-928MHz with ≥ 25 & <50 channels: ≤ 0.25 Watt					
	f)	>					
Test Setup	Spectrum Analyzer EUT						
Test Procedure	558074 D01 DTS MEAS Guidance v03r02, 9.1.2 Integrated band power method Maximum output power measurement procedure - a) Set span to at least 1.5 times the OBW. - b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz. - c) Set VBW ≥ 3 x RBW. - d) Number of points in sweep ≥ 2 × span / RBW. (This gives bin-to-bin spacing ≤ RBW/2, so that narrowband signals are not lost between frequency bins.) - e) Sweep time = auto. - f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. - g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable						



Test Report No.	15071019-FCC-R3
Page	18 of 54

		triggering only on full power pulses. The transmitter shall operate at maximum
		power control level for the entire duration of every sweep. If the EUT transmits
		continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each
		transmission is entirely at the maximum power control level, then the trigger shall
		be set to " free run" .
		- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
		- i) Compute power by integrating the spectrum across the OBW of the signal
		using the instrument's band power measurement function, with band limits set
		equal to the OBW band edges. If the instrument does not have a band power
		function, sum the spectrum levels (in power units) at intervals equal to the RBW
		extending across the entire OBW of the spectrum.
Remark		
Result		Pass Fail
Test Data	Y	es N/A
Test Plot	Y	es (See below)

Output Power measurement result


Туре	Test mode	СН	Freq (MHz)	Conducted Power (dBm)	Limit (dBm)	Result
		Low	2412	9.08	30	Pass
	802.11b	Mid	2437	9.12	30	Pass
		High	2462	9.01	30	Pass
	802.11g	Low	2412	8.95	30	Pass
		Mid	2437	8.57	30	Pass
Output		High	2462	8.50	30	Pass
power	802.11n (20M)	Low	2412	8.40	30	Pass
		Mid	2437	8.80	30	Pass
		High	2462	8.62	30	Pass
	802.11n (40M)	Low	2422	8.98	30	Pass
		Mid	2437	8.97	30	Pass
		High	2452	9.12	30	Pass



Test Report No.	15071019-FCC-R3
Page	19 of 54


Test Plots


The Average Power

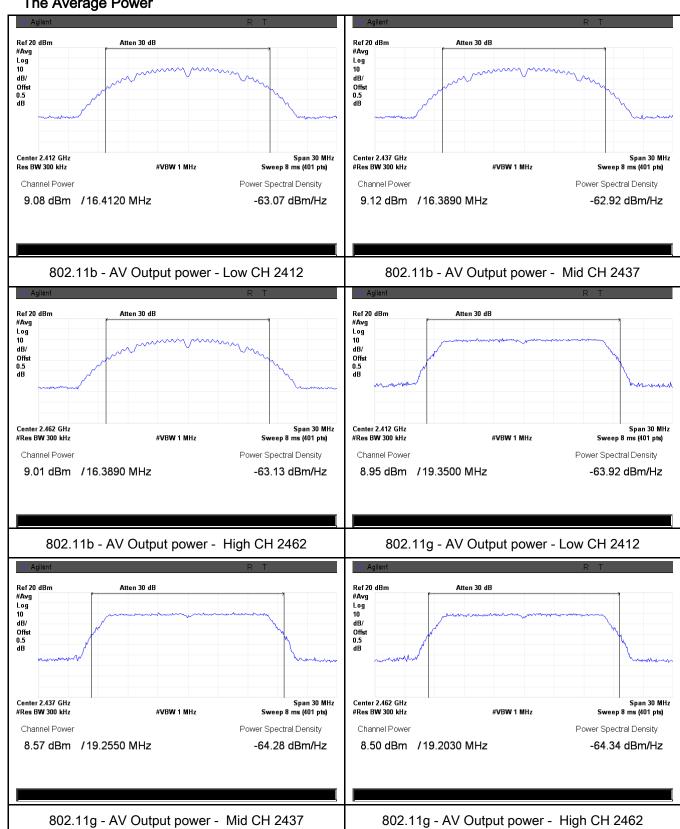




Test Report No.	15071019-FCC-R3
Page	20 of 54







802.11n20 - AV Output power - Low CH 2412




802.11n20 - AV Output power - Mid CH 2437



802.11n20 - AV Output power - High CH 2462



802.11n40 - AV Output power - Low CH 2422



802.11n40 - AV Output power - Mid CH 2437

802.11n40 - AV Output power - High CH 2452



Test Report No.	15071019-FCC-R3
Page	21 of 54

6.4 Power Spectral Density

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	August 06, 2015
Tested By :	Winnie Zhang

Spec	Item	Requirement	Applicable			
		The power spectral density conducted from the				
845 047()		intentional radiator to the antenna shall not be greater				
§15.247(e)	(a)	than 8 dBm in any 3 kHz band during any time	V			
		interval of continuous transmission.				
Test Setup		Spectrum Analyzer EUT				
	558074	D01 DTS MEAS Guidance v03r02, 10.2 power spectral dens	sity method			
	powers	spectral density measurement procedure				
	-	a) Set analyzer center frequency to DTS channel center frequency	uency.			
	-	- b) Set the span to 1.5 times the DTS bandwidth.				
	-	c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.				
	-	d) Set the VBW ≥ 3 × RBW.				
Test	-	e) Detector = peak.				
Procedure	-	f) Sweep time = auto couple.				
	-	g) Trace mode = max hold.				
	-	h) Allow trace to fully stabilize.				
	-	i) Use the peak marker function to determine the maximum a	mplitude			
		level within the RBW.				
	-	j) If measured value exceeds limit, reduce RBW (no less than	3 kHz) and			
		repeat.				
Remark						
Result	Pas	ss Fail				



Test Report No.	15071019-FCC-R3
Page	22 of 54

Test Data

Test Plot

✓ _{Yes}

Yes (See below)

N/A

Power Spectral Density measurement result


Туре	Test mode	СН	Freq (MHz)	PSD (dBm)	Limit (dBm)	Result
		Low	2412	1.291	8	Pass
	802.11b	Mid	2437	1.253	8	Pass
		High	2462	1.083	8	Pass
		Low	2412	-4.722	8	Pass
	802.11g	Mid	2437	-5.115	8	Pass
DCD		High	2462	-5.242	8	Pass
PSD	000 115	Low	2412	-4.863	8	Pass
	802.11n	Mid	2437	-5.236	8	Pass
	(20M)	High	2462	-5.390	8	Pass
	802.11n	Low	2422	-3.428	8	Pass
		Mid	2437	-3.495	8	Pass
	(40M)	High	2452	-3.750	8	Pass



Test Report No.	15071019-FCC-R3
Page	23 of 54


Test Plots

Power Spectral Density measurement result

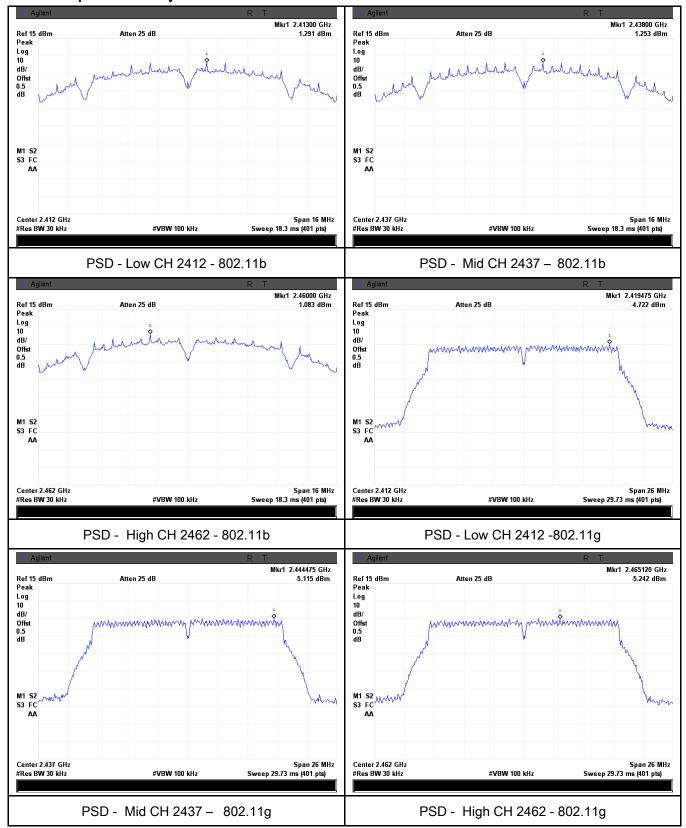



Test Report No.	15071019-FCC-R3
Page	24 of 54

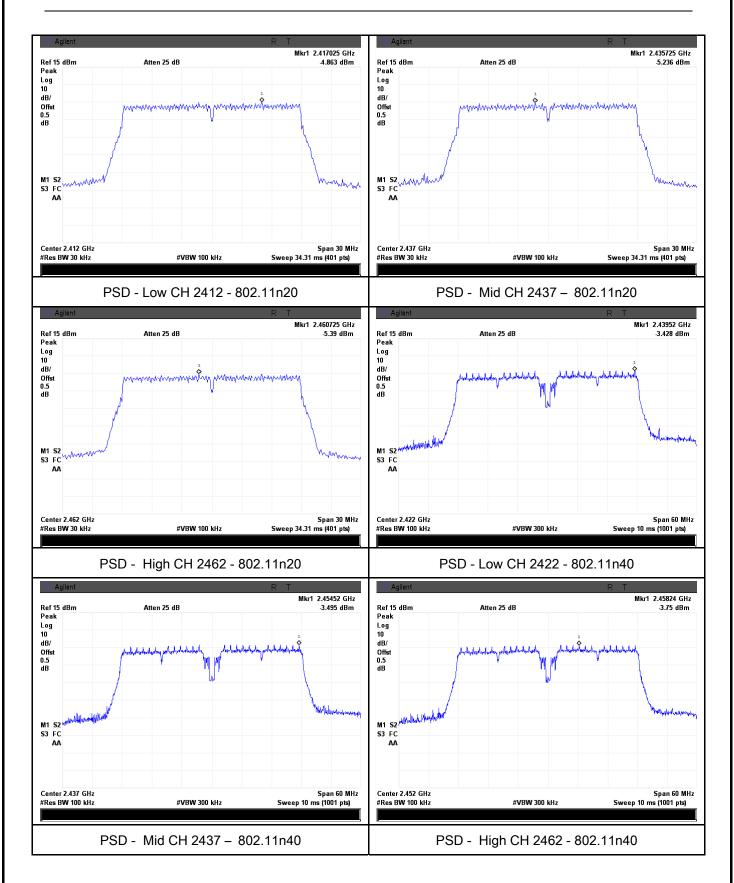



Test Report No.	15071019-FCC-R3
Page	25 of 54

6.5 Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	August 06, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	V
Test Setup	Ant. Tower Variable Support Units Ground Plane Test Receiver		
Test Procedure	 Radiated Method Only 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, 		nent. Put it on ansmitting perating range,



Test Report No.	15071019-FCC-R3
Page	26 of 54


	check the emission of EUT, if pass then set Spectrum Analyzer as below:
	a. The resolution bandwidth and video bandwidth of test receiver/spectrum
	analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.
	b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and
	video bandwidth is 3MHz with Peak detection for Peak measurement at
	frequency above 1GHz.
	c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the
	video bandwidth is 10Hz with Peak detection for Average Measurement as below
	at frequency above 1GHz.
	- 4. Measure the highest amplitude appearing on spectral display and set it as a
	reference level. Plot the graph with marking the highest point and edge
	frequency.
	S. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	Pass Fail

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}




Test Report No.	15071019-FCC-R3
Page	27 of 54

Test Plots Band Edge measurement result

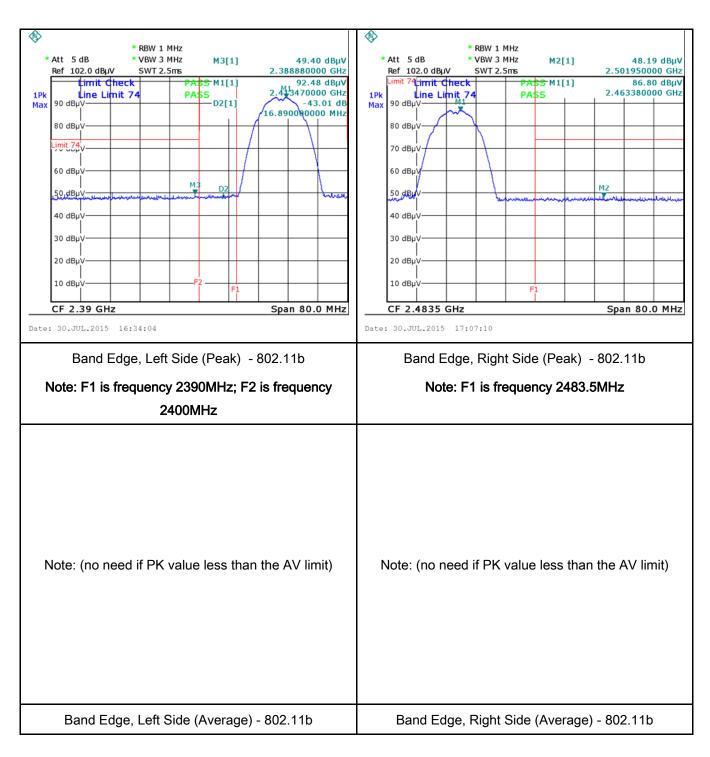




Test Report No.	15071019-FCC-R3
Page	28 of 54

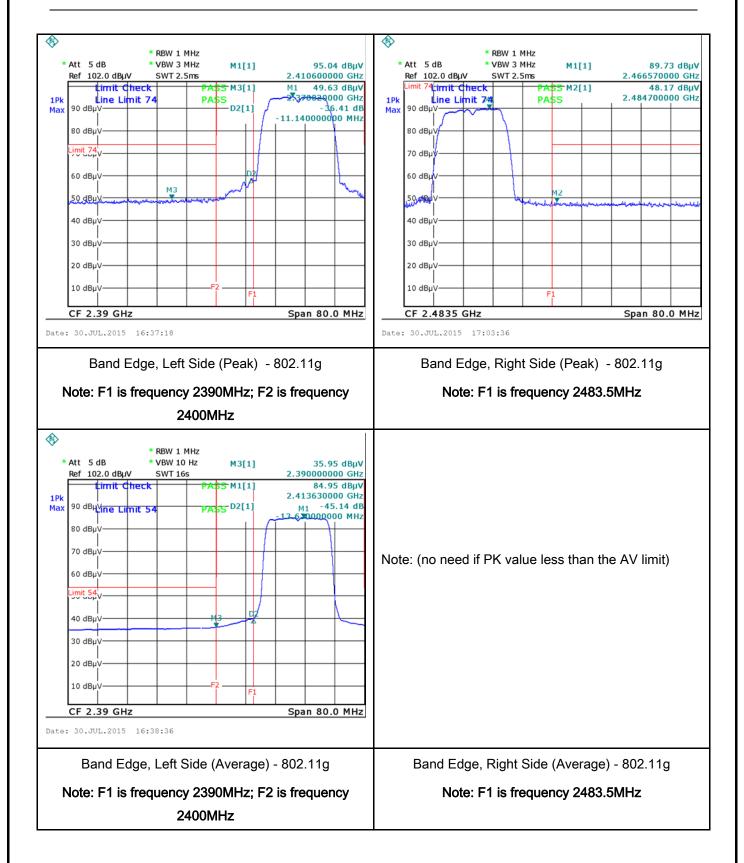




Test Report No.	15071019-FCC-R3
Page	29 of 54

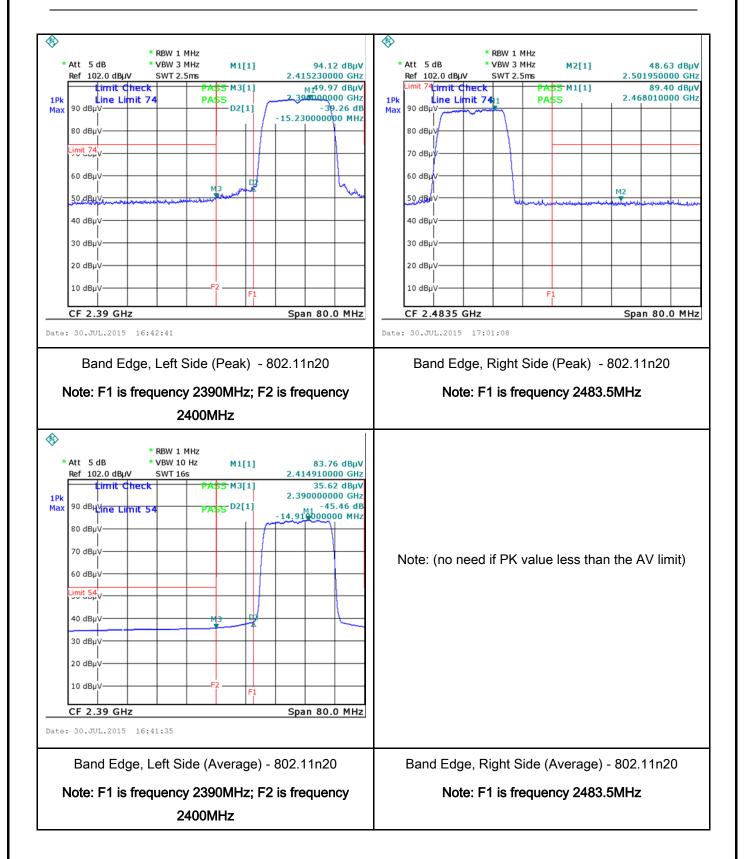



2400MHz

Test Report No.	15071019-FCC-R3
Page	30 of 54

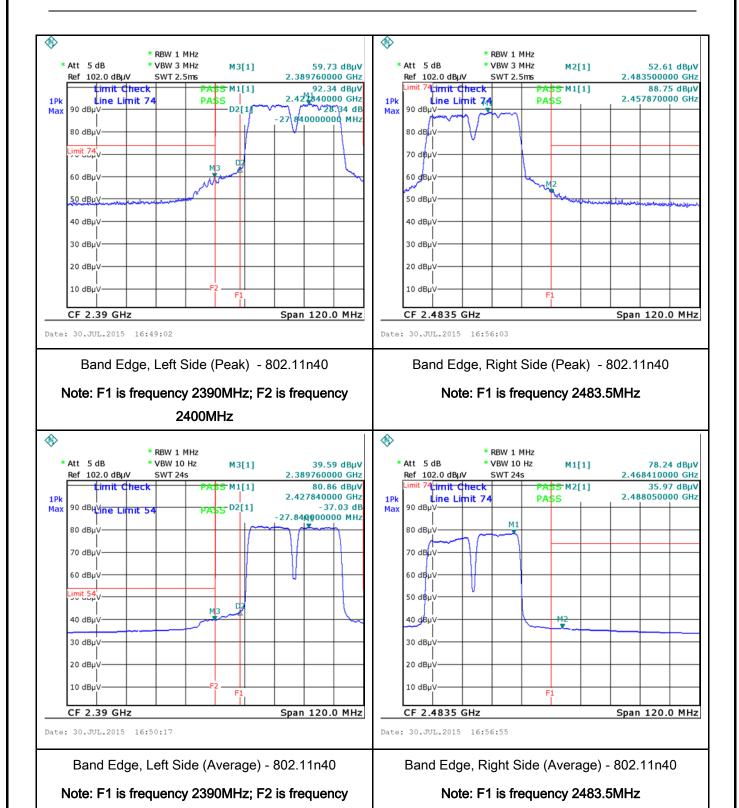



Test Report No.	15071019-FCC-R3
Page	31 of 54

6.6 AC Power Line Conducted Emissions

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	August 08, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement		Applicable	
47CFR§15. 207, RSS210	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.			<u>\</u>
(A8.1)		Frequency ranges	Limit (dBμV)	
(7.0.1)		(MHz)	QP	Average	
		0.15 ~ 0.5	66 – 56	56 – 46	
		0.5 ~ 5	56	46	
		5 ~ 30	60	50	
Test Setup	Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.				
Procedure	 The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. All other supporting equipment were powered separately from another main supply. 				



Test Report No.	15071019-FCC-R3
Page	32 of 54


	5. The EUT was switched on and allowed to warm up to its normal operating condition.
	6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power)
	over the required frequency range using an EMI test receiver.
	7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the
	selected frequencies and the necessary measurements made with a receiver bandwidth
	setting of 10 kHz.
	8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	Pass Fail
·	·

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}



Test Report No.	15071019-FCC-R3
Page	33 of 54

Test Mode: Transmitting Mode	Test Mode:	Transmitting Mode
------------------------------	------------	-------------------

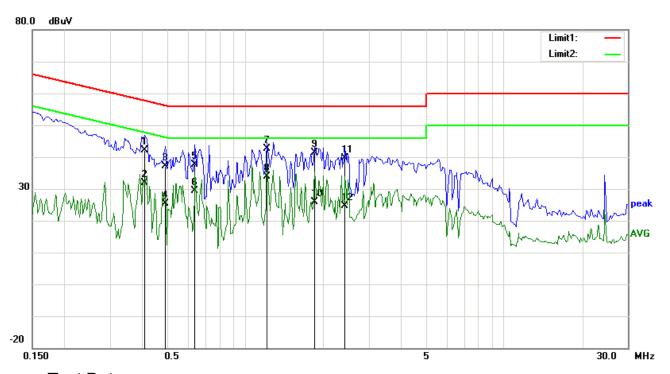

Test Data


Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBµV)	Detector	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)
1	L1	0.4078	32.12	QP	10.03	42.15	57.69	-15.54
2	L1	0.4078	21.81	AVG	10.03	31.84	47.69	-15.85
3	L1	0.4898	27.15	QP	10.03	37.18	56.17	-18.99
4	L1	0.4898	15.23	AVG	10.03	25.26	46.17	-20.91
5	L1	0.6383	27.59	QP	10.03	37.62	56.00	-18.38
6	L1	0.6383	19.45	AVG	10.03	29.48	46.00	-16.52
7	L1	1.2125	32.54	QP	10.03	42.57	56.00	-13.43
8	L1	1.2125	23.73	AVG	10.03	33.76	46.00	-12.24
9	L1	1.8531	31.43	QP	10.04	41.47	56.00	-14.53
10	L1	1.8531	15.81	AVG	10.04	25.85	46.00	-20.15
11	L1	2.4234	29.63	QP	10.05	39.68	56.00	-16.32
12	L1	2.4234	14.52	AVG	10.05	24.57	46.00	-21.43



Test Report No.	15071019-FCC-R3
Page	34 of 54

Test Mode: Transmitting Mode

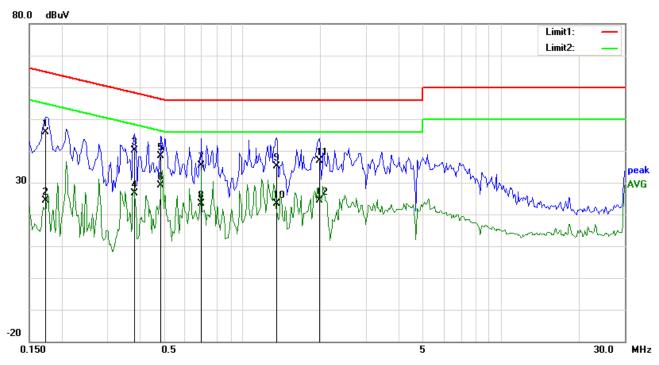

Test Data


Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBµV)	Detector	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)
1	N	0.1734	35.96	QP	10.02	45.98	64.80	-18.82
2	N	0.1734	14.29	AVG	10.02	24.31	54.80	-30.49
3	N	0.3844	30.10	QP	10.02	40.12	58.18	-18.06
4	N	0.3844	16.51	AVG	10.02	26.53	48.18	-21.65
5	N	0.4859	28.46	QP	10.02	38.48	56.24	-17.76
6	N	0.4859	19.10	AVG	10.02	29.12	46.24	-17.12
7	N	0.6969	25.24	QP	10.02	35.26	56.00	-20.74
8	N	0.6969	13.24	AVG	10.02	23.26	46.00	-22.74
9	N	1.3570	25.10	QP	10.03	35.13	56.00	-20.87
10	N	1.3570	13.42	AVG	10.03	23.45	46.00	-22.55
11	N	1.9859	26.96	QP	10.04	37.00	56.00	-19.00
12	N	1.9859	14.33	AVG	10.04	24.37	46.00	-21.63



Test Report No.	15071019-FCC-R3
Page	35 of 54

Test Mode:	Transmitting Mode

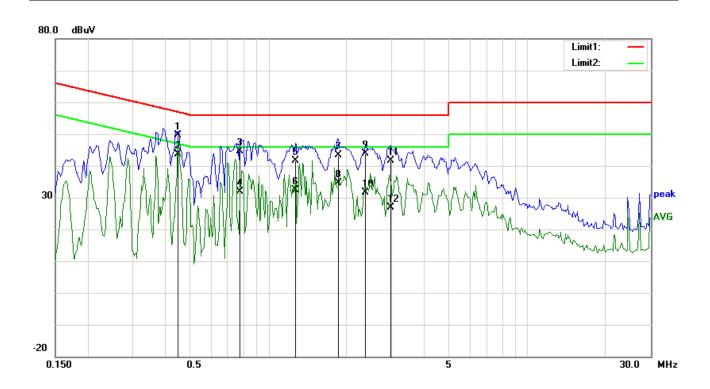

Test Data


Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBµV)	Detector	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)
1	L1	0.4469	39.59	QP	10.03	49.62	56.93	-7.31
2	L1	0.4469	33.71	AVG	10.03	43.74	46.93	-3.19
3	L1	0.7789	34.57	QP	10.03	44.60	56.00	-11.40
4	L1	0.7789	21.78	AVG	10.03	31.81	46.00	-14.19
5	L1	1.2750	31.50	QP	10.03	41.53	56.00	-14.47
6	L1	1.2750	22.42	AVG	10.03	32.45	46.00	-13.55
7	L1	1.8581	33.40	QP	10.04	43.44	56.00	-12.56
8	L1	1.8581	24.62	AVG	10.04	34.66	46.00	-11.34
9	L1	2.3648	33.80	QP	10.05	43.85	56.00	-12.15
10	L1	2.3648	21.69	AVG	10.05	31.74	46.00	-14.26
11	L1	2.9664	31.56	QP	10.05	41.61	56.00	-14.39
12	L1	2.9664	16.83	AVG	10.05	26.88	46.00	-19.12



Test Report No.	15071019-FCC-R3
Page	36 of 54

Test Mode: Transmitting Mode

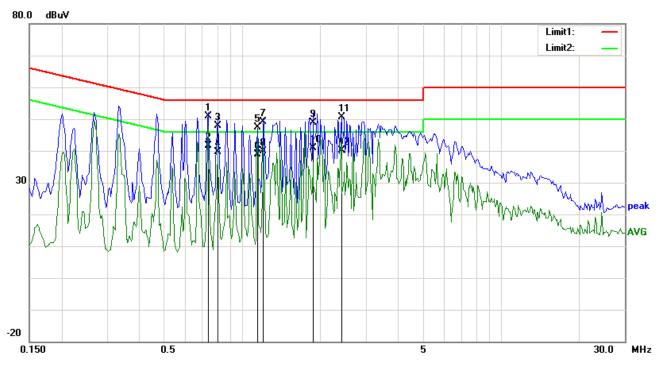

Test Data

Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBµV)	Detector	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)
1	N	0.7359	40.86	QP	10.02	50.88	56.00	-5.12
2	N	0.7359	31.63	AVG	10.02	41.65	46.00	-4.35
3	N	0.8023	37.78	QP	10.03	47.81	56.00	-8.19
4	N	0.8023	29.72	AVG	10.03	39.75	46.00	-6.25
5	N	1.1422	37.38	QP	10.03	47.41	56.00	-8.59
6	Ν	1.1422	28.84	AVG	10.03	38.87	46.00	-7.13
7	N	1.2047	39.22	QP	10.03	49.25	56.00	-6.75
8	N	1.2047	29.74	AVG	10.03	39.77	46.00	-6.23
9	Ν	1.8766	38.91	QP	10.04	48.95	56.00	-7.05
10	Ν	1.8766	30.94	AVG	10.04	40.98	46.00	-5.02
11	N	2.4156	40.52	QP	10.04	50.56	56.00	-5.44
12	N	2.4156	30.03	AVG	10.04	40.07	46.00	-5.93



Test Report No.	15071019-FCC-R3
Page	37 of 54

6.7 Radiated Spurious Emissions


Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1031mbar
Test date :	July 31, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15.	a)	Except higher limit as specified else emissions from the low-power radio exceed the field strength levels specified the level of any unwanted emission the fundamental emission. The tight edges Frequency range (MHz) 30 - 88 88 - 216 216 960	o-frequency devices shall not ecified in the following table and as shall not exceed the level of ater limit applies at the band Field Strength (µV/m) 100 150 200	\\
247(d), RSS210 (A8.5)	b)		d spectrum or digitally perating, the radio frequency ational radiator shall be at least 0 kHz bandwidth within the of the desired power, bethod on output power to be all limits specified in § 15.209(a)	>
	c)	or restricted band, emission must a emission limits specified in 15.209	also comply with the radiated	~



Test Report No.	15071019-FCC-R3
Page	38 of 54

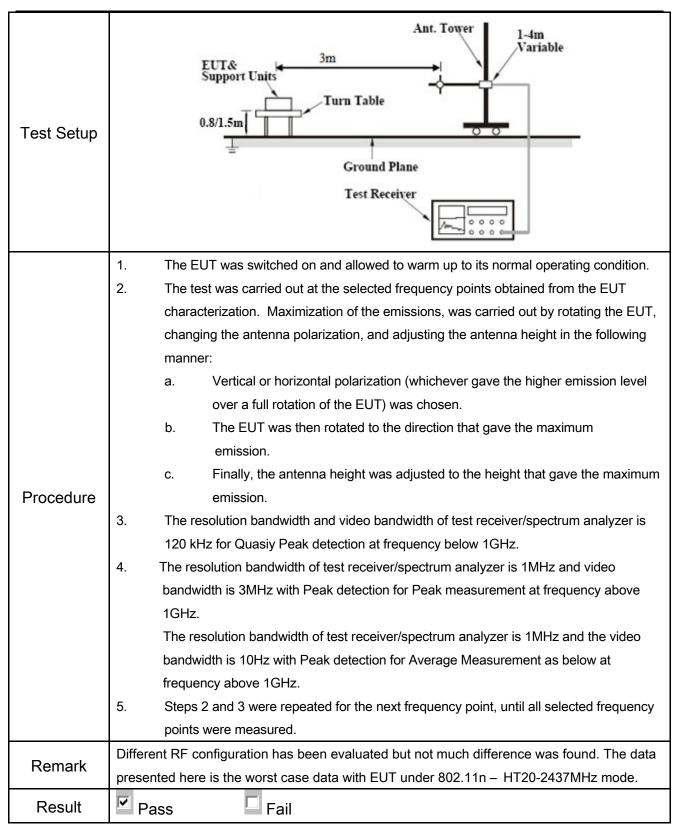


Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}



Test Report No.	15071019-FCC-R3
Page	39 of 54

(Below 1GHz)

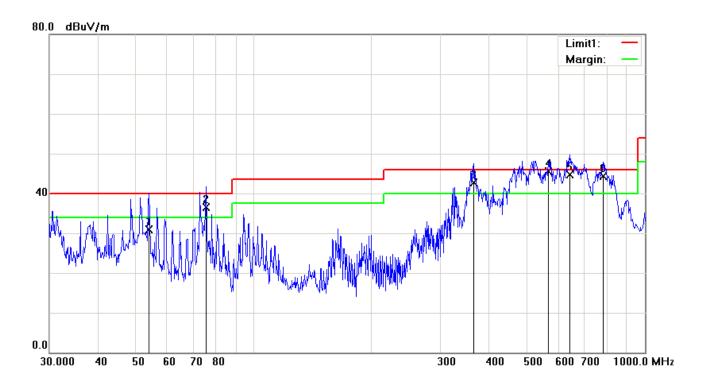

Test Data


Vertical Polarity Plot @3m

NI	D#	Frequency	Reading	Detec	Correcte	Result	Limit	Margin	l latabá	D
No	P/L	(MHz)	(dBµV)	tor	d (dB)	(dBµV)	(dBµV)	(dB)	Height	Degree
1	V	53.8981	44.56	QP	-13.64	30.92	40.00	-9.08	100	233
2	V	75.3785	50.16	QP	-13.74	36.42	40.00	-3.58	100	233
3	V	365.5031	47.86	QP	-5.10	42.76	46.00	-3.24	200	261
4	V	567.5793	46.05	QP	-0.52	45.53	46.00	-0.47	100	150
5	V	643.3948	43.90	QP	0.71	44.61	46.00	-1.39	100	150
6	V	782.7349	41.40	QP	2.93	44.33	46.00	-1.67	100	150



Test Report No.	15071019-FCC-R3
Page	40 of 54

(Below 1GHz)

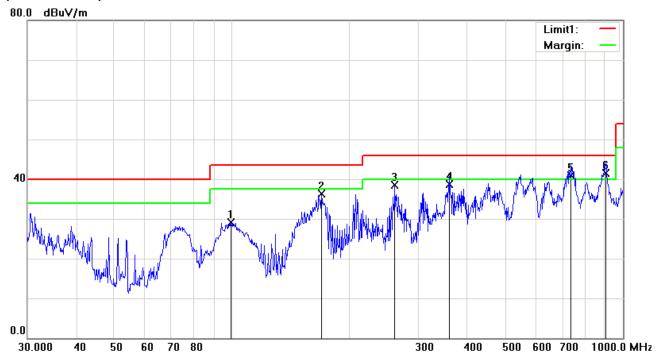

Test Data

Horizontal Polarity Plot @3m

No	P/L	Frequency	Reading	Detec	Correcte	Result	Limit	Margin	Height	Degree
INO	F/L	(MHz)	(dBµV)	tor	d (dB)	(dBµV)	(dBµV)	(dB)	Height	Degree
1	Н	99.5281	40.07	peak	-10.92	29.15	43.50	-14.35	200	0
2	Н	169.5990	45.45	peak	-9.07	36.38	43.50	-7.12	100	183
3	Н	261.0583	47.23	peak	-8.68	38.55	46.00	-7.45	100	258
4	Н	360.4477	43.93	QP	-5.22	38.71	46.00	-7.29	100	258
5	Н	734.4913	38.73	QP	2.09	40.82	46.00	-5.18	200	316
6	Н	903.3094	36.72	QP	4.73	41.45	46.00	-4.55	200	316



Test Report No.	15071019-FCC-R3
Page	41 of 54

Test Mode: T	Fransmitting Mode
--------------	-------------------

Low Channel (2412 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4824	39.12	AV	V	34	6.86	31.72	48.26	54	-5.74
4824	40.43	AV	Н	33.8	6.86	31.72	49.37	54	-4.63
4824	46.46	PK	V	34	6.86	31.72	55.6	74	-18.4
4824	47.36	PK	Н	33.8	6.86	31.72	56.3	74	-17.7

Middle Channel (2437 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4874	38.97	AV	٧	33.6	6.82	31.82	47.57	54	-6.43
4874	40.76	AV	Н	33.8	6.82	31.82	49.56	54	-4.44
4874	45.94	PK	V	33.6	6.82	31.82	54.54	74	-19.46
4874	47.18	PK	Н	33.8	6.82	31.82	55.98	74	-18.02

High Channel (2462 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4924	39.13	AV	V	34.6	6.76	31.92	48.57	54	-5.43
4924	40.28	AV	Н	34.7	6.76	31.92	49.82	54	-4.18
4924	46.15	PK	V	34.6	6.76	31.92	55.59	74	-18.41
4924	47.37	PK	Н	34.7	6.76	31.92	56.91	74	-17.09



Test Report No.	15071019-FCC-R3
Page	42 of 54

Annex A. TEST INSTRUMENT


Instrument	Model	Serial#	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	~
Line Impedance	LI-125A	191106	09/26/2014	09/25/2015	~
Line Impedance	LI-125A	191107	09/26/2014	09/25/2015	~
LISN	ISN T800	34373	09/26/2014	09/25/2015	~
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	\
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/18/2014	09/17/2015	~
Power Splitter	1#	1#	09/02/2014	09/01/2015	<u><</u>
DC Power Supply	E3640A	MY40004013	09/18/2014	09/17/2015	>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	~
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	~
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<u><</u>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	<u><</u>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	Z.
Universal Radio Communication Tester	CMU200	121393	09/26/2014	09/25/2015	V



Test Report No.	15071019-FCC-R3
Page	43 of 54


Annex B. EUT and Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

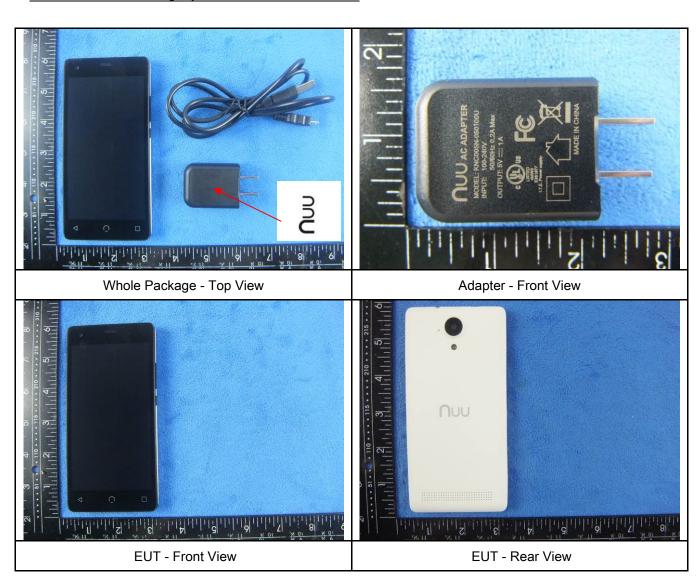



Test Report No.	15071019-FCC-R3
Page	44 of 54



EUT - Top View

EUT - Bottom View



EUT - Left View



EUT - Right View



Test Report No.	15071019-FCC-R3
Page	45 of 54

Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1

Cover Off - Top View 2







Battery - Rear View



Mainbard with Shielding - Front View



Mainboard without shielding - Front View




Test Report No.	15071019-FCC-R3
Page	46 of 54




NED ATEK

Mainbard with Shielding - Rear View

Mainbard without Shielding - Rear View





Mini Mainboard - Front View

Mini Mainboard - Rear View





LCD - Front View

LCD - Rear View



Test Report No.	15071019-FCC-R3
Page	47 of 54





GSM/PCS/UMTS-FDD/LTE Antenna View

WIFI/BT/BLE - Antenna View



GPS - Antenna View



Test Report No.	15071019-FCC-R3
Page	48 of 54

Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View



Radiated Spurious Emissions Test Setup Below 1GHz



Radiated Spurious Emissions Test Setup Above 1GHz




Test Report No.	15071019-FCC-R3
Page	49 of 54

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

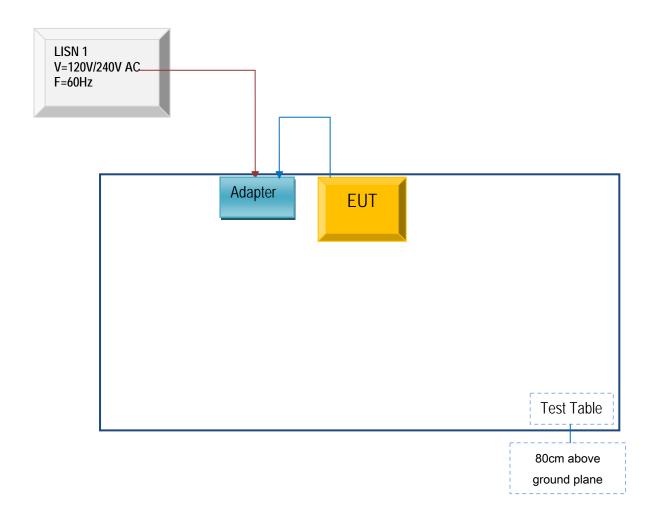



Test Report No.	15071019-FCC-R3
Page	50 of 54


Block Configuration Diagram for Radiated Emissions (Below 1GHz).

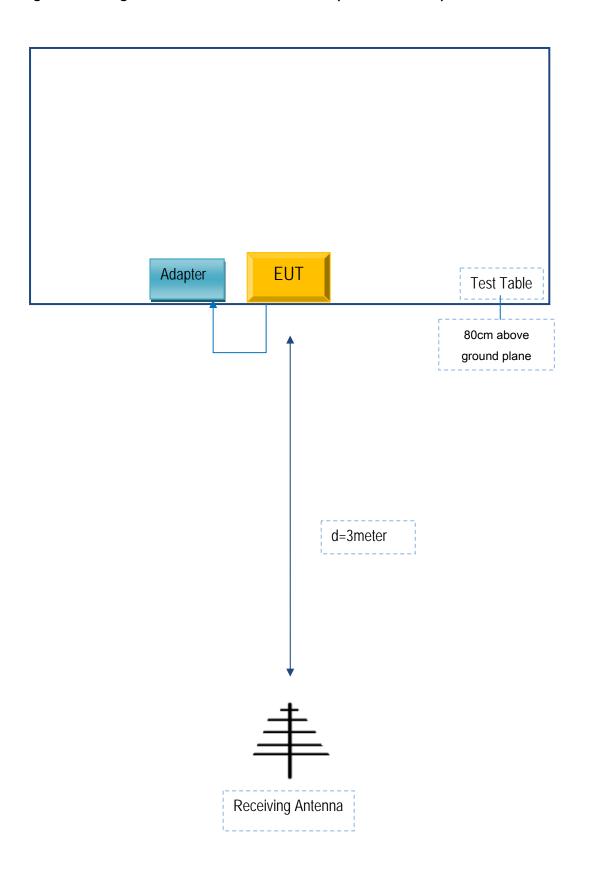



Test Report No.	15071019-FCC-R3
Page	51 of 54

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

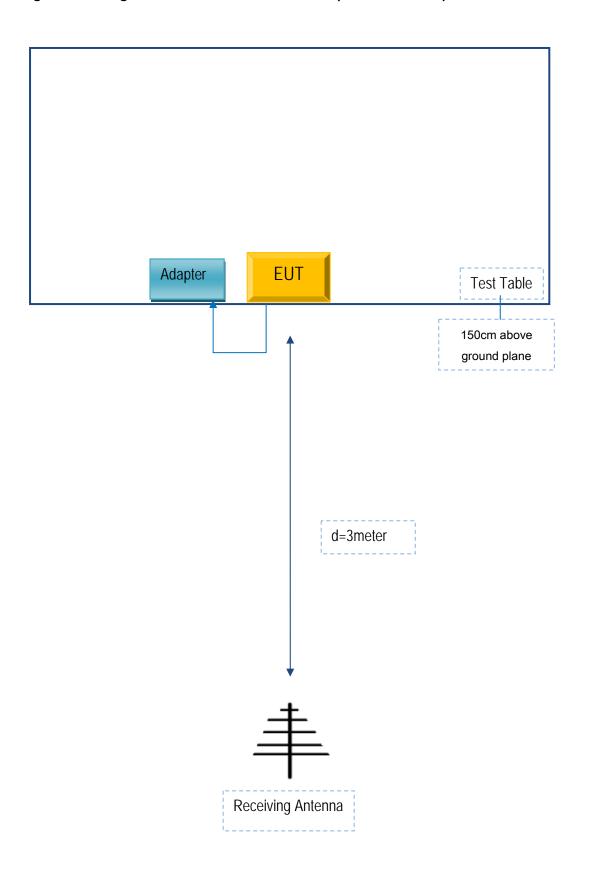



Test Report No.	15071019-FCC-R3
Page	52 of 54

Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A



Test Report No.	15071019-FCC-R3
Page	53 of 54

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment



Test Report No.	15071019-FCC-R3
Page	54 of 54

Annex E. DECLARATION OF SIMILARITY

N/A