

GSM850 Head

Communication System: UID 0, GPRS 4TS (0); Communication System Band: GSM 850 ;

Frequency: 836.6 MHz;

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.59$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 1.31 W/kg

Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.34 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.334 W/kg

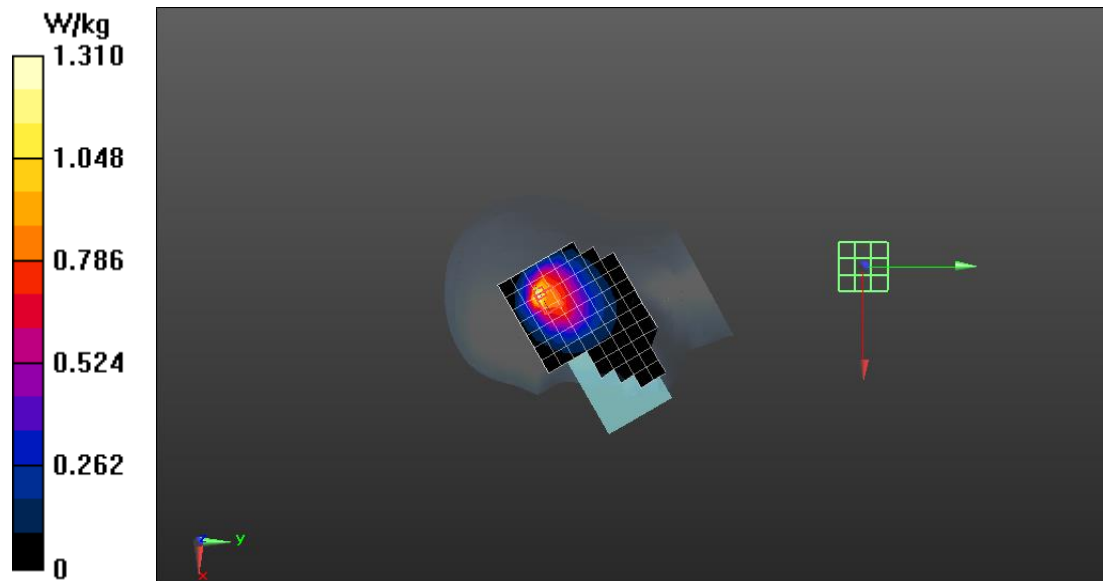

GSM 850 Body

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz;

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.582$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.631 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.96 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.707 W/kg

SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.375 W/kg

Maximum value of SAR (measured) = 0.632 W/kg

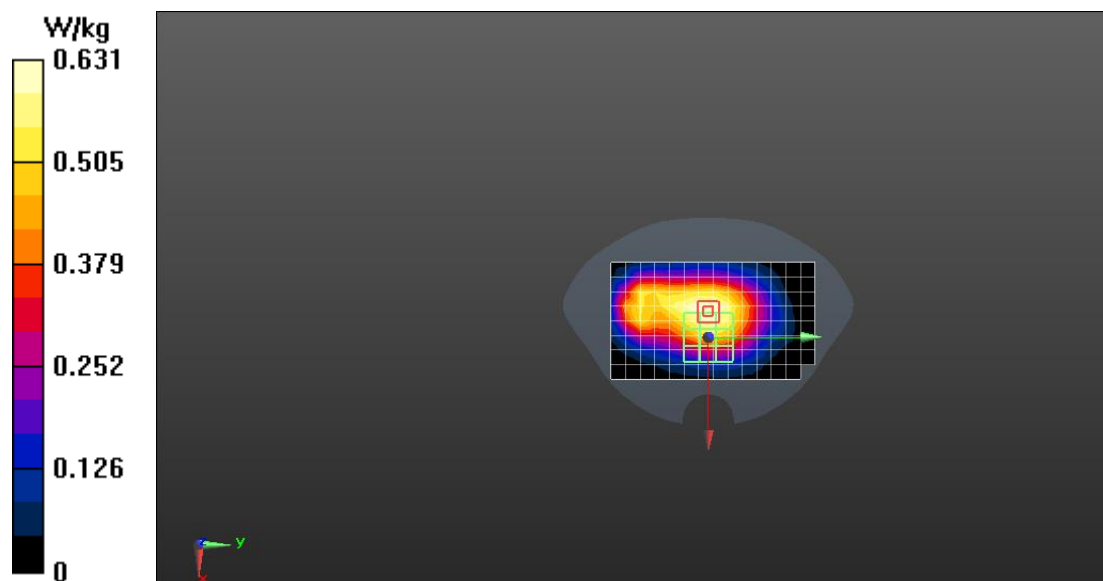

GSM1900 Head

Communication System: UID 0, GPRS 4TS (0); Communication System Band: GSM 1900;

Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.95$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.250 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.922 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.266 W/kg

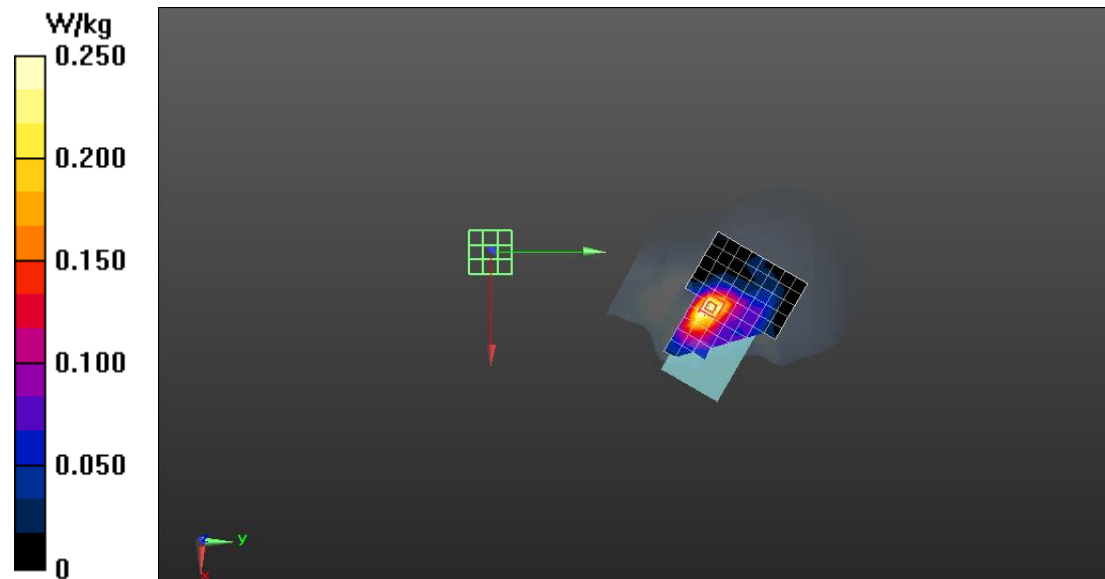

GSM 1900 Body

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz;

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.985$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.50 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 32.91 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.569 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

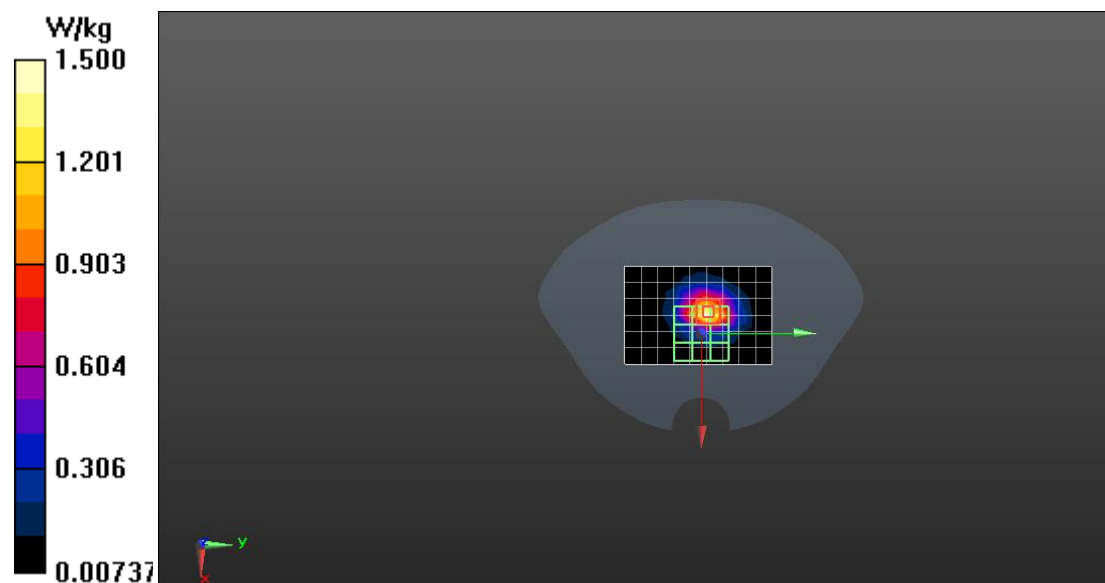

WCDMA B2 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.95$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.330 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.885 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.339 W/kg

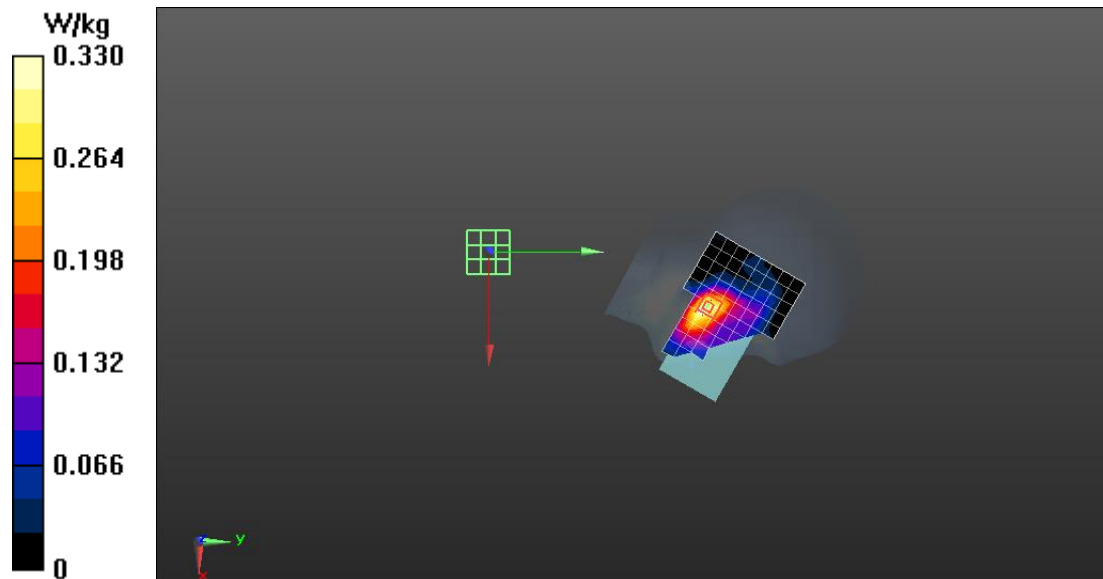

WCDMA B2 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.95$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.79 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.65 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.743 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

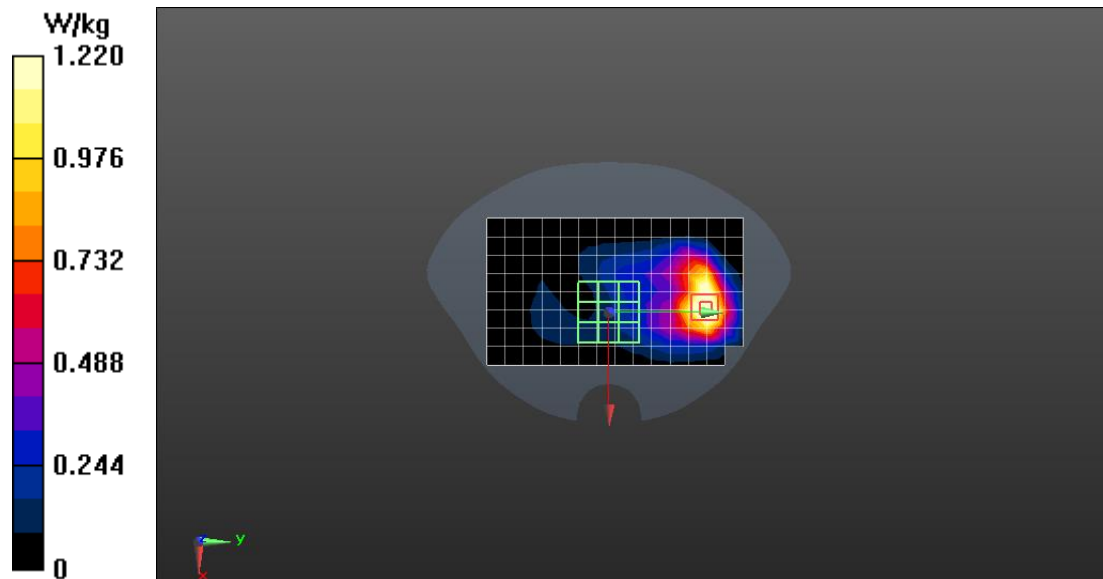

WCDMA B4 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 4; Frequency: 1732.6 MHz;

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.296$ S/m; $\epsilon_r = 40.981$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.165 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.007 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

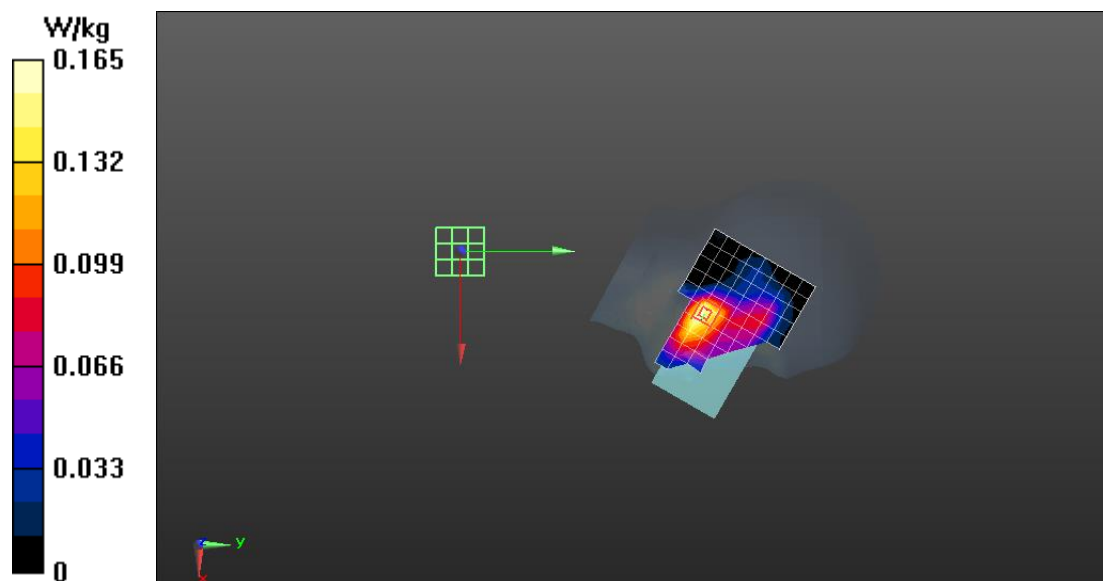

WCDMA B4 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 41.37$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.51 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.644 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

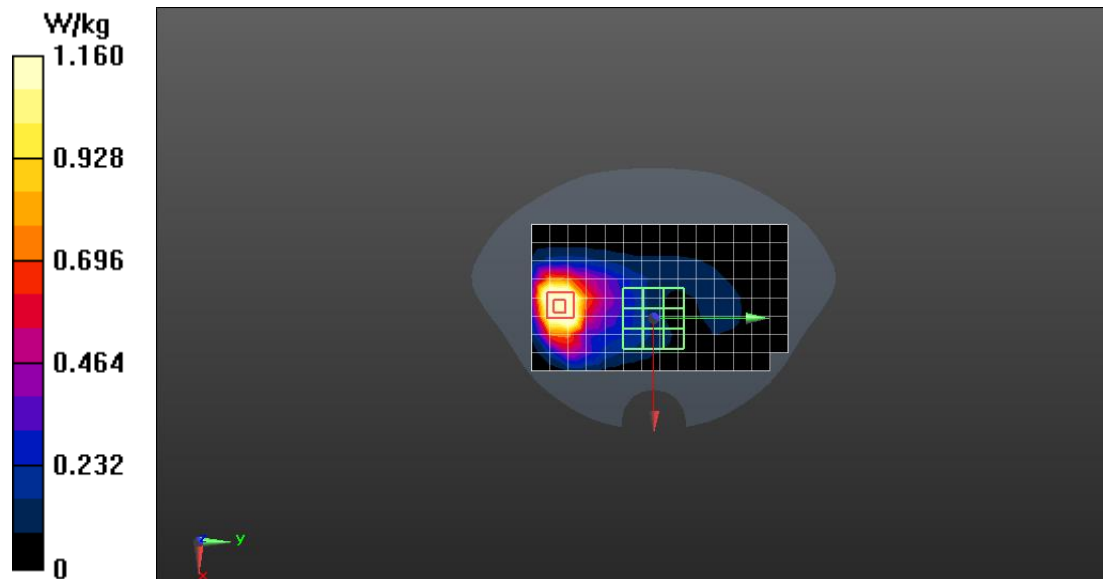

Date: 2024/7/3

WCDMA B5 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 5; Frequency: 846.6 MHz;

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 41.65$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.59 W/kg


Configuration/Head/Zoom Scan (5x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.92 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.957 W/kg

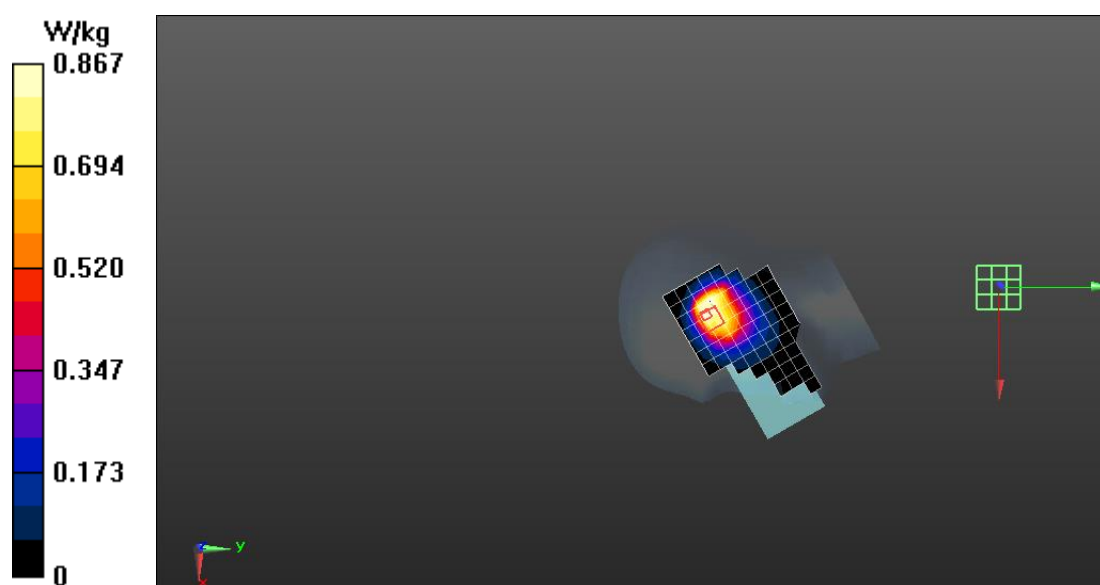

WCDMA B5 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 5; Frequency: 836.6 MHz;

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.582$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.400 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.44 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.402 W/kg

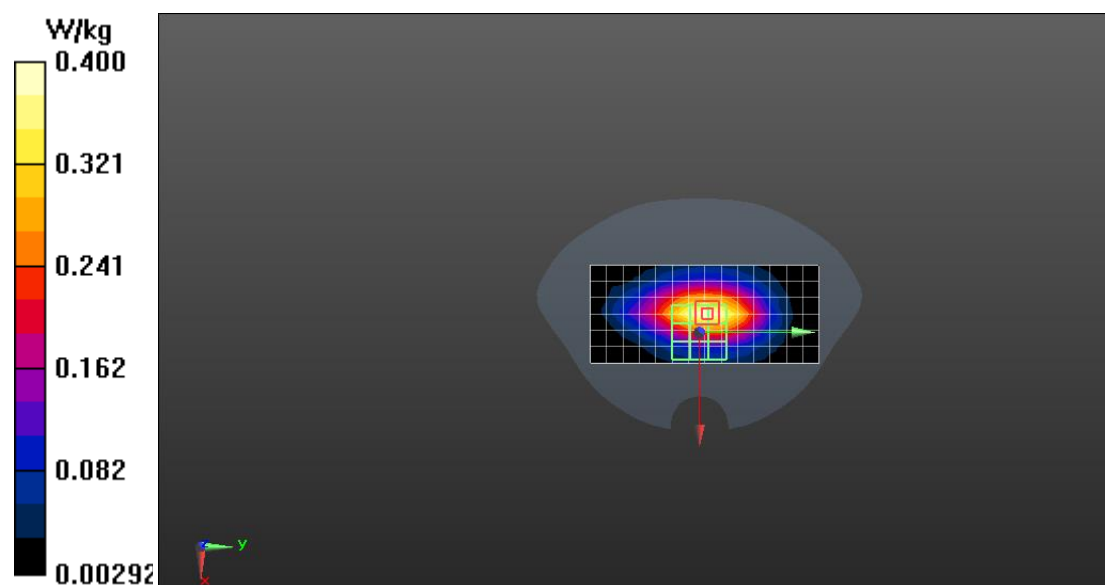

LTE B2 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.95$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.283 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.197 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.303 W/kg

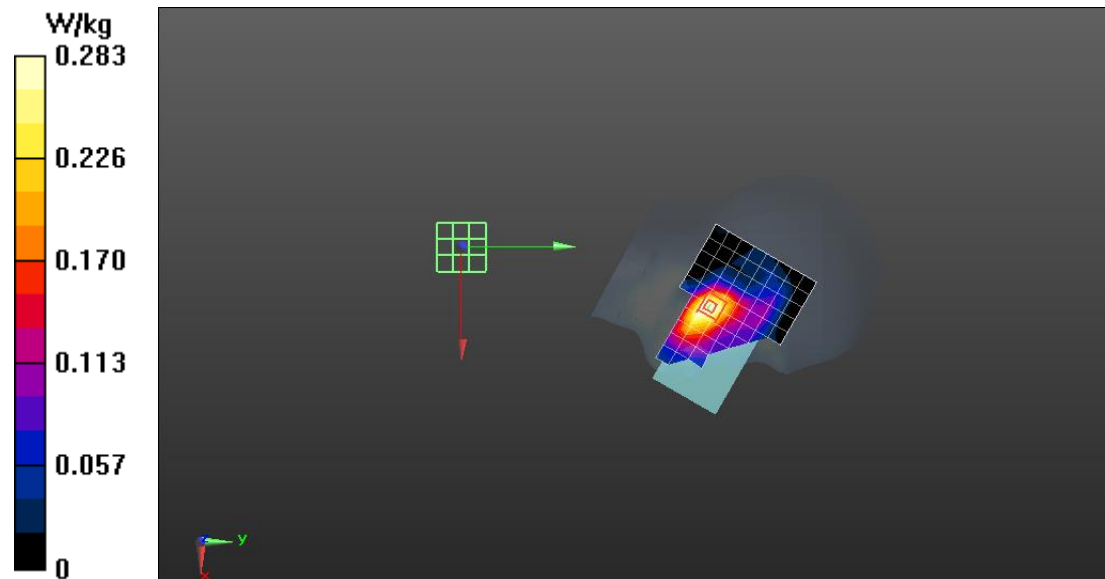

LTE B2 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 41.37$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.27 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.11 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.443 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

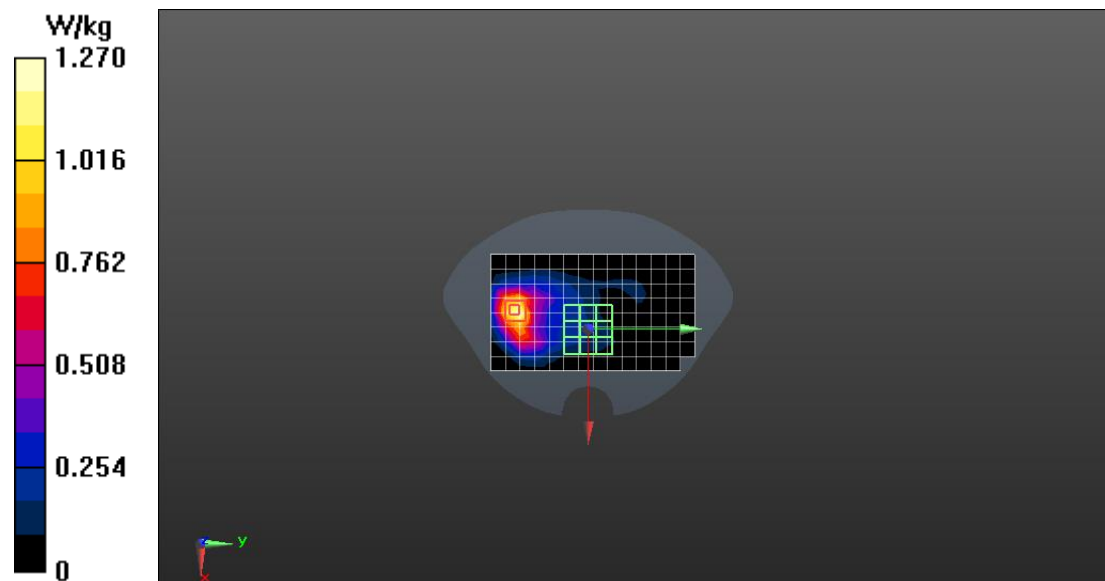

LTE B4 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 4; Frequency: 1720 MHz;

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.278$ S/m; $\epsilon_r = 41.049$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.140 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.256 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.149 W/kg

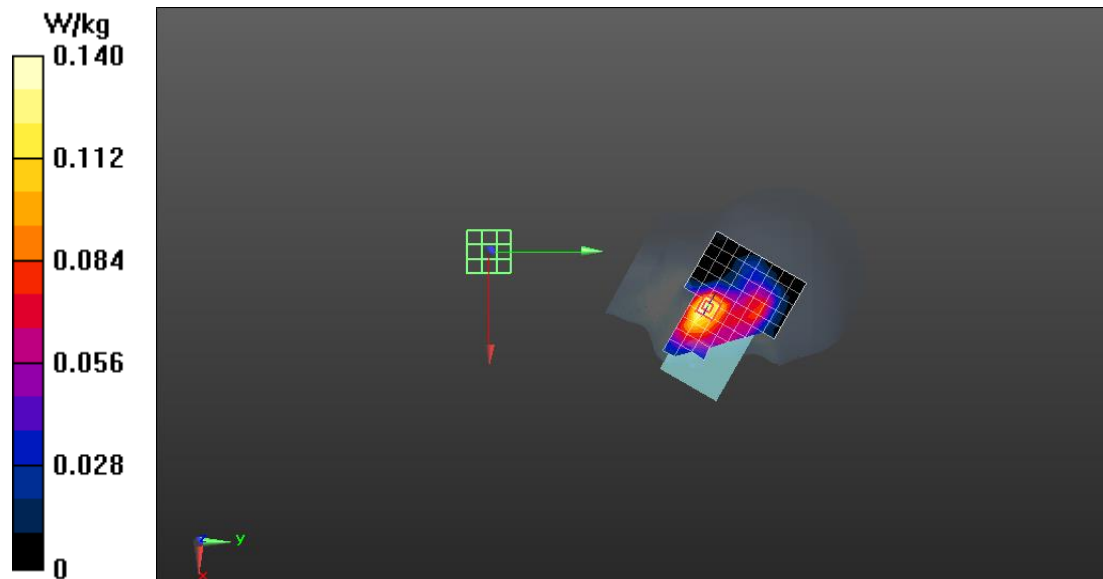

LTE B4 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 4; Frequency: 1720 MHz;

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.309$ S/m; $\epsilon_r = 41.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.71 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.45 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.986 W/kg

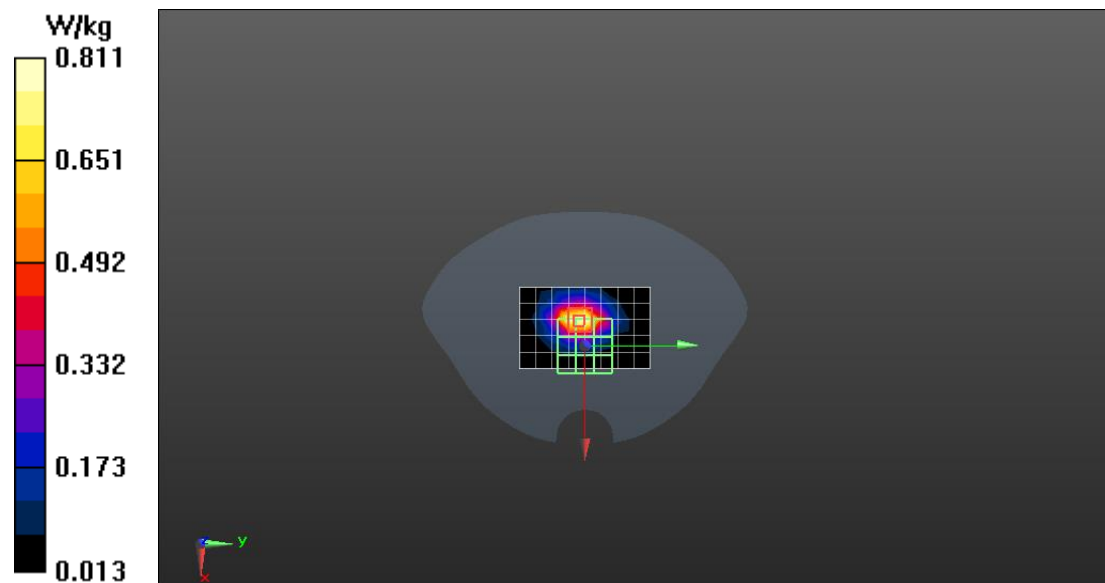

LTE B5 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 5; Frequency: 846.6 MHz;

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.947$ S/m; $\epsilon_r = 41.67$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.26 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 32.98 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.341 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

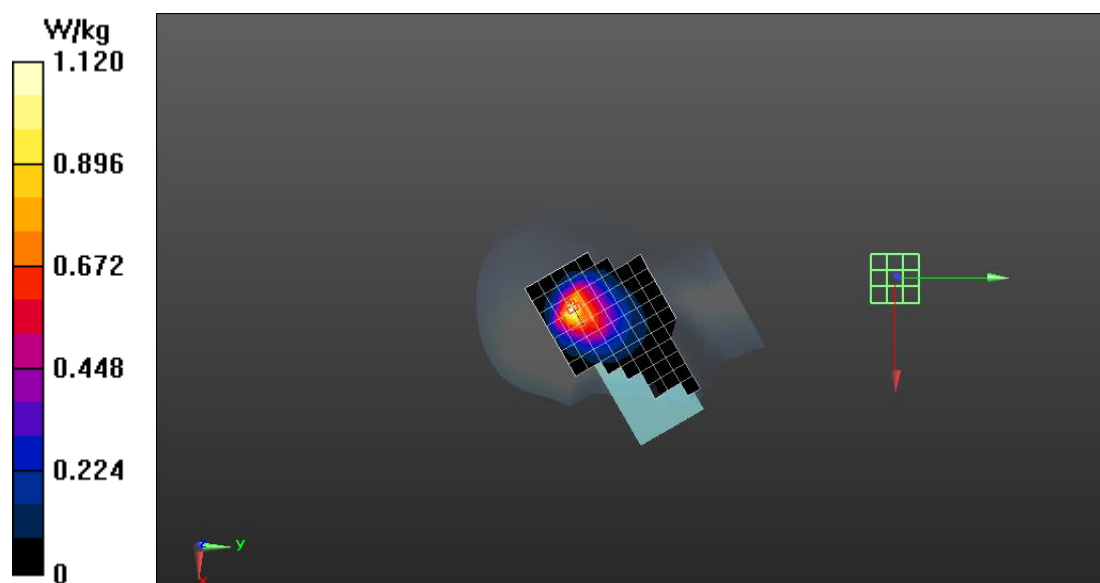

LTE B5 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 836.5 MHz;

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.582$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.382 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.13 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.482 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.419 W/kg

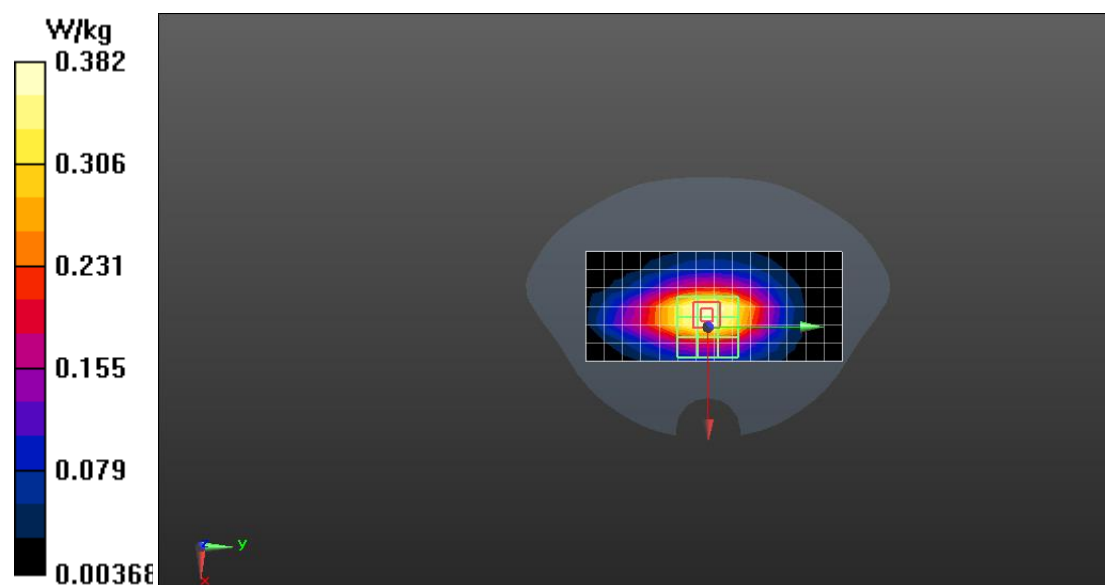

LTE B12 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 704 MHz;

Medium parameters used (interpolated): $f = 704$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.02 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 25.79 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.429 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

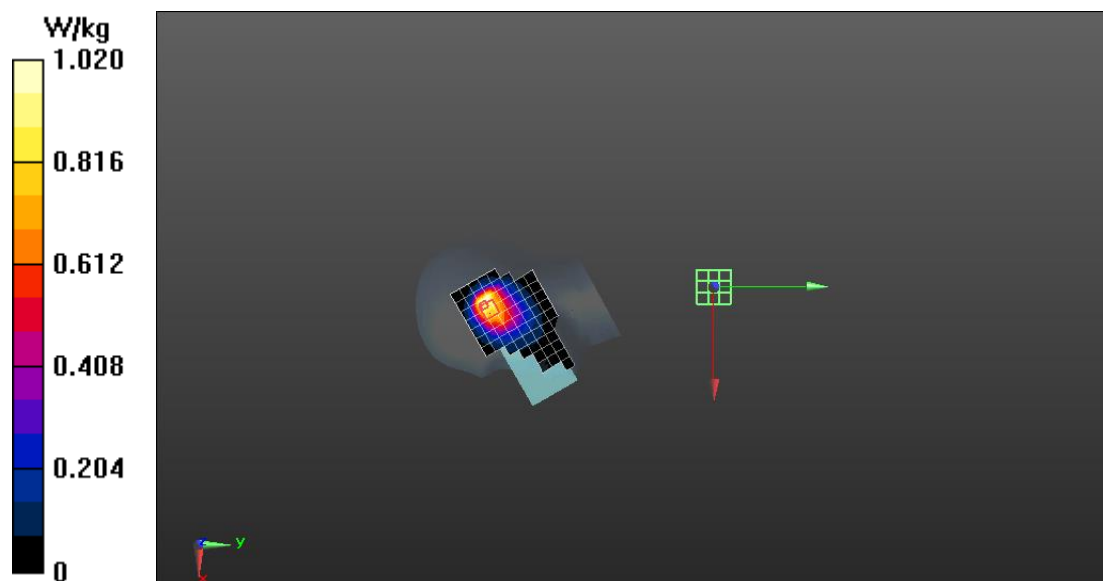

LTE B12 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 704 MHz;

Medium parameters used (interpolated): $f = 704$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.318 W/kg

Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.89 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.170 W/kg

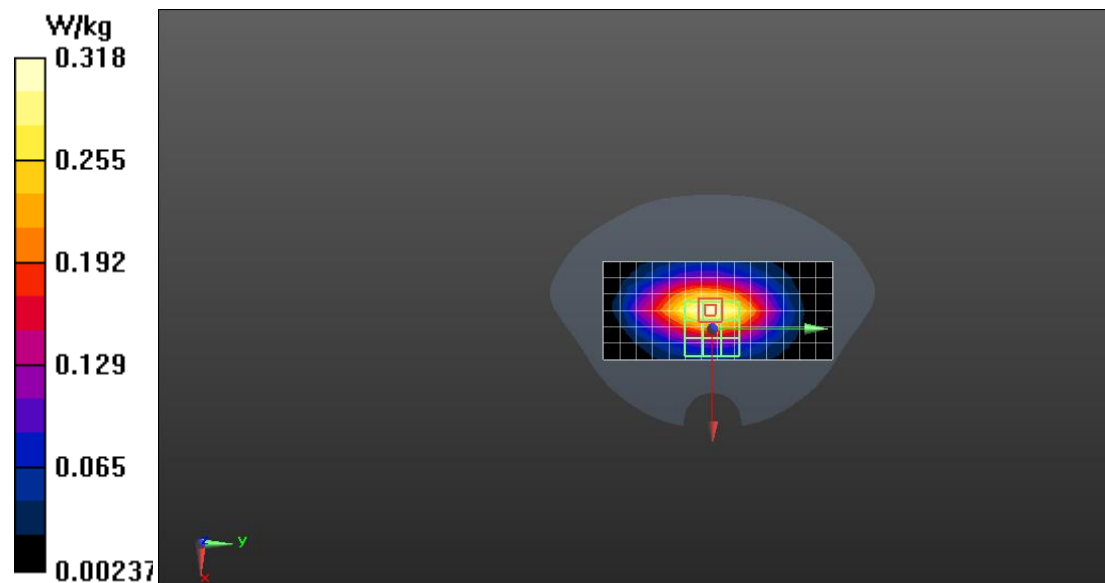

LTE B13 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 13; Frequency: 782 MHz;

Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.95$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.08 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 29.17 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.815 W/kg; SAR(10 g) = 0.508 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

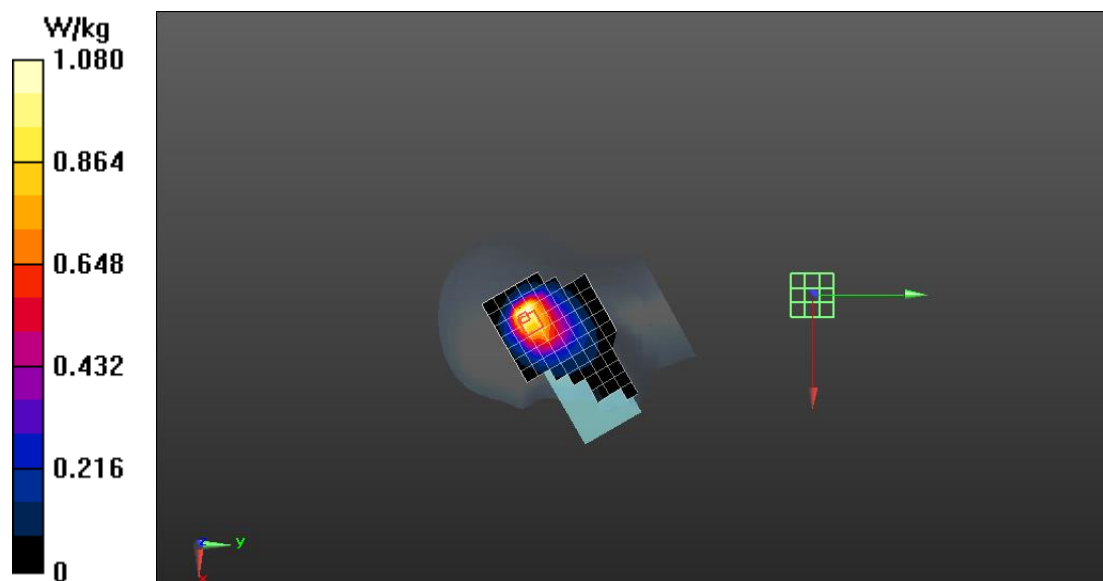

LTE B13 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 13; Frequency: 782 MHz;

Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.95$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.375 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.20 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.407 W/kg

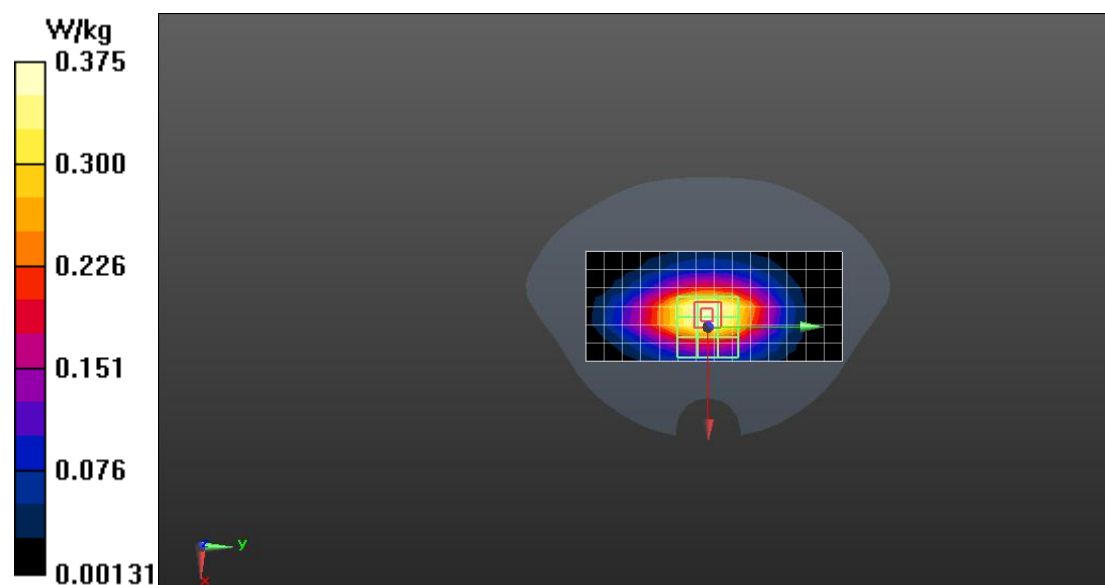

LTE B25 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 25; Frequency: 1860 MHz;

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 41.03$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.245 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.439 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

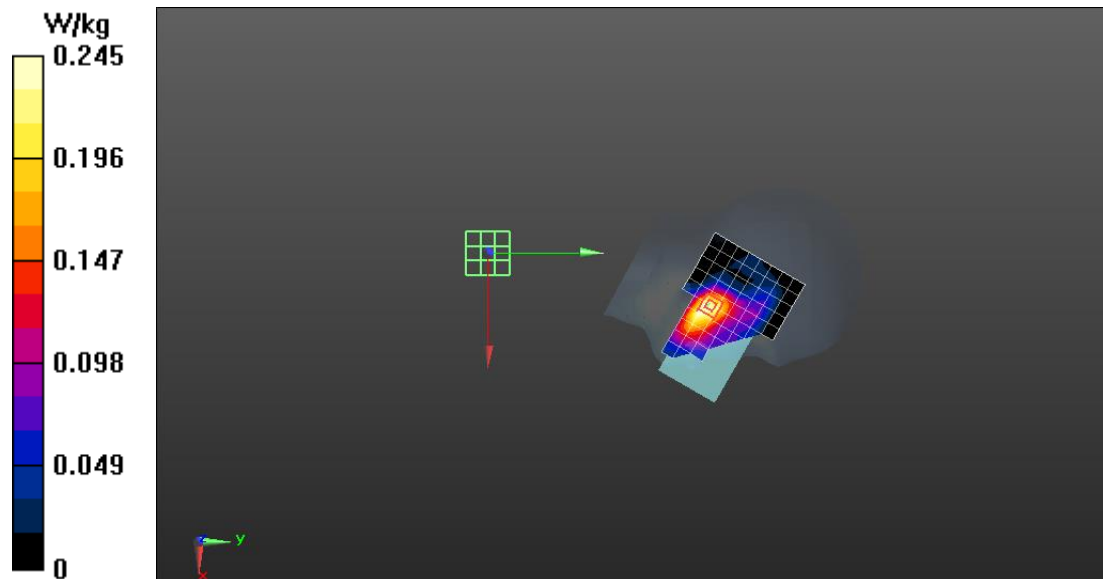

LTE B25 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 25; Frequency: 1882.5 MHz;

Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.55 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 35.13 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.639 W/kg

Maximum value of SAR (measured) = 1.66 W/kg

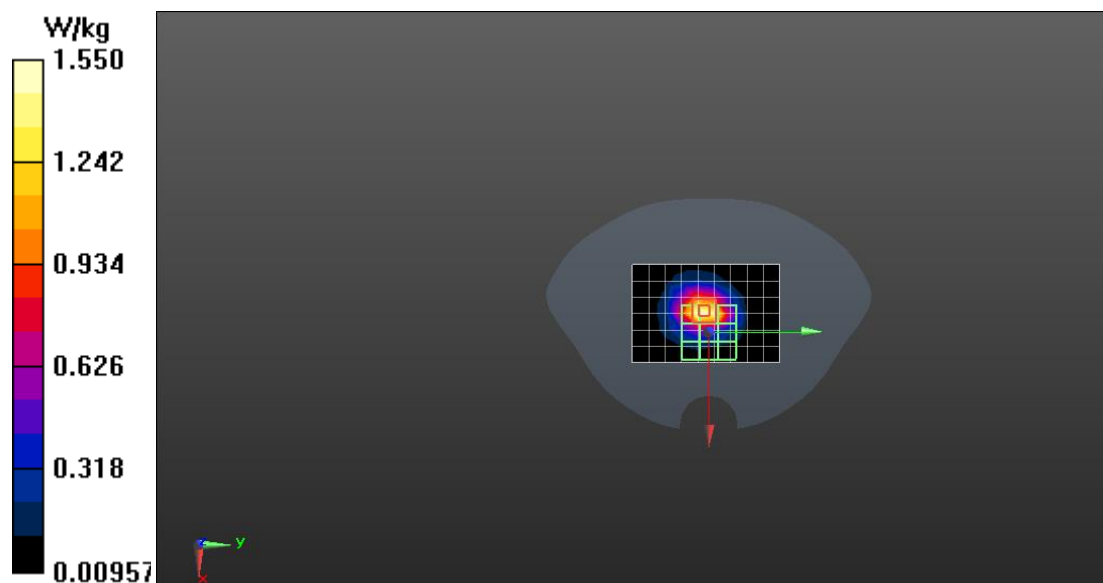

LTE B26 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 26; Frequency: 837.5 MHz;

Medium parameters used (interpolated): $f = 837.5$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 41.659$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.78 W/kg


Configuration/Head/Zoom Scan (5x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.42 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.965 W/kg

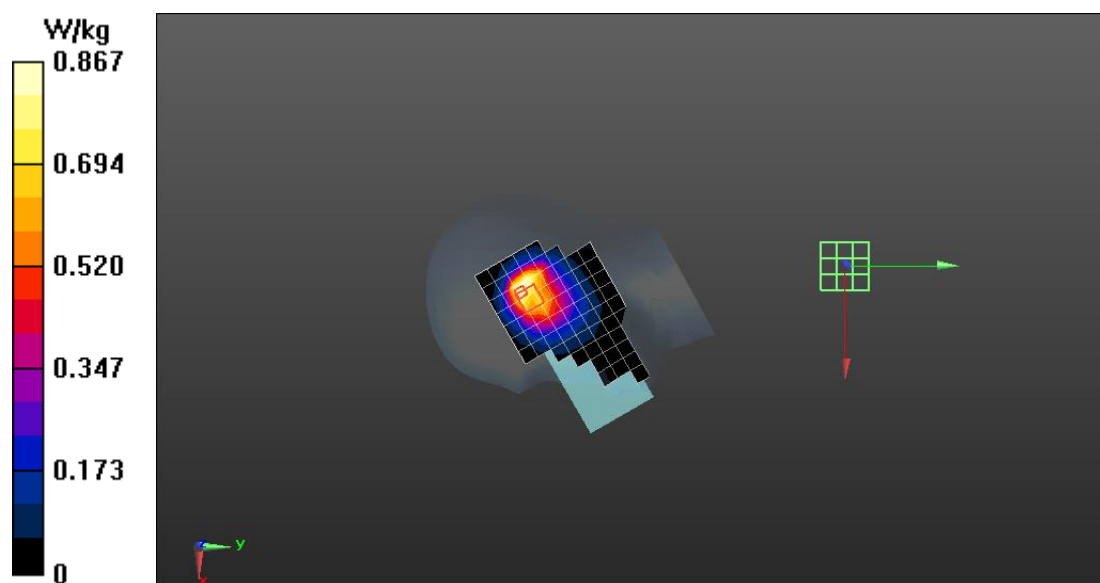

LTE B26 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 26; Frequency: 831.5 MHz;

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 41.601$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.380 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.36 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.375 W/kg

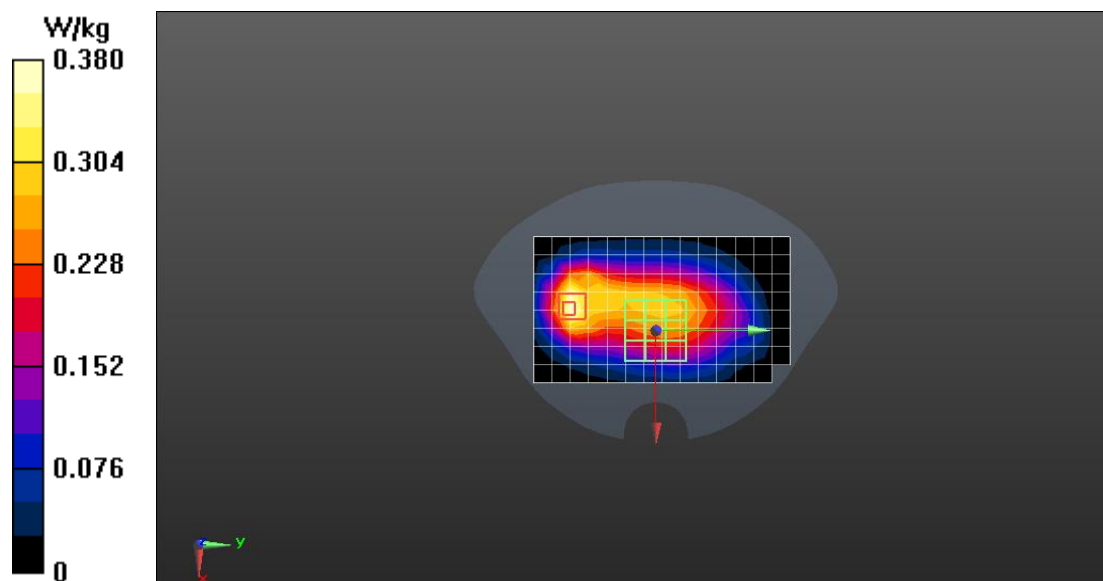

LTE B41 Head

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band 41;

Frequency: 2506 MHz;

Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.814$ S/m; $\epsilon_r = 40.103$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.148 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.571 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.152 W/kg

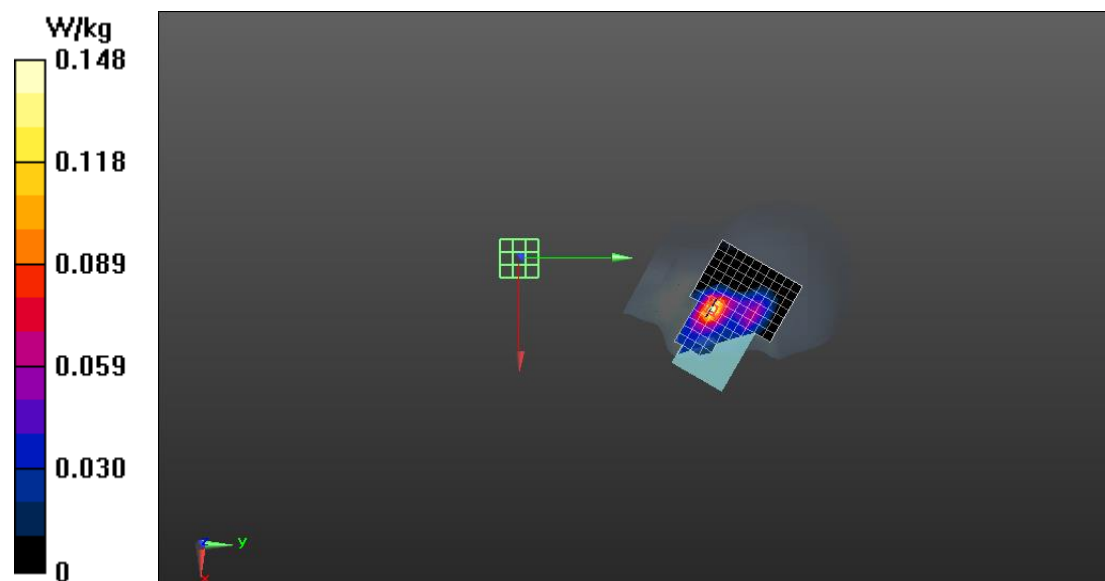

Date: 2024/5/17

LTE B41 Body

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band 41;

Frequency: 2506 MHz;

Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.814$ S/m; $\epsilon_r = 40.103$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.433 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.471 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.584 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.478 W/kg

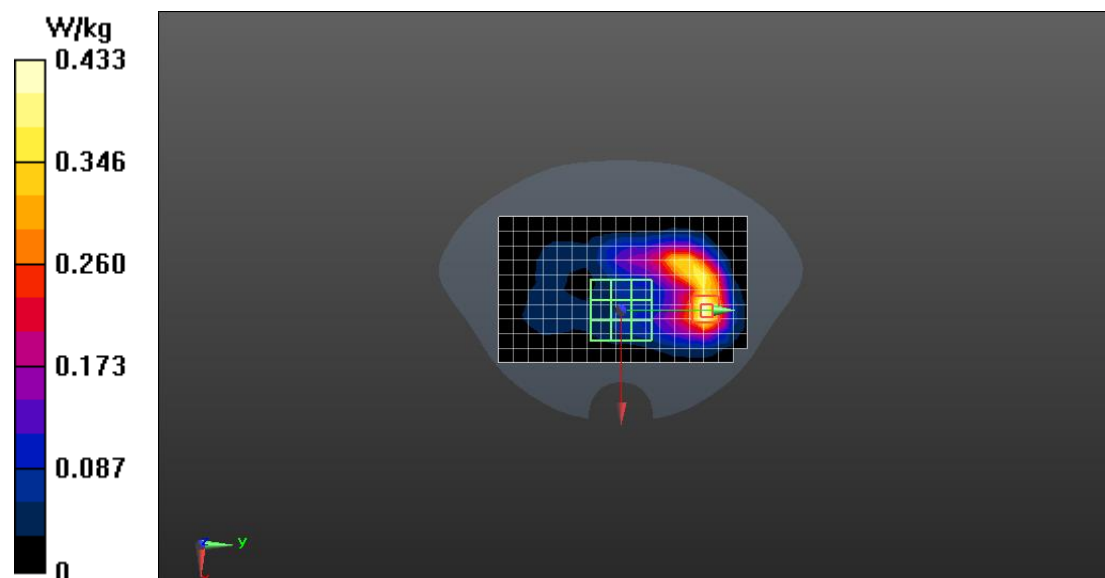

LTE B66 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1720 MHz;

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.285$ S/m; $\epsilon_r = 41.15$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.171 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.298 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

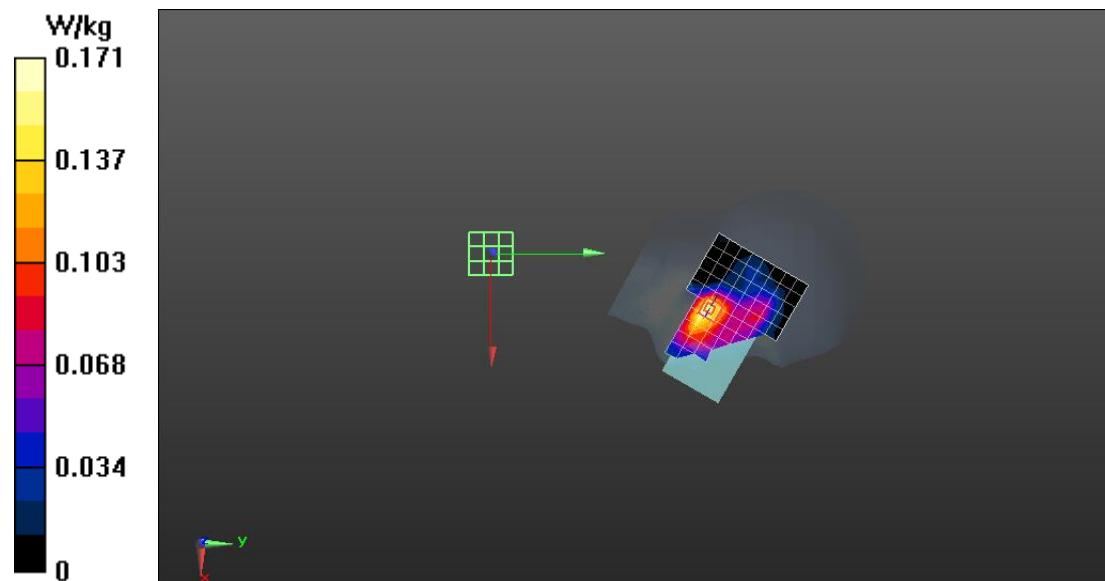

LTE B66 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1720 MHz;

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.309$ S/m; $\epsilon_r = 41.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.984 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.68 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.932 W/kg

SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.895 W/kg

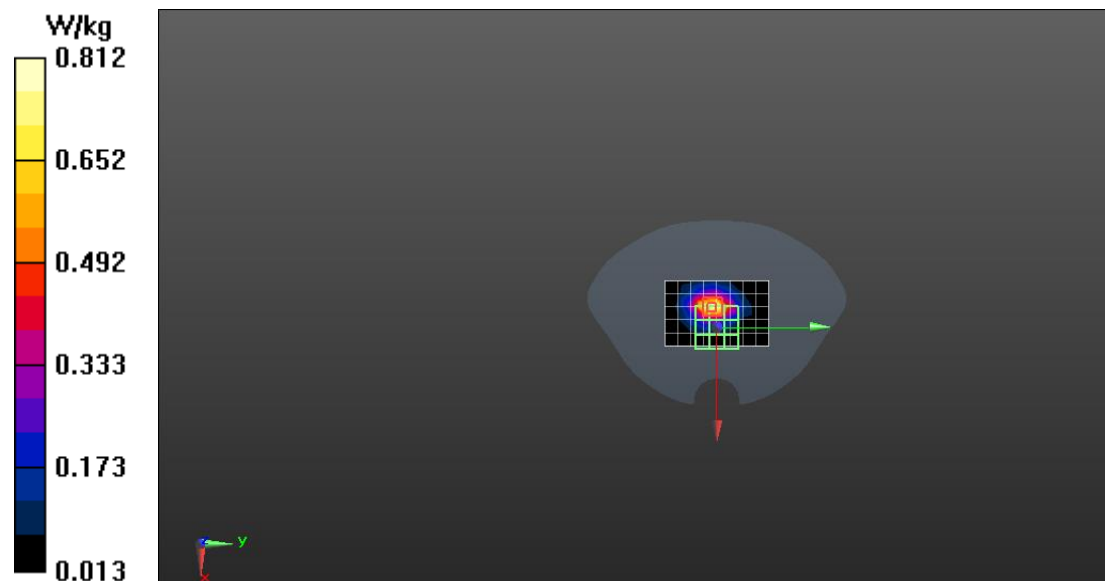

LTE B71 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 704 MHz;

Medium parameters used (interpolated): $f = 704$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.813 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.20 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.433 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

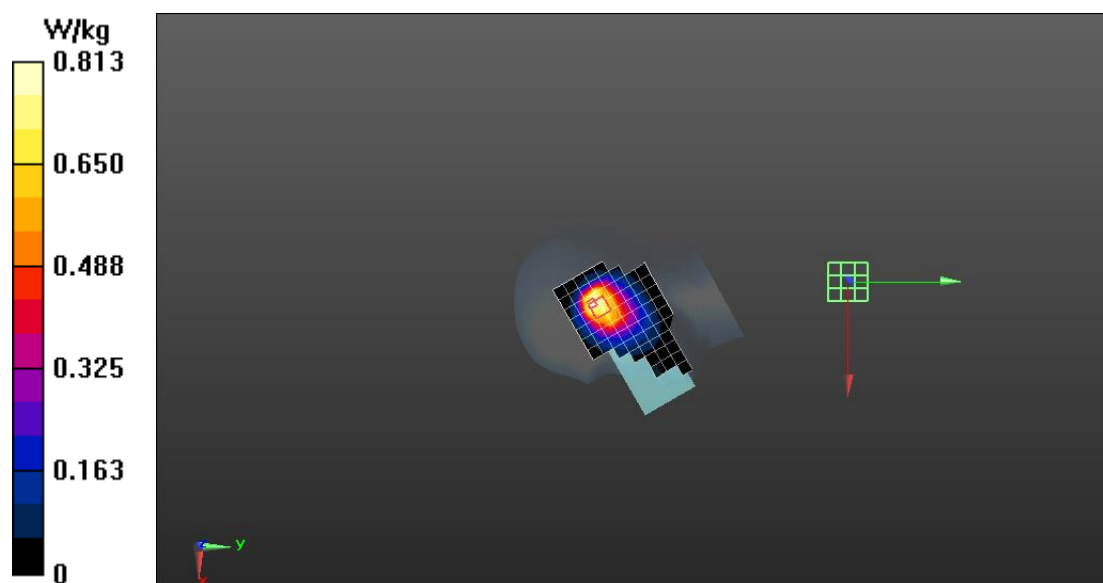

LTE B71 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 71; Frequency: 673 MHz;

Medium parameters used (interpolated): $f = 673$ MHz; $\sigma = 0.851$ S/m; $\epsilon_r = 41.64$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.262 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.67 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.285 W/kg

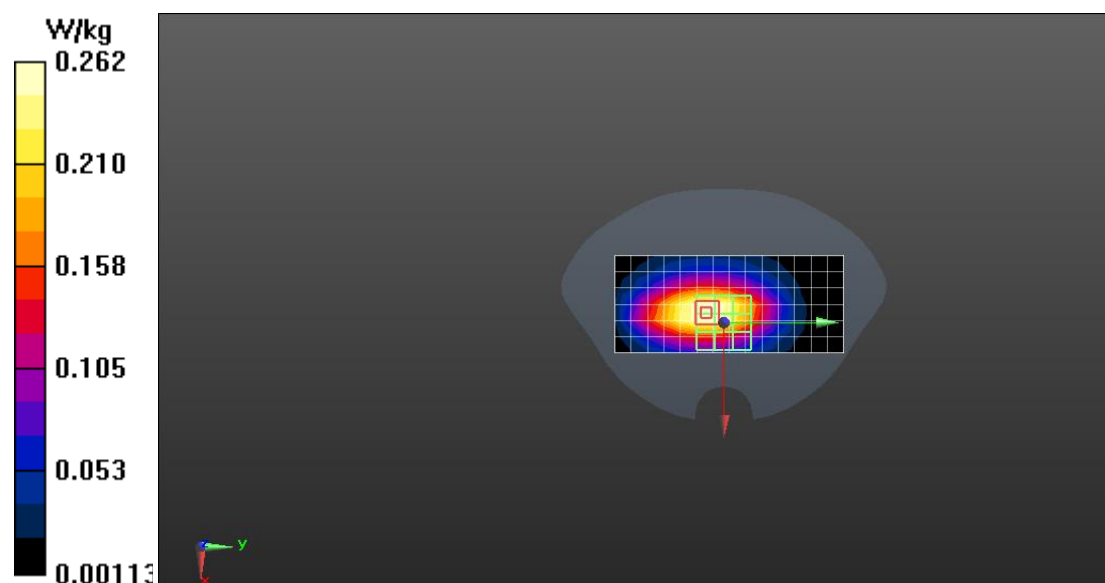

2.4G WiFi Head

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM

2.4GHz; Frequency: 2462 MHz;

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.825$ S/m; $\epsilon_r = 40.474$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.598 W/kg


Configuration/Head/Zoom Scan (8x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.039 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.775 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.606 W/kg

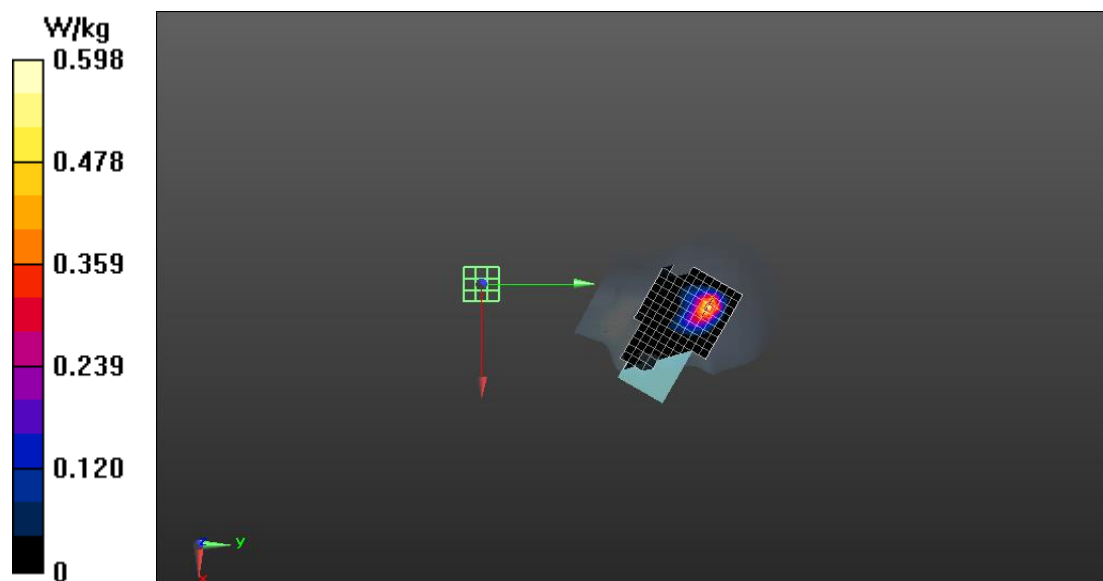

2.4G WiFi Body

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM

2.4GHz; Frequency: 2462 MHz;

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.825$ S/m; $\epsilon_r = 40.474$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.157 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.600 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

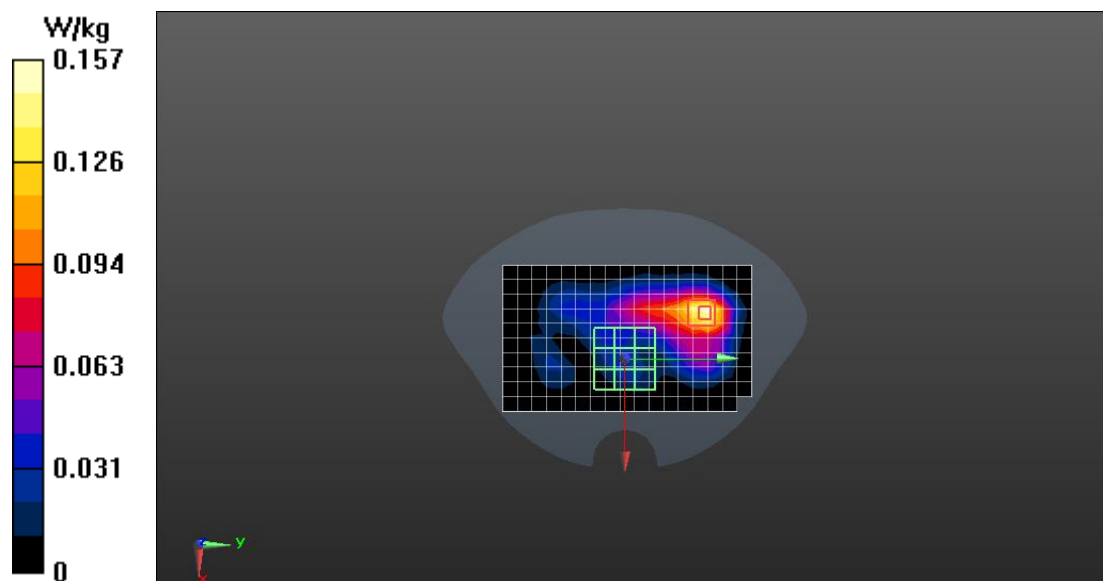

5.1G WIFI Head


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5180 MHz;
Medium parameters used: $f = 5180$ MHz; $\sigma = 4.465$ S/m; $\epsilon_r = 37.084$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.34 W/kg

Configuration/Head/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 16.52 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.21 W/kg
SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.302 W/kg
Maximum value of SAR (measured) = 1.13 W/kg

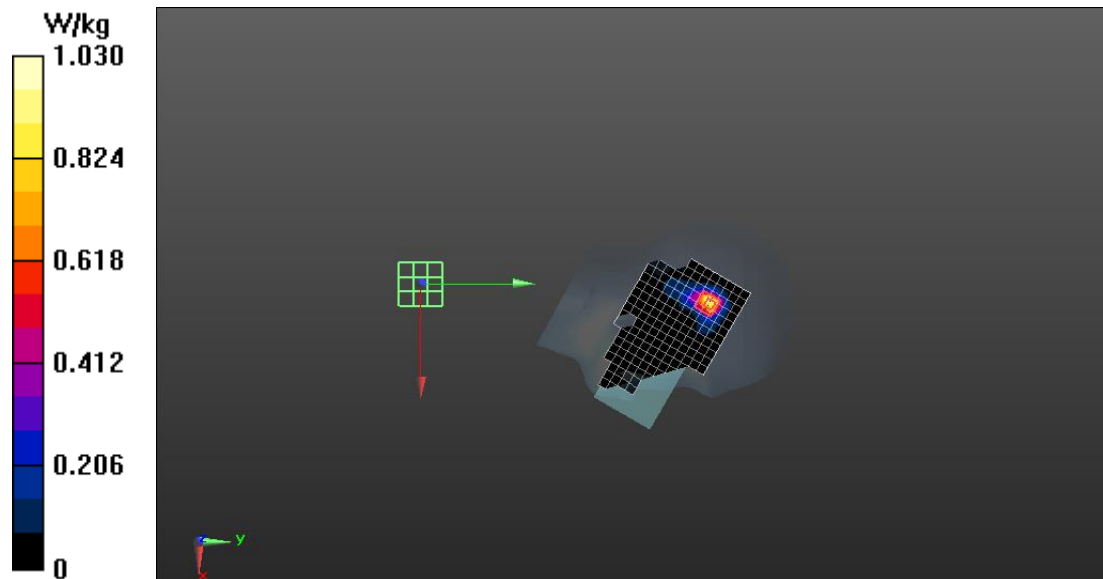

5.1G WIFI Body

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5180 MHz;
Medium parameters used: $f = 5180$ MHz; $\sigma = 4.465$ S/m; $\epsilon_r = 37.084$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.802 W/kg


Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.9600 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.826 W/kg

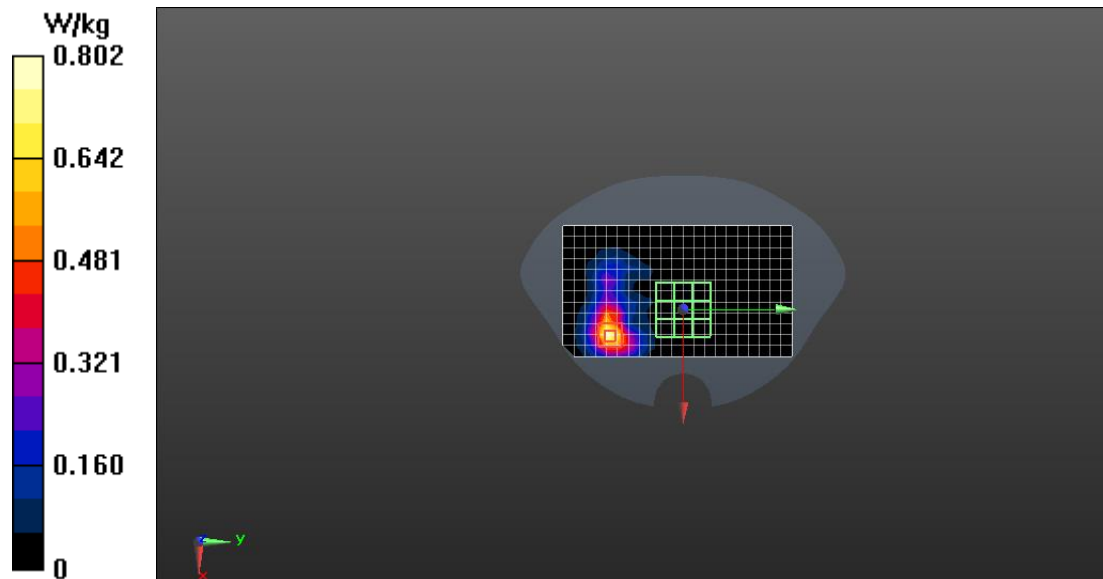

5.3G WIFI Body


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5260 MHz;
Medium parameters used: $f = 5260$ MHz; $\sigma = 4.553$ S/m; $\epsilon_r = 36.893$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.602 W/kg

Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 1.025 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.911 W/kg
SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.100 W/kg

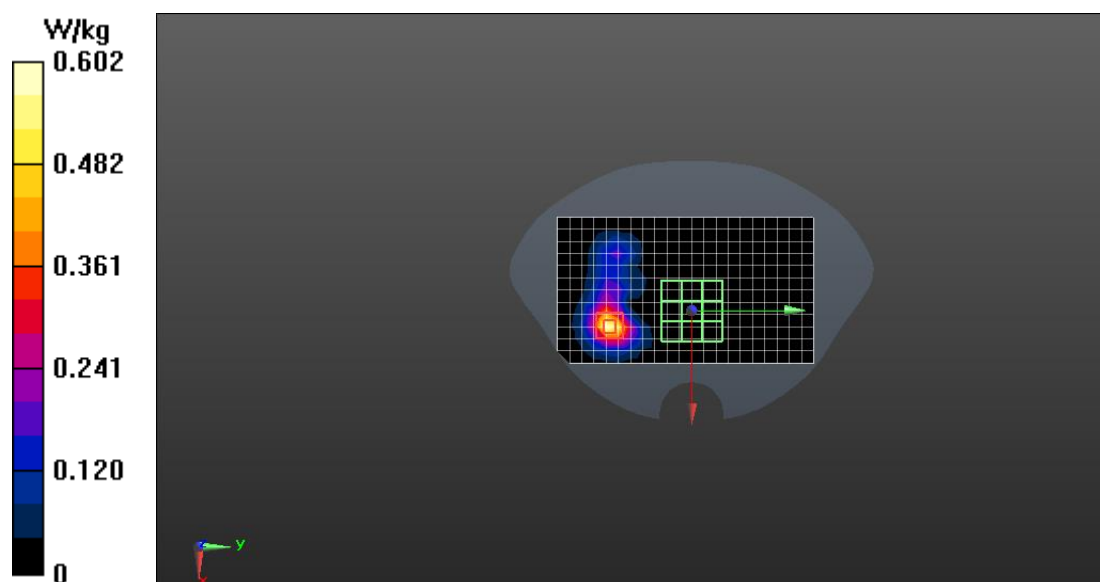

5.3G WIFI Limb


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5260 MHz;
Medium parameters used: $f = 5260$ MHz; $\sigma = 4.553$ S/m; $\epsilon_r = 36.893$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Limb/Area Scan (8x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 7.23 W/kg

Configuration/Limb/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 13.87 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 13.2 W/kg
SAR(1 g) = 2.51 W/kg; SAR(10 g) = 0.647 W/kg
Maximum value of SAR (measured) = 6.64 W/kg

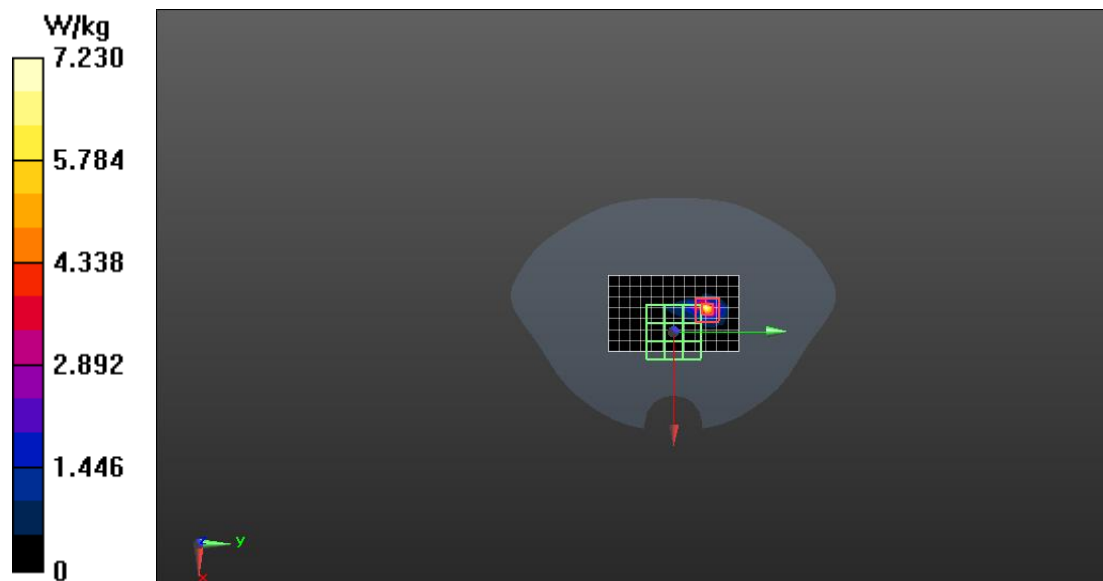

5.6G WIFI Head


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5580 MHz;
Medium parameters used: $f = 5580$ MHz; $\sigma = 4.888$ S/m; $\epsilon_r = 36.296$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.01, 5.01, 5.01); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.34 W/kg

Configuration/Head/Zoom Scan (9x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 16.00 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.42 W/kg
SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.291 W/kg
Maximum value of SAR (measured) = 1.23 W/kg

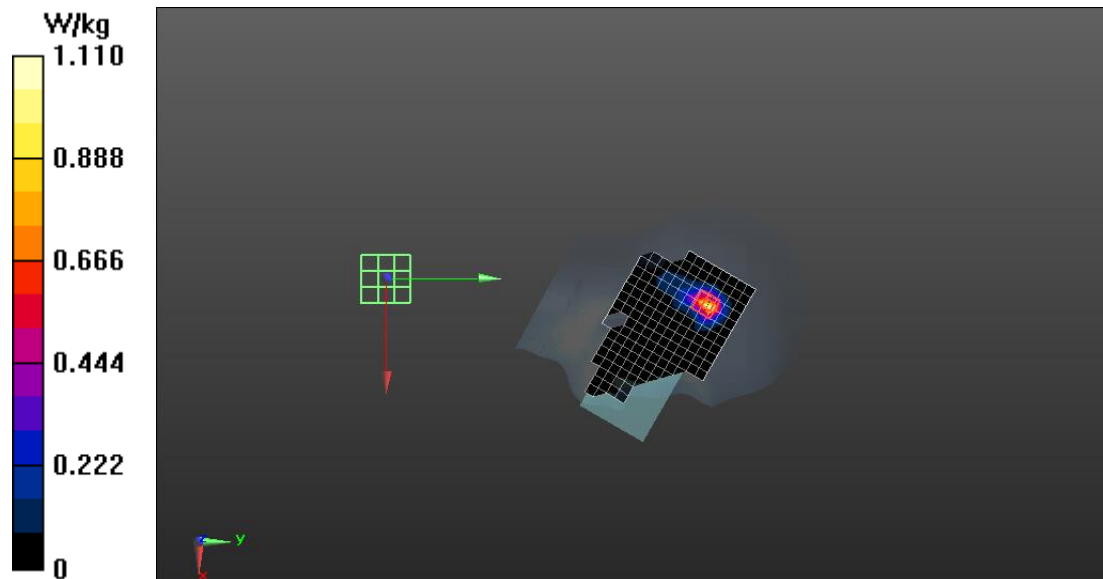

5.6G WIFI Body


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5580 MHz;
Medium parameters used: $f = 5580$ MHz; $\sigma = 4.888$ S/m; $\epsilon_r = 36.296$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.01, 5.01, 5.01); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.12 W/kg

Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 1.117 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 1.95 W/kg
SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.187 W/kg
Maximum value of SAR (measured) = 1.19 W/kg

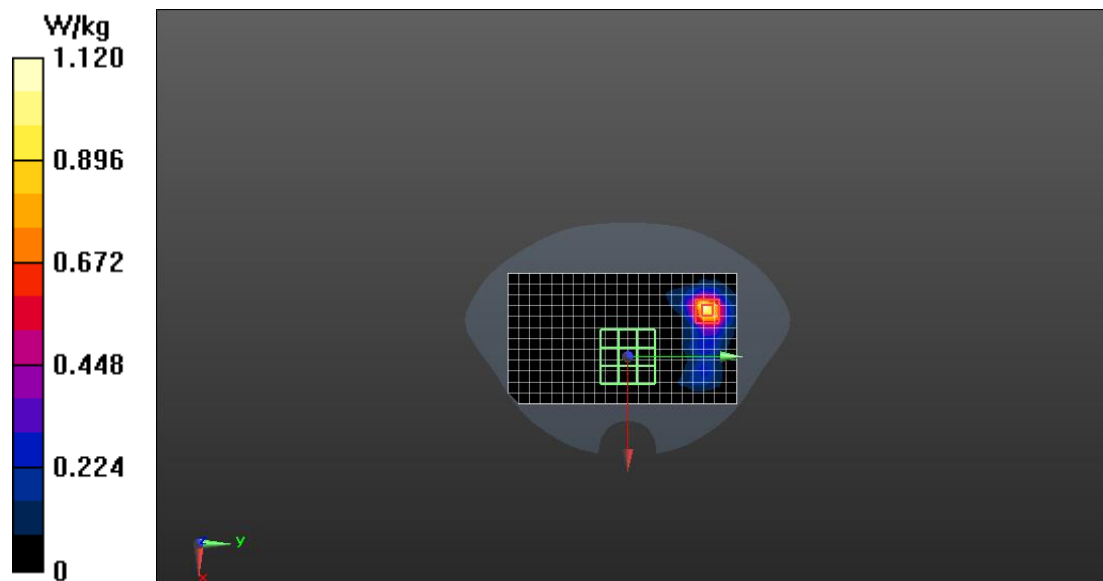

5.6G WiFi Limb

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5580 MHz;
Medium parameters used: $f = 5580$ MHz; $\sigma = 4.888$ S/m; $\epsilon_r = 36.296$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.01, 5.01, 5.01); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 11.4 W/kg


Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 14.45 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 24.6 W/kg

SAR(1 g) = 4.03 W/kg; SAR(10 g) = 1.02 W/kg

Maximum value of SAR (measured) = 12.1 W/kg

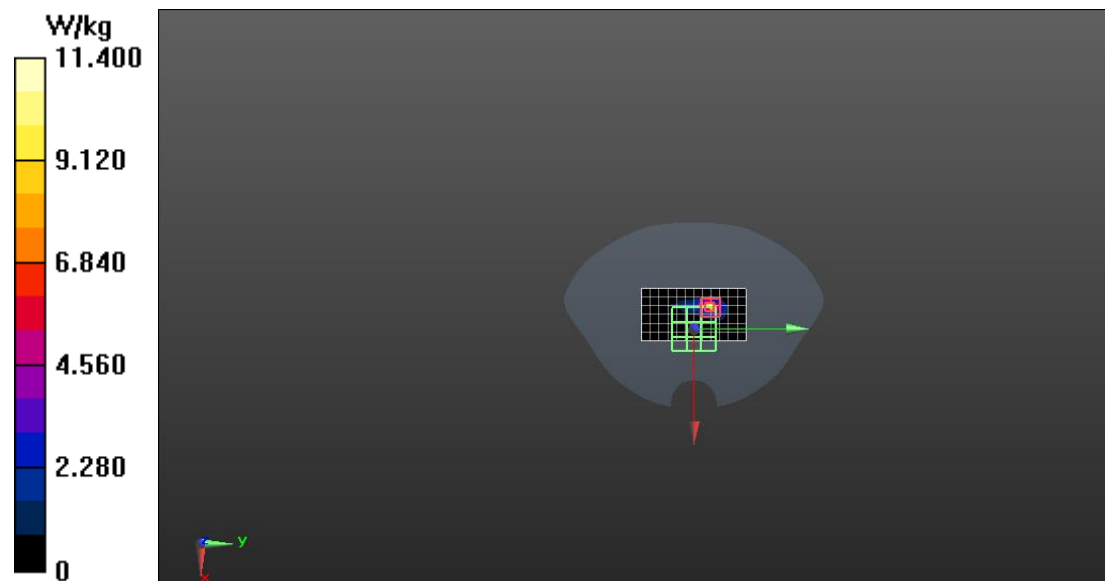

5.8G WIFI Head

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G

Band(5030.0 - 5825.0 MHz); Frequency: 5795 MHz;

Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 5.131$ S/m; $\epsilon_r = 35.775$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.05, 5.05, 5.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.30 W/kg


Configuration/Head/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 14.79 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.227 W/kg

Maximum value of SAR (measured) = 0.954 W/kg

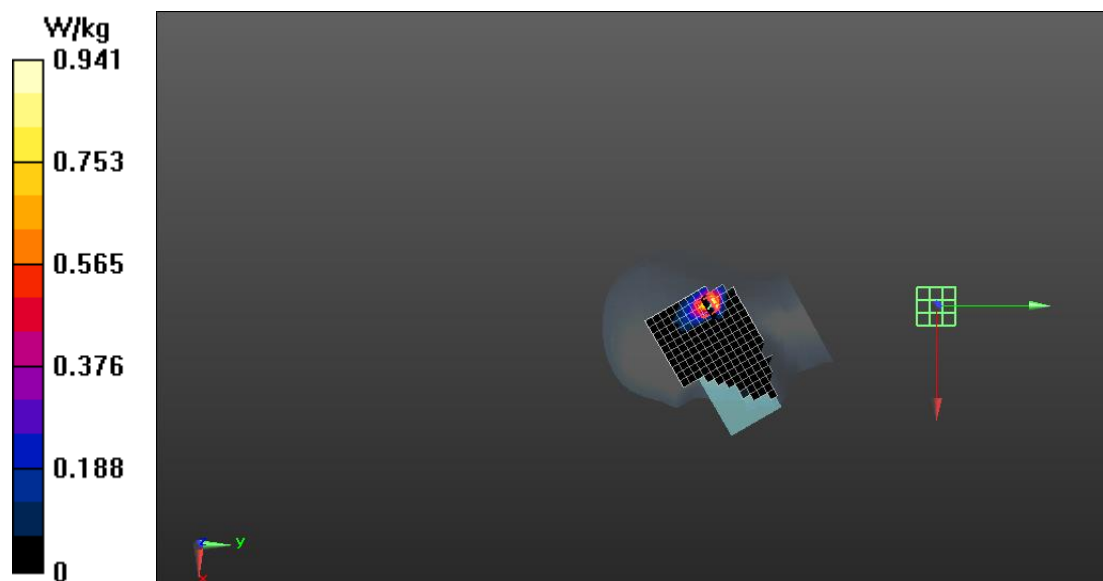

5.8G WIFI Body

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G

Band(5030.0 - 5825.0 MHz); Frequency: 5755 MHz;

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 5.106$ S/m; $\epsilon_r = 35.829$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.05, 5.05, 5.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.01 W/kg


Configuration/Body/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 9.713 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

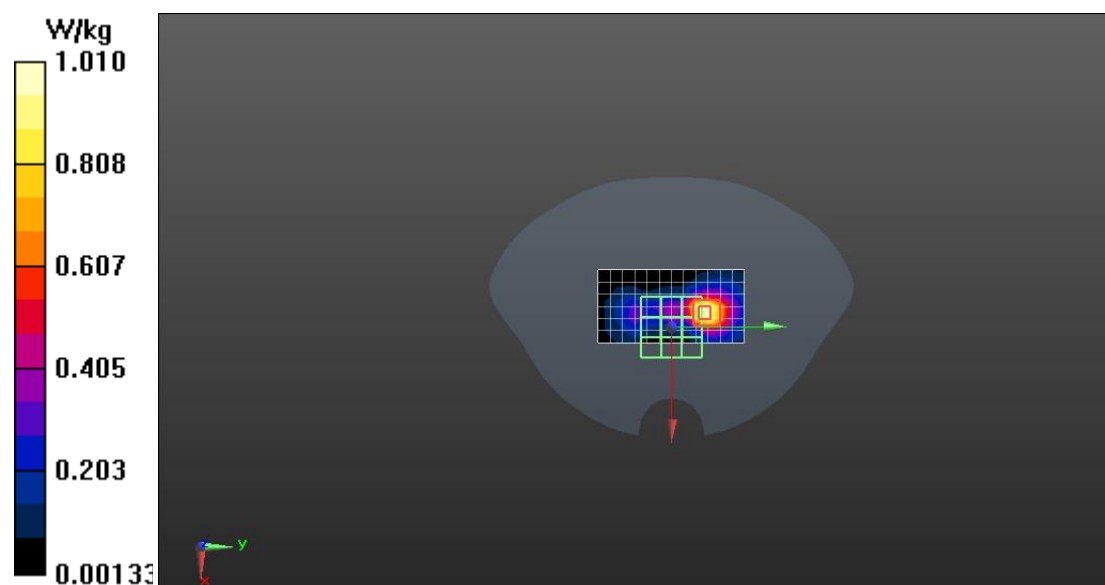

Date: 2024/5/27

BT DH5 Head

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2480 MHz;

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.822$ S/m; $\epsilon_r = 40.42$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.150 W/kg


Configuration/Head/Zoom Scan (8x9x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.107 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

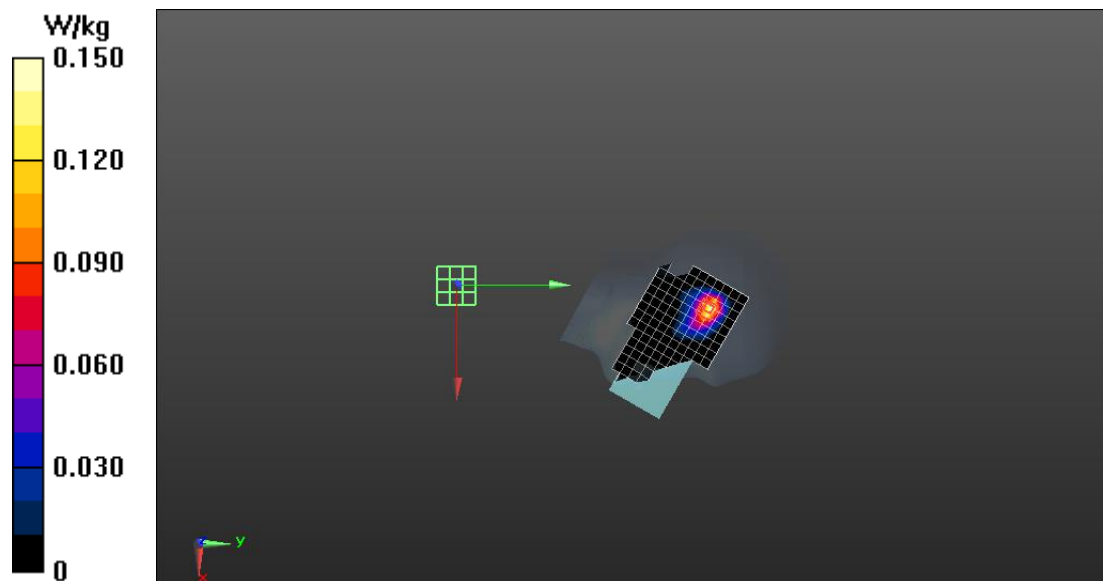

Date: 2024/5/27

BT DH5 Body

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2480 MHz;

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.822$ S/m; $\epsilon_r = 40.42$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0290 W/kg

Configuration/Body/Zoom Scan (7x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.699 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00978 W/kg

Maximum value of SAR (measured) = 0.0327 W/kg

