

Test Plot 1#: GSM 850_Body Back_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.433 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.867 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.306 W/kg

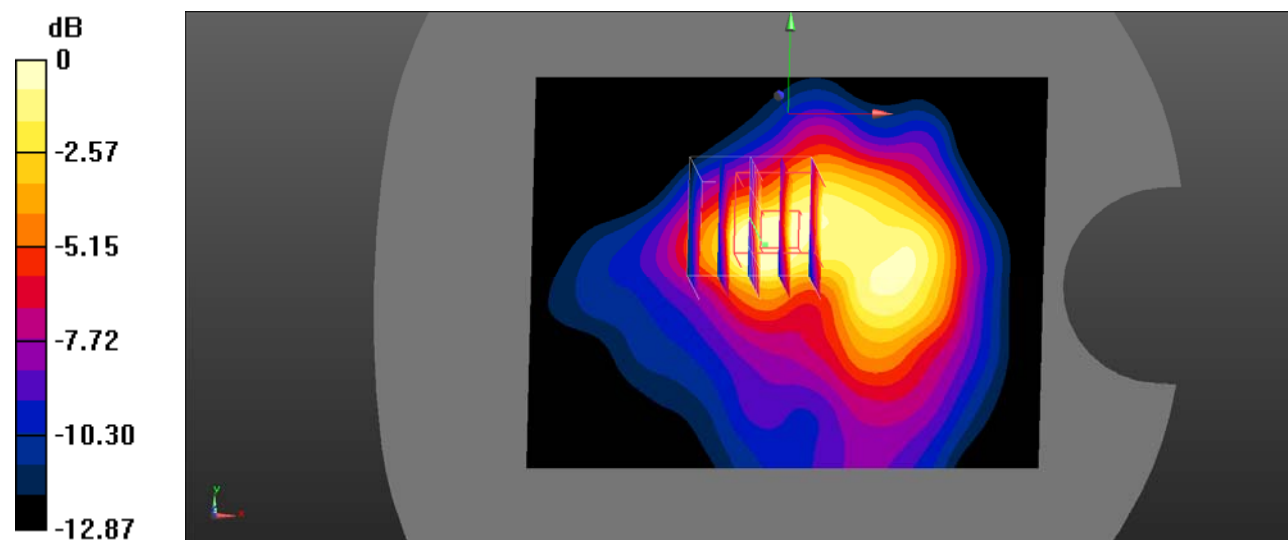

0 dB = 0.306 W/kg = -5.14 dBW/kg

Test Plot 2#: GSM 850_Body Left_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.241 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.94 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

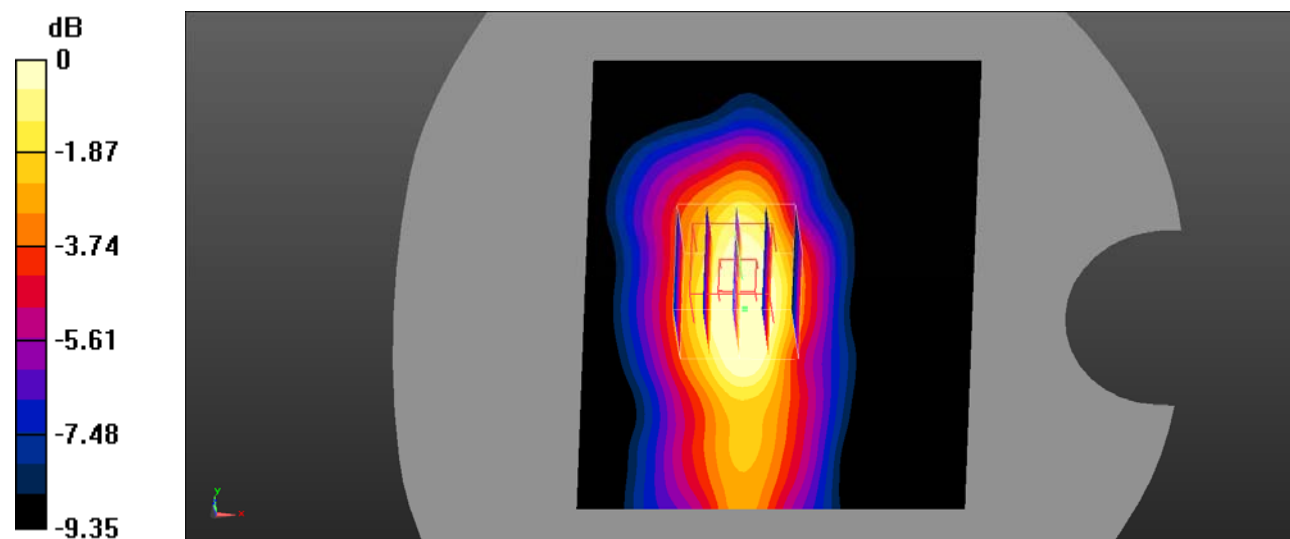

Test Plot 3#: GSM 850_Body Right_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0415 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.659 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0440 W/kg

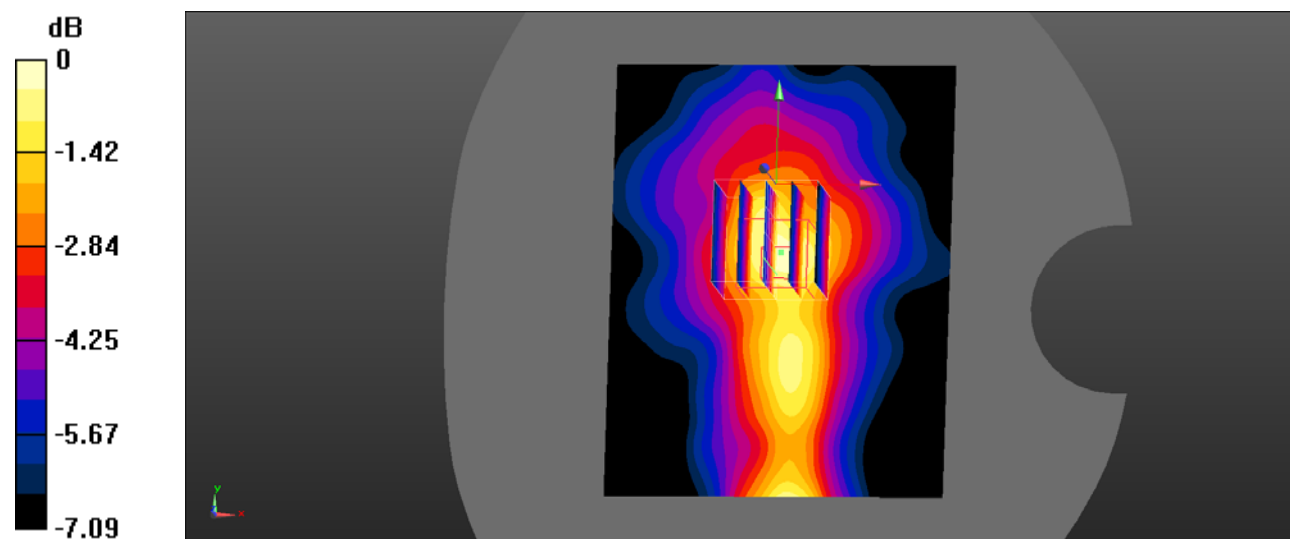

Test Plot 4#: GSM 850_Body Top_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.240 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.13 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.249 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

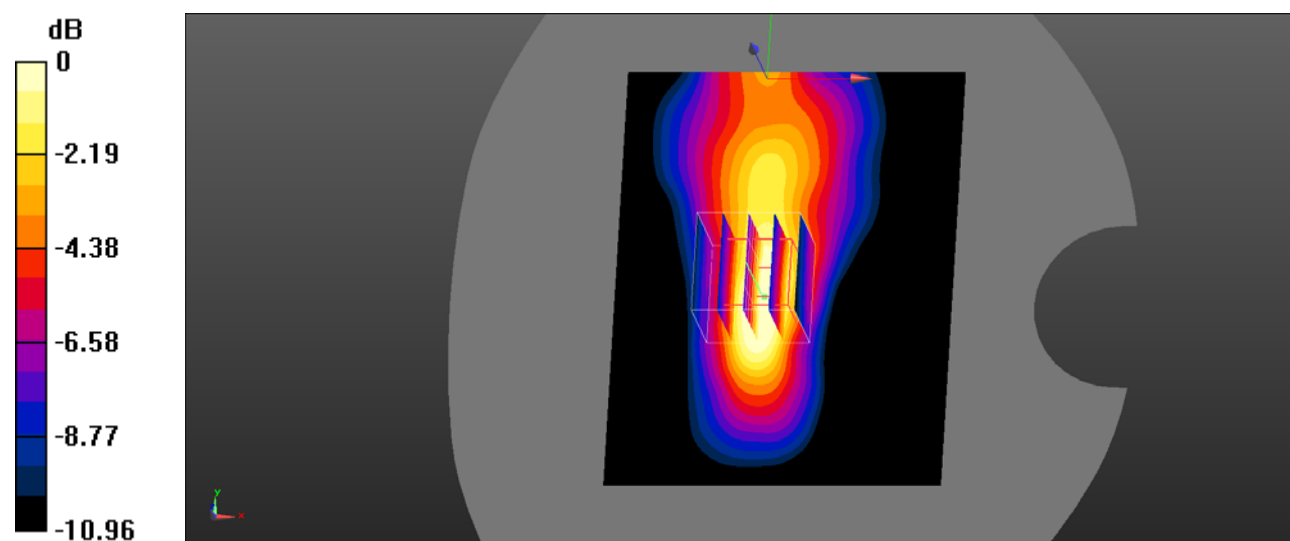

0 dB = 0.200 W/kg = -6.99 dBW/kg

Test Plot 5#: GSM 850_Body Bottom_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.00886 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.777 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.00537 W/kg; SAR(10 g) = 0.00453 W/kg

Maximum value of SAR (measured) = 0.00723 W/kg

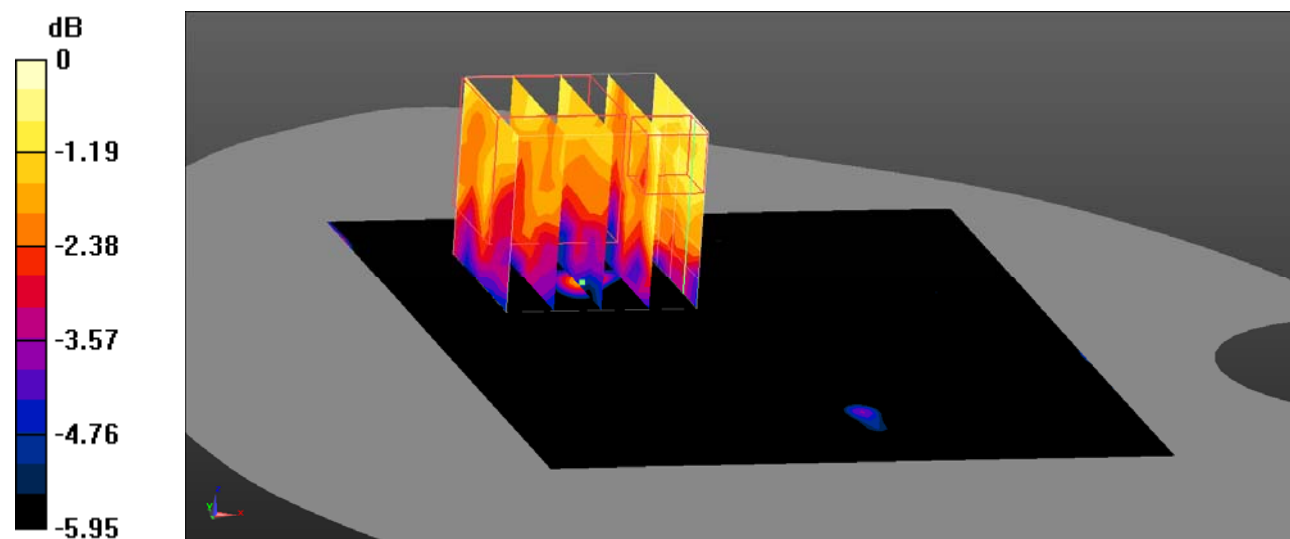

0 dB = 0.00723 W/kg = -21.41 dBW/kg

Test Plot 6#: GSM 850_Body Back_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.478 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.08 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

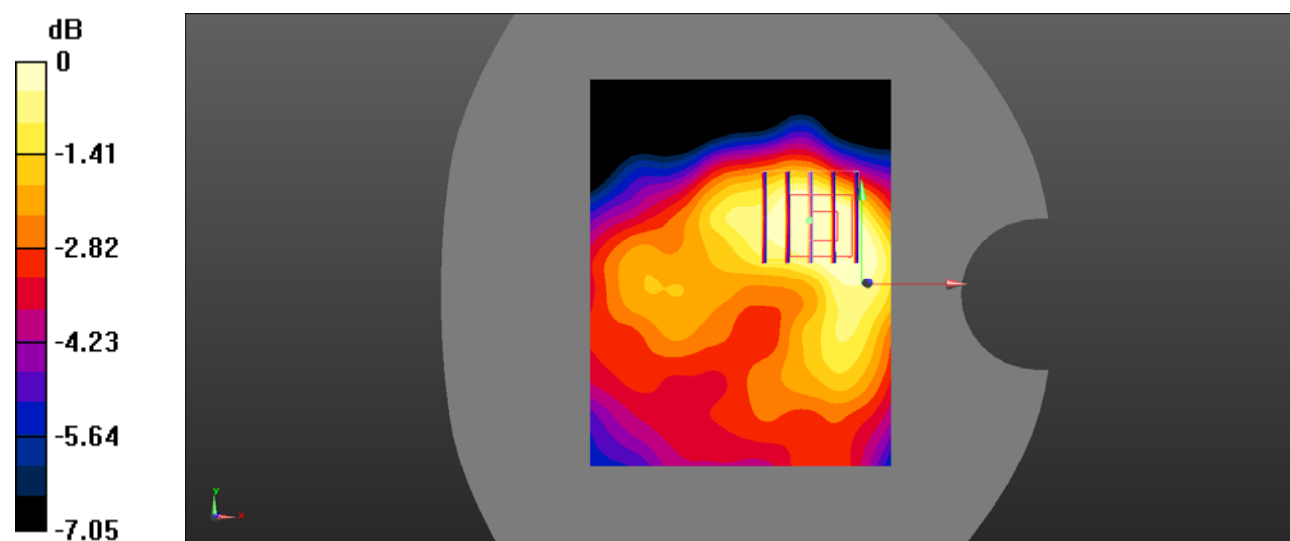

Test Plot 7#: GSM 850_Body Left_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.182 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.98 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

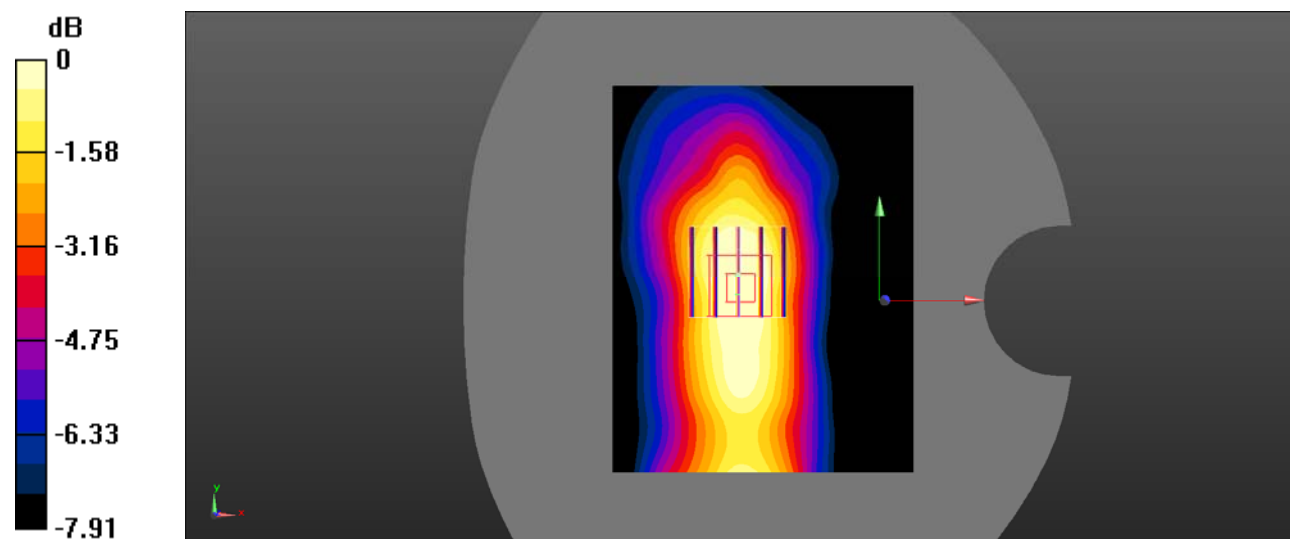

0 dB = 0.150 W/kg = -8.24 dBW/kg

Test Plot 8#: GSM 850_Body Top_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0362 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.102 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0340 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0324 W/kg

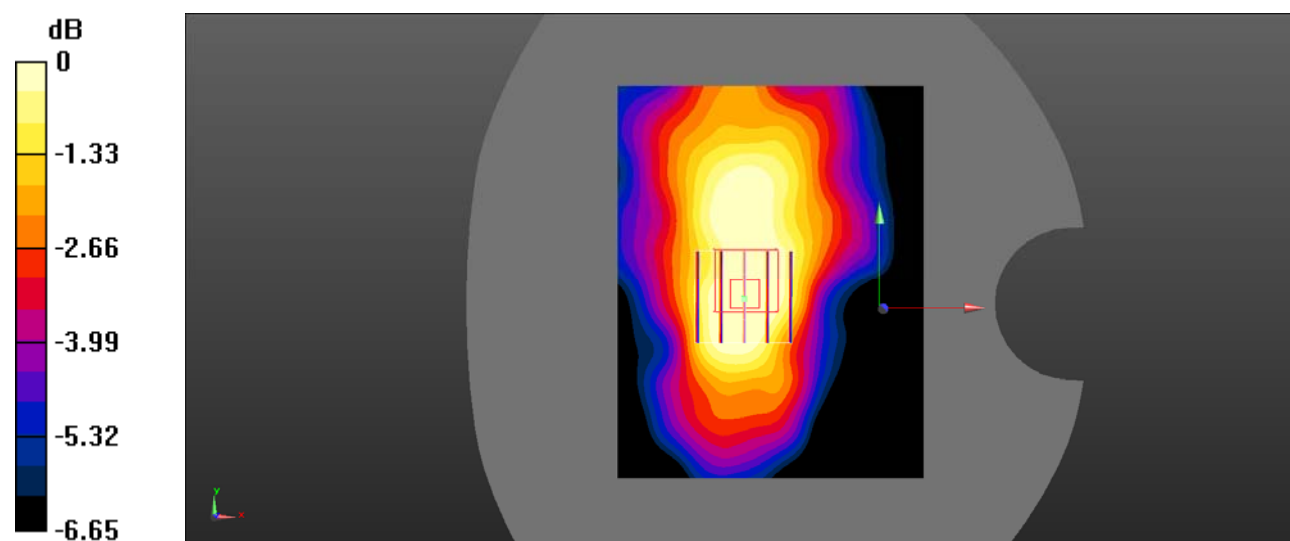

0 dB = 0.0324 W/kg = -14.89 dBW/kg

Test Plot 9#: PCS 1900_Body Back_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-3 slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f=1850.2$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.585$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.48 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.43 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.650 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

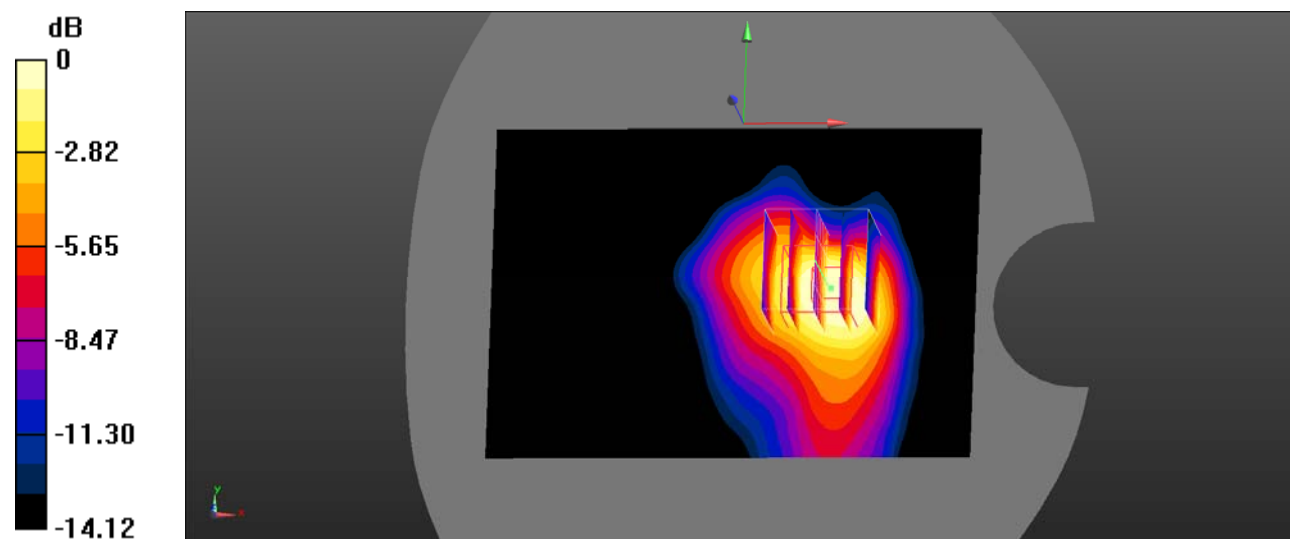

0 dB = 1.21 W/kg = 0.83 dBW/kg

Test Plot 10#: PCS 1900_Body Back_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.16 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.07 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.503 W/kg

Maximum value of SAR (measured) = 0.903 W/kg

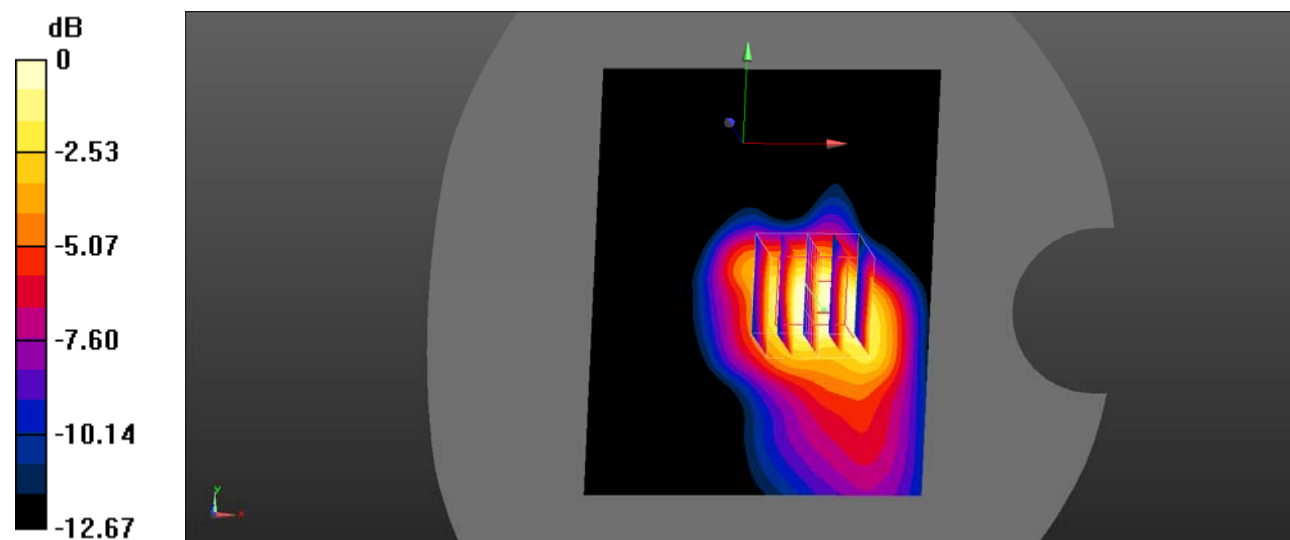

0 dB = 0.903 W/kg = -0.44 dBW/kg

Test Plot 11#: PCS 1900_Body Back_High_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-3 slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.721$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.53 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.71 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.690 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

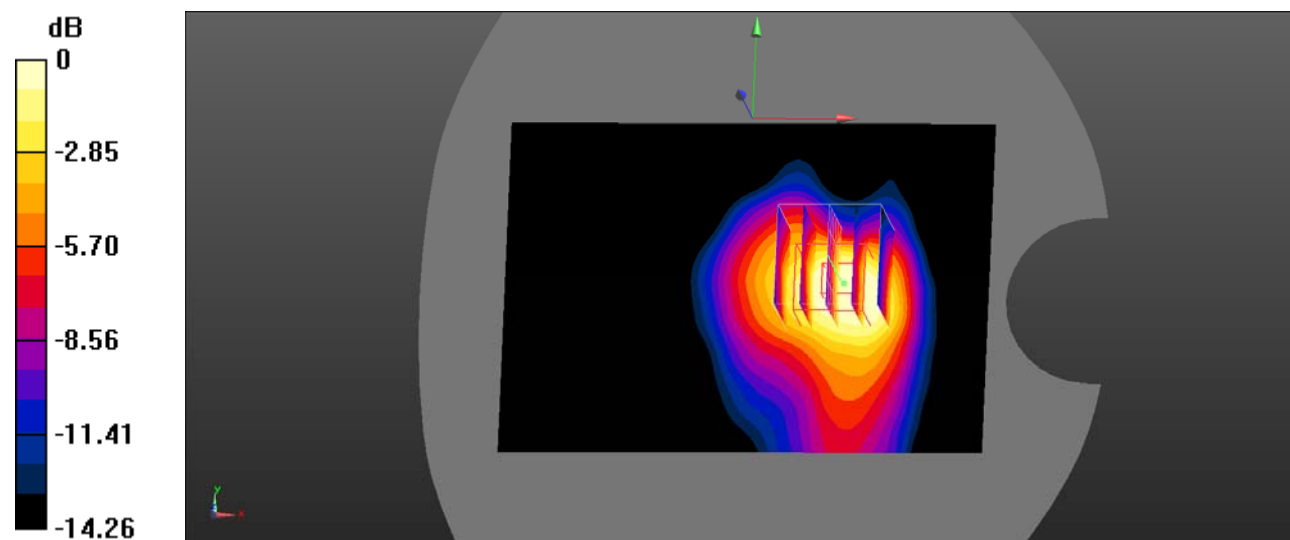

0 dB = 1.27 W/kg = 1.04 dBW/kg

Test Plot 12#: PCS 1900_Body Left_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.486 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.03 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.477 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.410 W/kg

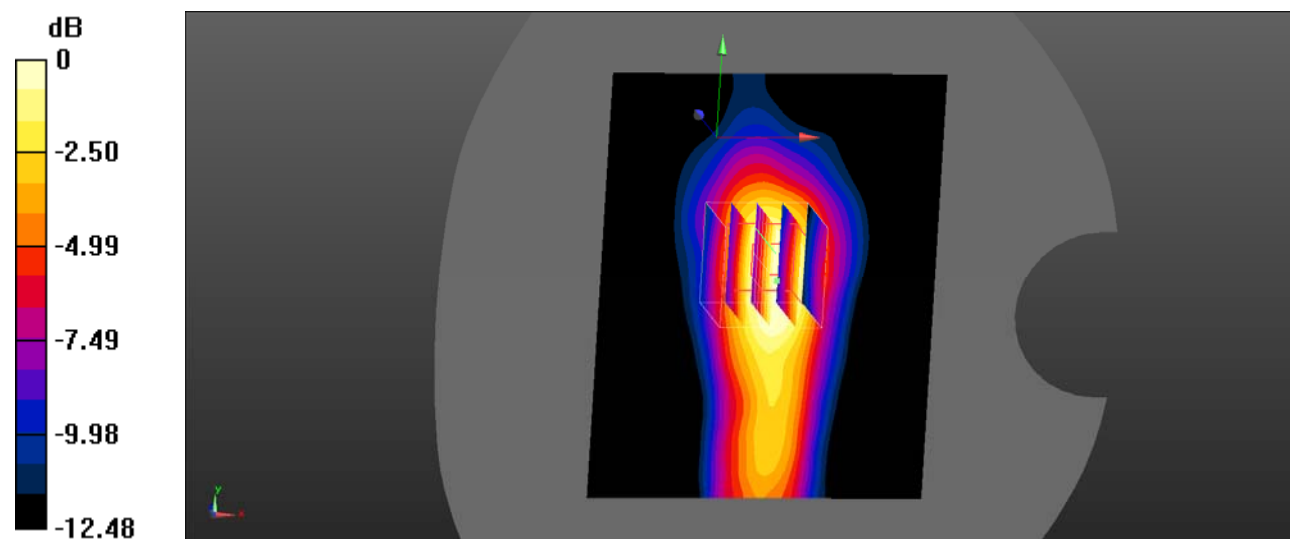

0 dB = 0.410 W/kg = -3.87 dBW/kg

Test Plot 13#: PCS 1900_Body Right_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.00838 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.9950 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.00704 W/kg

SAR(1 g) = 0.00523 W/kg; SAR(10 g) = 0.00454 W/kg

Maximum value of SAR (measured) = 0.00701 W/kg

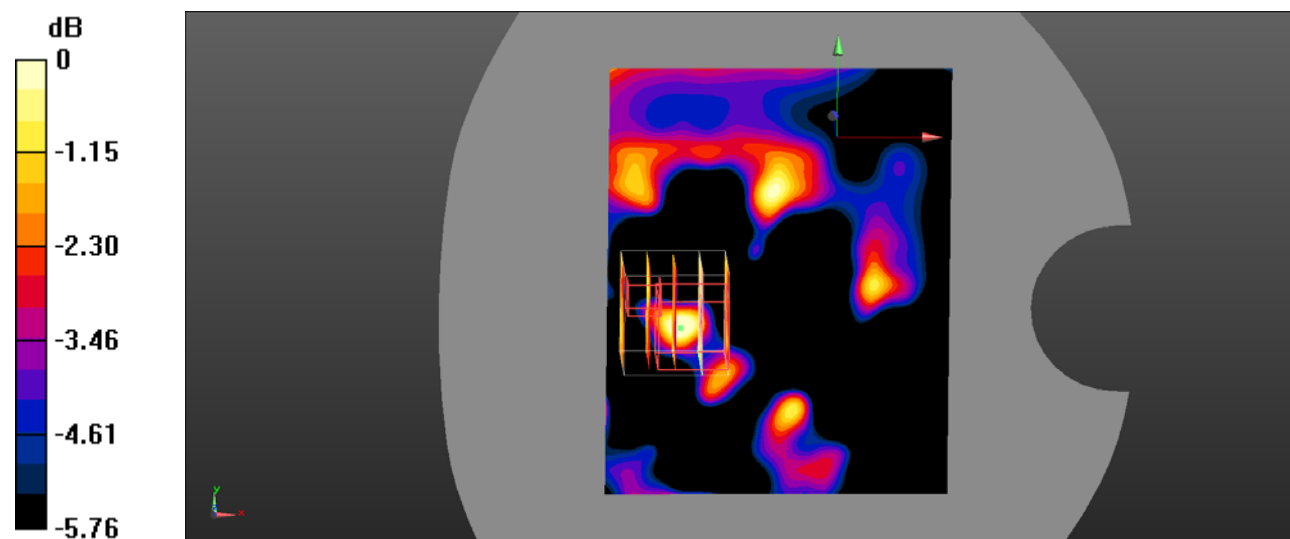

0 dB = 0.00701 W/kg = -21.54 dBW/kg

Test Plot 14#: PCS 1900_Body Top_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.461 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.51 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.382 W/kg

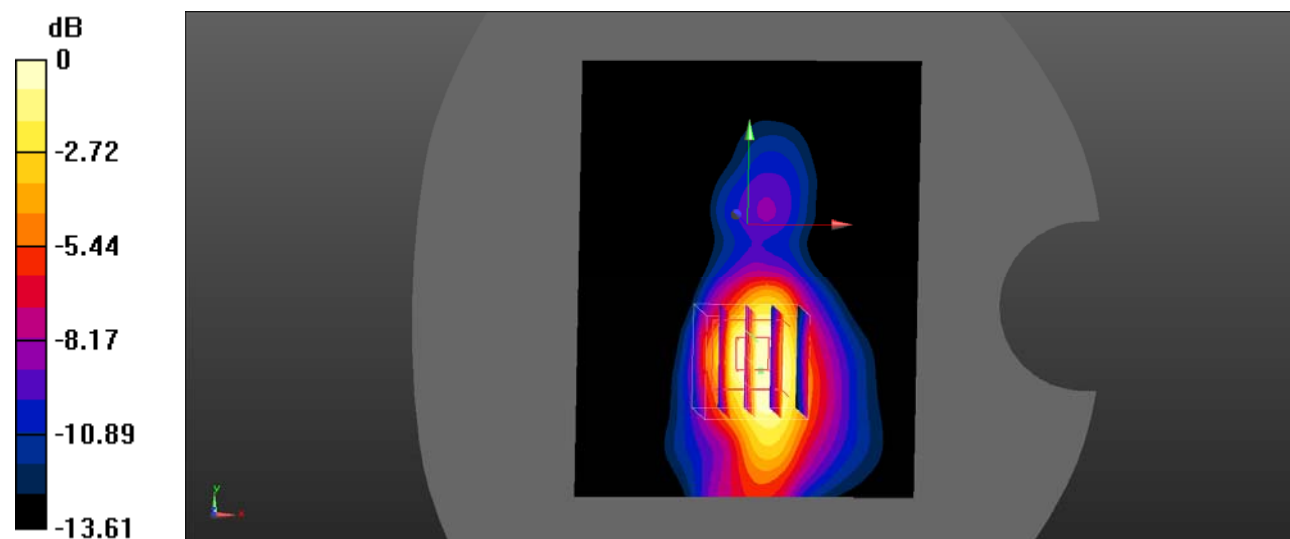

0 dB = 0.382 W/kg = -4.18 dBW/kg

Test Plot 15#: PCS 1900_Body Back_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.315 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.934 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.270 W/kg

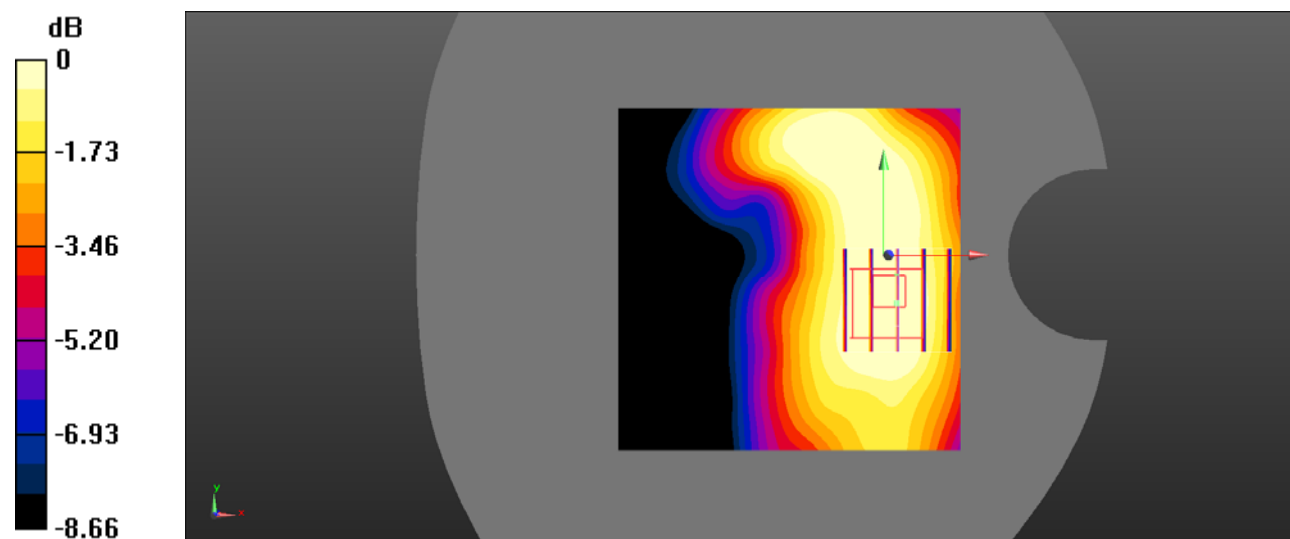

0 dB = 0.270 W/kg = -5.69 dBW/kg

Test Plot 16#: PCS 1900_Body Left_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.575 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.96 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.552 W/kg

SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 0.491 W/kg

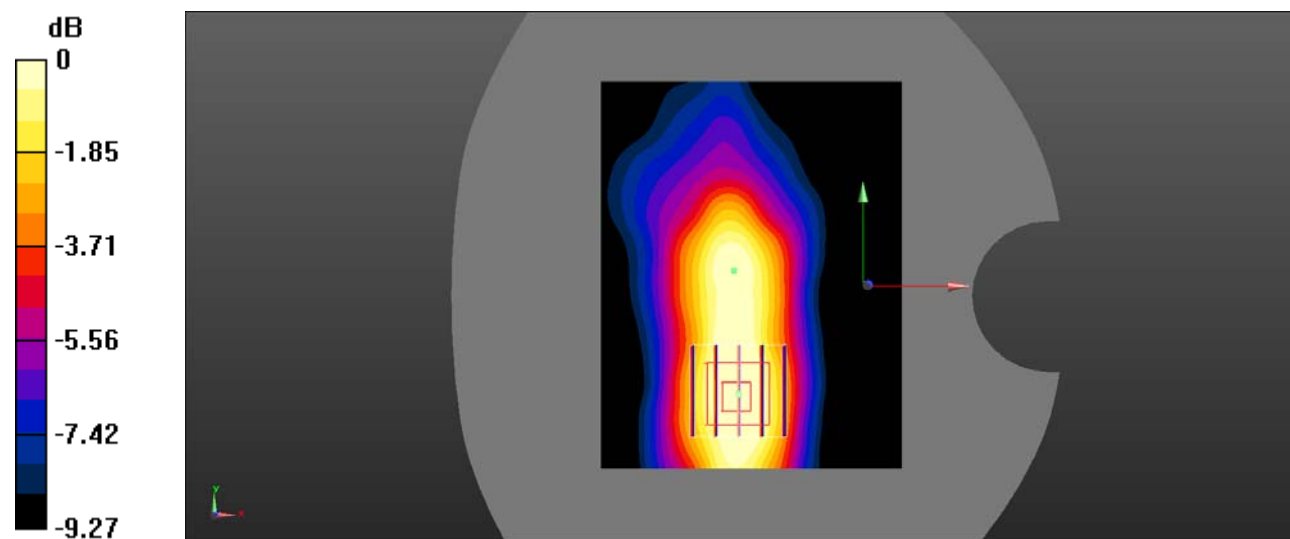

0 dB = 0.491 W/kg = -3.09 dBW/kg

Test Plot 17#: PCS 1900_Body Top_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.126 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.703 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

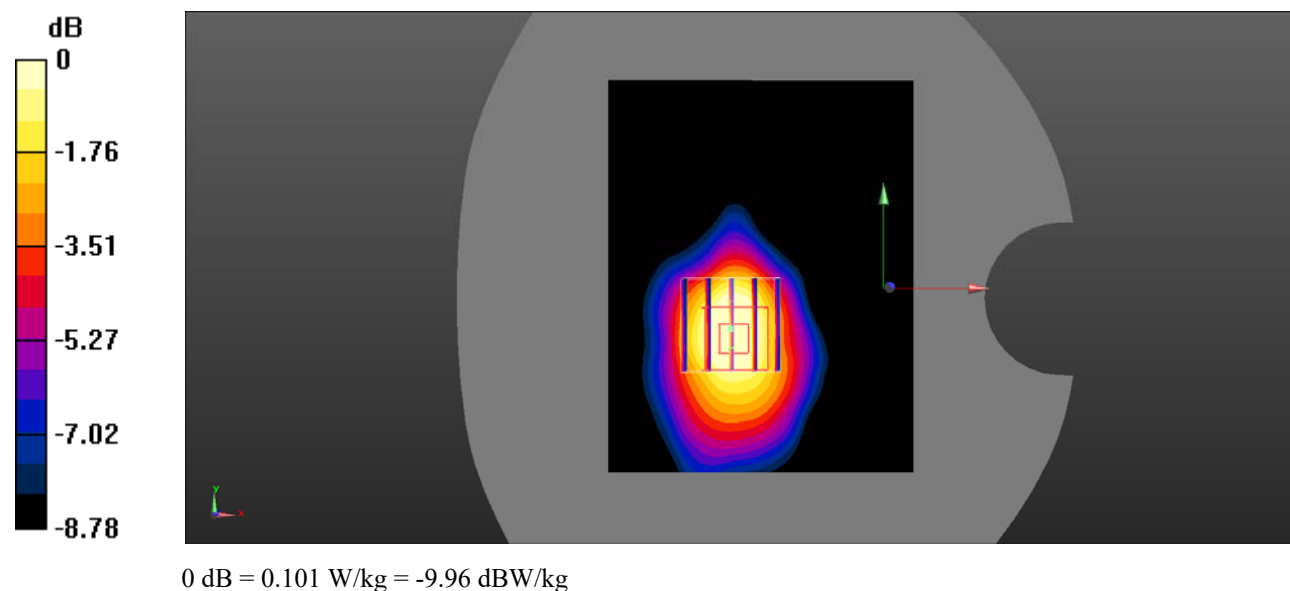

Test Plot 18#: WCDMA Band 2_Body Back_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.921 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.44 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.417 W/kg

Maximum value of SAR (measured) = 0.784 W/kg

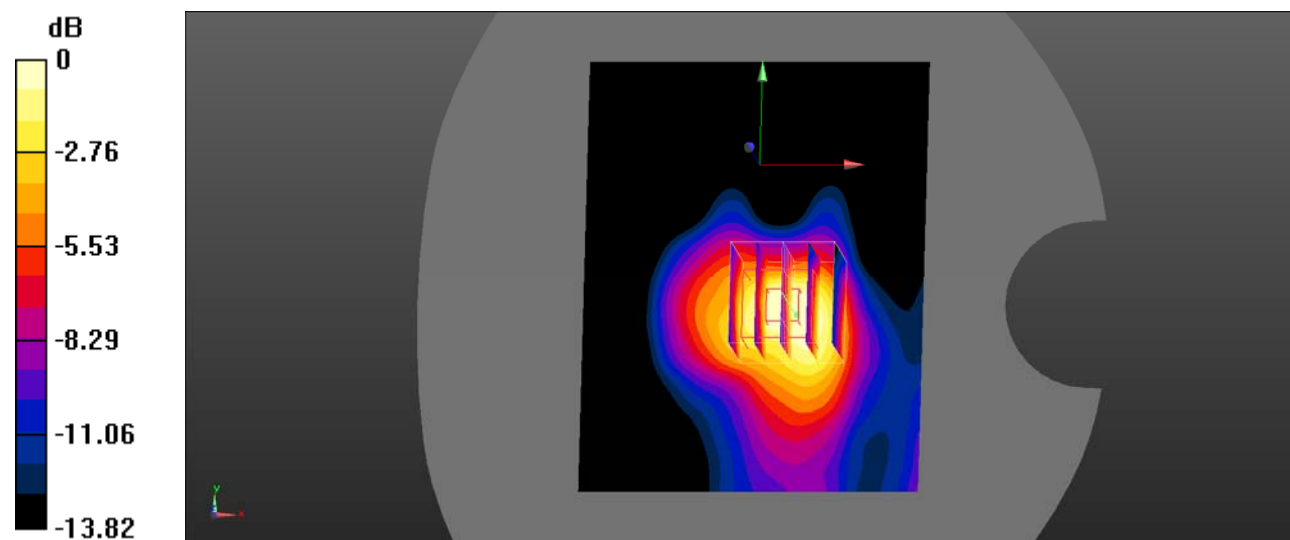

0 dB = 0.784 W/kg = -1.06 dBW/kg

Test Plot 19#: WCDMA Band 2_Body Left_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.368 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.87 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.350 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.302 W/kg

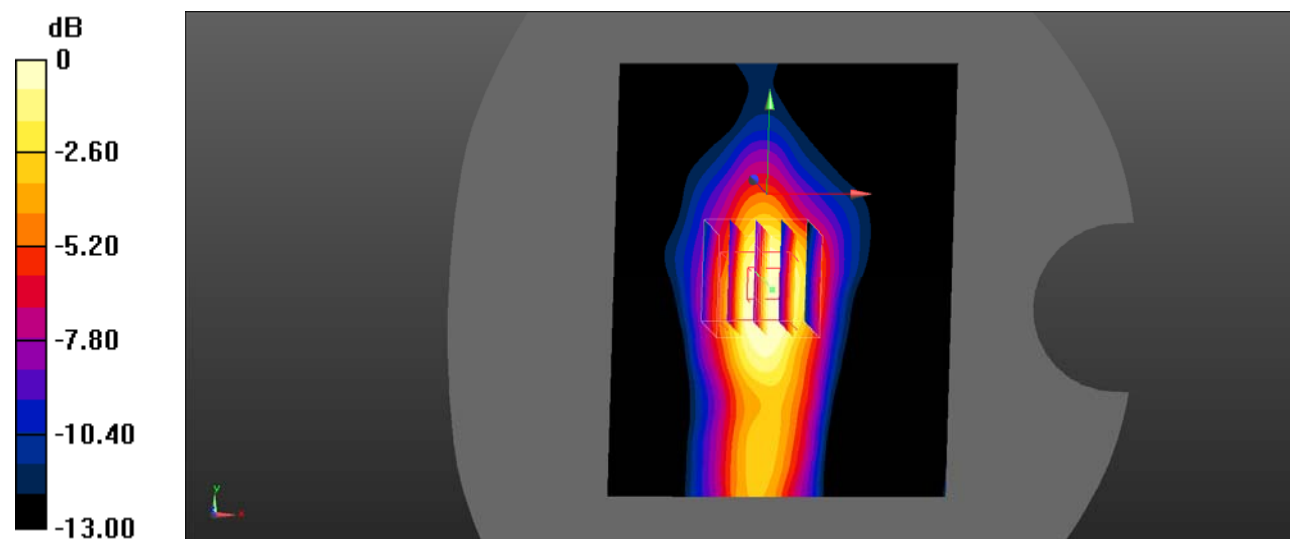

0 dB = 0.302 W/kg = -5.20 dBW/kg

Test Plot 20#: WCDMA Band 2_Body Top_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.378 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.99 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.425 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.354 W/kg

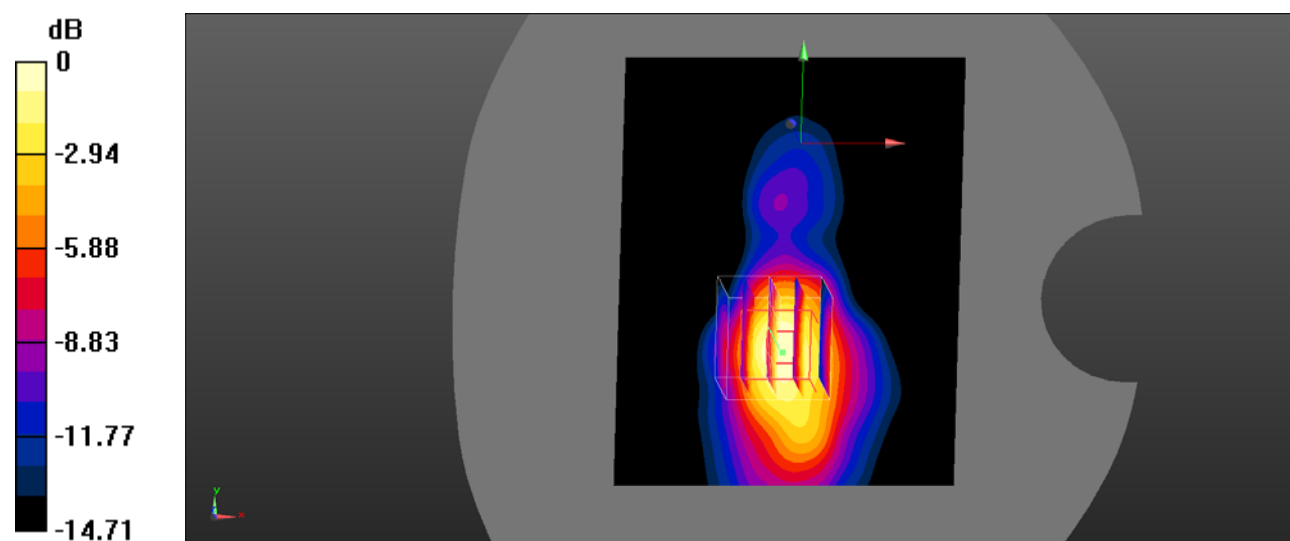

Test Plot 21#: WCDMA Band 2_Body Back_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.116 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.207 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.108 W/kg

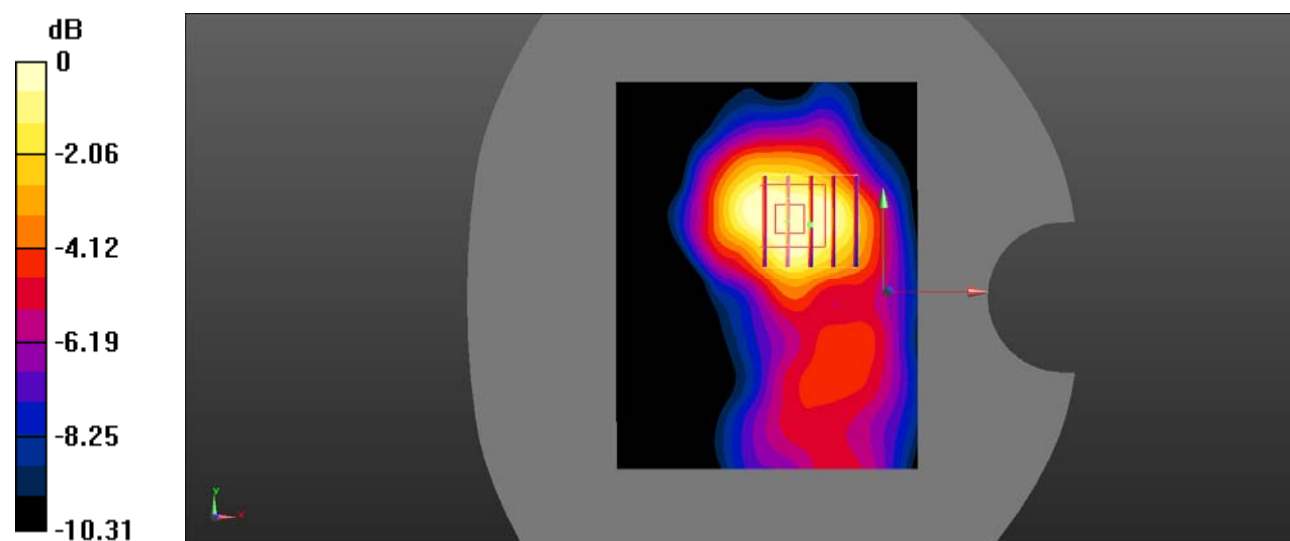

0 dB = 0.108 W/kg = -9.67 dBW/kg

Test Plot 22#: WCDMA Band 2_Body Left_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.140 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.522 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

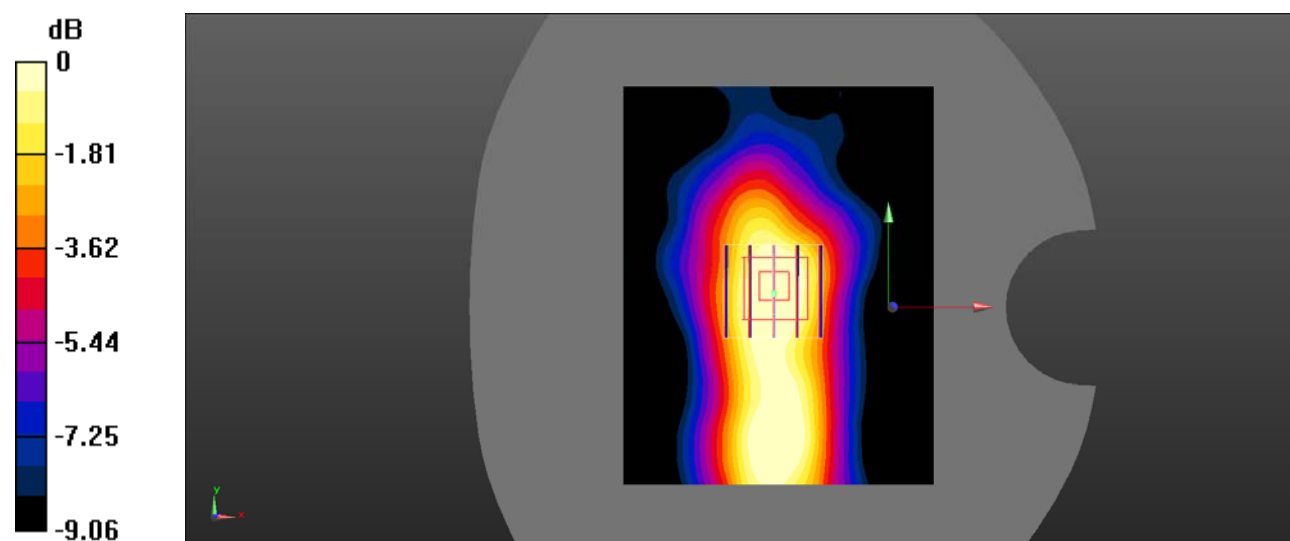

0 dB = 0.114 W/kg = -9.43 dBW/kg

Test Plot 23#: WCDMA Band 2_Body Top_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0133 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.6370 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0180 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0138 W/kg

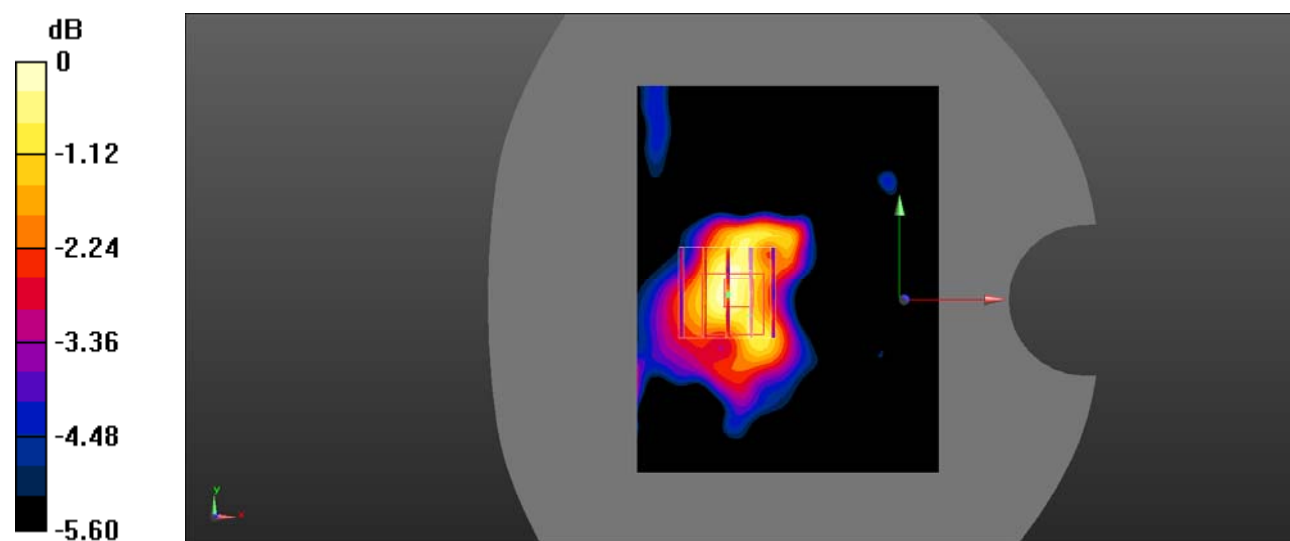

0 dB = 0.0138 W/kg = -18.60 dBW/kg

Test Plot 24#: WCDMA Band 4 _Body Back_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.661$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.53 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.788 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.602 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

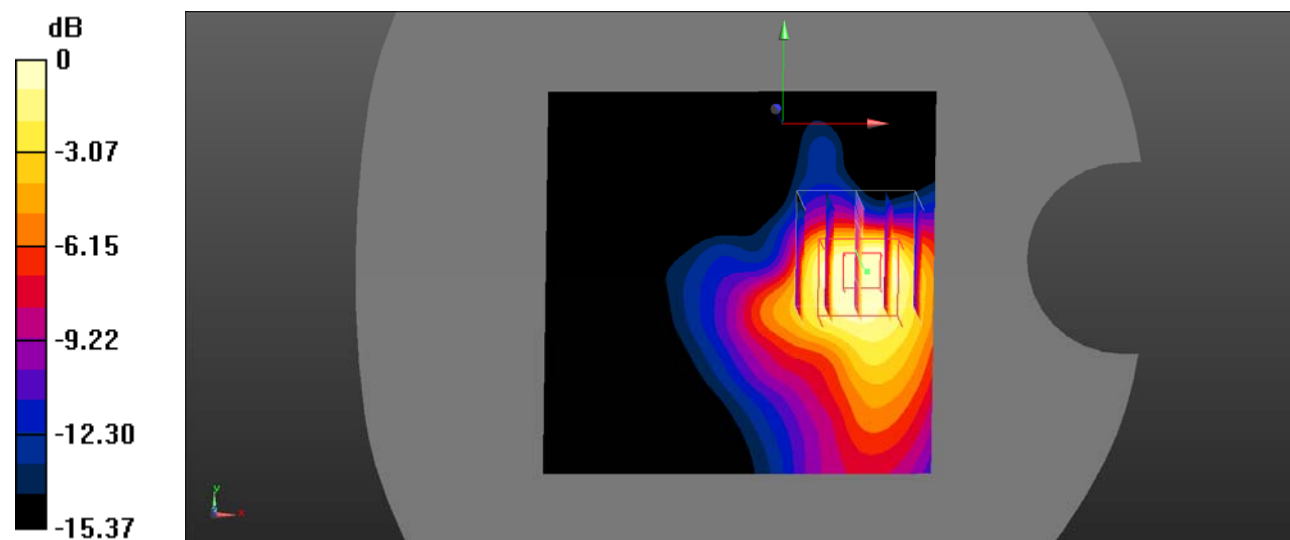

0 dB = 1.10 W/kg = 0.41 dBW/kg

Test Plot 25#: WCDMA Band 4_Body Back_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.311$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.51 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.841 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.615 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

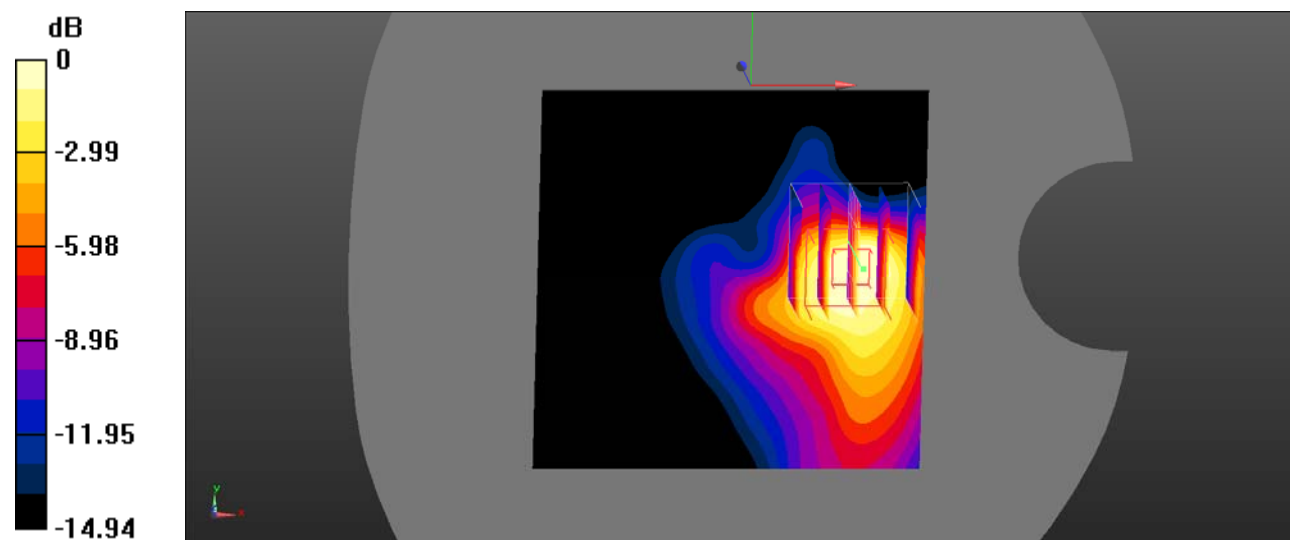

0 dB = 1.13 W/kg = 0.53 dBW/kg

Test Plot 26#: WCDMA Band 4_Body Back_High_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.183$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.37 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.80 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.602 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

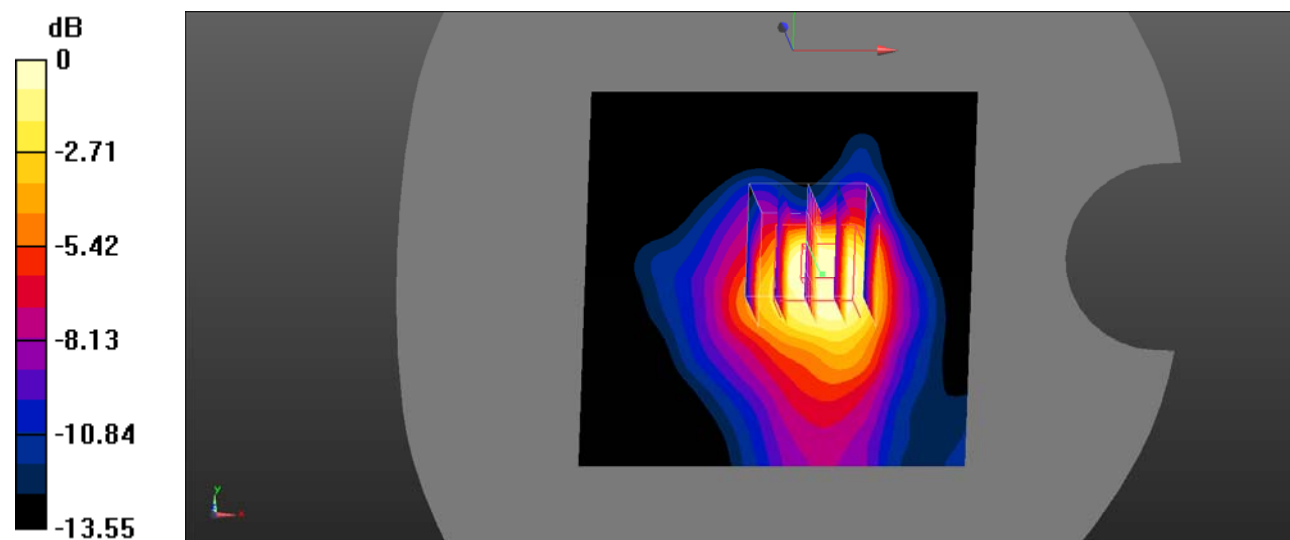

0 dB = 1.10 W/kg = 0.41 dBW/kg

Test Plot 27#: WCDMA Band 4_Body Left_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.311$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.421 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.32 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.426 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.370 W/kg

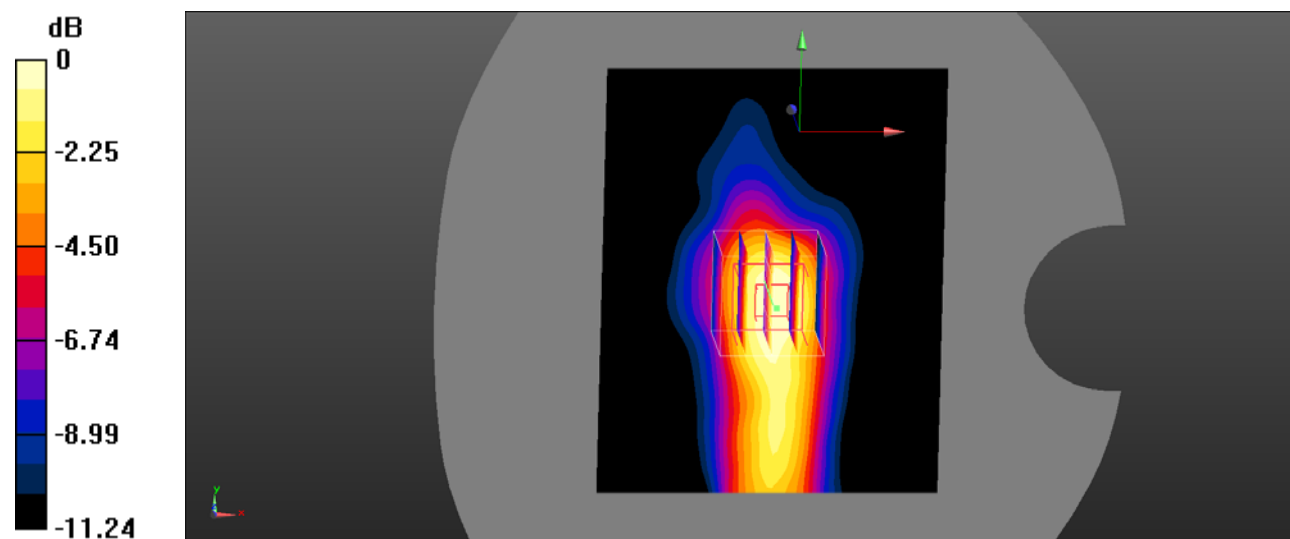

Test Plot 28#: WCDMA Band 4_Body Right_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.311$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0410 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.851 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0361 W/kg

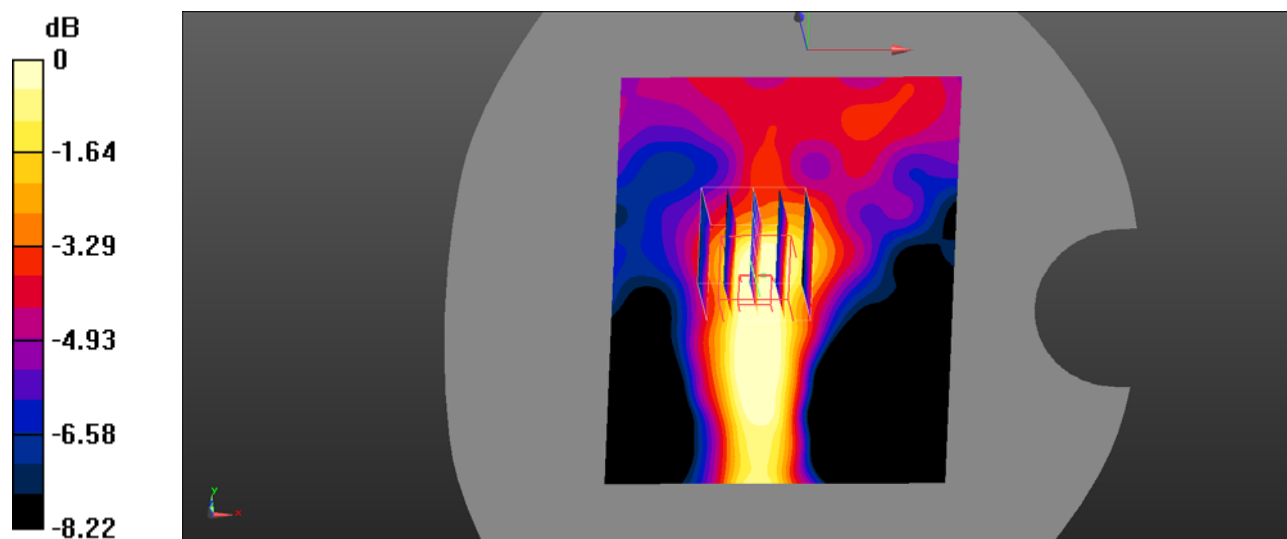

0 dB = 0.0361 W/kg = -14.42 dBW/kg

Test Plot 29#: WCDMA Band 4_Body Top_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.311$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0375 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.785 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0340 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0257 W/kg

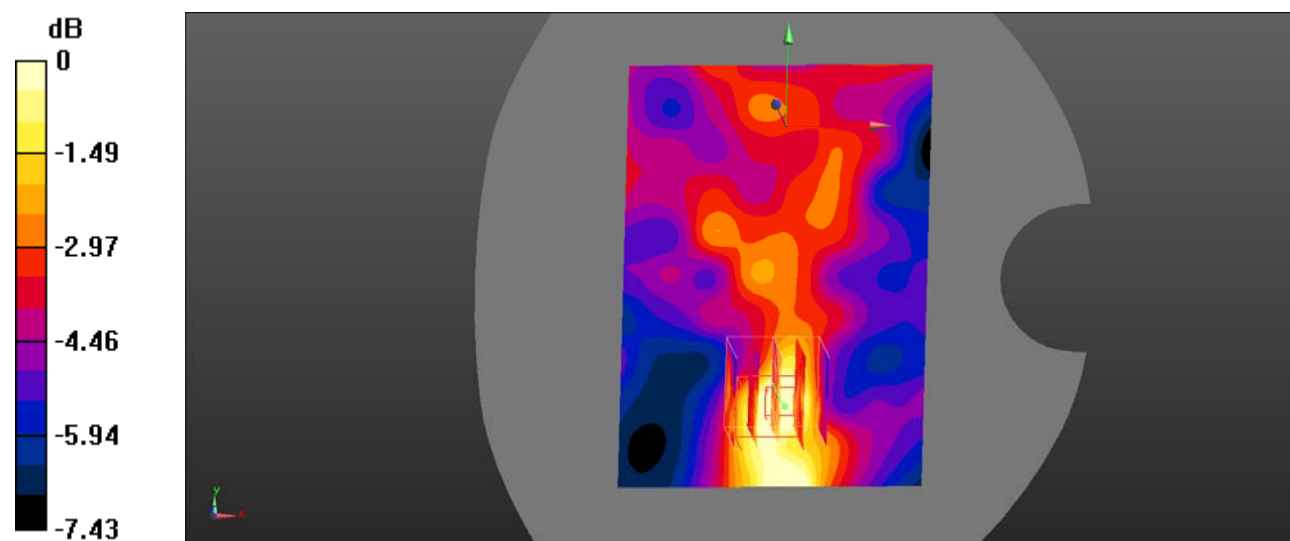

0 dB = 0.0257 W/kg = -15.90 dBW/kg

Test Plot 30#: WCDMA Band 4_Body Back_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.311$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0752 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.995 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0601 W/kg

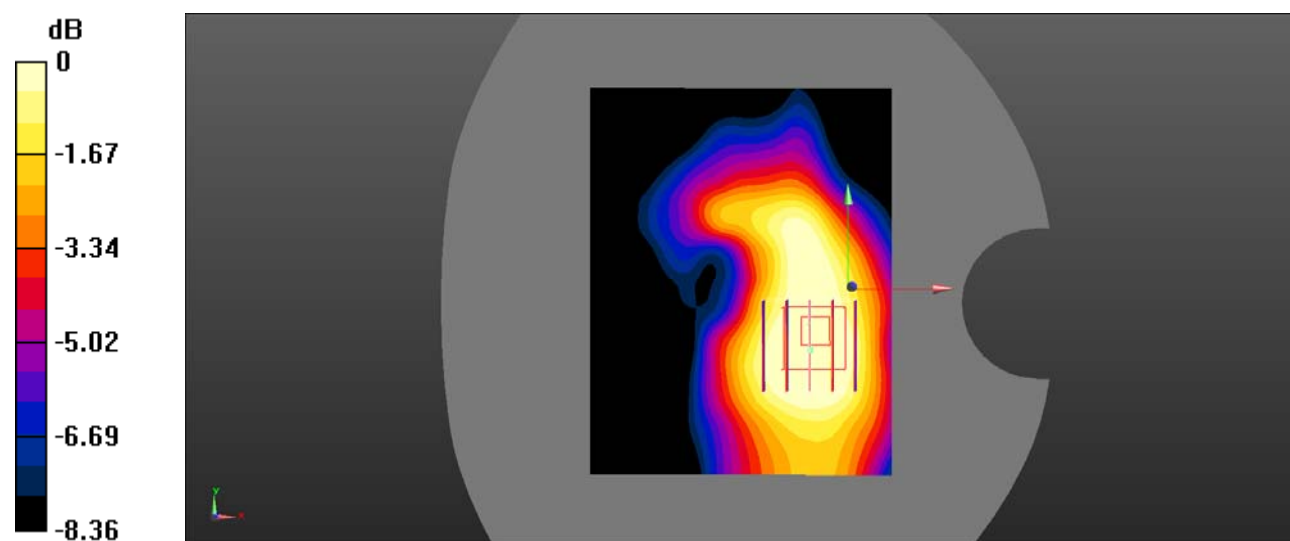

Test Plot 31#: WCDMA Band 4_Body Left_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.311$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.126 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.458 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

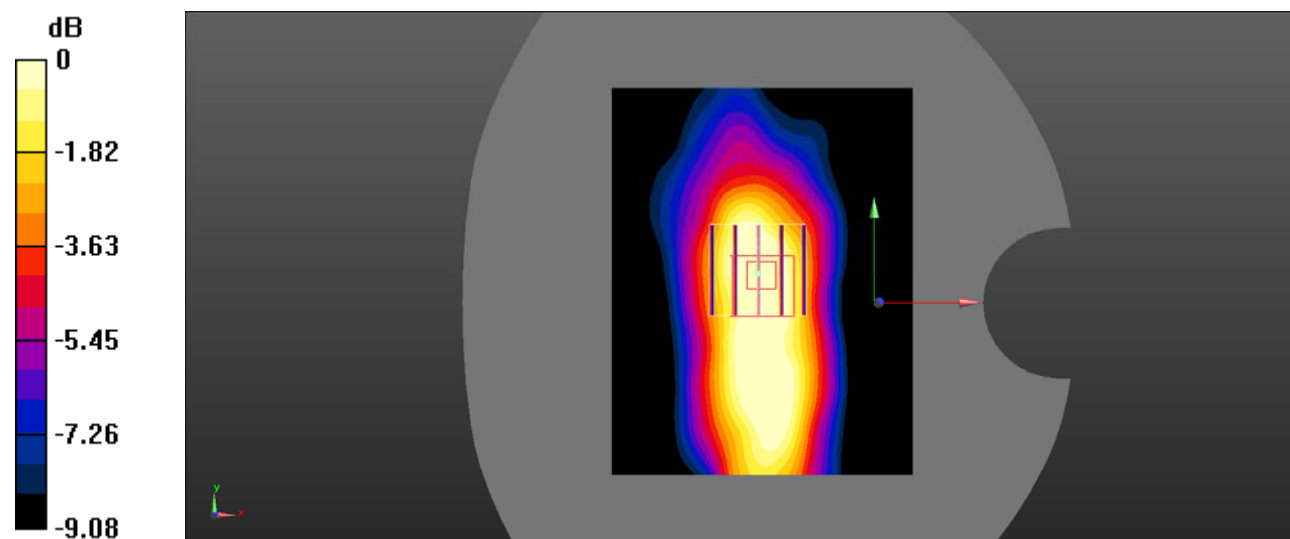

0 dB = 0.102 W/kg = -9.91 dBW/kg

Test Plot 32#: WCDMA Band 4_Body Top_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.311$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0101 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.905 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.00884 W/kg; SAR(10 g) = 0.00677 W/kg

Maximum value of SAR (measured) = 0.0103 W/kg

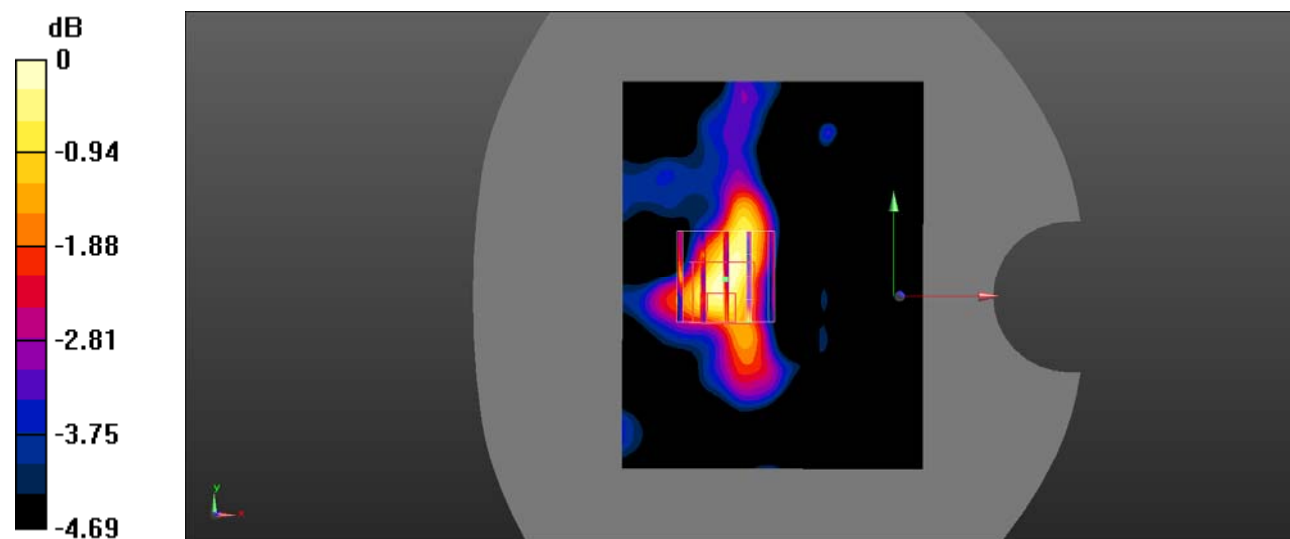

Test Plot 33#: WCDMA Band 5_Body Back_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.866 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.62 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.416 W/kg

Maximum value of SAR (measured) = 0.748 W/kg

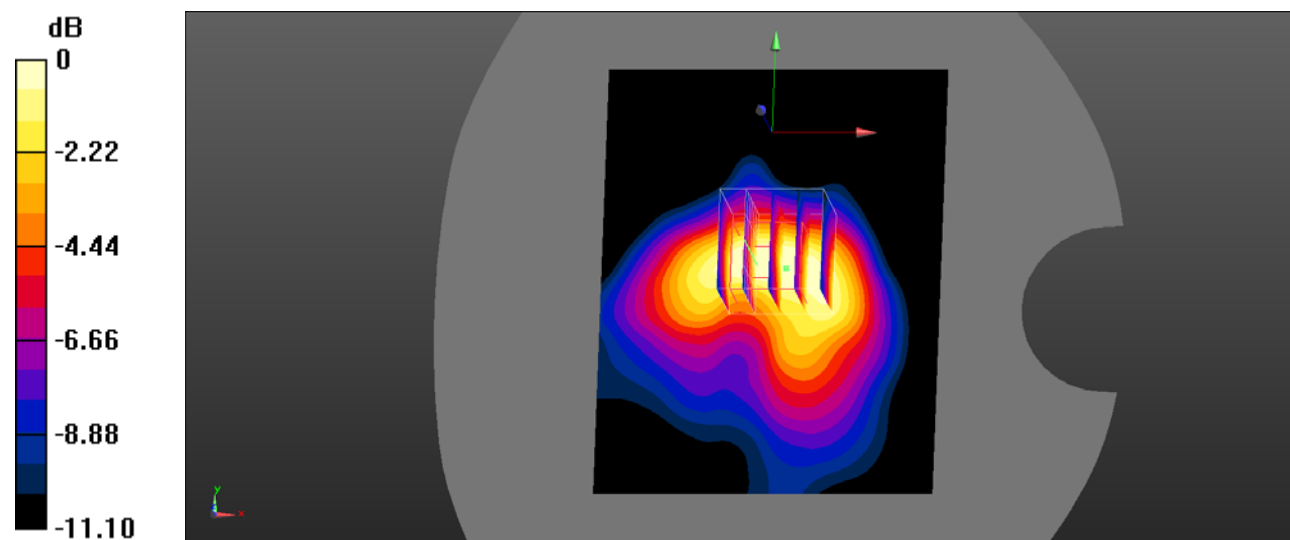

0 dB = 0.748 W/kg = -1.26 dBW/kg

Test Plot 34#: WCDMA Band 5_Body Left_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.365 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.55 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

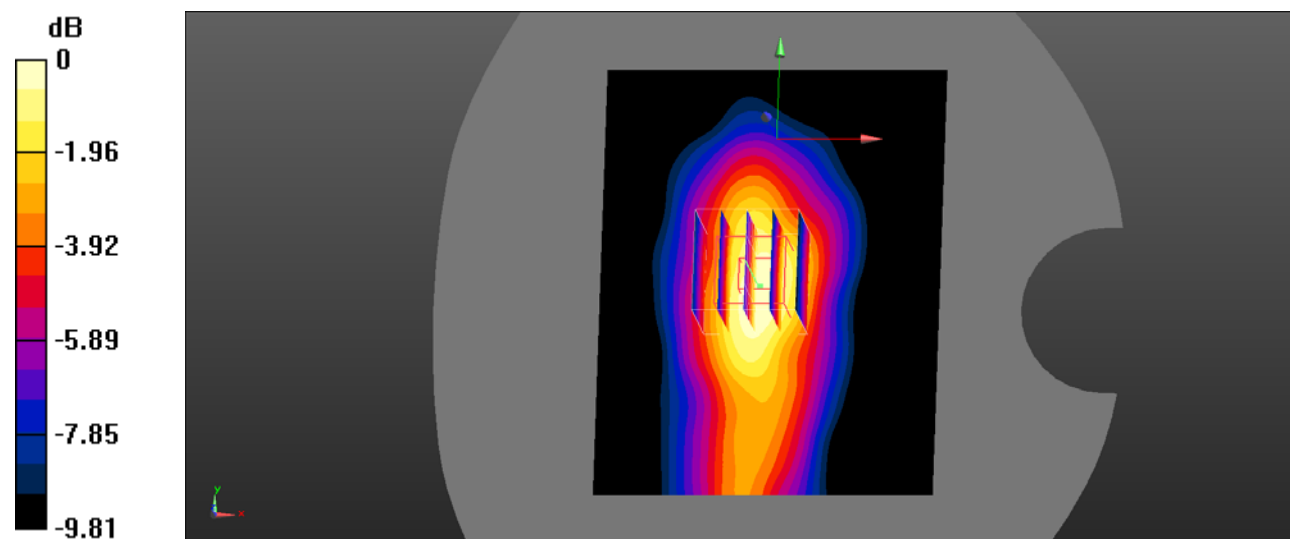

0 dB = 0.362 W/kg = -4.41 dBW/kg

Test Plot 35#: WCDMA Band 5_ Body Right_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0657 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.848 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0489 W/kg

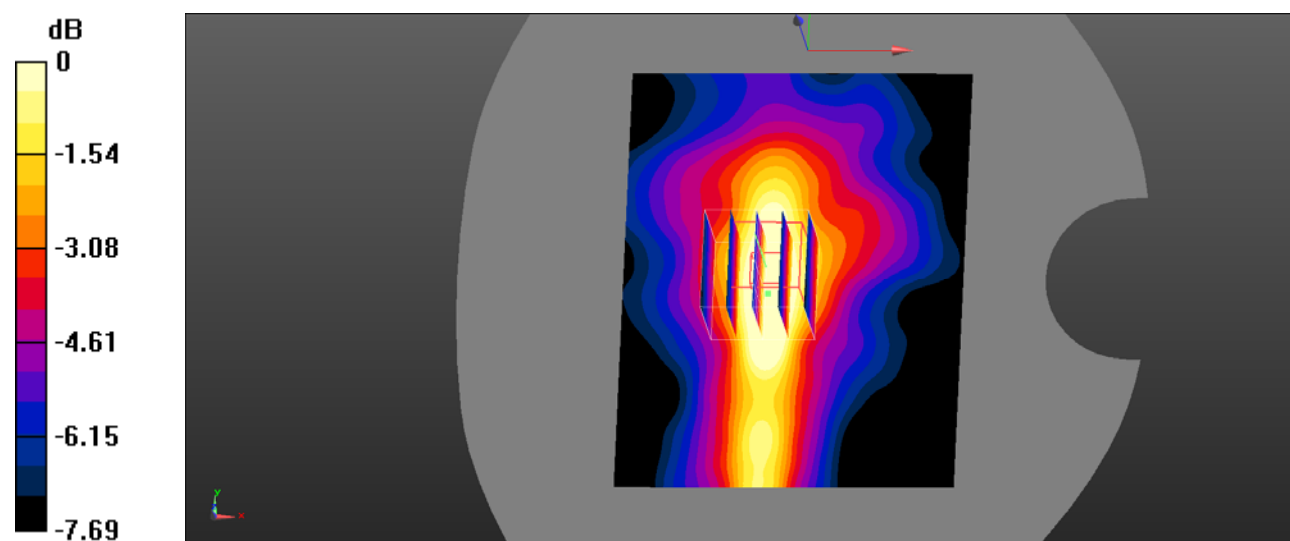

Test Plot 36#: WCDMA Band 5_Body Top_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.644 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.38 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.794 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.314 W/kg

Maximum value of SAR (measured) = 0.665 W/kg

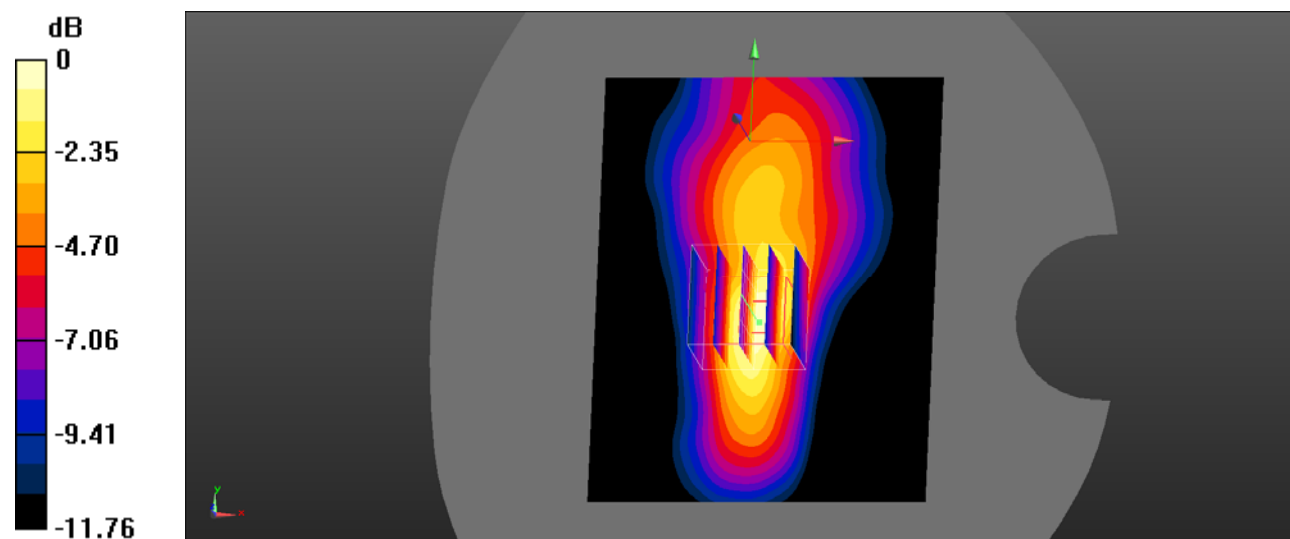

0 dB = 0.665 W/kg = -1.77 dBW/kg

Test Plot 37#: WCDMA Band 5 _Body Back_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.155 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.325 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

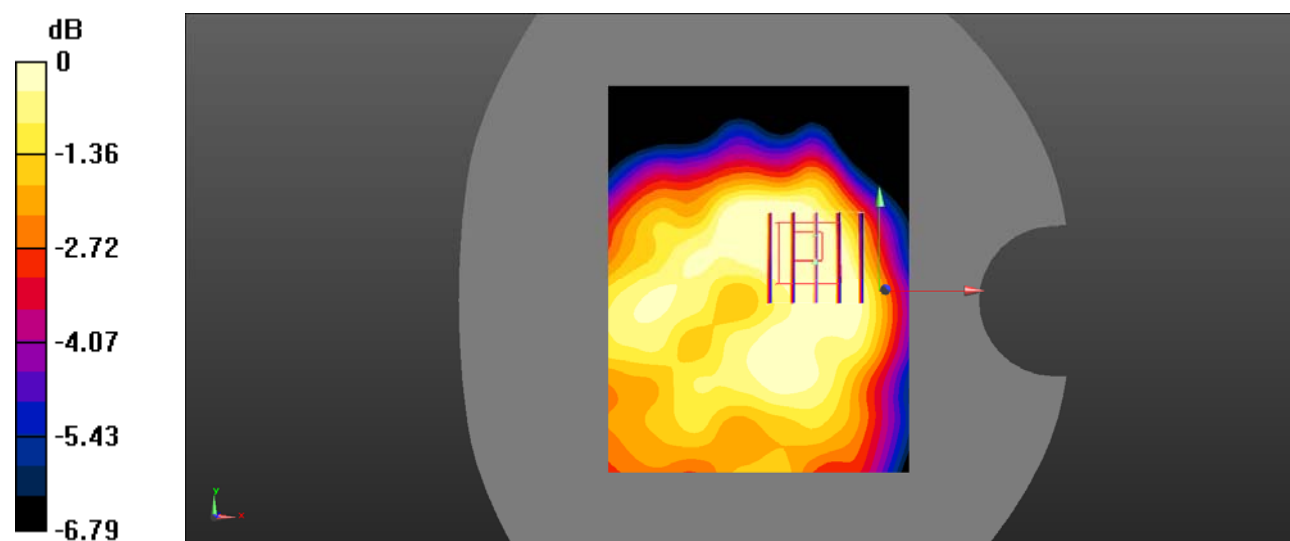

0 dB = 0.120 W/kg = -9.21 dBW/kg

Test Plot 38#: WCDMA Band 5_Body Left_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.114 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.05 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.0965 W/kg

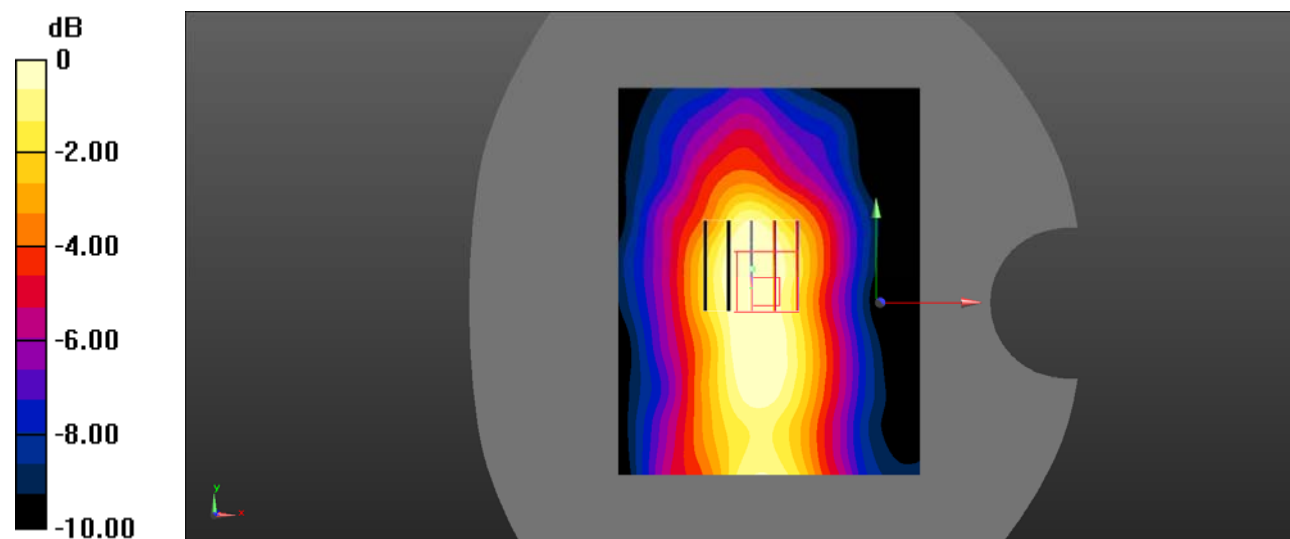

0 dB = 0.0965 W/kg = -10.15 dBW/kg

Test Plot 39#: WCDMA Band 5_Body Top_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.999$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.105 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.722 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.0869 W/kg

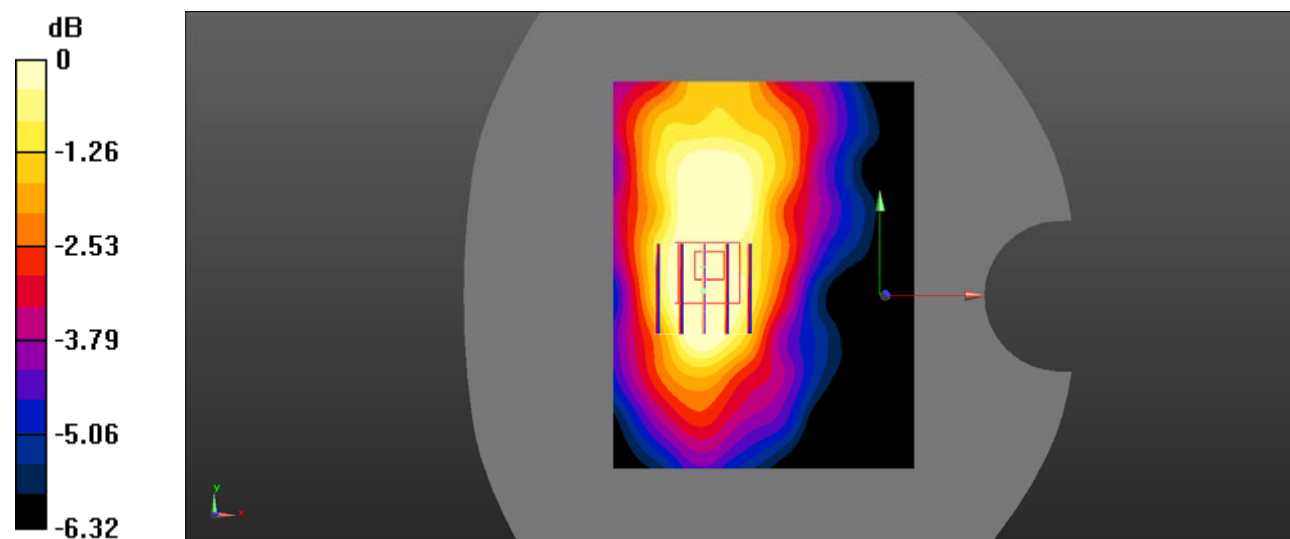

0 dB = 0.0869 W/kg = -10.61 dBW/kg

Test Plot 40#: LTE Band 7_Body Back_1RB_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 38.407$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.72 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.27 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.517 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

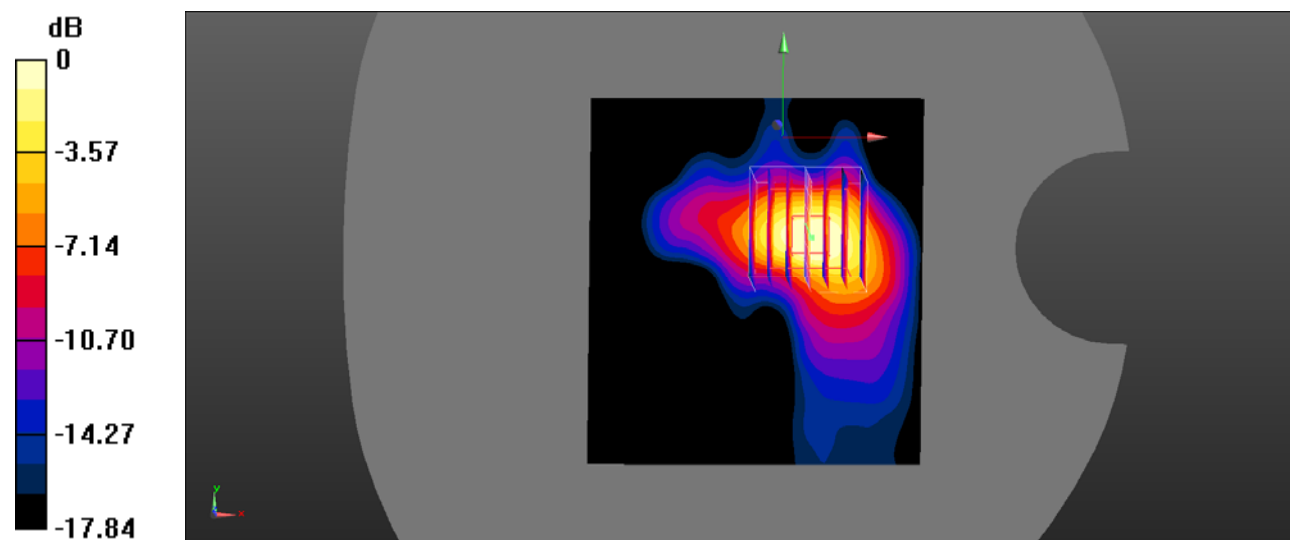

0 dB = 1.37 W/kg = 1.37 dBW/kg

Test Plot 41#: LTE Band 7_Body Back_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.73 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.18 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.499 W/kg

Maximum value of SAR (measured) = 1.40 W/kg

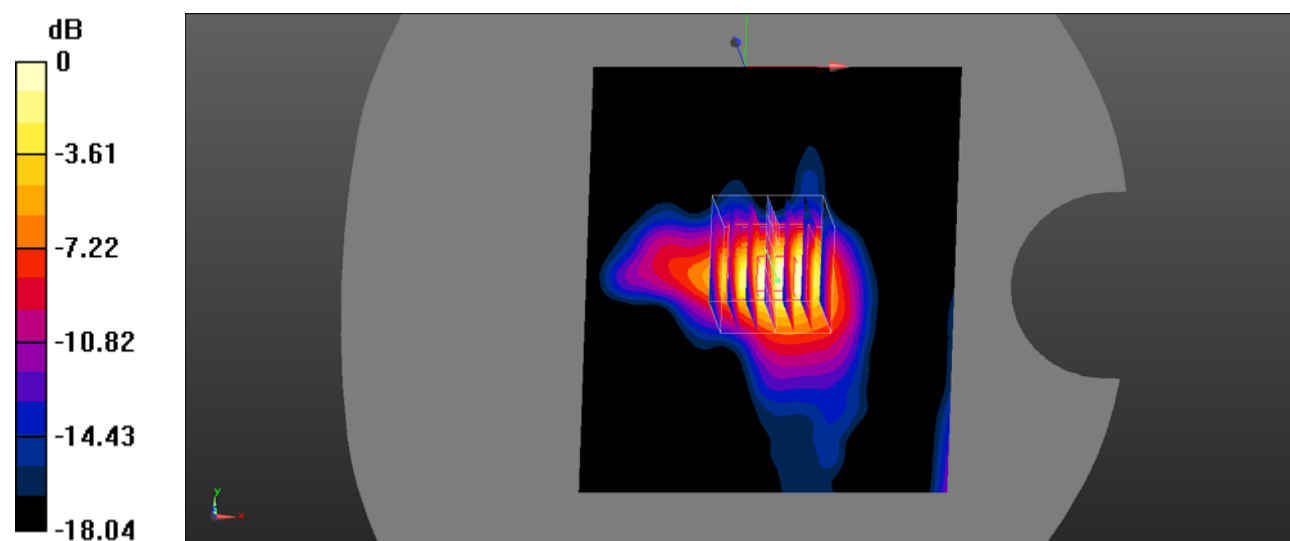

0 dB = 1.40 W/kg = 1.46 dBW/kg

Test Plot 42#: LTE Band 7_Body Back_1RB_High_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 38.134$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.33 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.918 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.395 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

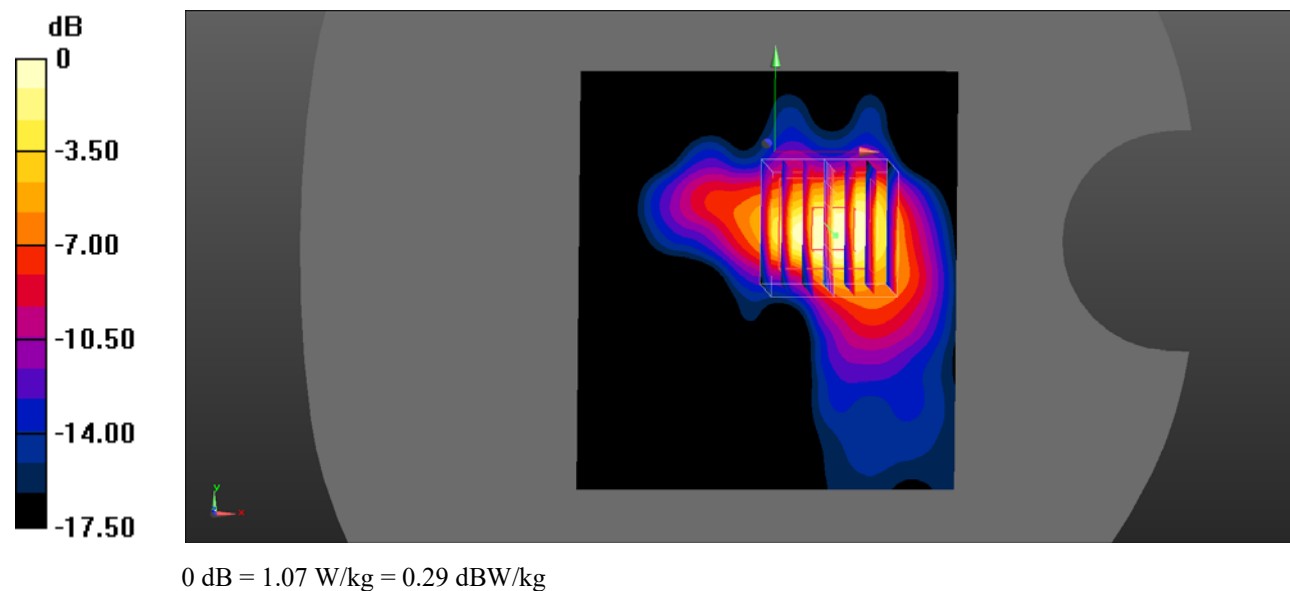

Test Plot 43#: LTE Band 7_Body Back_50%RB_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 38.407$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.74 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.84 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.513 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

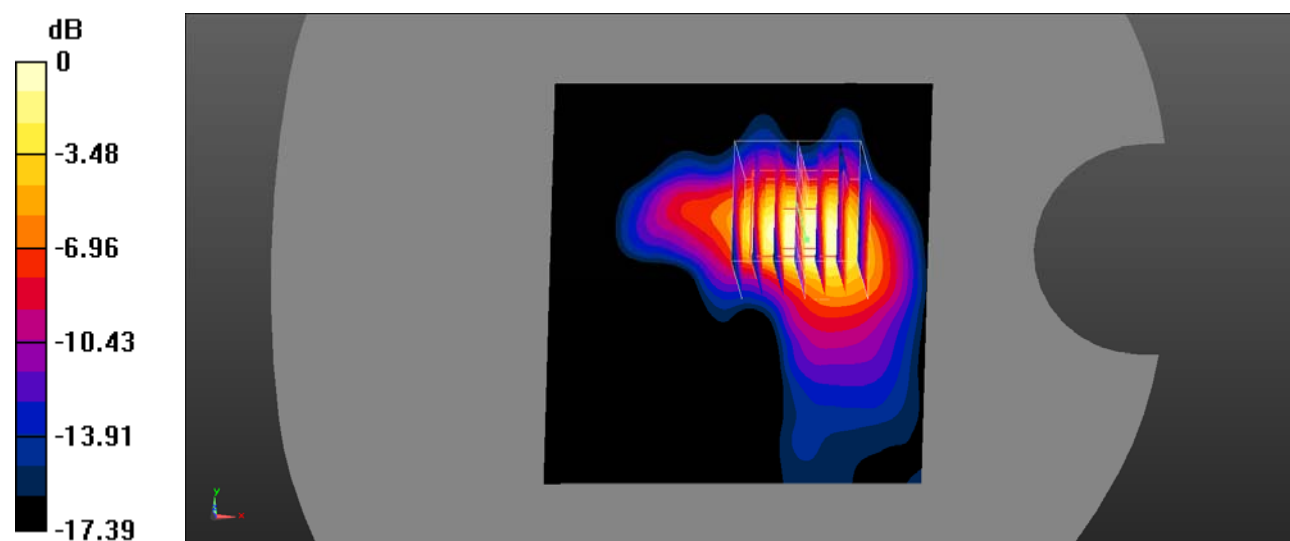

0 dB = 1.33 W/kg = 1.24 dBW/kg

Test Plot 44#: LTE Band 7_Body Back_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.36 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.34 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.471 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

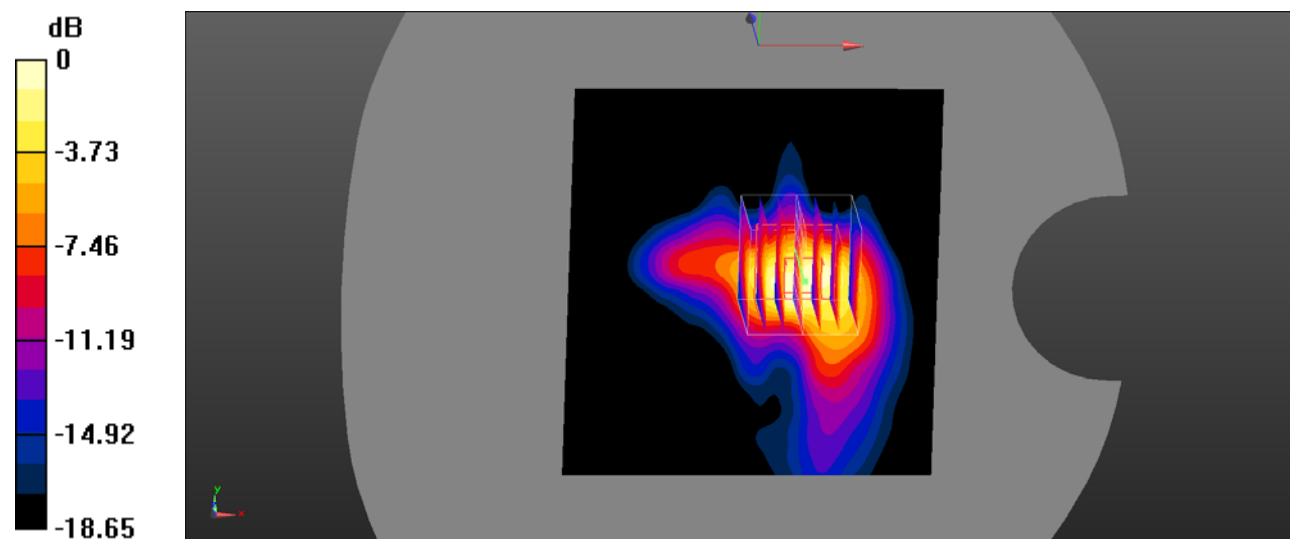

0 dB = 1.28 W/kg = 1.07 dBW/kg

Test Plot 45#: LTE Band 7_Body Back_50%RB_High_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 38.134$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.01 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 9.630 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.40 W/kg
SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.379 W/kg
Maximum value of SAR (measured) = 1.02 W/kg

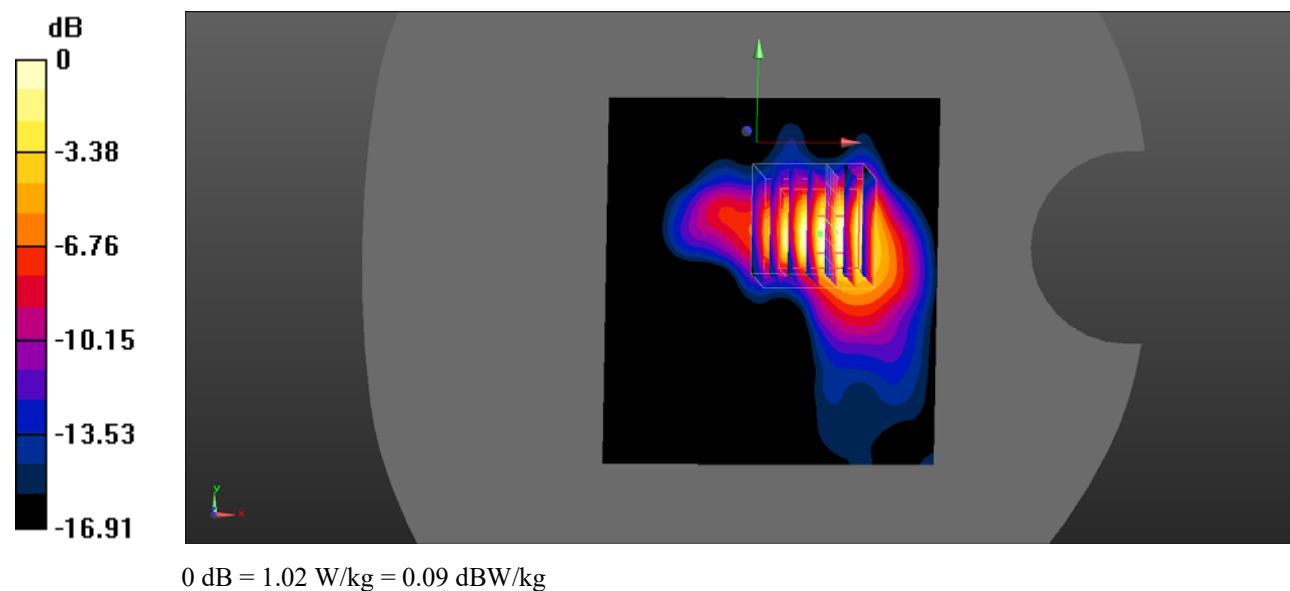

Test Plot 46#: LTE Band 7_Body Back_100%RB_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 38.407$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.61 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.52 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.486 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

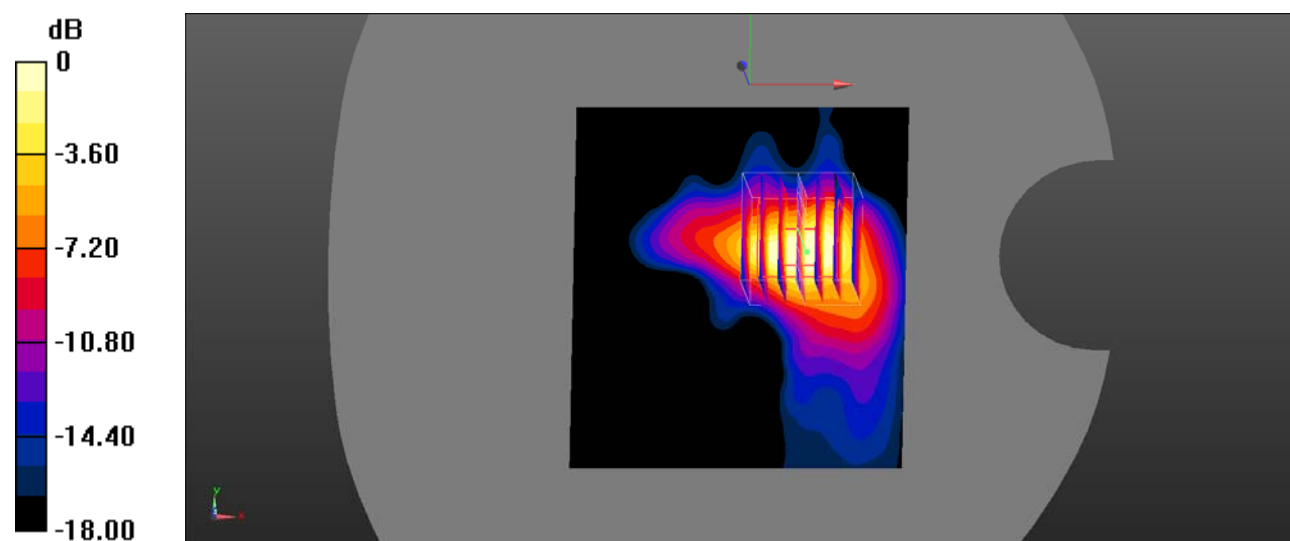

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Plot 47#: LTE Band 7_Body Back_100%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.35 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.29 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.450 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

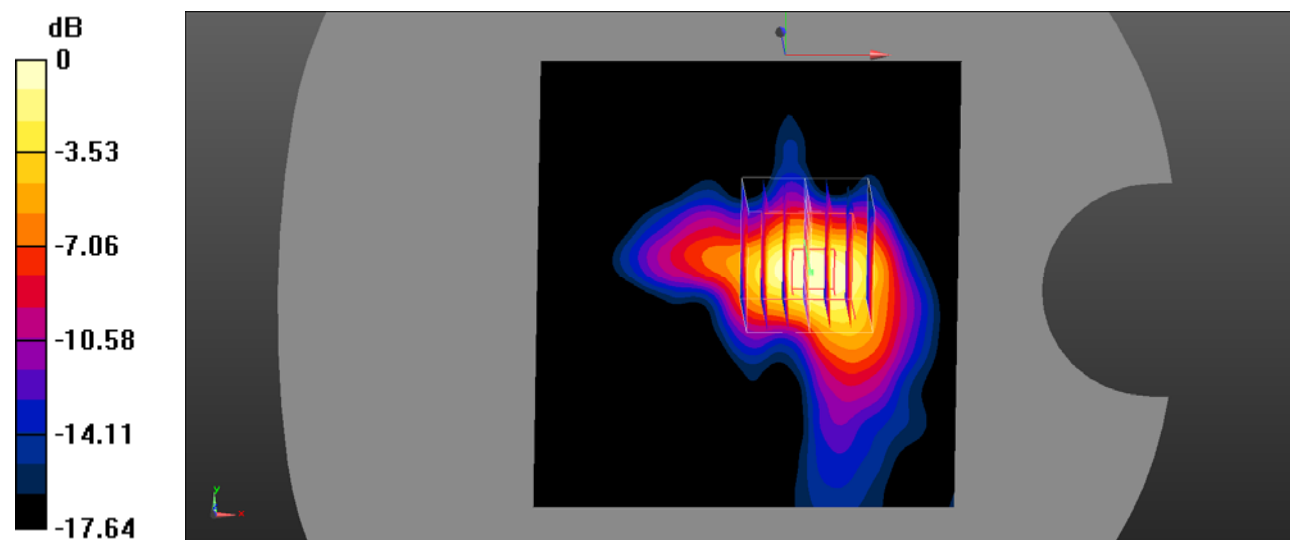

0 dB = 1.18 W/kg = 0.72 dBW/kg

Test Plot 48#: LTE Band 7_Body Back_100%RB_High_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 38.134$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 15.55 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 1.44 W/kg
SAR(1 g) = 0.726 W/kg; SAR(10 g) = 0.326 W/kg
Maximum value of SAR (measured) = 1.04 W/kg

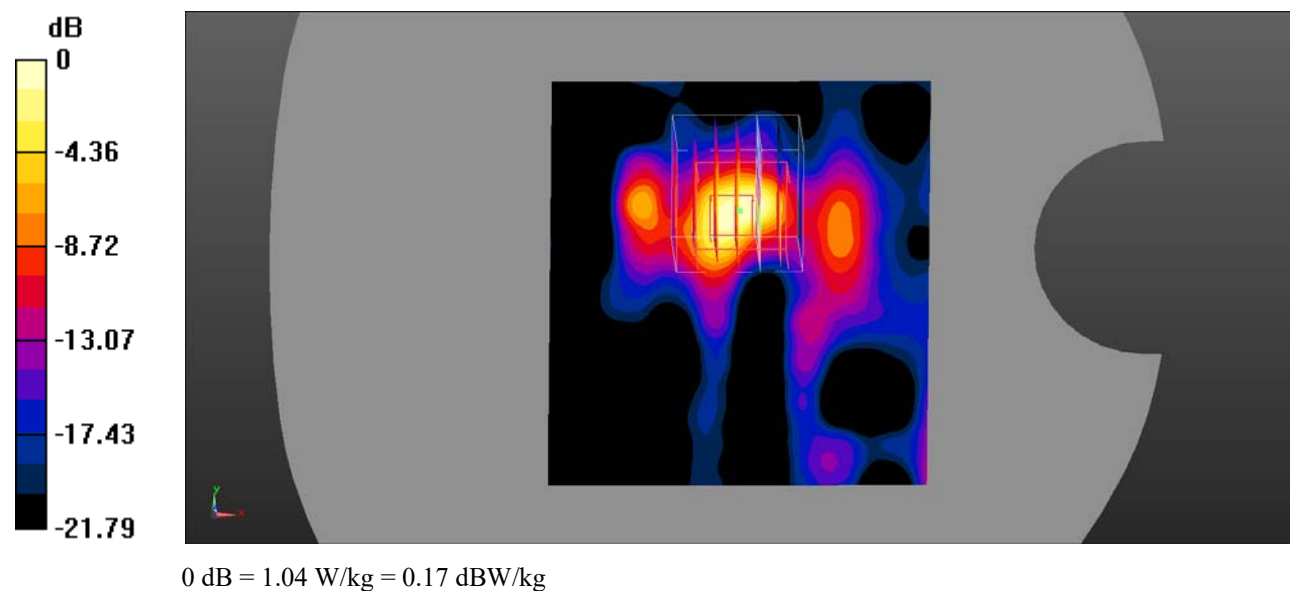

Test Plot 49#: LTE Band 7_Body Left_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.294 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.009 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.210 W/kg

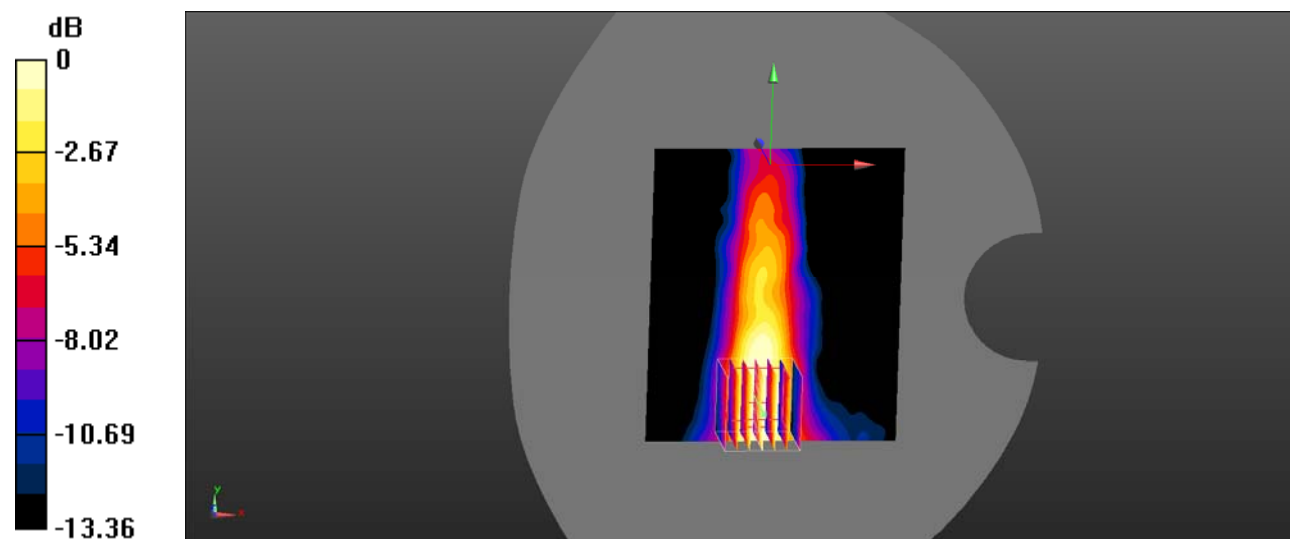

0 dB = 0.210 W/kg = -6.78 dBW/kg

Test Plot 50#: LTE Band 7_ Body Left_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.226 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.831 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.179 W/kg

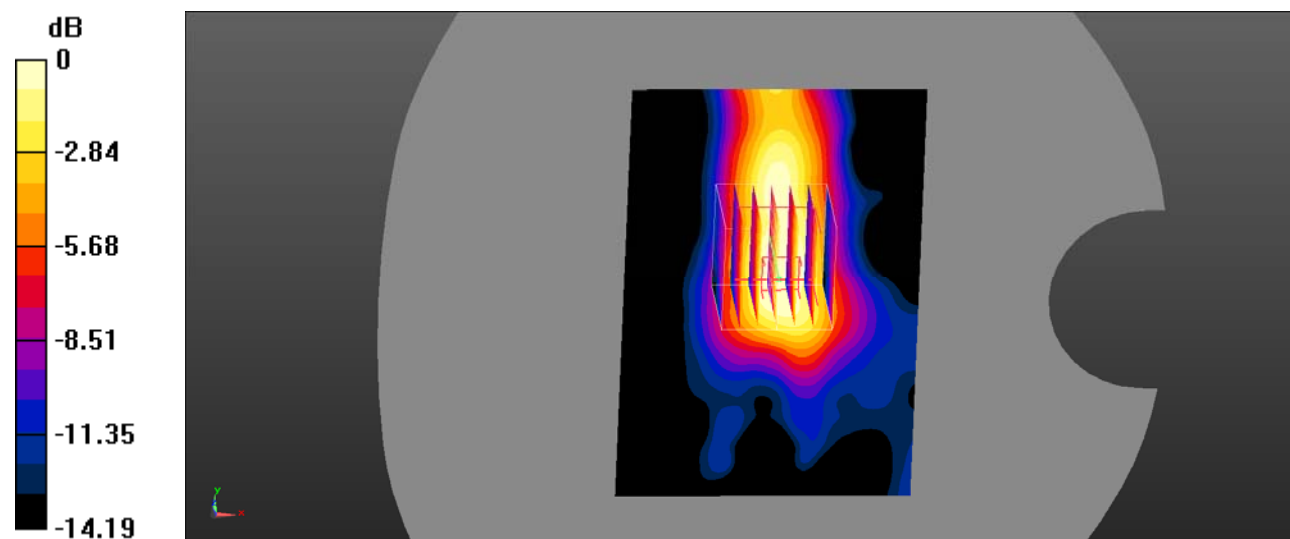

0 dB = 0.179 W/kg = -7.47 dBW/kg

Test Plot 51#: LTE Band 7_Body Right_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.000423 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9560 V/m; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 0.00981 W/kg

SAR(1 g) = 0.00231 W/kg; SAR(10 g) = 0.000489 W/kg

Maximum value of SAR (measured) = 0.00511 W/kg

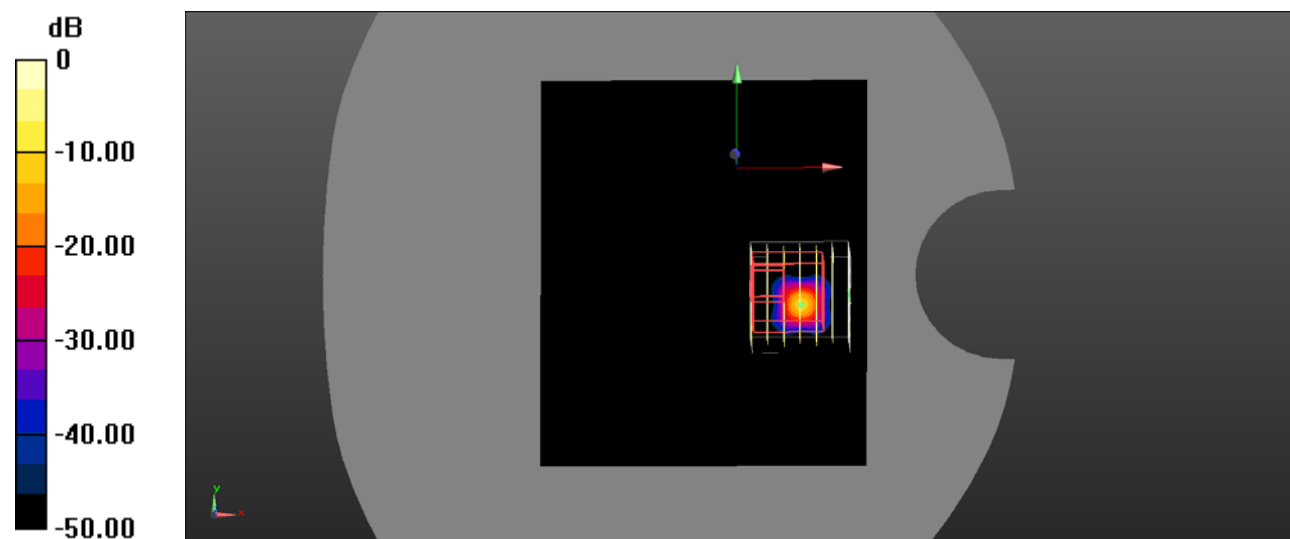

Test Plot 52#: LTE Band 7_Body Right_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.00111 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.065 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.00359 W/kg; SAR(10 g) = 0.00133 W/kg

Maximum value of SAR (measured) = 0.00509 W/kg

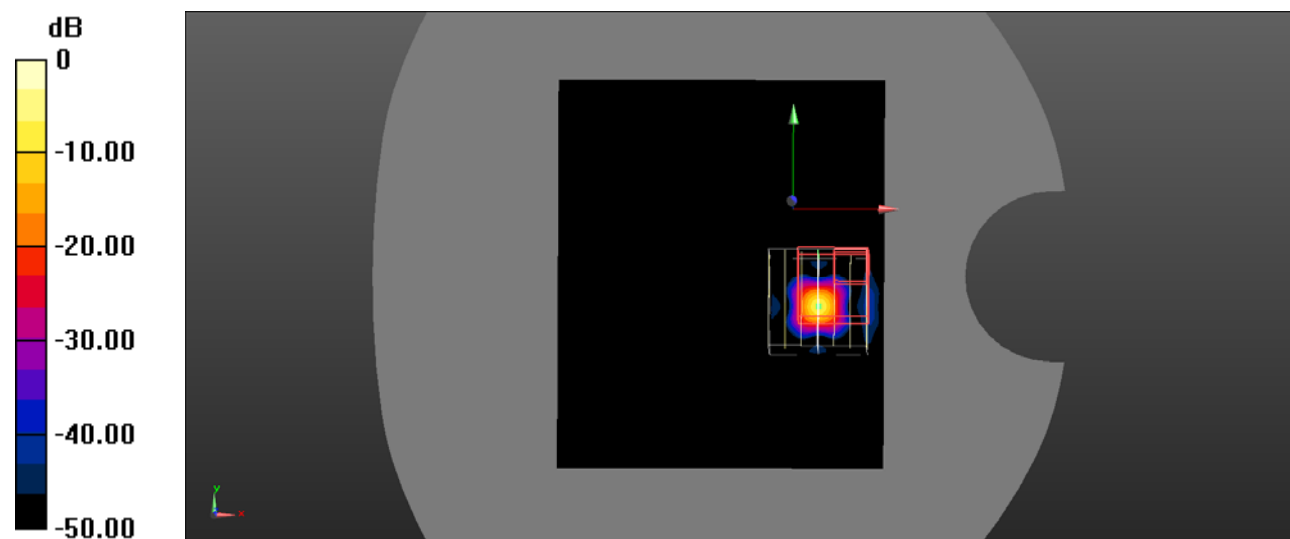

Test Plot 53#: LTE Band 7_Body Top_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.334 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.767 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.271 W/kg

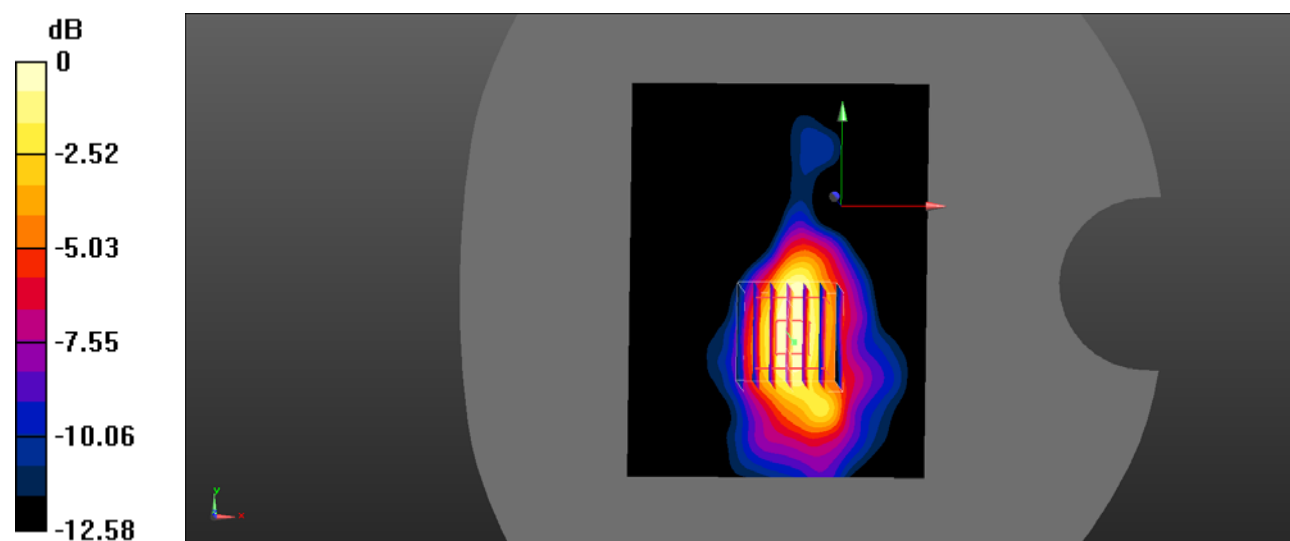

0 dB = 0.271 W/kg = -5.67 dBW/kg

Test Plot 54#: LTE Band 7_Body Top_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0611 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.477 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.207 W/kg

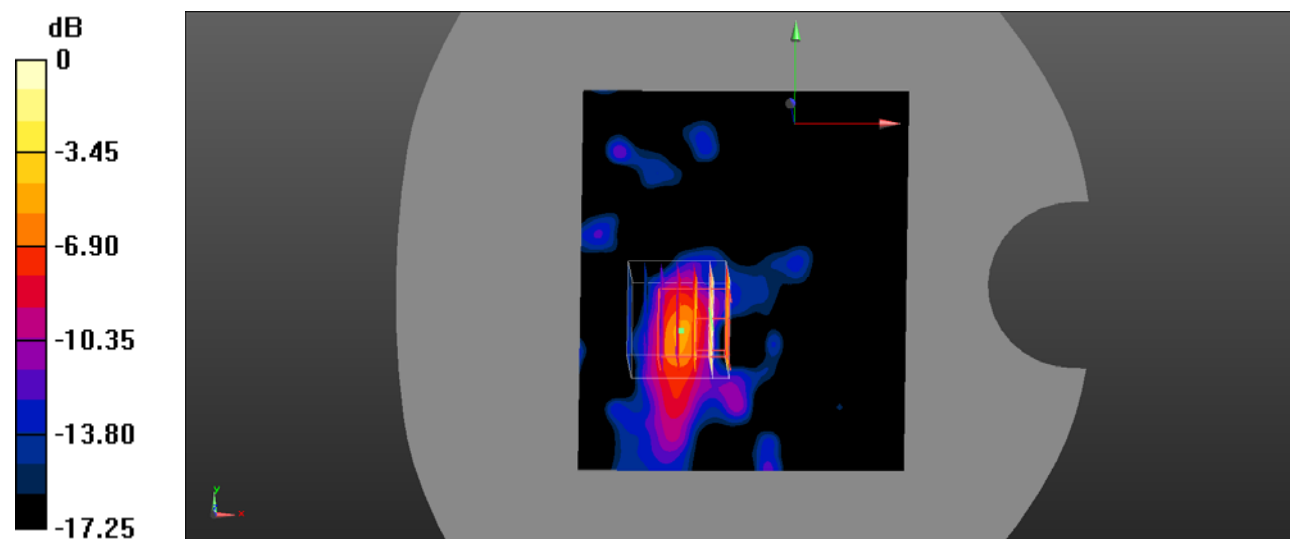

Test Plot 55#: LTE Band 7_Body Back_1RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.115 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.512 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0856 W/kg

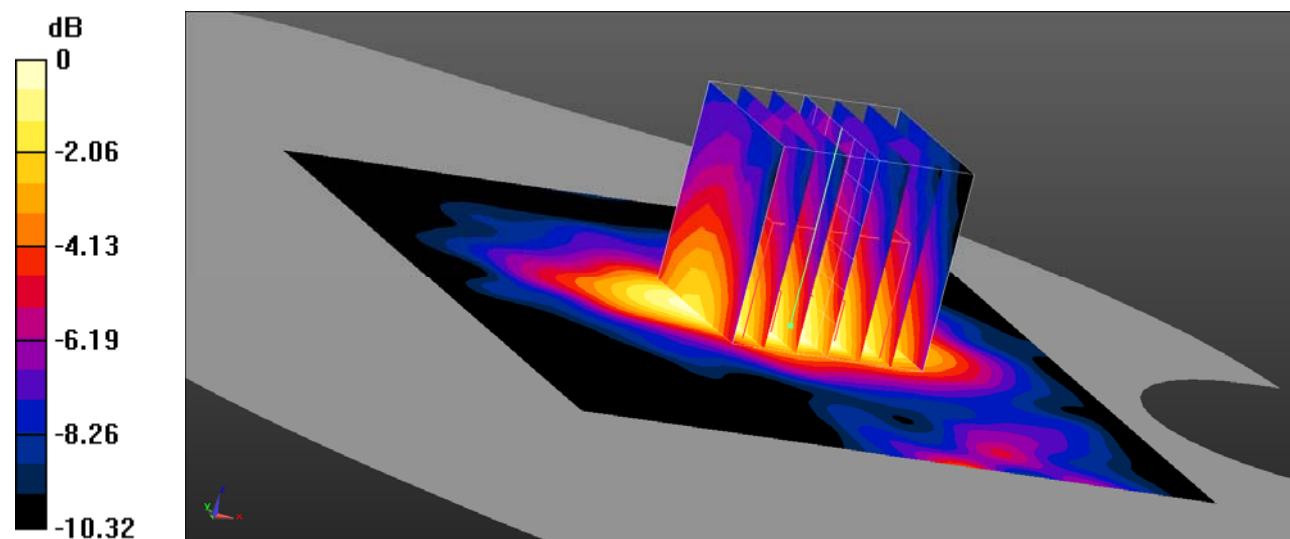

0 dB = 0.0856 W/kg = -10.68 dBW/kg

Test Plot 56#: LTE Band 7_Body Back_50%RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.122 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.913 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0852 W/kg

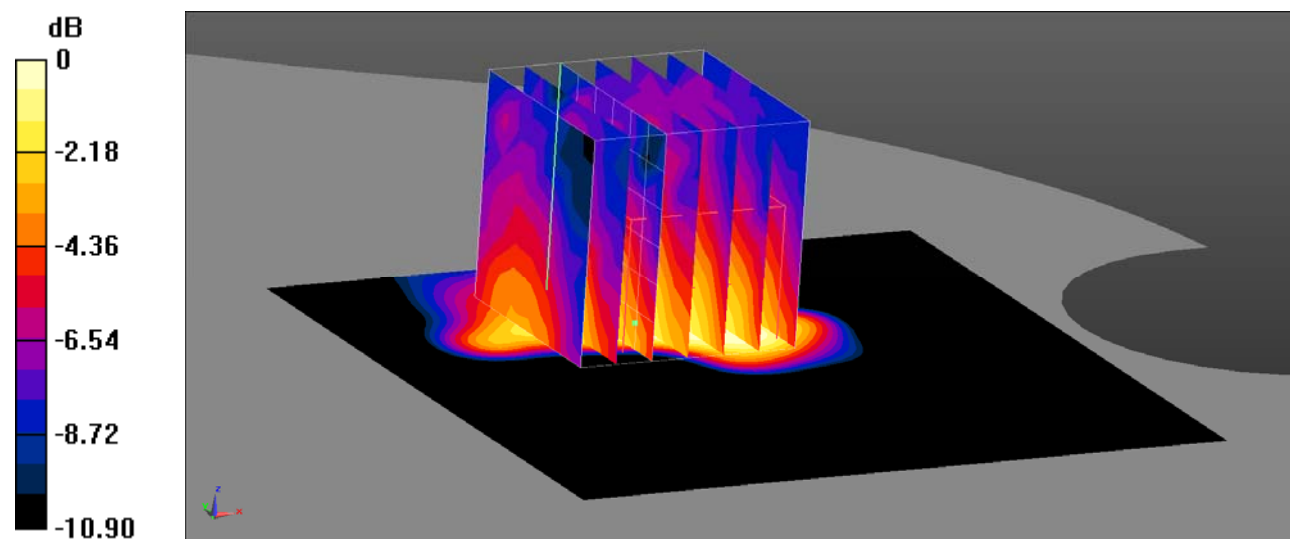

0 dB = 0.0852 W/kg = -10.70 dBW/kg

Test Plot 57#: LTE Band 7_Body Left_1RB_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.111 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.806 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.0950 W/kg

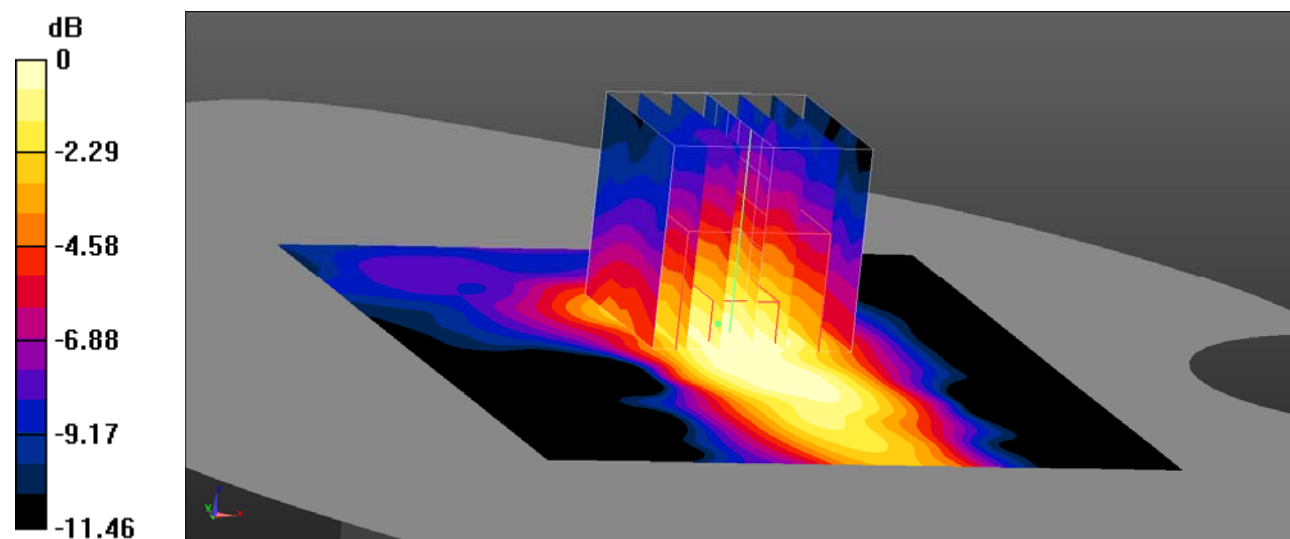

0 dB = 0.0950 W/kg = -10.22 dBW/kg

Test Plot 58#: LTE Band 7_Body Left_50%RB_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0906 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.227 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0762 W/kg

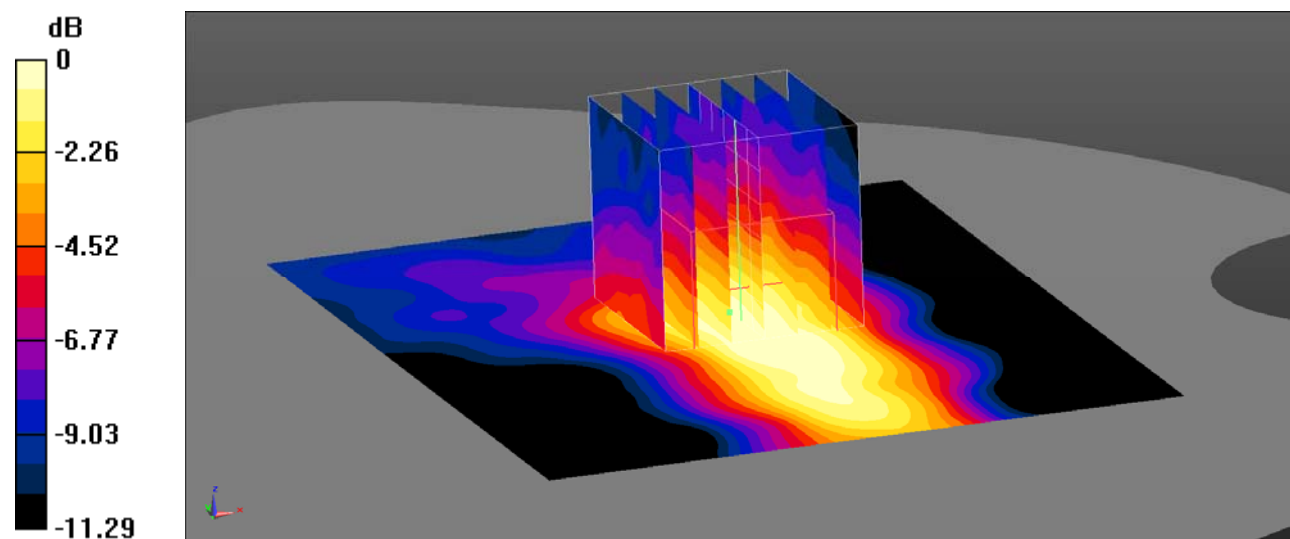

0 dB = 0.0762 W/kg = -11.18 dBW/kg

Test Plot 59#: LTE Band 7_Body Top_1RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00636 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.997 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0100 W/kg

SAR(1 g) = 0.0087 W/kg; SAR(10 g) = 0.00718 W/kg

Maximum value of SAR (measured) = 0.0105 W/kg

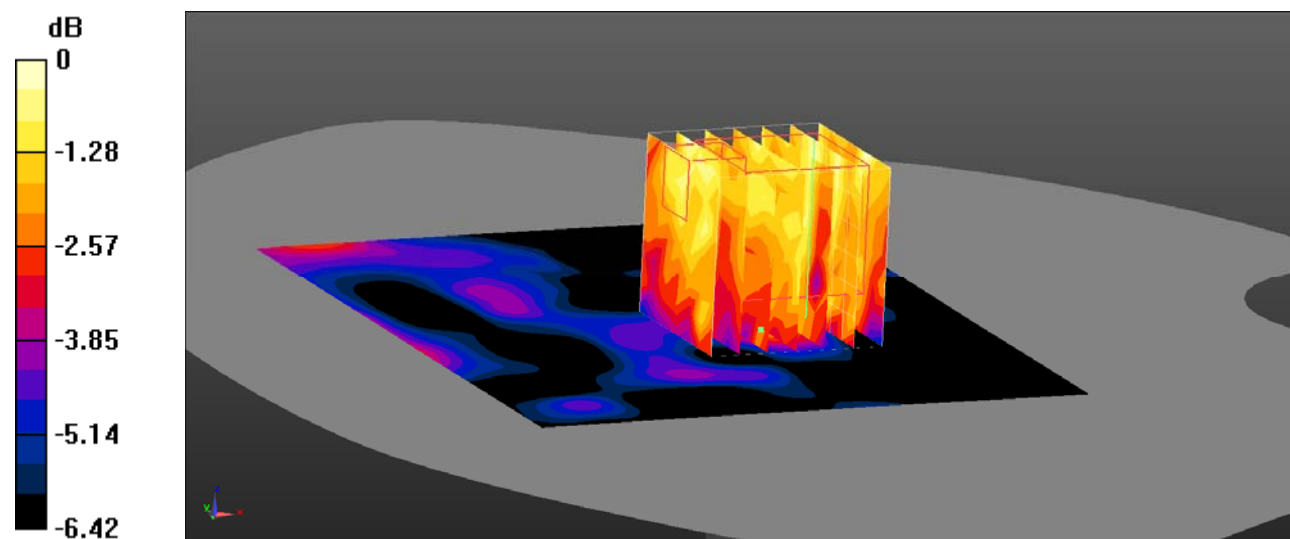

0 dB = 0.0105 W/kg = -19.79 dBW/kg

Test Plot 60#: LTE Band 7_Body Top_50%RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.329$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.00542 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.191 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.00871 W/kg; SAR(10 g) = 0.00739 W/kg

Maximum value of SAR (measured) = 0.0108 W/kg

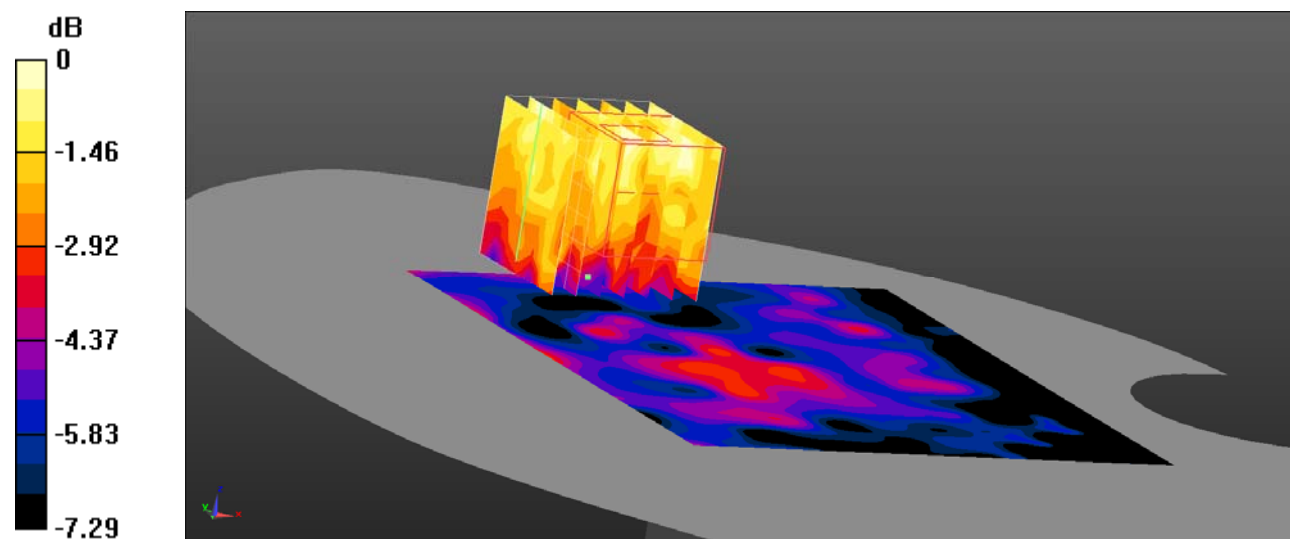

0 dB = 0.0108 W/kg = -19.67 dBW/kg

Test Plot 61#: LTE Band 12_Body Back_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.815 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.08 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.458 W/kg

Maximum value of SAR (measured) = 0.846 W/kg

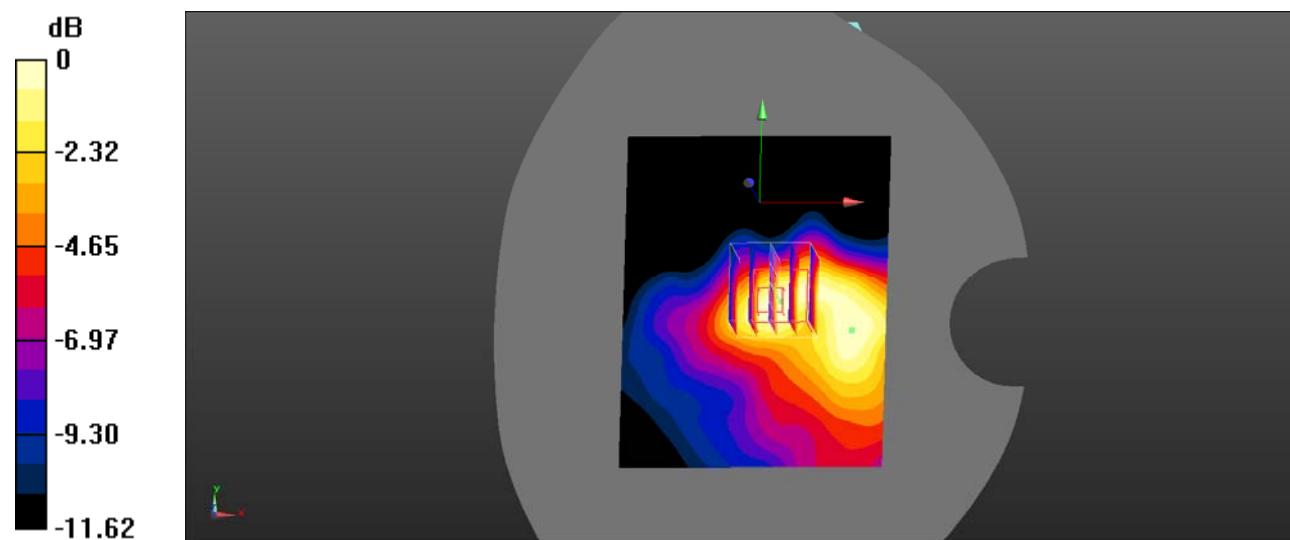

0 dB = 0.846 W/kg = -0.73 dBW/kg

Test Plot 62#: LTE Band 12_Body Back_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.808 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 25.38 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.00 W/kg
SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.452 W/kg
Maximum value of SAR (measured) = 0.764 W/kg

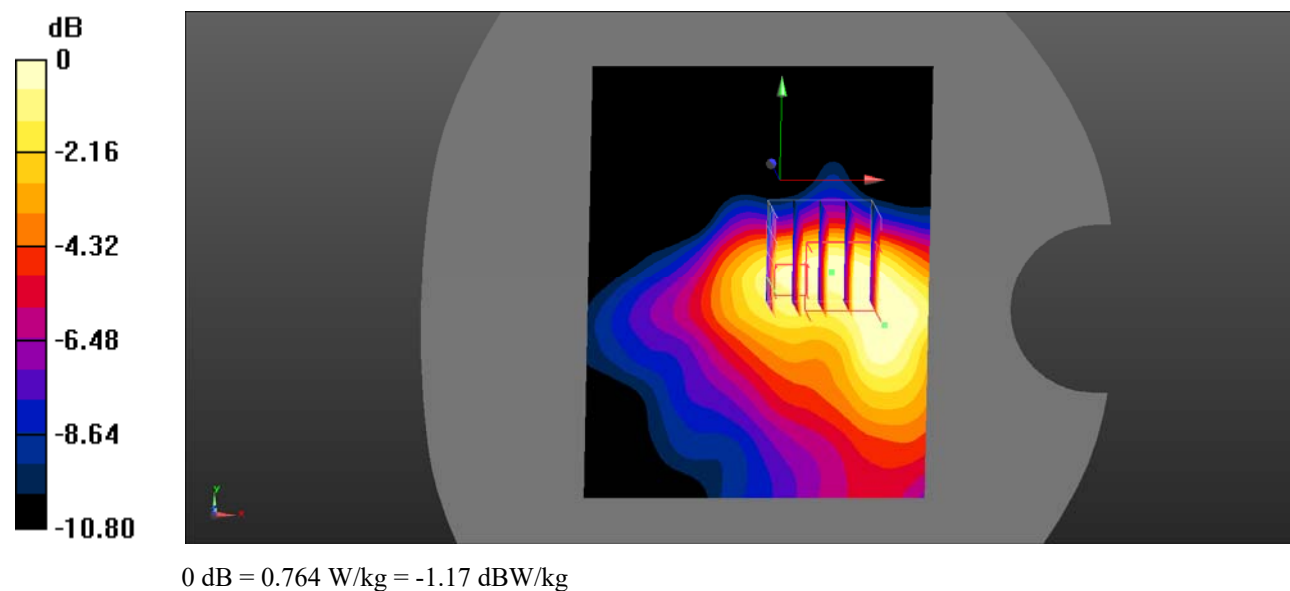

Test Plot 63#: LTE Band 12_Body Left_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0714 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 7.659 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.0670 W/kg
SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.040 W/kg
Maximum value of SAR (measured) = 0.0597 W/kg

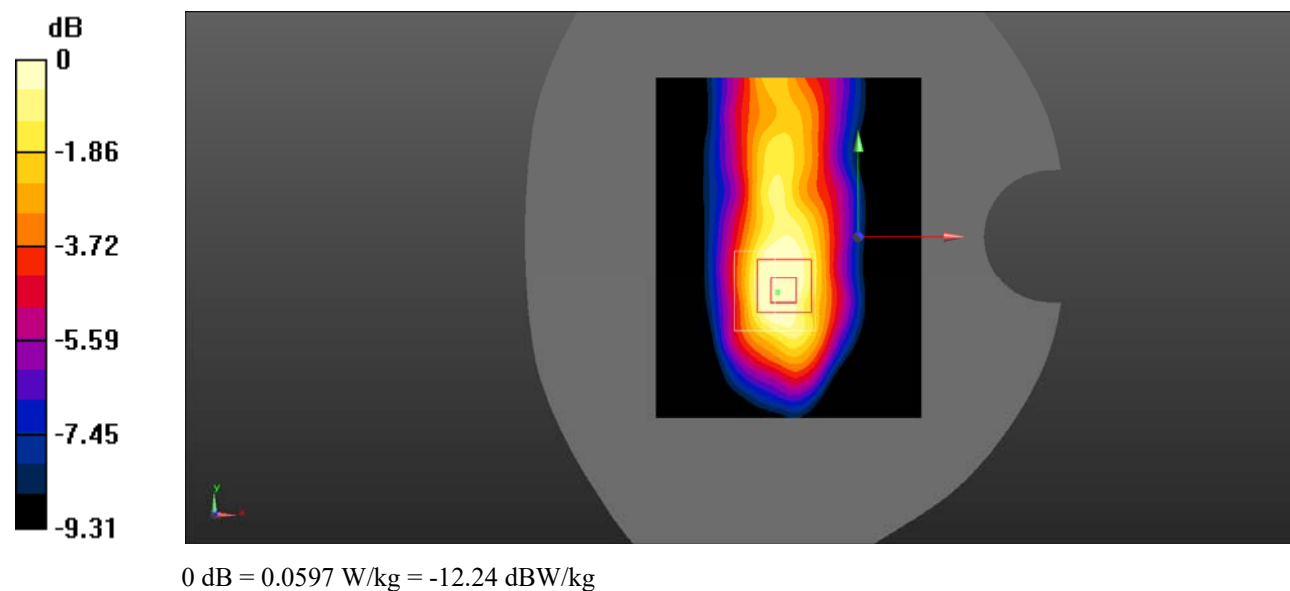

Test Plot 64#: LTE Band 12_ Body Left_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0712 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 7.227 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.0710 W/kg
SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.041 W/kg
Maximum value of SAR (measured) = 0.0620 W/kg

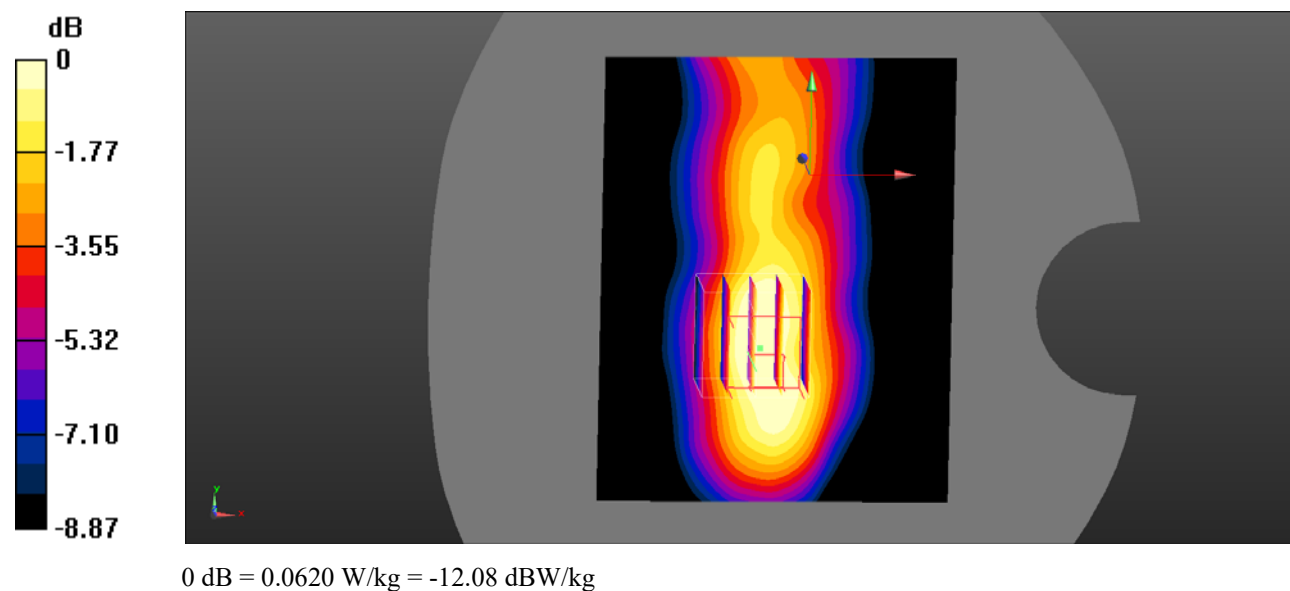

Test Plot 65#: LTE Band 12_Body Right_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0156 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.345 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.0140 W/kg
SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00963 W/kg
Maximum value of SAR (measured) = 0.0125 W/kg

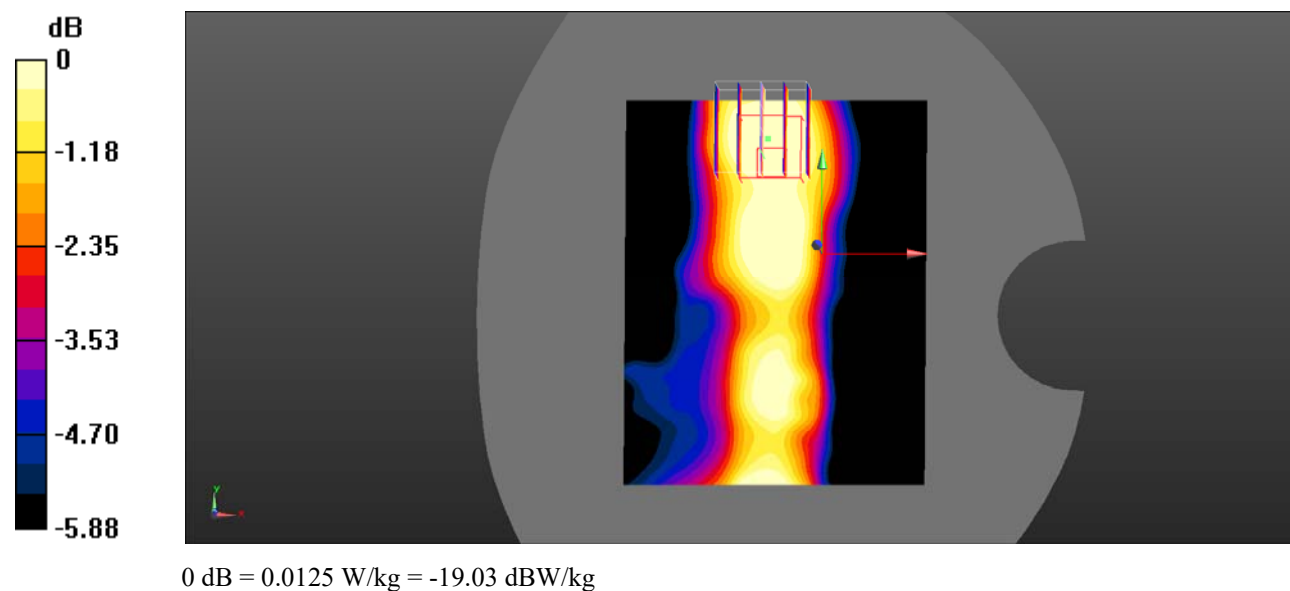

Test Plot 66#: LTE Band 12_Body Right_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0198 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 3.600 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.0130 W/kg
SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00986 W/kg
Maximum value of SAR (measured) = 0.0130 W/kg

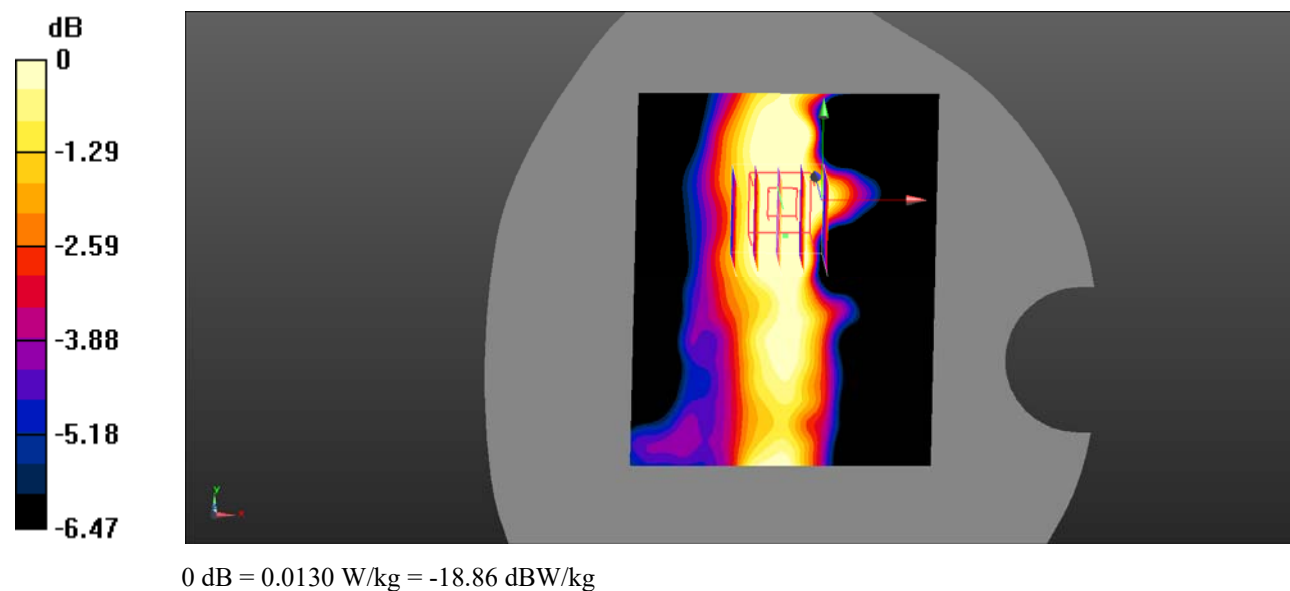

Test Plot 67#: LTE Band 12_Body Top_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.270 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 15.95 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.380 W/kg
SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.167 W/kg
Maximum value of SAR (measured) = 0.310 W/kg

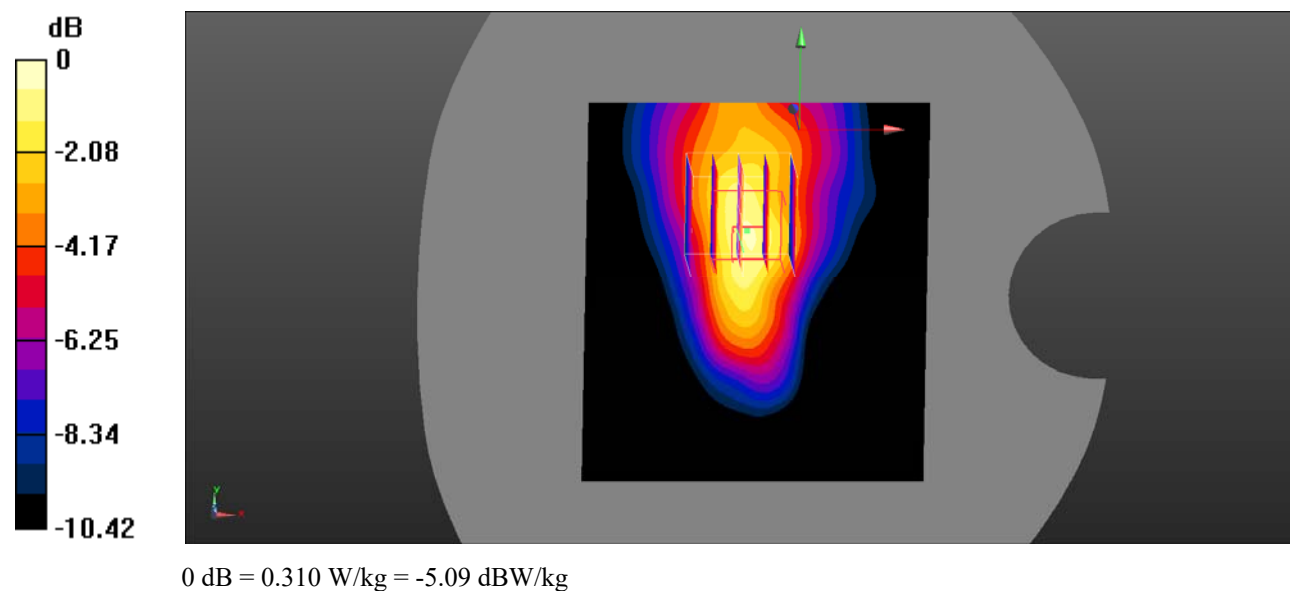

Test Plot 68#: LTE Band 12_Body Top_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.256 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 15.80 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.366 W/kg
SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.156 W/kg
Maximum value of SAR (measured) = 0.314 W/kg

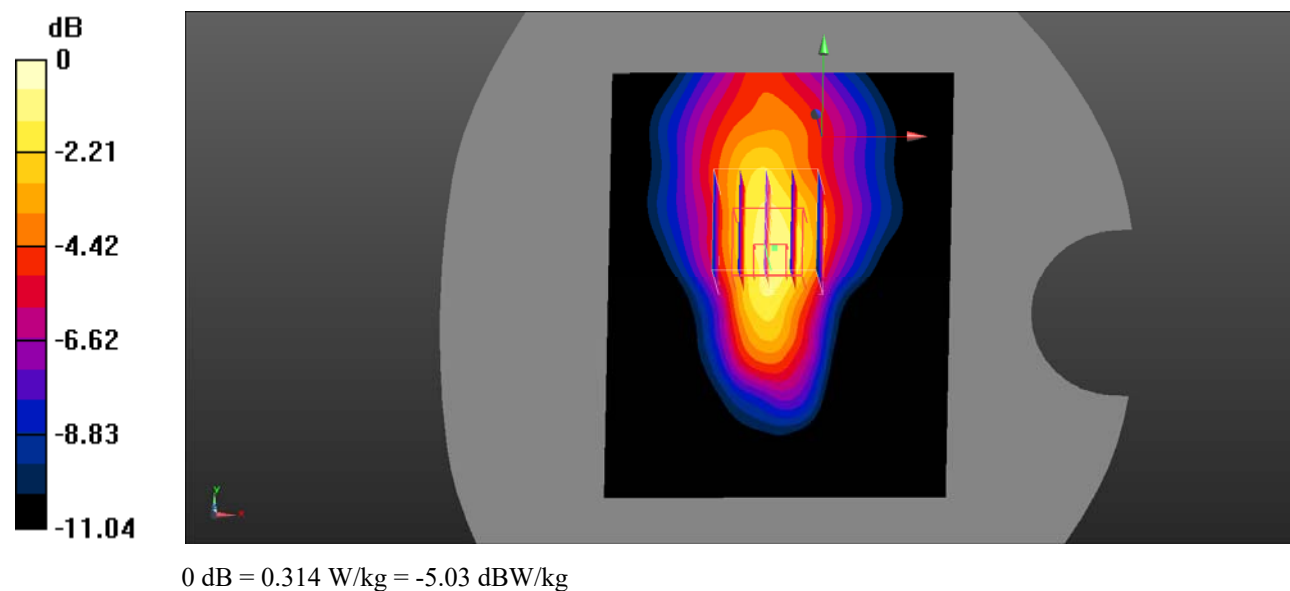

Test Plot 69#: LTE Band 12_Body Back_1RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.161 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.64 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.132 W/kg
SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.102 W/kg
Maximum value of SAR (measured) = 0.130 W/kg

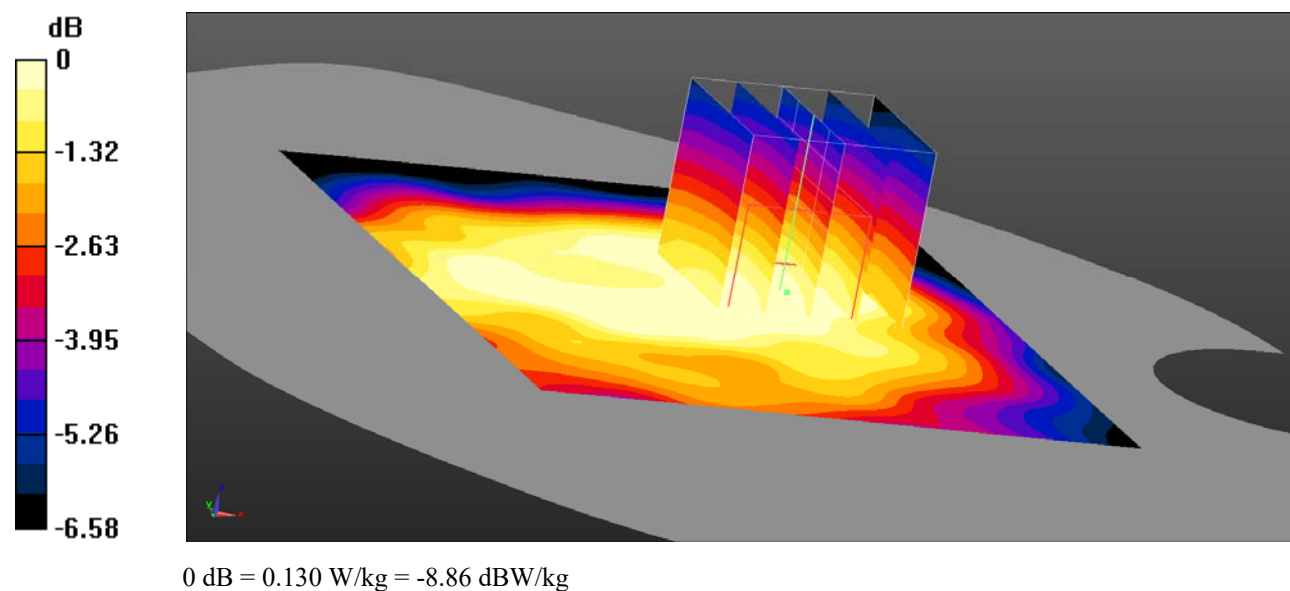

Test Plot 70#: LTE Band 12_Body Back_50%RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.128 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 10.18 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.105 W/kg
SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.082 W/kg
Maximum value of SAR (measured) = 0.103 W/kg

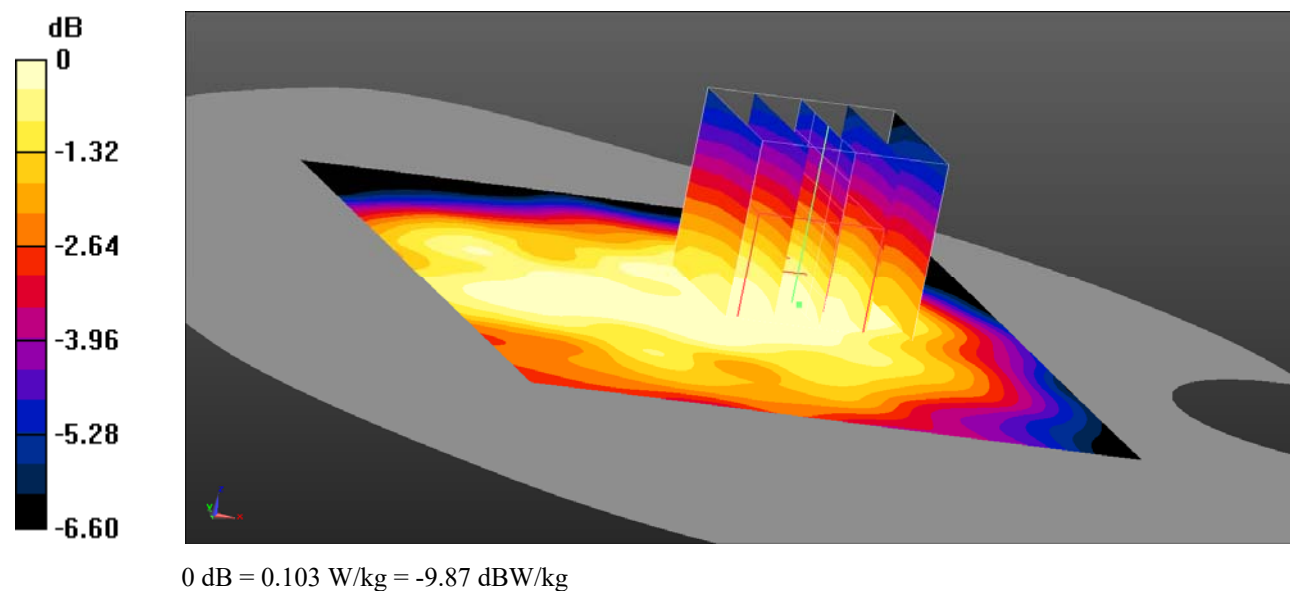

Test Plot 71#: LTE Band 12_Body Left_1RB_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.111 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 9.560 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.0930 W/kg
SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.071 W/kg
Maximum value of SAR (measured) = 0.0906 W/kg

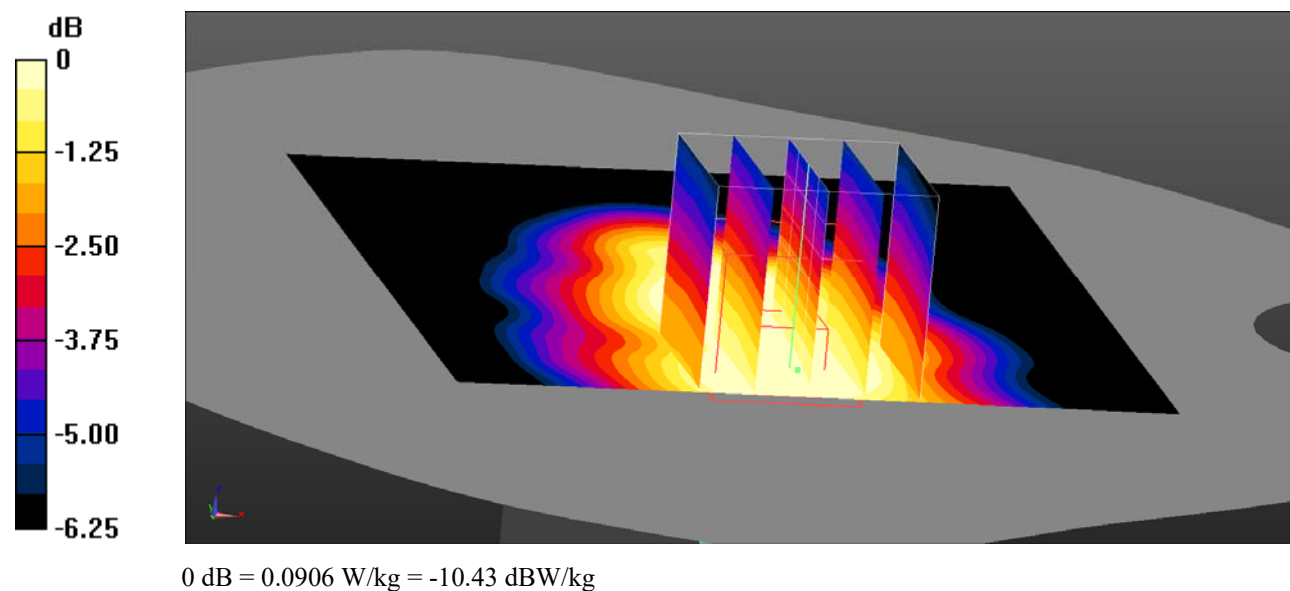

Test Plot 72#: LTE Band 12_Body Left_50%RB_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0907 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 8.618 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.0760 W/kg
SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.057 W/kg
Maximum value of SAR (measured) = 0.0731 W/kg

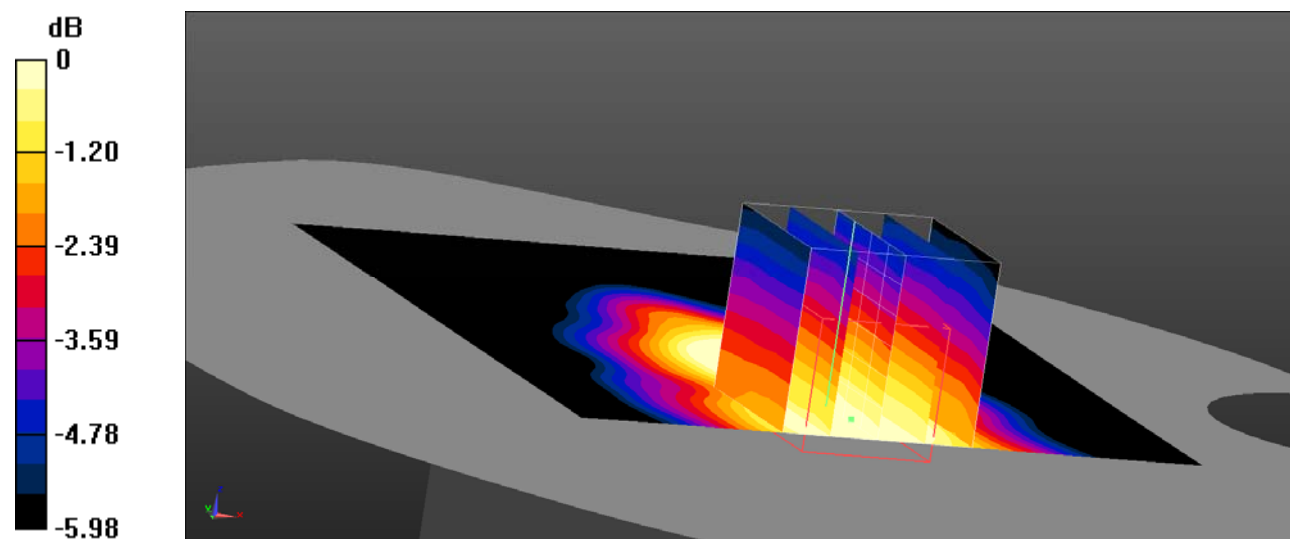

0 dB = 0.0731 W/kg = -11.36 dBW/kg

Test Plot 73#: LTE Band 12_Body Top_1RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.124 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 8.863 V/m; Power Drift = -0.20 dB
Peak SAR (extrapolated) = 0.105 W/kg
SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.083 W/kg
Maximum value of SAR (measured) = 0.103 W/kg

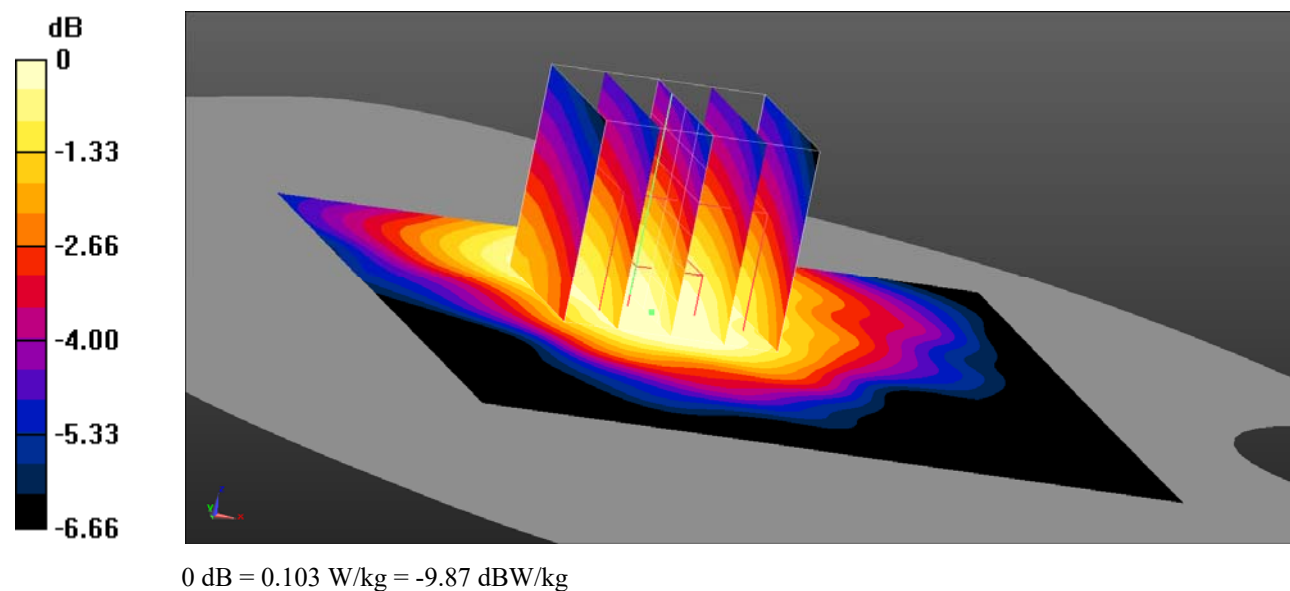

Test Plot 74#: LTE Band 12_Body Top_50%RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.822$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0987 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 7.960 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.0850 W/kg
SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.066 W/kg
Maximum value of SAR (measured) = 0.0821 W/kg

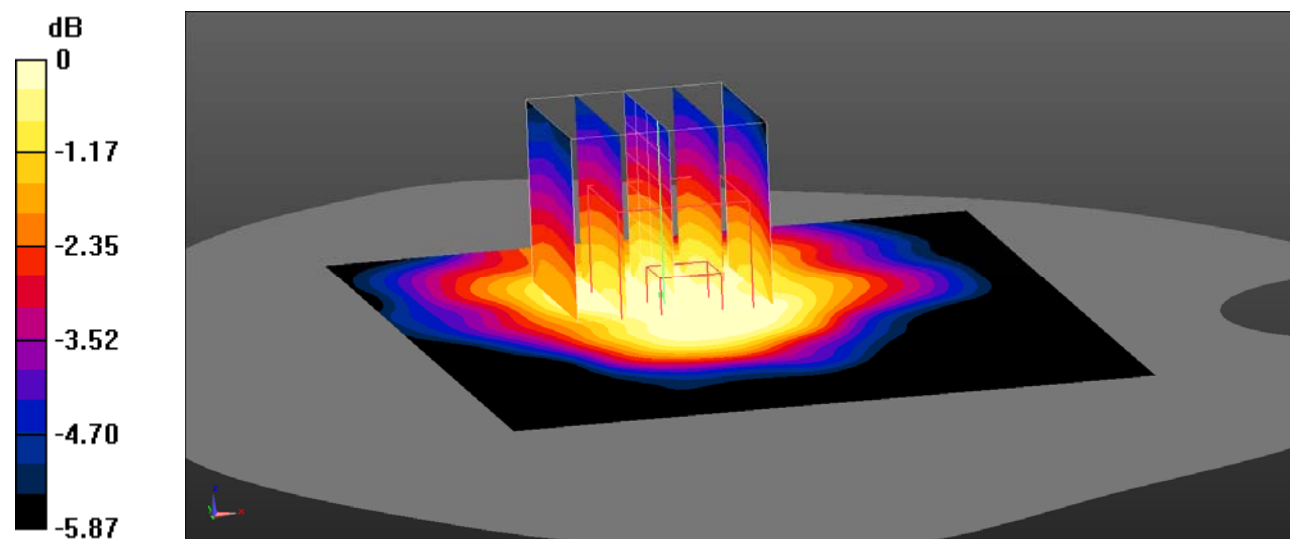


0 dB = 0.0821 W/kg = -10.86 dBW/kg

Test Plot 75#: LTE Band 13_Body Back_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

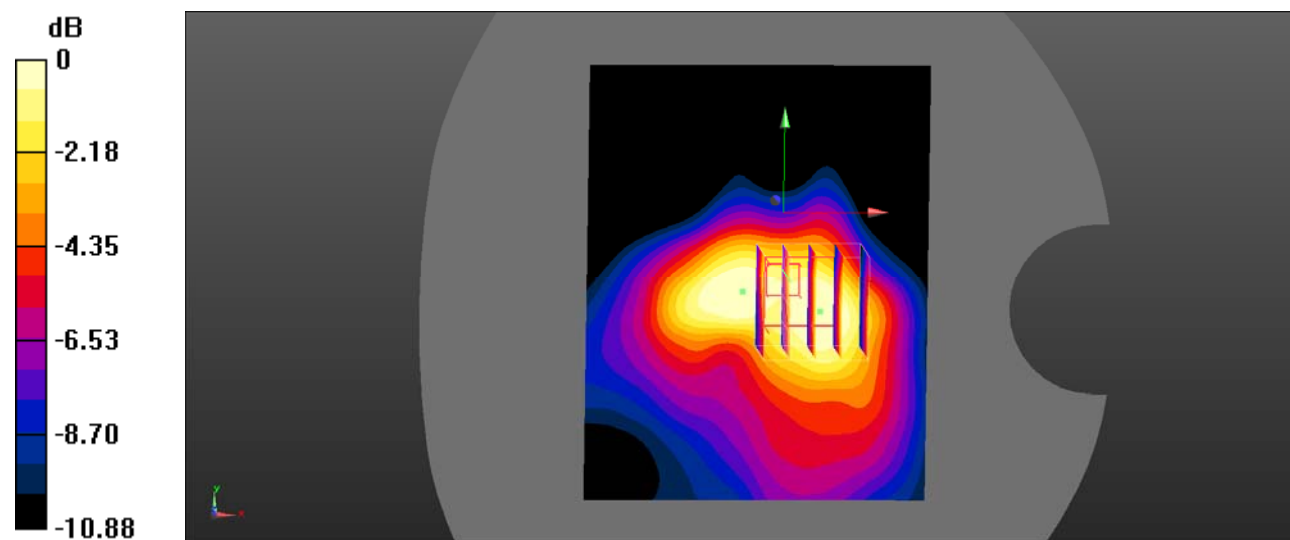Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.05 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 25.48 V/m ; Power Drift = -0.17 dB Peak SAR (extrapolated) = 1.02 W/kg **SAR(1 g) = 0.776 W/kg ; SAR(10 g) = 0.514 W/kg** Maximum value of SAR (measured) = 0.887 W/kg  $0 \text{ dB} = 0.887 \text{ W/kg} = -0.52 \text{ dBW/kg}$

Test Plot 76#: LTE Band 13_Body Back_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 28.86 V/m ; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.775 W/kg ; SAR(10 g) = 0.462 W/kg
Maximum value of SAR (measured) = 0.894 W/kg

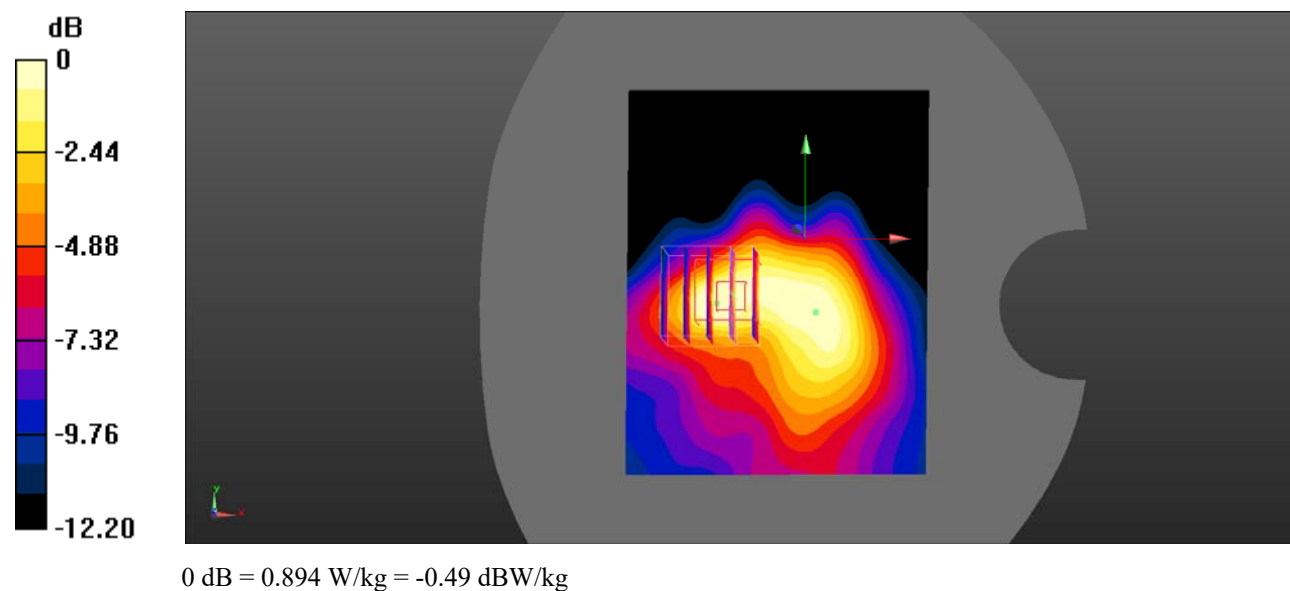

Test Plot 77#: LTE Band 13_Body Back_100%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.28 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 28.54 V/m ; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.773 W/kg ; SAR(10 g) = 0.471 W/kg
Maximum value of SAR (measured) = 0.881 W/kg

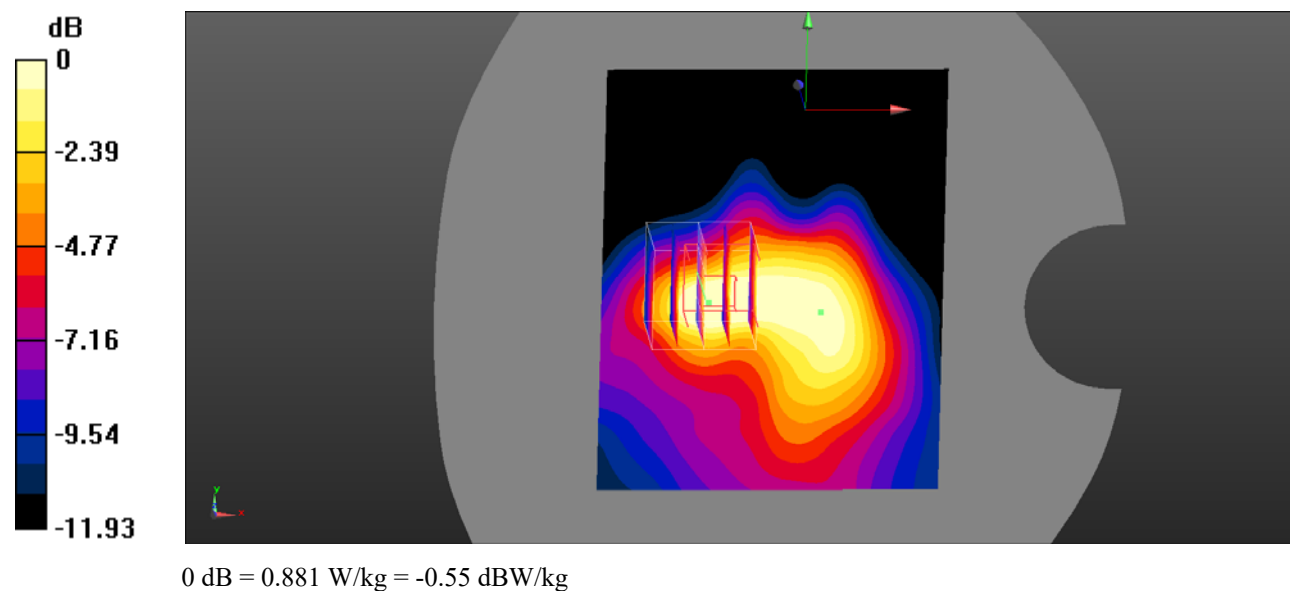

Test Plot 78#: LTE Band 13_Body Left_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (61x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.341 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 17.64 V/m ; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.308 W/kg
SAR(1 g) = 0.253 W/kg ; SAR(10 g) = 0.169 W/kg
Maximum value of SAR (measured) = 0.287 W/kg

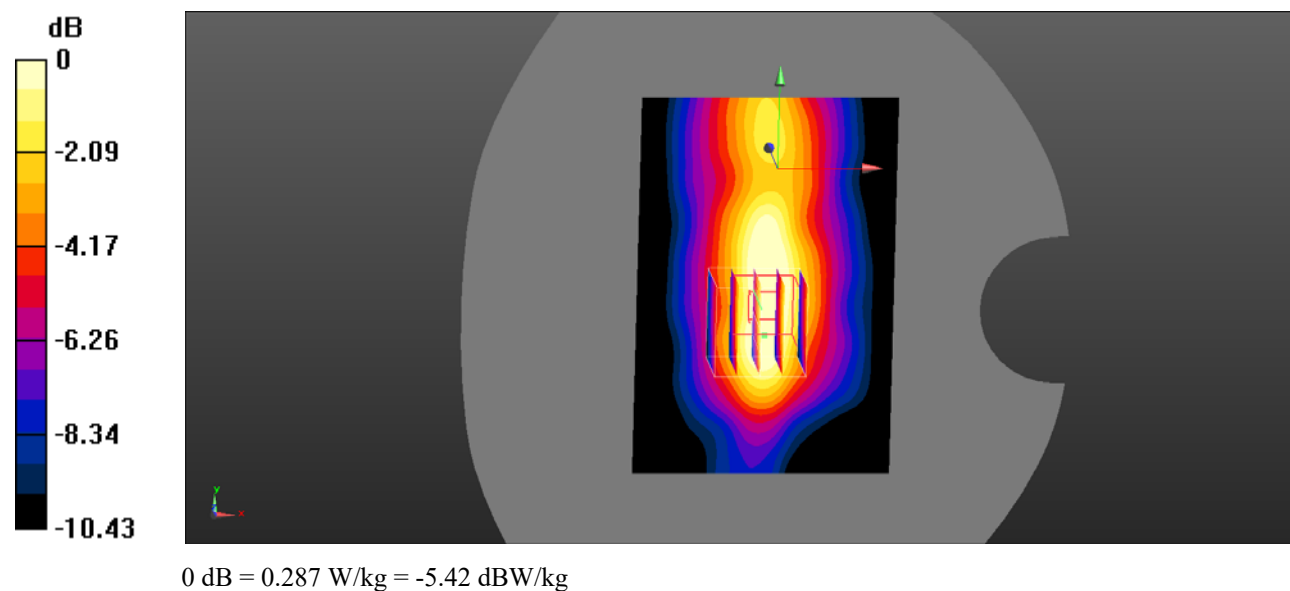

Test Plot 79#: LTE Band 13_ Body Left_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (61x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.393 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 17.47 V/m ; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.297 W/kg
SAR(1 g) = 0.243 W/kg ; SAR(10 g) = 0.163 W/kg
Maximum value of SAR (measured) = 0.272 W/kg

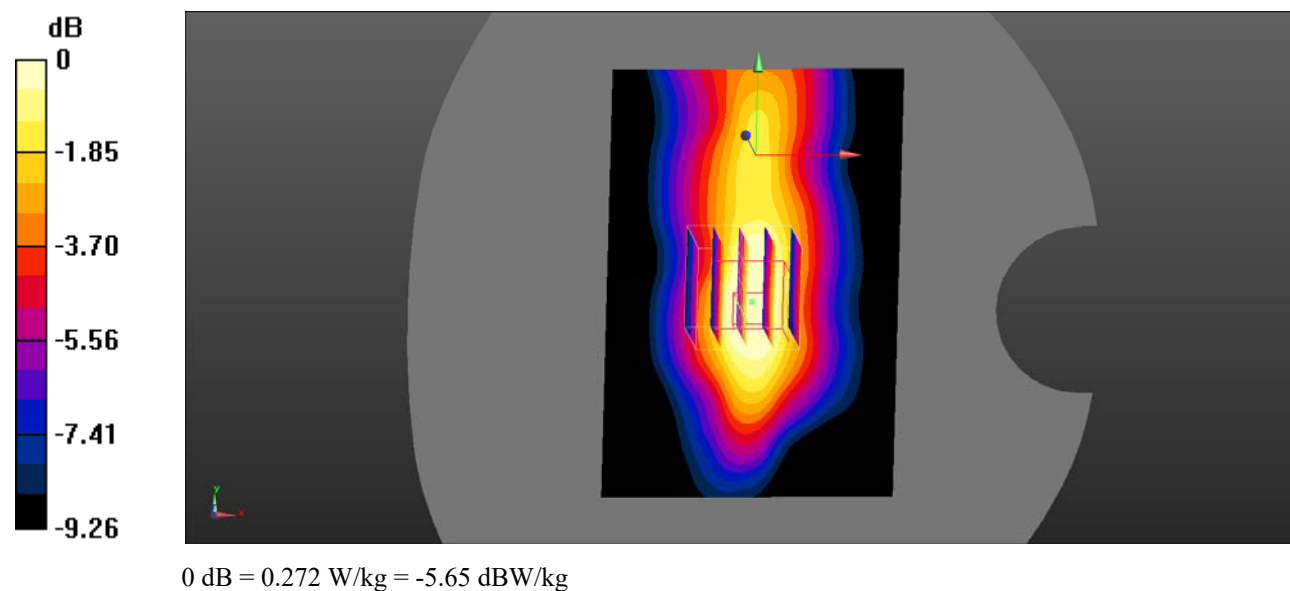

Test Plot 80#: LTE Band 13_Body Right_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.122 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.999 V/m ; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.0940 W/kg
SAR(1 g) = 0.084 W/kg ; SAR(10 g) = 0.062 W/kg
Maximum value of SAR (measured) = 0.0916 W/kg

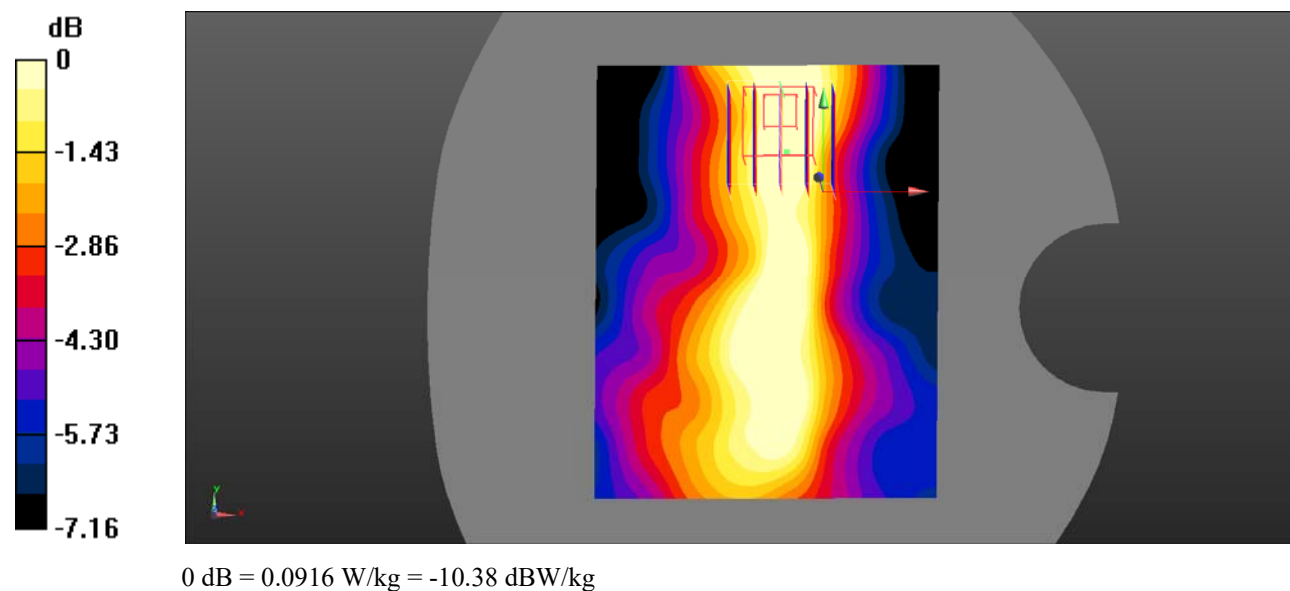

Test Plot 81#: LTE Band 13_Body Right_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.102 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.657 V/m ; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.0870 W/kg
SAR(1 g) = 0.073 W/kg ; SAR(10 g) = 0.052 W/kg
Maximum value of SAR (measured) = 0.0843 W/kg

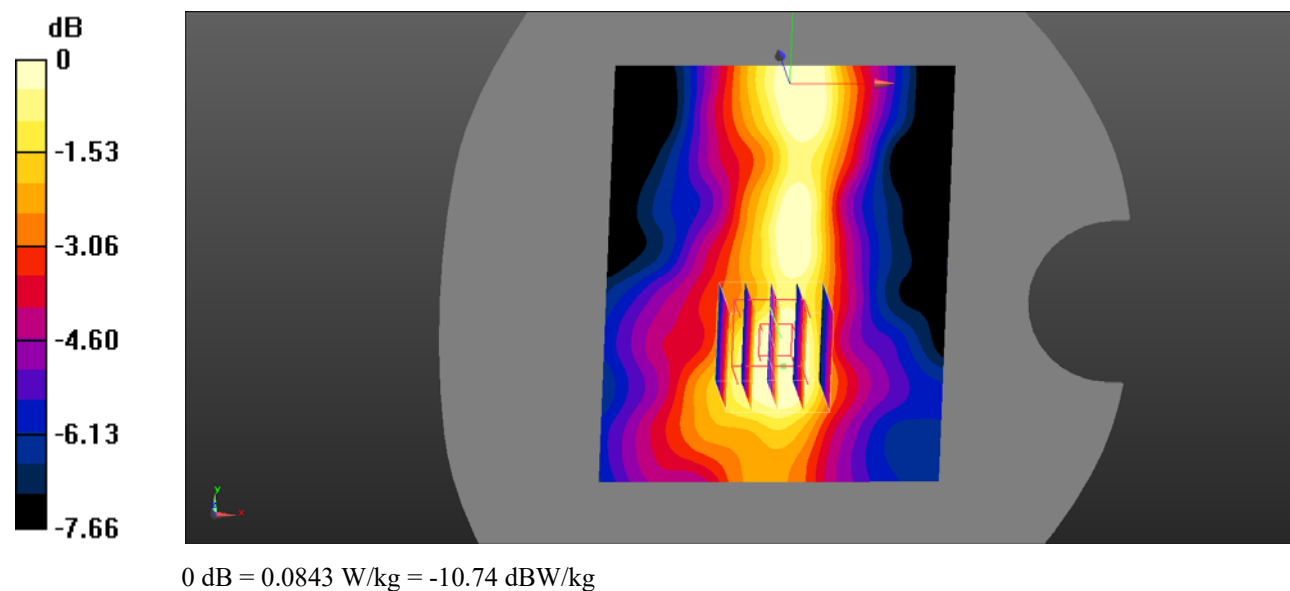

Test Plot 82#: LTE Band 13_Body Top_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.451 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 17.63 V/m ; Power Drift = -0.20 dB
Peak SAR (extrapolated) = 0.550 W/kg
SAR(1 g) = 0.378 W/kg ; SAR(10 g) = 0.223 W/kg
Maximum value of SAR (measured) = 0.427 W/kg

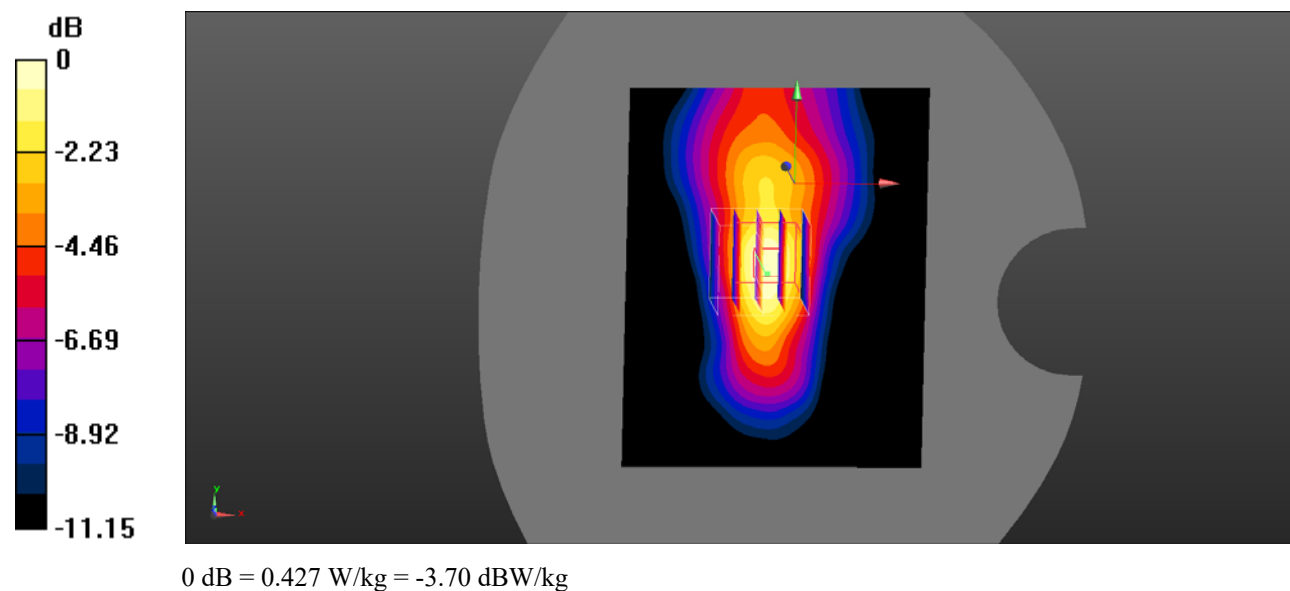

Test Plot 83#: LTE Band 13_Body Top_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.452 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 19.61 V/m ; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 0.576 W/kg
SAR(1 g) = 0.392 W/kg ; SAR(10 g) = 0.229 W/kg
Maximum value of SAR (measured) = 0.458 W/kg

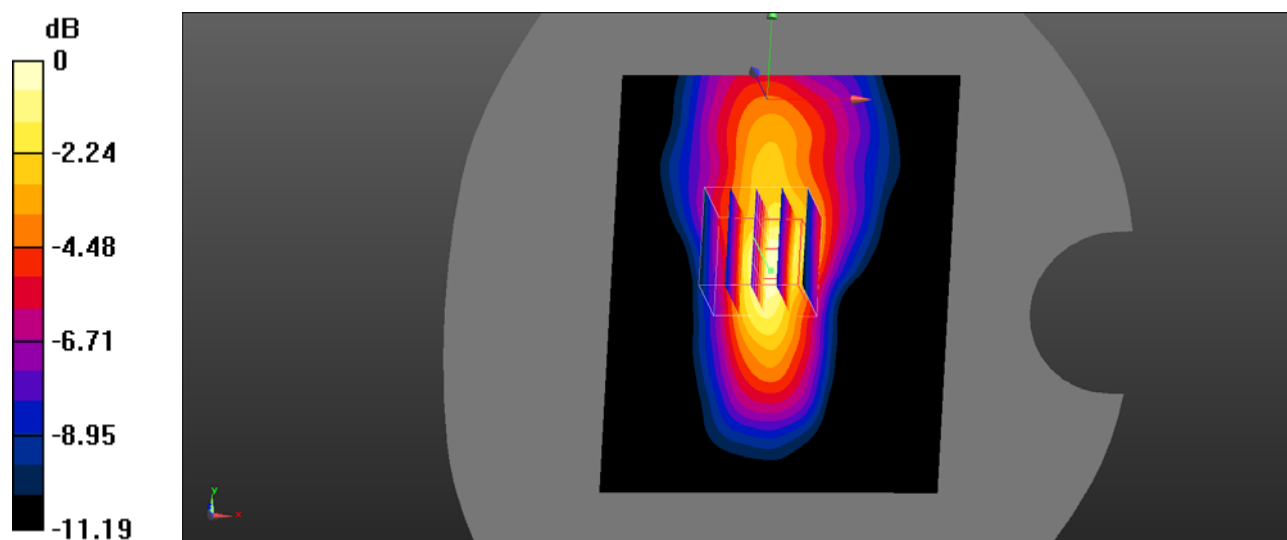

0 dB = 0.458 W/kg = -3.39 dBW/kg

Test Plot 84#: LTE Band 13_Body Back_1RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.280 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.93 V/m ; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.228 W/kg
SAR(1 g) = 0.215 W/kg ; SAR(10 g) = 0.173 W/kg
Maximum value of SAR (measured) = 0.225 W/kg

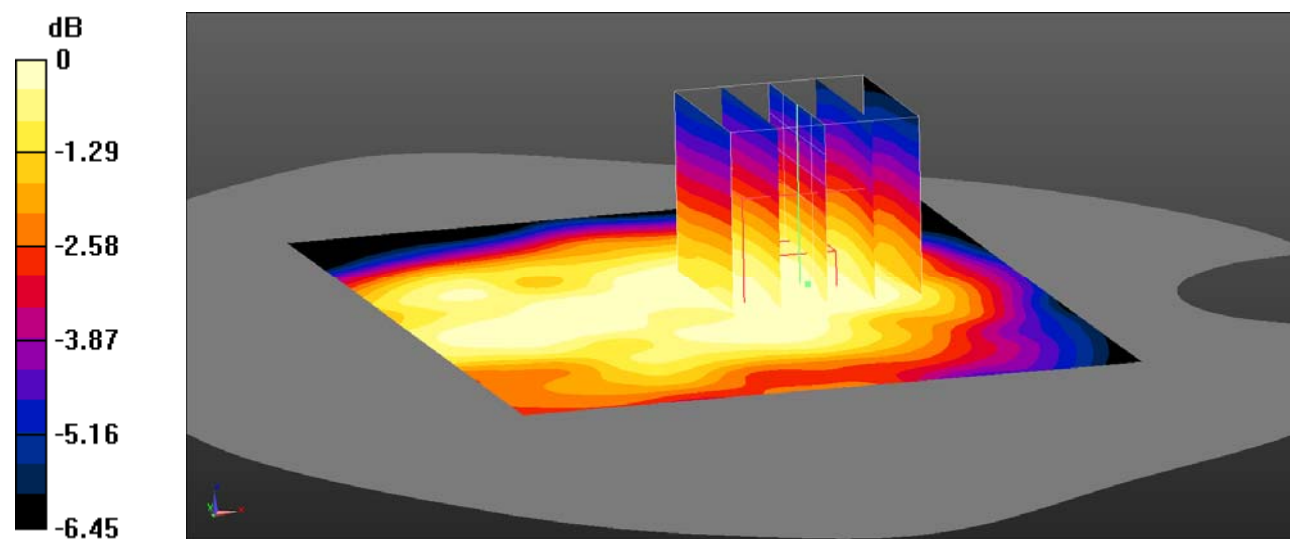

0 dB = 0.225 W/kg = -6.48 dBW/kg

Test Plot 85#: LTE Band 13_Body Back_50%RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.222 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.53 V/m ; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.183 W/kg
SAR(1 g) = 0.172 W/kg ; SAR(10 g) = 0.137 W/kg
Maximum value of SAR (measured) = 0.179 W/kg

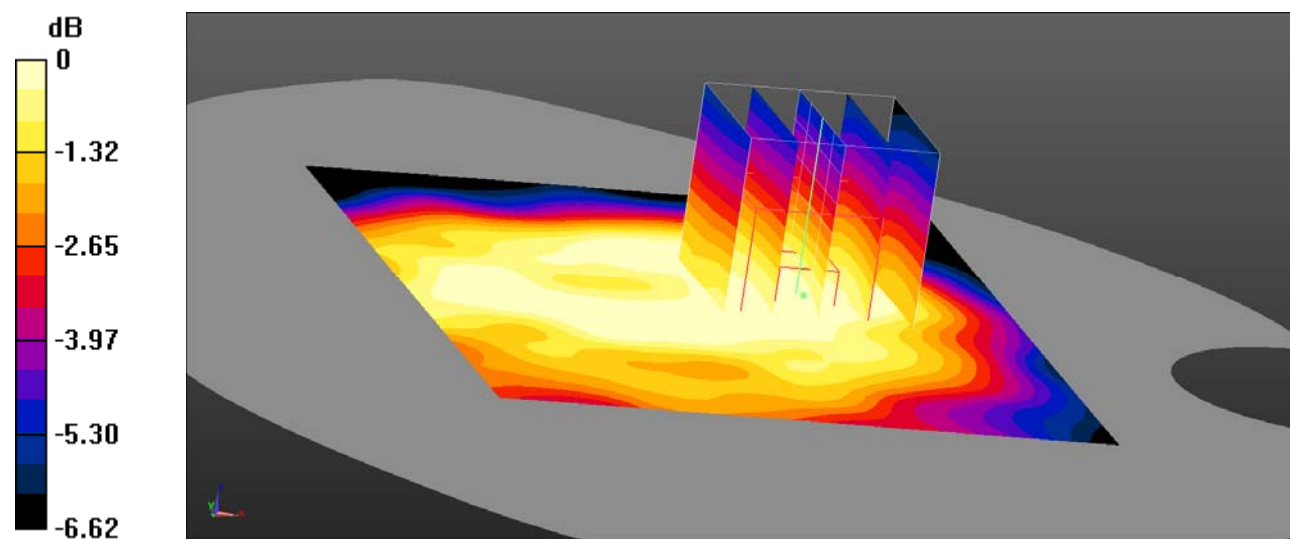

0 dB = 0.179 W/kg = -7.47 dBW/kg

Test Plot 86#: LTE Band 13_Body Left_1RB_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 41.575$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.317 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 13.45 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.282 W/kg
SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.185 W/kg
Maximum value of SAR (measured) = 0.263 W/kg

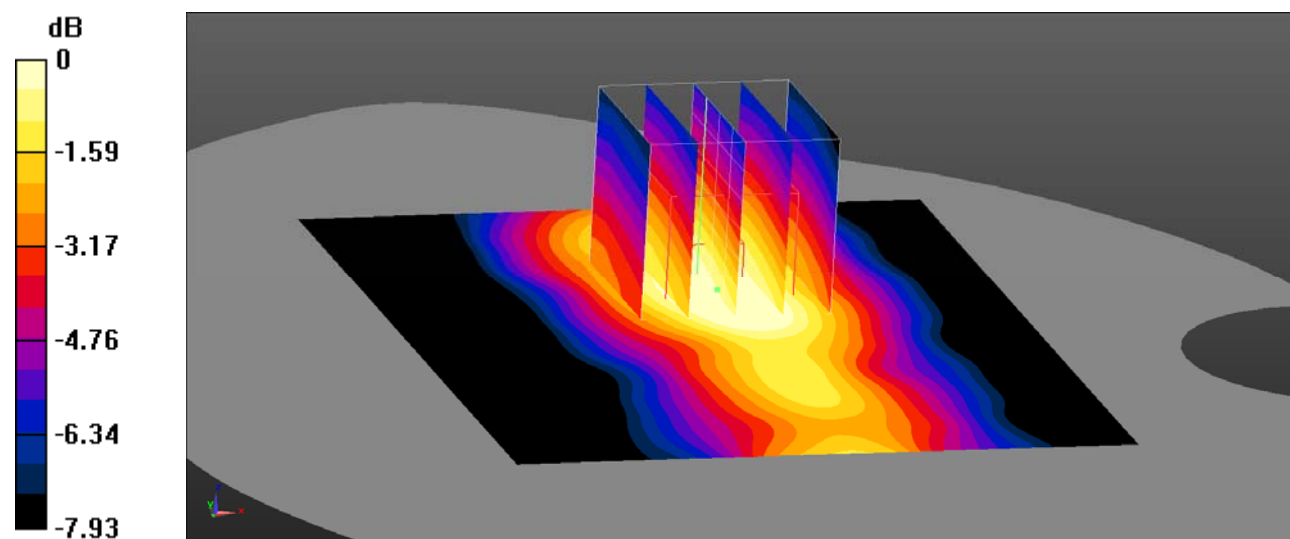

0 dB = 0.263 W/kg = -5.80 dBW/kg

Test Plot 87#: LTE Band 13_Body Left_50%RB_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.245 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.53 V/m ; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.225 W/kg
SAR(1 g) = 0.197 W/kg ; SAR(10 g) = 0.146 W/kg
Maximum value of SAR (measured) = 0.211 W/kg

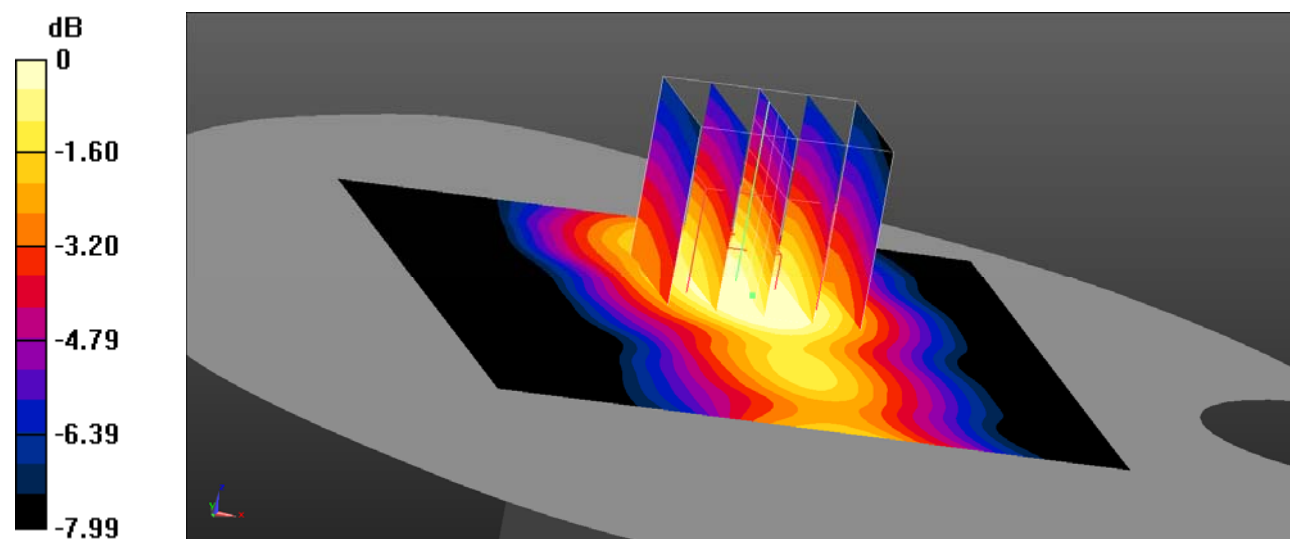

0 dB = 0.211 W/kg = -6.76 dBW/kg

Test Plot 88#: LTE Band 13_Body Top_1RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.0810 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 7.258 V/m ; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.0720 W/kg
SAR(1 g) = 0.069 W/kg ; SAR(10 g) = 0.056 W/kg
Maximum value of SAR (measured) = 0.0703 W/kg

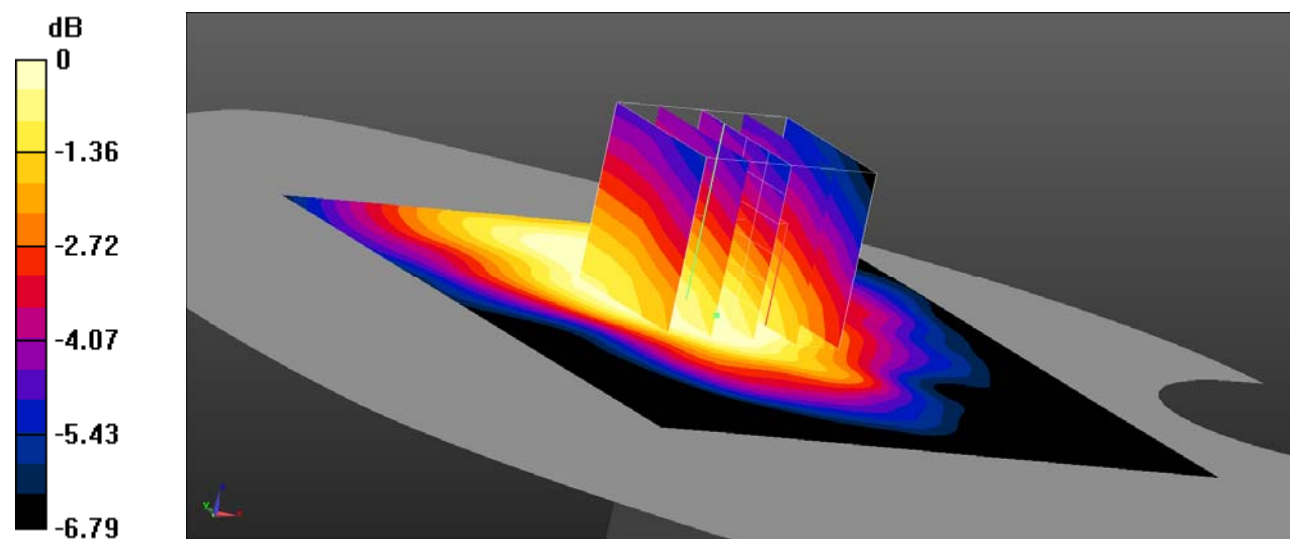

Test Plot 89#: LTE Band 13_Body Top_50%RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.575$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.0808 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 7.646 V/m ; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.0720 W/kg
SAR(1 g) = 0.069 W/kg ; SAR(10 g) = 0.056 W/kg
Maximum value of SAR (measured) = 0.0707 W/kg

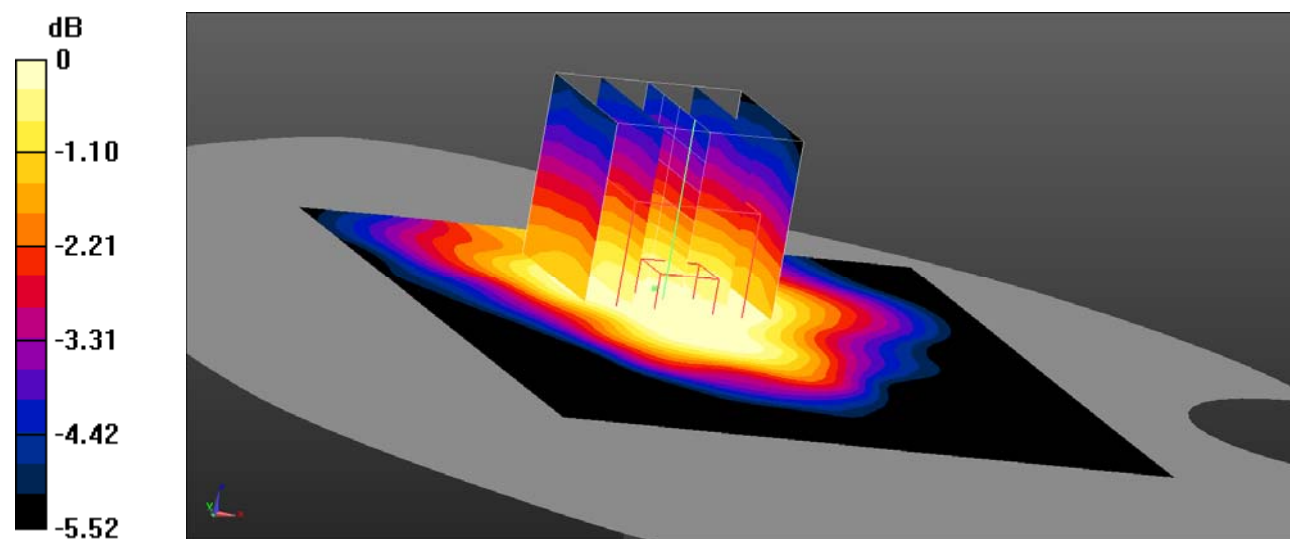

0 dB = 0.0707 W/kg = -11.51 dBW/kg

Test Plot 90#: LTE Band 14_Body Back_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.02 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 30.17 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.822 W/kg; SAR(10 g) = 0.563 W/kg

Maximum value of SAR (measured) = 0.931 W/kg

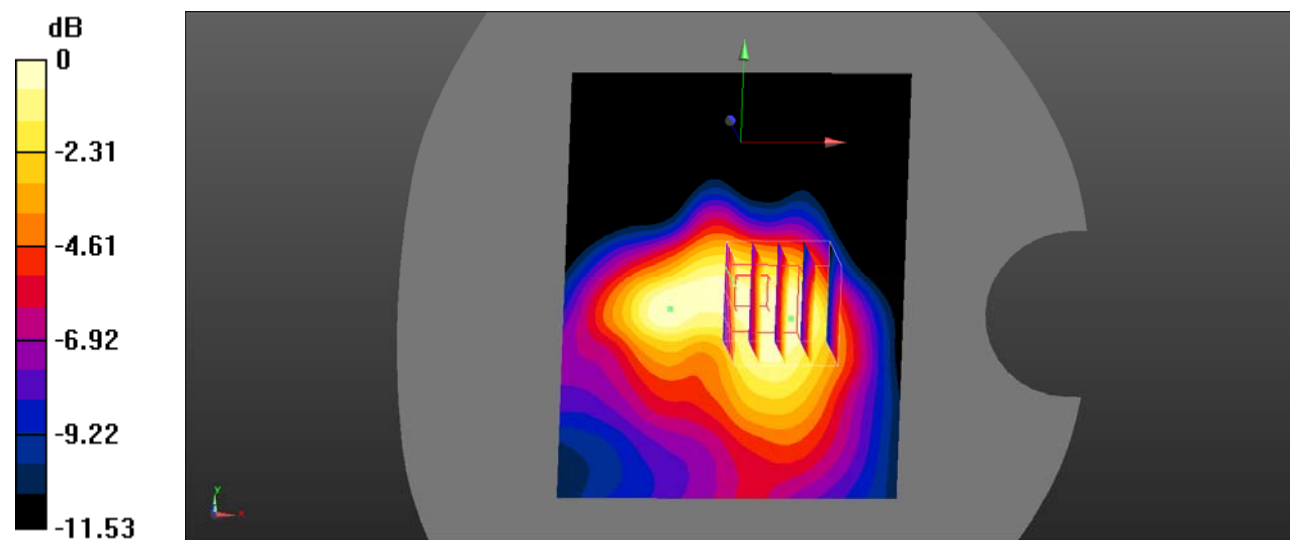

0 dB = 0.931 W/kg = -0.31 dBW/kg

Test Plot 91#: LTE Band 14_Body Back_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.16 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 32.04 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.14 W/kg
SAR(1 g) = 0.825 W/kg; SAR(10 g) = 0.539 W/kg
Maximum value of SAR (measured) = 0.962 W/kg

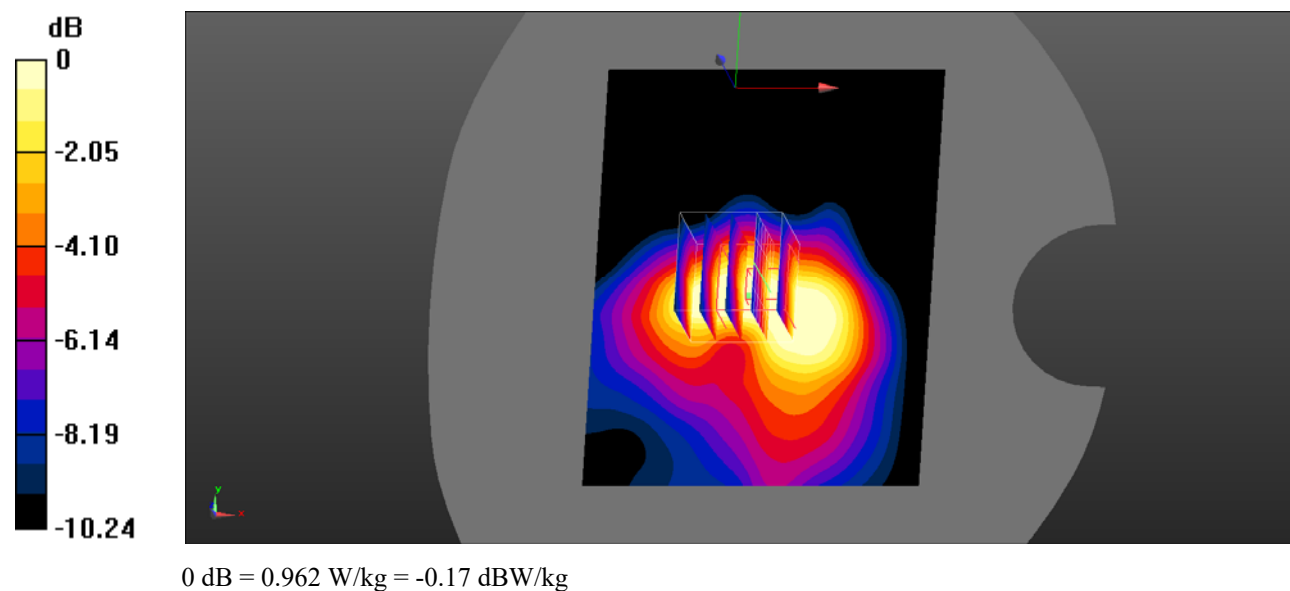

Test Plot 92#: LTE Band 14_Body Back_100%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.08 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 30.63 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.14 W/kg
SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.544 W/kg
Maximum value of SAR (measured) = 0.979 W/kg

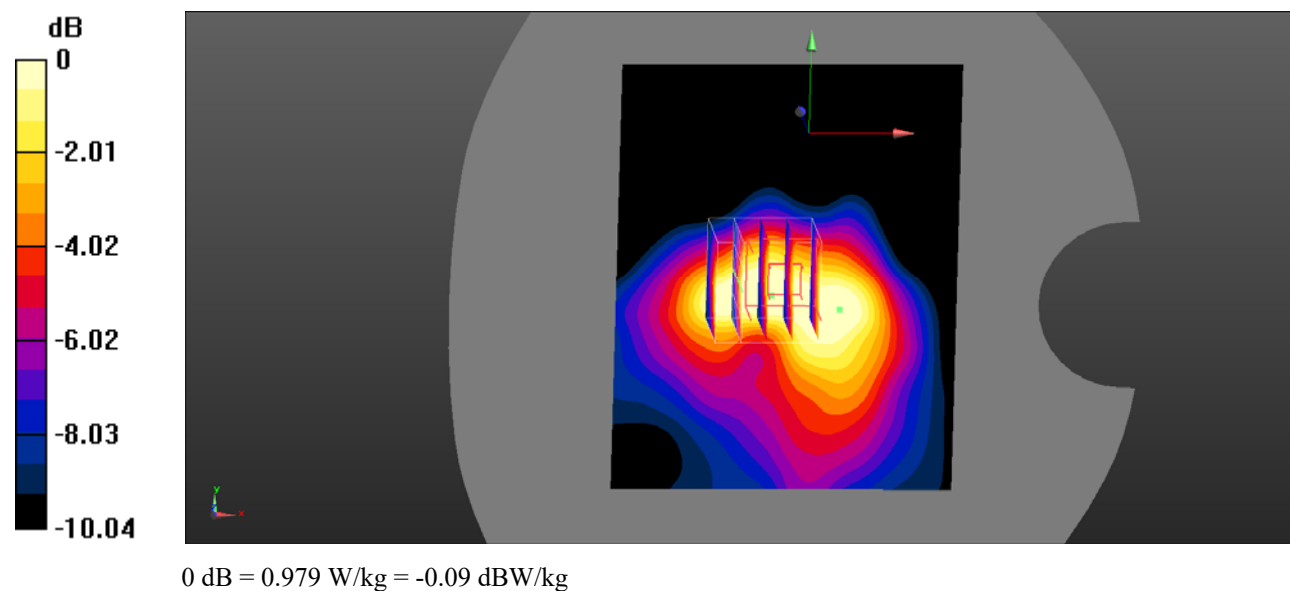

Test Plot 93#: LTE Band 14_Body Left_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.760 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 27.44 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.716 W/kg
SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.394 W/kg
Maximum value of SAR (measured) = 0.669 W/kg

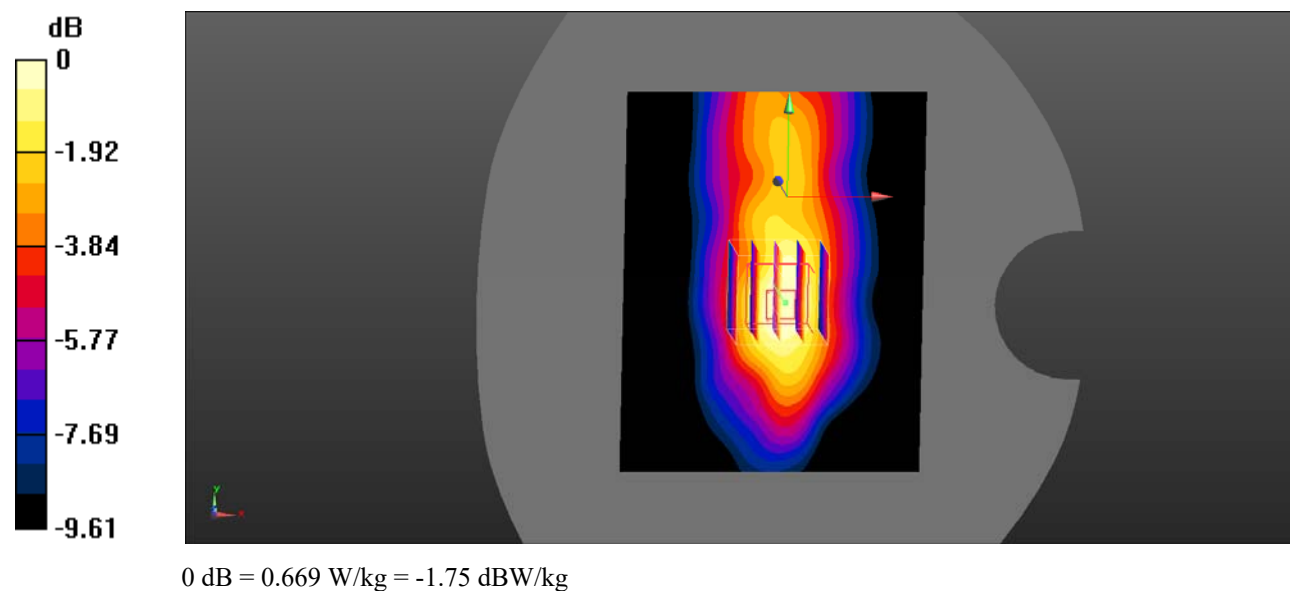

Test Plot 94#: LTE Band 14_ Body Left_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (61x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.626 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 24.03 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.585 W/kg
SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.317 W/kg
Maximum value of SAR (measured) = 0.544 W/kg

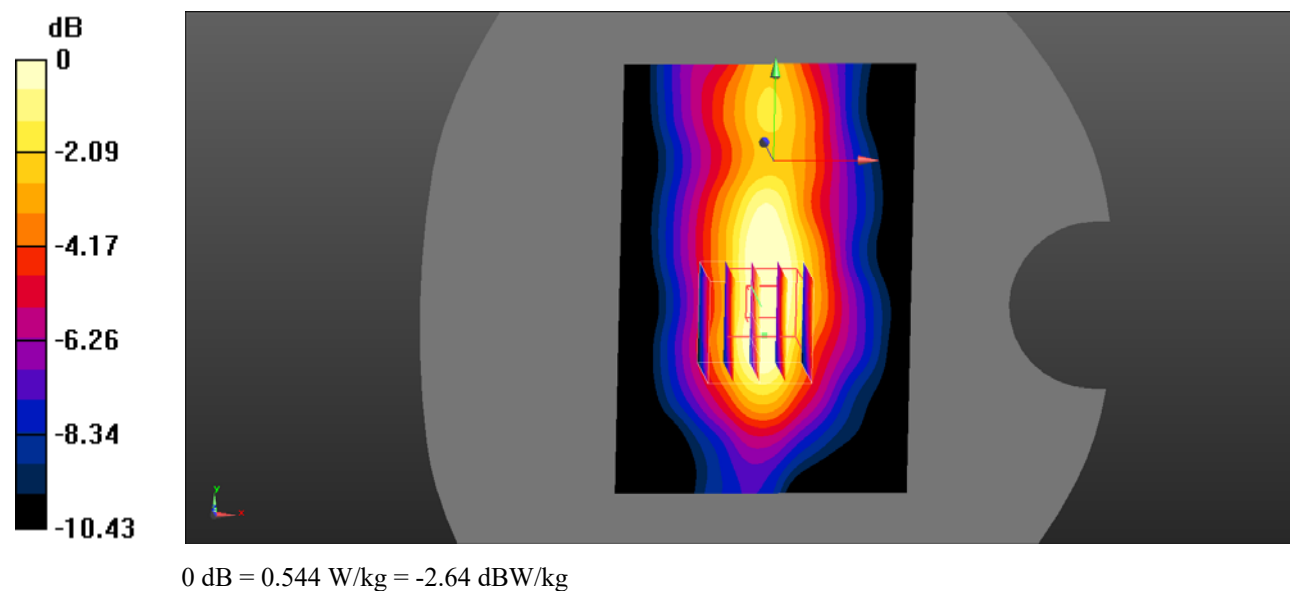

Test Plot 95#: LTE Band 14_Body Right_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0811 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.704 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.0650 W/kg
SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.042 W/kg
Maximum value of SAR (measured) = 0.0628 W/kg

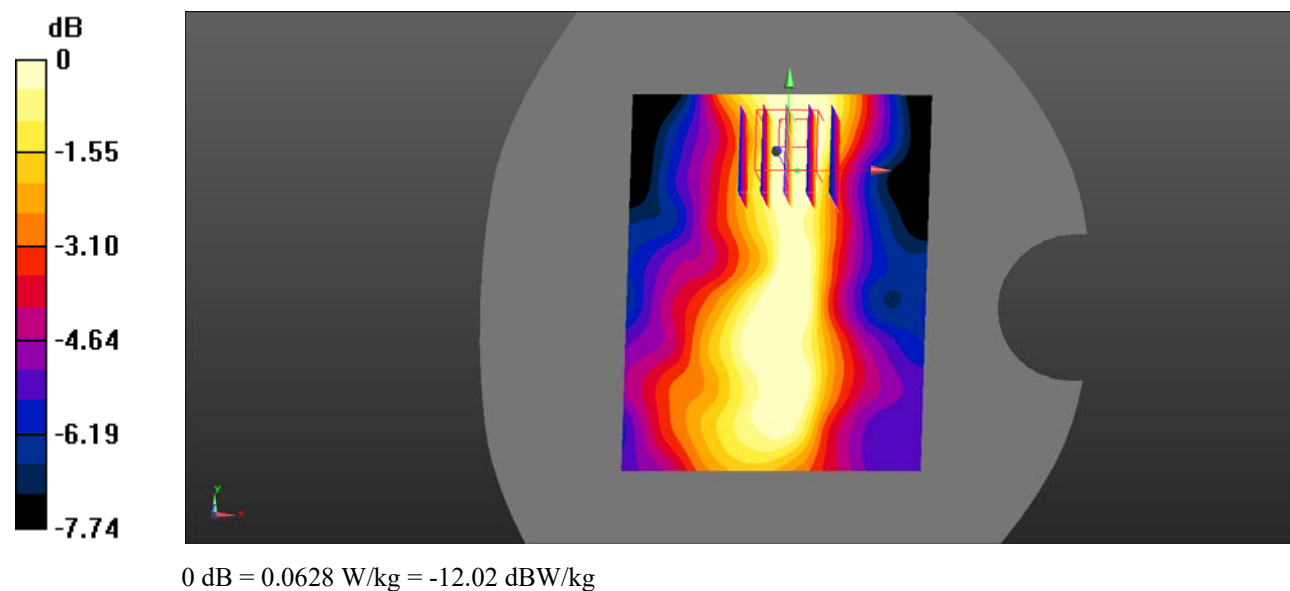

Test Plot 96#: LTE Band 14_Body Right_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.106 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 8.187 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.0920 W/kg
SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.056 W/kg
Maximum value of SAR (measured) = 0.0901 W/kg

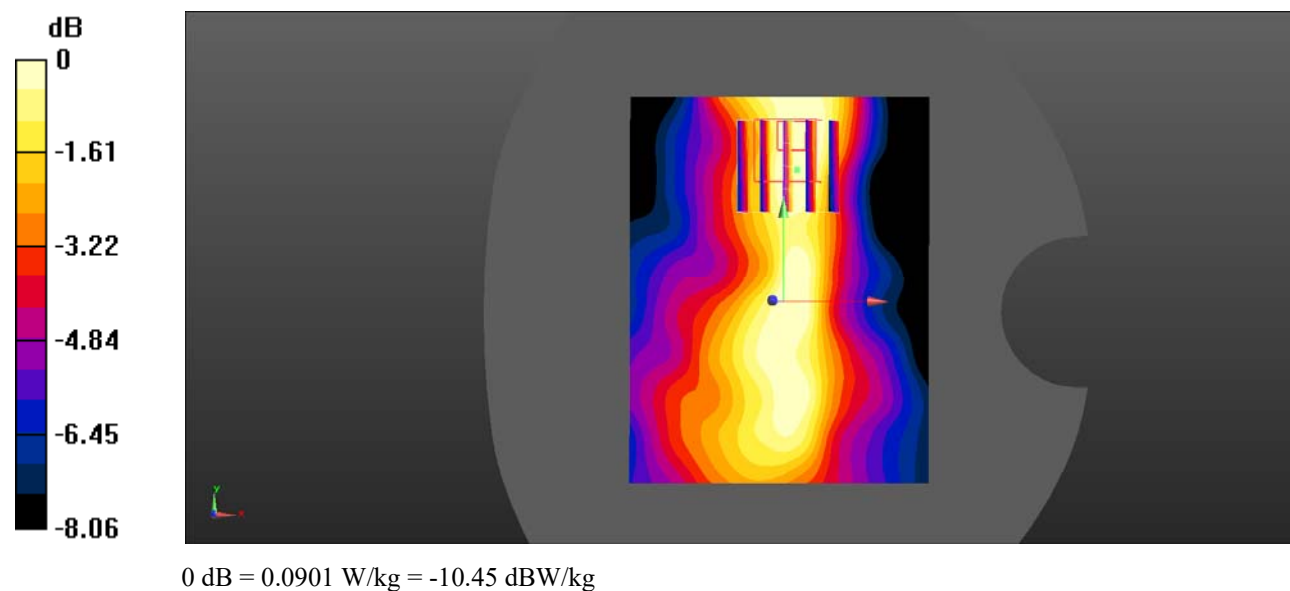

Test Plot 97#: LTE Band 14_Body Top_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.594 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 4.582 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.672 W/kg
SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.262 W/kg
Maximum value of SAR (measured) = 0.547 W/kg

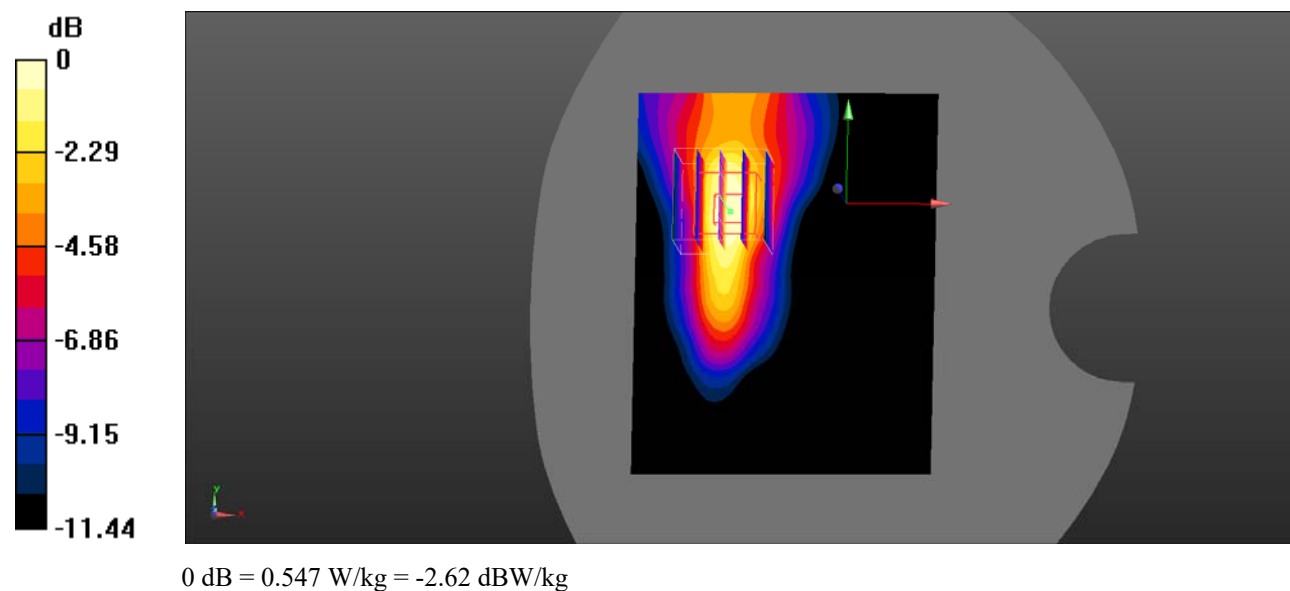

Test Plot 98#: LTE Band 14_Body Top_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.482 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 19.87 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.600 W/kg
SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.240 W/kg
Maximum value of SAR (measured) = 0.475 W/kg

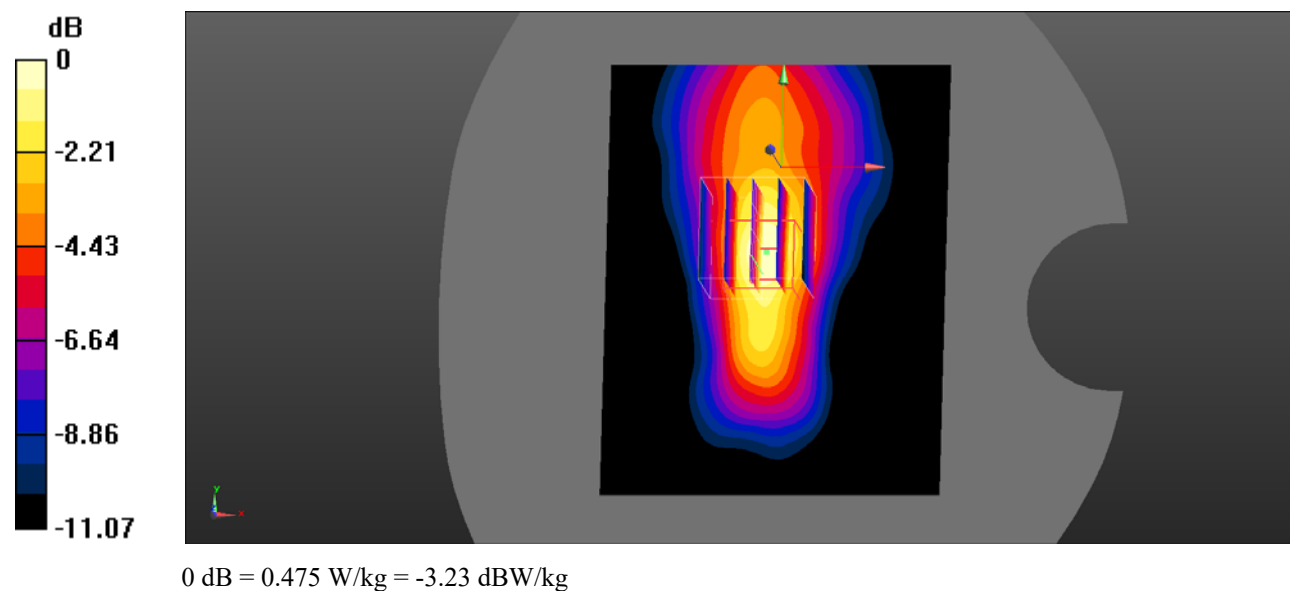

Test Plot 99#: LTE Band 14_Body Back_1RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.314 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 15.79 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.257 W/kg
SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.193 W/kg
Maximum value of SAR (measured) = 0.248 W/kg

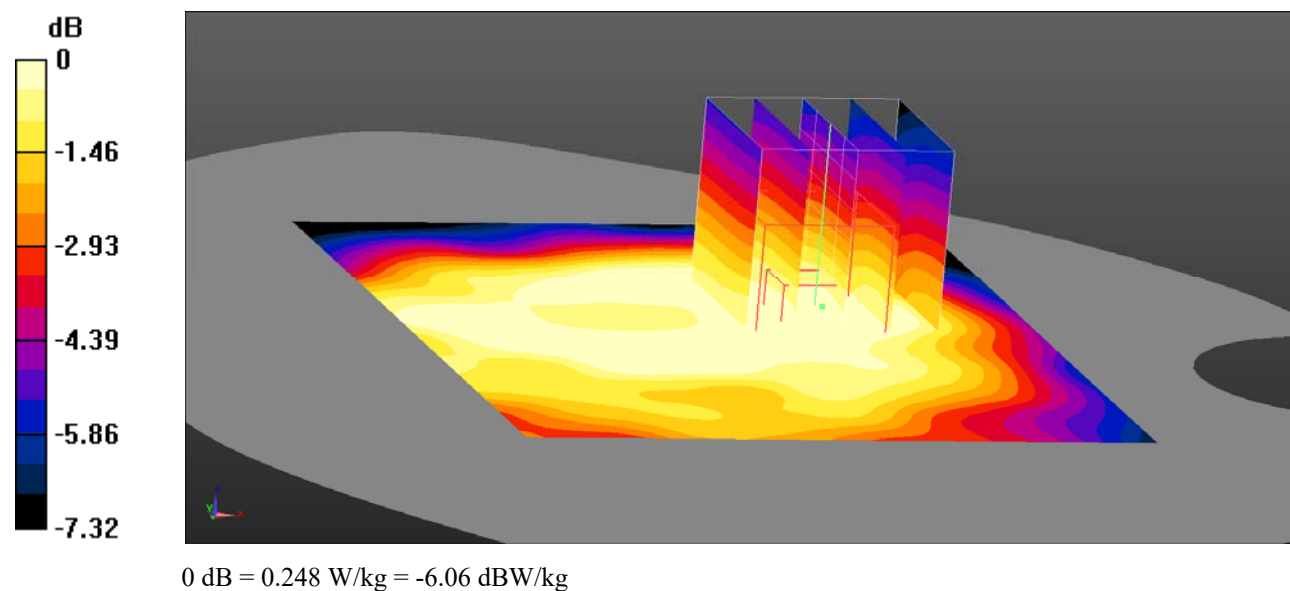

Test Plot 100#: LTE Band 14_Body Back_50%RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.246 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 2.114 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 0.203 W/kg
SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.152 W/kg
Maximum value of SAR (measured) = 0.198 W/kg

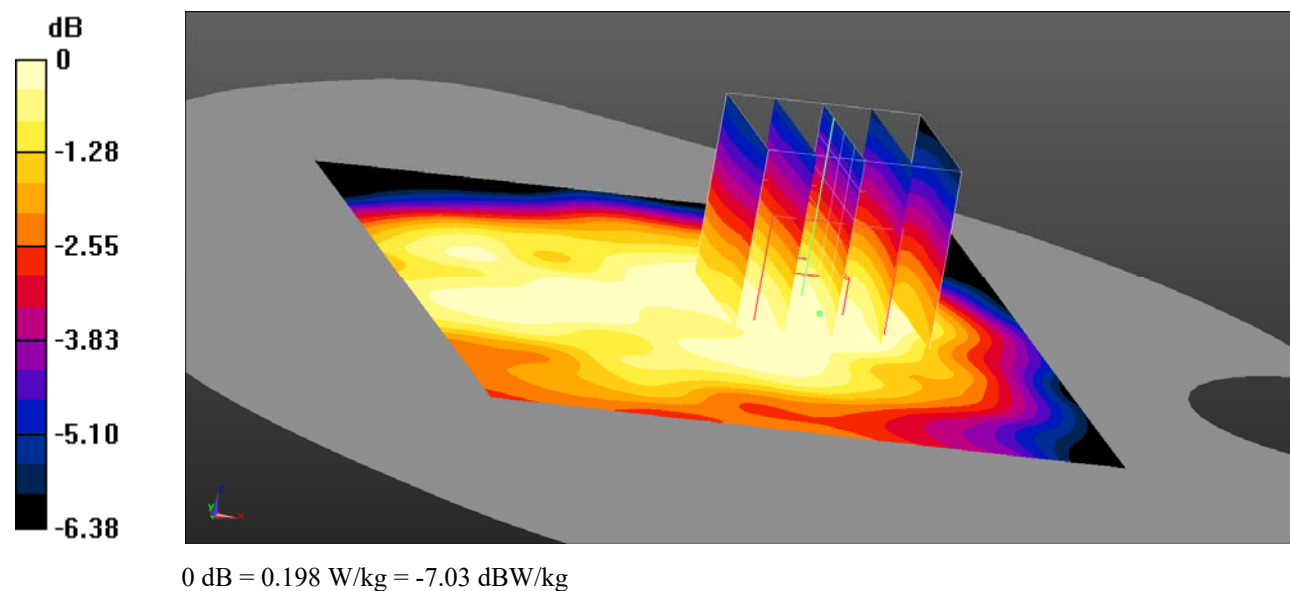

Test Plot 101#: LTE Band 14_Body Left_1RB_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.372 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 15.05 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.334 W/kg
SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.216 W/kg
Maximum value of SAR (measured) = 0.302 W/kg

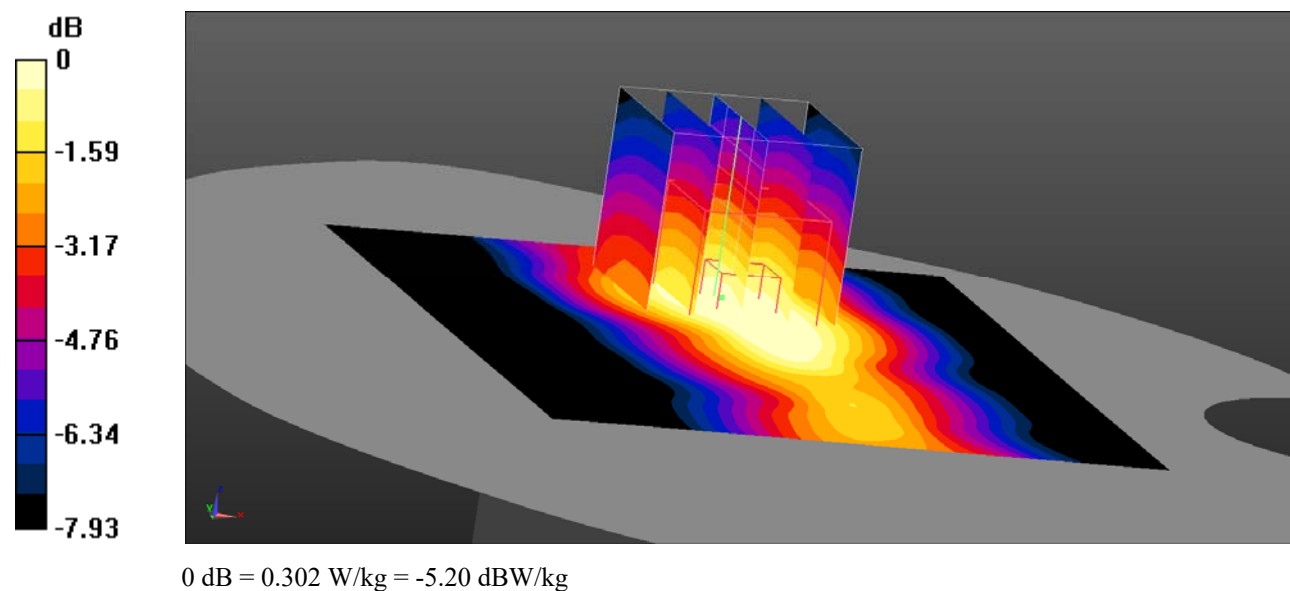

Test Plot 102#: LTE Band 14_Body Left_50%RB_Middle_4mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.301 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 13.35 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.263 W/kg
SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.172 W/kg
Maximum value of SAR (measured) = 0.243 W/kg

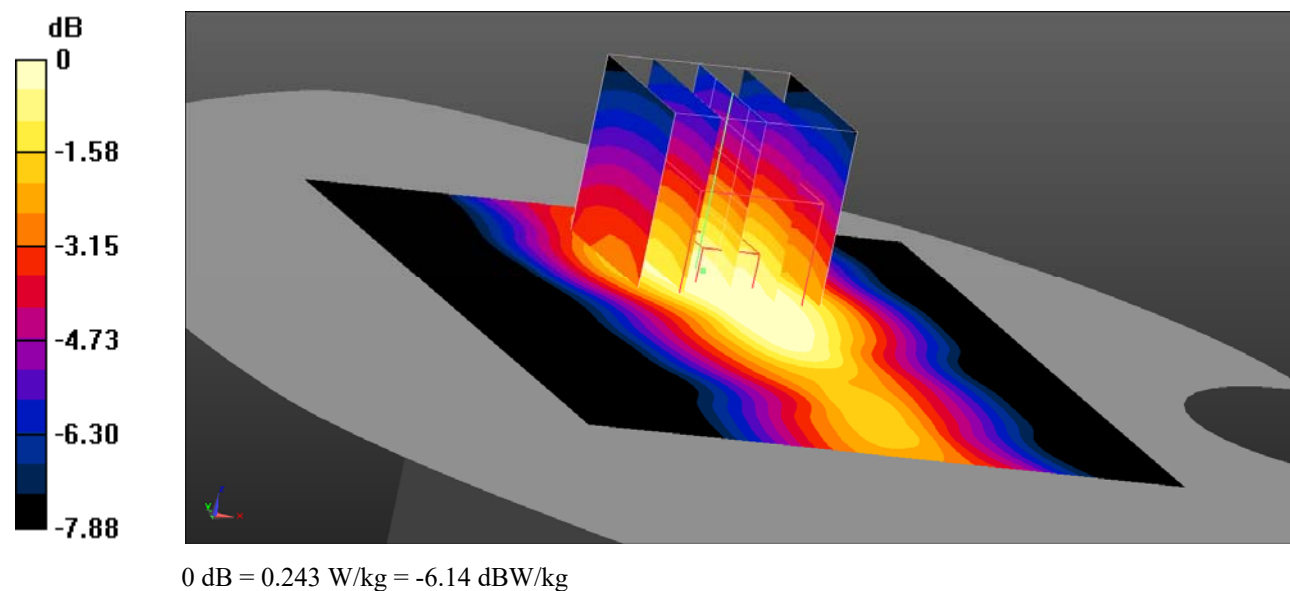

Test Plot 103#: LTE Band 14_Body Top_1RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.210 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 11.73 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.177 W/kg
SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.137 W/kg
Maximum value of SAR (measured) = 0.171 W/kg

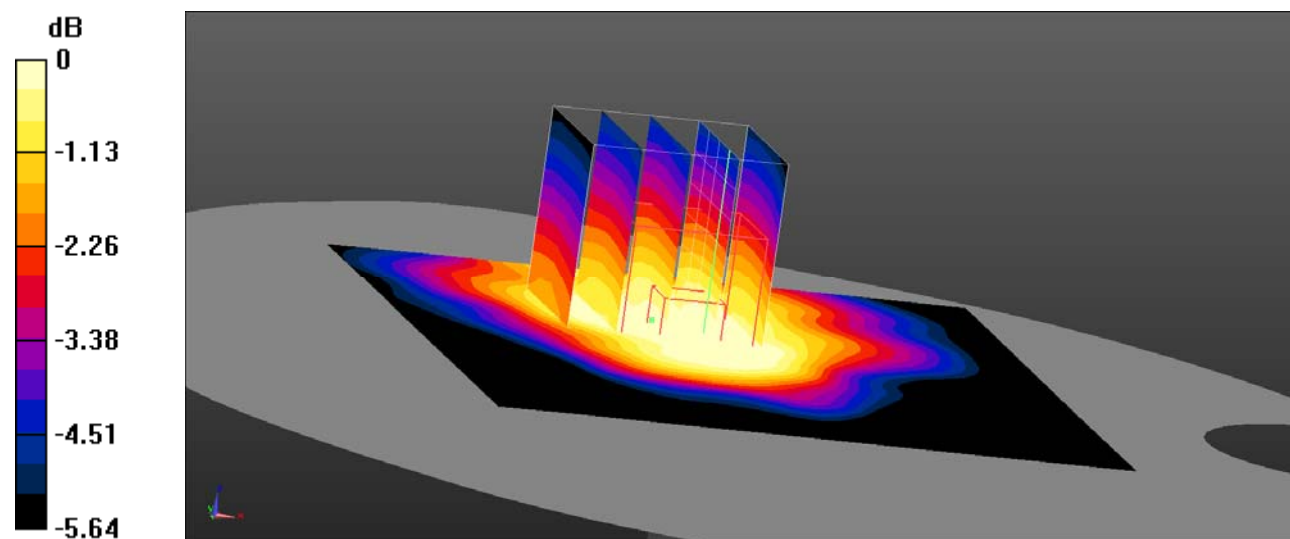

0 dB = 0.171 W/kg = -7.67 dBW/kg

Test Plot 104#: LTE Band 14_Body Top_50%RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 793$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.122 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 9.301 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.098 W/kg
Maximum value of SAR (measured) = 0.137 W/kg

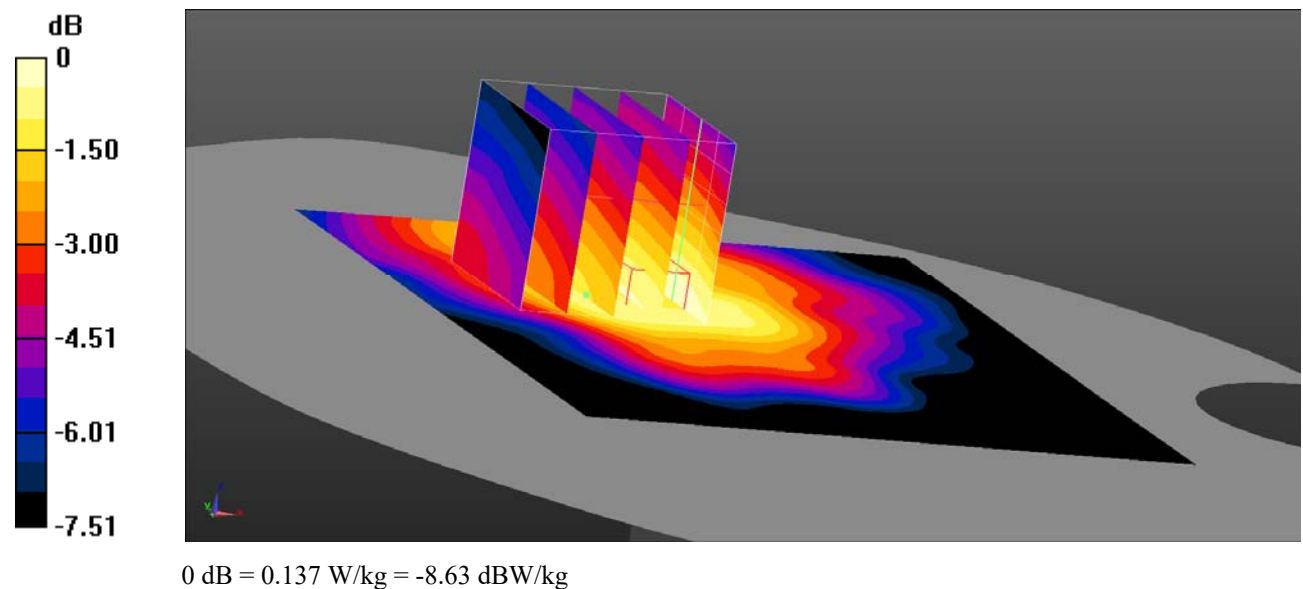

Test Plot 105#: LTE Band 25_Body Back_1RB_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 39.945$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.779 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.15 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.360 W/kg

Maximum value of SAR (measured) = 0.615 W/kg

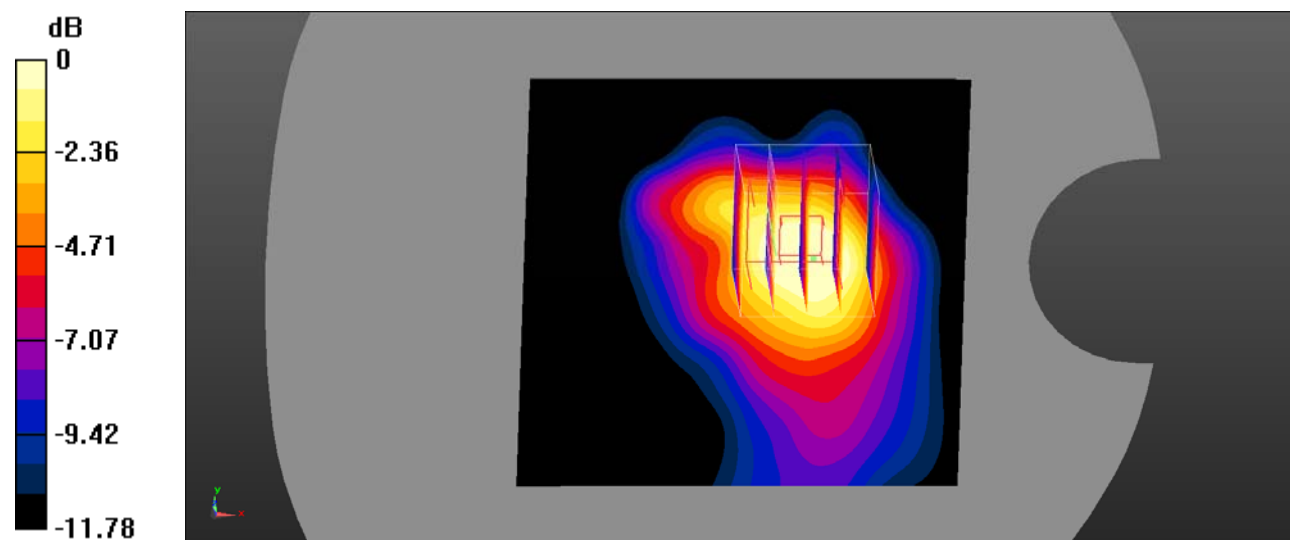

0 dB = 0.615 W/kg = -2.11 dBW/kg

Test Plot 106#: LTE Band 25_Body Back_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.588$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.980 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.48 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.513 W/kg

Maximum value of SAR (measured) = 0.959 W/kg

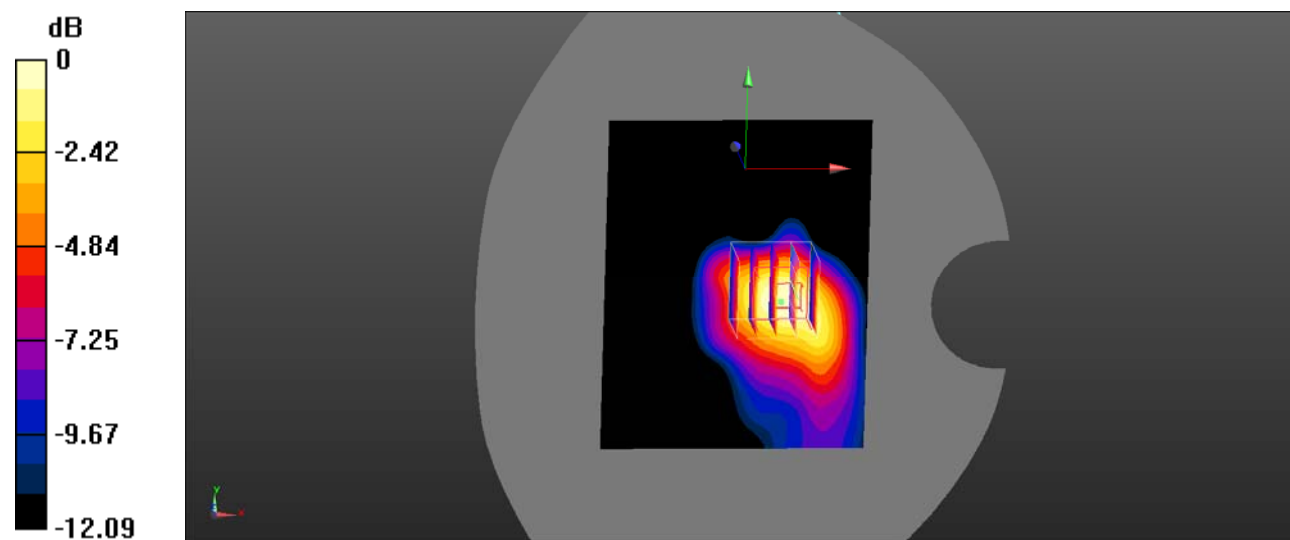

0 dB = 0.959 W/kg = -0.18 dBW/kg

Test Plot 107#: LTE Band 25_Body Back_1RB_High_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.899$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.646 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.37 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.812 W/kg

SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.353 W/kg

Maximum value of SAR (measured) = 0.611 W/kg

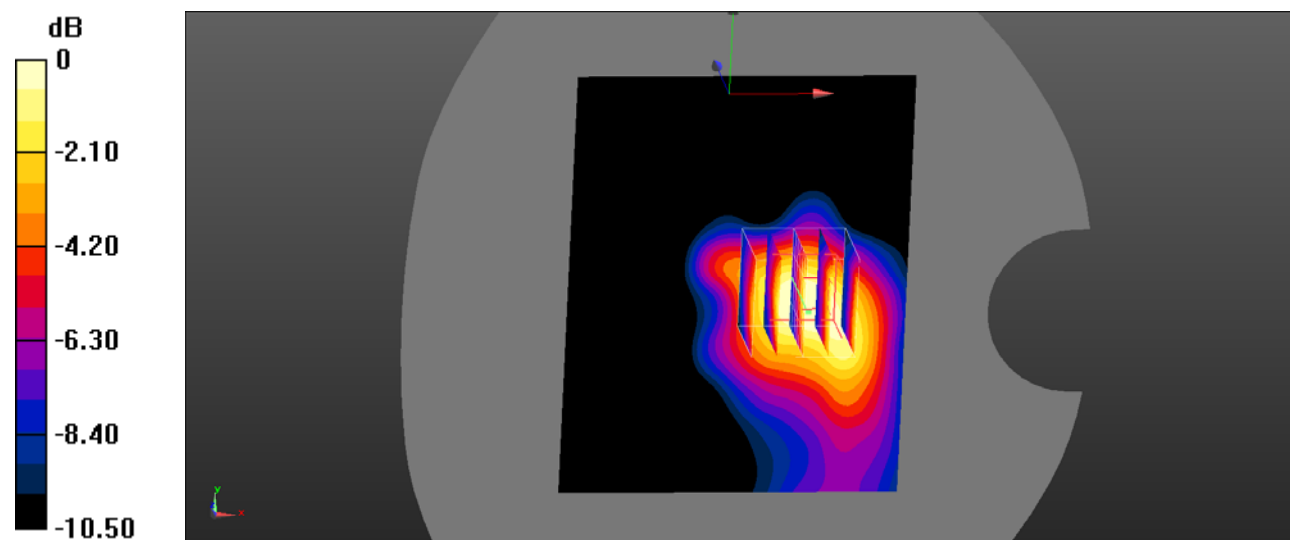

0 dB = 0.611 W/kg = -2.14 dBW/kg

Test Plot 108#: LTE Band 25_Body Back_50%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.588$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.757 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 22.55 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.878 W/kg
SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.384 W/kg
Maximum value of SAR (measured) = 0.663 W/kg

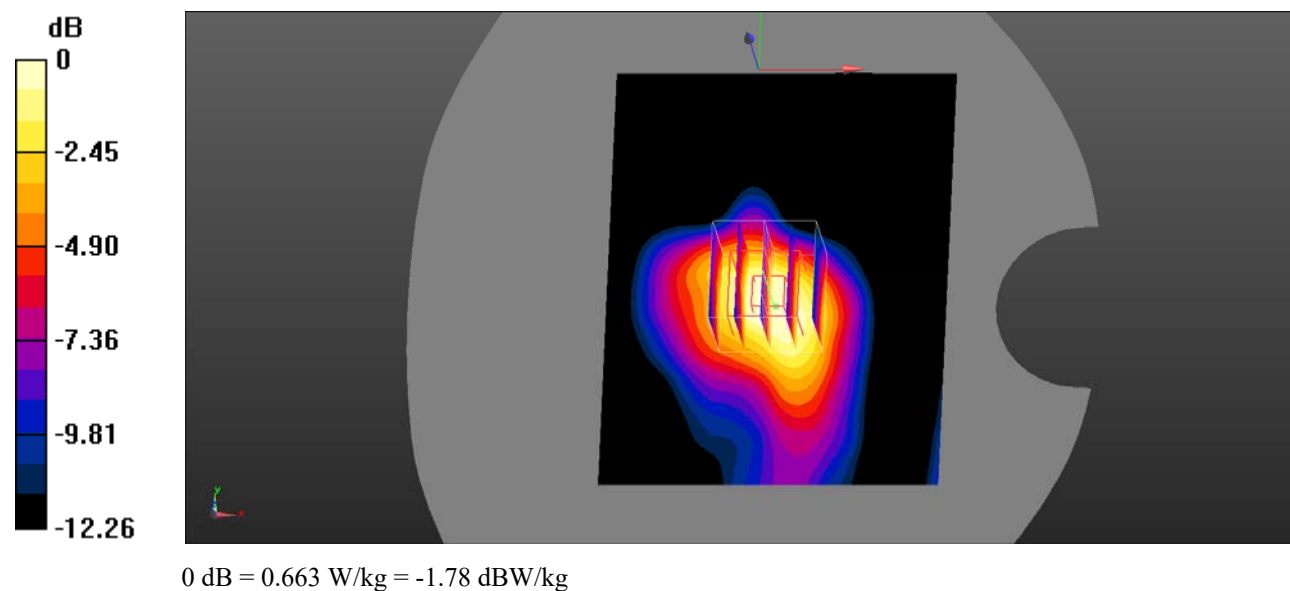

Test Plot 109#: LTE Band 25_Body Back_100%RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.588$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.792 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 12.11 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.894 W/kg
SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.388 W/kg
Maximum value of SAR (measured) = 0.703 W/kg

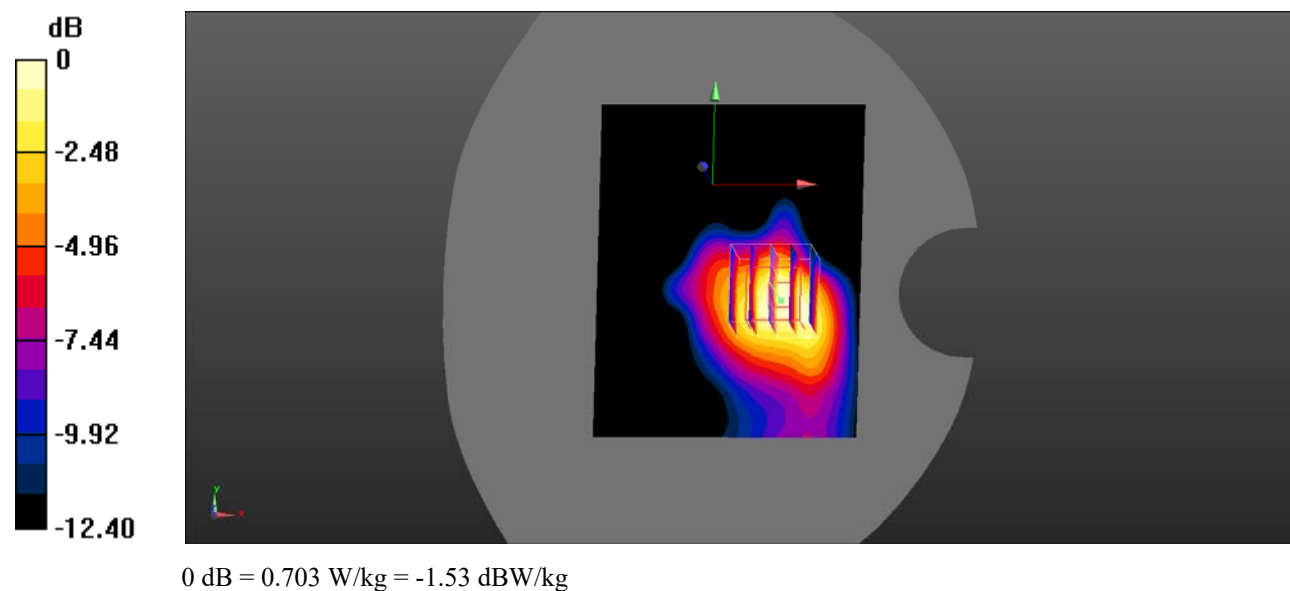

Test Plot 110#: LTE Band 25_Body Left_1RB_Middle_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.588$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.119 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.450 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.107 W/kg
SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.060 W/kg
Maximum value of SAR (measured) = 0.0939 W/kg

