

Test Plot 201#: LTE Band 71_Body Top_50%RB_Middle_19mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: Generic FDD-LTE; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 42.738$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0321 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 4.412 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.0400 W/kg
SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.021 W/kg
Maximum value of SAR (measured) = 0.0299 W/kg

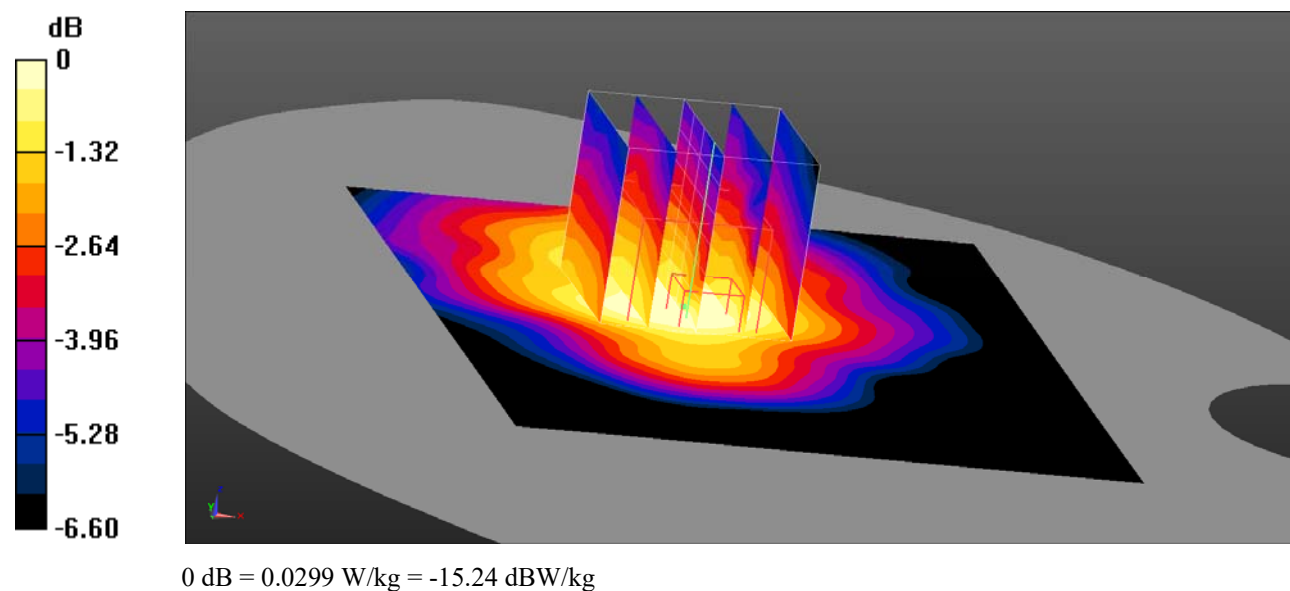

Test Plot 202#: 2.4G Wifi_Body Back_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.737$ S/m; $\epsilon_r = 38.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.349 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.038 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.488 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.308 W/kg

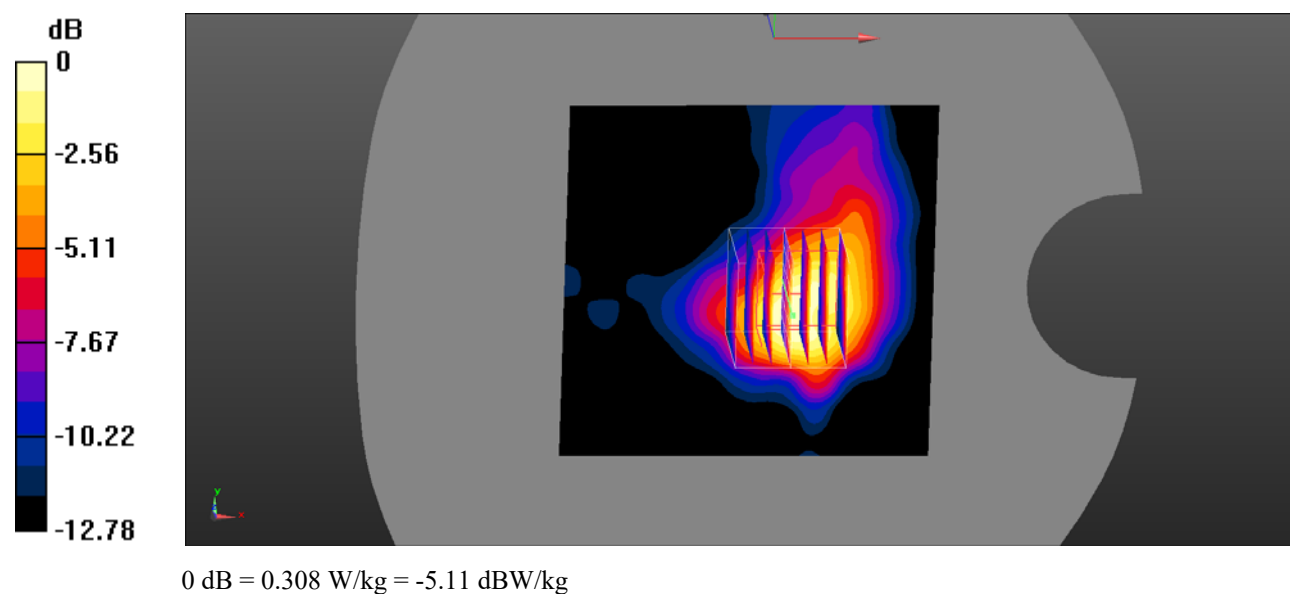

Test Plot 203#: 2.4G Wifi_ Body Right_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.737$ S/m; $\epsilon_r = 38.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.214 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 9.085 V/m; Power Drift = -0.79 dB
Peak SAR (extrapolated) = 0.209 W/kg
SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.100 W/kg
Maximum value of SAR (measured) = 0.186 W/kg

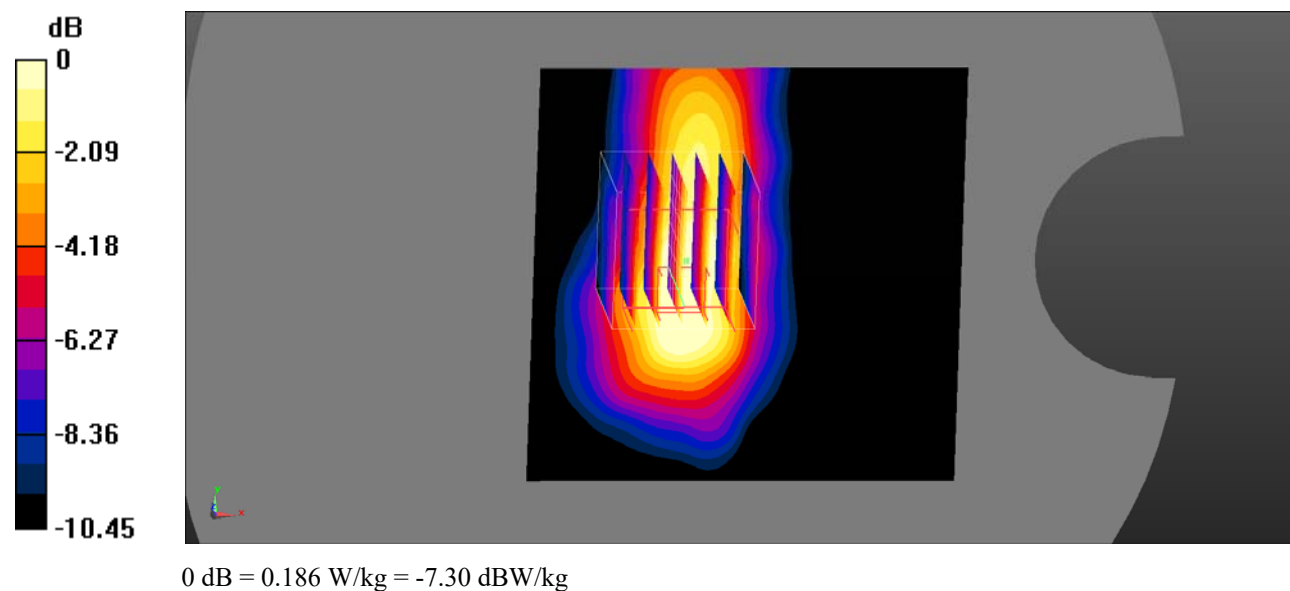

Test Plot 204#: 2.4G Wifi_Body Top_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.737$ S/m; $\epsilon_r = 38.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.146 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.106 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.178 W/kg
SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.039 W/kg
Maximum value of SAR (measured) = 0.116 W/kg

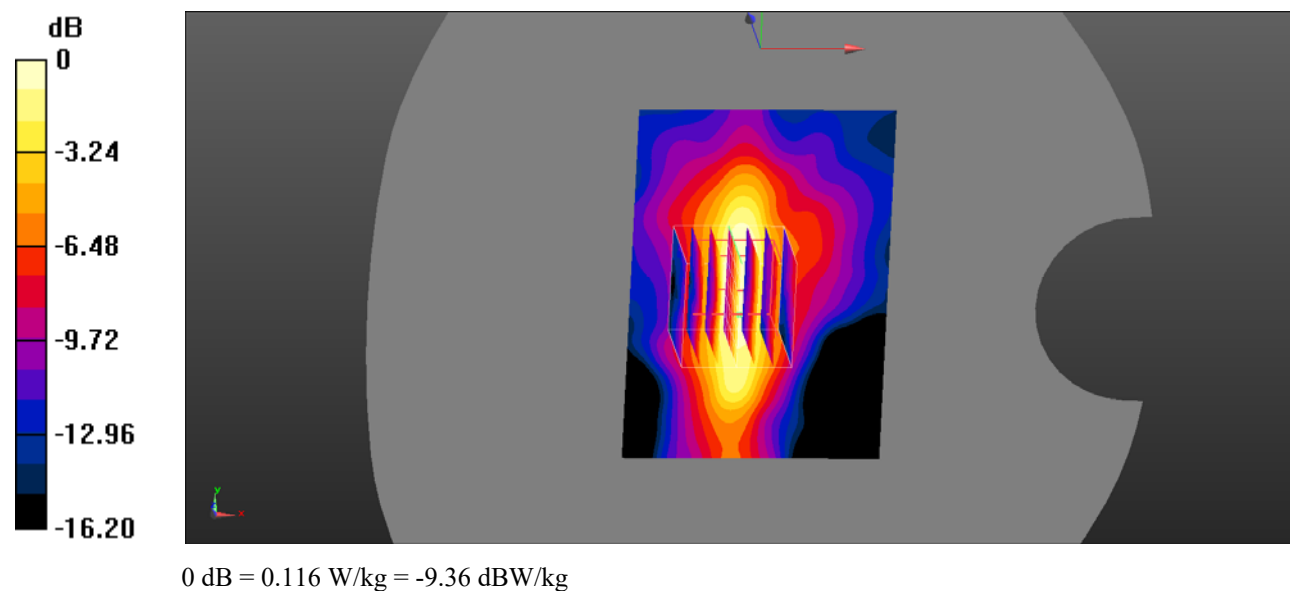

Test Plot 205#: 2.4G Wifi _Body Back_Low_9mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.737$ S/m; $\epsilon_r = 38.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.256 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 7.677 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.248 W/kg
SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.122 W/kg
Maximum value of SAR (measured) = 0.205 W/kg

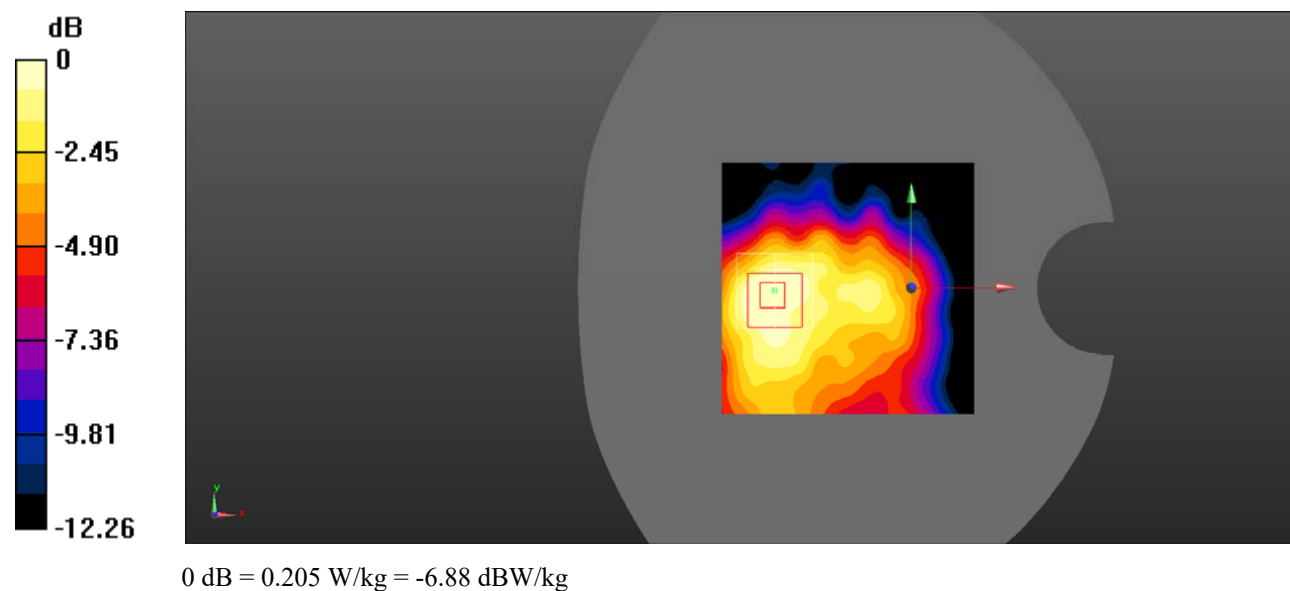

Test Plot 206#: 2.4G Wifi_Body Right_Low_1mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.737$ S/m; $\epsilon_r = 38.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.603 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 15.57 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.561 W/kg
SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.267 W/kg
Maximum value of SAR (measured) = 0.481 W/kg

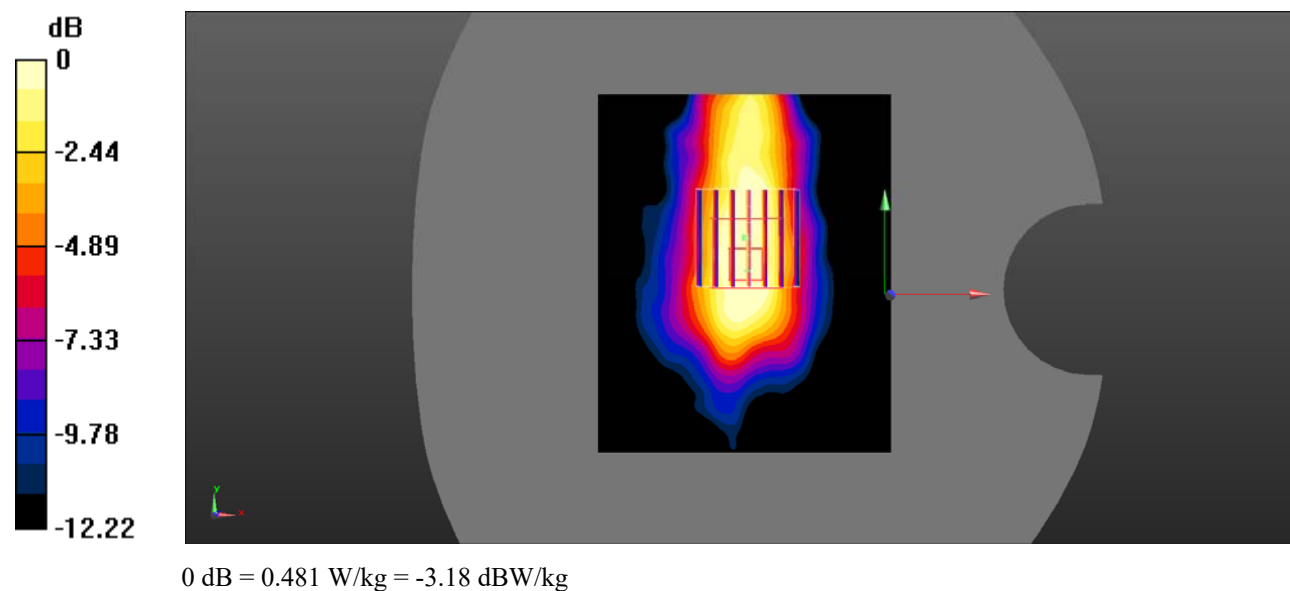

Test Plot 207#: 2.4G Wifi_Body Top_Low_14mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.737$ S/m; $\epsilon_r = 38.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (81x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.0754 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 4.977 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.0660 W/kg
SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.040 W/kg
Maximum value of SAR (measured) = 0.0585 W/kg

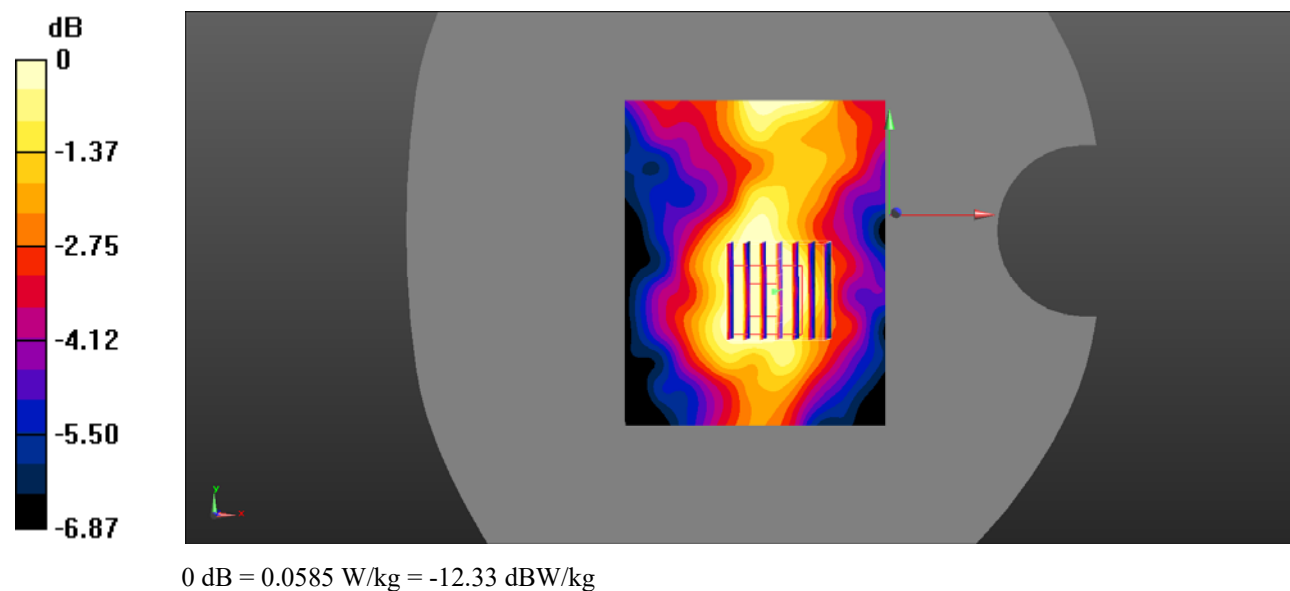

Test Plot 208#: 5.2G Wifi_Body Back_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5180$ MHz; $\sigma = 4.613$ S/m; $\epsilon_r = 36.956$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.457 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.5150 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.494 W/kg
SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.071 W/kg
Maximum value of SAR (measured) = 0.393 W/kg

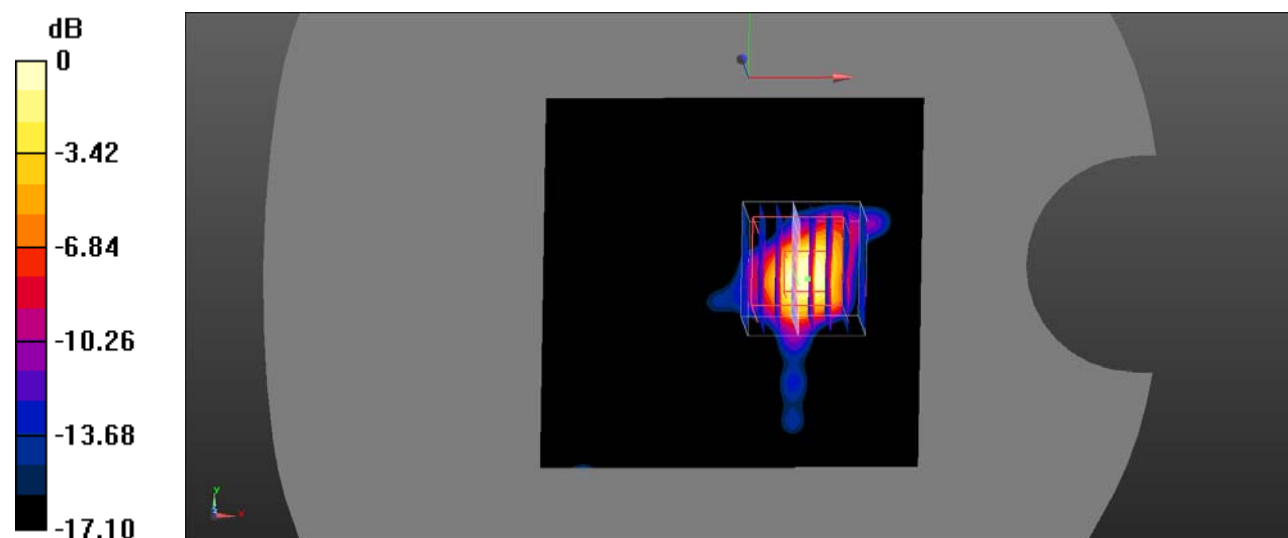

0 dB = 0.393 W/kg = -4.06 dBW/kg

Test Plot 209#: 5.2G Wifi_ Body Right_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.613 \text{ S/m}$; $\epsilon_r = 36.956$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (121x121x1): Interpolated grid: $dx=0.8000 \text{ mm}$, $dy=0.8000 \text{ mm}$
Maximum value of SAR (interpolated) = 0.0473 W/kg

Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 2.685 V/m ; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.0820 W/kg
SAR(1 g) = 0.049 W/kg ; SAR(10 g) = 0.042 W/kg
Maximum value of SAR (measured) = 0.0825 W/kg

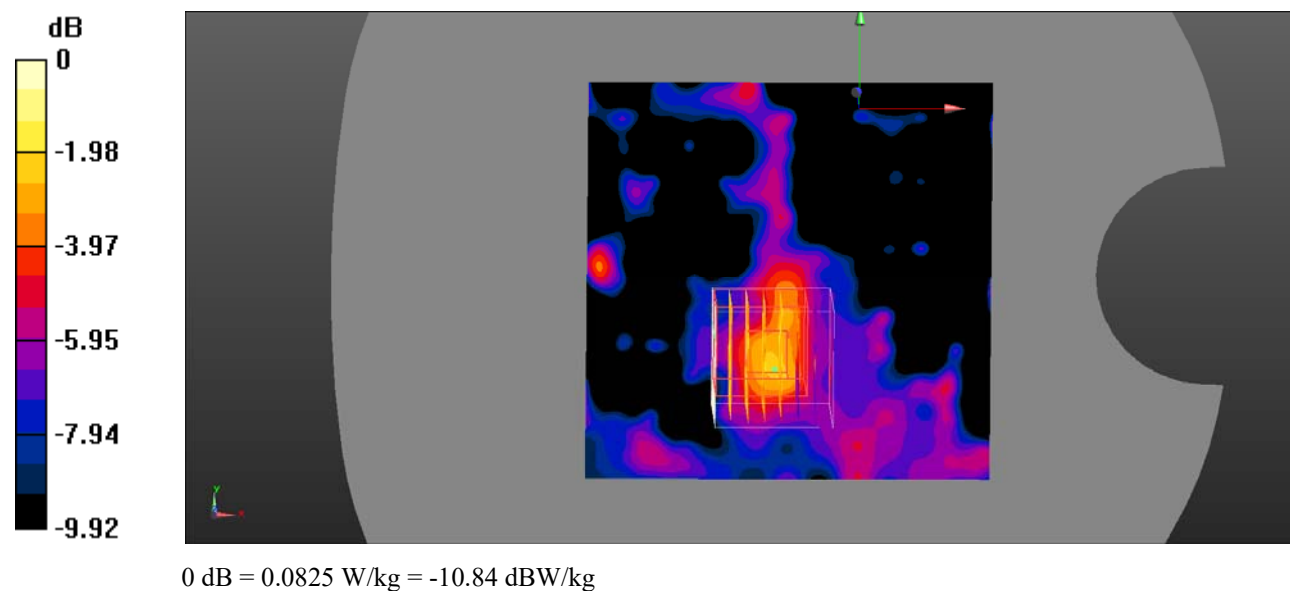

Test Plot 210#: 5.2G Wifi_Body Top_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5180$ MHz; $\sigma = 4.613$ S/m; $\epsilon_r = 36.956$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.894 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 11.95 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.149 W/kg
Maximum value of SAR (measured) = 0.870 W/kg

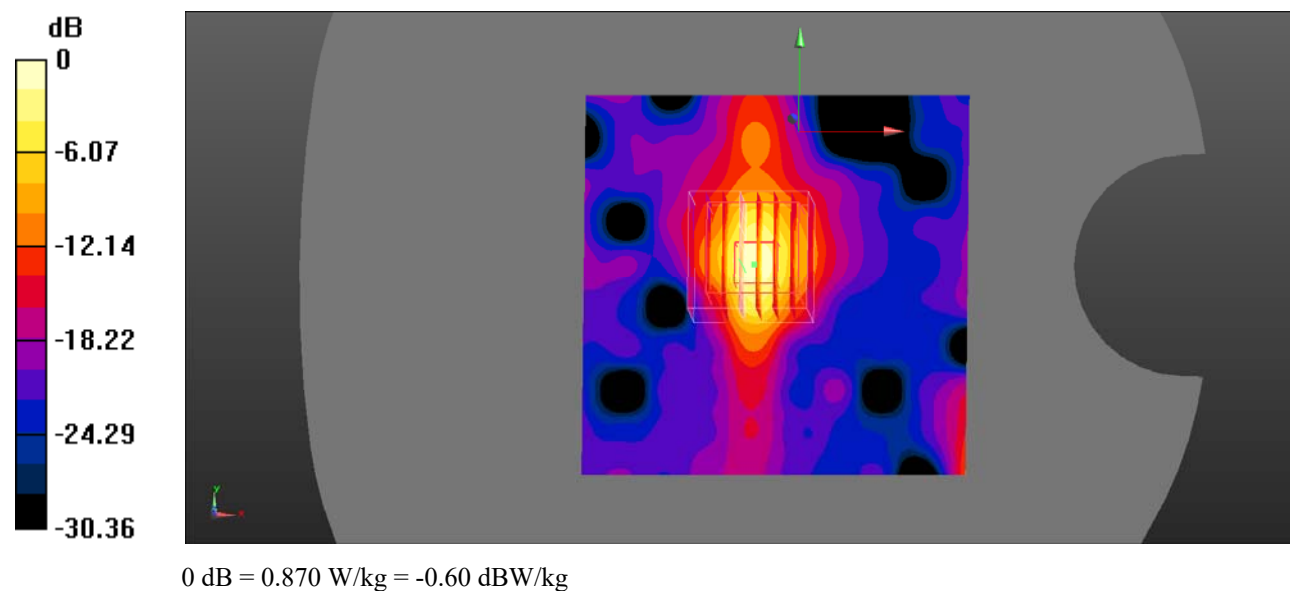

Test Plot 211#: 5.2G Wifi _Body Back_Low_9mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 5.2G Wifi (0); Frequency: 5180 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5180$ MHz; $\sigma = 4.613$ S/m; $\epsilon_r = 36.956$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.338 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 2.202 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.362 W/kg
SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.108 W/kg
Maximum value of SAR (measured) = 0.334 W/kg

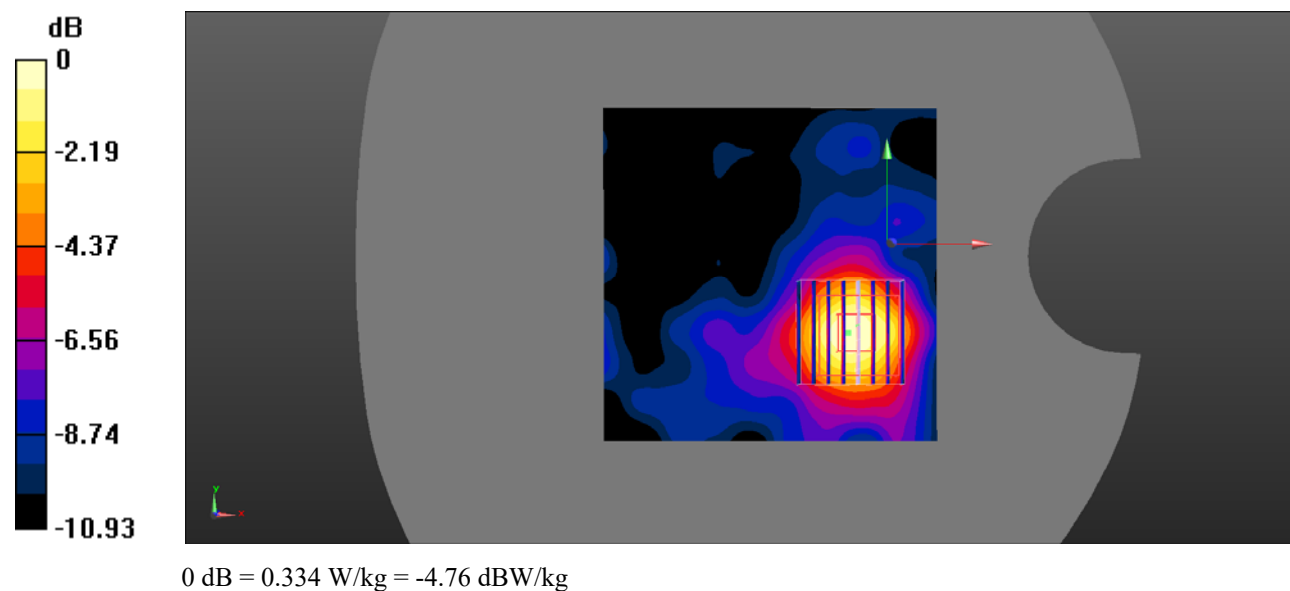

Test Plot 212#: 5.2G Wifi_Body Right_Low_1mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.613 \text{ S/m}$; $\epsilon_r = 36.956$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (121x121x1): Interpolated grid: $dx=0.8000 \text{ mm}$, $dy=0.8000 \text{ mm}$
Maximum value of SAR (interpolated) = 0.218 W/kg

Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 3.819 V/m ; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.245 W/kg
SAR(1 g) = 0.096 W/kg ; SAR(10 g) = 0.045 W/kg
Maximum value of SAR (measured) = 0.174 W/kg

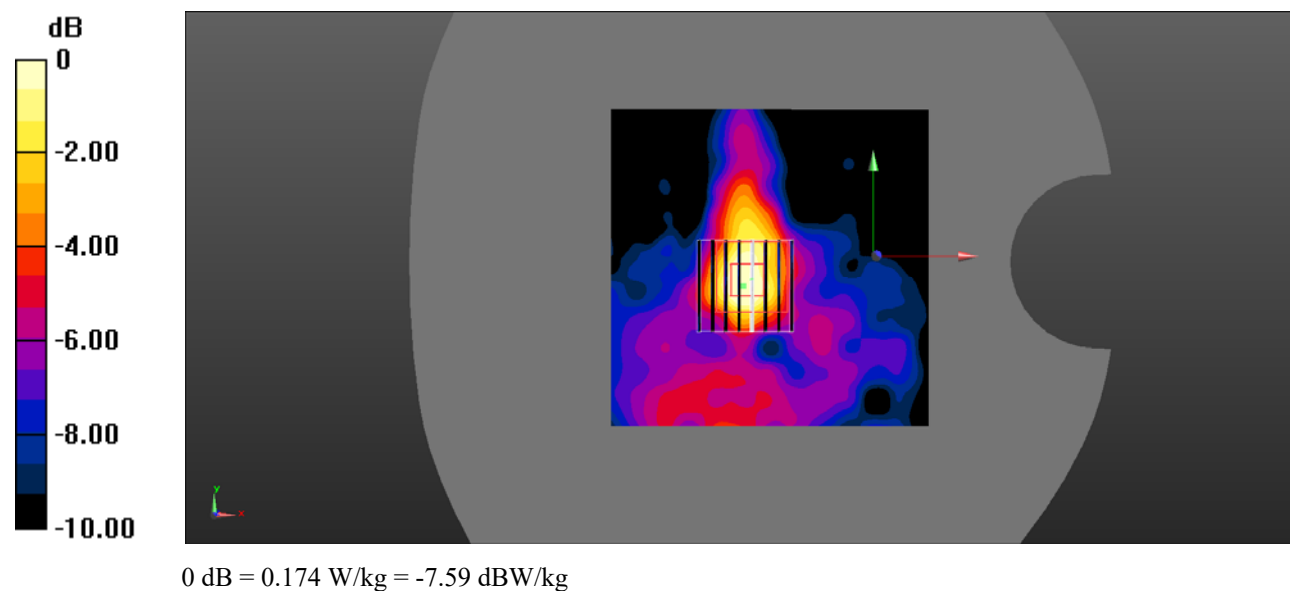

Test Plot 213#: 5.2G Wifi_Body Top_Low_14mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.613 \text{ S/m}$; $\epsilon_r = 36.956$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (81x111x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 0.251 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 5.175 V/m ; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.282 W/kg
SAR(1 g) = 0.162 W/kg ; SAR(10 g) = 0.090 W/kg
Maximum value of SAR (measured) = 0.248 W/kg

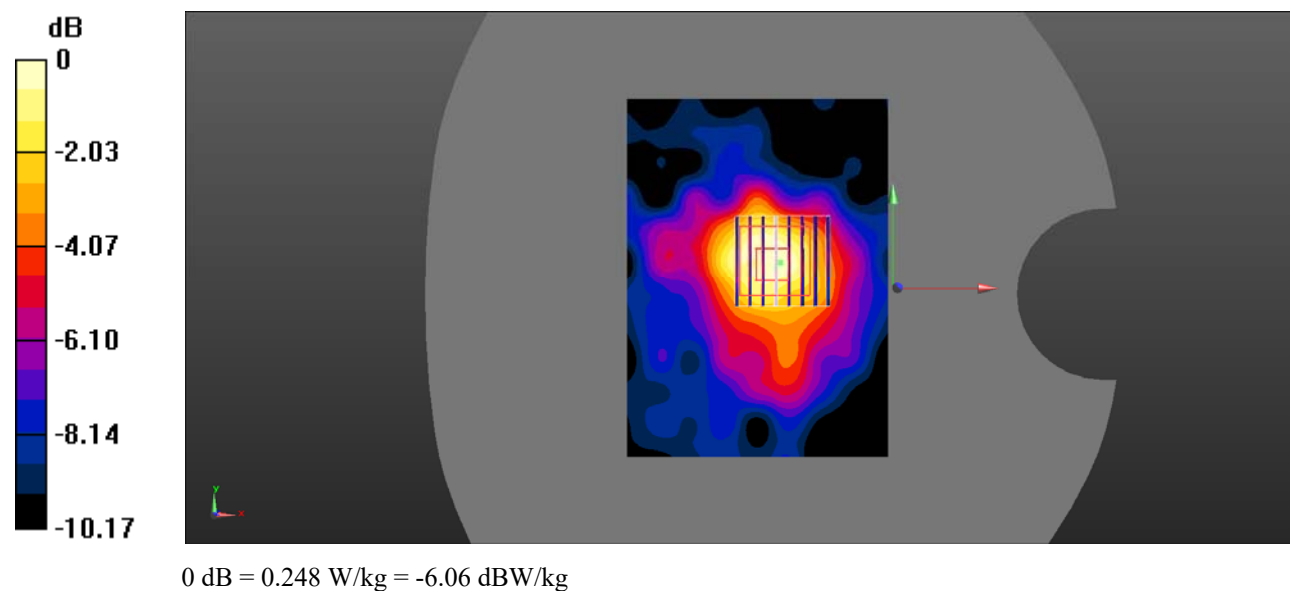

Test Plot 214#: 5.8G Wifi_Body Back_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_B15;**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 35.555$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.395 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.126 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.529 W/kg
SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.075 W/kg
Maximum value of SAR (measured) = 0.415 W/kg

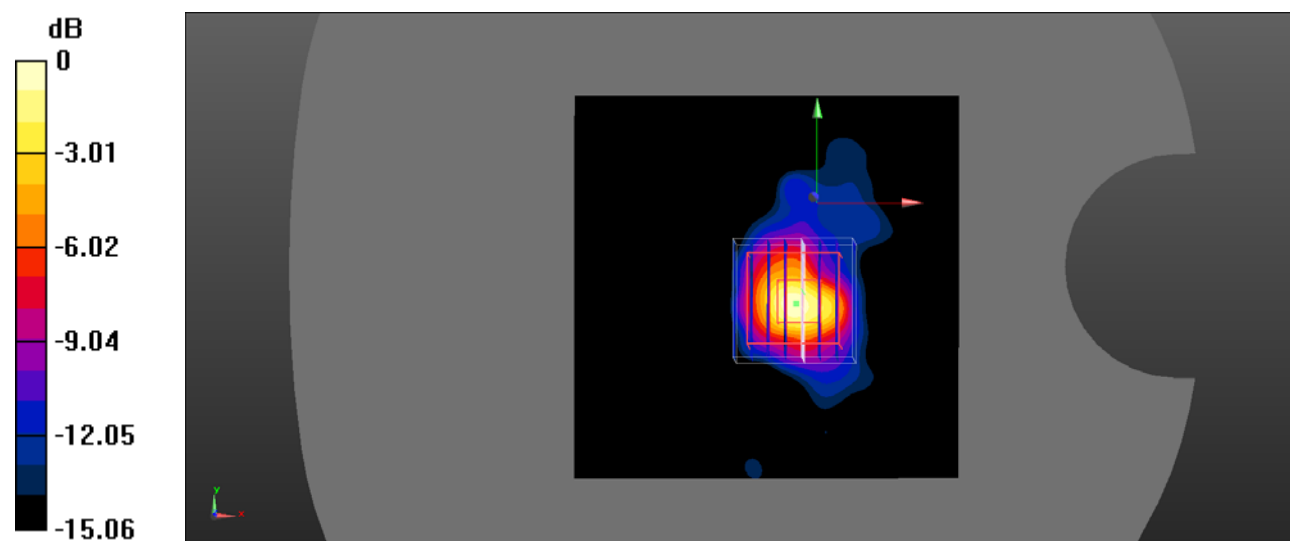

0 dB = 0.415 W/kg = -3.82 dBW/kg

Test Plot 215#: 5.8G Wifi_ Body Right_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 35.555$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (81x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.108 W/kg

Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 3.808 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.125 W/kg
SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.060 W/kg
Maximum value of SAR (measured) = 0.125 W/kg

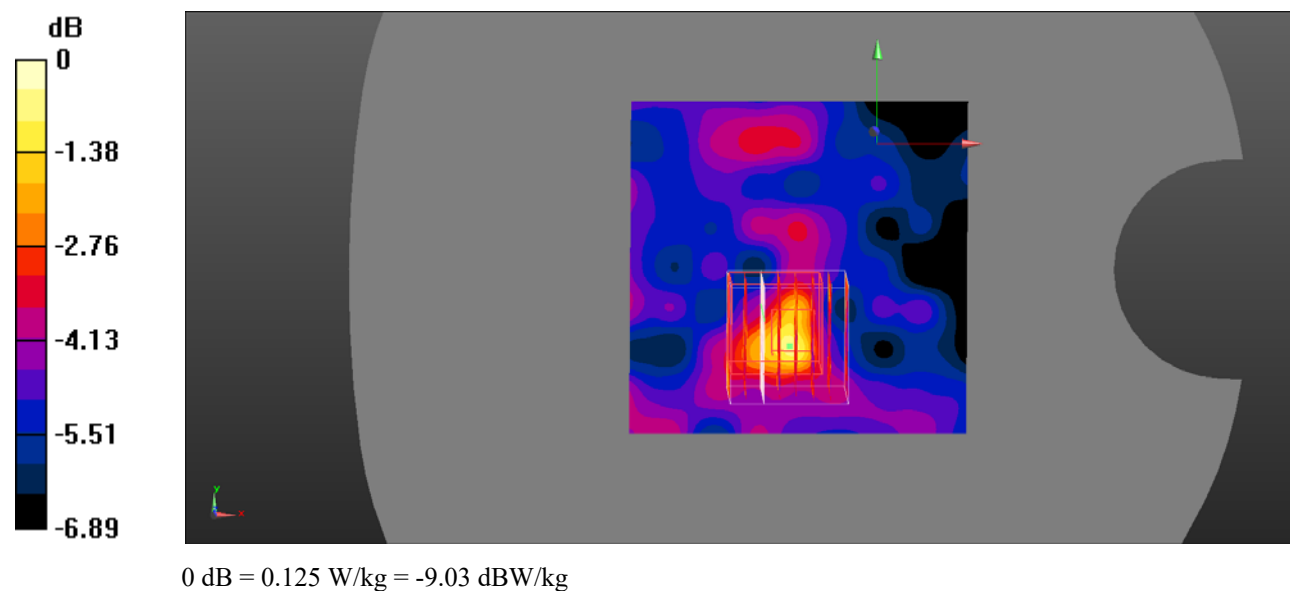

Test Plot 216#: 5.8G Wifi_Body Top_Low_0mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 35.555$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.620 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 8.824 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.00 W/kg
SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.109 W/kg
Maximum value of SAR (measured) = 0.708 W/kg

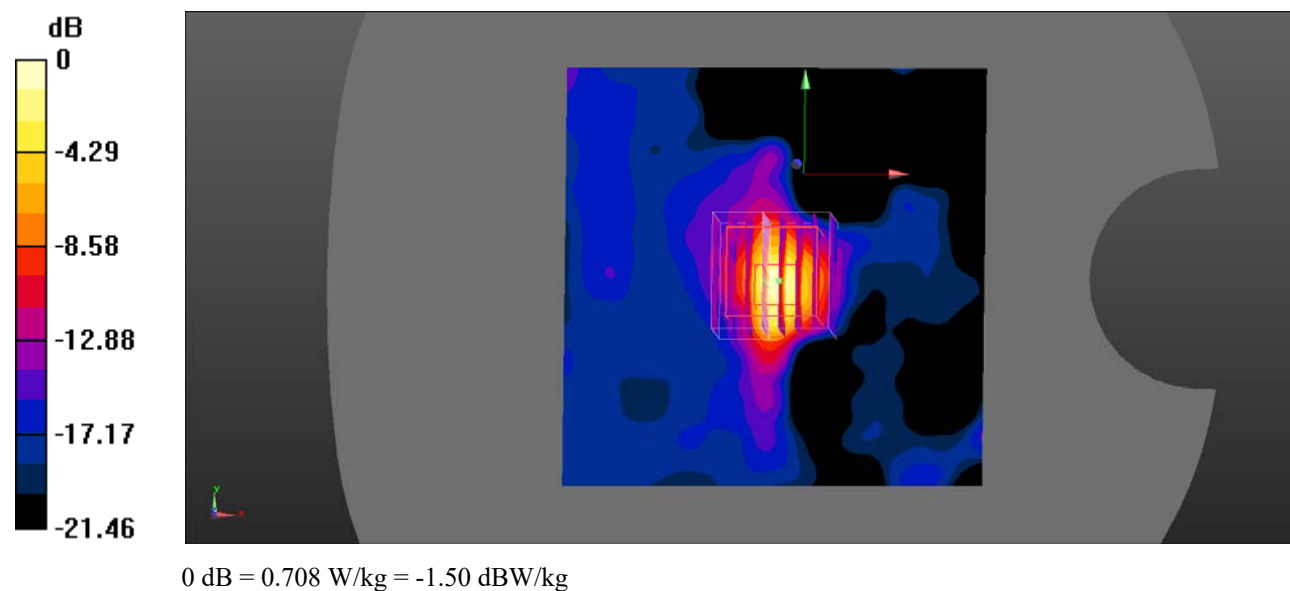

Test Plot 217#: 5.8G Wifi _Body Back_Low_9mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 35.555$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.273 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 2.974 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.351 W/kg
SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.095 W/kg
Maximum value of SAR (measured) = 0.293 W/kg

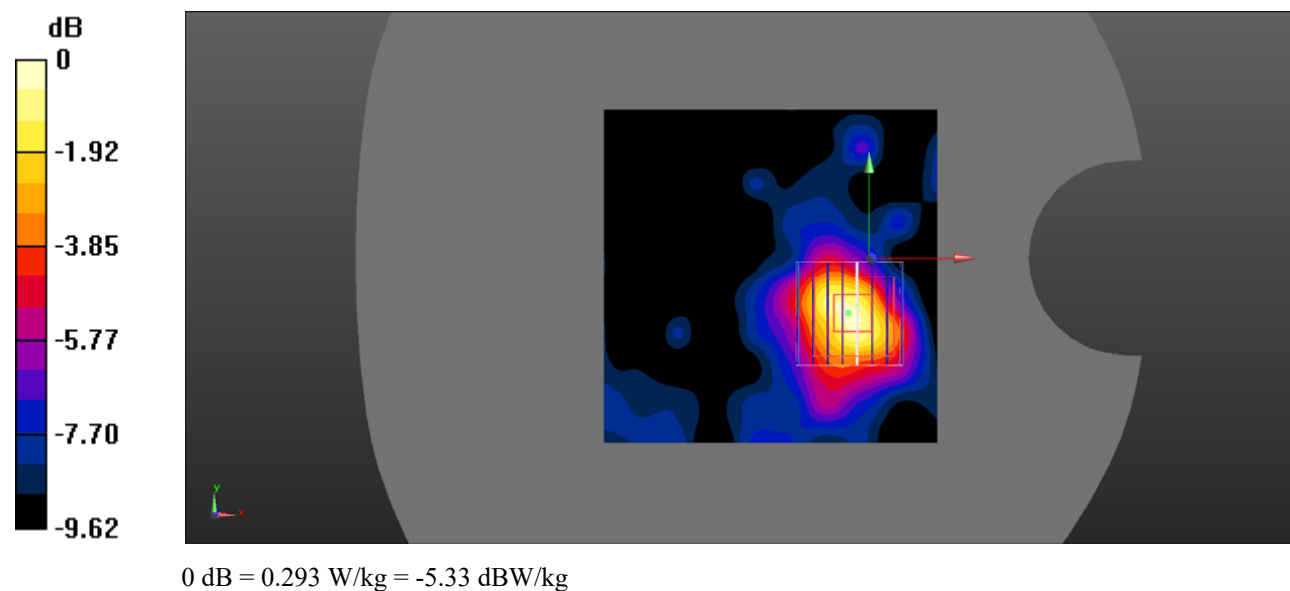

Test Plot 218#: 5.8G Wifi_Body Right_Low_1mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 35.555$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (81x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.267 W/kg

Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 2.086 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.024 W/kg
Maximum value of SAR (measured) = 0.257 W/kg

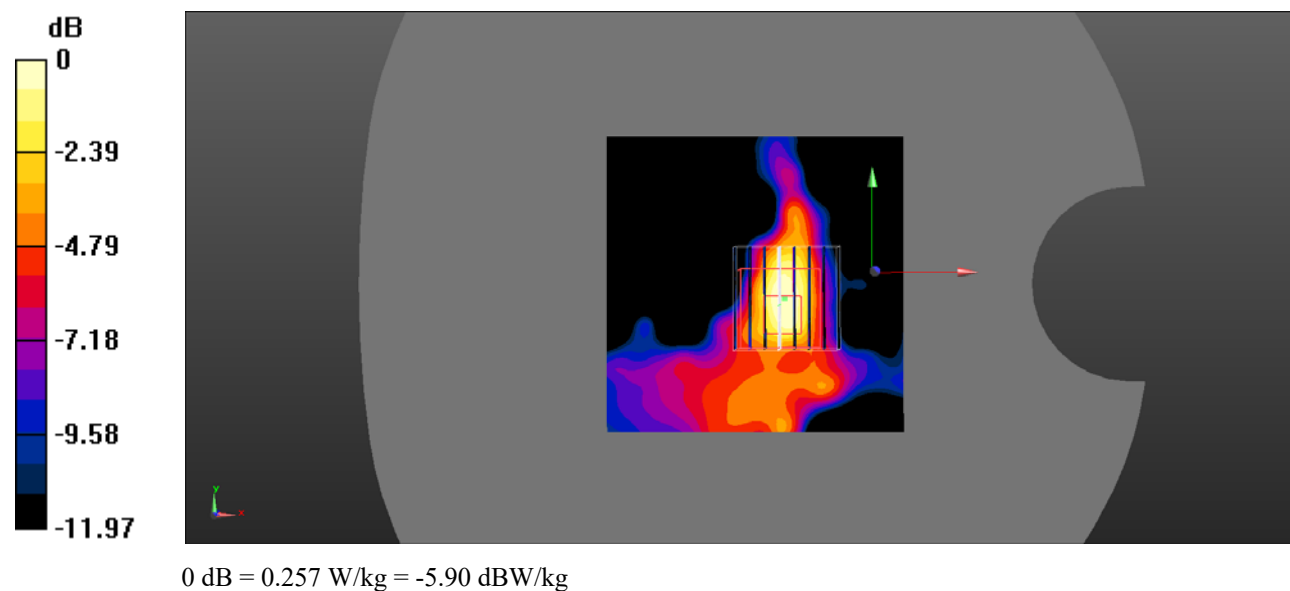

Test Plot 219#: 5.8G Wifi_Body Top_Low_14mm**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S_BI5;**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 35.555$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.195 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 3.959 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.233 W/kg
SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.083 W/kg
Maximum value of SAR (measured) = 0.209 W/kg

