FCC Test Report

Report No.: AGC06352160301FE08

FCC ID : 2ADJEHXI6150CT

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Hisign Handheld Multi-biometric Device

BRAND NAME : Hisign MBioCheck

MODEL NAME : HX-I6150CT

CLIENT : Beijing Hisign Technology Co., Ltd.

DATE OF ISSUE: Mar.29, 2016

STANDARD(S) FCC Part 15.247

TEST PROCEDURE(S) KDB 558074 v03r02

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 43

Report Revise Record

Report Vers	sion	Revise Time	Issued Date	Valid Version	Notes
V1.0		/	Mar.29, 2016	Valid	Original Report

TABLE OF CONTENTS

	. VERIFICATION OF COMPLIANCE	
2.	GENERAL INFORMATION2.1PRODUCT DESCRIPTION	
	2.2 RELATED SUBMITTAL(S)/GRANT(S)	
	2.3TEST METHODOLOGY	
	2.4 TEST FACILITY	
	2.5 SPECIAL ACCESSORIES	
	2.6 EQUIPMENT MODIFICATIONS	
2	. SYSTEM TEST CONFIGURATION	
ა.	3.1 CONFIGURATION OF TESTED SYSTEM	
	3.2 EQUIPMENT USED IN TESTED SYSTEM	7
	. SUMMARY OF TEST RESULTS	
	. DESCRIPTION OF TEST MODES	
0.	6.1. STANDARD APPLICABLE	
	6.2. TEST RESULT	10
7.	. RADIATED EMISSION	
	7.1 MEASUREMENT PROCEDURE	
	7.2 TEST SETUP	
	7.3 LIMITS AND MEASUREMENT RESULT	
	7.4 TEST RESULT	
8.	. BAND EDGE EMISSION	
	8.1. MEASUREMENT PROCEDURE	
	8.3. RADIATED TEST RUSULT	
	8.4. CONDUCTED TEST RESULT	
•		
9.	. 6DB BANDWIDTH 9.1. TEST EQUIPMENT LIST AND DETAILS	25
	9.2. TEST PROCEDURE	
	9.3. SUMMARY OF TEST RESULTS/PLOTS	25
10	0. CONDUCTED OUTPUT POWER	27
	10.1. MEASUREMENT PROCEDURE	27
	10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	27
	10.3. LIMITS AND MEASUREMENT RESULT	
11	1. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	30
	LI LIVII ANDREIVENTENTENTENTENTE	311

Page 4 of 43

	PENDIX B: PHOTOGRAPHS OF EUT	
APP	PENDIX A: PHOTOGRAPHS OF TEST SETUP	37
1	12.5 TEST RESULT OF POWER LINE	34
	12.4 FINAL TEST PROCEDURE	
1	12.3 PRELIMINARY PROCEDURE	33
1	12.2 TEST SETUP	33
12. 1	12.1 LIMITS	33
12 [FCC LINE CONDUCTED EMISSION TEST	33
1	11.4 LIMITS AND MEASUREMENT RESULT	30
1	11.3 MEASUREMENT EQUIPMENT USED	30
1	11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30

Page 5 of 43

1. VERIFICATION OF COMPLIANCE

11 12111110111011	=:: (1.0 =
Applicant	Beijing Hisign Technology Co., Ltd.
Address	2F-6F, Tower4, Hanwei International Square, Area4, No.186, West Road, 4th South Ring Road, Fengtai District, Beijing
Manufacturer	Beijing Hisign Technology Co., Ltd.
Address	2F-6F, Tower4, Hanwei International Square, Area4, No.186, West Road, 4th South Ring Road, Fengtai District, Beijing
Product Designation	Hisign Handheld Multi-biometric Device
Brand Name	Hisign MBioCheck
Test Model	HX-I6150CT
Date of test	Mar.14, 2016 to Mar.28, 2016
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BLE/RF

WE HEREBY CERTIFY THAT:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Tested By	Dota Zhang	
	Dota Zhang(Zhang Jianfeng)	Mar.29, 2016
Reviewed By	Bore xie	
	Bart Xie(Xie Xiaobin)	Mar.29, 2016
Approved By	Solya Zhong	
	Solger Zhang(Zhang Hongyi) Authorized Officer	Mar.29, 2016

Page 6 of 43

2.GENERAL INFORMATION 2.1PRODUCT DESCRIPTION

The EUT is designed as "Hisign Handheld Multi-biometric Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
Bluetooth Version	V4.0
Modulation	GFSK
Number of channels	40 Channel(37 Hopping Channel,3 advertising Channel)
Antenna Designation	Integrated Antenna
Antenna Gain	0.5dBi
Hardware Version	P60-MB-V3.0
Software Version	P60-S00C_HISGEN_V23_160106
Power Supply	DC3.7V by Built-in Li-ion Battery

2.2 RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2ADJEHXI6150CT** filing to comply with Section 15.247of the FCC Part 15, Subpart C Rules.

2.3TEST METHODOLOGY

All measurements contained in this report were conducted with KDB 558074 D01 DTS Meas Guidance v03r02, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

2.4 TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013.

2.5 SPECIAL ACCESSORIES

Refer to section 2.2.

2.6 EQUIPMENT MODIFICATIONS


Not available for this EUT intended for grant.

Page 7 of 43

3. SYSTEM TEST CONFIGURATION

3.1 CONFIGURATION OF TESTED SYSTEM

Configuration:



3.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Note
1	Mobile Phone	HX-I6150CT	FCC ID: 2ADJEHXI6150CT	EUT
2	Adapter	8395-UW01-1070	DC5.3V, 2000mA	Accessory
3	Battery	P125656-4600mAh	DC3.7V/ 4600 mAh	Accessory
4	Earphone	N/A	N/A	Accessory
5	USB Cable	N/A	N/A	Accessory

ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016	
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016	
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016	
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016	
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A	
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016	
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016	
Power Probe	R&S	NRP-Z23	100323	July 25,2015	July 24,2016	
RF attenuator	N/A	RFA20db	68	N/A	N/A	

Report No.: AGC06352160301FE08 Page 8 of 43

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016	
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016	
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016	
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016	
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016	
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A	
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016	
Power Probe	R&S	NRP-Z23	100323	July 25,2015	July 24,2016	
RF attenuator	N/A	RFA20db	68	N/A	N/A	

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016

Page 9 of 43

4. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203	Antenna Requirement	Compliant
§15.209 §15.247(d)	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247(b)	Conducted Power	Compliant
§15.247(e)	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.207	Line Conduction Emission	Compliant

5. DESCRIPTION OF TEST MODES

The EUT has been operated in three modulations: GFSK independently.

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal Operating (BT)

Note:

- 1. All the test modes can be supply by Built-in Li-ion battery, only the result of the worst case was recorded in the report if no any records.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. Eut is operating at its maximum duty cycle>or equal 98%

Page 10 of 43

6. ANTENNA REQUIREMENT

6.1. STANDARD APPLICABLE

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

6.2. TEST RESULT

This product has a permanent antenna, fulfill the requirement of this section.

Page 11 of 43

7. RADIATED EMISSION

7.1 MEASUREMENT PROCEDURE


 Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.


Page 12 of 43

7.2 TEST SETUP

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

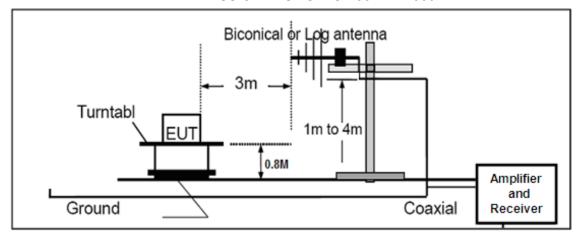

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

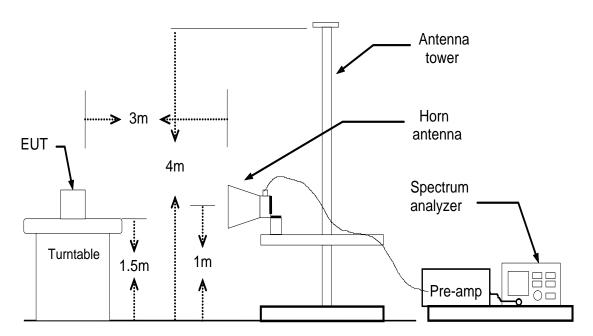

Page 13 of 43

7.3 LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

7.4 TEST RESULT

RADIATED EMISSION BELOW 30MHZ


No emission found between lowest internal used/generated frequencies to 30MHz.

Page 14 of 43

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

Page 15 of 43

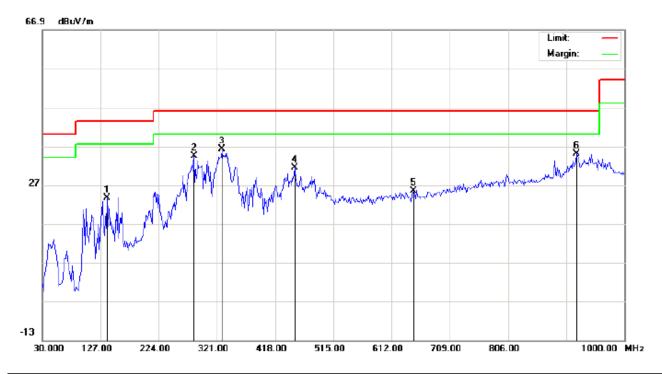

Site: site #1 Polarization: Horizontal Temperature: 23.2 Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.5 %

EUT: Hisign Biometric Mobile Device Distance: 3m


M/N: HX-I6150CT Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu√/m	dBu∀/m	dB		cm	degree	
1		138.3167	9.18	14.41	23.59	43.50	-19.91	peak			
2		282.2000	22.11	12.38	34.49	46.00	-11.51	peak			
3	*	329.0833	18.83	17.35	36.18	46.00	-9.82	peak			
4		450.3333	10.73	20.59	31.32	46.00	-14.68	peak			
5		649.1833	1.54	23.85	25.39	46.00	-20.61	peak			
6		920.7833	5.78	29.19	34.97	46.00	-11.03	peak			

Page 16 of 43

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

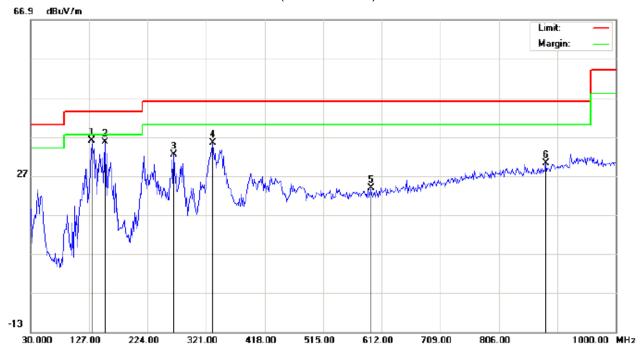

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Hisign Biometric Mobile Device

M/N: HX-I6150CT Mode: Low Channel TX

Note:

Polarization: Vertical Temperature: 23.2
Power: AC 120V/60Hz Humidity: 55.5 %

Distance: 3m


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	131.8500	24.26	11.80	36.06	43.50	-7.44	peak			
2		152.8667	20.26	15.28	35.54	43.50	-7.96	peak			
3		267.6500	18.02	14.43	32.45	46.00	-13.55	peak			
4		332.3167	17.88	17.56	35.44	46.00	-10.56	peak			
5		594.2167	1.18	22.70	23.88	46.00	-22.12	peak			
6		883.6000	2.07	28.18	30.25	46.00	-15.75	peak			

Temperature: 23.2

Humidity: 55.5 %

Page 17 of 43

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

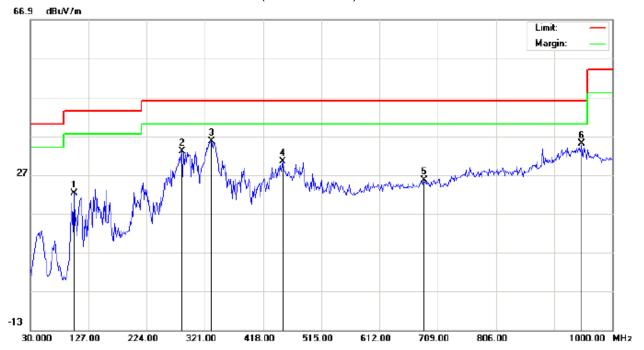

Site: site #1 Polarization: Horizontal
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz

EUT: Hisign Biometric Mobile Device Distance: 3m


M/N: HX-I6150CT Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		102.7500	12.30	9.84	22.14	43.50	-21.36	peak			
2		282.2000	20.70	12.38	33.08	46.00	-12.92	peak			
3	*	332.3167	18.05	17.56	35.61	46.00	-10.39	peak			
4		450.3333	9.72	20.59	30.31	46.00	-15.69	peak			
5		686.3667	0.80	24.82	25.62	46.00	-20.38	peak			
6		948.2667	5.15	29.95	35.10	46.00	-10.90	peak			

Page 18 of 43

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

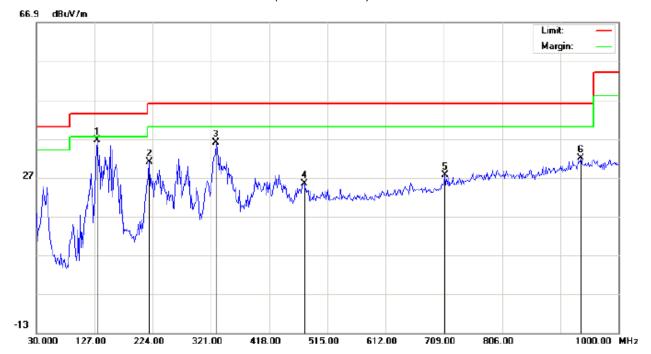

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Hisign Biometric Mobile Device

M/N: HX-I6150CT

Mode: Middle Channel TX

Note:


Polarization: Vertical Temperature: 23.2
Power: AC 120V/60Hz Humidity: 55.5 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	131.8500	24.78	11.80	36.58	43.50	-6.92	peak			
2		217.5333	20.26	10.72	30.98	46.00	-15.02	peak			
3		329.0833	18.59	17.35	35.94	46.00	-10.06	peak			
4		476.2000	4.56	20.87	25.43	46.00	-20.57	peak			
5		710.6167	2.15	25.50	27.65	46.00	-18.35	peak			
6		936.9500	2.37	29.64	32.01	46.00	-13.99	peak			

Page 19 of 43

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

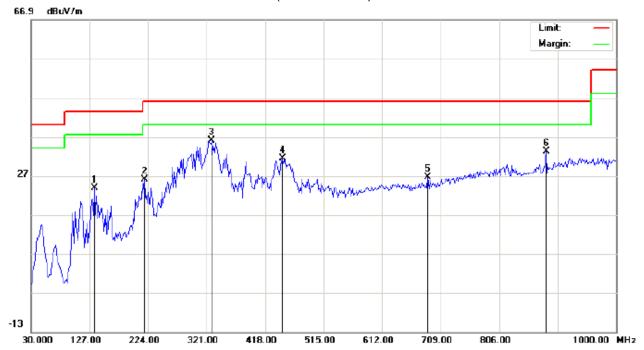

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Hisign Biometric Mobile Device

M/N: HX-I6150CT

Mode: High Channel TX

Note:

Polarization: Horizontal Temperature: 23.2
Power: AC 120V/60Hz Humidity: 55.5 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		135.0833	10.91	12.90	23.81	43.50	-19.69	peak			
2		217.5333	15.71	10.21	25.92	46.00	-20.08	peak			
3	*	329.0833	18.57	17.35	35.92	46.00	-10.08	peak			
4		447.1000	10.96	20.50	31.46	46.00	-14.54	peak			
5		687.9833	1.78	24.87	26.65	46.00	-19.35	peak		·	
6		883.6000	4.94	28.18	33.12	46.00	-12.88	peak			

Page 20 of 43

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL



Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Hisign Biometric Mobile Device

M/N: HX-I6150CT Mode: High Channel TX

Note:

Polarization: Vertical Temperature: 23.2
Power: AC 120V/60Hz Humidity: 55.5 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	149.6333	21.98	15.26	37.24	43.50	-6.26	peak			
2		217.5333	19.94	10.72	30.66	46.00	-15.34	peak			
3		327.4667	15.96	17.24	33.20	46.00	-12.80	peak			
4		447.1000	9.68	20.50	30.18	46.00	-15.82	peak			
5		652.4167	1.02	23.91	24.93	46.00	-21.07	peak			
6		914.3167	0.99	29.01	30.00	46.00	-16.00	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 21 of 43

RADIATED EMISSION ABOVE 1GHZ

		(,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	ED EINIGGION /	NO TE IC			
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type	
		L	ow Channel (240	2 MHz)			
4804	43.19	10.44	53.63	74	-20.37	Pk	Horizontal
4804	32.62	10.44	43.06	54	-10.94	AV	Horizontal
7206	41.43	12.39	53.82	74	-20.18	pk	Horizontal
7206	31.28	12.39	43.67	54	-10.33	AV	Horizontal
4804	41.36	10.4	51.76	74	-22.24	Pk	Vertical
4804	29.15	10.4	39.55	54	-14.45	AV	Vertical
7206	31.42	12.75	44.17	74	-29.83	Pk	Vertical
7206	25.17	12.75	37.92	54	-16.08	AV	Vertical
		I	Mid Channel (2440	MHz)			
4880	43.16	10.4	53.56	74	-20.44	Pk	Horizontal
4880	32.52	10.4	42.92	54	-11.08	AV	Horizontal
7320	41.37	12.75	54.12	74	-19.88	Pk	Horizontal
7320	32.19	12.75	44.94	54	-9.06	AV	Horizontal
4880	45.28	10.39	55.67	74	-18.33	Pk	Vertical
4880	32.63	10.44	43.07	54	-10.93	AV	Vertical
7320	32.58	12.68	45.26	74	-28.74	Pk	Vertical
7320	32.41	12.68	45.09	54	-8.91	AV	Vertical
		F	ligh Channel (248	0 MHz)			
4960	36.32	10.39	46.71	74	-27.29	pk	Horizontal
4960	25.27	10.39	35.66	54	-18.34	AV	Horizontal
7440	42.53	12.68	55.21	74	-18.79	pk	Horizontal
7440	31.72	12.68	44.4	54	-9.6	AV	Horizontal
4960	36.12	10.39	46.51	74	-27.49	pk	Vertical
4960	34.37	10.39	44.76	54	-9.24	AV	Vertical
7440	44.18	12.68	56.86	74	-17.14	pk	Vertical
7440	25.25	12.68	37.93	54	-16.07	AV	Vertical

RESULT: PASS

Note: 1~25GHz scan with GFSK. No recording in the test report at least have 20dB margin.

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission - Leve Limit

Page 22 of 43

8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

1)Radiated restricted band edge measurements


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

- 2)Conducted Emissions at the bang edge
 - a)The transmitter output was connected to the spectrum analyzer
 - b)Set RBW=100kHz,VBW=300kHz
 - c)Suitable frequency span including 100kHz bandwidth from band edge

8.2. TEST SET-UP

Radiated same as 6.2

Conducted set up



Page 23 of 43

8.3. Radiated Test Result

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	
			Low Channe	l (2402 MHz)			
2399.9	78.42	-13	65.42	74	-8.58	peak	Horizontal
2399.9	59.31	-13	46.31	54	-7.69	AVG	Horizontal
2400	79.12	-12.99	66.13	74	-7.87	peak	Horizontal
2400	58.67	-12.99	45.68	54	-8.32	AVG	Horizontal
2399.9	79.52	-12.97	66.55	74	-7.45	peak	Vertical
2399.9	59.44	-12.97	46.47	54	-7.53	AVG	Vertical
2400	79.18	-12.94	66.24	74	-7.76	peak	Vertical
2400	59.51	-12.94	46.57	54	-7.43	AVG	Vertical
			High Channe	l (2480 MHz)			
2483.5	78.23	-12.78	65.45	74	-8.55	peak	Horizontal
2483.5	58.75	-12.78	45.97	54	-8.03	AVG	Horizontal
2483.6	78.12	-12.77	65.35	74	-8.65	peak	Horizontal
2483.6	58.69	-12.77	45.92	54	-8.08	AVG	Horizontal
2483.5	79.52	-12.76	66.76	74	-7.24	peak	Vertical
2483.5	57.47	-12.76	44.71	54	-9.29	AVG	Vertical
2483.6	78.36	-12.72	65.64	74	-8.36	peak	Vertical
2483.6	58.58	-12.72	45.86	54	-8.14	AVG	Vertical

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain,

Emission Level = Meter Reading + Factor

Margin= Emission Level -Limit.


The "Factor" value can be calculated automatically by software of measurement system.

Page 24 of 43

8.4. Conducted Test Result

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	-4.53	-61.549	-24.53	PASS
BLE	HCH	-3.27	-60.448	-23.27	PASS

Test Graph

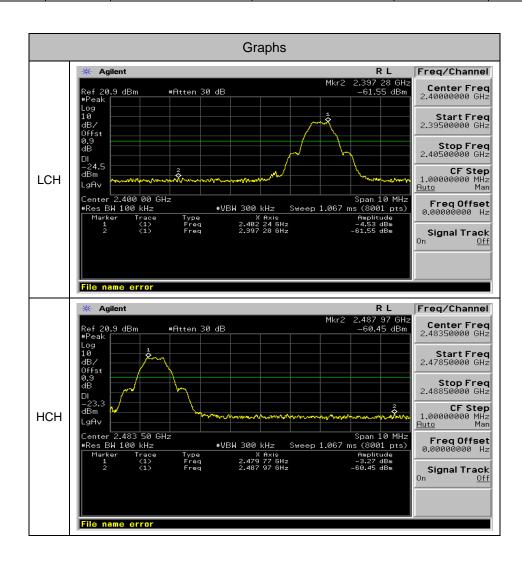

Page 25 of 43

9. 6DB BANDWIDTH

9.1. TEST EQUIPMENT LIST AND DETAILS

Equipment	Manufacturer	Model	Cal. Date	Cal. Due
PSA SERIES SPECTRUM ANALYZER	AGILENT	E4440A	02/17/2015	02/16/2016
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	08/16/2014	08/15/2015


9.2. TEST PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW≥RBW.
- 4. Set SPA Trace 1 Max hold, then View.

9.3. SUMMARY OF TEST RESULTS/PLOTS

Mode	Channel	6dB Bandwidth [MHz]	OBW[MHz]	Verdict
BLE	LCH	0.6679	1.0259	PASS
BLE	MCH	0.6779	1.0248	PASS
BLE	HCH	0.6807	1.0291	PASS

Test Graph

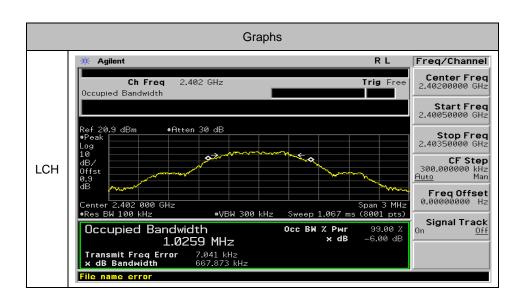

Page 26 of 43



Page 27 of 43

10. CONDUCTED OUTPUT POWER

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. Use the following spectrum analyzer settings:

Set the RBW ≥ DTS bandwidth

Set the VBW \geq 3 x RBW

Set the span \geq 3 x RBW

Detector = peak


Sweep time = auto couple

Trace mode = max hold

- 4. Allow the trace to stabilize. Use peak marker function to determine the peak amplitude level
- 5. Record the result form the Spectrum Analyzer.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

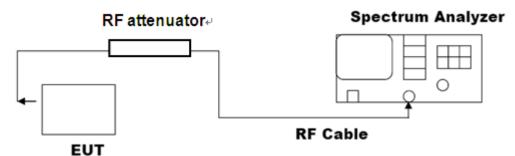


10.3. LIMITS AND MEASUREMENT RESULT


Channel	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail
Low Channel	-4.60	20	Pass
Middle Channel	-3.90	20	Pass
High Channel	-3.30	20	Pass

Page 28 of 43


The Low Channel Result

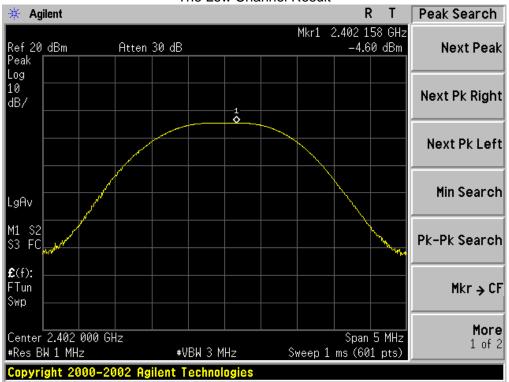

The Middle Channel Result

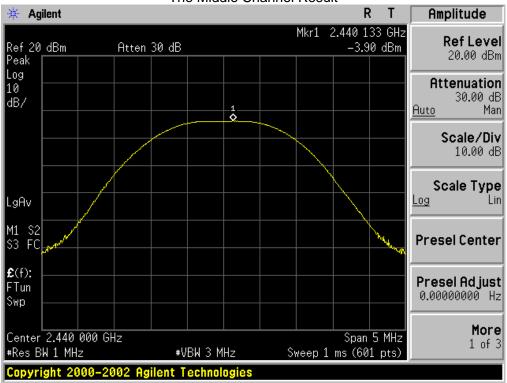

Page 29 of 43

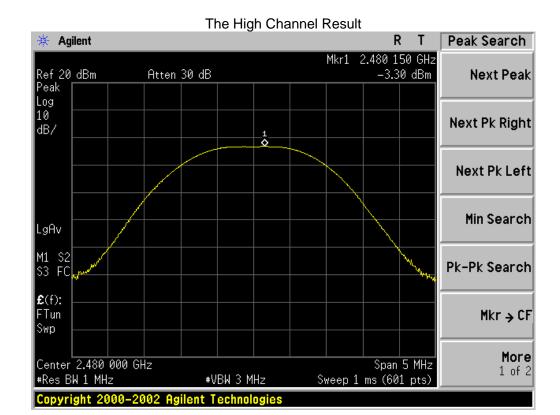


Page 30 of 43

11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY 11.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

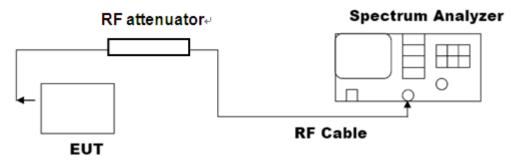

11.3 MEASUREMENT EQUIPMENT USED


Equipment	Manufacturer	Model	Cal. Date	Cal. Due
PSA SERIES SPECTRUM ANALYZER	AGILENT	E4440A	02/17/2015	02/16/2016
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	08/16/2014	08/15/2015

11.4 LIMITS AND MEASUREMENT RESULT


Mode	Channel	PSD [dBm/20kHz]	Limit[dBm/3kHz]	Verdict
BLE	LCH	-6.73	8	PASS
BLE	MCH	-6.59	8	PASS
BLE	HCH	-7.18	8	PASS

Page 31 of 43

Test Graph

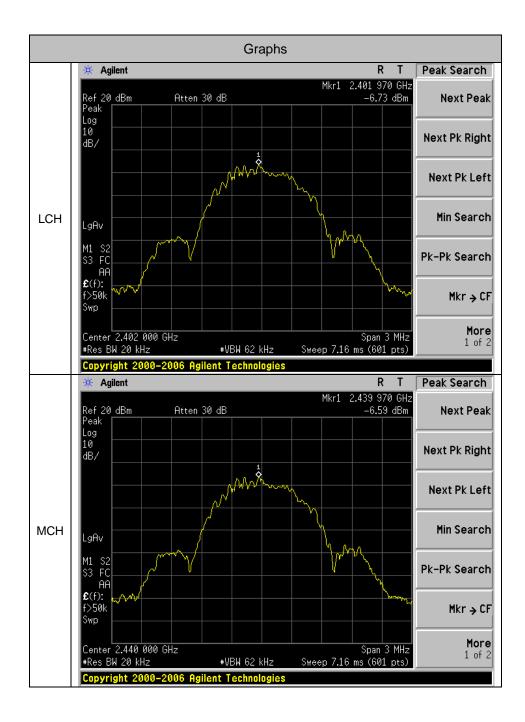

Page 32 of 43

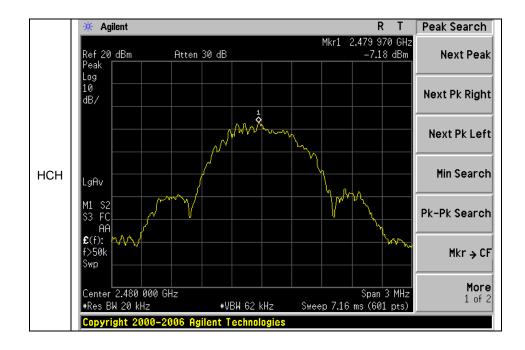

Page 33 of 43


12. FCC LINE CONDUCTED EMISSION TEST

12.1 LIMITS

Francis	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

^{**}Note: 1. The lower limit shall apply at the transition frequency.

12.2 TEST SETUP

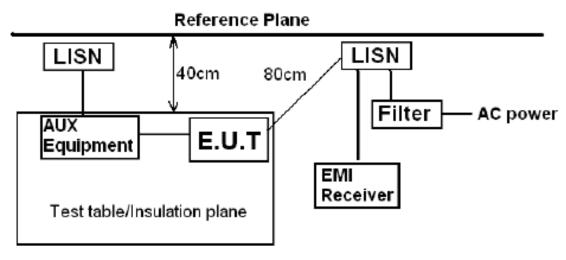

Remark

E.U.T: Equipment Under Test

LISM: Line Impedence Stabilization Network

Test table height=0.8m

12.3 PRELIMINARY PROCEDURE

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.10.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by adapter which received power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 34 of 43

spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.

- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- The following test mode(s) were scanned during the preliminary test.
 Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4 FINAL TEST PROCEDURE

- 10) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 11) 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 12) 3) The test data of the worst case condition(s) was reported on the Summary Data page.

12.5 TEST RESULT OF POWER LINE

Line Conducted Emission Test Line 1-L

Page 35 of 43

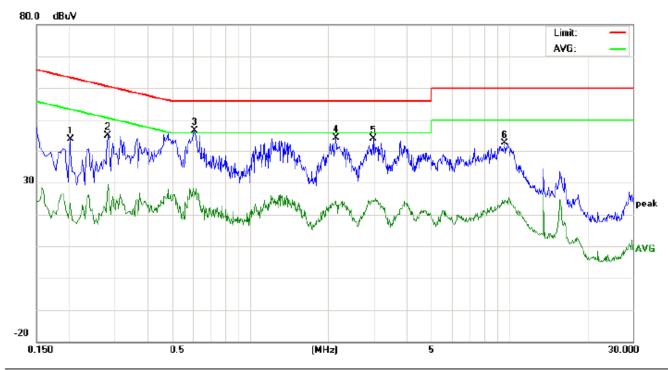

Site: Conduction Phase: L1 Temperature: 22.5
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 54.8 %

EUT: Hisign Biometric Mobile Device

M/N: HX-I6150CT


Mode: Normal Operation(BT4.0)

Note:

No.	Freq.	Rea	ding_L (dBuV)		Correct Factor	Me	asuren (dBuV)			nit uV)		rgin IB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2020	33.74		13.36	10.22	43.96		23.58	63.52	53.52	-19.56	-29.94	Р	
2	0.2819	34.77		19.22	10.28	45.05		29.50	60.76	50.76	-15.71	-21.26	Р	
3	0.6100	36.29		15.30	10.31	46.60		25.61	56.00	46.00	-9.40	-20.39	Р	
4	2.1500	34.02		13.74	10.28	44.30		24.02	56.00	46.00	-11.70	-21.98	Р	
5	2.9980	33.58		13.67	10.55	44.13		24.22	56.00	46.00	-11.87	-21.78	Р	
6	9.6100	32.37		13.49	10.32	42.69		23.81	60.00	50.00	-17.31	-26.19	Р	

Page 36 of 43

Line Conducted Emission Test Line 1-N

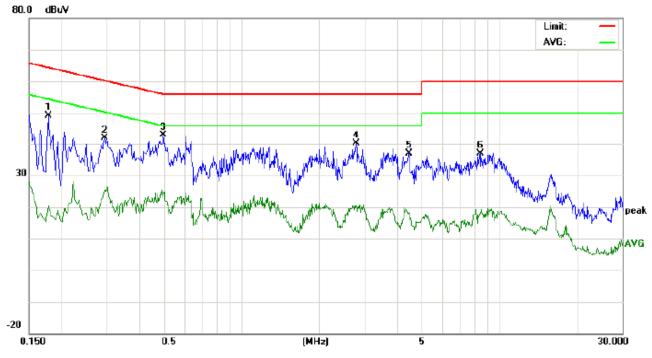

Site: Conduction Phase: N Temperature: 22.5
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 54.8 %

EUT: Hisign Biometric Mobile Device

M/N: HX-I6150CT

Mode: Normal Operation(BT4.0)


Note:

No.	Freq.				Correct Factor		asuren (dBuV)		1	nit uV)	Mai (d	rgin IB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1780	38.84		10.17	10.19	49.03		20.36	64.57	54.57	-15.54	-34.21	Р	
2	0.2940	31.48		15.13	10.29	41.77		25.42	60.41	50.41	-18.64	-24.99	Р	
3	0.4980	32.55		13.88	10.40	42.95		24.28	56.03	46.03	-13.08	-21.75	Р	
4	2.7820	29.65		9.78	10.50	40.15		20.28	56.00	46.00	-15.85	-25.72	Р	
5	4.4699	26.62		8.27	10.22	36.84		18.49	56.00	46.00	-19.16	-27.51	Р	
6	8.4220	26.65		8.13	10.34	36.99		18.47	60.00	50.00	-23.01	-31.53	Р	


Page 37 of 43

APPENDIX A: PHOTOGRAPHS OF TEST SETUP



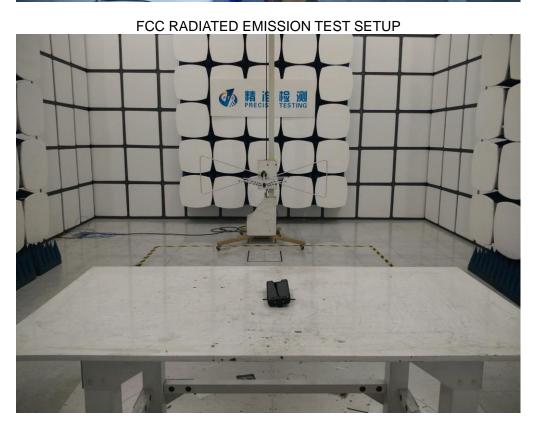

Report No.: AGC06352160301FE08 Page 38 of 43

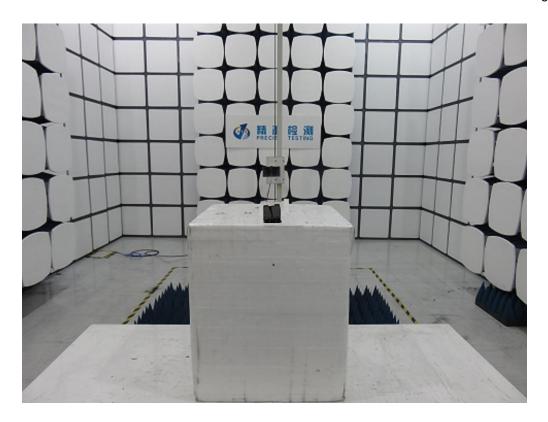

Page 39 of 43

APPENDIX B: PHOTOGRAPHS OF EUT





Page 40 of 43







Page 41 of 43









Page 42 of 43











Page 43 of 43

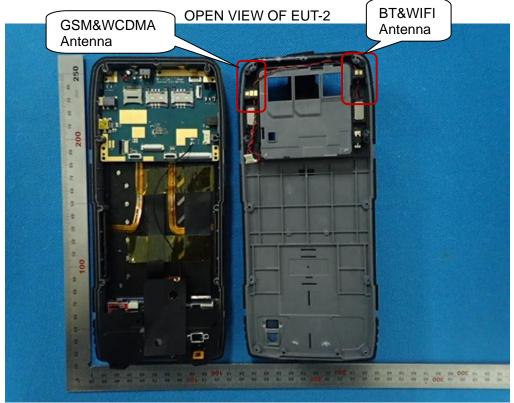




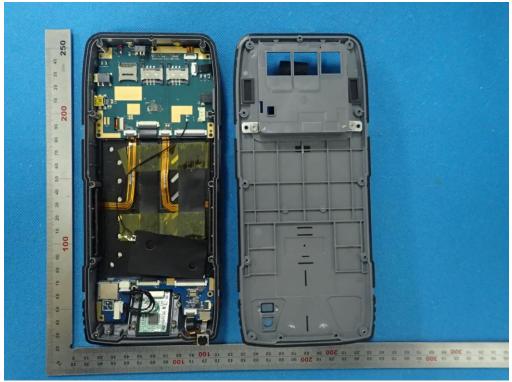


Page 44 of 43

OPEN VIEW OF EUT-4



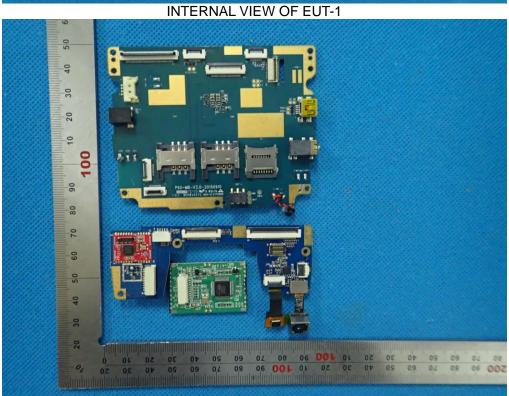

Page 45 of 43

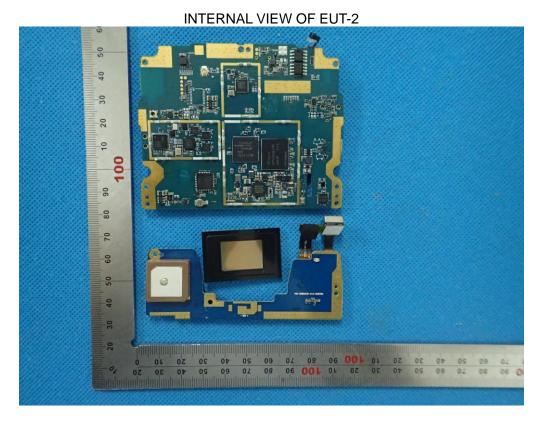

----END OF REPORT----