

|                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                            |                                                                             |                                                                     |                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------|------------------------------------------|
| <b>Prüfbericht-Nr.:</b><br>Test report no.:                                                                                                                                                                                                                                                                                                                                                                                                  | CN22Y44Q(P15C-BT) 001                                                                                      | <b>Auftrags-Nr.:</b><br>Order no.:                                          | 238540797                                                           | Seite 1 von 30<br>Page 1 of 30           |
| <b>Kunden-Referenz-Nr.:</b><br>Client reference no.:                                                                                                                                                                                                                                                                                                                                                                                         | N/A                                                                                                        | <b>Auftragsdatum:</b><br>Order date:                                        | 2022-03-10                                                          |                                          |
| <b>Auftraggeber:</b><br>Client:                                                                                                                                                                                                                                                                                                                                                                                                              | Zeroplus Technology Corporation<br>3F, No.121, Jian 8th Rd, Chung Ho District New Taipei City, 235, Taiwan |                                                                             |                                                                     |                                          |
| <b>Prüfgegenstand:</b><br>Test item:                                                                                                                                                                                                                                                                                                                                                                                                         | BROOK Wingman PS2 Converter                                                                                |                                                                             |                                                                     |                                          |
| <b>Bezeichnung / Typ-Nr.:</b><br>Identification / Type no.:                                                                                                                                                                                                                                                                                                                                                                                  | ZPP0062                                                                                                    |                                                                             |                                                                     |                                          |
| <b>Auftrags-Inhalt:</b><br>Order content:                                                                                                                                                                                                                                                                                                                                                                                                    | FCC Part 15C Test report (BT)                                                                              |                                                                             |                                                                     |                                          |
| <b>Prüfgrundlage:</b><br>Test specification:                                                                                                                                                                                                                                                                                                                                                                                                 | FCC 47CFR Part 15: Subpart C Section 15.247                                                                |                                                                             |                                                                     |                                          |
| <b>Wareneingangsdatum:</b><br>Date of sample receipt:                                                                                                                                                                                                                                                                                                                                                                                        | 2022-03-18                                                                                                 |                                                                             |                                                                     |                                          |
| <b>Prüfmuster-Nr.:</b><br>Test sample no:                                                                                                                                                                                                                                                                                                                                                                                                    | A003229211-012<br>A003229211-010                                                                           |                                                                             |                                                                     |                                          |
| <b>Prüfzeitraum:</b><br>Testing period:                                                                                                                                                                                                                                                                                                                                                                                                      | 2022-04-13 - 2022-05-07                                                                                    |                                                                             |                                                                     |                                          |
| <b>Ort der Prüfung:</b><br>Place of testing:                                                                                                                                                                                                                                                                                                                                                                                                 | EMC/RF Taipei Testing Site                                                                                 |                                                                             |                                                                     |                                          |
| <b>Prüflaboratorium:</b><br>Testing laboratory:                                                                                                                                                                                                                                                                                                                                                                                              | Taipei Testing Laboratories                                                                                |                                                                             |                                                                     |                                          |
| <b>Prüfergebnis*:</b><br>Test result*:                                                                                                                                                                                                                                                                                                                                                                                                       | Pass                                                                                                       |                                                                             |                                                                     |                                          |
| <b>zusammengestellt von:</b><br>compiled by:                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                            |                                                                             | <b>genehmigt von:</b><br>authorized by:                             |                                          |
| <b>Datum:</b><br>Date:                                                                                                                                                                                                                                                                                                                                                                                                                       | 2022-05-12                                                                                                 | <b>Ausstellungsdatum:</b><br>Issue date:                                    | 2022-05-12                                                          |                                          |
| <b>Stellung / Position:</b>                                                                                                                                                                                                                                                                                                                                                                                                                  | Senior Project Manager                                                                                     | <b>Stellung / Position:</b>                                                 | Senior Project Manager                                              |                                          |
| <b>Sonstiges / Other:</b>                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                            |                                                                             |                                                                     |                                          |
| <b>Zustand des Prüfgegenstandes bei Anlieferung:</b><br>Condition of the test item at delivery:                                                                                                                                                                                                                                                                                                                                              |                                                                                                            | Prüfmuster vollständig und unbeschädigt<br>Test item complete and undamaged |                                                                     |                                          |
| * Legende:                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1 = sehr gut<br>P(ass) = entspricht o.g. Prüfgrundlage(n)                                                  | 2 = gut<br>F(ail) = entspricht nicht o.g. Prüfgrundlage(n)                  | 3 = befriedigend<br>F(ail) = entspricht nicht o.g. Prüfgrundlage(n) | 4 = ausreichend<br>N/A = nicht anwendbar |
| * Legend:                                                                                                                                                                                                                                                                                                                                                                                                                                    | 1 = very good<br>P(ass) = passed a.m. test specification(s)                                                | 2 = good<br>F(ail) = failed a.m. test specification(s)                      | 3 = satisfactory<br>F(ail) = failed a.m. test specification(s)      | 4 = sufficient<br>N/A = not applicable   |
| 5 = mangelhaft<br>N/T = nicht getestet                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                            |                                                                             |                                                                     |                                          |
| 5 = poor<br>N/T = not tested                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                            |                                                                             |                                                                     |                                          |
| Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.<br>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark. |                                                                                                            |                                                                             |                                                                     |                                          |

## TEST SUMMARY

| Report Section | FCC Clause                  | Test Item                                  | Result |
|----------------|-----------------------------|--------------------------------------------|--------|
| 5.1.1          | 15.247(b) & 15.203          | Antenna Requirement                        | Pass   |
| 5.1.2          | 15.247(b)(1)                | Peak Output Power                          | Pass   |
| 5.1.3          | 15.247(a)(1)                | 20 dB Bandwidth                            | Pass   |
| 5.1.3          | 2.1049                      | 99% Occupied Bandwidth                     | Pass   |
| 5.1.4          | 15.247(d)                   | Conducted Spurious Emission and Band Edges | Pass   |
| 5.1.5          | 15.247(d) & 15.205 & 15.209 | Radiated Spurious Emissions and Band Edges | Pass   |
| 5.1.6          | 15.247(a)(1)                | Hopping Channel Separation                 | Pass   |
| 5.1.7          | 15.247(a)(1) (iii)          | Number of Hopping Frequency Used           | Pass   |
| 5.1.8          | 15.247(a)(1) (iii)          | Dwell Time on Each Channel                 | Pass   |
| 5.2.1          | 15.207                      | Mains Conducted Emission                   | Pass   |

**Note:**

1. If the Frequency Hopping Systems operating in 2400-2483.5 MHz band and the output power less than 125 mW. The hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of hopping channel whichever is greater.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## Contents

|                                                                                                  |           |
|--------------------------------------------------------------------------------------------------|-----------|
| <b>HISTORY OF THIS TEST REPORT .....</b>                                                         | <b>5</b>  |
| <b>1. GENERAL REMARKS .....</b>                                                                  | <b>6</b>  |
| 1.1 COMPLEMENTARY MATERIALS.....                                                                 | 6         |
| 1.2 DECISION RULE OF CONFORMITY .....                                                            | 6         |
| <b>2. TEST SITES .....</b>                                                                       | <b>7</b>  |
| 2.1 TEST LABORATORY .....                                                                        | 7         |
| 2.2 TEST FACILITY.....                                                                           | 7         |
| 2.3 TRACEABILITY .....                                                                           | 8         |
| 2.4 CALIBRATION .....                                                                            | 8         |
| 2.5 MEASUREMENT UNCERTAINTY .....                                                                | 8         |
| <b>3. GENERAL PRODUCT INFORMATION.....</b>                                                       | <b>9</b>  |
| 3.1 PRODUCT FUNCTION AND INTENDED USE .....                                                      | 9         |
| 3.2 SYSTEM DETAILS AND RATINGS.....                                                              | 9         |
| 3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS .....                                           | 10        |
| 3.4 SUBMITTED DOCUMENTS.....                                                                     | 10        |
| <b>4. TEST SET-UP AND OPERATION MODES.....</b>                                                   | <b>11</b> |
| 4.1 PRINCIPLE OF CONFIGURATION SELECTION .....                                                   | 11        |
| 4.2 CARRIER FREQUENCY AND CHANNEL.....                                                           | 11        |
| 4.3 TEST OPERATION AND TEST SOFTWARE.....                                                        | 12        |
| 4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....                                            | 13        |
| 4.5 TEST SETUP DIAGRAM .....                                                                     | 14        |
| <b>5. TEST RESULTS .....</b>                                                                     | <b>15</b> |
| <b>5.1 TRANSMITTER REQUIREMENT &amp; TEST SUITES.....</b>                                        | <b>15</b> |
| 5.1.1 Antenna Requirement .....                                                                  | 15        |
| 5.1.2 Peak Output Power .....                                                                    | 16        |
| 5.1.3 20 dB Bandwidth and 99% Occupied Bandwidth.....                                            | 19        |
| 5.1.4 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz<br>Bandwidth..... | 20        |
| 5.1.5 Radiated Spurious Emissions and Band Edges .....                                           | 21        |
| 5.1.6 Hopping Channel Separation .....                                                           | 26        |
| 5.1.7 Number of Hopping Frequency.....                                                           | 27        |
| 5.1.8 Dwell Time.....                                                                            | 28        |
| <b>5.2 MAINS EMISSION .....</b>                                                                  | <b>29</b> |
| 5.2.1 Mains Conducted Emission.....                                                              | 29        |

**Prüfbericht - Nr.: CN22Y44Q(P15C-BT) 001**  
Test Report No.

**Seite 4 von 30**  
Page 4 of 30

**APPENDIX A - TEST RESULT OF CONDUCTED**

**APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION**

**APPENDIX SP - PHOTOGRAPHS TEST SETUP**

**APPENDIX EP - PHOTOGRAPHS OF EUT**

**Prüfbericht - Nr.: CN22Y44Q(P15C-BT) 001**  
Test Report No.

**Seite 5 von 30**  
Page 5 of 30

## HISTORY OF THIS TEST REPORT

| Report No.            | Description      | Date Issued |
|-----------------------|------------------|-------------|
| CN22Y44Q(P15C-BT) 001 | Original Release | 2022-05-12  |

## 1. General Remarks

### 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

**Appendix A - Test Result of Conducted**

**Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission**

**Appendix SP - Photographs Test Setup**

**Appendix EP - Photographs of EUT**

### Applied Standard and Test Levels

| Radio                                       |
|---------------------------------------------|
| FCC 47CFR Part 15: Subpart C Section 15.247 |
| FCC 47CFR Part 2: Subpart J Section 2.1049  |
| ANSI C63.10:2013                            |
| KDB 558074 D01 15.247 Meas Guidance v05r02  |

### 1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

## 2. Test Sites

### 2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.  
Taipei City 105  
Taiwan (R.O.C.)

### 2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,  
New Taipei City 244  
Taiwan (R.O.C.)  
FCC Registration No.: 226631  
ISED Registration No.: 25563

## 2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95% level of confidence.

### Emission Measurement Uncertainty

| Parameter                            | Uncertainty   |
|--------------------------------------|---------------|
| Radiated Emission (9 kHz ~ 30 MHz)   | $\pm 1.15$ dB |
| Radiated Emission (30 MHz ~ 200 MHz) | $\pm 1.32$ dB |
| Radiated Emission (200 MHz ~ 1 GHz)  | $\pm 1.31$ dB |
| Radiated Emission (1 GHz ~ 18 GHz)   | $\pm 1.53$ dB |
| Radiated Emission (18 GHz ~ 40 GHz)  | $\pm 2.50$ dB |
| Mains Conducted Emission             | $\pm 1.65$ dB |

### 3. General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a BROOK Wingman PS2 Converter. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

#### 3.2 System Details and Ratings

##### Basic Information of EUT

| Item                        | EUT information             |
|-----------------------------|-----------------------------|
| Kind of Equipment/Test Item | BROOK Wingman PS2 Converter |
| Type Identification         | ZPP0062                     |
| FCC ID                      | 2ADKM0062                   |

##### Technical Specification of EUT

| Item                      | EUT information             |
|---------------------------|-----------------------------|
| Operating Frequency       | 2402 MHz ~ 2480 MHz         |
| Channel Spacing           | 1 MHz                       |
| Channel Number            | 79                          |
| Operation Voltage         | 5Vdc                        |
| Modulation                | GFSK, $\pi/4$ -DQPSK, 8DPSK |
| Maximum Output Power (mW) | 7.031                       |
| Antenna Information       | Refer to 5.1.1              |
| Accessory Device          | Refer to 4.4                |

### **3.3 Noise Generating and Noise Suppressing Parts**

Refer to the Circuit Diagram.

### **3.4 Submitted Documents**

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

**Table for Parameters of Test Software Setting**

| Frequency (MHz) | Power Setting |                |         |
|-----------------|---------------|----------------|---------|
|                 | GFSK          | $\pi/4$ -DQPSK | 8DPSK   |
| 2402            | Default       | Default        | Default |
| 2441            | Default       | Default        | Default |
| 2480            | Default       | Default        | Default |

### 4.2 Carrier Frequency and Channel

| Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 0       | 2402        | 20      | 2422        | 40      | 2442        | 60      | 2462        |
| 1       | 2403        | 21      | 2423        | 41      | 2443        | 61      | 2463        |
| 2       | 2404        | 22      | 2424        | 42      | 2444        | 62      | 2464        |
| 3       | 2405        | 23      | 2425        | 43      | 2445        | 63      | 2465        |
| 4       | 2406        | 24      | 2426        | 44      | 2446        | 64      | 2466        |
| 5       | 2407        | 25      | 2427        | 45      | 2447        | 65      | 2467        |
| 6       | 2408        | 26      | 2428        | 46      | 2448        | 66      | 2468        |
| 7       | 2409        | 27      | 2429        | 47      | 2449        | 67      | 2469        |
| 8       | 2410        | 28      | 2430        | 48      | 2450        | 68      | 2470        |
| 9       | 2411        | 29      | 2431        | 49      | 2451        | 69      | 2471        |
| 10      | 2412        | 30      | 2432        | 50      | 2452        | 70      | 2472        |
| 11      | 2413        | 31      | 2433        | 51      | 2453        | 71      | 2473        |
| 12      | 2414        | 32      | 2434        | 52      | 2454        | 72      | 2474        |
| 13      | 2415        | 33      | 2435        | 53      | 2455        | 73      | 2475        |
| 14      | 2416        | 34      | 2436        | 54      | 2456        | 74      | 2476        |
| 15      | 2417        | 35      | 2437        | 55      | 2457        | 75      | 2477        |
| 16      | 2418        | 36      | 2438        | 56      | 2458        | 76      | 2478        |
| 17      | 2419        | 37      | 2439        | 57      | 2459        | 77      | 2479        |
| 18      | 2420        | 38      | 2440        | 58      | 2460        | 78      | 2480        |
| 19      | 2421        | 39      | 2441        | 59      | 2461        |         |             |

## 4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

|               |                        |
|---------------|------------------------|
| Test Software | Bluetooth RF Test Tool |
|---------------|------------------------|

The samples were used as follows:

A003229211-012 for radiated test

A003229211-010 for conducted test

Full test was applied on all test modes, but only worst case was shown.

| EUT Configure Mode | Applicable To                      |                                         |                                         |                          | Description |
|--------------------|------------------------------------|-----------------------------------------|-----------------------------------------|--------------------------|-------------|
|                    | Antenna Port Conducted Measurement | Radiated Spurious Emissions above 1 GHz | Radiated Spurious Emissions below 1 GHz | Mains Conducted Emission |             |
| -                  | √                                  | √                                       | √                                       | √                        | -           |

Note:

1. For Radiated emission test, pre-tested GFSK,  $\pi/4$ -DQPSK, 8DPSK modulation type and found 8DPSK was the worse, therefore chosen for the final test and presented in the test report.
2. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on Z-plane.
3. "-" means no effect.

### Antenna Port Conducted Measurement

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Frequency (MHz) | Tested Frequency (MHz) | Modulation Type | Packet Type |
|--------------------|---------------------------|------------------------|-----------------|-------------|
| -                  | 2402 to 2480              | 2402, 2441, 2480       | GFSK            | 1DH5        |
| -                  | 2402 to 2480              | 2402, 2441, 2480       | $\pi/4$ -DQPSK  | 2DH5        |
| -                  | 2402 to 2480              | 2402, 2441, 2480       | 8DPSK           | 3DH5        |

### Radiated Spurious Emissions (Above 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Frequency (MHz) | Tested Frequency (MHz) | Modulation Type | Packet Type |
|--------------------|---------------------------|------------------------|-----------------|-------------|
| -                  | 2402 to 2480              | 2402, 2441, 2480       | GFSK            | 1DH5        |
| -                  | 2402 to 2480              | 2402, 2441, 2480       | 8DPSK           | 3DH5        |

### Radiated Spurious Emissions (Below 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Frequency (MHz) | Tested Frequency (MHz) | Modulation Type | Packet Type |
|--------------------|---------------------------|------------------------|-----------------|-------------|
| -                  | 2402 to 2480              | 2402                   | GFSK            | 1DH5        |

**Mains Conducted Emission Test**

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Frequency (MHz) | Tested Frequency (MHz) | Modulation Type | Packet Type |
|--------------------|---------------------------|------------------------|-----------------|-------------|
| -                  | 2402 to 2480              | 2402                   | GFSK            | 1DH5        |

**Test Condition**

| Test Item                               | Ambient Temperature | Relative Humidity | Tested by |
|-----------------------------------------|---------------------|-------------------|-----------|
| Conducted Measurement                   | 22-24 °C            | 64-68 %           | Nick Hsu  |
| Radiated Spurious Emissions above 1 GHz | 24-25.6 °C          | 53-56 %           | Ray Huang |
| Radiated Spurious Emissions below 1 GHz | 24-25.6 °C          | 53-56 %           | Ray Huang |
| Mains Conducted Emission                | 21.9 °C             | 59 %              | Ray Huang |

## 4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

**Accessory of EUT**


None.

**Support Unit**


| No.                  | Description | Brand    | Model       | S/N        | Remark                         |
|----------------------|-------------|----------|-------------|------------|--------------------------------|
| Radiated Test        |             |          |             |            |                                |
| 1                    | Notebook    | Lenovo   | 81BL        | MP1DCD6Y   | -                              |
| 2                    | USB Cable   | TUV-001  | TUV-001     | -          | 300 cm shielded cable          |
| Mains Conducted Test |             |          |             |            |                                |
| A                    | Fixture     | Zeroplus | Zeroplus-01 | -          | -                              |
| 1                    | Notebook    | Lenovo   | 81BL        | MP1DCD6Y   | -                              |
| 2                    | Adapter     | HP       | PPP009D     | -          | 180 cm shielded cable w/o core |
| Conducted Test       |             |          |             |            |                                |
| -                    | Notebook    | HP       | TPN-C135    | CND9111RJ2 | -                              |

## 4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

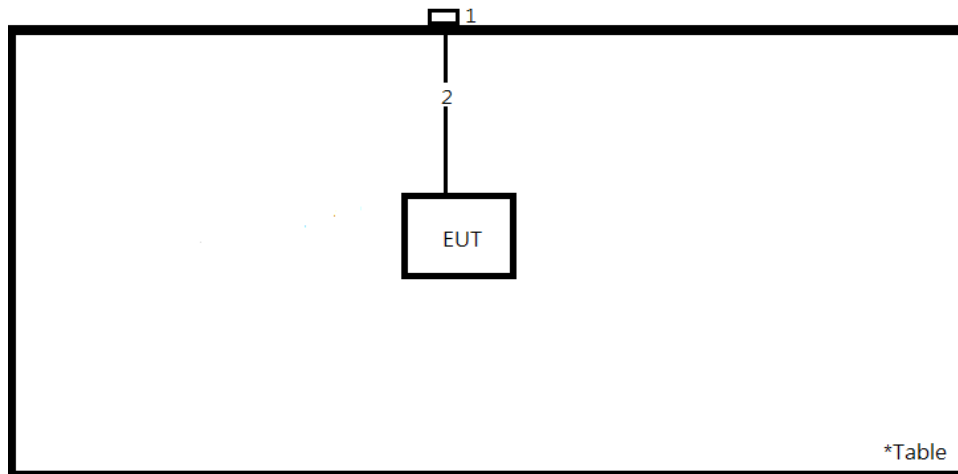

<Mains Conducted Emission mode>

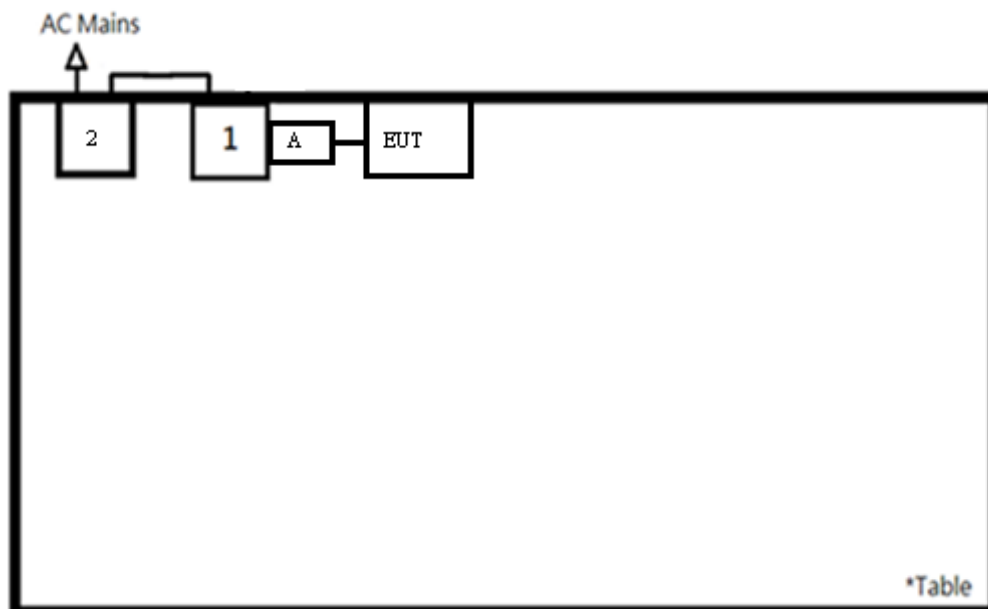

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**Requirement** Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of -6.72 dBi. The antenna is a PCB antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.  
Refer to EUT photo for details.

## 5.1.2 Peak Output Power

### Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

**Kind of Test Site**                      Shielded room

### Test Setup



### Test Instruments

| Kind of Equipment | Manufacturer | Type    | S/N     | Calibration Date | Calibration Due Date | Test Date |           |
|-------------------|--------------|---------|---------|------------------|----------------------|-----------|-----------|
|                   |              |         |         |                  |                      | From      | Until     |
| Power Meter       | Anritsu      | ML2495A | 1901008 | 2022/3/15        | 2023/3/14            | 2022/4/13 | 2022/4/19 |
| Power Sensor      | Anritsu      | MA2411B | 1725269 | 2022/3/15        | 2023/3/14            | 2022/4/13 | 2022/4/19 |

### Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

## Test Result

### Peak Output Power

#### <GFSK>

| Channel        | Channel Frequency | Peak Output Power |       | Limit |
|----------------|-------------------|-------------------|-------|-------|
|                | (MHz)             | (dBm)             | (mW)  | (mW)  |
| Low Channel    | 2402              | 5.14              | 3.266 | 125   |
| Middle Channel | 2441              | 5.27              | 3.365 | 125   |
| High Channel   | 2480              | 5.43              | 3.491 | 125   |

#### < $\pi/4$ -DQPSK>

| Channel        | Channel Frequency | Peak Output Power |       | Limit |
|----------------|-------------------|-------------------|-------|-------|
|                | (MHz)             | (dBm)             | (mW)  | (mW)  |
| Low Channel    | 2402              | 7.83              | 6.067 | 125   |
| Middle Channel | 2441              | 7.61              | 5.768 | 125   |
| High Channel   | 2480              | 7.72              | 5.916 | 125   |

#### <8DPSK>

| Channel        | Channel Frequency | Peak Output Power |       | Limit |
|----------------|-------------------|-------------------|-------|-------|
|                | (MHz)             | (dBm)             | (mW)  | (mW)  |
| Low Channel    | 2402              | 8.47              | 7.031 | 125   |
| Middle Channel | 2441              | 8.28              | 6.730 | 125   |
| High Channel   | 2480              | 8.31              | 6.776 | 125   |

**Average Power**
**<GFSK>**

| Channel        | Channel Frequency | Average Power |       |
|----------------|-------------------|---------------|-------|
|                | (MHz)             | (dBm)         | (mW)  |
| Low Channel    | 2402              | 4.96          | 3.133 |
| Middle Channel | 2441              | 5.07          | 3.214 |
| High Channel   | 2480              | 5.23          | 3.334 |

**< $\pi/4$ -DQPSK>**

| Channel        | Channel Frequency | Average Power |       |
|----------------|-------------------|---------------|-------|
|                | (MHz)             | (dBm)         | (mW)  |
| Low Channel    | 2402              | 5.27          | 3.365 |
| Middle Channel | 2441              | 5.01          | 3.170 |
| High Channel   | 2480              | 5.10          | 3.236 |


**<8DPSK>**

| Channel        | Channel Frequency | Average Power |       |
|----------------|-------------------|---------------|-------|
|                | (MHz)             | (dBm)         | (mW)  |
| Low Channel    | 2402              | 5.30          | 3.388 |
| Middle Channel | 2441              | 5.03          | 3.184 |
| High Channel   | 2480              | 5.11          | 3.243 |

### 5.1.3 20 dB Bandwidth and 99% Occupied Bandwidth

**Kind of Test Site**                      Shielded room

#### Test Setup



#### Test Instruments

| Kind of Equipment | Manufacturer | Type  | S/N    | Calibration Date | Calibration Due Date | Test Date |           |
|-------------------|--------------|-------|--------|------------------|----------------------|-----------|-----------|
|                   |              |       |        |                  |                      | From      | Until     |
| Spectrum Analyzer | R&S          | FSV40 | 100921 | 2021/5/10        | 2022/5/9             | 2022/4/14 | 2022/4/19 |

#### Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.
- The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### Test Results

Please refer to Appendix A.


## 5.1.4 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

### Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

**Kind of Test Site**                      Shielded room

### Test Setup



### Test Instruments

| Kind of Equipment | Manufacturer | Type  | S/N    | Calibration Date | Calibration Due Date | Test Date |           |
|-------------------|--------------|-------|--------|------------------|----------------------|-----------|-----------|
|                   |              |       |        |                  |                      | From      | Until     |
| Spectrum Analyzer | R&S          | FSV40 | 100921 | 2021/5/10        | 2022/5/9             | 2022/4/14 | 2022/4/19 |

### Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### Test Results

Please refer to Appendix A.

## 5.1.5 Radiated Spurious Emissions and Band Edges

### Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


**Kind of Test Site** 3m Semi-Anechoic Chamber

### Test Setup


#### <Radiated Emissions below 30 MHz>

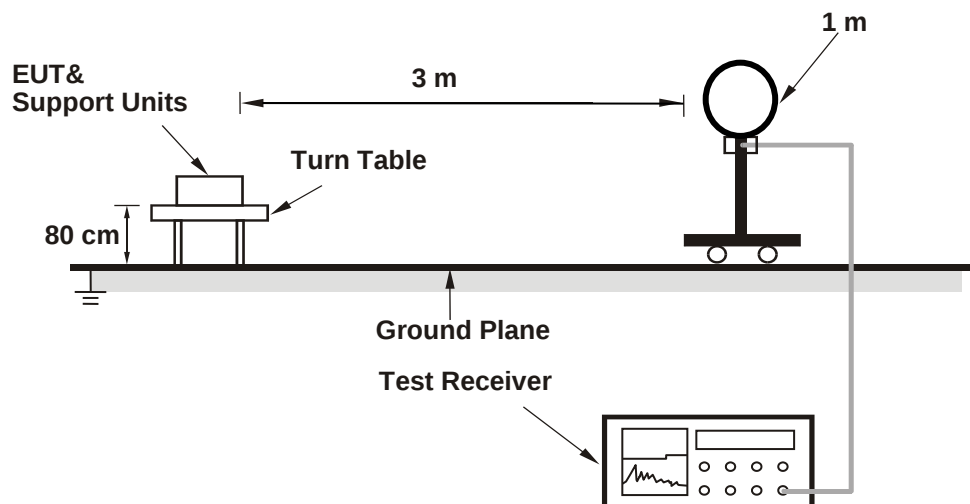

#### <Radiated Emissions 30 MHz to 1 GHz>

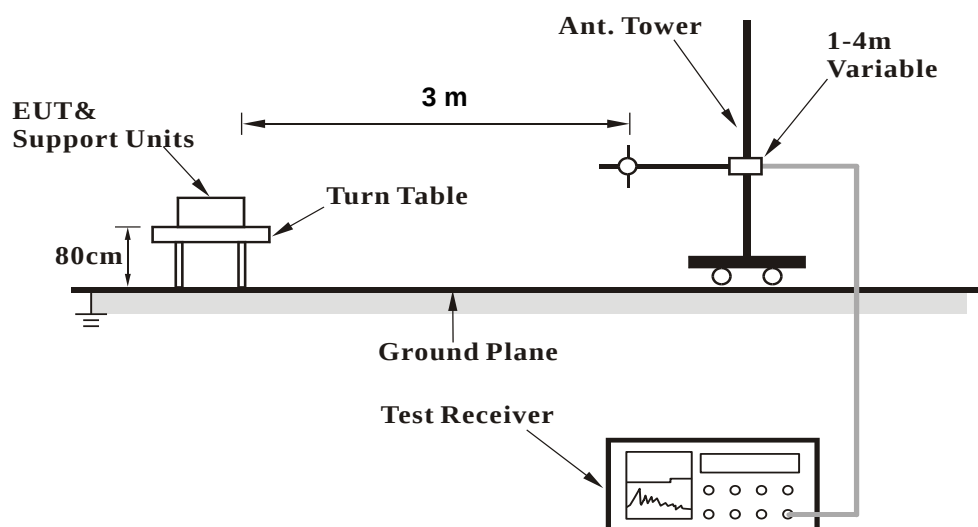

<Radiated Emissions above 1 GHz>

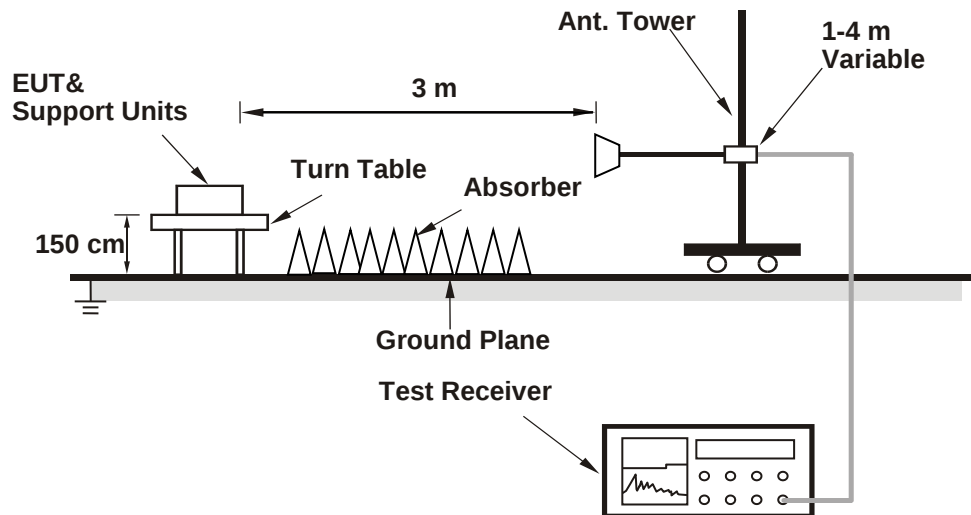

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**Test Instruments**

Test Date:

Below 30MHz: 2022/5/1

| Kind of Equipment | Manufacturer | Type       | S/N    | Calibration Date | Calibration Due Date |
|-------------------|--------------|------------|--------|------------------|----------------------|
| Receiver          | R&S          | ESR7       | 102109 | 2022/2/25        | 2023/2/24            |
| Loop Antenna      | SCHWARZBECK  | FMZB 1519B | 00215  | 2021/12/8        | 2022/12/7            |

30MHz-1GHz: 2022/5/1

| Kind of Equipment | Manufacturer | Type      | S/N        | Calibration Date | Calibration Due Date |
|-------------------|--------------|-----------|------------|------------------|----------------------|
| Receiver          | R&S          | ESR7      | 102109     | 2022/2/25        | 2023/2/24            |
| Bilog Antenna     | SCHWARZBECK  | VULB-9168 | 00951      | 2022/4/6         | 2023/4/5             |
| LF-AMP            | Agilent      | 8447D     | 2727A05146 | 2022/2/16        | 2023/2/15            |

Above 1GHz: 2022/4/30

| Kind of Equipment  | Manufacturer | Type        | S/N      | Calibration Date | Calibration Due Date |
|--------------------|--------------|-------------|----------|------------------|----------------------|
| Signal Analyzer    | R&S          | FSV40       | 101512   | 2022/2/24        | 2023/2/23            |
| Horn Antenna       | ETS-Lindgren | 3117        | 00218929 | 2021/11/25       | 2022/11/24           |
| HF-AMP + AC source | EMCI         | EMC051845SE | 980635   | 2022/1/20        | 2023/1/19            |
| HF-AMP + AC source | EMCI         | EMC184045SE | 980656   | 2022/1/20        | 2023/1/19            |
| Horn Antenna       | SCHWARZBECK  | BBHA 9170   | 00887    | 2022/3/29        | 2023/3/28            |

**Test Procedures****For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

## Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

**For Radiated Emissions above 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

## Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98 %) or 10 Hz (Duty cycle  $\geq 98$  %) for Average detection (AV) at frequency above 1 GHz.
4. For fundamental frequency: The average value is "Average = Peak value + 20log(Duty cycle)  
Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:  
 $20\log(\text{Duty cycle}) = 20\log(\text{dwell time} / 100\text{ms}) = 20\log(3.125 / 100) = -30.1 \text{ dB}$
5. All modes of operation were investigated and the worst-case emissions are reported.

6. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation.  
The worst-case Axis orientation is recorded in this test report.

#### **Test Results**

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)


Please refer to Appendix B.

### 5.1.6 Hopping Channel Separation

**Limit**  $\geq 25$  kHz or 2/3 of 20 dB bandwidth, whichever is greater

**Kind of Test Site** Shielded room

#### Test Setup



#### Test Instruments

| Kind of Equipment | Manufacturer | Type  | S/N    | Calibration Date | Calibration Due Date | Test Date |           |
|-------------------|--------------|-------|--------|------------------|----------------------|-----------|-----------|
|                   |              |       |        |                  |                      | From      | Until     |
| Spectrum Analyzer | R&S          | FSV40 | 100921 | 2021/5/10        | 2022/5/9             | 2022/4/14 | 2022/4/19 |

#### Test Procedure

Measurement Procedure REF

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

#### Test Results


Please refer to Appendix A.

### 5.1.7 Number of Hopping Frequency

**Limit**  $\geq 15$  non-overlapping channels

**Kind of Test Site** Shielded room

**Test Setup**



#### Test Instruments

| Kind of Equipment | Manufacturer | Type  | S/N    | Calibration Date | Calibration Due Date | Test Date |           |
|-------------------|--------------|-------|--------|------------------|----------------------|-----------|-----------|
|                   |              |       |        |                  |                      | From      | Until     |
| Spectrum Analyzer | R&S          | FSV40 | 100921 | 2021/5/10        | 2022/5/9             | 2022/4/14 | 2022/4/19 |

#### Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

#### Test Results


Please refer to Appendix A.

### 5.1.8 Dwell Time

**Limit** 0.4s

**Kind of Test Site** Shielded room

**Test Setup**



### Test Instruments

| Kind of Equipment | Manufacturer | Type  | S/N    | Calibration Date | Calibration Due Date | Test Date |           |
|-------------------|--------------|-------|--------|------------------|----------------------|-----------|-----------|
|                   |              |       |        |                  |                      | From      | Until     |
| Spectrum Analyzer | R&S          | FSV40 | 100921 | 2021/5/10        | 2022/5/9             | 2022/4/14 | 2022/4/19 |

### Test Procedures

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

### Test Results

Please refer to Appendix A.

## 5.2 Mains Emission


### 5.2.1 Mains Conducted Emission

#### Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

**Kind of Test Site** Shielded room

#### Test Setup

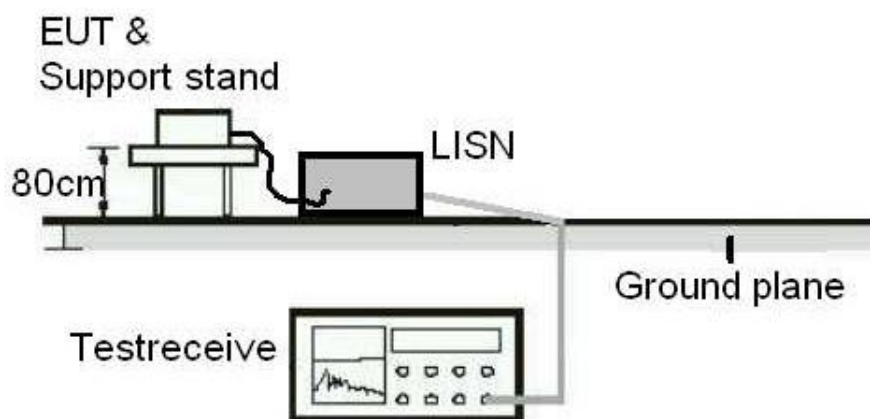

#### Test Instruments

| Kind of Equipment  | Manufacturer    | Type   | S/N     | Calibration Date | Calibration Due Date | Test Date |          |
|--------------------|-----------------|--------|---------|------------------|----------------------|-----------|----------|
|                    |                 |        |         |                  |                      | From      | Until    |
| Two-Line V-Network | Rohde & Schwarz | ENV216 | 101938  | 2021/9/23        | 2022/9/22            | 2022/5/7  | 2022/5/7 |
| EMI Test Receiver  | R&S             | ESCI   | 1816063 | 2021/11/15       | 2022/11/14           | 2022/5/7  | 2022/5/7 |

#### Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

#### Test Results

Please refer to Appendix B.


## Appendix A: Test Results of Conducted Test

### Test Result of 20 dB Bandwidth


#### GFSK

| Channel        | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Result |
|----------------|-------------------------|-----------------------|--------|
| Low Channel    | 2402                    | 950.05                | Pass   |
| Middle Channel | 2441                    | 950.05                | Pass   |
| High Channel   | 2480                    | 950.05                | Pass   |


#### Low Channel

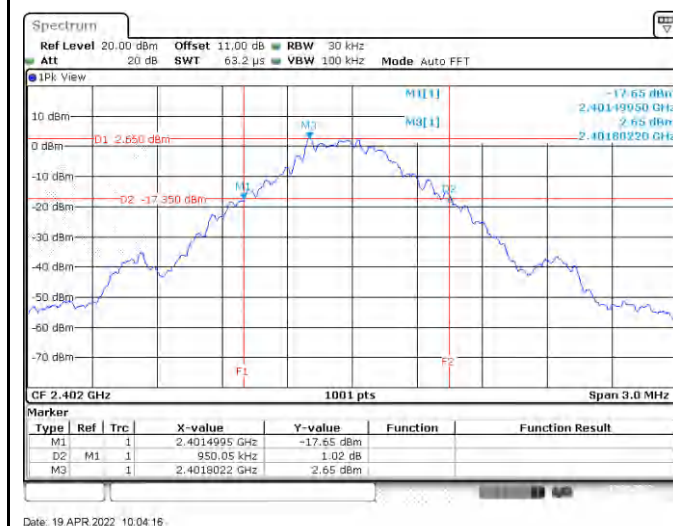

#### Middle Channel

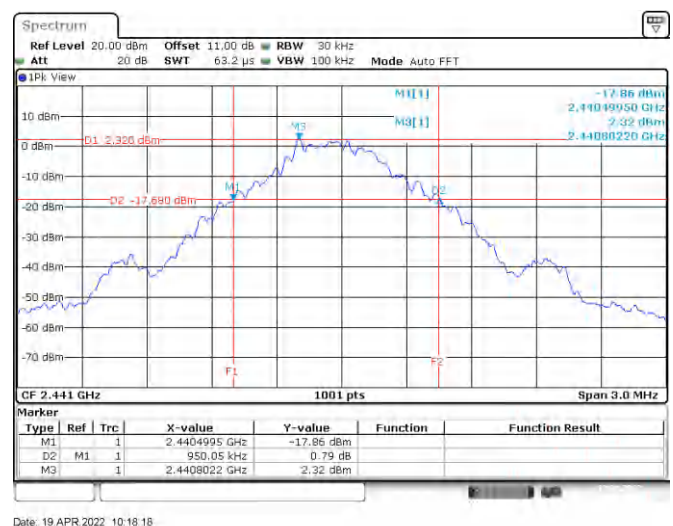


#### High Channel

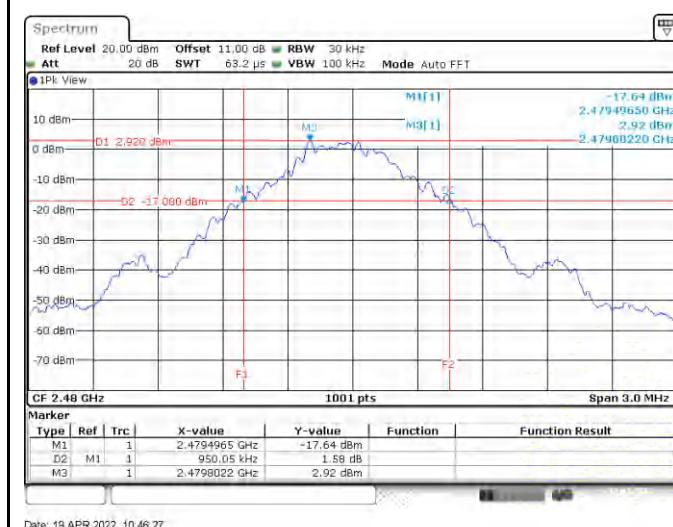


**8DPSK**


| Channel        | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Result |
|----------------|-------------------------|-----------------------|--------|
| Low Channel    | 2402                    | 1285.71               | Pass   |
| Middle Channel | 2441                    | 1285.71               | Pass   |
| High Channel   | 2480                    | 1285.71               | Pass   |

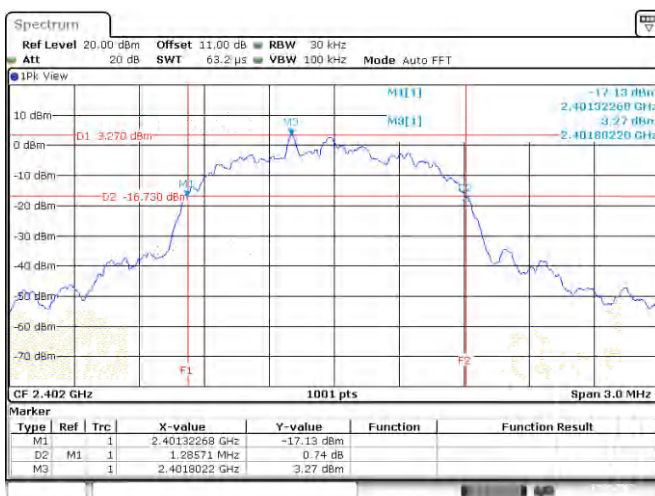**Low Channel**


Date: 19 APR 2022 11:12:57

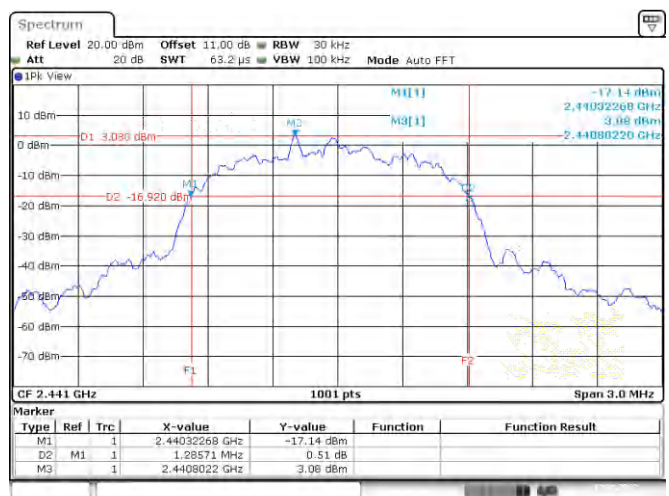**Middle Channel**


Date: 19 APR 2022 11:16:54

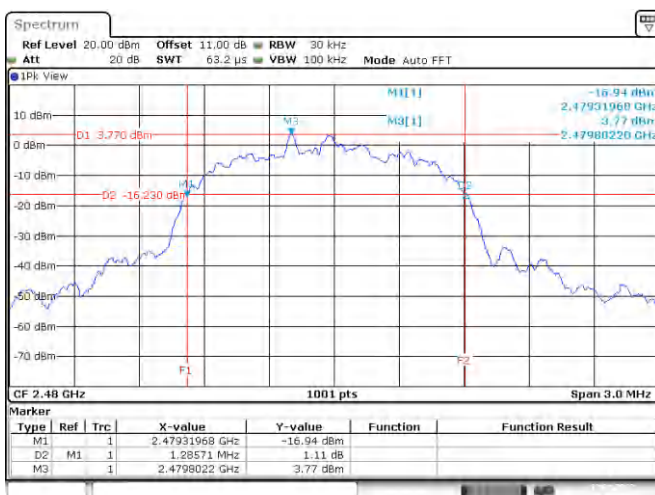**High Channel**


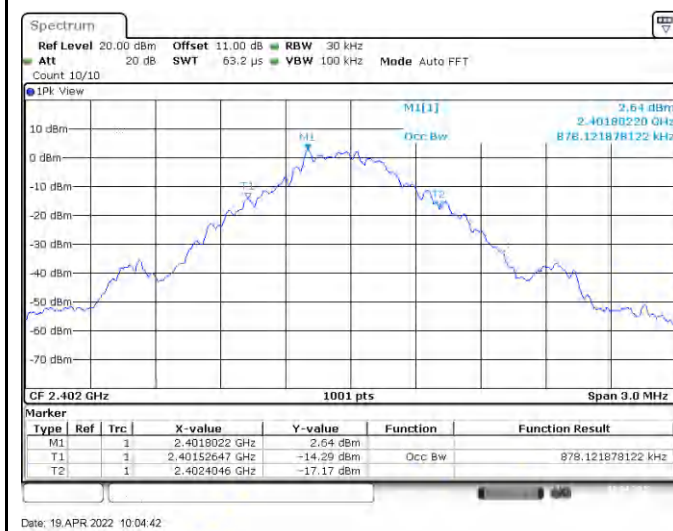
Date: 19 APR 2022 11:20:57

## Test Result of 99% Occupied Bandwidth


### GFSK

| Channel        | Channel Frequency (MHz) | 99% Bandwidth (kHz) |
|----------------|-------------------------|---------------------|
| Low Channel    | 2402                    | 878.12              |
| Middle Channel | 2441                    | 875.12              |
| High Channel   | 2480                    | 875.12              |


#### Low Channel



#### Middle Channel

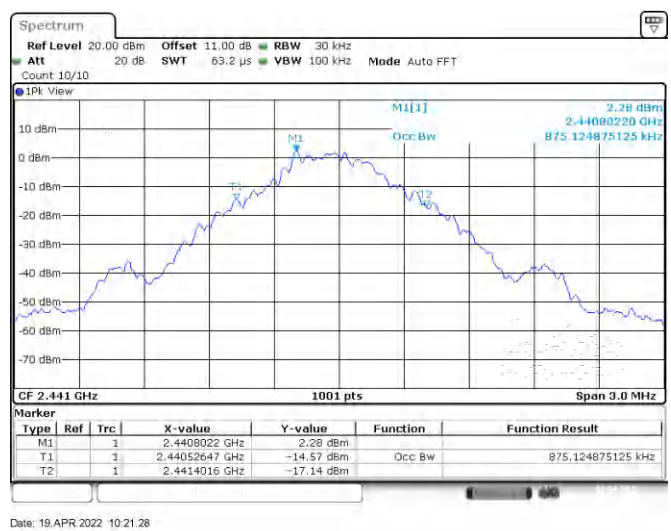


#### High Channel

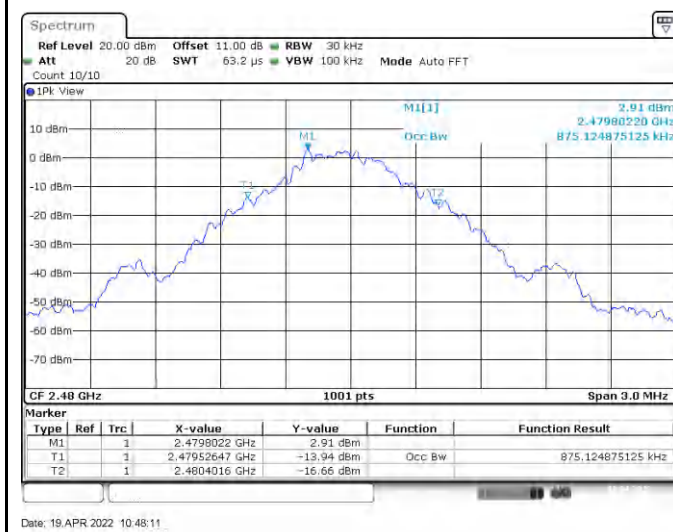

## 8DPSK

| Channel        | Channel Frequency (MHz) | 99% Bandwidth (kHz) |
|----------------|-------------------------|---------------------|
| Low Channel    | 2402                    | 1165.83             |
| Middle Channel | 2441                    | 1165.83             |
| High Channel   | 2480                    | 1165.83             |


### Low Channel

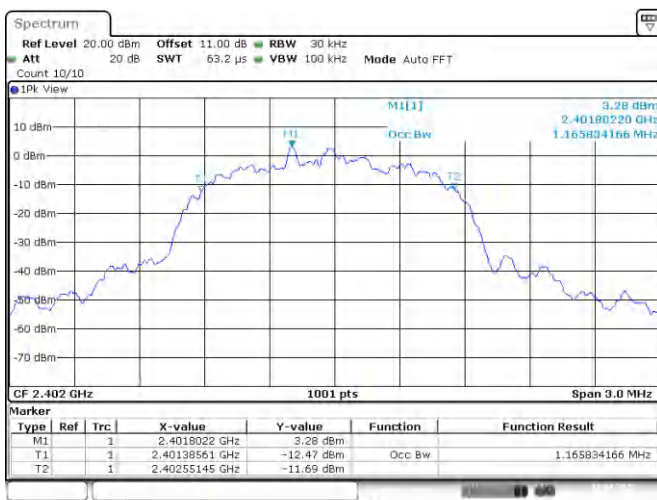

### Middle Channel



### High Channel

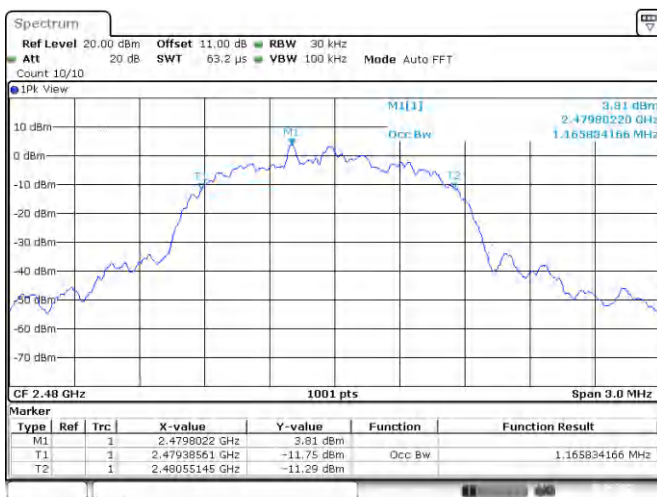


## Test Result of Conducted Spurious Emissions, Tx Mode

### GFSK


#### Low Channel

#### Middle Channel

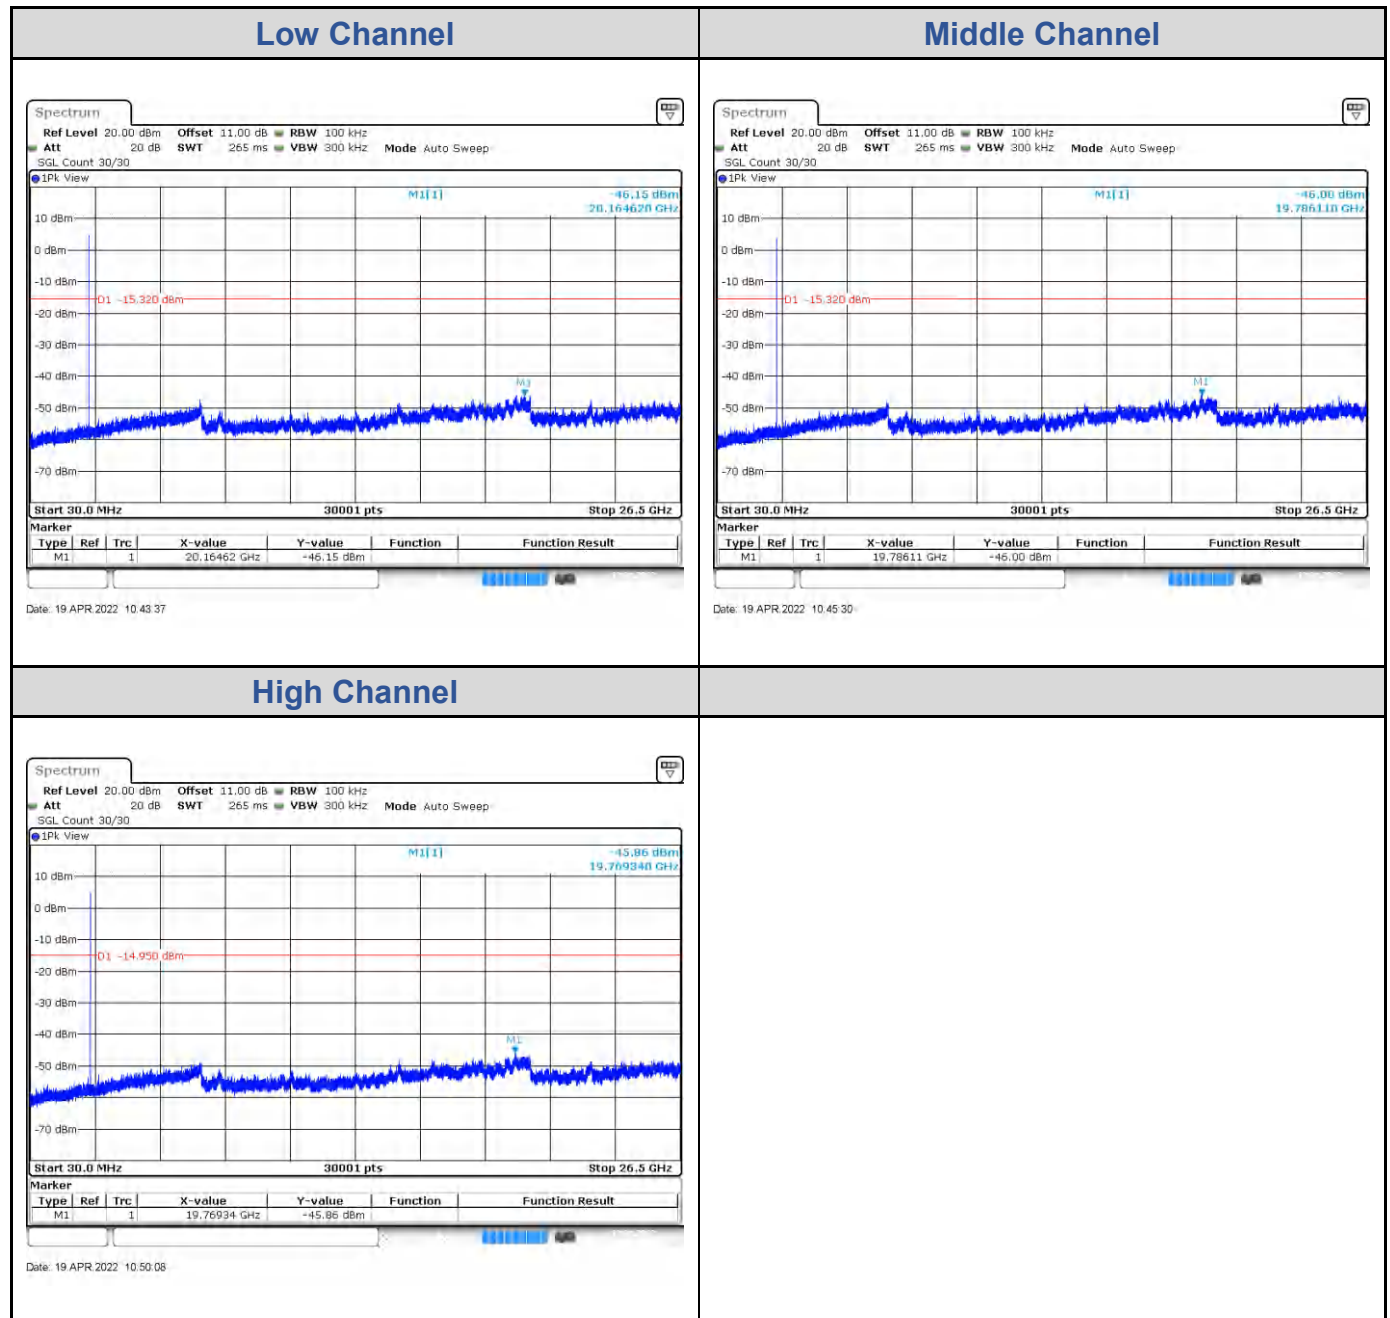


## 8DPSK


### Low Channel

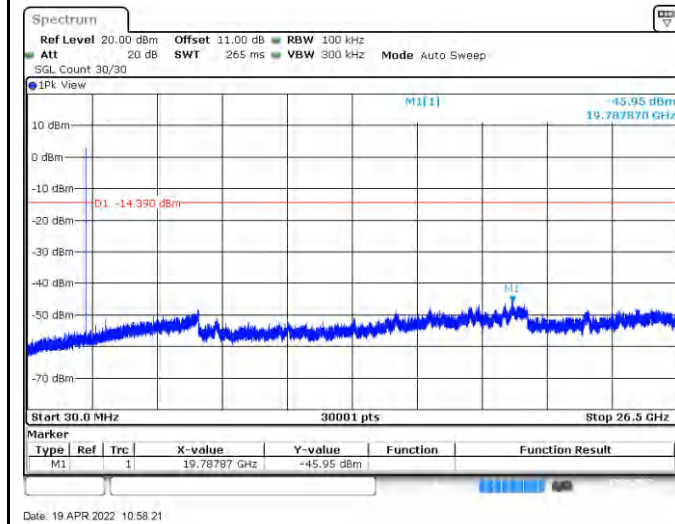


### Middle Channel

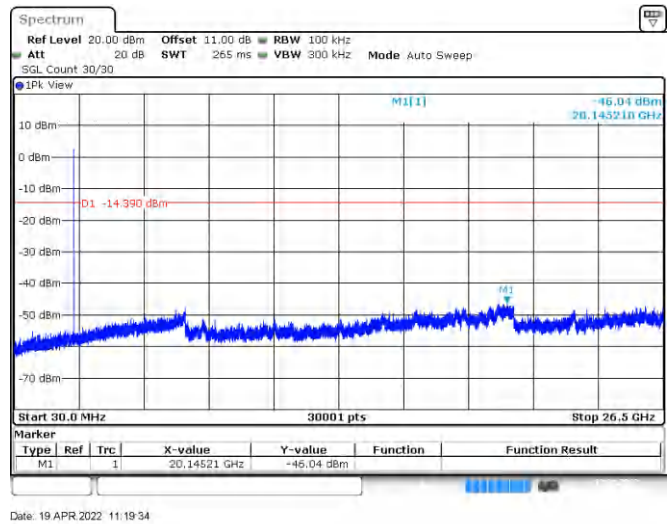


### High Channel

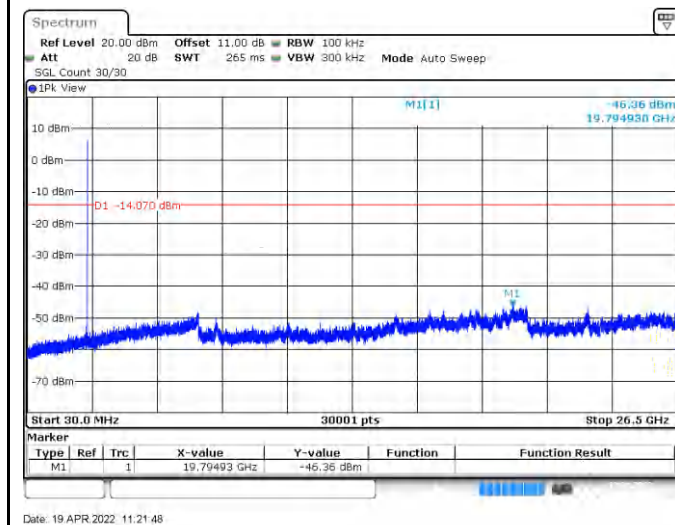

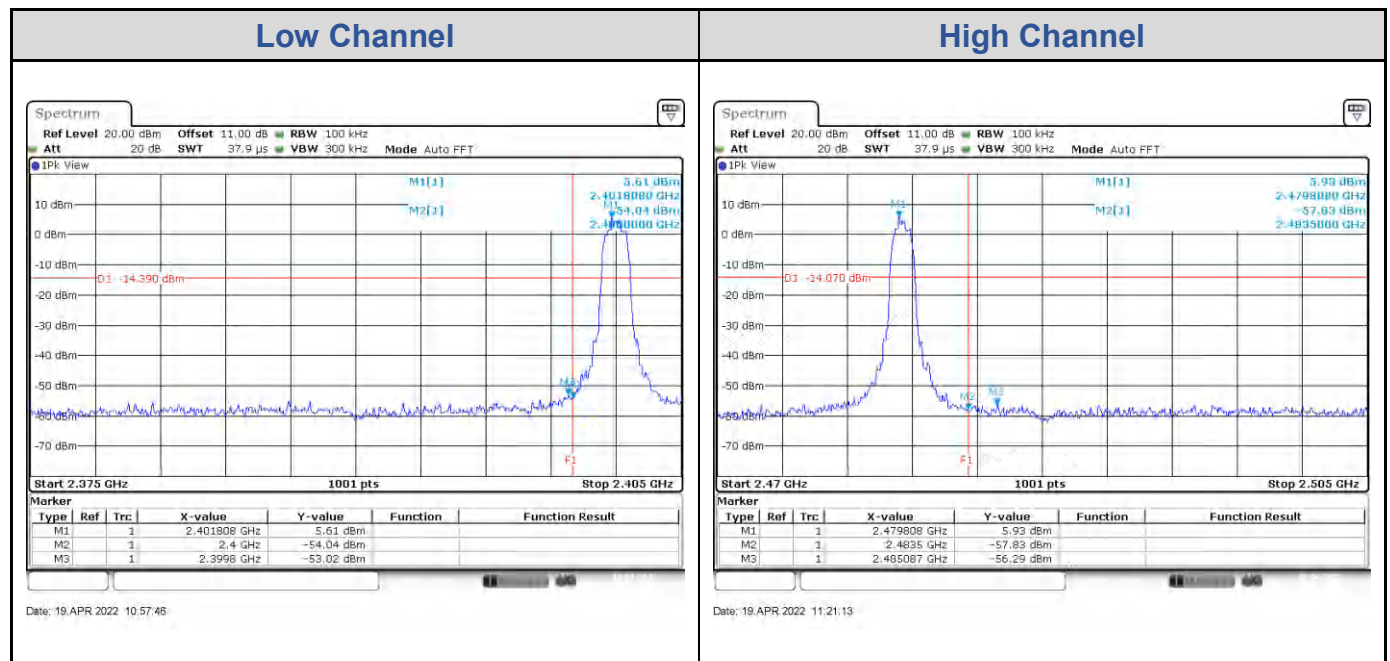


## Test Result of Hopping Band Edge

### GFSK

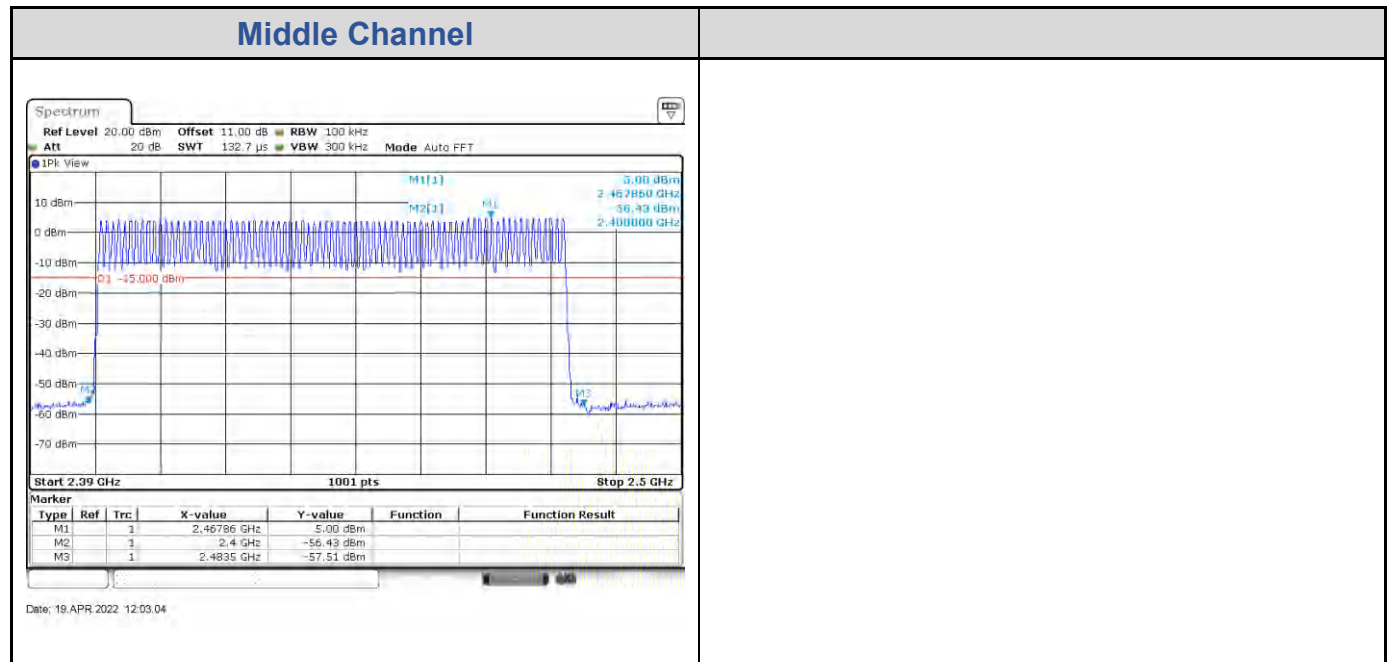

### 8DPSK

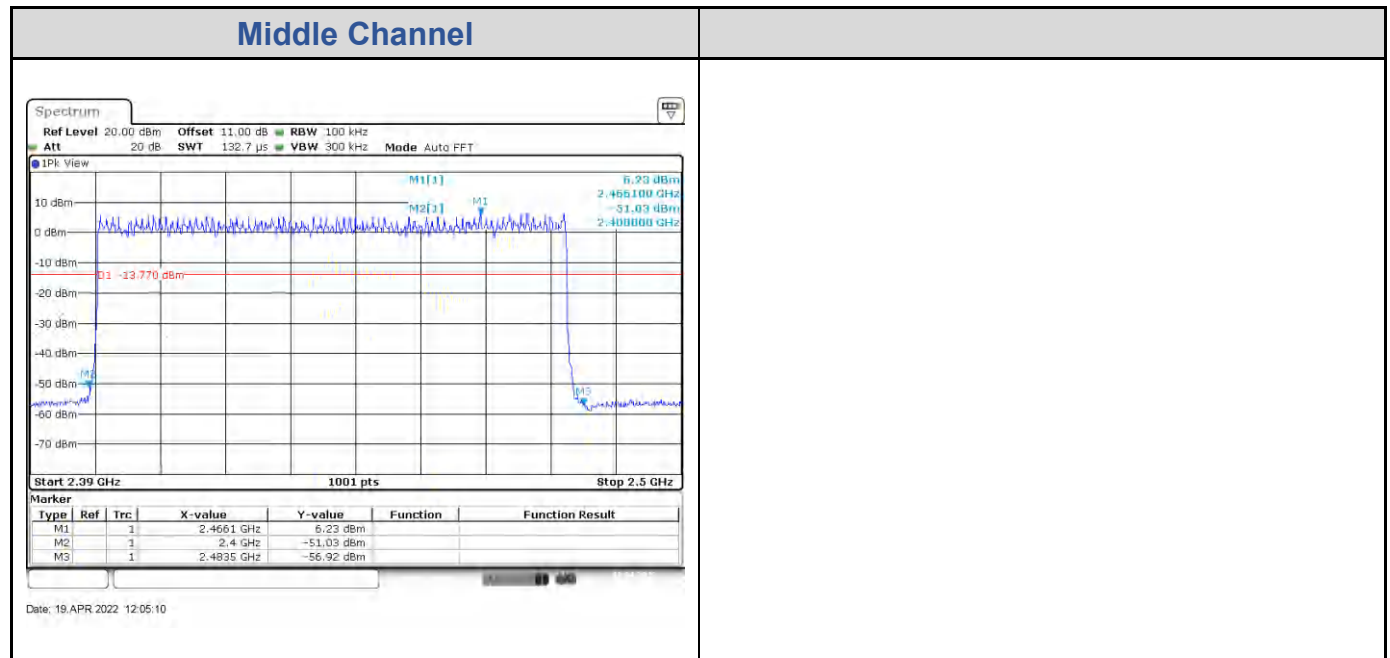


## Test Result of Hopping Channel Separation

### GFSK


| Channel | Channel Frequency (MHz) | Adjacent Channel Separation (MHz) | 20 dB Bandwidth (kHz) | Minimum Limit (MHz) | Result |
|---------|-------------------------|-----------------------------------|-----------------------|---------------------|--------|
| 0       | 2402                    | 1.00                              | 950.05                | 0.633               | Pass   |
| 39      | 2441                    | 1.00                              | 950.05                | 0.633               | Pass   |
| 78      | 2480                    | 1.00                              | 950.05                | 0.633               | Pass   |

#### Low Channel

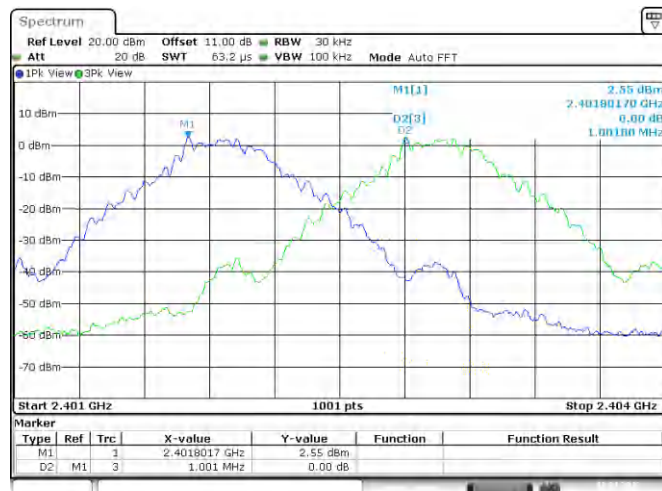


Date: 19 APR 2022 10:11:36

#### Middle Channel

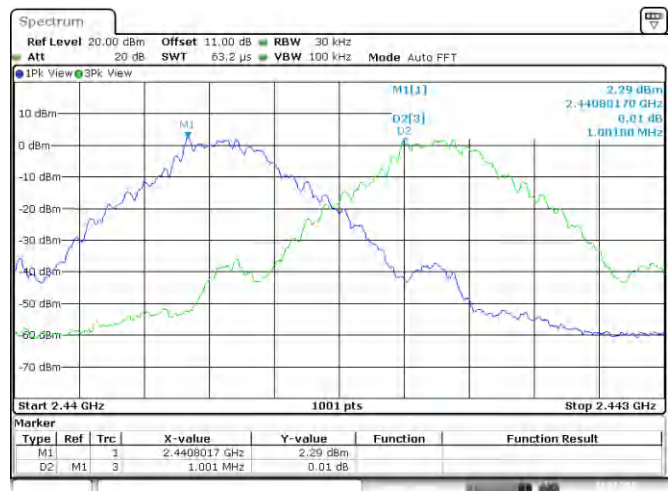

Date: 19 APR 2022 10:22:16




#### High Channel

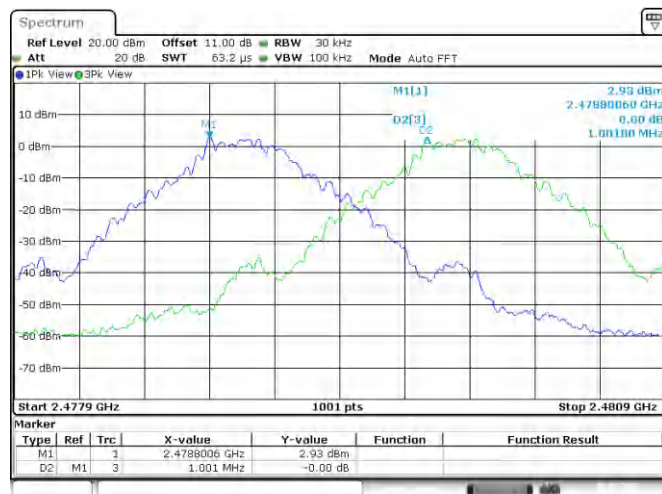

Date: 19 APR 2022 10:49:14


**8DPSK**

| Channel | Channel Frequency (MHz) | Adjacent Channel Separation (MHz) | 20 dB Bandwidth (kHz) | Minimum Limit (MHz) | Result |
|---------|-------------------------|-----------------------------------|-----------------------|---------------------|--------|
| 0       | 2402                    | 1.00                              | 1285.71               | 0.857               | Pass   |
| 39      | 2441                    | 1.00                              | 1285.71               | 0.857               | Pass   |
| 78      | 2480                    | 1.00                              | 1285.71               | 0.857               | Pass   |

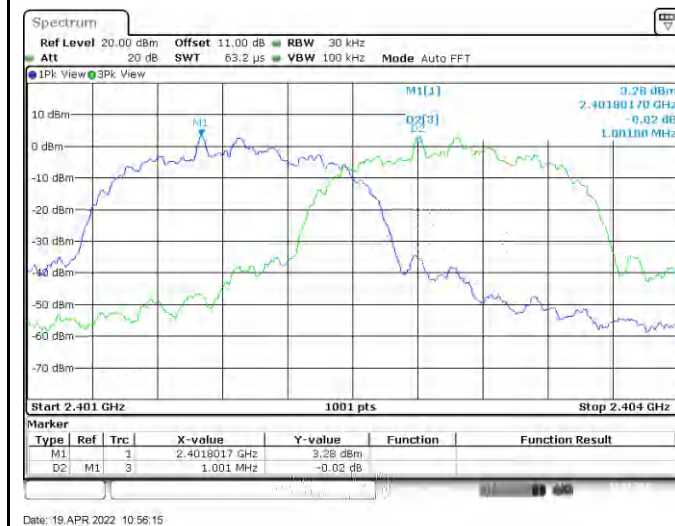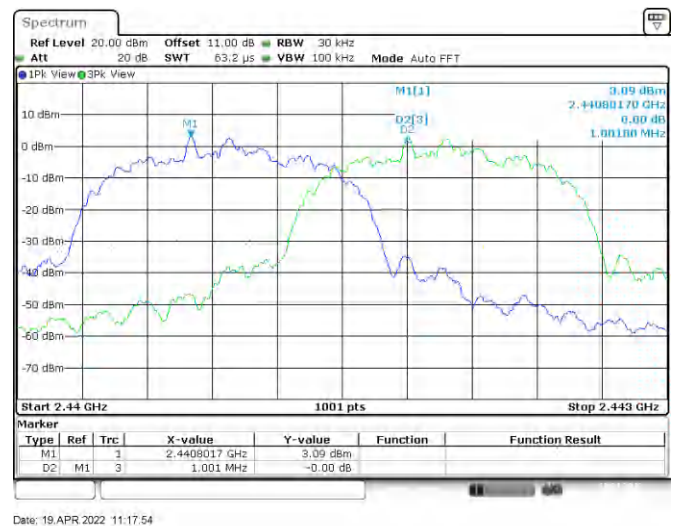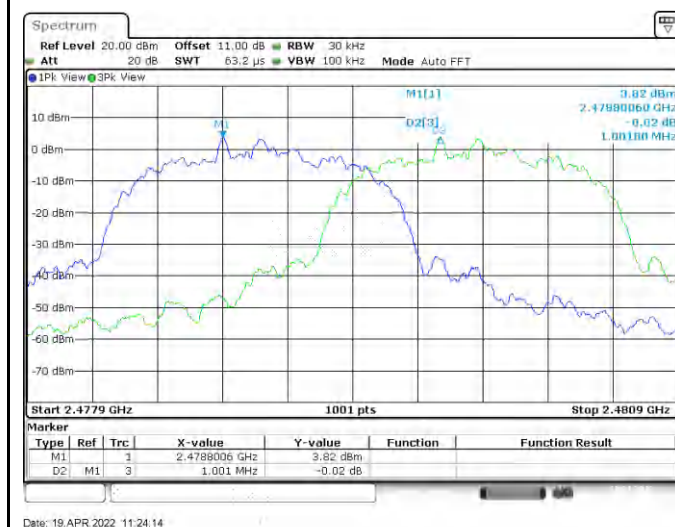**Low Channel**

**Middle Channel**

**High Channel**

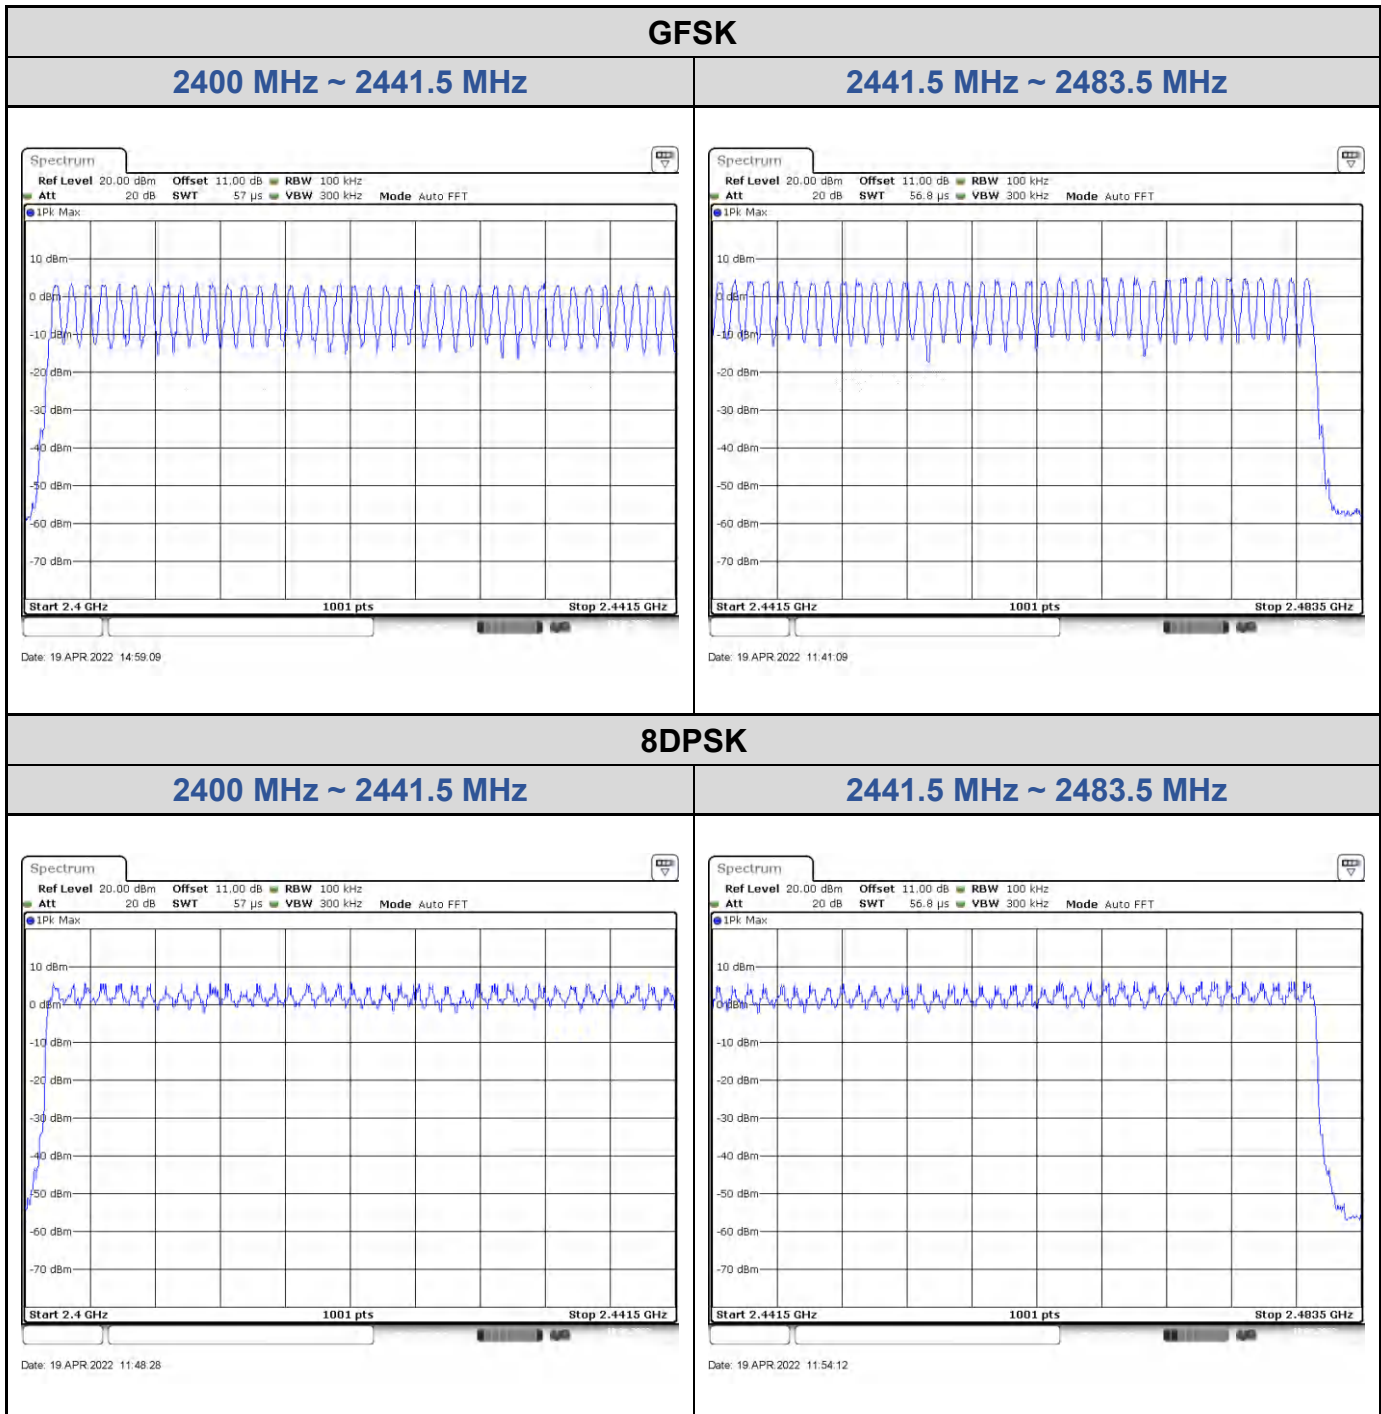
## Test Result of Number of Hopping Frequency


| Frequency Range    | Measured Quantity of Hopping Channel | Limit | Result |
|--------------------|--------------------------------------|-------|--------|
| 2400 to 2483.5 MHz | 79                                   | ≥15   | Pass   |



## Test Result of Dwell Time


### GFSK

| Data Mode | Number of transfer in a 31.6 (79Hopping*0.4s) | Package transfer time (msec) | Dwell time (s) | Limit (s) | Result |
|-----------|-----------------------------------------------|------------------------------|----------------|-----------|--------|
| 1DH5      | 7 (times / 2 sec) * 15.8 = 110.6 times        | 2.88                         | 0.32           | 0.4       | Pass   |

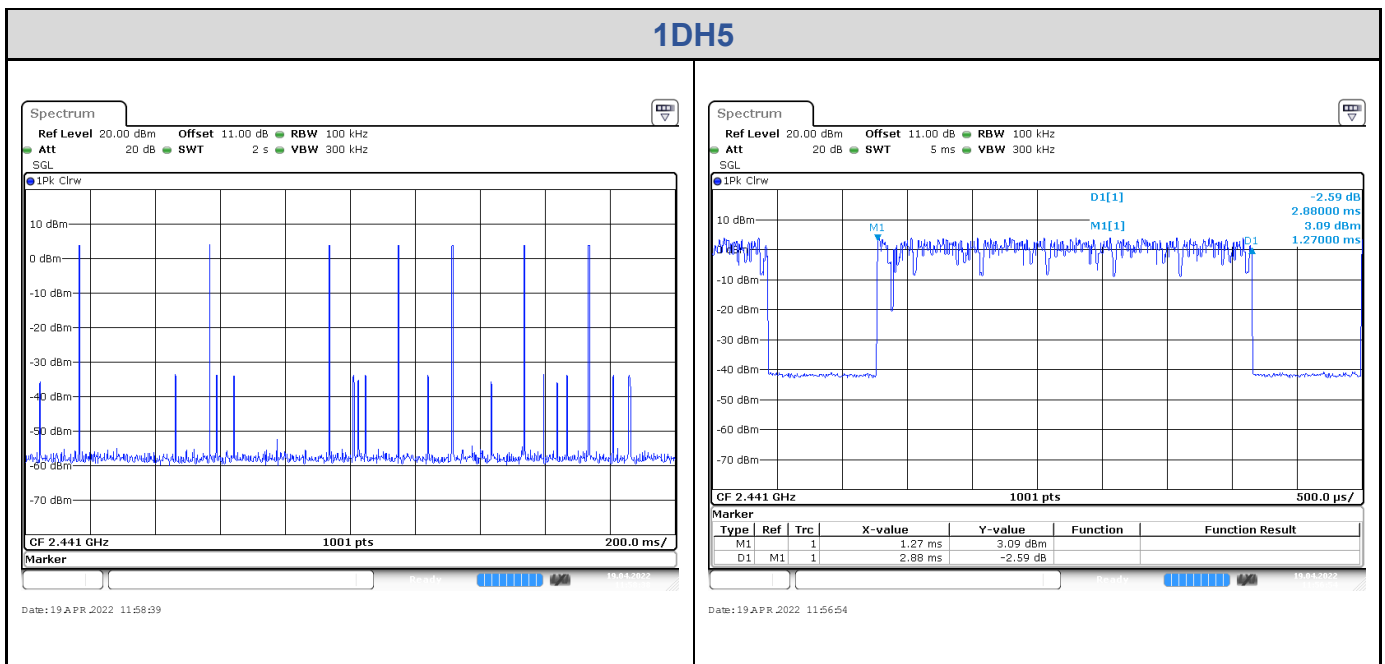

## 8DPSK

| Data Mode | Number of transfer in a 31.6 (79Hopping*0.4s) | Package transfer time (msec) | Dwell time (s) | Limit (s) | Result |
|-----------|-----------------------------------------------|------------------------------|----------------|-----------|--------|
| 3DH5      | 7 (times / 2 sec) * 15.8 = 110.6 times        | 2.89                         | 0.32           | 0.4       | Pass   |

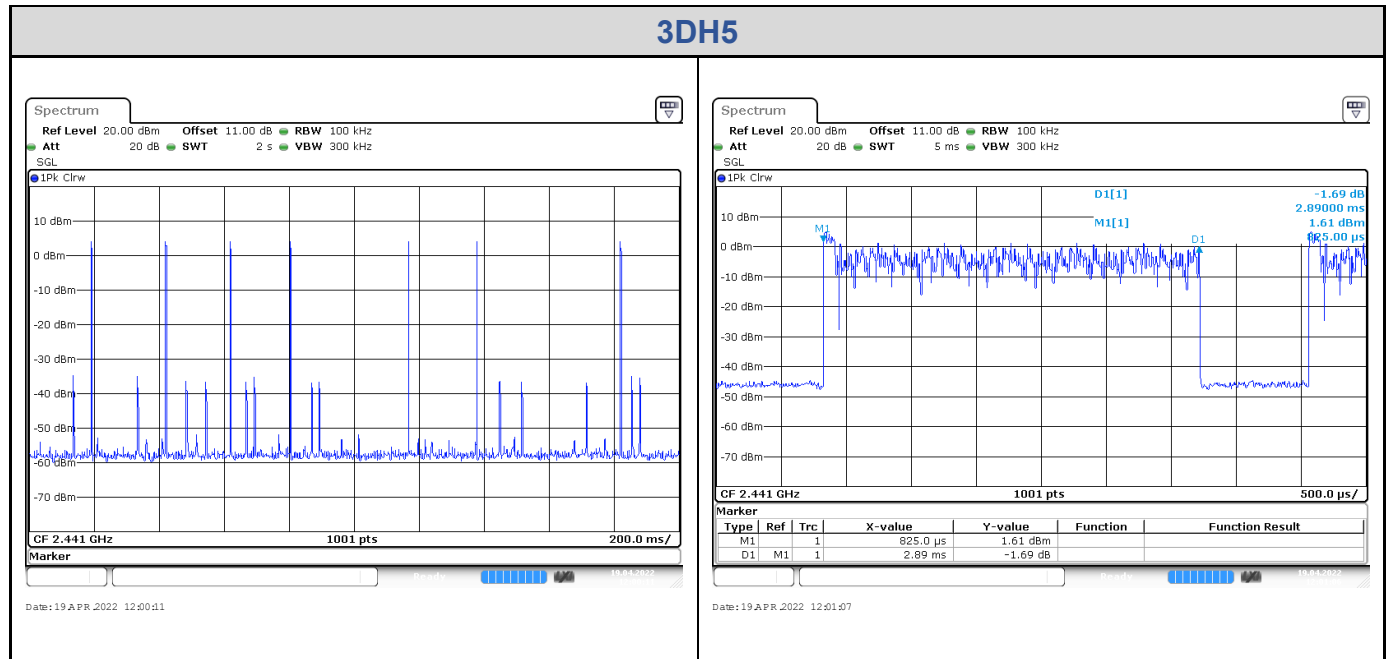

## Appendix B: Test Results of Radiated Spurious Emissions & Mains

### Conducted Emission Test


#### Band Edges, 2.31GHz ~ 2.9GHz

#### GFSK


##### Low Channel (Horizontal) Peak



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

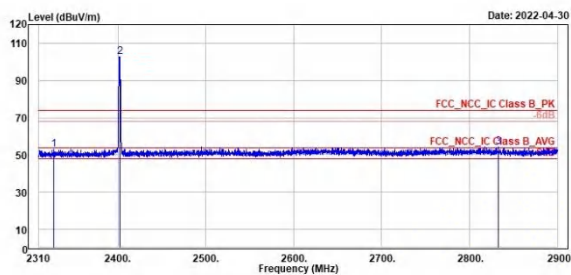

TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

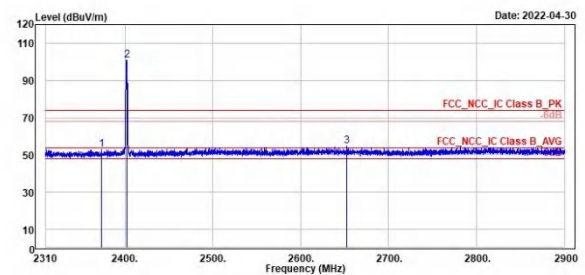


**GFSK**

**Low Channel (Horizontal) Average**



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

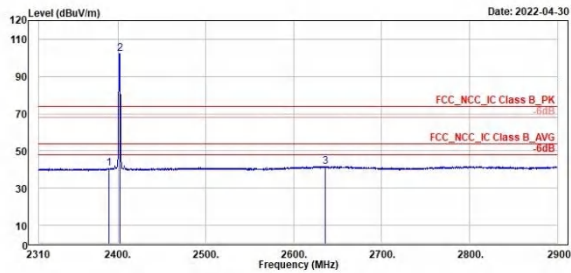


| Freq | Level   | Read   | Level | Factor | Limit | Over   | APos | TPos | Remark  | Pol/Phase  | Note |
|------|---------|--------|-------|--------|-------|--------|------|------|---------|------------|------|
| MHz  | dBuV/m  | dBuV   | dB/m  | dBuV/m | dB    | cm     | cm   | deg  |         |            |      |
| 1    | 2389.41 | 40.50  | 2.92  | 37.58  | 54.00 | -13.50 | 100  | 274  | Average | Horizontal |      |
| 2 *  | 2402.00 | 102.12 | 64.50 | 37.62  | 54.00 | 48.12  | 100  | 274  | Average | Horizontal |      |
| 3    | 2635.56 | 41.74  | 3.55  | 38.19  | 54.00 | -12.26 | 100  | 274  | Average | Horizontal |      |

**Low Channel (Vertical) Average**



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

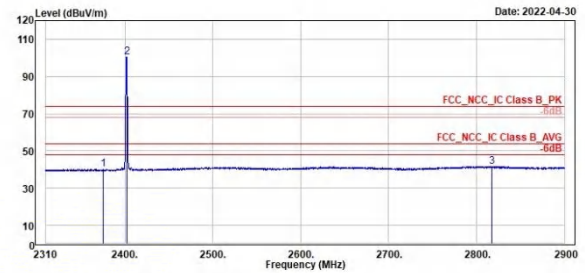


| Freq | Level   | Read   | Level | Factor | Limit | Over   | APos | TPos | Remark  | Pol/Phase | Note |
|------|---------|--------|-------|--------|-------|--------|------|------|---------|-----------|------|
| MHz  | dBuV/m  | dBuV   | dB/m  | dBuV/m | dB    | cm     | cm   | deg  |         |           |      |
| 1    | 2375.64 | 40.12  | 2.83  | 37.29  | 54.00 | -13.88 | 100  | 108  | Average | Vertical  |      |
| 2 *  | 2402.00 | 100.46 | 63.14 | 37.32  | 54.00 | 46.46  | 100  | 108  | Average | Vertical  |      |
| 3    | 2817.52 | 41.66  | 3.46  | 38.20  | 54.00 | -12.34 | 100  | 108  | Average | Vertical  |      |

**GFSK**

**High Channel (Horizontal) Peak**




TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

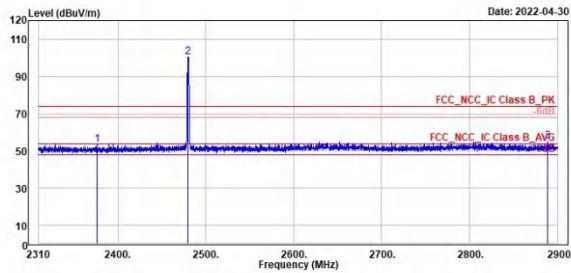

| Freq | Level   | Read   | Level | Factor | Limit | Over   | APos | TPos     | Remark     | Pol/Phase | Note |
|------|---------|--------|-------|--------|-------|--------|------|----------|------------|-----------|------|
| MHz  | dBuV/m  | dBuV   | dB/m  | dBuV/m | dB    | dB     | cm   | deg      |            |           |      |
| 1    | 2376.20 | 53.21  | 15.67 | 37.54  | 74.00 | -20.79 | 212  | 210 Peak | Horizontal |           |      |
| 2 *  | 2488.00 | 100.58 | 62.99 | 37.59  | 74.00 | 26.58  | 212  | 210 Peak | Horizontal |           |      |
| 3    | 2888.67 | 55.04  | 16.81 | 38.23  | 74.00 | -18.96 | 212  | 210 Peak | Horizontal |           |      |



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

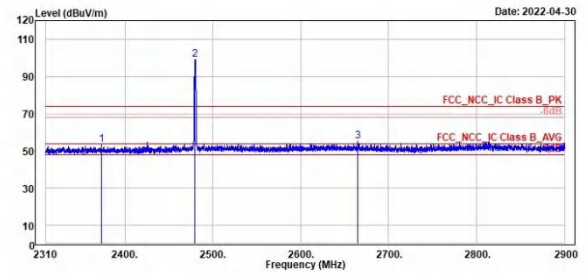


| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos     | Remark   | Pol/Phase | Note |
|------|---------|-------|-------|--------|-------|--------|------|----------|----------|-----------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | dB     | cm   | deg      |          |           |      |
| 1    | 2373.48 | 53.21 | 15.93 | 37.28  | 74.00 | -20.79 | 100  | 113 Peak | Vertical |           |      |
| 2 *  | 2488.00 | 98.88 | 61.11 | 37.69  | 74.00 | 24.88  | 100  | 113 Peak | Vertical |           |      |
| 3    | 2665.06 | 55.09 | 17.14 | 37.95  | 74.00 | -18.91 | 100  | 113 Peak | Vertical |           |      |

**GFSK**

**High Channel (Horizontal) Average**



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

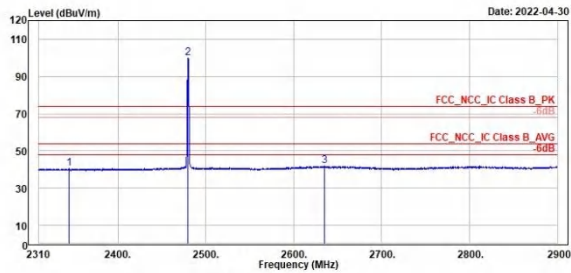


| Freq | Level   | Read   | Level | Factor | Limit | Over   | APos | TPos | Remark  | Pol/Phase  | Note |
|------|---------|--------|-------|--------|-------|--------|------|------|---------|------------|------|
| MHz  | dBuV/m  | dBuV   | dB/m  | dBuV/m | dB    | cm     | deg  |      |         |            |      |
| 1    | 2344.69 | 40.40  | 2.96  | 37.44  | 54.00 | -13.60 | 212  | 210  | Average | Horizontal |      |
| 2 *  | 2480.00 | 100.10 | 62.51 | 37.59  | 54.00 | 46.10  | 212  | 210  | Average | Horizontal |      |
| 3    | 2635.33 | 41.76  | 3.57  | 38.19  | 54.00 | -12.24 | 212  | 210  | Average | Horizontal |      |

**High Channel (Vertical) Average**



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

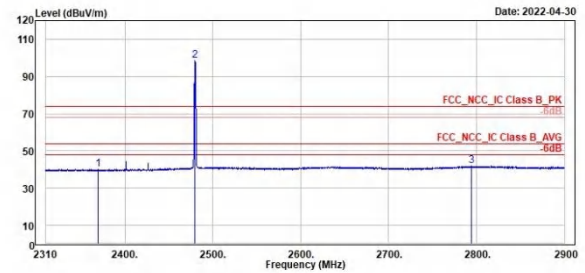


| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark  | Pol/Phase | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|---------|-----------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |         |           |      |
| 1    | 2369.71 | 40.22 | 2.94  | 37.28  | 54.00 | -13.78 | 100  | 113  | Average | Vertical  |      |
| 2 *  | 2480.00 | 90.37 | 60.68 | 37.69  | 54.00 | 44.37  | 100  | 113  | Average | Vertical  |      |
| 3    | 2793.92 | 41.77 | 3.61  | 38.16  | 54.00 | -12.23 | 100  | 113  | Average | Vertical  |      |

**8DPSK**

**Low Channel (Horizontal) Peak**




TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

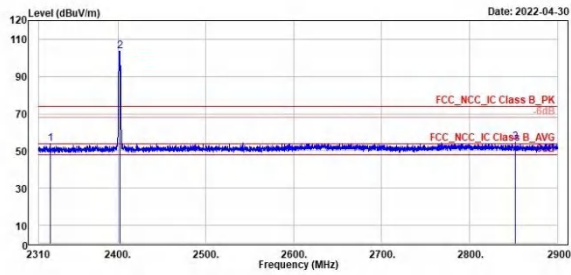

| Peak | Freq    | Level  | Read  | Level | Factor | Limit  | Over | APos | TPos | Remark     | Pol/Phase | Note |
|------|---------|--------|-------|-------|--------|--------|------|------|------|------------|-----------|------|
|      | MHz     | dBuV/m | dBuV  | dB/m  | dBuV/m | dB     | dB   | cm   | deg  |            |           |      |
| 1    | 2322.98 | 53.98  | 16.61 | 37.37 | 74.00  | -20.02 | 100  | 235  | Peak | Horizontal |           |      |
| 2 *  | 2402.00 | 105.70 | 66.88 | 37.62 | 74.00  | 29.70  | 100  | 235  | Peak | Horizontal |           |      |
| 3    | 2852.21 | 54.54  | 16.49 | 38.05 | 74.00  | -19.46 | 100  | 235  | Peak | Horizontal |           |      |



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

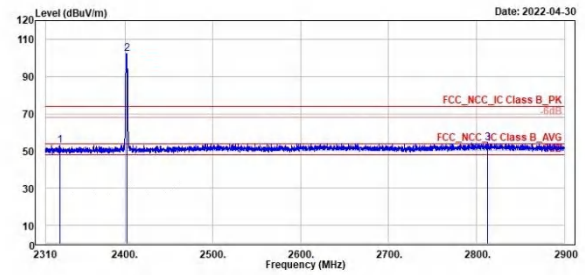


| Peak | Freq    | Level  | Read  | Level | Factor | Limit  | Over | APos | TPos | Remark   | Pol/Phase | Note |
|------|---------|--------|-------|-------|--------|--------|------|------|------|----------|-----------|------|
|      | MHz     | dBuV/m | dBuV  | dB/m  | dBuV/m | dB     | dB   | cm   | deg  |          |           |      |
| 1    | 2325.81 | 52.96  | 15.88 | 37.08 | 74.00  | -21.04 | 100  | 106  | Peak | Vertical |           |      |
| 2 *  | 2402.00 | 102.16 | 64.84 | 37.32 | 74.00  | 28.16  | 100  | 106  | Peak | Vertical |           |      |
| 3    | 2812.21 | 54.16  | 15.97 | 38.19 | 74.00  | -19.84 | 100  | 106  | Peak | Vertical |           |      |

**8DPSK**

**Low Channel (Horizontal) Average**



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

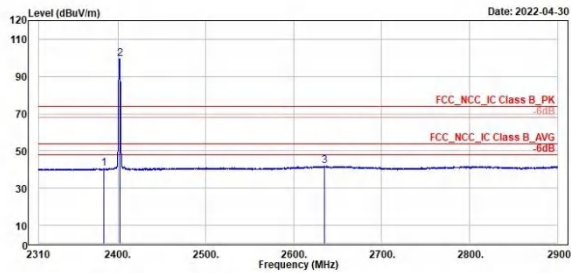


| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark  | Pol/Phase  | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|---------|------------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |         |            |      |
| 1    | 2383.75 | 40.52 | 2.95  | 37.57  | 54.00 | -13.48 | 100  | 235  | Average | Horizontal |      |
| 2 *  | 2402.00 | 99.40 | 61.78 | 37.62  | 54.00 | 45.40  | 100  | 235  | Average | Horizontal |      |
| 3    | 2634.62 | 41.81 | 3.62  | 38.19  | 54.00 | -12.19 | 100  | 235  | Average | Horizontal |      |

**Low Channel (Vertical) Average**



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

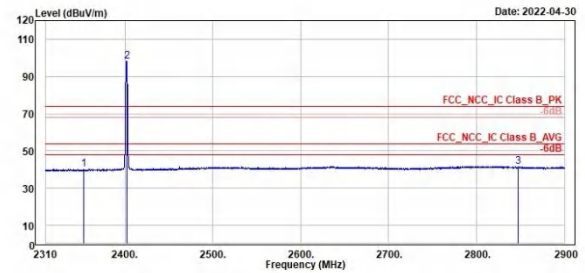


| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark  | Pol/Phase | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|---------|-----------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |         |           |      |
| 1    | 2353.42 | 40.37 | 3.11  | 37.26  | 54.00 | -13.63 | 100  | 106  | Average | Vertical  |      |
| 2 *  | 2402.00 | 98.03 | 60.71 | 37.32  | 54.00 | 44.03  | 100  | 106  | Average | Vertical  |      |
| 3    | 2847.37 | 41.72 | 3.49  | 38.23  | 54.00 | -12.28 | 100  | 106  | Average | Vertical  |      |

**8DPSK**

**High Channel (Horizontal) Peak**




TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

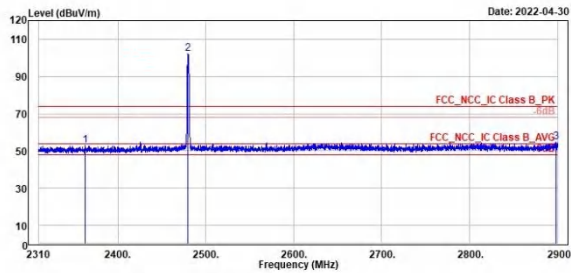

| Peak | Freq    | Level  | Read  | Level | Factor | Limit  | Over | APos | TPos | Remark     | Pol/Phase | Note |
|------|---------|--------|-------|-------|--------|--------|------|------|------|------------|-----------|------|
|      | MHz     | dBuV/m | dBuV  | dB/m  | dBuV/m | dB     | dB   | cm   | deg  |            |           |      |
| 1    | 2363.22 | 52.70  | 15.20 | 37.50 | 74.00  | -21.30 | 212  | 210  | Peak | Horizontal |           |      |
| 2 *  | 2480.00 | 102.08 | 64.49 | 37.59 | 74.00  | 28.08  | 212  | 210  | Peak | Horizontal |           |      |
| 3    | 2897.88 | 54.77  | 16.49 | 38.28 | 74.00  | -19.23 | 212  | 210  | Peak | Horizontal |           |      |



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

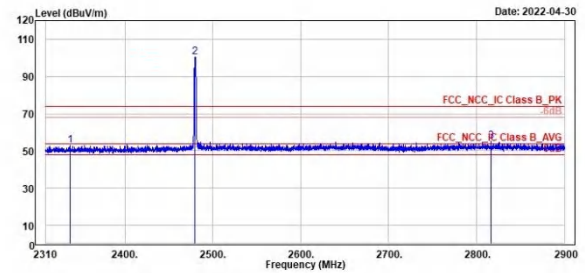


| Peak | Freq    | Level  | Read  | Level | Factor | Limit  | Over | APos | TPos | Remark   | Pol/Phase | Note |
|------|---------|--------|-------|-------|--------|--------|------|------|------|----------|-----------|------|
|      | MHz     | dBuV/m | dBuV  | dB/m  | dBuV/m | dB     | dB   | cm   | deg  |          |           |      |
| 1    | 2338.00 | 52.84  | 15.67 | 37.17 | 74.00  | -21.16 | 100  | 107  | Peak | Vertical |           |      |
| 2 *  | 2480.00 | 100.46 | 62.77 | 37.69 | 74.00  | 26.46  | 100  | 107  | Peak | Vertical |           |      |
| 3    | 2815.98 | 55.00  | 16.80 | 38.20 | 74.00  | -19.00 | 100  | 107  | Peak | Vertical |           |      |

**8DPSK**

**High Channel (Horizontal) Average**



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

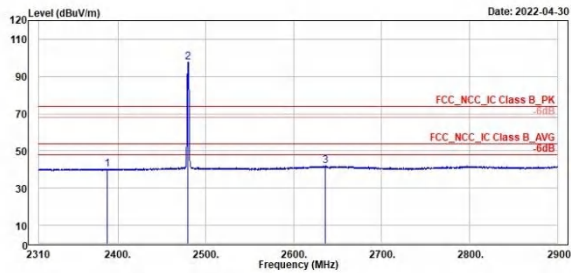


| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark  | Pol/Phase  | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|---------|------------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |         |            |      |
| 1    | 2387.53 | 40.37 | 2.79  | 37.58  | 54.00 | -13.63 | 212  | 210  | Average | Horizontal |      |
| 2 *  | 2480.00 | 97.79 | 60.20 | 37.59  | 54.00 | 43.79  | 212  | 210  | Average | Horizontal |      |
| 3    | 2636.27 | 41.91 | 3.72  | 38.19  | 54.00 | -12.09 | 212  | 210  | Average | Horizontal |      |

**High Channel (Vertical) Average**



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

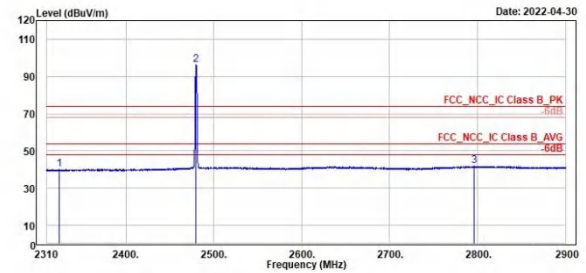

| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark  | Pol/Phase | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|---------|-----------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |         |           |      |
| 1    | 2324.63 | 40.19 | 3.11  | 37.08  | 54.00 | -13.81 | 100  | 107  | Average | Vertical  |      |
| 2 *  | 2480.00 | 96.15 | 58.46 | 37.69  | 54.00 | 42.15  | 100  | 107  | Average | Vertical  |      |
| 3    | 2795.81 | 41.88 | 3.72  | 38.16  | 54.00 | -12.12 | 100  | 107  | Average | Vertical  |      |


## Spurious Emissions, Tx Mode, 9kHz ~ 30MHz

### GFSK

#### Low Channel(Open) 9kHz~150kHz




TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenjiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

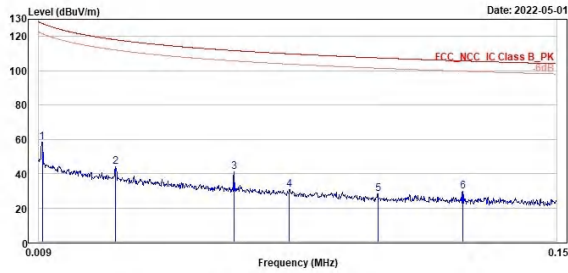

| Freq | Level  | Read  | Level | Factor | Limit  | Over   | APos | TPos | Remark | Pol/Phase | Note |
|------|--------|-------|-------|--------|--------|--------|------|------|--------|-----------|------|
| MHz  | dBuV/m | dBuV  | dB/m  | dBuV/m | dB     | cm     | deg  |      |        |           |      |
| 1    | 0.01   | 58.36 | 40.65 | 17.71  | 127.60 | -69.24 | 100  | 162  | QP     | Open      |      |
| 2    | 0.03   | 44.02 | 24.51 | 19.51  | 118.05 | -74.03 | 100  | 162  | QP     | Open      |      |
| 3    | 0.06   | 40.83 | 21.79 | 19.04  | 111.72 | -70.89 | 100  | 274  | QP     | Open      |      |
| 4    | 0.08   | 30.76 | 12.05 | 18.71  | 109.84 | -79.08 | 100  | 123  | QP     | Open      |      |
| 5    | 0.10   | 28.12 | 9.90  | 18.22  | 107.48 | -79.36 | 100  | 141  | QP     | Open      |      |
| 6    | 0.12   | 29.85 | 11.54 | 18.31  | 105.70 | -75.85 | 100  | 320  | QP     | Open      |      |



TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenjiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

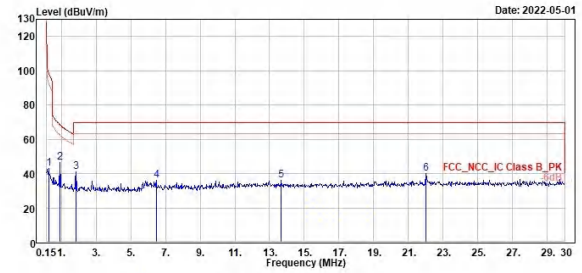


| Freq | Level  | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase | Note |
|------|--------|-------|-------|--------|-------|--------|------|------|--------|-----------|------|
| MHz  | dBuV/m | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |           |      |
| 1    | 0.27   | 42.92 | 24.10 | 18.82  | 98.99 | -56.07 | 100  | 94   | QP     | Open      |      |
| 2    | 0.93   | 46.31 | 27.08 | 19.23  | 68.27 | -21.96 | 100  | 73   | QP     | Open      |      |
| 3    | 1.85   | 40.98 | 21.59 | 19.39  | 69.50 | -28.52 | 100  | 233  | QP     | Open      |      |
| 4    | 6.48   | 35.91 | 15.94 | 19.97  | 69.50 | -33.59 | 100  | 172  | QP     | Open      |      |
| 5    | 13.67  | 36.12 | 14.36 | 21.76  | 69.50 | -33.38 | 100  | 212  | QP     | Open      |      |
| 6    | 22.00  | 39.85 | 17.56 | 22.29  | 69.50 | -29.65 | 100  | 66   | QP     | Open      |      |

GFSK

Low Channel(Close) 9kHz~150kHz



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

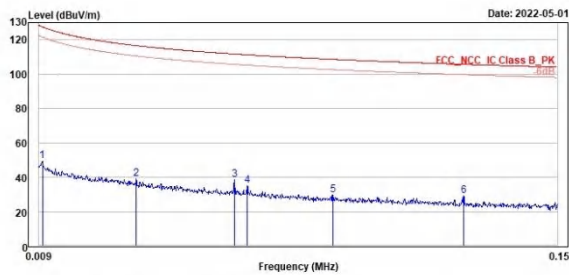


| Freq | Level  | Read  | Level | Factor | Limit  | Over   | APos | TPos | Remark | Pol/Phase | Note |
|------|--------|-------|-------|--------|--------|--------|------|------|--------|-----------|------|
| MHz  | dBuV/m | dBuV  | dB/m  | dBuV/m | dB     | cm     | deg  |      |        |           |      |
| 1    | 0.01   | 49.29 | 31.58 | 17.71  | 127.60 | -78.31 | 100  | 56   | QP     | Close     |      |
| 2    | 0.04   | 39.21 | 19.76 | 19.45  | 116.58 | -77.37 | 100  | 15   | QP     | Close     |      |
| 3    | 0.06   | 38.39 | 19.35 | 19.04  | 111.72 | -73.33 | 100  | 78   | QP     | Close     |      |
| 4    | 0.07   | 35.15 | 16.19 | 18.96  | 111.25 | -76.10 | 100  | 113  | QP     | Close     |      |
| 5    | 0.09   | 29.73 | 11.28 | 18.45  | 108.61 | -78.88 | 100  | 39   | QP     | Close     |      |
| 6    | 0.12   | 29.32 | 11.01 | 18.31  | 105.70 | -76.38 | 100  | 58   | QP     | Close     |      |

Low Channel(Close) 150kHz~30MHz



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

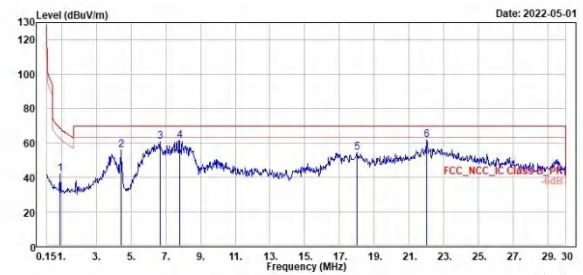

| Freq | Level  | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase | Note |
|------|--------|-------|-------|--------|-------|--------|------|------|--------|-----------|------|
| MHz  | dBuV/m | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |           |      |
| 1    | 0.93   | 42.13 | 22.00 | 19.23  | 68.27 | -26.14 | 100  | 161  | QP     | Close     |      |
| 2    | 4.42   | 55.83 | 36.42 | 19.41  | 69.50 | -13.67 | 100  | 138  | QP     | Close     |      |
| 3    | 6.66   | 60.55 | 40.50 | 20.05  | 69.50 | -8.95  | 100  | 55   | QP     | Close     |      |
| 4    | 7.79   | 61.45 | 40.93 | 20.52  | 69.50 | -8.05  | 100  | 346  | QP     | Close     |      |
| 5    | 18.00  | 54.42 | 32.36 | 22.06  | 69.50 | -15.08 | 100  | 142  | QP     | Close     |      |
| 6    | 22.00  | 61.61 | 39.32 | 22.29  | 69.50 | -7.89  | 100  | 67   | QP     | Close     |      |


## Spurious Emissions, Tx Mode, 30MHz ~ 1GHz

### GFSK

#### Low Channel (Horizontal)




TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

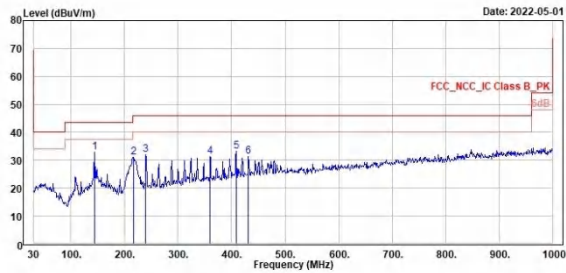

|   | Freq   | Level  | Read  | Level | Factor | Limit  | Over | APos | TPos | Remark     | Pol/Phase | Note |
|---|--------|--------|-------|-------|--------|--------|------|------|------|------------|-----------|------|
|   | MHz    | dBuV/m | dBuV  | dB/m  | dBuV/m | dB     | cm   | deg  |      |            |           |      |
| 1 | 143.49 | 32.96  | 38.95 | -5.99 | 43.50  | -10.54 | 200  | 241  | QP   | Horizontal |           |      |
| 2 | 216.24 | 31.11  | 39.14 | -8.03 | 46.00  | -14.89 | 300  | 333  | QP   | Horizontal |           |      |
| 3 | 239.52 | 31.92  | 38.66 | -6.74 | 46.00  | -14.08 | 320  | 173  | QP   | Horizontal |           |      |
| 4 | 359.80 | 31.40  | 35.05 | -3.65 | 46.00  | -14.60 | 100  | 142  | QP   | Horizontal |           |      |
| 5 | 408.30 | 33.04  | 35.85 | -2.81 | 46.00  | -12.96 | 200  | 152  | QP   | Horizontal |           |      |
| 6 | 431.58 | 31.26  | 33.54 | -2.28 | 46.00  | -14.74 | 200  | 154  | QP   | Horizontal |           |      |



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

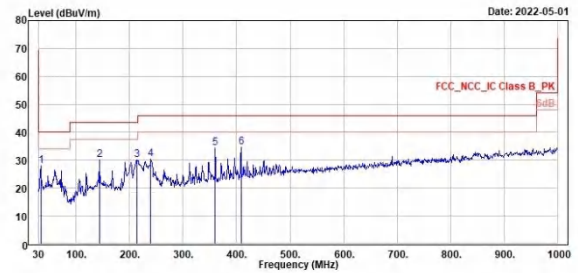


|   | Freq   | Level  | Read  | Level | Factor | Limit  | Over | APos | TPos | Remark   | Pol/Phase | Note |
|---|--------|--------|-------|-------|--------|--------|------|------|------|----------|-----------|------|
|   | MHz    | dBuV/m | dBuV  | dB/m  | dBuV/m | dB     | cm   | deg  |      |          |           |      |
| 1 | 33.88  | 28.11  | 35.23 | -7.12 | 40.00  | -11.89 | 100  | 226  | QP   | Vertical |           |      |
| 2 | 143.49 | 30.22  | 36.21 | -5.99 | 43.50  | -13.28 | 100  | 70   | QP   | Vertical |           |      |
| 3 | 214.30 | 30.01  | 38.06 | -8.05 | 43.50  | -13.49 | 200  | 10   | QP   | Vertical |           |      |
| 4 | 239.52 | 30.32  | 37.06 | -6.74 | 46.00  | -15.68 | 200  | 197  | QP   | Vertical |           |      |
| 5 | 359.80 | 34.25  | 37.90 | -3.65 | 46.00  | -11.75 | 100  | 165  | QP   | Vertical |           |      |
| 6 | 408.30 | 34.74  | 37.55 | -2.81 | 46.00  | -11.26 | 400  | 33   | QP   | Vertical |           |      |

## Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


### GFSK

#### Low Channel (Horizontal)

#### Low Channel (Vertical)

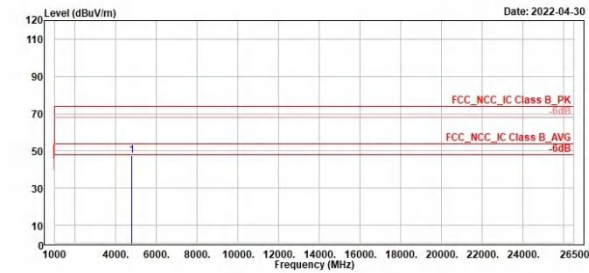

| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase  | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|------------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |            |      |
| 1    | 4884.00 | 47.33 | 56.35 | -9.02  | 74.00 | -26.67 | 291  | 360  | Peak   | Horizontal |      |

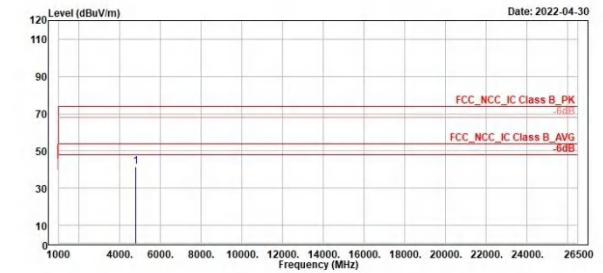

| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|-----------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |           |      |
| 1    | 4884.00 | 41.72 | 51.13 | -9.41  | 74.00 | -32.28 | 100  | 111  | Peak   | Vertical  |      |


**GFSK**

**Middle Channel (Horizontal)**

**Middle Channel (Vertical)**




TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

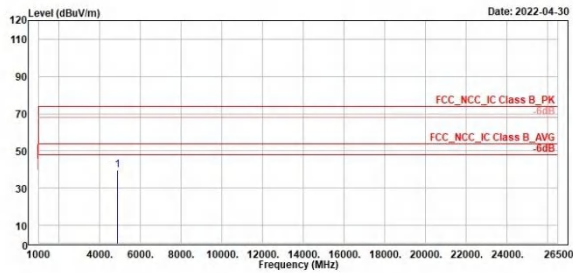

| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase  | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|------------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |            |      |
| 1    | 4882.00 | 39.76 | 48.75 | -8.99  | 74.00 | -34.24 | 100  | 111  | Peak   | Horizontal |      |



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

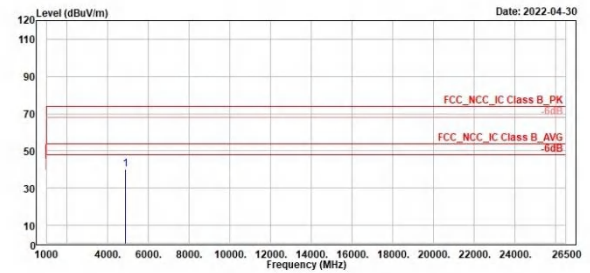

| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|-----------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |           |      |
| 1    | 4882.00 | 39.95 | 49.30 | -9.35  | 74.00 | -34.05 | 194  | 360  | Peak   | Vertical  |      |


**GFSK**

**High Channel (Horizontal)**

**High Channel (Vertical)**




TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

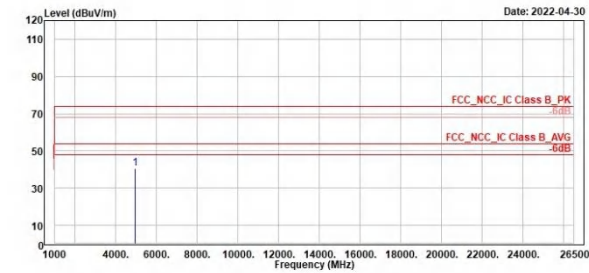

| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase  | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|------------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |            |      |
| 1    | 4960.00 | 40.80 | 49.69 | -8.89  | 74.00 | -33.20 | 144  | 360  | Peak   | Horizontal |      |



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

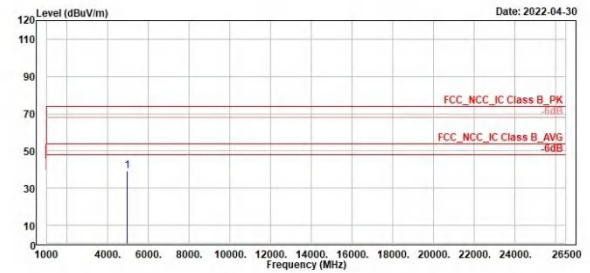

| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|-----------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |           |      |
| 1    | 4960.00 | 39.17 | 48.44 | -9.27  | 74.00 | -34.83 | 200  | 42   | Peak   | Vertical  |      |


**8DPSK**

**Low Channel (Horizontal)**

**Low Channel (Vertical)**




TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

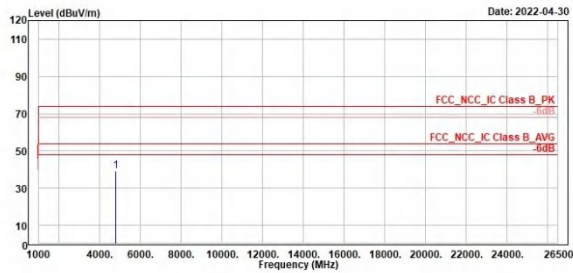

| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase  | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|------------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |            |      |
| 1    | 4884.00 | 39.43 | 48.45 | -9.02  | 74.00 | -34.57 | 100  | 111  | Peak   | Horizontal |      |



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

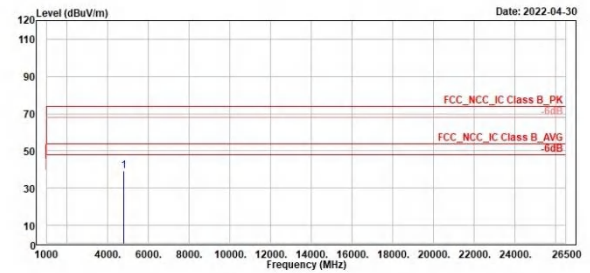


| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|-----------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |           |      |
| 1    | 4884.00 | 39.29 | 48.70 | -9.41  | 74.00 | -34.71 | 200  | 334  | Peak   | Vertical  |      |

**8DPSK**

**Middle Channel (Horizontal)**



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

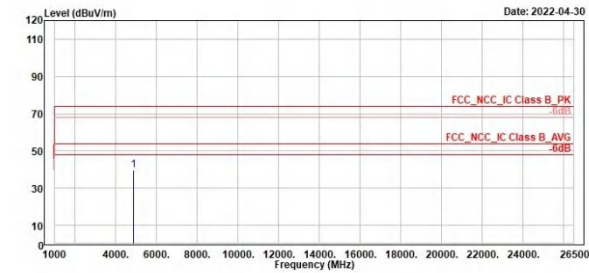


| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase  | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|------------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |            |      |
| 1    | 4882.00 | 39.56 | 48.55 | -8.99  | 74.00 | -34.44 | 248  | 360  | Peak   | Horizontal |      |

**Middle Channel (Vertical)**



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

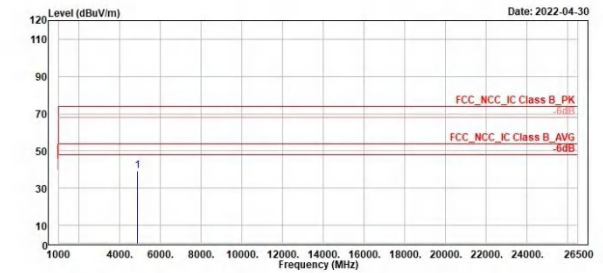

| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|-----------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |           |      |
| 1    | 4882.00 | 39.21 | 48.56 | -9.35  | 74.00 | -34.79 | 300  | 312  | Peak   | Vertical  |      |


**8DPSK**

**High Channel (Horizontal)**

**High Channel (Vertical)**




TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

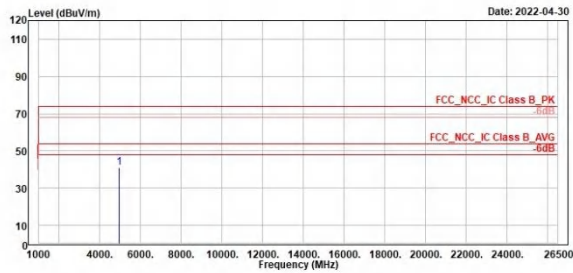

| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase  | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|------------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |            |      |
| 1    | 4960.00 | 40.84 | 49.73 | -8.89  | 74.00 | -33.16 | 111  | 360  | Peak   | Horizontal |      |



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

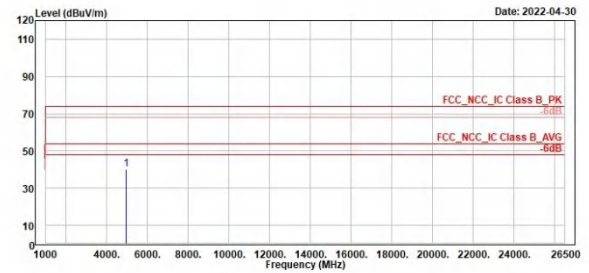

| Freq | Level   | Read  | Level | Factor | Limit | Over   | APos | TPos | Remark | Pol/Phase | Note |
|------|---------|-------|-------|--------|-------|--------|------|------|--------|-----------|------|
| MHz  | dBuV/m  | dBuV  | dB/m  | dBuV/m | dB    | cm     | deg  |      |        |           |      |
| 1    | 4960.00 | 40.11 | 49.38 | -9.27  | 74.00 | -33.89 | 218  | 360  | Peak   | Vertical  |      |

## Mains Conducted Emission, 150kHz ~ 30MHz


### Worst Band

#### (Line)

#### (Neutral)



TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-212-1000 Fax: +886-212-1322

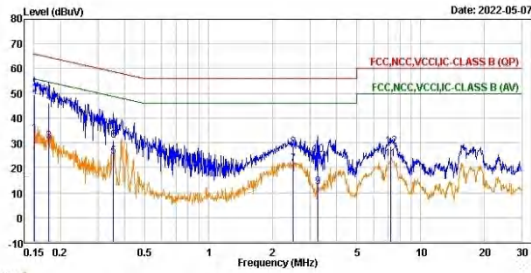


Trace: 1

|    | Freq | Level | Read   | Limit | Over  |                |           |      |
|----|------|-------|--------|-------|-------|----------------|-----------|------|
|    | MHz  | dBuV  | Level  | Line  | Limit | Remark         | Pol/Phase | Note |
|    |      | dBuV  | Factor | dB    | dB    |                |           |      |
| 1  | 0.15 | 33.93 | 24.32  | 9.61  | 55.96 | -22.03 Average | line1     |      |
| 2  | 0.15 | 49.71 | 40.10  | 9.61  | 65.96 | -16.25 QP      | line1     |      |
| 3  | 0.16 | 30.56 | 20.97  | 9.61  | 54.63 | -24.05 Average | line1     |      |
| 4  | 0.16 | 46.09 | 36.48  | 9.61  | 64.63 | -18.54 QP      | line1     |      |
| 5  | 0.36 | 24.63 | 15.01  | 9.62  | 48.84 | -24.21 Average | line1     |      |
| 6  | 0.36 | 31.17 | 21.55  | 9.62  | 58.84 | -27.67 QP      | line1     |      |
| 7  | 2.49 | 21.64 | 11.99  | 9.65  | 46.00 | -24.36 Average | line1     |      |
| 8  | 2.49 | 28.38 | 18.73  | 9.65  | 56.00 | -27.63 QP      | line1     |      |
| 9  | 3.26 | 12.31 | 2.64   | 9.67  | 46.00 | -33.69 Average | line1     |      |
| 10 | 3.26 | 25.19 | 15.52  | 9.67  | 56.00 | -30.81 QP      | line1     |      |
| 11 | 7.21 | 23.41 | 13.70  | 9.71  | 50.00 | -26.59 Average | line1     |      |
| 12 | 7.21 | 28.60 | 18.89  | 9.71  | 60.00 | -31.40 QP      | line1     |      |



TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-212-1000 Fax: +886-212-1322

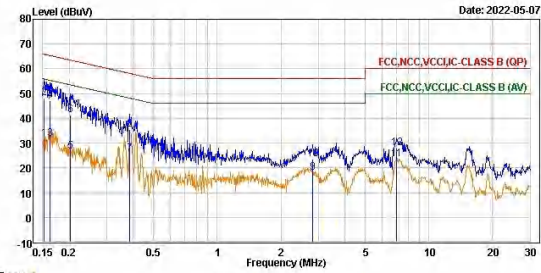

Trace: 1

|    | Freq | Level | Read   | Limit | Over  |                |           |      |
|----|------|-------|--------|-------|-------|----------------|-----------|------|
|    | MHz  | dBuV  | Level  | Line  | Limit | Remark         | Pol/Phase | Note |
|    |      | dBuV  | Factor | dB    | dB    |                |           |      |
| 1  | 0.15 | 31.81 | 22.22  | 9.59  | 55.88 | -24.07 Average | neutral   |      |
| 2  | 0.15 | 48.15 | 38.56  | 9.59  | 65.88 | -17.73 QP      | neutral   |      |
| 3  | 0.16 | 31.81 | 22.22  | 9.59  | 55.38 | -23.57 Average | neutral   |      |
| 4  | 0.16 | 47.89 | 37.50  | 9.59  | 65.38 | -18.29 QP      | neutral   |      |
| 5  | 0.20 | 26.78 | 17.19  | 9.59  | 53.47 | -26.69 Average | neutral   |      |
| 6  | 0.20 | 41.32 | 31.73  | 9.59  | 63.47 | -22.15 QP      | neutral   |      |
| 7  | 0.38 | 25.56 | 15.96  | 9.60  | 48.18 | -22.62 Average | neutral   |      |
| 8  | 0.38 | 35.46 | 25.86  | 9.60  | 58.18 | -22.72 QP      | neutral   |      |
| 9  | 2.83 | 17.99 | 8.34   | 9.65  | 46.00 | -28.01 Average | neutral   |      |
| 10 | 2.83 | 23.70 | 14.05  | 9.65  | 56.00 | -32.30 QP      | neutral   |      |
| 11 | 7.03 | 23.49 | 13.78  | 9.71  | 50.00 | -26.51 Average | neutral   |      |
| 12 | 7.03 | 28.08 | 18.37  | 9.71  | 60.00 | -31.92 QP      | neutral   |      |