



FCC Part 15B TEST REPORT

Report No: STS1512057E01

Issued for

LEAGOO Int'l Co.,Limited

No.1206-1209, Building B, Huihai Plaza, Heping Road, Longhua New District, Shenzhen, China

Product Name:	GSM MOBILE PHONE
Brand Name:	LEAGOO
Model No.:	C1
Series Model:	N/A
FCC ID:	2ADKW-LEAGOO-C1
Test Standard:	FCC Part 15B

Any reproduction of this document must be done in full. No single part of this document may be reproduced with permission from STS, All Test Data Presented in this report is only applicable to presented Test Park De/AL

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com







TEST RESULT CERTIFICATION

Applicant's name...... LEAGOO Int'l Co.,Limited

New District, Shenzhen, China

Manufacture's Name Shenzhen ODX Telecom Equipment Co., Ltd.

2nd Floor of Building B, HongLianYing Technology Park, No.286

Address...... of SiLi Road, DaBuXiang Community, Longhua New District,

Shenzhen, China

Product description

Product name...... GSM MOBILE PHONE

Brand name...... LEAGOO

Model and/or type reference...: C1

Standards..... FCC Part 15B

Test procedure: ANSI C63.4-2014

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....

Date of performance of tests .. 09 Dec. 2015 ~12 Dec. 2015

Date of Issue 14 Dec. 2015

Test Result Pass

Testing Engineer :

(Hakim Hou

Technical Manager

(Vita L

Authorized Signatory:

(Bovey Yang)







Table of Contents

1.	SUMMARY OF TEST RESULTS	5
	1.1 TEST FACTORY	5
	1.2 MEASUREMENT UNCERTAINTY	5
2.	GENERAL INFORMATION	6
	2.1 GENERAL DESCRIPTION OF EUT	6
	2.2 DESCRIPTION OF TEST MODES	7
	2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
	2.4 DESCRIPTION OF SUPPORT UNITS	8
	2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3.	EMC EMISSION TEST	10
	3.1 CONDUCTED EMISSION MEASUREMENT 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS 3.1.2 TEST PROCEDURE 3.1.3 DEVIATION FROM TEST STANDARD 3.1.4 TEST SETUP	10 10 11 11
	3.1.5 EUT OPERATING CONDITIONS 3.1.6 TEST RESULTS	11 12
	3.2 RADIATED EMISSION MEASUREMENT 3.2.1 RADIATED EMISSION LIMITS 3.2.2 TEST PROCEDURE 3.2.3 DEVIATION FROM TEST STANDARD 3.2.4 TEST SETUP 3.2.5 EUT OPERATING CONDITIONS 3.2.6 TEST RESULTS	14 14 15 15 16 17
4	PHOTOS OF TEST SETUP	22



Page 4 of 23 Report No.: STS1512057E01

Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	14 Dec. 2015	STS1512057E01	ALL	Initial Issue





Report No.: STS1512057E01

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

EMISSION					
Standard	Item Result		Remarks		
FCC 47 CFR Part 15 Subpart B	Conducted Emission	PASS	Meet Class B limit		
(10-1-05 Edition)	Radiated Emission	PASS	Meet Class B limit		

NOTE:

(1) " N/A" denotes test is not applicable in this Test Report

1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add.: 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,

Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649;

FCC Registration No.: 842334; IC Registration No.: 12108A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y \pm U , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2 , providing a level of confidence of approximately 95 % $^{\circ}$

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	±2.88dB
2	Conducted Emission (150KHz-30MHz)	±2.67dB
3	RF power,conducted	±0.70dB
4	Spurious emissions,conducted	±1.19dB
5	All emissions,radiated(<1G) 30MHz-200MHz	±2.83dB
6	All emissions,radiated(<1G) 200MHz-1000MHz	±2.94dB
7	All emissions,radiated(>1G)	±3.03dB
8	Temperature	±0.5°C
9	Humidity	±2%





2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	GSM MOBILE PHONE
Trade Name	LEAGOO
Model Name	C1
Series Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Power Rating	Adapter: Input: AC100-240V, 200mA, 50/60 Hz Output: DC 5V, 700mA Battery: Rated Voltage:3.7V capacity: 1000mAh
Hardware version number	XG05 V1.3
Software versioning number	LEAGOO_C1_V06_20150827
Connecting I/O Port(s)	USB Port*1/ Earphone *1

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB port do data communication with PC


For Conducted Test			
Final Test Mode Description			
Mode 1	USB port do data communication with PC		

For Radiated Test			
Final Test Mode Description			
Mode 1	USB port do data communication with PC		

NOTE:

- 1. Due to the different configuration and test, in this list only some worse mode. The worst test data of the worse modeis reported by this report.
- 2. We have be tested for all avaiable U.S. voltage and frequencies(For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

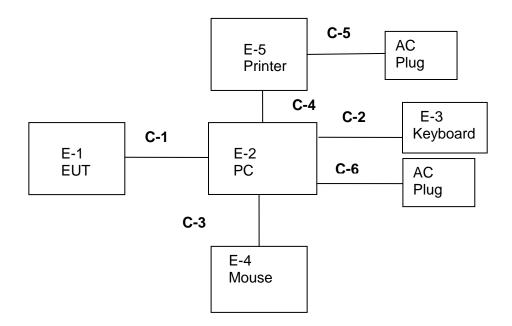

1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-36886288 Fax: 0755-36886277 Http://www.stsapp.com E-mail: sts@stsapp.com



2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-1	GSM MOBILE PHONE	LEAGOO	C1	N/A	EUT
E-2	PC	4CV428DQXR	500-320cx	4CV428DQYN	N/A
E-3	Keyboard	HP	PR1101U	DKUSB1B06Q42209FBK800	N/A
E-4	Mouse	MOTOSPEED	F66	697738-001	N/A
E-5	Printer	LENOVO	LJ2400L	LP02781702	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable (FTP)	NO	101cm	N/A
C-2	USB Cable NO 120cm		120cm	N/A
C-3	USB Cable (FTP)	NO	100cm	N/A
C-4	USB Cable (FTP)	NO	120cm	N/A
C-5	Printer Cable (FTP)	NO	100cm	N/A
C-6	PC Cable (FTP)	NO	120cm	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>"Length_"</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".
- (4) PC is the FCC DOC is approved.
- (5) "FTP" is means "Foiled Twisted Pair".



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESCI	101427	2015.10.25	2016.10.24
Loop Antenna	Daze	ZN30900N	SEL0097	2015.10.27	2016.10.26
Bilog Antenna	TESEQ	CBL6111D	34678	2015.11.25	2016.11.24
Horn Antenna	Schwarzbeck	BBHA 9120D(1201)	9120D-1343	2015.03.06	2016.03.05
PreAmplifier	Agilent	8449B	60538	2015.10.25	2016.10.24
Temperature & Humitidy	Mieo	HH660	N/A	2015.10.28	2016.10.27
Unversal radio communication tester	R&S	CMU200	111764	2015.10.25	2016.10.24
Spectrum Analyzer	Agilent	E4407B	MY50140340	2015.10.25	2016.10.24

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESPI	102086	2015.11.20	2016.11.19
LISN	R&S	ENV216	101242	2015.10.25	2016.10.24
LISN	EMCO	3810/2NM	000-23625	2015.10.25	2016.10.24
Absorbing clamp	R&S	MDS-21	100668	2015.10.27	2016.10.26



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits

	Class A (dBuV)		Class B	Standard	
FREQUENCY (MHz)	Quasi-peak	Average	Quasi-peak	Average	Standard
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting		
Attenuation	10 dB		
Start Frequency	0.15 MHz		
Stop Frequency	30 MHz		
IF Bandwidth	9 kHz		



3.1.2 TEST PROCEDURE


The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support

- a. equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
 - I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the
- cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

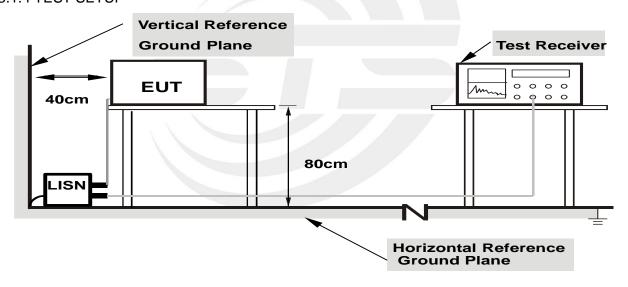

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.6 TEST RESULTS

EUT:	GSM MOBILE PHONE	Model Name.:	C1
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	L
Test Voltage:	DC 5V	Test Mode:	Mode 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1500	38.52	11.20	49.72	66.00	-16.28	QP
2	0.1500	14.20	11.20	25.40	56.00	-30.60	AVG
3	0.1847	39.89	10.00	49.89	64.27	-14.38	QP
4	0.1847	22.37	10.00	32.37	54.27	-21.90	AVG
5	0.5070	19.28	9.90	29.18	56.00	-26.82	QP
6	0.5070	5.82	9.90	15.72	46.00	-30.28	AVG
7	0.9400	18.27	9.92	28.19	56.00	-27.81	QP
8	0.9400	7.42	9.92	17.34	46.00	-28.66	AVG
9	4.3495	25.92	10.20	36.12	56.00	-19.88	QP
10	4.3495	13.30	10.20	23.50	46.00	-22.50	AVG
11	11.4361	21.75	10.37	32.12	60.00	-27.88	QP
12	11.4361	11.88	10.37	22.25	50.00	-27.75	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss - Pre-amplifier.

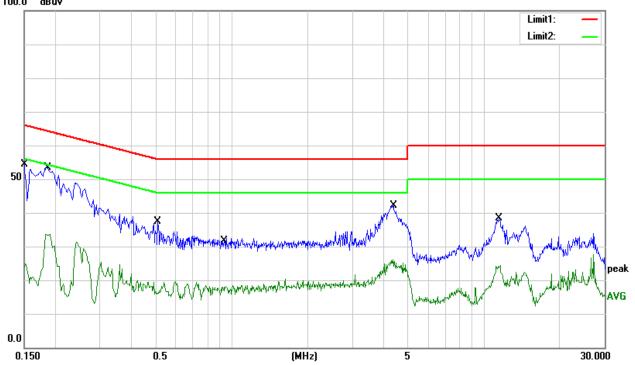




Page 13 of 23 Report No.: STS1512057E01

EUT:	GSM MOBILE PHONE	Model Name.:	C1
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	N
Test Voltage:	DC 5V	Test Mode:	Mode 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1520	38.03	10.96	48.99	65.89	-16.90	QP
2	0.1520	12.21	10.96	23.17	55.89	-32.72	AVG
3	0.2484	34.71	9.95	44.66	61.81	-17.15	QP
4	0.2484	16.72	9.95	26.67	51.81	-25.14	AVG
5	0.5664	17.52	9.93	27.45	56.00	-28.55	QP
6	0.5664	4.31	9.93	14.24	46.00	-31.76	AVG
7	4.8815	22.74	10.20	32.94	56.00	-23.06	QP
8	4.8815	14.41	10.20	24.61	46.00	-21.39	AVG
9	11.4305	21.91	10.30	32.21	60.00	-27.79	QP
10	11.4305	12.55	10.30	22.85	50.00	-27.15	AVG
11	26.5472	23.09	10.71	33.80	60.00	-26.20	QP
12	26.5472	19.42	10.71	30.13	50.00	-19.87	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss - Pre-amplifier. 100.0 dBuV

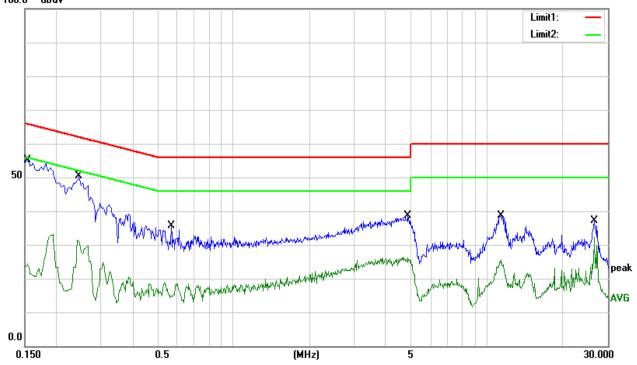



Report No.: STS1512057E01

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 Radiated Emission Limits

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.105(a), then the 15.109(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (d	BuV/m) (at 3M)	Class B (dBuV/m) (at 3M)		
PREQUENCY (MIN2)	PEAK	AVERAGE	PEAK	AVERAGE	
Above 1000	80	60	74	54	

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-36886288 Fax: 0755-36886277 Http://www.stsapp.com E-mail: sts@stsapp.com

Page 15 of 23 Report No.: STS1512057E01

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /10 Hz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz/RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter b. anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- the height of the antenna shall vary between 1m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector d. mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the e. EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


3.2.3 DEVIATION FROM TEST STANDARD

No deviation




3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

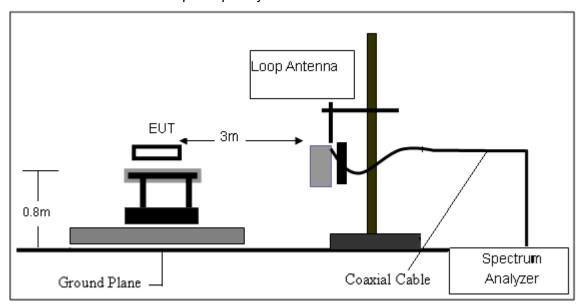


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

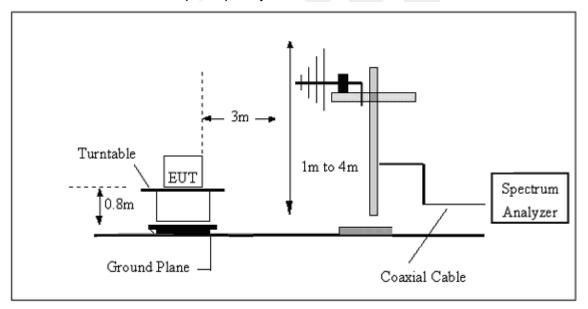



(C) Radiated Emission Test-Up Frequency Above 1GHz

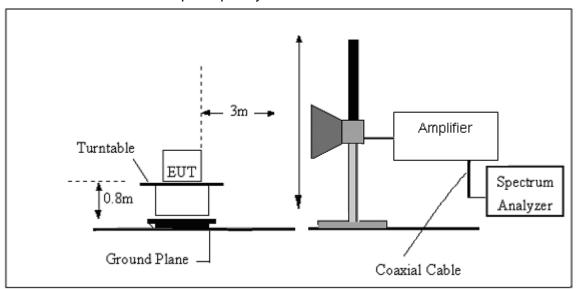

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: STS1512057E01



3.2.6 TEST RESULTS

Below 30MHz

EUT:	GSM MOBILE PHONE	Model Name.:	C1
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	N/A
Test Voltage:	DC 5V	Test Mode:	N/A

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.




Between 30-1000MHz

EUT:	GSM MOBILE PHONE	Model Name.:	C1
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	DC 5V	Test Mode:	Mode 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	77.0502	27.09	7.53	34.62	40.00	-5.38	QP
2	143.8292	22.63	12.17	34.80	43.50	-8.70	QP
3	180.0165	29.78	10.23	40.01	43.50	-3.49	QP
4	239.9873	24.61	11.81	36.42	46.00	-9.58	QP
5	276.1235	25.07	14.23	39.30	46.00	-6.70	QP
6	336.0350	22.80	15.98	38.78	46.00	-7.22	QP

Remark:

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Antenna Factor + Cable Loss.
- 3. N/A means All Data have pass Limit

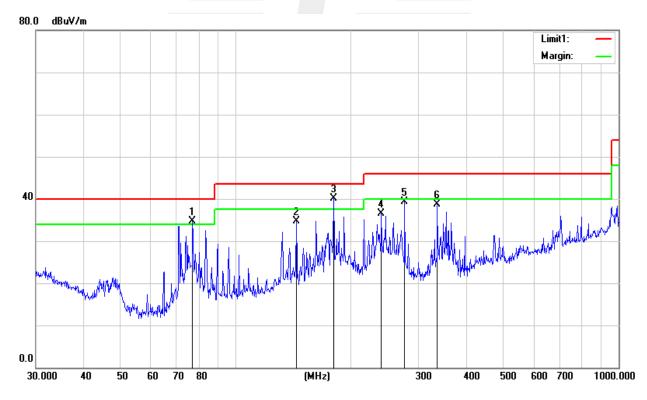




Page 20 of 23 Report No.: STS1512057E01

EUT:	GSM MOBILE PHONE	Model Name.:	C1
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	DC 5V	Test Mode:	Mode 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	70.8315	19.99	6.45	26.44	40.00	-13.56	QP
2	77.0503	19.47	7.53	27.00	40.00	-13.00	QP
3	143.8293	18.28	12.32	30.60	43.50	-12.90	QP
4	252.0627	18.94	13.97	32.91	46.00	-13.09	QP
5	336.0350	14.76	15.98	30.74	46.00	-15.26	QP
6	473.8346	15.04	19.77	34.81	46.00	-11.19	QP

Remark:

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Antenna Factor + Cable Loss.
- 3. N/A means All Data have pass Limit

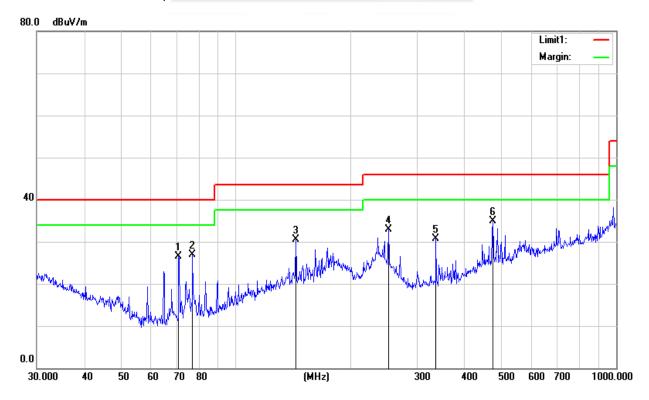

Report No.: STS1512057E01



Above 1GHz

The worst test data above 1 GHz was showed as thefollow:

EUT:	GSM MOBILE PHONE	Model Name.:	C1
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Test Mode:	Mode 1

Freq.	Ant. Pol	Peak	AV	Ant./CL	Λotu	al Ec	Peak	AV	Peak	AV
(MHz)	H/V	Reading	Reading	CF	Actu	Actual Fs		Limit	margin	margin
		(dBuV)	(dBuV)	(dB)	Peak	Peak AV		(dBuV/m	(dBuV/m	(dBuV/
					(dBuV/m	(dBuV/m				
1097.52	Н	57.86	41.28	5.15	63.01	46.43	74.00	54.00	-10.99	-7.57
2866.67	Н	52.97	38.29	9.45	62.42	47.74	74.00	54.00	-11.58	-6.26
N/A										
1069.87	٧	52.56	37.55	5.15	57.71	42.70	74.00	54.00	-16.29	-11.30
2896.55	٧	49.67	32.14	9.45	59.12	41.59	74.00	54.00	-14.88	-12.41
N/A									·	

Notes:


- 1. Measuring frequencies from 1 GHz to 13GHz.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode of the emission shown in Actual FS column.
- 3. The frequency that above 3GHz is mainly from the environment noise.



4. PHOTOS OF TEST SETUP

Radiated Measurement Photos

30MHz-1GHz

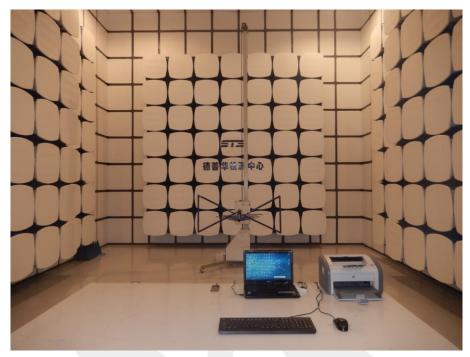

Above 1GHz





Conducted Measurement Photos



* * * * END OF THE REPORT * * * *