

FCC Report

Bluetooth 4.0

Product Description: Smart Phone Projector

Trade Mark: Akyumen

Model No.: Hawk01, Hawk02, Hawk03, Hawk04, Hawk05, Hawk06, Hawk07, Hawk08, Hawk09, Hawk10, Hawk11, Hawk12, Hawk13, Hawk14, Hawk15, Hawk16, Hawk17, Hawk18, Hawk19,

FCC ID: 2ADLD-HAWK01

Applicant: Akyumen Technologies Corp.

Address: 7401 Wiles Road, Suite 123 Coral Spring, FL 33067 USA

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2013

Test Date: 24 November ~ 08 December, 2014

Issued Date: 08 December, 2014

Test Result: Complied



James Wu
Laboratory Manager

The test result in this test report relate only to the tested samples in this report .

This report shall not be reproduced except in full without the written approval of TMC Rheinland Testing Services Corp Limited

2 Version

Version No.	Date	Description
00	08 December, 2014	Original

Prepared By:




Date:

08 December, 2014

Young Li
Project Engineer

Check By:



Date:

08 December, 2014

Dixon Hao
Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	6
5.4 TEST FACILITY	6
5.5 TEST LOCATION	6
6 TEST INSTRUMENTS LIST	7
7 MEASUREMENT DATA AND TEST RESULTS	8
7.1 ANTENNA REQUIREMENT	8
7.2 CONDUCTED EMISSIONS	9
7.3 CONDUCTED PEAK OUTPUT POWER	12
7.4 CHANNEL BANDWIDTH	14
7.5 POWER SPECTRAL DENSITY	16
7.6 BAND EDGE	18
7.6.1 Conducted Emission Method	18
7.6.2 Radiated Emission Method	19
7.7 SPURIOUS EMISSION	21
7.7.1 Conducted Emission Method	21
7.7.2 Radiated Emission Method	23
8 TEST SETUP PHOTO	28
9 EUT CONSTRUCTIONAL DETAILS	29

4 Test Summary

Test Item	Test Method	Result
Antenna requirement	15.203/15.247 (c)	Complied
AC Power Line Conducted Emission	15.207	Complied
Conducted Peak Output Power	15.247 (b)(3)	Complied
Channel Bandwidth	15.247 (a)(2)	Complied
Power Spectral Density	15.247 (e)	Complied
Band Edge	15.247(d)	Complied
Spurious Emission	15.205/15.209	Complied

Complied: The EUT has complied with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Akyumen Technologies Corp.
Address:	7401 Wiles Road, Suite 123 Coral Spring, FL 33067 USA
Manufacturer:	Akyumen Technologies Corp.
Address:	7401 Wiles Road, Suite 123 Coral Spring, FL 33067 USA

5.2 General Description of EUT

Product Name:	Smart Phone Projector
Brand Mark:	Akyumen
Model No.:	Hawk01, Hawk02, Hawk03, Hawk04, Hawk05, Hawk06, Hawk07, Hawk08, Hawk09, Hawk10, Hawk11, Hawk12, Hawk13, Hawk14, Hawk15, Hawk16, Hawk17, Hawk18, Hawk19,
Test model No.:	Hawk01
Software version:	V1.0
Hardware version:	V1.0
Bluetooth	
Bluetooth Version:	V4.0
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	40
Channel separation:	2MHz
Modulation type:	Frequency Hopping Spread Spectrum (FHSS)
Modulation technology:	GFSK
Antenna Type:	Integral Antenna
Antenna Gain:	0dBi (declare by Applicant)
AC Adapter:	Model: JHD-AP012C-050150AB Input: AC 100~240V 50/60Hz 0.35A Output: DC 5.0V 1.5A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
Lowest channel	2402
Middle channel	2442
Highest channel	2480

5.3 Test Mode

Bluetooth mode	Keep the EUT in communicating mode with Bluetooth device.
----------------	---

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

■ **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. to ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

■ **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

■ **Industry Canada (IC) —Registration No.: 9079A-1**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

6 Test Instruments list

Instrument	Manufacturer	Model No.	Inventory No.	Next Cal. Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 27 2015
Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jun. 30 2015
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 22 2015
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 26 2015
Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 27 2015
EMI Test Software	AUDIX	E3	N/A	N/A
Coaxial Cable	GTS	N/A	GTS213	Mar. 28 2015
Coaxial Cable	GTS	N/A	GTS211	Mar. 28 2015
Coaxial cable	GTS	N/A	GTS210	Mar. 28 2015
Coaxial Cable	GTS	N/A	GTS212	Mar. 28 2015
Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jun. 30 2015
Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jun. 30 2015
Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 26 2015
Band filter	Amindeon	82346	GTS219	Mar. 28 2015
Universal radio communication tester	Rohde & Schwarz	CMU200	GTS235	May 09 2015
Signal Generator	Rohde & Schwarz	SML03	GTS236	May 09 2015
Temp. Humidity/ Barometer	Oregon Scientific	BA-888	GTS248	May 09 2015
D.C. Power Supply	Insteck	PS-3030	GTS232	NA
Splitter	Agilent	11636B	GTS237	May 09 2015

Conducted Emission				
Instrument	Manufacturer	Model No.	Inventory No.	Next Cal. Date
Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 06 2015
EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jun. 30 2015
10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jun. 30 2015
Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jun. 30 2015
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jun. 30 2015
Coaxial Cable	GTS	N/A	GTS227	Jun. 30 2015
EMI Test Software	AUDIX	E3	N/A	N/A
Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 06 2015
EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jun. 30 2015

7 Measurement Data and Test Results

7.1 Antenna requirement

☞ Standard requirement

According to Standard: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

☞ EUT Antenna:

The antenna is unique integral antenna, the typical gain of the antenna is 0dBi.



7.2 Conducted Emissions

☞ Standard requirement

FCC Part15 C Section 15.207

☞ Test method

ANSI C63.4:2003

☞ Receiver set

RBW=9KHz, VBW=30KHz, Sweep time=auto


☞ Limit

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

☞ Test mode

Refer to section 5.3 for details

☞ Test setup

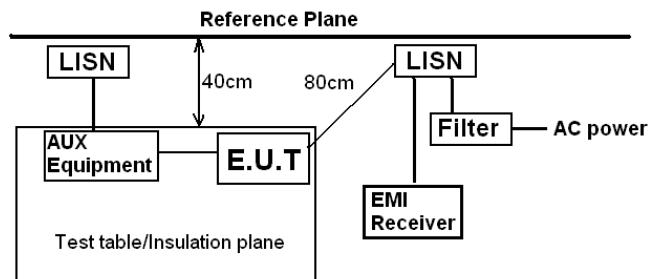

Remark:

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network

Test table height=0.8m


☞ Test mode

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

☞ Test Result

Complied

Test mode:	Bluetooth mode	Temperature:	24~26°C
Phase Polarity:	Line	Relative Humidity:	50~53%

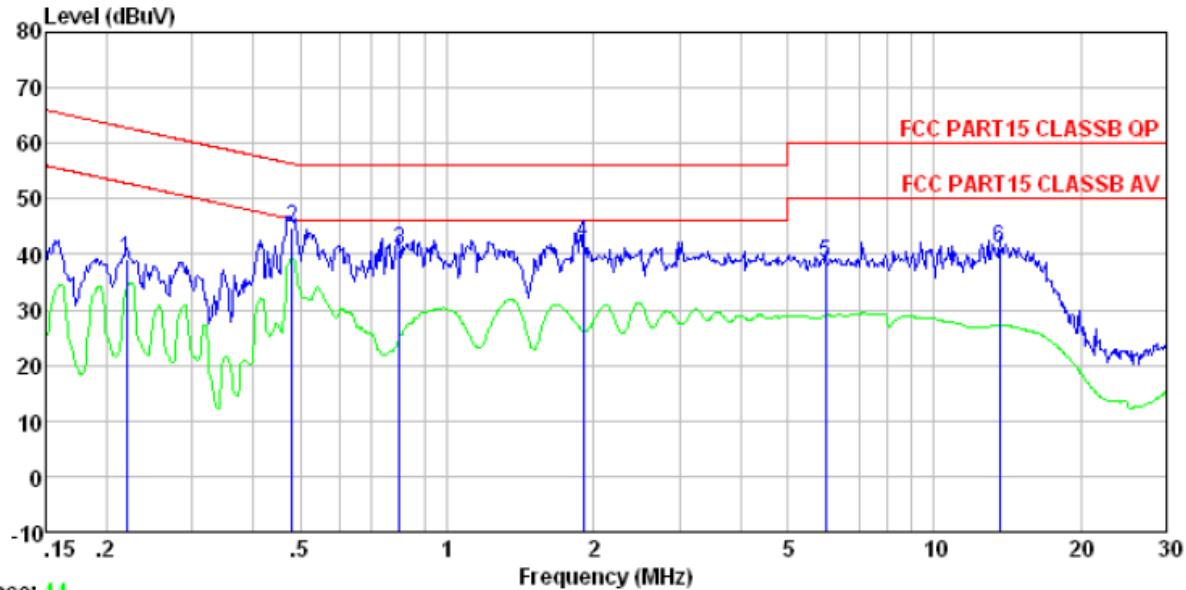


Trace: 44

Condition: FCC PART15 CLASSB QP LISN-2013 LINE

Test mode: Bluetooth4.0 mode

	Read Freq	LISN Level	Cable Factor	Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV		dB	dBuV	dBuV	dB	
1	0.220	38.74	0.13	0.12	38.99	62.83	-23.84	QP
2	0.481	44.63	0.12	0.11	44.86	56.32	-11.46	QP
3	0.800	40.43	0.14	0.13	40.70	56.00	-15.30	QP
4	1.908	41.77	0.12	0.14	42.03	56.00	-13.97	QP
5	5.993	38.13	0.22	0.16	38.51	60.00	-21.49	QP
6	13.623	40.62	0.31	0.21	41.14	60.00	-18.86	QP

Test mode:	Bluetooth mode	Temperature:	24~26°C
Phase Polarity:	Nertral	Relative Humidity:	50~53%

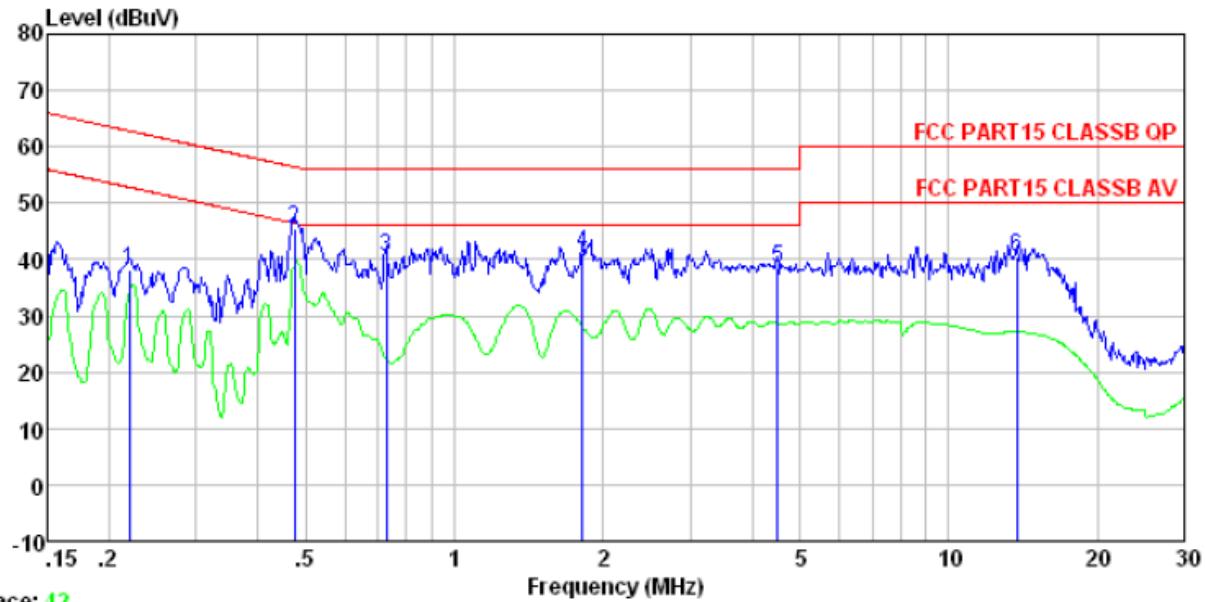

Condition: FCC PART15 CLASSB QP LISN-2013 NEUTRAL

Test mode: Bluetooth4.0 mode

Freq	Read	LISN	Cable	Limit	Over	Remark	
	MHz	Level	Factor	Loss	Level		
1	0.220	38.12	0.06	0.12	38.30	62.83	-24.53 QP
2	0.474	45.26	0.06	0.11	45.43	56.45	-11.02 QP
3	0.727	40.35	0.07	0.13	40.55	56.00	-15.45 QP
4	1.819	40.91	0.09	0.14	41.14	56.00	-14.86 QP
5	4.501	38.17	0.15	0.15	38.47	56.00	-17.53 QP
6	13.768	40.03	0.33	0.22	40.58	60.00	-19.42 QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

7.3 Conducted Peak Output Power

☞ **Standard requirement**

FCC Part15 C Section 15.247 (b)(3)

☞ **Test method**

ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03


☞ **Limit**

30dBm

☞ **Test mode**

Refer to section 5.3 for details

☞ **Test setup**

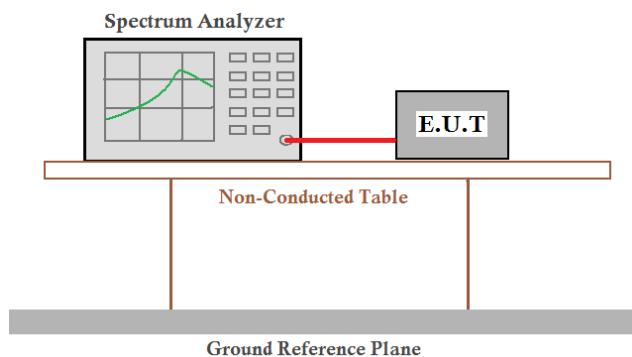

☞ **Test Result**

Complied


Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-2.54	30.00	Pass
Middle	-2.01	30.00	Pass
Highest	-2.21	30.00	Pass


Modulation

GFSK


Lowest channel:

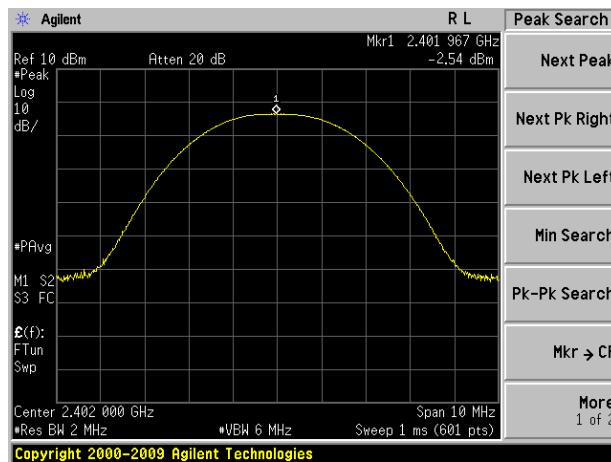

Middle channel:

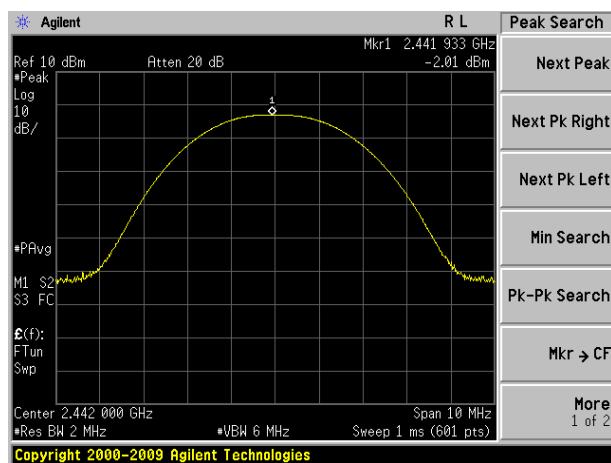

Highest channel:

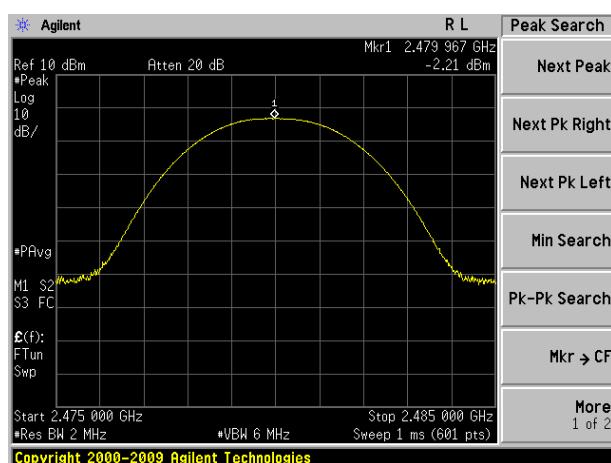

7.4 Channel Bandwidth

☞ **Standard requirement**

FCC Part15 C Section 15.247 (a)(2)

☞ **Test method**

ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03


☞ **Limit**

>500KHz

☞ **Test mode**

Refer to section 5.3 for details

☞ **Test setup**

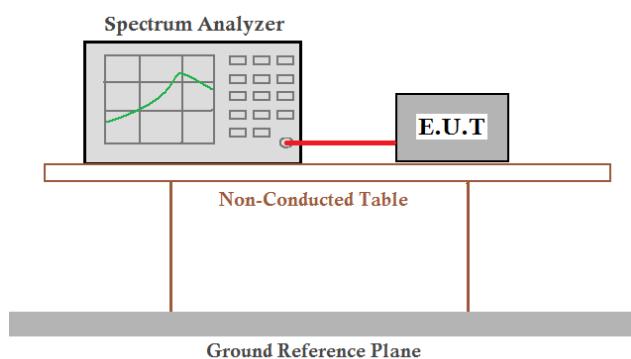

☞ **Test Result**

Complied


Measurement Data

Test channel	Channel Bandwidth (MHz)	Limit(KHz)	Result
Lowest	0.699	>500	Pass
Middle	0.701		
Highest	0.710		


Mode

GFSK


Lowest channel:

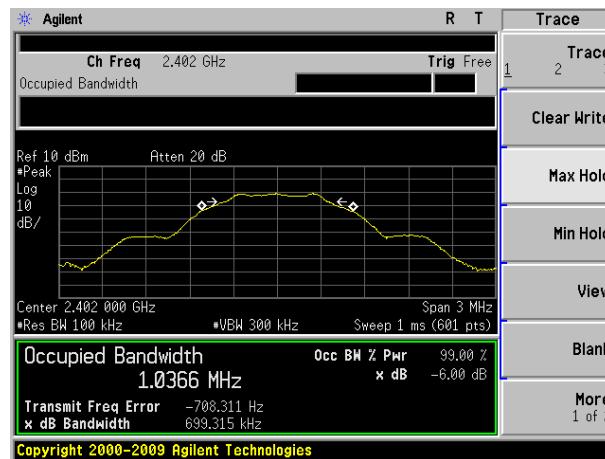

Middle channel:

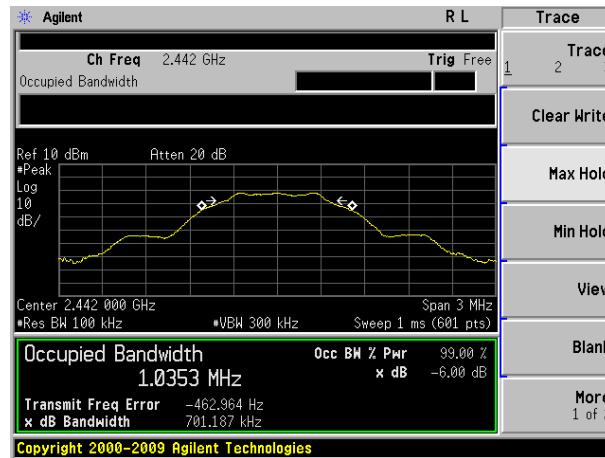

Highest channel:

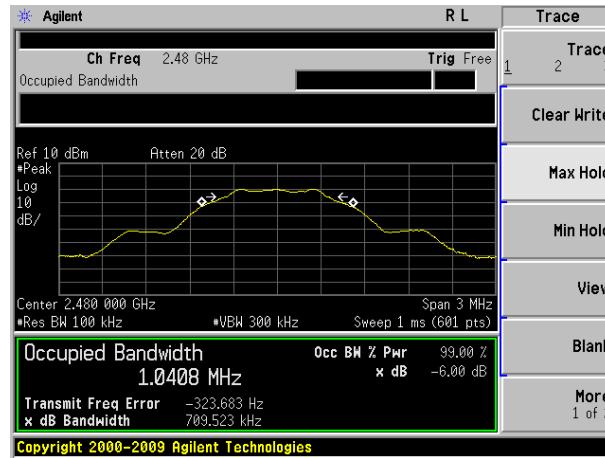

7.5 Power Spectral Density

☞ **Standard requirement**

FCC Part15 C Section 15.247 (e)

☞ **Test method**

ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03


☞ **Limit**

8dBm

☞ **Test mode**

Refer to section 5.3 for details

☞ **Test setup**

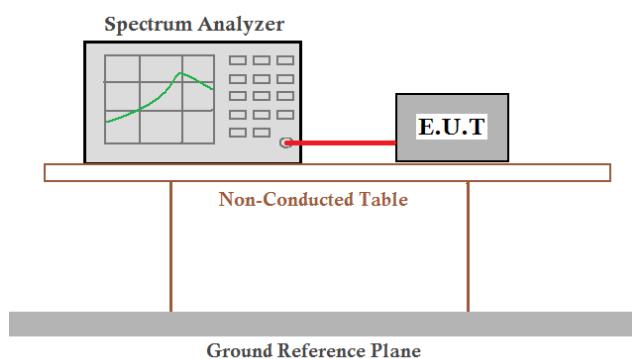

☞ **Test Result**

Complied


Measurement Data

Test channel	Power Spectral Density (dBm)	Limit(dBm/3kHz)	Result
Lowest	-5.86	8.00	Pass
Middle	-5.34		
Highest	-5.64		


Mode

GFSK

Lowest channel:

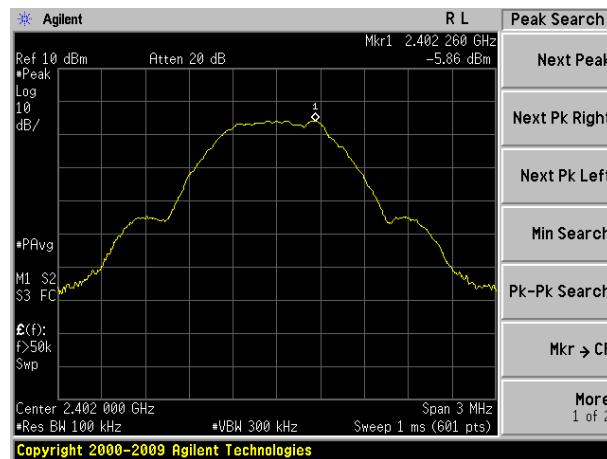

Middle channel:

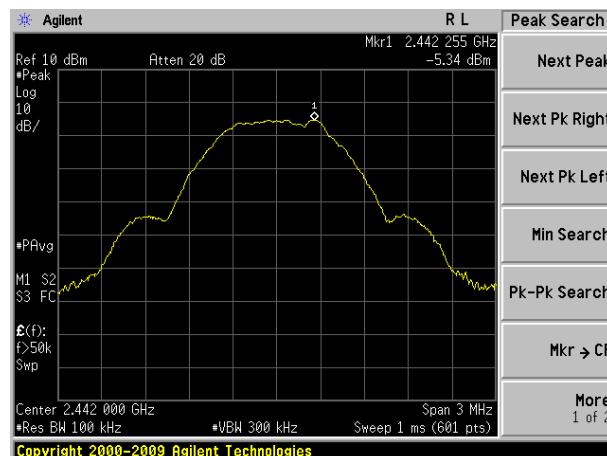

Highest channel:



7.6 Band Edge

7.6.1 Conducted Emission Method

☞ Test method

FCC Part15 C Section 15.247 (d)

☞ Test method

ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03

☞ Receiver set

RBW=100kHz, VBW=300kHz, Detector=Peak


☞ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

☞ Test mode

Refer to section 5.3 for details


☞ Test setup

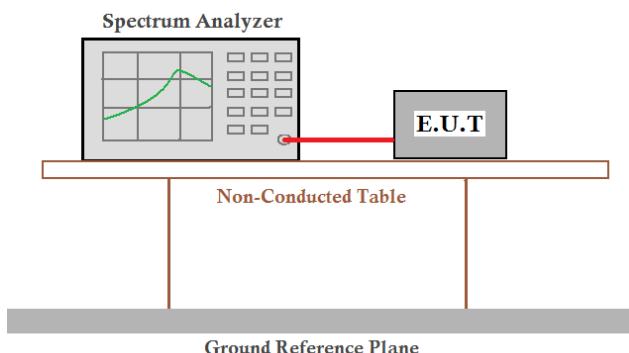

☞ Test Result


Complied

Mode

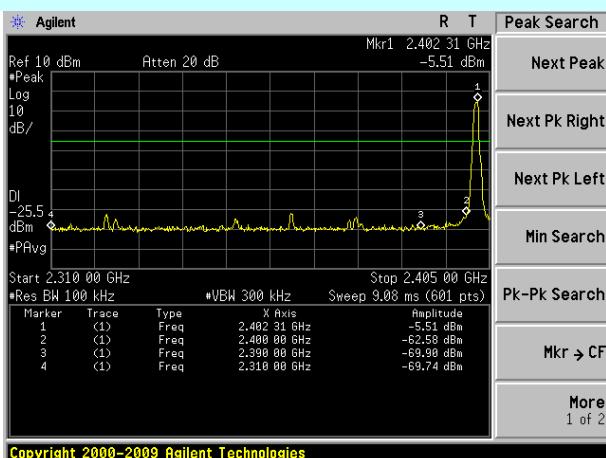

Lowest channel

GFSK

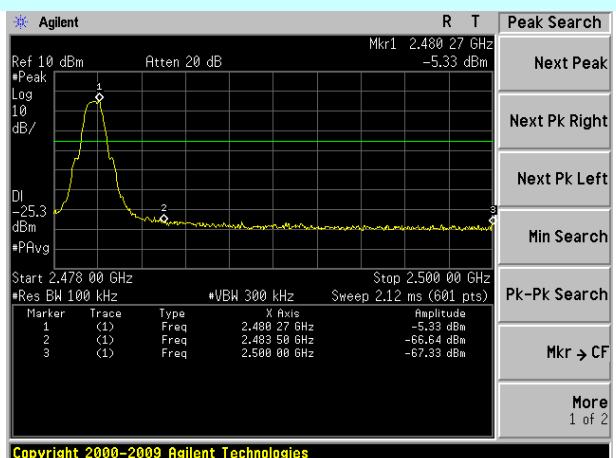

Highest channel

7.6.2 Radiated Emission Method

☛ Test method

FCC Part15 C Section 15.209 and 15.205

☛ Test method

ANSI C63.4:2003

☛ Receiver set

Frequency	Detector	RBW	VBW	Remark
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Peak	1MHz	10Hz	Average Value


☛ Limit

Frequency	Limit (dBuV/m @3m)	Remark
Above 1GHz	54.00	Average Value
	74.00	Peak Value

☛ Test mode

Refer to section 5.3 for details

☛ Test setup

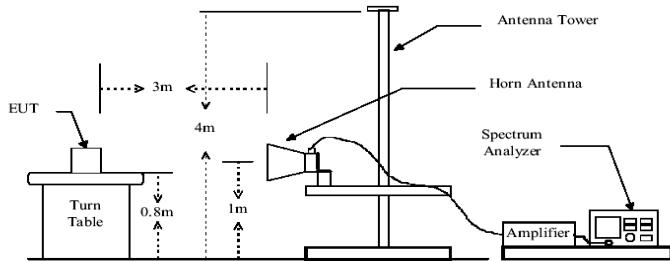

☛ Test Procedure

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

☛ Test Result

Complied

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	46.00	27.91	5.30	30.37	48.84	74.00	-25.16	Vertical
2390.00	45.64	27.59	5.38	30.18	48.43	74.00	-25.57	Vertical
2310.00	46.06	27.91	5.30	30.37	48.90	74.00	-25.10	Horizontal
2390.00	46.04	27.59	5.38	30.18	48.83	74.00	-25.17	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	35.57	27.91	5.30	30.37	38.41	54.00	-15.59	Vertical
2390.00	35.22	27.59	5.38	30.18	38.01	54.00	-15.99	Vertical
2310.00	35.56	27.91	5.30	30.37	38.40	54.00	-15.60	Horizontal
2390.00	35.29	27.59	5.38	30.18	38.08	54.00	-15.92	Horizontal

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	46.98	27.53	5.47	29.93	50.05	74.00	-23.95	Vertical
2500.00	44.96	27.55	5.49	29.93	48.07	74.00	-25.93	Vertical
2483.50	44.68	27.53	5.47	29.93	47.75	74.00	-26.25	Horizontal
2500.00	45.15	27.55	5.49	29.93	48.26	74.00	-25.74	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.87	27.53	5.47	29.93	37.94	54.00	-16.06	Vertical
2500.00	33.78	27.55	5.49	29.93	36.89	54.00	-17.11	Vertical
2483.50	35.02	27.53	5.47	29.93	38.09	54.00	-15.91	Horizontal
2500.00	33.72	27.55	5.49	29.93	36.83	54.00	-17.17	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7 Spurious Emission

7.7.1 Conducted Emission Method

☞ Test method

FCC Part15 C Section 15.247 (d)

☞ Test method

ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03

☞ Receiver set

RBW=100kHz, VBW=300kHz, Detector=Peak


☞ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

☞ Test mode

Refer to section 5.3 for details


☞ Test setup

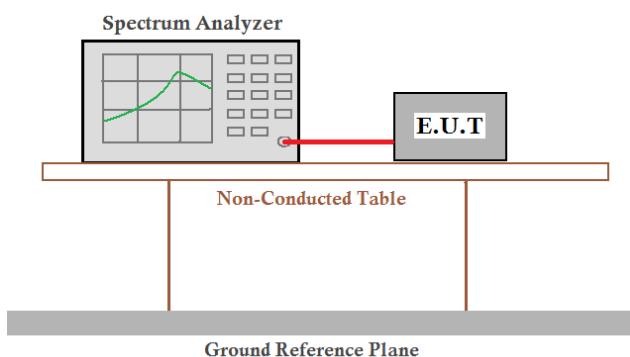

☞ Test Result

Complied


Test channel:

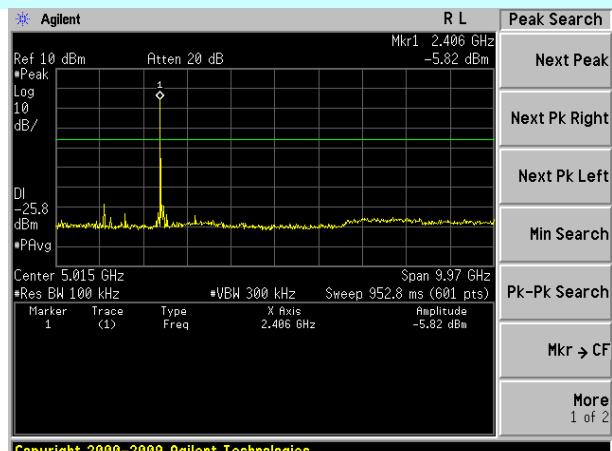

Copyright 2000-2009 Agilent Technologies

30MHz~10GHz


Lowest channel

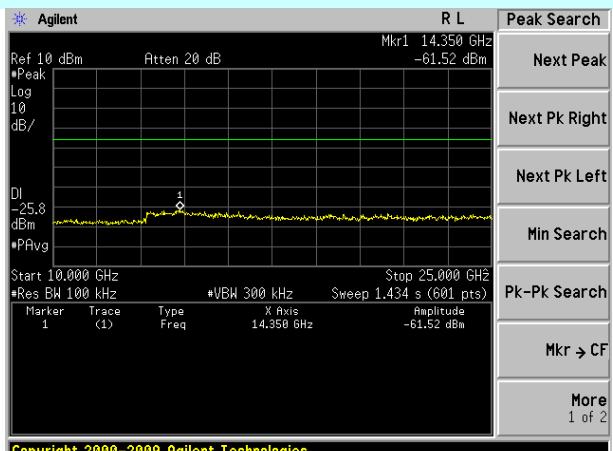

Copyright 2000-2009 Agilent Technologies

10GHz~25GHz


Test channel:

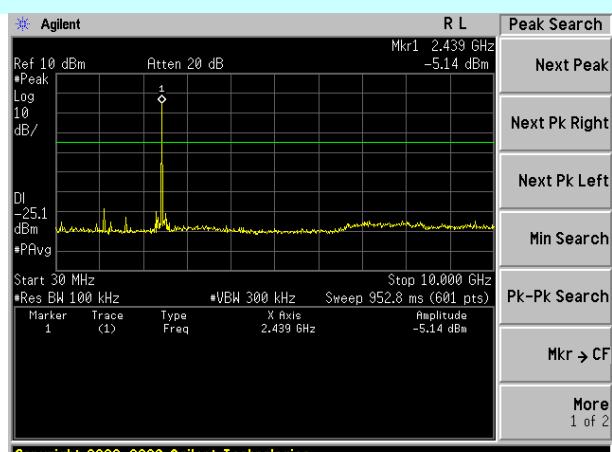

Copyright 2000-2009 Agilent Technologies

30MHz~10GHz


Middle channel

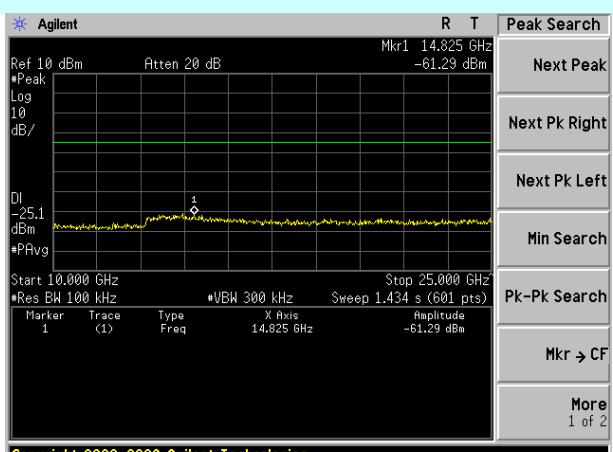

Copyright 2000-2009 Agilent Technologies

10GHz~25GHz


Test channel:

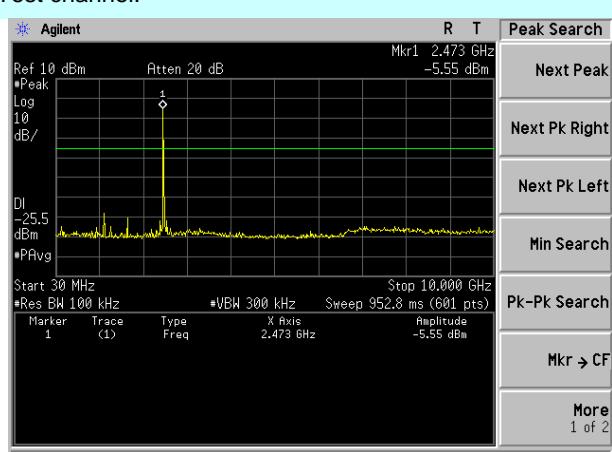

Copyright 2000-2009 Agilent Technologies

30MHz~10GHz

Highest channel

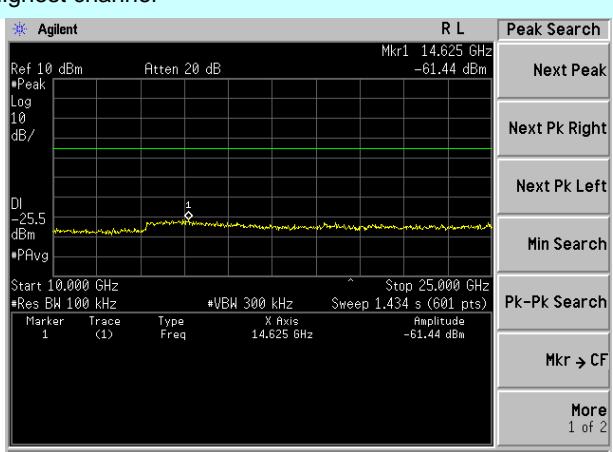

Copyright 2000-2009 Agilent Technologies

10GHz~25GHz

7.7.2 Radiated Emission Method

☛ Test method

FCC Part15 C Section 15.209 and 15.205

☛ Test method

ANSI C63.4:2003

☛ Receiver set

Frequency	Detector	RBW	VBW	Remark
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Peak	1MHz	10Hz	Average Value

☛ Limit


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

☛ Test mode


Refer to section 5.3 for details

☛ Test setup

Below 1GHz

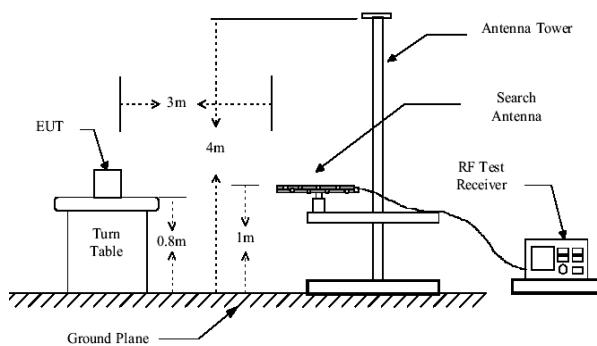

Above 1GHz

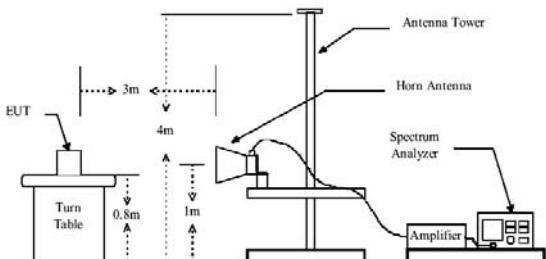

☞ **Test Procedure**

6. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
7. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
8. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
9. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
10. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
11. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

☞ **Test Result**

Complied

Remark:

During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case, so only show the test data of worse case modulation on the test report.

Measurement data:

■ **Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
30.00	46.42	14.33	0.55	32.06	29.24	40.00	-10.76	Vertical
53.88	48.61	15.07	0.81	31.95	32.54	40.00	-7.46	Vertical
150.01	55.09	10.26	1.57	31.98	34.94	43.50	-8.56	Vertical
176.89	54.48	11.49	1.72	32.07	35.62	43.50	-7.88	Vertical
250.30	53.31	14.07	2.12	32.16	37.34	46.00	-8.66	Vertical
300.37	50.35	15.06	2.36	32.17	35.60	46.00	-10.40	Vertical
56.79	46.77	14.89	0.83	31.95	30.54	40.00	-9.46	Horizontal
86.20	46.76	12.74	1.08	31.73	28.85	40.00	-11.15	Horizontal
150.01	54.92	10.26	1.57	31.98	34.77	43.50	-8.73	Horizontal
250.30	58.05	14.07	2.12	32.16	42.08	46.00	-3.92	Horizontal
300.37	54.89	15.06	2.36	32.17	40.14	46.00	-5.86	Horizontal
350.48	54.23	16.27	2.62	32.02	41.10	46.00	-4.90	Horizontal

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	36.01	31.78	8.60	32.09	44.30	74.00	-29.70	Vertical
7206.00	38.15	36.15	11.65	32.00	53.95	74.00	-20.05	Vertical
9608.00	36.20	37.95	14.14	31.62	56.67	74.00	-17.33	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	36.27	31.78	8.60	32.09	44.56	74.00	-29.44	Horizontal
7206.00	42.48	36.15	11.65	32.00	58.28	74.00	-15.72	Horizontal
9608.00	30.70	37.95	14.14	31.62	51.17	74.00	-22.83	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	26.57	31.78	8.60	32.09	34.86	54.00	-19.14	Vertical
7206.00	28.37	36.15	11.65	32.00	44.17	54.00	-9.83	Vertical
9608.00	26.39	37.95	14.14	31.62	46.86	54.00	-7.14	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	26.70	31.78	8.60	32.09	34.99	54.00	-19.01	Horizontal
7206.00	32.46	36.15	11.65	32.00	48.26	54.00	-5.74	Horizontal
9608.00	21.51	37.95	14.14	31.62	41.98	54.00	-12.02	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. **, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4884.00	38.16	31.85	8.66	32.12	46.55	74.00	-27.45	Vertical
7326.00	36.78	36.37	11.72	31.89	52.98	74.00	-21.02	Vertical
9768.00	31.65	38.35	14.25	31.59	52.66	74.00	-21.34	Vertical
12210.00	*					74.00		Vertical
14652.00	*					74.00		Vertical
4884.00	36.55	31.85	8.66	32.12	44.94	74.00	-29.06	Horizontal
7326.00	41.16	36.37	11.72	31.89	57.36	74.00	-16.64	Horizontal
9768.00	30.49	38.35	14.25	31.59	51.50	74.00	-22.50	Horizontal
12210.00	*					74.00		Horizontal
14652.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4884.00	27.85	31.85	8.66	32.12	36.24	54.00	-17.76	Vertical
7326.00	31.63	36.37	11.72	31.89	47.83	54.00	-6.17	Vertical
9768.00	20.73	38.35	14.25	31.59	41.74	54.00	-12.26	Vertical
12210.00	*					54.00		Vertical
14652.00	*					54.00		Vertical
4884.00	28.17	31.85	8.66	32.12	36.56	54.00	-17.44	Horizontal
7326.00	26.91	36.37	11.72	31.89	43.11	54.00	-10.89	Horizontal
9768.00	22.06	38.35	14.25	31.59	43.07	54.00	-10.93	Horizontal
12210.00	*					54.00		Horizontal
14652.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. **, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Highest							
---------------	---------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	34.91	31.93	8.73	32.16	43.41	74.00	-30.59	Vertical
7440.00	33.83	36.59	11.79	31.78	50.43	74.00	-23.57	Vertical
9920.00	33.03	38.81	14.38	31.88	54.34	74.00	-19.66	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	33.85	31.93	8.73	32.16	42.35	74.00	-31.65	Horizontal
7440.00	39.27	36.59	11.79	31.78	55.87	74.00	-18.13	Horizontal
9920.00	28.91	38.81	14.38	31.88	50.22	74.00	-23.78	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	24.98	31.93	8.73	32.16	33.48	54.00	-20.52	Vertical
7440.00	24.51	36.59	11.79	31.78	41.11	54.00	-12.89	Vertical
9920.00	23.66	38.81	14.38	31.88	44.97	54.00	-9.03	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	23.70	31.93	8.73	32.16	32.20	54.00	-21.80	Horizontal
7440.00	29.34	36.59	11.79	31.78	45.94	54.00	-8.06	Horizontal
9920.00	19.50	38.81	14.38	31.88	40.81	54.00	-13.19	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. ***, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.


8 Test Setup Photo

Conducted emissions:



Radiated emissions:

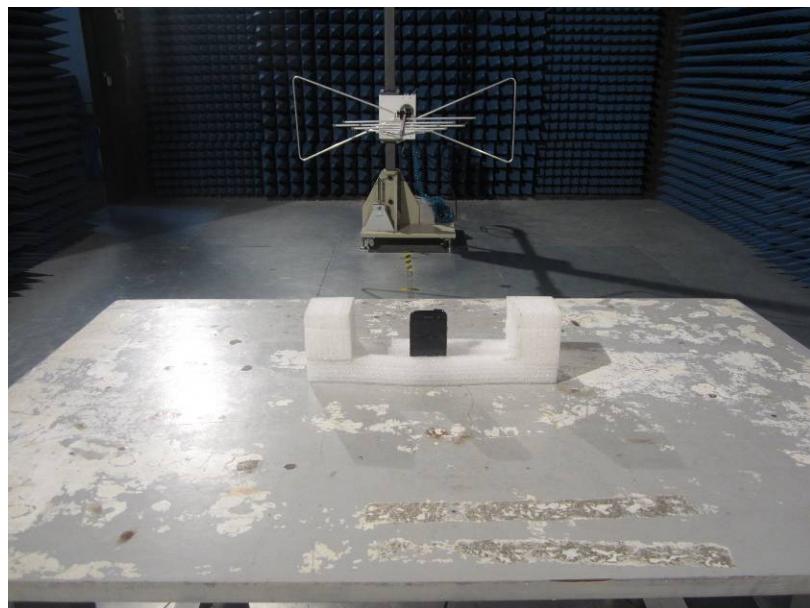

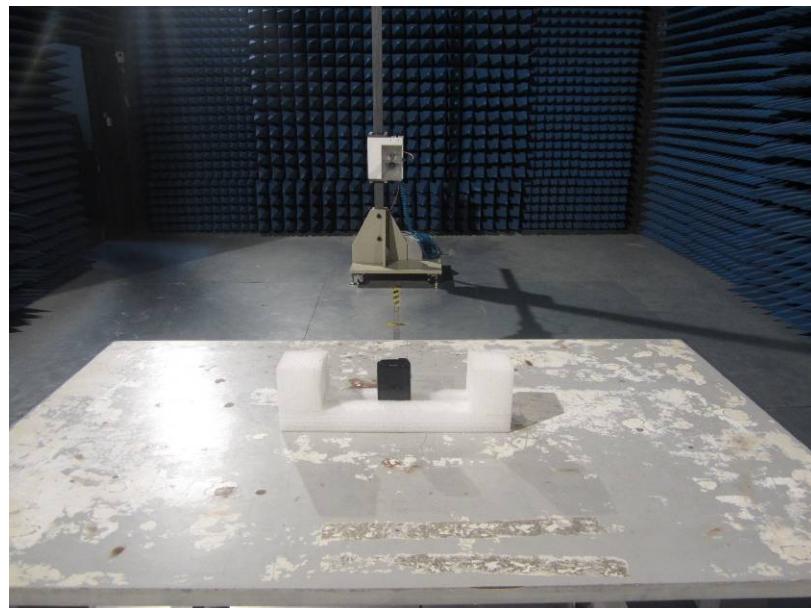

9 EUT Constructional Details

Reference to the test report No.: TMC141202901

-----End-----