

FCC PART 22H, PART 24E TEST REPORT

For

G53 Limited

ROOM 1701, 17/F, FEE TAT COMMERCIAL CENTRE, 613 NATHAN ROAD, MONGKOK, KOWLOON, Hong Kong

FCC ID:2ADLMG53FG1

Report Type:		Product Type:	
Original Report		Mobile Phone	
Tost Engineers	Dooky Vona	Rocky	Kang
	Rocky Kang	UUD	
Report Number:	2015-09-28	-UUD	
Report Date:	Jimmy Xiao	Jinm)	/ Xiao
Reviewed By:	RF Engineer	- ,	
Prepared By:	6/F, the 3rd Pha	3320018 3320008	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY TEST FACILITY	
SYSTEM TEST CONFIGURATION	
DESCRIPTION OF TEST CONFIGURATION	
SUPPORT EQUIPMENT LIST AND DETAILS	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
FCC §1.1307 & §2.1093 - RF EXPOSURE	
Applicable Standard	
FCC §2.1047 - MODULATION CHARACTERISTIC	
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
FCC §2.1049, §22.917, §22.905 & §24.238 - BANDWIDTH	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	13
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	16
APPLICABLE STANDARD	16
Test Procedure	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS	
APPLICABLE STANDARD	
Test Procedure	
TEST DATA	
Test Data	
FCC §22.917(A) & §24.238(A) - BAND EDGES	
APPLICABLE STANDARD	
TEST PROCEDURE TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
FCC 82.1055, 822.355 & 824.235 - FREQUENCY STABILITY	25
PLA 94.10.1. 944.133 (V. 944.433 - P. P. A. HUPANLI, M. A. B. H. H. L.	

Bay Area Compliance Laboratories Corp. (Shenzhen)

APPLICABLE STANDARD	25
Test Procedure	25
TEST EQUIPMENT LIST AND DETAILS	26
TEST DATA	

Report No.: RSZ150907004-00B

FCC Part 22H/24E Page 3 of 27

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The G53 Limited's product, model number: FG1 (FCC ID: 2ADLMG53FG1) or the "EUT" in this report was a Mobile Phone, which was measured approximately: 85 mm (L) * 53 mm (W) * 6 mm (H), rated with input voltage: DC 3.7V rechargeable Li-ion battery.

Report No.: RSZ150907004-00B

*All measurement and test data in this report was gathered from production sample serial number: 1506348 (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2015-09-07.

Objective

This test report is prepared on behalf of *G53 Limited* in accordance with Part 2-Subpart J, Part 22-Subpart H and Part 24-Subpart E of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submissions with FCC ID: 2ADLMG53FG1

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D, ANSI C63.4-2014.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

FCC Part 22H/24E Page 4 of 27

Test Facility

The test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Report No.: RSZ150907004-00B

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 22H/24E Page 5 of 27

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

Equipment Modifications


No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Description Model	
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Report No.: RSZ150907004-00B

Block Diagram of Test Setup

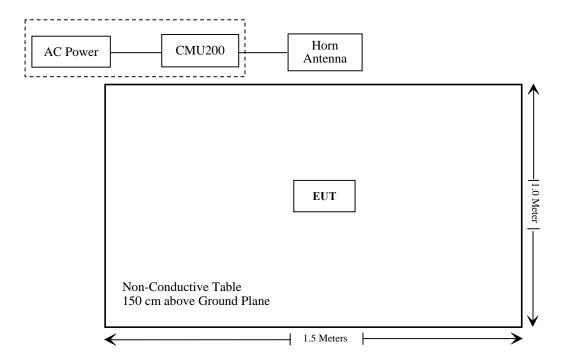

FCC Part 22H/24E Page 6 of 27

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
\$2.1046; \$ 22.913 (a); \$ 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Report No.: RSZ150907004-00B

Note: * Please refer to SAR report released by BACL, report number: RSZ150907004-20.

FCC Part 22H/24E Page 7 of 27

FCC §1.1307 & §2.1093 - RF EXPOSURE

Report No.: RSZ150907004-00B

Applicable Standard

FCC§1.1307 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ150907004-20.

FCC Part 22H/24E Page 8 of 27

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC $\S 2.1047(d)$, Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

Report No.: RSZ150907004-00B

FCC Part 22H/24E Page 9 of 27

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.


Report No.: RSZ150907004-00B

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.



Radiated method:

TIA 603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052304	2014-11-01	2015-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2014-12-07	2017-12-06
HP	Signal Generator	8341B	2624A00116	2015-06-03	2016-06-03
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2013-02-11	2016-02-10
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 22H/24E Page 10 of 27

Test Data

Environmental Conditions

Temperature:	23 ℃
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2015-09-25.

Conducted Power

Cellular Band (Part 22H)

Report No.: RSZ150907004-00B

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	128	824.2	32.16	38.45
GSM	190	836.6	31.90	38.45
	251	848.8	31.73	38.45

Mode	Channel	Frequency		Average Output Power (dBm)			Limit
3.2000		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	128	824.2	32.15	31.36	29.64	28.83	38.45
GPRS	190	836.6	31.95	31.11	29.44	28.62	38.45
	251	848.8	31.78	30.94	29.24	28.46	38.45

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	512	1850.2	30.15	33
GSM	661	1880.0	30.04	33
	810	1909.8	29.88	33

Mode	Channel	Frequency		Average Output Power (dBm)			Limit
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	512	1850.2	30.15	29.31	27.45	26.28	33
GPRS	661	1880.0	30.04	29.17	27.33	26.14	33
	810	1909.8	29.88	29.03	27.20	26.04	33

FCC Part 22H/24E Page 11 of 27

Peak-to-average ratio (PAR)

Cellular Band

Report No.: RSZ150907004-00B

Mode	Channel	PAR (dB)	Limit (dB)
	Low	0.31	13
GSM	Middle	0.40	13
	High	0.19	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.18	13
	Middle	0.33	13
	High	0.31	13

Radiated Power (Measured at Max. conducted power channel)

GSM Mode:

Receiver Tu	Turntable	Rx An	Rx Antenna		Substituted			FCC Part 22H/24E		
Frequency (MHz)	uency Hz) Reading Angl	Angle Degree	Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Low Channel										
824.2	97.01	114	1.4	Н	26.0	0.30	0	25.70	38.45	12.75
824.2	98.47	353	2.3	V	27.5	0.30	0	27.20	38.45	11.25
	EIRP for PCS Band (Part 24E), Low Channel									
1850.2	87.83	24	1.1	Н	19.2	1.40	7.30	25.10	33	7.90
1850.2	87.33	153	1.0	V	18.1	1.40	7.30	24.00	33	9.00

All above data were tested with no amplifier.
Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC Part 22H/24E Page 12 of 27

FCC §2.1049, §22.917, §22.905 & §24.238 - BANDWIDTH

Applicable Standard


FCC §2.1049, §22.917, §22.905 and §24.238.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

Report No.: RSZ150907004-00B

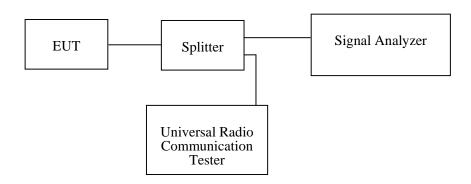

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0kPa

The testing was performed by Rocky Kang on 2015-09-19.

FCC Part 22H/24E Page 13 of 27

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Report No.: RSZ150907004-00B


Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)	
GSM(GMSK)	836.6	244.49	316.63	

PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM (GMSK)	1880.0	242.48	312.63


FCC Part 22H/24E Page 14 of 27

Cellular Band (Part 22H) 99% Occupied &26 dB Emissions Bandwidth for GSM (GMSK) Mode

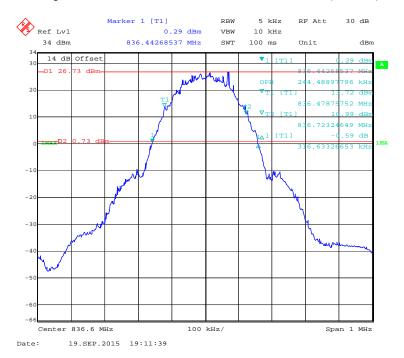

Report No.: RSZ150907004-00B

PCS Band (Part 24E)
99% Occupied &26 dB Emissions Bandwidth for GSM (GMSK) Mode

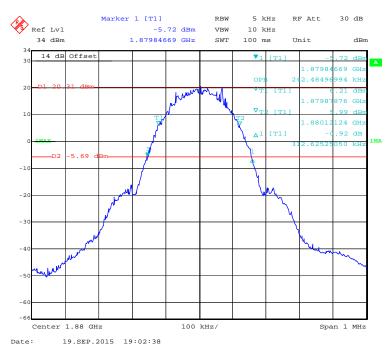

FCC Part 22H/24E Page 15 of 27

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Report No.: RSZ150907004-00B


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

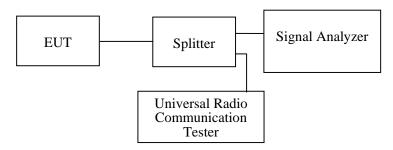

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0kPa


The testing was performed by Rocky Kang on 2015-09-19.

Test result: Compliance, please refer to the following plots.

FCC Part 22H/24E Page 16 of 27


Cellular Band (Part 22H)

30 MHz – 1 GHz (GSM Mode)

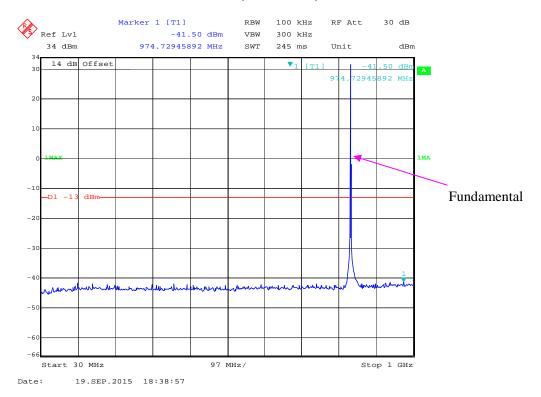

Report No.: RSZ150907004-00B

1 GHz – 10 GHz (GSM Mode)

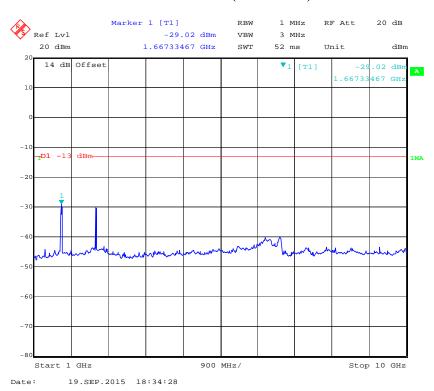


FCC Part 22H/24E Page 17 of 27


PCS Band (Part 24E)

30 MHz – 1 GHz (GSM Mode)

Report No.: RSZ150907004-00B

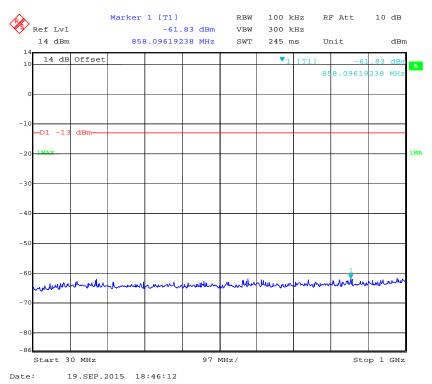


1 GHz – 2 GHz (GSM Mode)

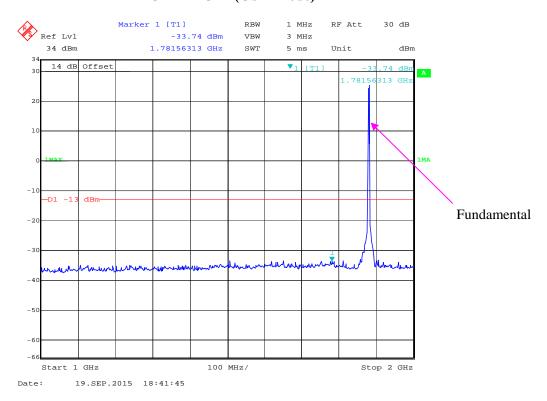

FCC Part 22H/24E Page 18 of 27

2 GHz – 20 GHz (GSM Mode)

Report No.: RSZ150907004-00B

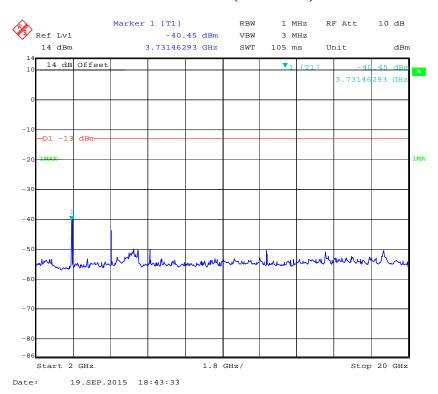

FCC Part 22H/24E Page 19 of 27

FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

Report No.: RSZ150907004-00B

Applicable Standard

FCC § 2.1053, §22.917 and § 24.238.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in $dB = 10 \lg (TXpwr in Watts/0.001) - the absolute level$

Spurious attenuation limit in $dB = 43 + 10 \text{ Log}_{10}$ (power out in Watts)

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052304	2014-11-01	2015-11-30
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-23
HP	Amplifier	8447E	1937A01046	2015-05-06	2016-05-06
HP	Signal Generator	8341B	2624A00116	2015-06-03	2016-06-03
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2013-02-11	2016-02-10
Electro-Mechanics	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 22H/24E Page 20 of 27

Test Data

Environmental Conditions

Temperature:	26 ℃
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2015-09-25.

EUT operation mode: Transmitting (worst case)

Pre-scan with Low, Middle, High channel, and the worst case as below:

GSM Mode

Report No.: RSZ150907004-00B

E	Receiver	Turntable	Rx An	Rx Antenna		Substitut	ed	Absolute		C Part I/24E
Frequency (MHz) Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	
			G	SM 850,	Middle cl	nannel				
166.75	30.57	347	1.3	Н	-66.4	0.28	0	-66.68	-13	53.68
166.75	31.16	88	1.8	V	-65.8	0.28	0	-66.08	-13	53.08
1673.20	49.67	246	2.2	Н	-46.0	1.60	6.90	-40.70	-13	27.70
1673.20	48.83	348	2.3	V	-47.3	1.60	6.90	-42.00	-13	29.00
2509.80	56.33	77	1.1	Н	-37.2	1.70	8.60	-30.30	-13	17.30
2509.80	53.67	261	1.9	V	-40.2	1.70	8.60	-33.30	-13	20.30
3346.40	46.17	284	2.2	Н	-44.2	1.90	9.80	-36.30	-13	23.30
3346.40	44.86	80	1.8	V	-46.1	1.90	9.80	-38.20	-13	25.20
			PC	CS 1900,	Middle cl	hannel			_	
166.75	31.59	110	1.6	Н	-65.4	0.28	0	-65.68	-13	52.68
166.75	30.74	290	1.7	V	-66.3	0.28	0	-66.58	-13	53.58
3760.00	48.33	62	2.0	Н	-38.7	1.90	9.90	-30.70	-13	17.70
3760.00	47.35	1	1.1	V	-39.3	1.90	9.90	-31.30	-13	18.30
5640.00	39.33	79	1.5	Н	-43.2	2.10	10.30	-35.00	-13	22.00
5640.00	40.83	72	2.3	V	-41.1	2.10	10.30	-32.90	-13	19.90

Note

1) Absolute Level = SG Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

FCC Part 22H/24E Page 21 of 27

FCC §22.917(a) & §24.238(a) - BAND EDGES

Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P) dB$.


Report No.: RSZ150907004-00B

According to \$24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P) dB$.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

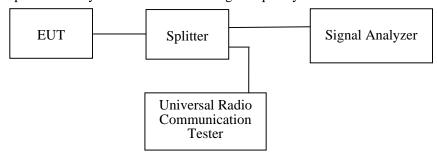

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 ℃	
Relative Humidity:	51 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Rocky Kang from 2015-09-19.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.


FCC Part 22H/24E Page 22 of 27

Cellular Band, Left Band Edge for GSM (GMSK) Mode

Report No.: RSZ150907004-00B

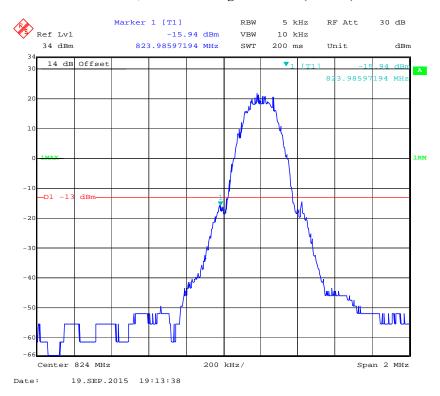


Cellular Band, Right Band Edge for GSM (GMSK) Mode

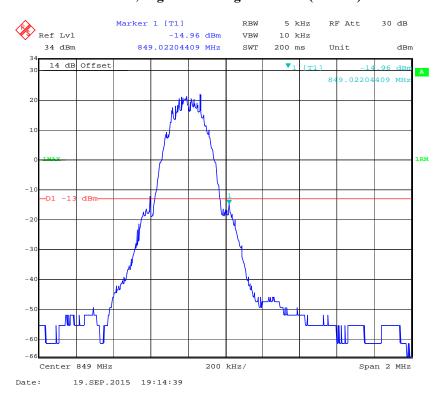

FCC Part 22H/24E Page 23 of 27

PCS Band, Left Band Edge for GSM (GMSK) Mode

Report No.: RSZ150907004-00B

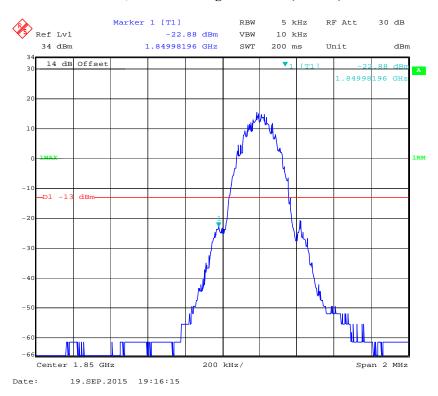

PCS Band, Right Band Edge for GSM (GMSK) Mode



FCC Part 22H/24E Page 24 of 27

FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055, §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Report No.: RSZ150907004-00B

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

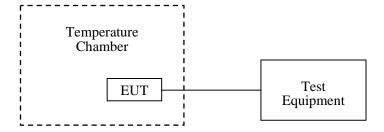

FCC Part 22H/24E Page 25 of 27

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2014-11-01	2015-11-01
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23

Report No.: RSZ150907004-00B

Test Data

Environmental Conditions

Temperature:	25 ℃	
Relative Humidity:	51 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Rocky Kang on 2015-09-26.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)

GSM Mode

Middle Channel, f ₀ =836.6 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30		-18	-0.02152	2.5
-20		-14	-0.01673	2.5
-10		-12	-0.01434	2.5
0		-14	-0.01673	2.5
10	3.7	-16	-0.01913	2.5
20		-18	-0.02152	2.5
30		-14	-0.01673	2.5
40		-12	-0.01434	2.5
50		-18	-0.02152	2.5
25	V _{min.} = 3.5	-18	-0.02152	2.5
25	V _{max.} = 4.2	-12	-0.01434	2.5

FCC Part 22H/24E Page 26 of 27

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

PCS Band (Part 24E)

Report No.: RSZ150907004-00B

GSM Mode

Middle Channel, f _o =1880.0 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30		-34	-0.01809	pass
-20		-35	-0.01862	pass
-10		-36	-0.01915	pass
0		-34	-0.01809	pass
10	3.7	-33	-0.01755	pass
20		-35	-0.01862	pass
30		-36	-0.01915	pass
40		-35	-0.01862	pass
50		-37	-0.01968	pass
25	V min.= 3.5	-35	-0.01862	pass
25	V max.= 4.2	-36	-0.01915	pass

***** END OF REPORT *****

FCC Part 22H/24E Page 27 of 27