

APPLICATION CERTIFICATION

On Behalf of
AMES ADT, Inc.

PROPORT
Model No.: TAB-10A

FCC ID: 2ADLPTAB-10A

Prepared for : AMES ADT, Inc.
Address : 3291 Racquet Club Drive, Suite A, Traverse City, MI
49684
Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20141585
Date of Test : Oct 22-Nov 13, 2014
Date of Report : Nov 14, 2014

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Description of Test Facility	5
1.3. Measurement Uncertainty	6
2. MEASURING DEVICE AND TEST EQUIPMENT	7
3. OPERATION OF EUT DURING TESTING	8
3.1. Operating Mode	8
3.2. Configuration and peripherals	8
4. TEST PROCEDURES AND RESULTS	9
5. 20DB BANDWIDTH TEST.....	10
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(1).....	10
5.3. EUT Configuration on Measurement	10
5.4. Operating Condition of EUT	10
5.5. Test Procedure	11
5.6. Test Result	11
6. CARRIER FREQUENCY SEPARATION TEST.....	12
6.1. Block Diagram of Test Setup.....	17
6.2. The Requirement For Section 15.247(a)(1).....	17
6.3. EUT Configuration on Measurement	17
6.4. Operating Condition of EUT	17
6.5. Test Procedure	18
6.6. Test Result	18
7. NUMBER OF HOPPING FREQUENCY TEST	24
7.1. Block Diagram of Test Setup.....	24
7.2. The Requirement For Section 15.247(a)(1)(iii).....	24
7.3. EUT Configuration on Measurement	24
7.4. Operating Condition of EUT	24
7.5. Test Procedure	25
7.6. Test Result	25
8. DWELL TIME TEST	27
8.1. Block Diagram of Test Setup.....	27
8.2. The Requirement For Section 15.247(a)(1)(iii).....	27
8.3. EUT Configuration on Measurement	27
8.4. Operating Condition of EUT	27
8.5. Test Procedure	28
8.6. Test Result	28
9. MAXIMUM PEAK OUTPUT POWER TEST	44
9.1. Block Diagram of Test Setup.....	44
9.2. The Requirement For Section 15.247(b)(1).....	44
9.3. EUT Configuration on Measurement	44

9.4.	Operating Condition of EUT	44
9.5.	Test Procedure	45
9.6.	Test Result	45
10.	RADIATED EMISSION TEST	51
10.1.	Block Diagram of Test Setup.....	51
10.2.	The Limit For Section 15.247(d)	51
10.3.	Restricted bands of operation	52
10.4.	Configuration of EUT on Measurement	52
10.5.	Test Procedure	53
10.6.	The Field Strength of Radiation Emission Measurement Results	54
11.	BAND EDGE COMPLIANCE TEST	66
11.1.	Block Diagram of Test Setup.....	66
11.2.	The Requirement For Section 15.247(d)	66
11.3.	EUT Configuration on Measurement	66
11.4.	Operating Condition of EUT	66
11.5.	Test Procedure	67
11.6.	Test Result	67
12.	AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) ..	89
12.1.	Block Diagram of Test Setup.....	89
12.2.	The Emission Limit	89
12.3.	Configuration of EUT on Measurement	90
12.4.	Operating Condition of EUT	90
12.5.	Test Procedure	90
12.6.	Power Line Conducted Emission Measurement Results	90
13.	ANTENNA REQUIREMENT.....	93
13.1.	The Requirement	93
13.2.	Antenna Construction	93

Test Report Certification

Applicant : AMES ADT, Inc.
Manufacturer : AMES ADT, Inc.
EUT Description : PROPORT
(A) MODEL NO.: TAB-10A
(B) POWER SUPPLY: DC 5V (Adapter)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4- 2009

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Oct 22-Nov 13,2014

Date of Report : Nov 14,2014

Prepared by :



(Eric Zhang, Engineer)

Approved & Authorized Signer :



(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	PROPORT
Model Number	:	TAB-10A
Frequency Range	:	802.11b/g/n(20MHz): 2412-2462MHz Bluetooth: 2402-2480MHz
Number of Channels	:	802.11b/g/n (20MHz):11 Bluetooth 3.0+EDR: 79
Antenna Gain	:	0dBi
Power Supply	:	DC 5V (Power by adapter)
Adapter 1		Model number: ADS18B-W 050250 Input: AC 100-240V; 50/60Hz 0.5A Output: DC 5V/2.5A Line: Non-shielded, Non-detachable, 1.5m
Adapter 2		Model number: WA-15G05FU Input: AC 100-240V; 50/60Hz 0.5A Output: DC 5V/3A Line: Non-shielded, Non-detachable, 1.5m
Modulation mode	:	GFSK, π /4DQPSK, 8DPSK DSSS, OFDM
Applicant	:	AMES ADT, Inc.
Address	:	3291 Racquet Club Drive, Suite A, Traverse City, MI 49684
Manufacturer	:	AMES ADT, Inc.
Address	:	3291 Racquet Club Drive, Suite A, Traverse City, MI 49684
Date of sample received	:	Oct 22, 2014
Date of Test	:	Oct 22-Nov 13, 2014

1.2. Description of Test Facility

EMC Lab	:	Accredited by TUV Rheinland Shenzhen
		Listed by FCC
		The Registration Number is 752051
		Listed by Industry Canada
		The Registration Number is 5077A-2
		Accredited by China National Accreditation Committee for Laboratories
		The Certificate Registration Number is L3193
Name of Firm	:	ACCURATE TECHNOLOGY CO. LTD
Site Location	:	F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 11, 2014	Jan. 10, 2015
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 11, 2014	Jan. 10, 2015
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 11, 2014	Jan. 10, 2015
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 11, 2014	Jan. 10, 2015
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2014	Jan. 14, 2015
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Jan. 15, 2014	Jan. 14, 2015
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 11, 2014	Jan. 10, 2015
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 11, 2014	Jan. 10, 2015

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: Transmitting mode


Low Channel: 2402MHz

Middle Channel: 2441MHz

High Channel: 2480MHz

Hopping

3.2.Configuration and peripherals

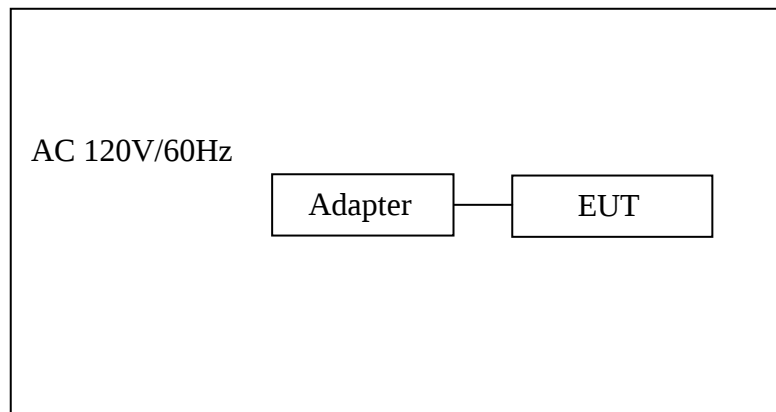

4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission Test	Compliant
Section 15.247(a)(1)	20dB Bandwidth Test	Compliant
Section 15.247(a)(1)	Carrier Frequency Separation Test	Compliant
Section 15.247(a)(1)(iii)	Number Of Hopping Frequency Test	Compliant
Section 15.247(a)(1)(iii)	Dwell Time Test	Compliant
Section 15.247(b)(1)	Maximum Peak Output Power Test	Compliant
Section 15.247(d) Section 15.209	Radiated Emission Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. 20DB BANDWIDTH TEST

5.1. Block Diagram of Test Setup



(EUT: PROPORT)

5.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz.

5.5.3. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


5.6. Test Result

Channel	Frequency (MHz)	GFSK 20dB Bandwidth (MHz)	$\Pi/4$ -DQPSK 20dB Bandwidth (MHz)	8DPSK 20dB Bandwidth (MHz)	Result
Low	2402	0.832	1.212	1.208	Pass
Middle	2441	0.840	1.208	1.216	Pass
High	2480	0.848	1.212	1.208	Pass

The spectrum analyzer plots are attached as below.


GFSK Mode

Low channel

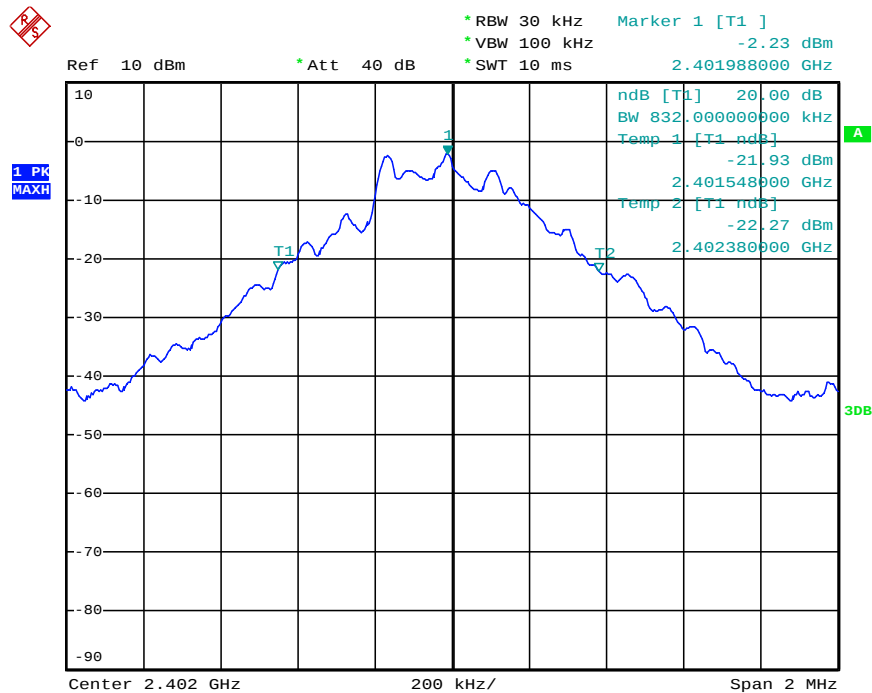


Date: 7.NOV.2014 09:39:41

Middle channel

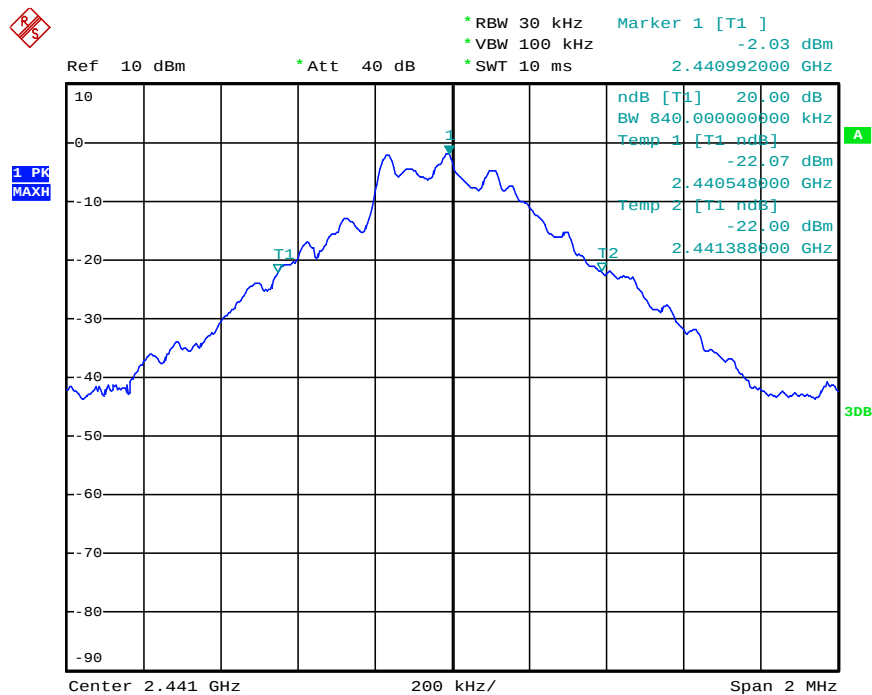

Date: 7.NOV.2014 09:40:20


High channel

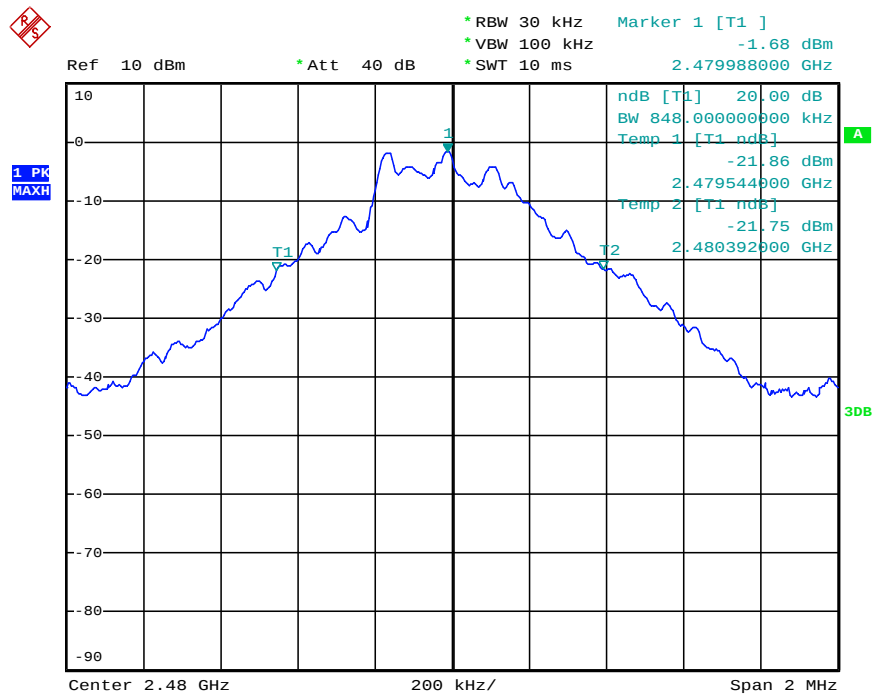

Date: 7.NOV.2014 09:41:08


Π/4-DQPSK Mode

Low channel

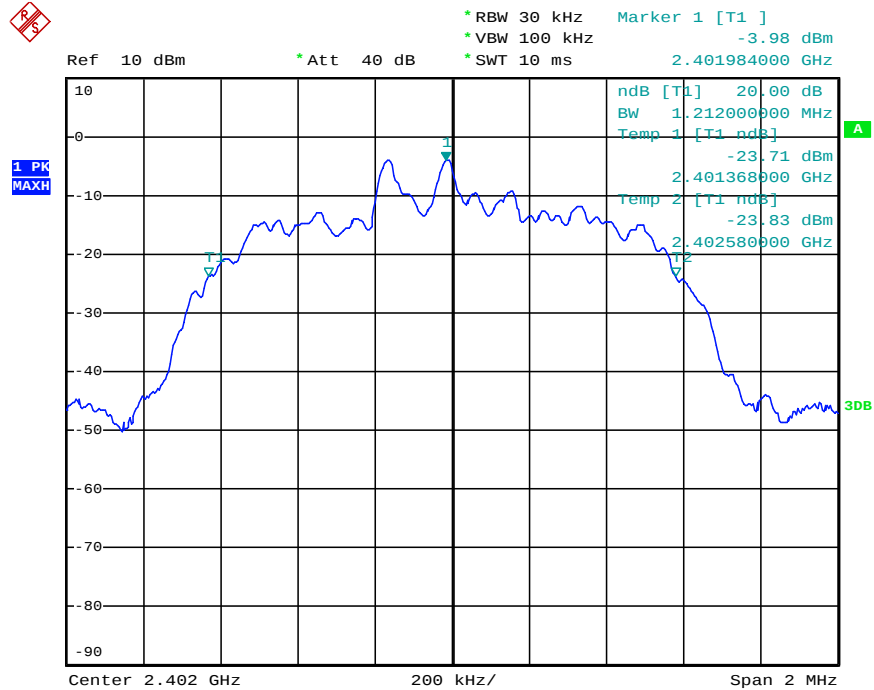


Date: 7.NOV.2014 09:42:30

Middle channel

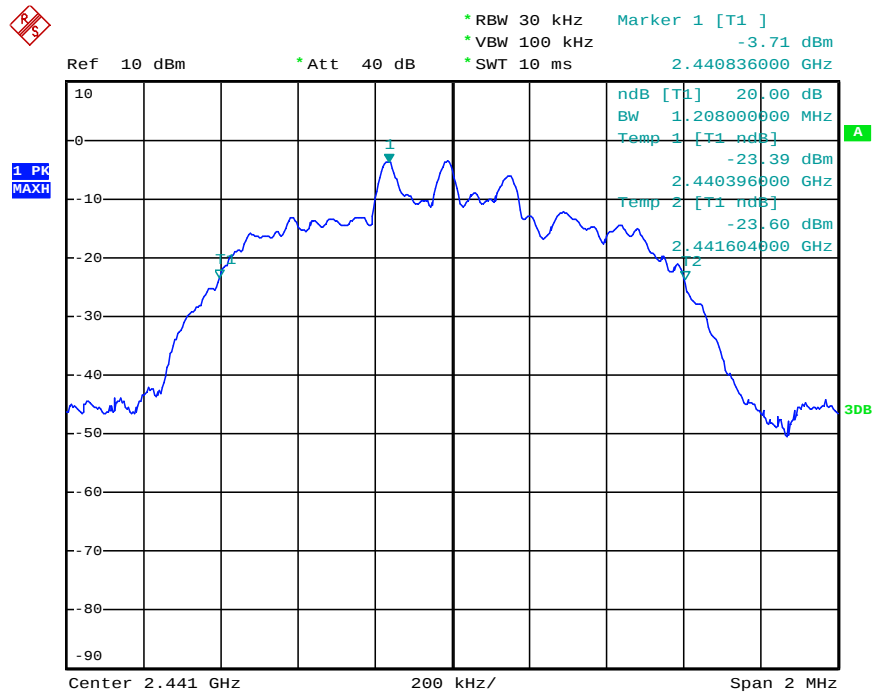

Date: 7.NOV.2014 09:44:26


High channel

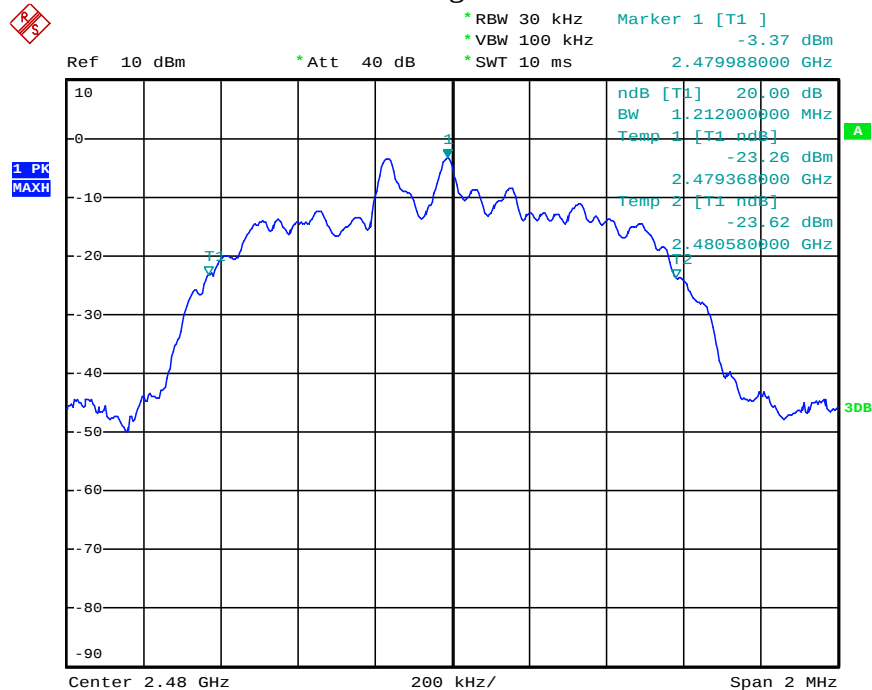

Date: 7.NOV.2014 09:41:27


8DPSK Mode

Low channel

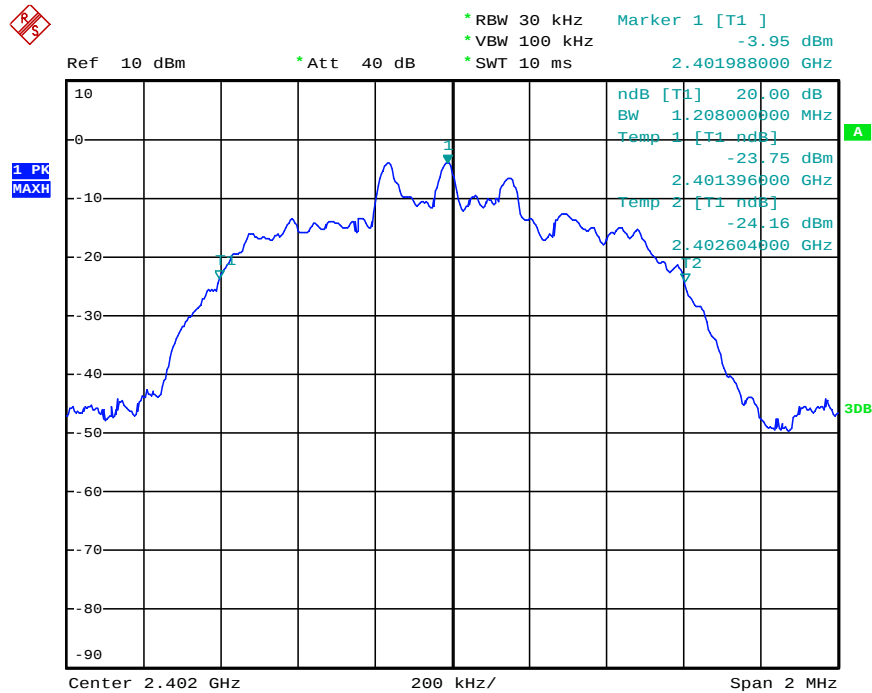


Date: 7.NOV.2014 09:43:52

Middle channel

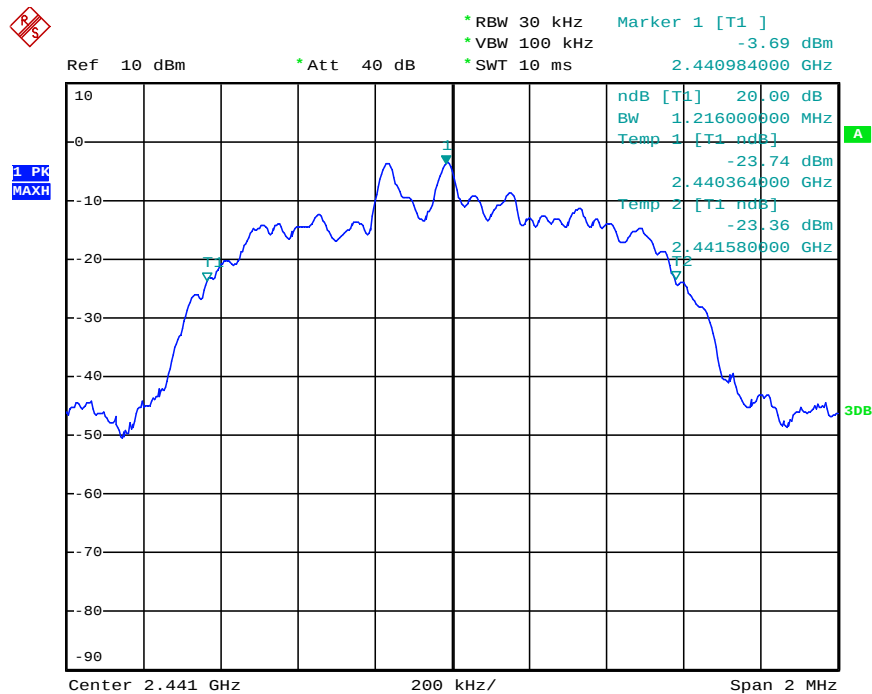

Date: 7.NOV.2014 09:41:55

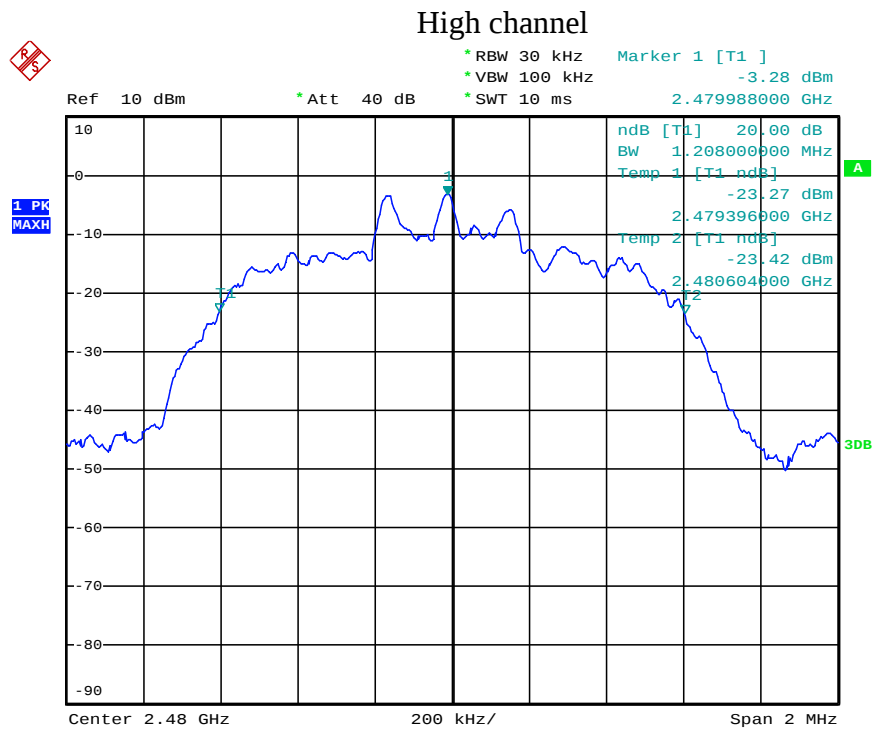

Date: 7.NOV.2014 09:44:50

6. CARRIER FREQUENCY SEPARATION TEST

6.1. Block Diagram of Test Setup



(EUT: PROPORT)

6.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

6.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz. Adjust Span to 3 MHz.

6.5.3. Set the adjacent channel of the EUT maxhold another trace.

6.5.4. Measurement the channel separation

6.6. Test Result

GFSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.000	25KHz or 20dB bandwidth	PASS
	2403			
Middle	2440	1.004	25KHz or 20dB bandwidth	PASS
	2441			
High	2479	1.004	25KHz or 20dB bandwidth	PASS
	2480			

Π/4-DQPSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.000	25KHz or 2/3*20dB bandwidth	PASS
	2403			
Middle	2440	1.004	25KHz or 2/3*20dB bandwidth	PASS
	2441			
High	2479	1.004	25KHz or 2/3*20dB bandwidth	PASS
	2480			


8DPSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.000	25KHz or 2/3*20dB bandwidth	PASS
	2403			
Middle	2440	1.004	25KHz or 2/3*20dB bandwidth	PASS
	2441			
High	2479	1.004	25KHz or 2/3*20dB bandwidth	PASS
	2480			

The spectrum analyzer plots are attached as below.


GFSK Mode

Low channel

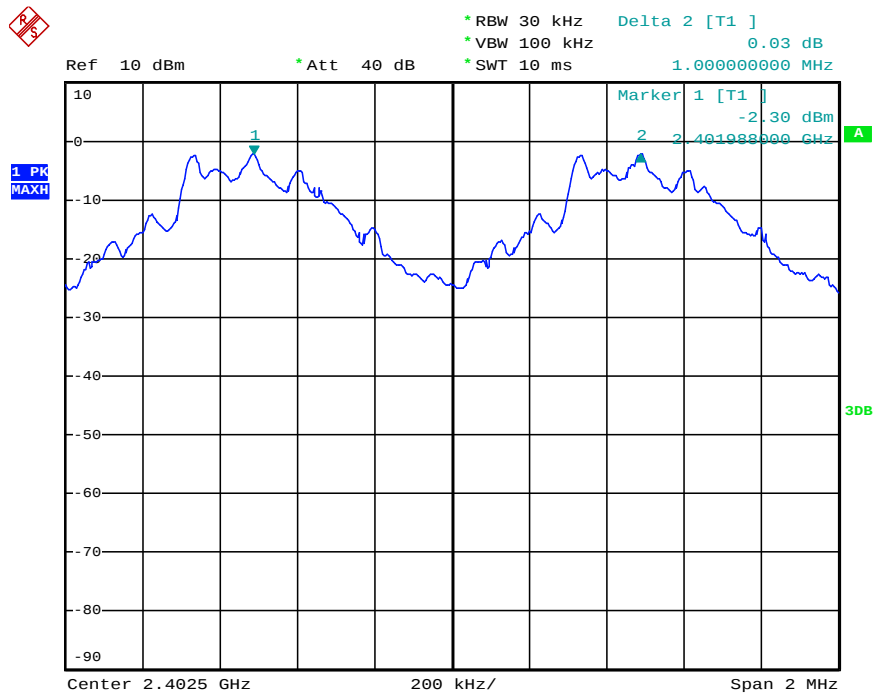


Date: 7.NOV.2014 09:51:25

Middle channel

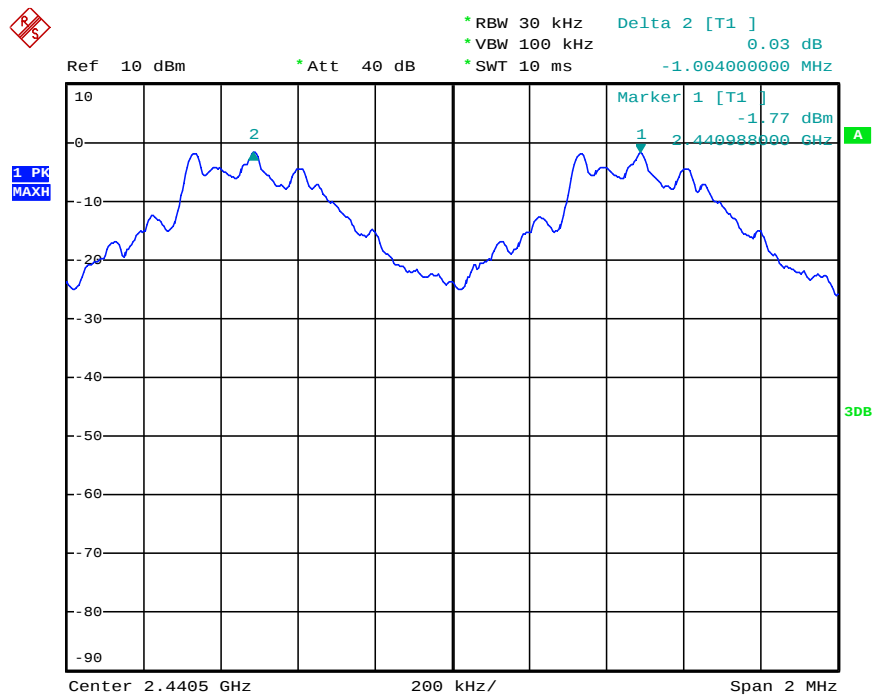

Date: 7.NOV.2014 09:47:40


High channel

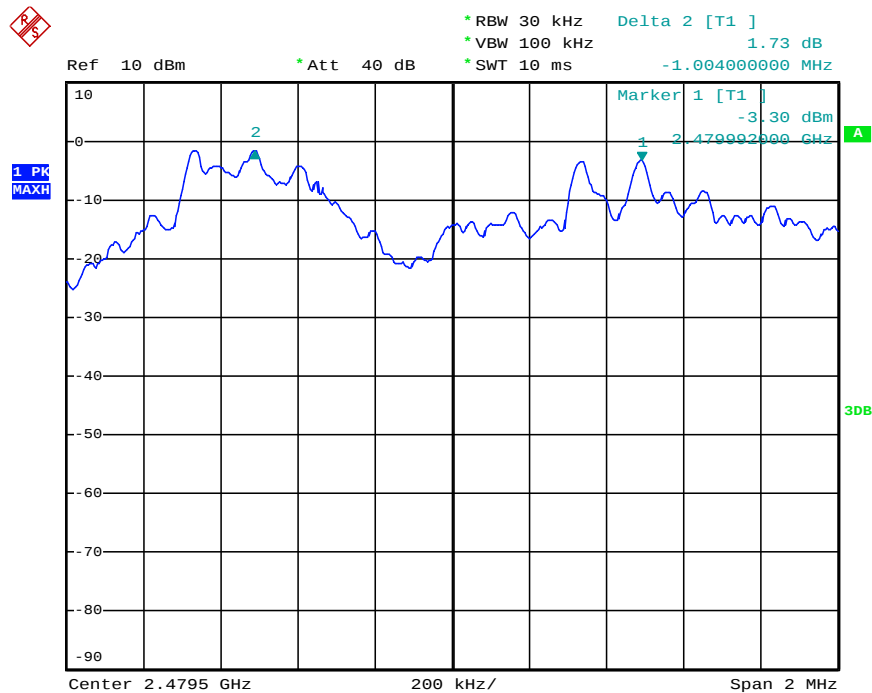

Date: 7.NOV.2014 09:46:55


Π/4-DQPSK Mode

Low channel

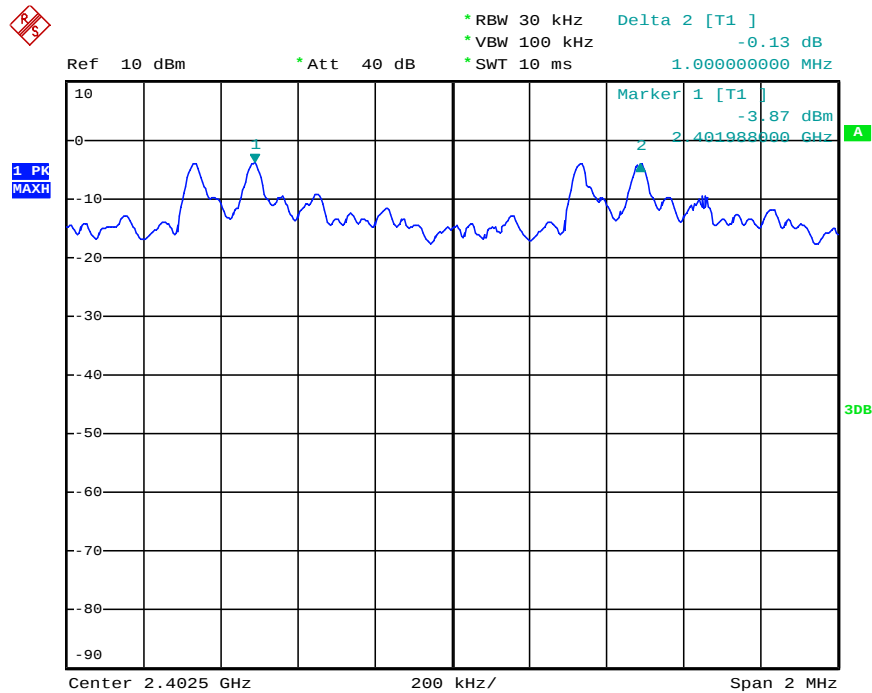


Date: 7.NOV.2014 09:50:55

Middle channel

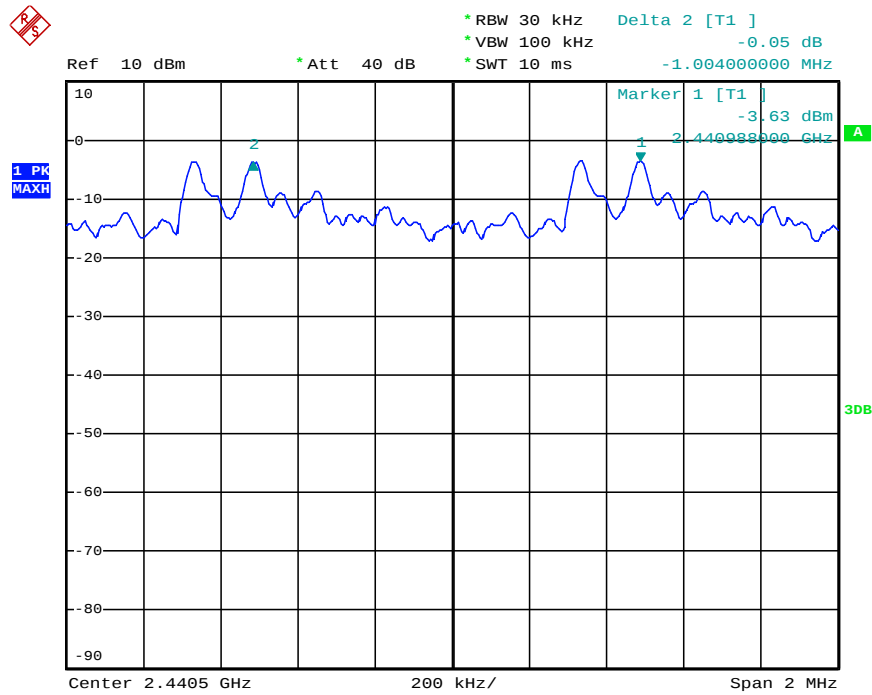

Date: 7.NOV.2014 09:48:06


High channel

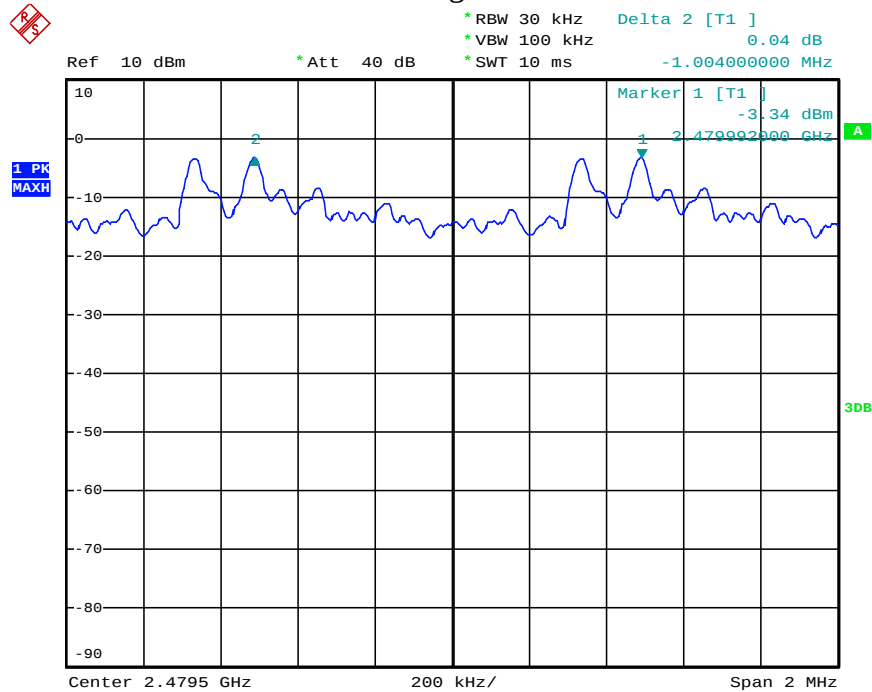

Date: 7.NOV.2014 09:46:22


8DPSK Mode

Low channel

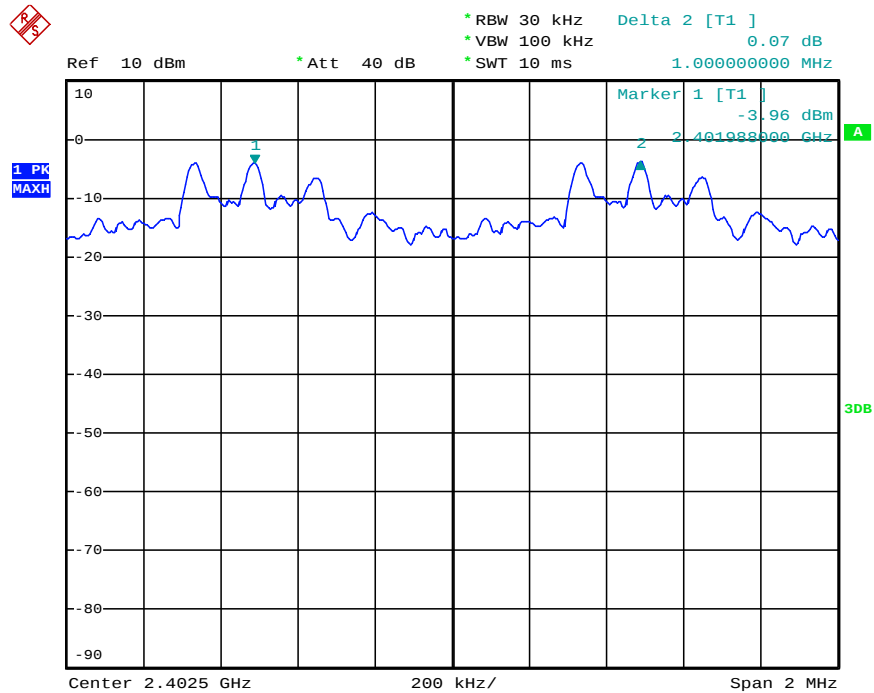


Date: 7.NOV.2014 09:49:26

Middle channel

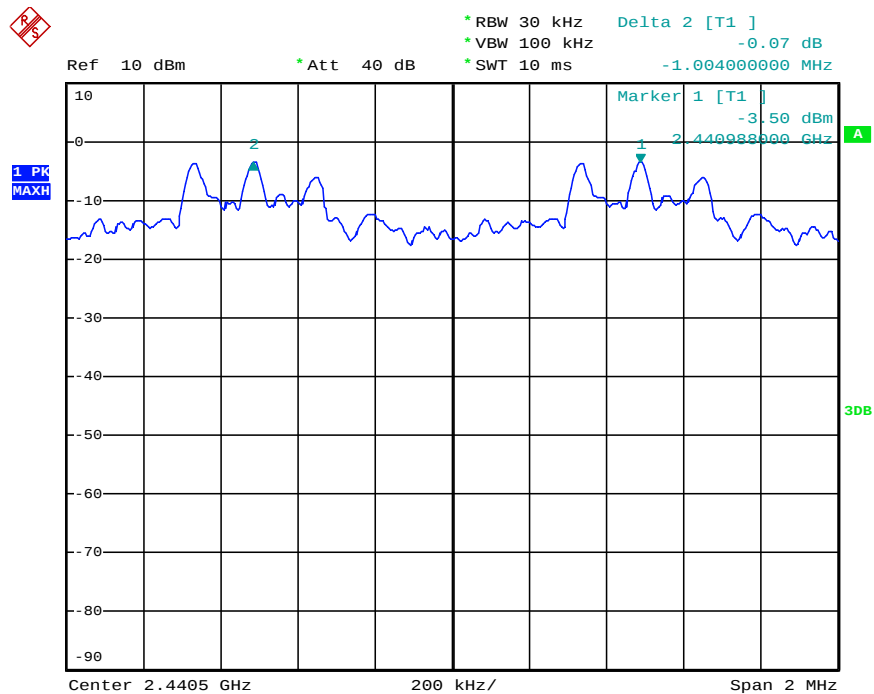

Date: 7.NOV.2014 09:48:32

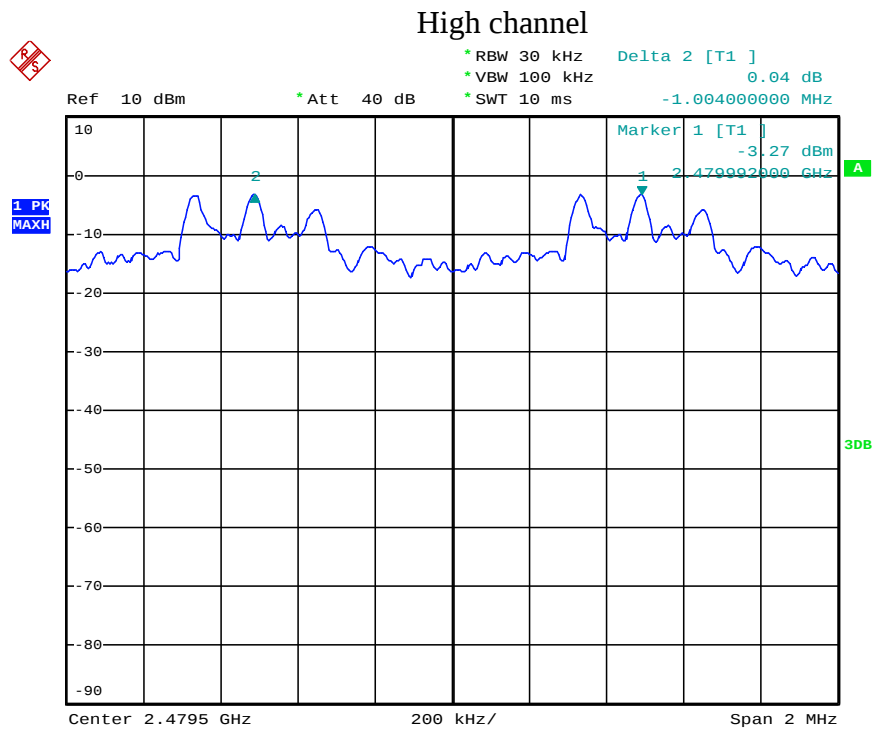

Date: 7.NOV.2014 09:45:52

7. NUMBER OF HOPPING FREQUENCY TEST

7.1. Block Diagram of Test Setup



(EUT: PROPORT)

7.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX (Hopping on) modes measure it.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set the spectrum analyzer as Span=83.5MHz, RBW=100 kHz, VBW=300 kHz.


7.5.3. Max hold, view and count how many channel in the band.

7.6. Test Result

Total number of hopping channel	Measurement result(CH)	Limit(CH)
	79	≥ 15


The spectrum analyzer plots are attached as below.

Number of hopping channels(GFSK)

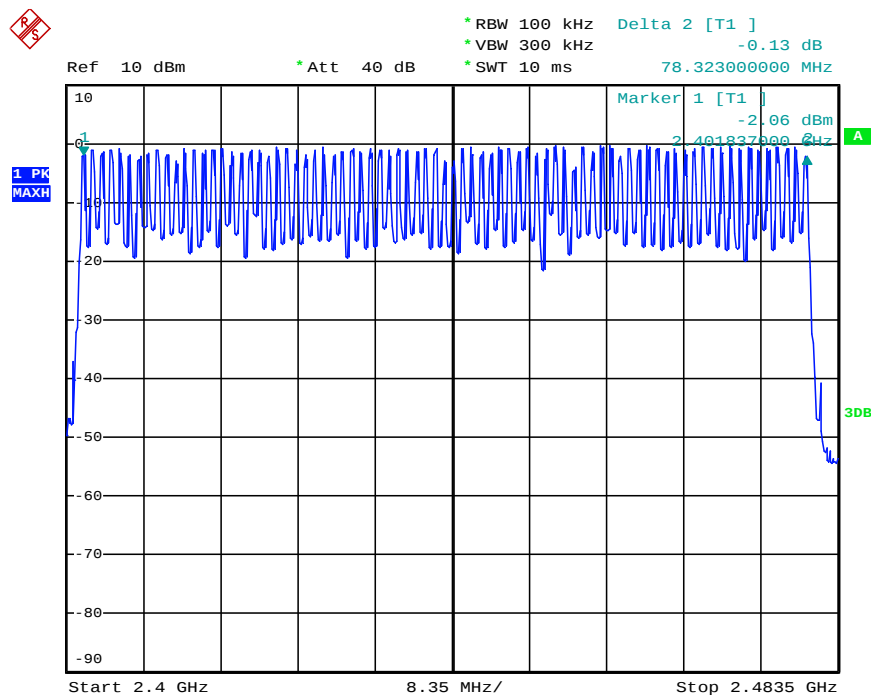


Date: 7.NOV.2014 09:53:20

Number of hopping channels($\Pi/4$ -DQPSK)

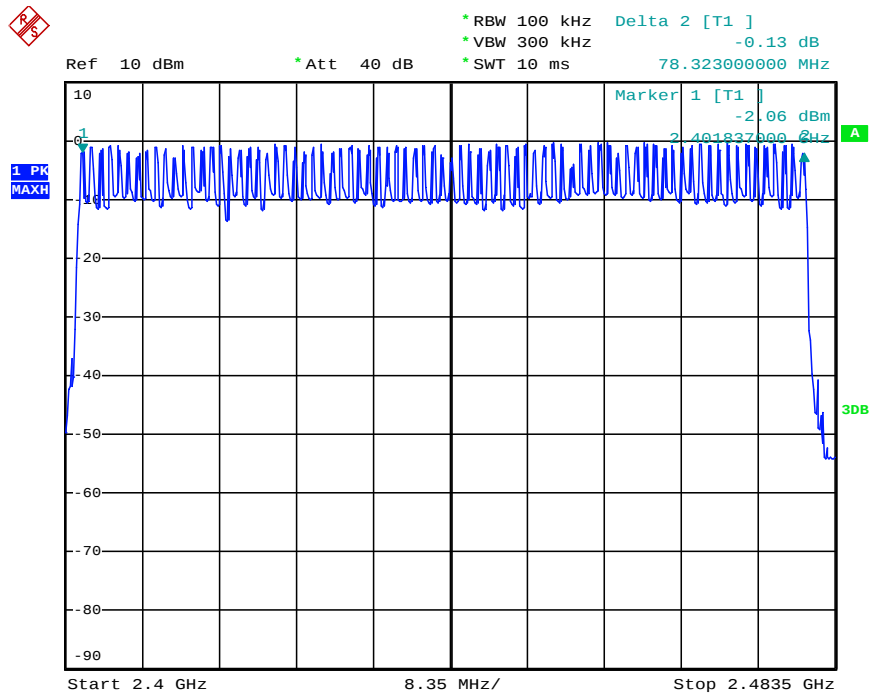

Date: 7.NOV.2014 09:54:21

Number of hopping channels(8DPSK)

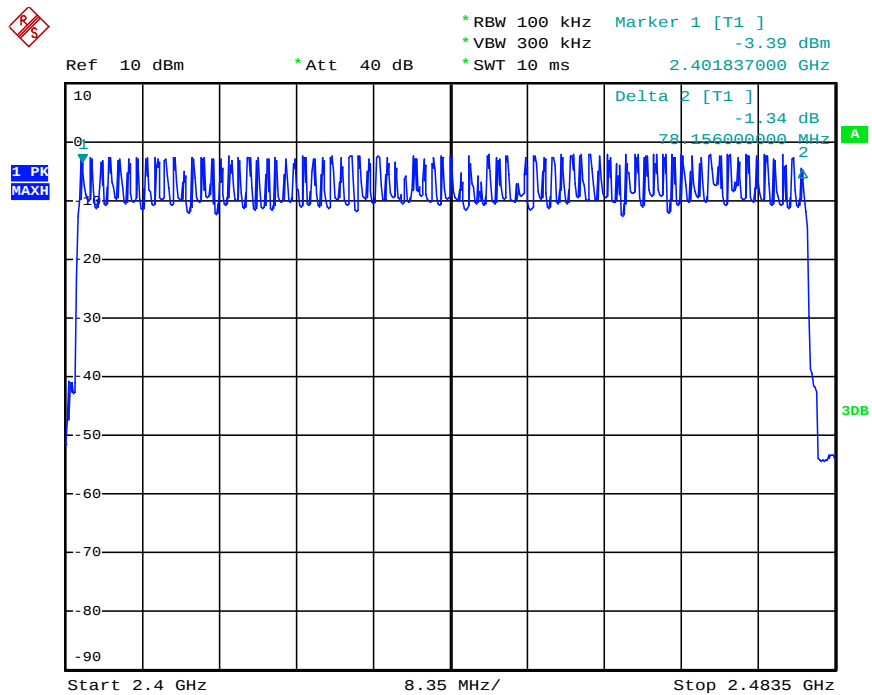

Date: 7.NOV.2014 09:56:05

8. DWELL TIME TEST

8.1. Block Diagram of Test Setup



(EUT: PROPORT)

8.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Set center frequency of spectrum analyzer = operating frequency.

8.5.3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz.

8.5.4. Repeat above procedures until all frequency measured were complete.

8.6. Test Result

GFSK Mode

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2402	0.420	134.40	400
	2441	0.430	137.60	400
	2480	0.420	134.40	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2 \times 79)) \times 31.6$				
DH3	2402	1.700	272.00	400
	2441	1.700	272.00	400
	2480	1.680	268.80	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4 \times 79)) \times 31.6$				
DH5	2402	2.970	316.80	400
	2441	2.920	311.47	400
	2480	2.940	313.60	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6 \times 79)) \times 31.6$				

Π/4-DQPSK

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2402	0.440	140.80	400
	2441	0.430	137.60	400
	2480	0.440	140.80	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2 \times 79)) \times 31.6$				
DH3	2402	1.700	272.00	400
	2441	1.720	275.20	400
	2480	1.720	275.20	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4 \times 79)) \times 31.6$				
DH5	2402	2.960	315.73	400
	2441	2.960	315.73	400
	2480	2.960	315.73	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6 \times 79)) \times 31.6$				


8DPSK Mode

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2402	0.430	137.60	400
	2441	0.440	140.80	400
	2480	0.440	140.80	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2 \times 79)) \times 31.6$				
DH3	2402	1.720	275.20	400
	2441	1.700	272.00	400
	2480	1.720	275.20	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4 \times 79)) \times 31.6$				
DH5	2402	2.980	317.87	400
	2441	2.960	315.73	400
	2480	2.980	317.87	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6 \times 79)) \times 31.6$				

The spectrum analyzer plots are attached as below.


Mode 1: GFSK Link Mode

DH1 Low channel

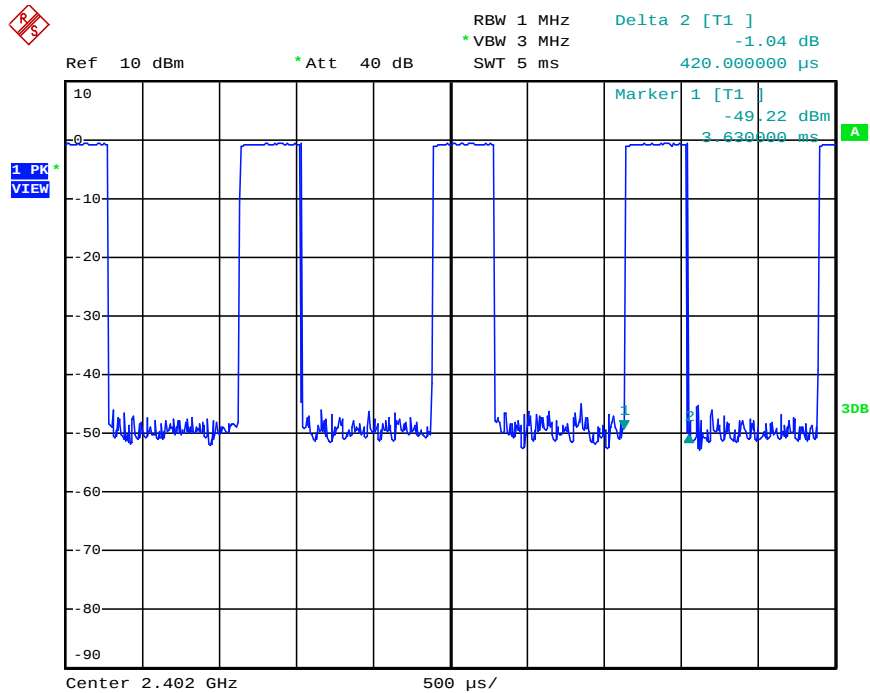


Date: 7.NOV.2014 10:28:36

DH1 Middle channel

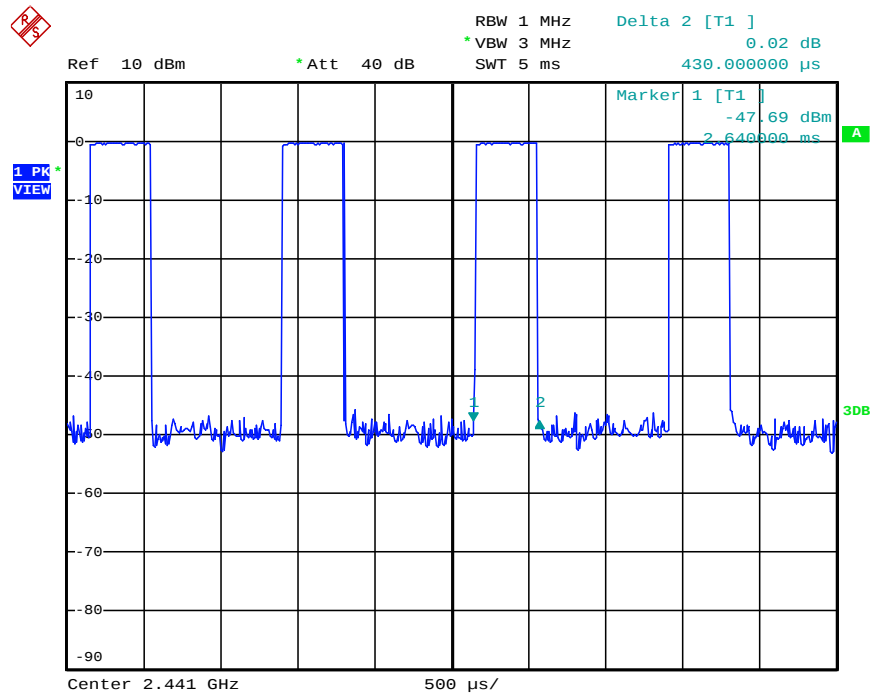


Date: 7.NOV.2014 10:27:58

DH1 High channel

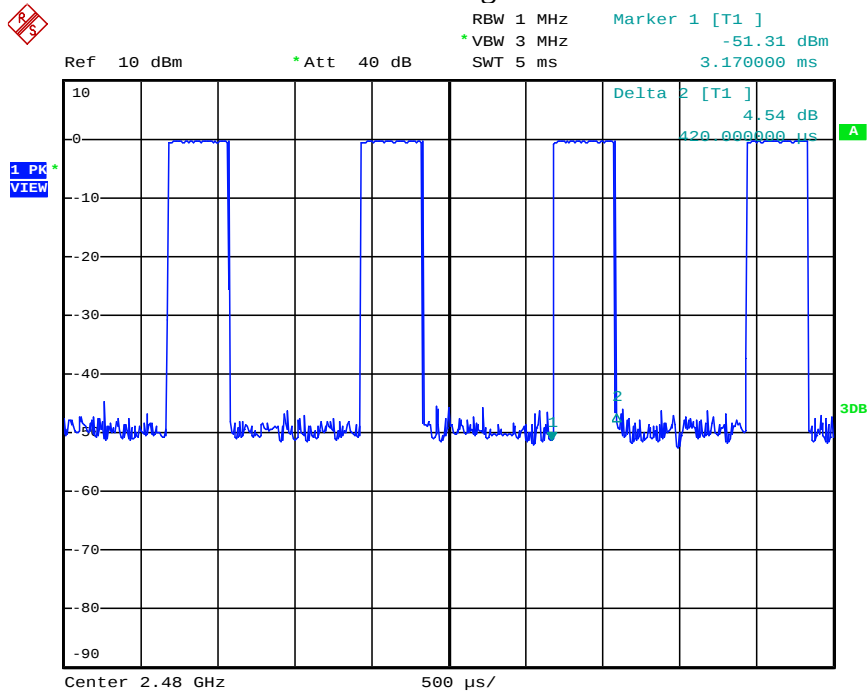


Date: 7.NOV.2014 10:26:47

DH3 Low channel

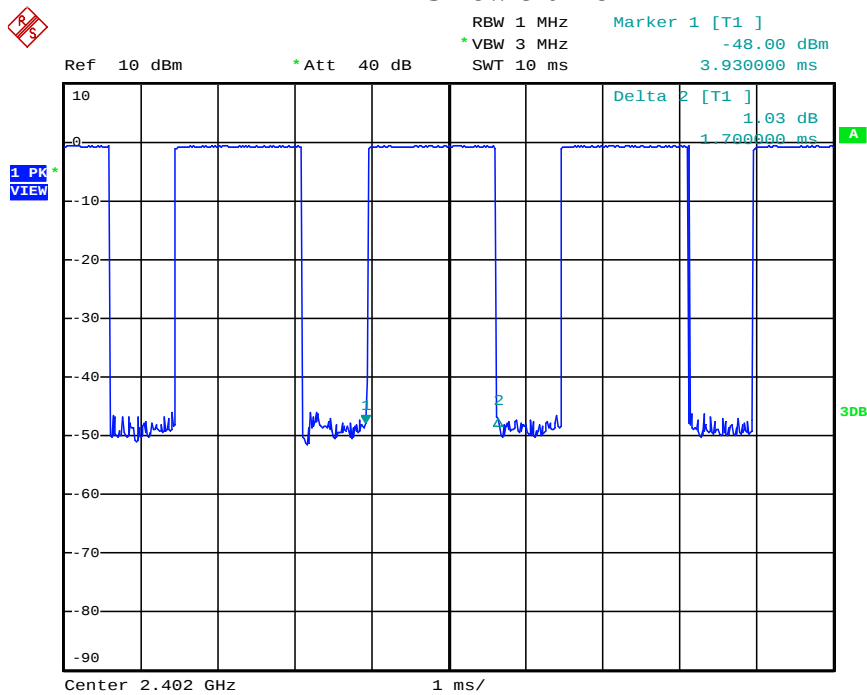


Date: 7.NOV.2014 10:29:08

DH3 Middle channel

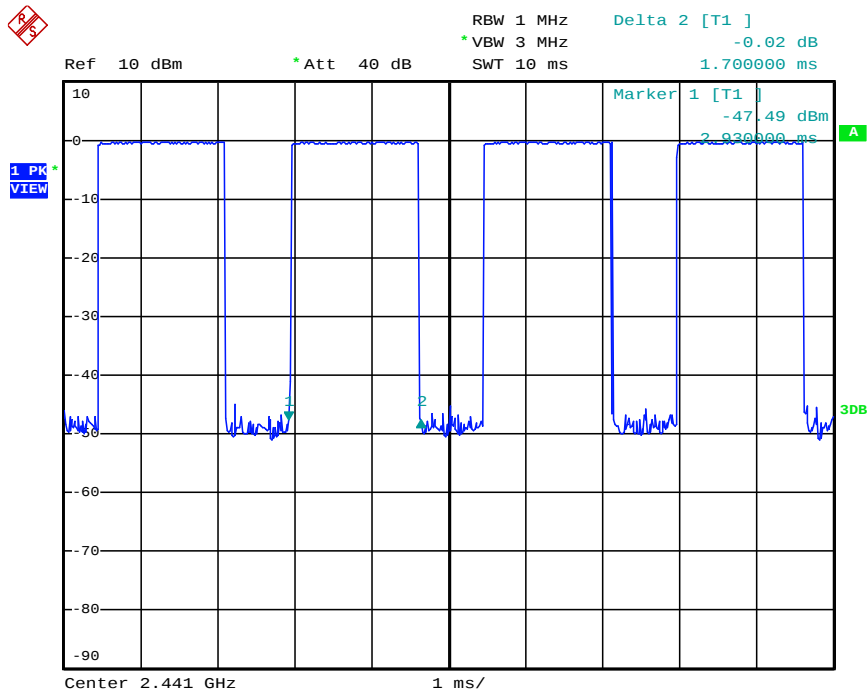


Date: 7.NOV.2014 10:29:44

DH3 High channel

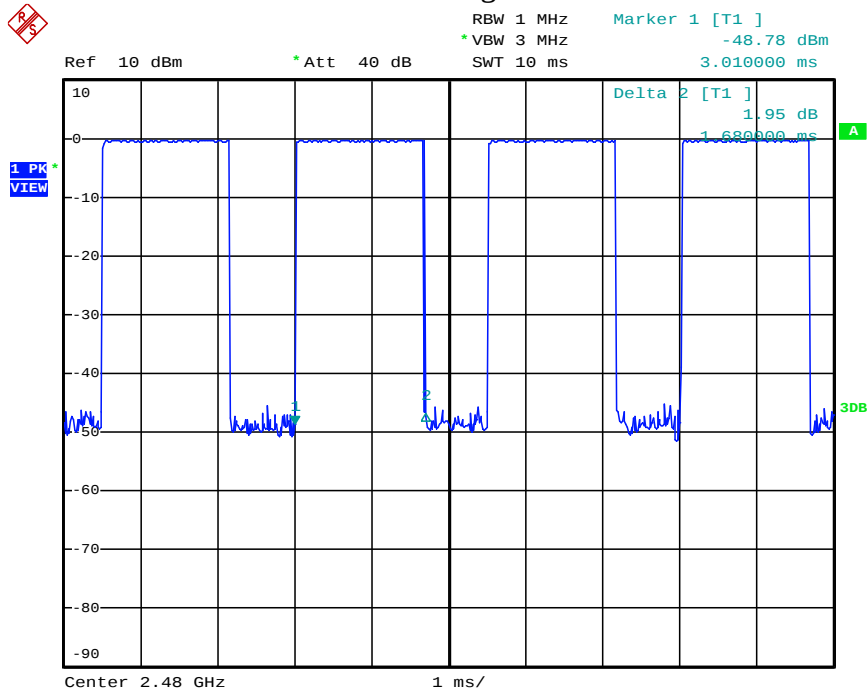


Date: 7.NOV.2014 10:30:28

DH5 Low channel

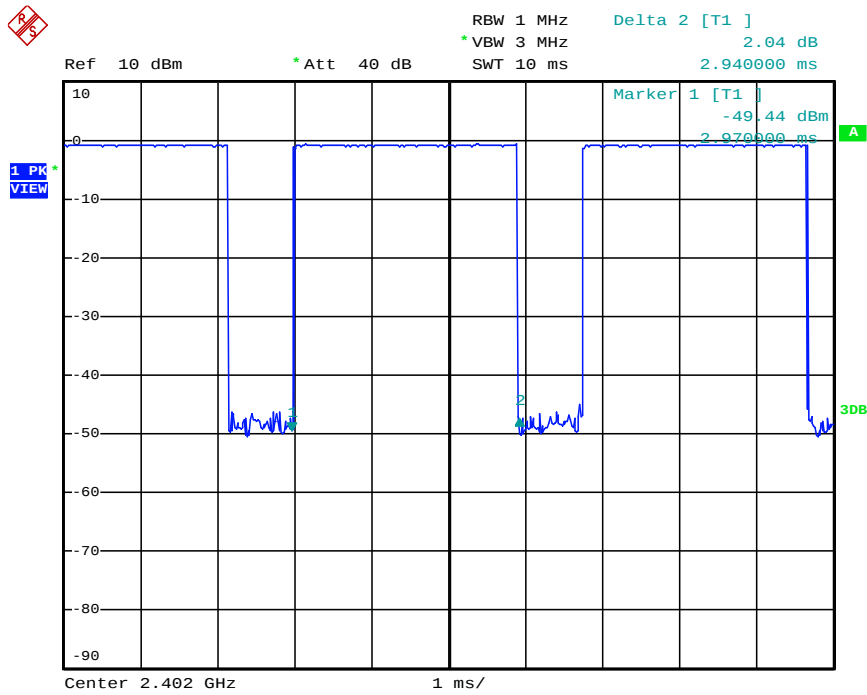


Date: 7.NOV.2014 10:31:58

DH5 Middle channel

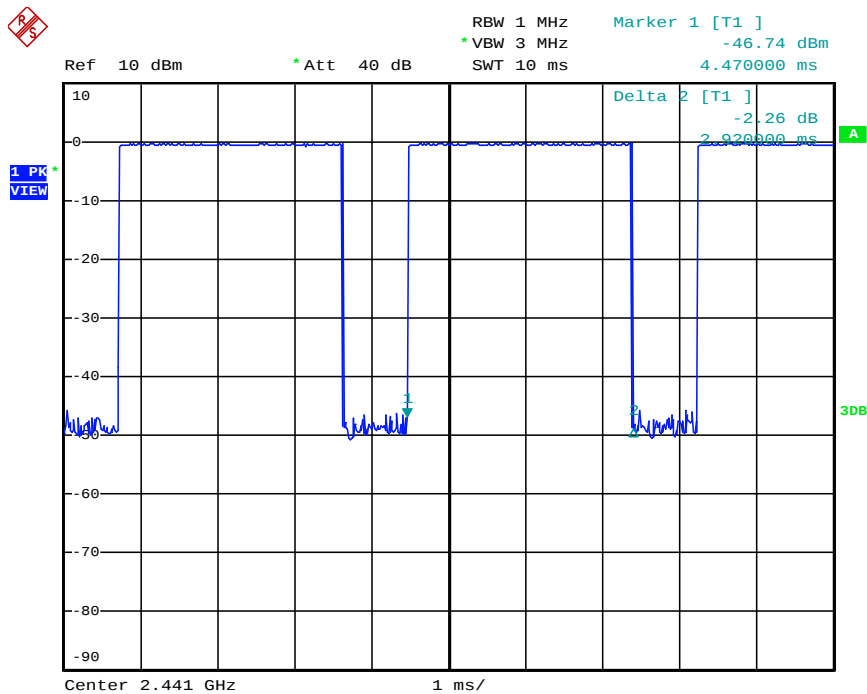

Date: 7.NOV.2014 10:31:30


DH5 High channel

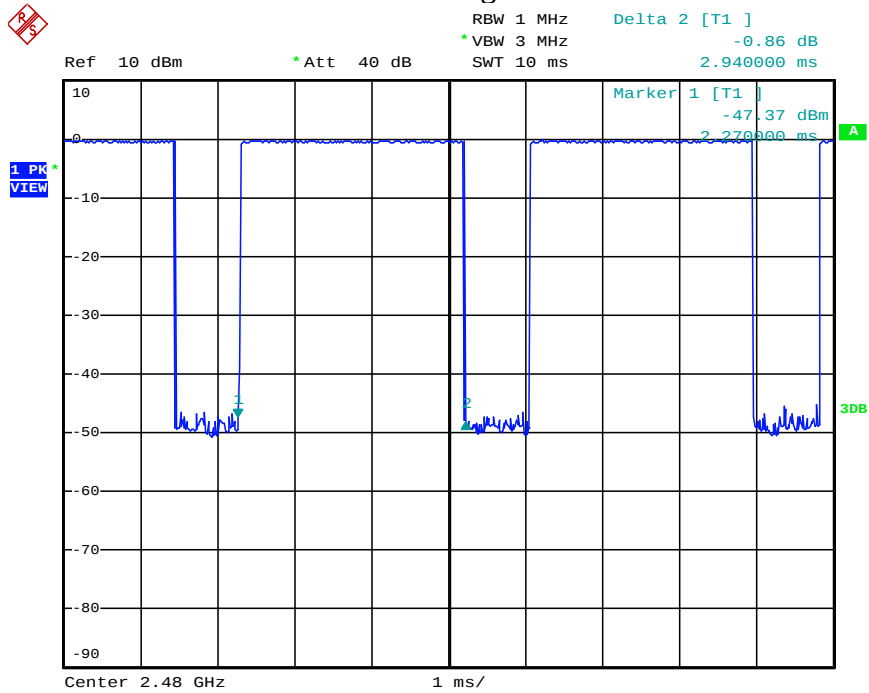

Date: 7.NOV.2014 10:30:56


Mode 2: $\pi/4$ DQPSK Link Mode

2DH1 Low channel

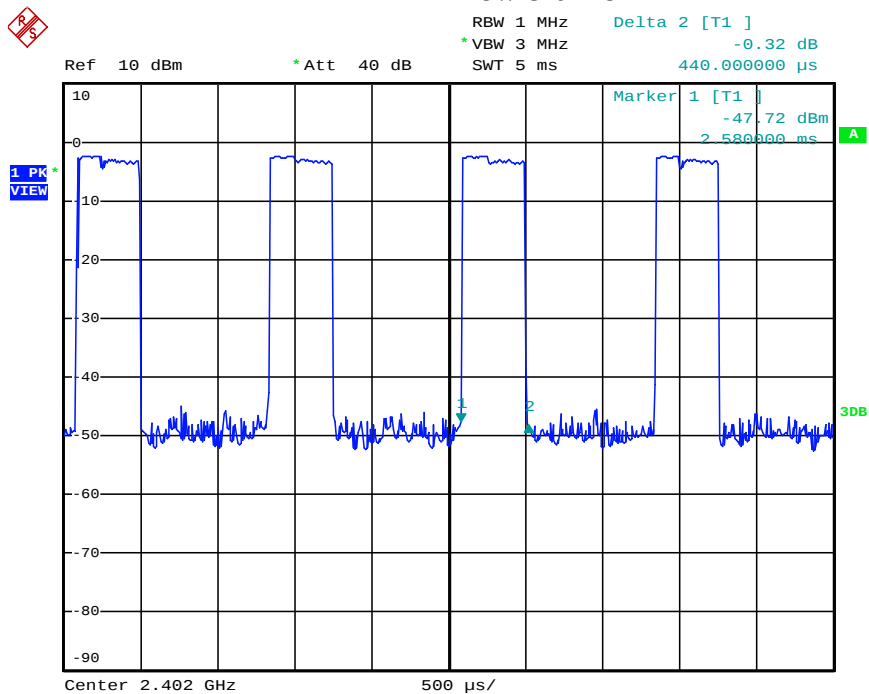


Date: 7.NOV.2014 10:11:51

2DH1 Middle channel

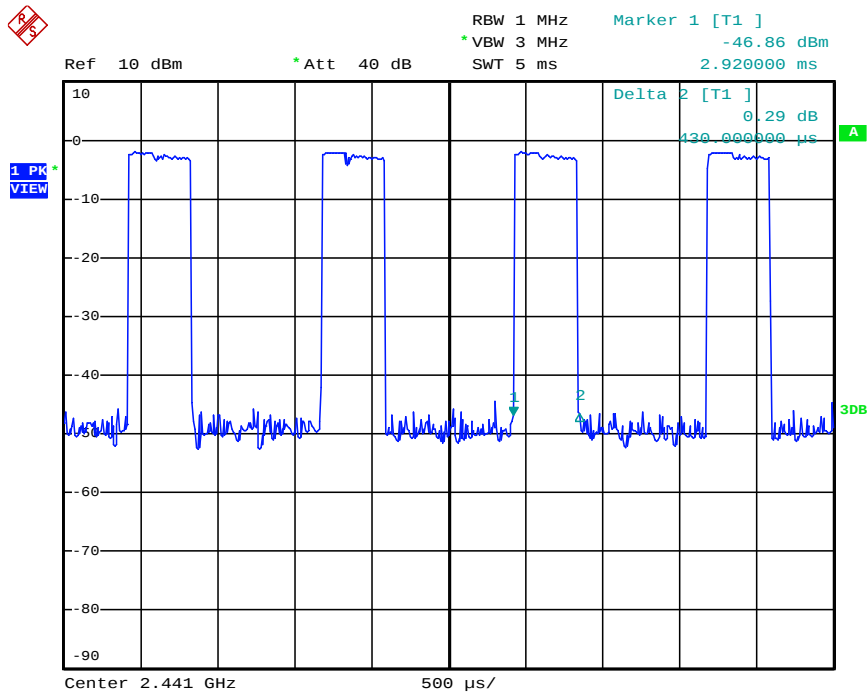


Date: 7.NOV.2014 10:11:02

2DH1 High channel

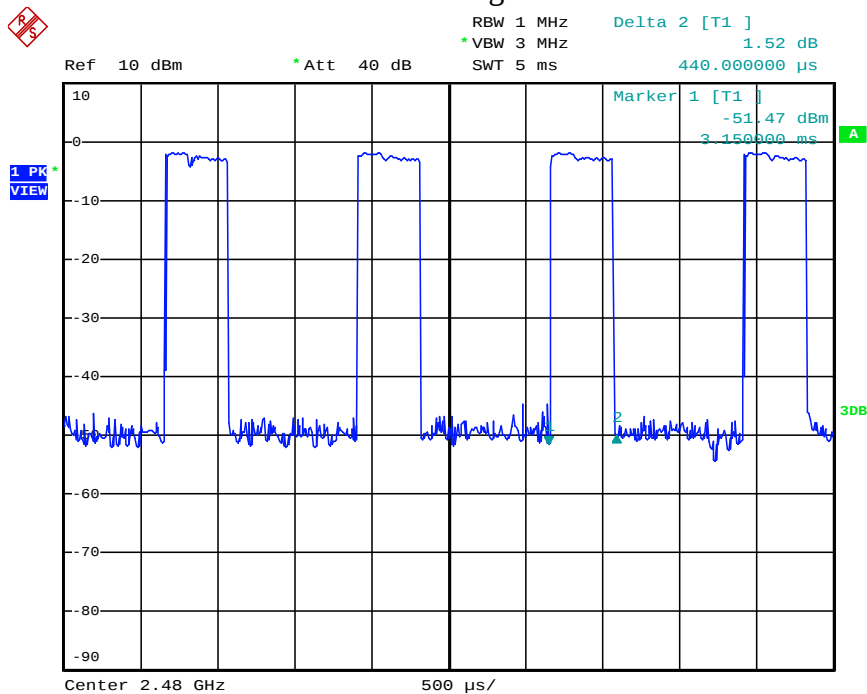


Date: 7.NOV.2014 10:10:15

2DH3 Low channel

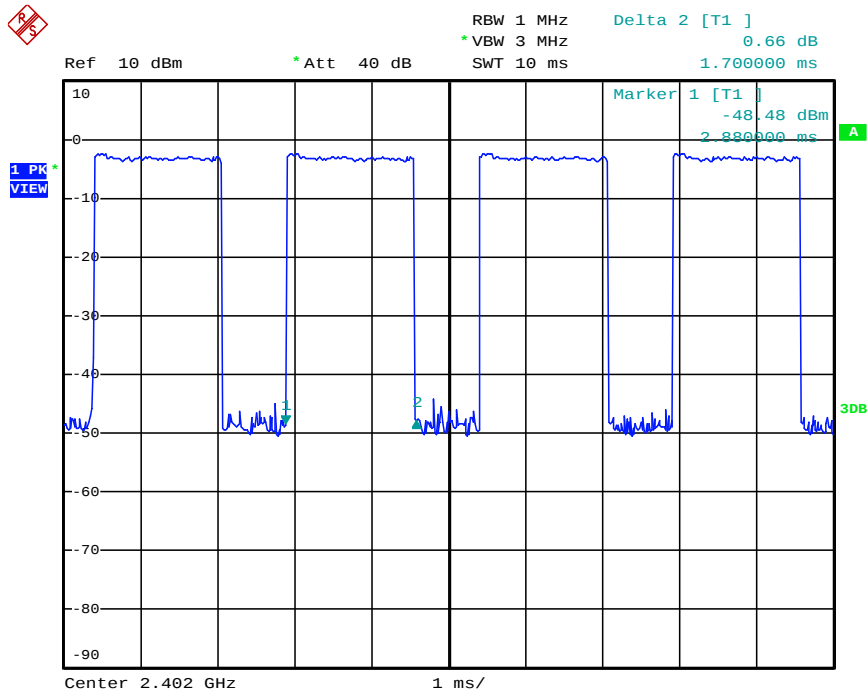


Date: 7.NOV.2014 10:12:31

2DH3 Middle channel

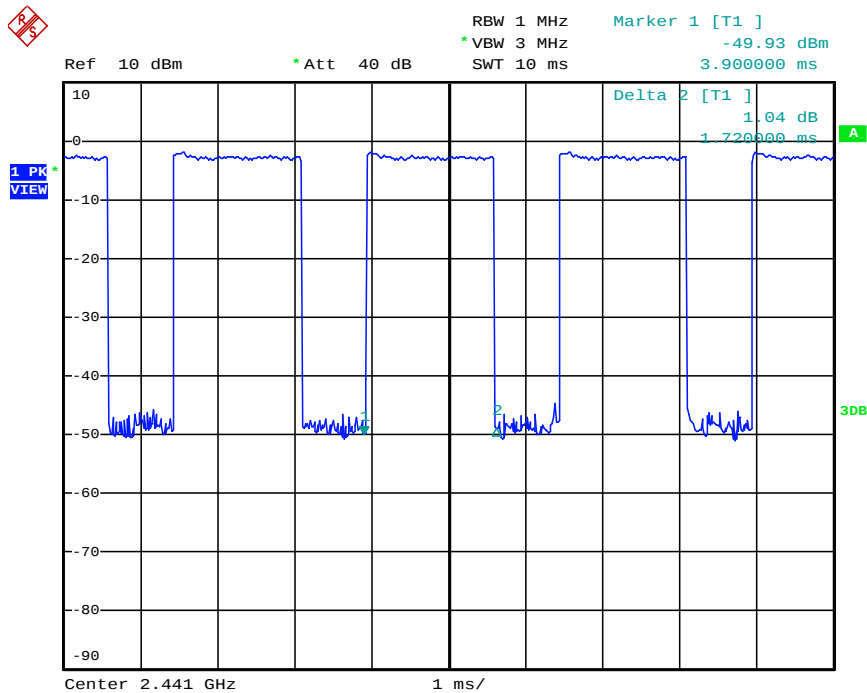


Date: 7.NOV.2014 10:13:15

2DH3 High channel

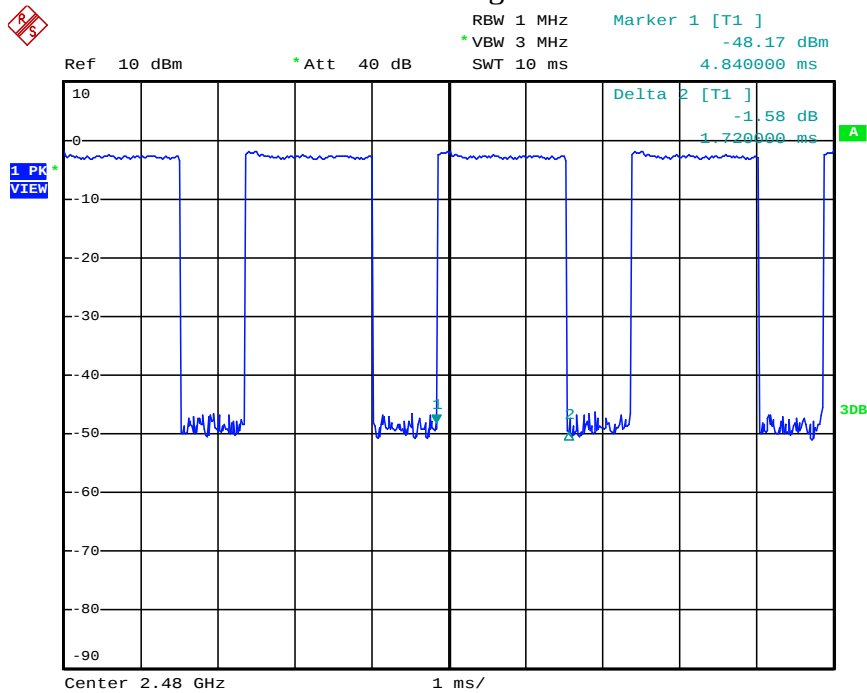


Date: 7.NOV.2014 10:14:46

2DH5 Low channel

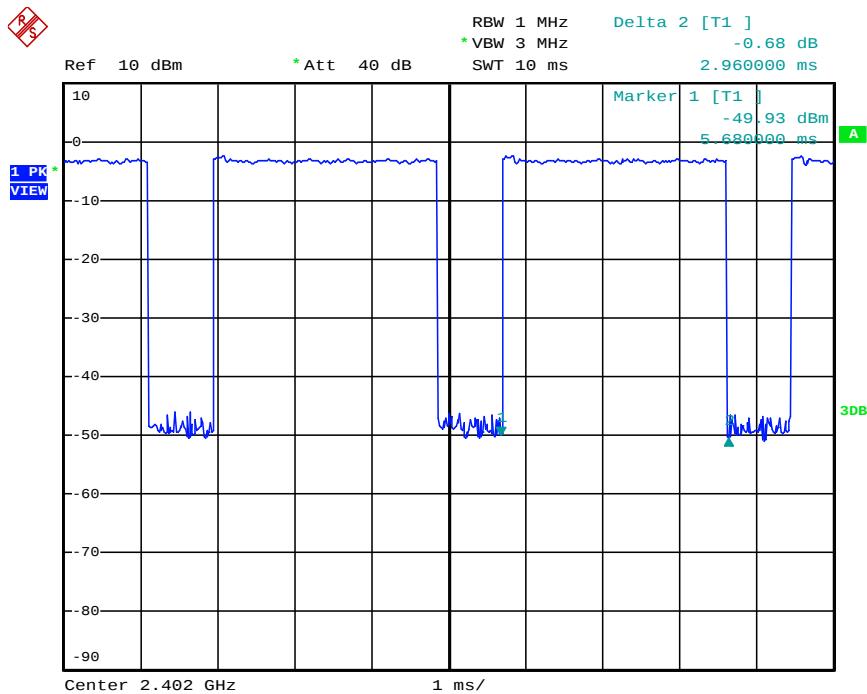


Date: 7.NOV.2014 10:16:56

2DH5 Middle channel

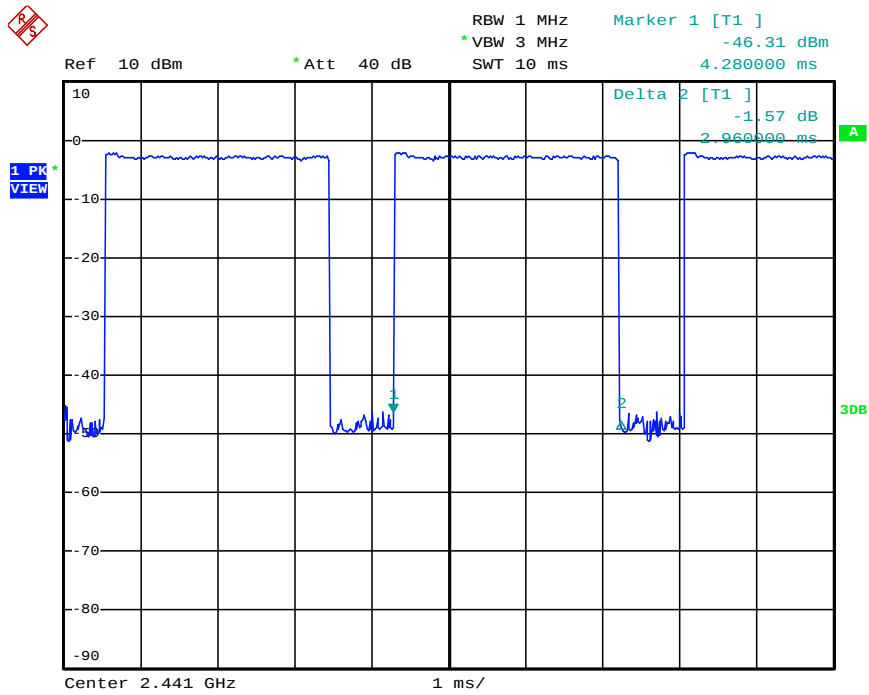

Date: 7.NOV.2014 10:16:09


2DH5 High channel

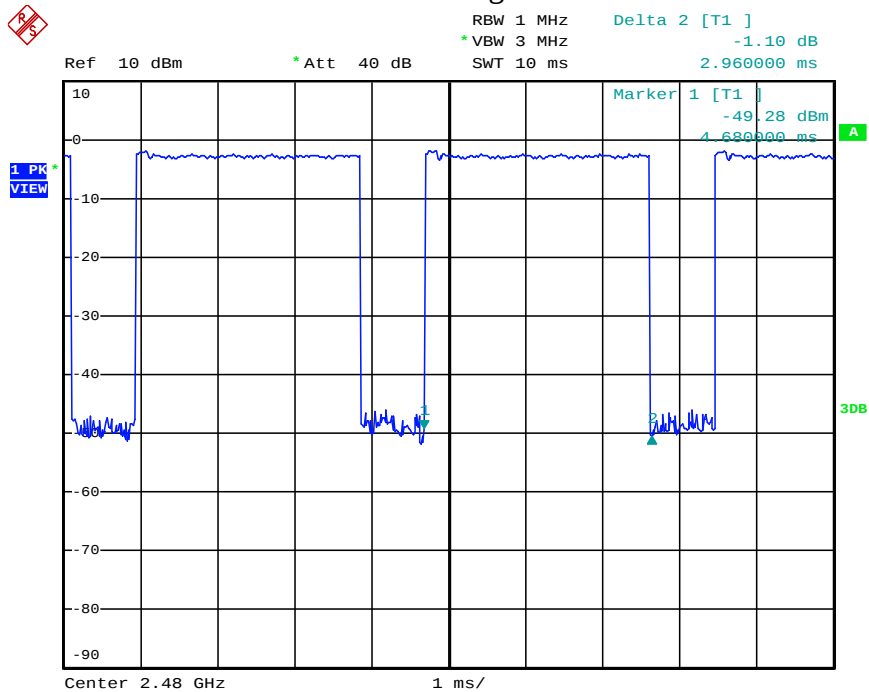

Date: 7.NOV.2014 10:15:17


Mode 3: 8DPSK Link Mode

3DH1 Low channel

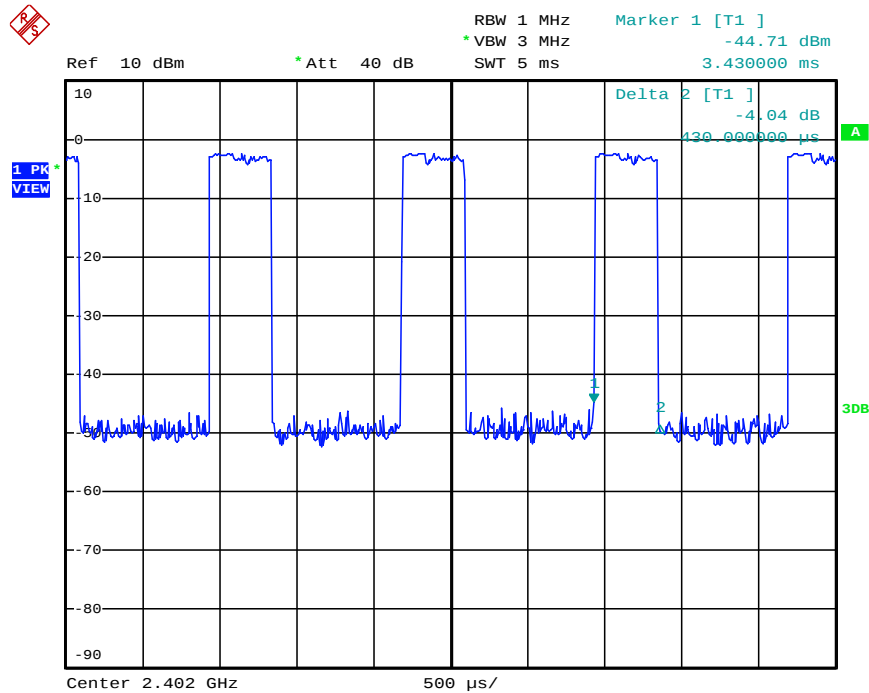


Date: 7.NOV.2014 10:24:28

3DH1 Middle channel

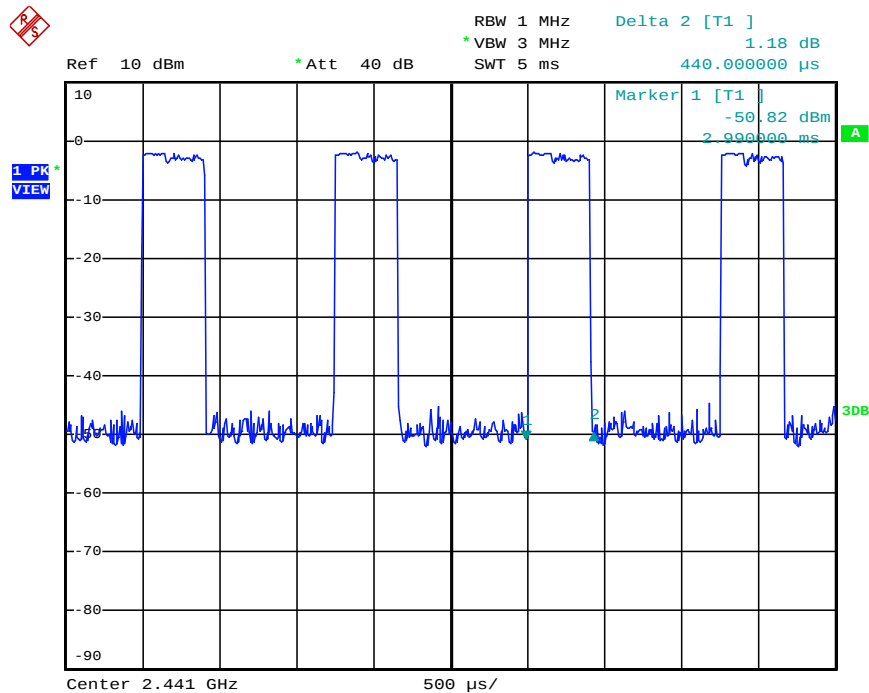


Date: 7.NOV.2014 10:25:10

3DH1 High channel

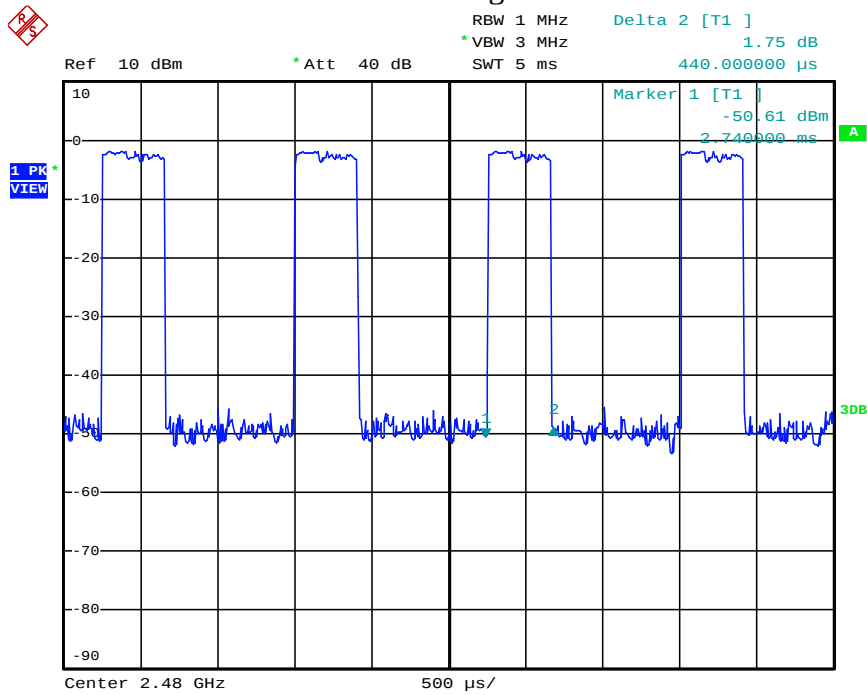


Date: 7.NOV.2014 10:25:52

3DH3 Low channel

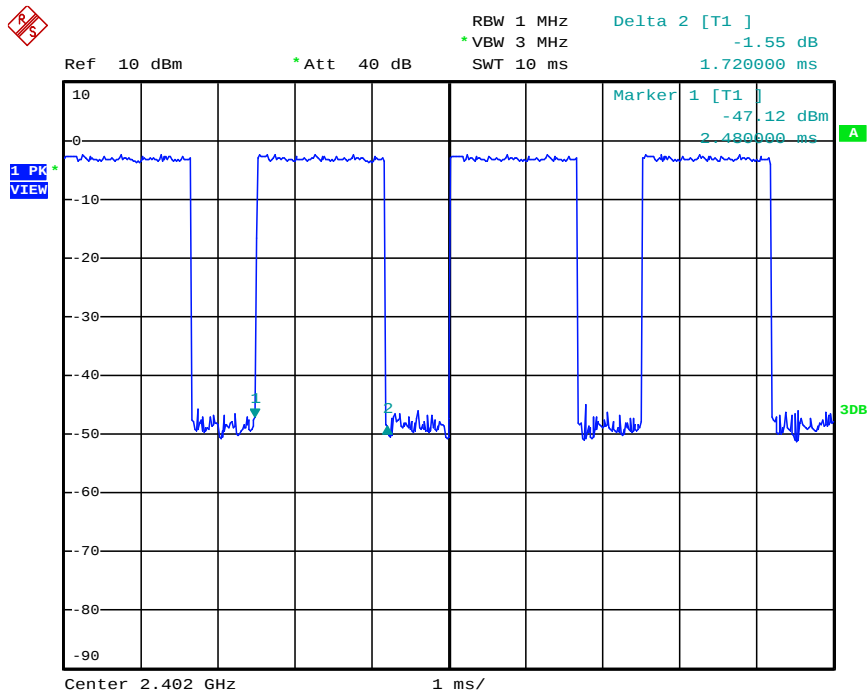


Date: 7.NOV.2014 10:23:44

3DH3 Middle channel

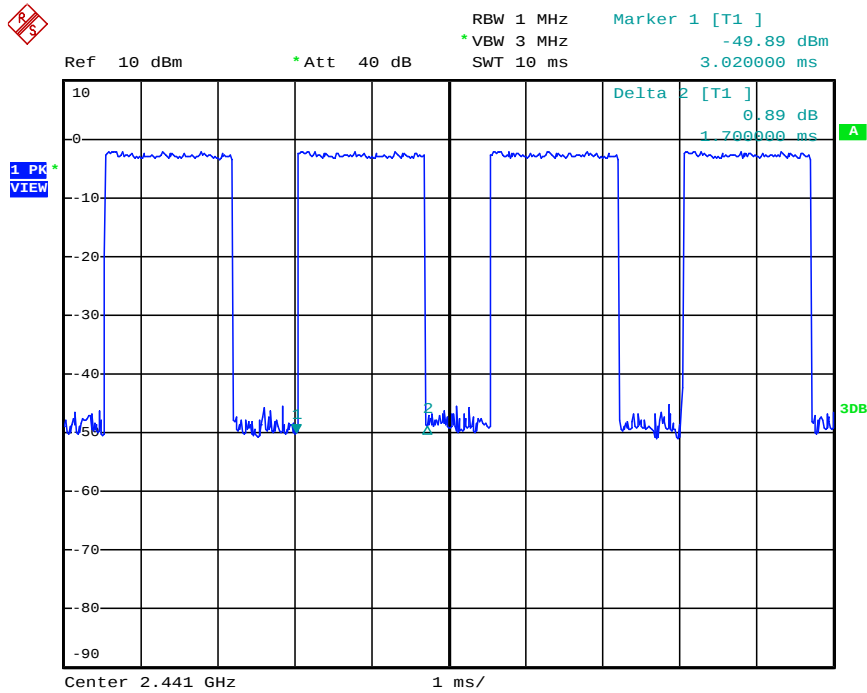


Date: 7.NOV.2014 10:22:59

3DH3 High channel

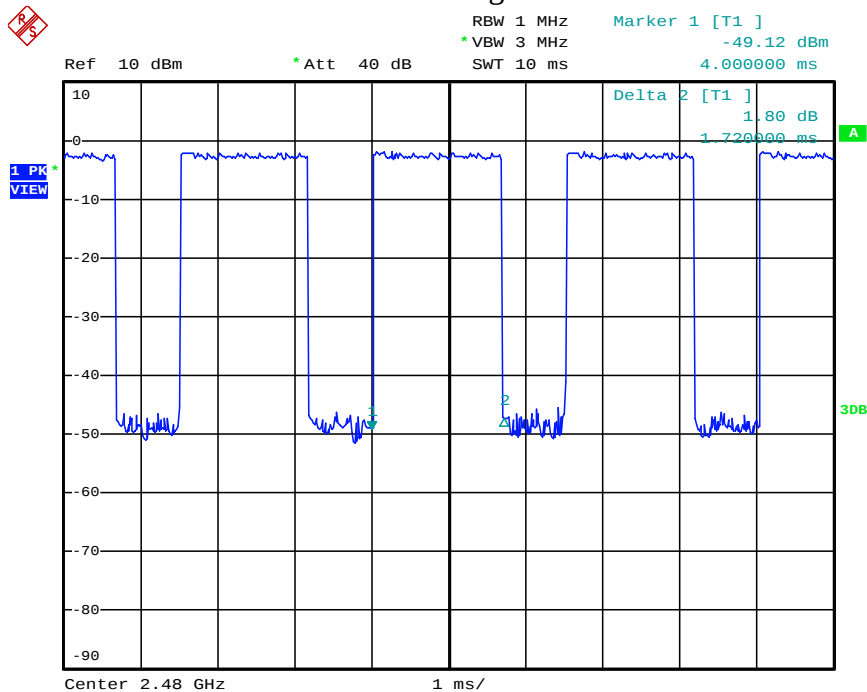


Date: 7.NOV.2014 10:22:09

3DH5 Low channel

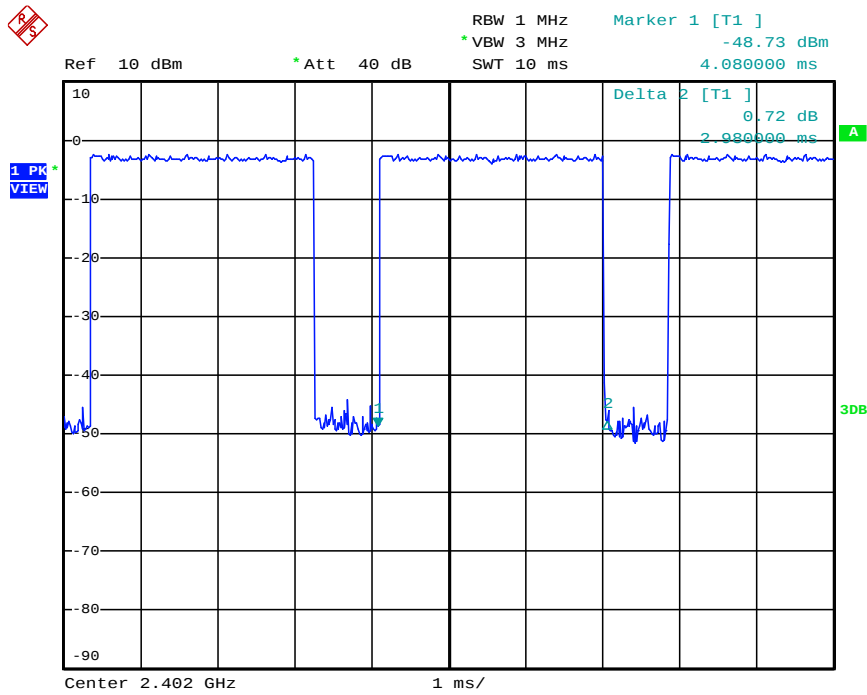


Date: 7.NOV.2014 10:18:44

3DH5 Middle channel

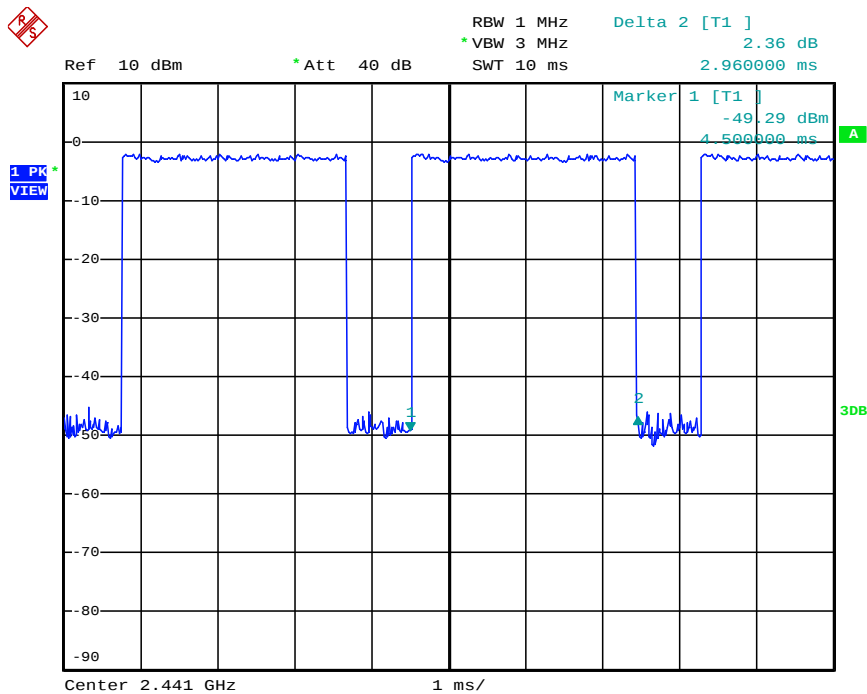

Date: 7.NOV.2014 10:20:15

3DH5 High channel

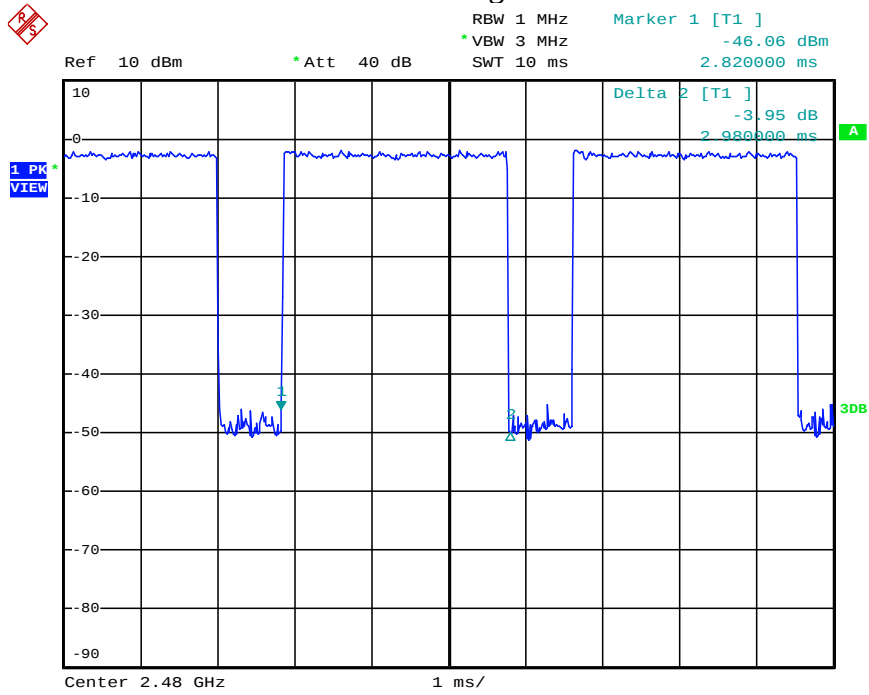

Date: 7.NOV.2014 10:20:59

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1. Block Diagram of Test Setup



(EUT: PROPORT)

9.2. The Requirement For Section 15.247(b)(1)

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

9.5. Test Procedure

9.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz for GFSK mode

9.5.3. Set RBW of spectrum analyzer to 3MHz and VBW to 3MHz for other mode

9.5.4. Measurement the maximum peak output power.

9.6. Test Result

GFSK Mode

Channel	Frequency (MHz)	Peak Output Power(dBm)	Peak Output Power(mW)	Limits dBm / W
Low	2402	-0.63	0.86	30/1.0
Middle	2441	-0.23	0.95	30/1.0
High	2480	-0.04	0.99	30/1.0

II/4-DQPSK Mode

Channel	Frequency (MHz)	Peak Output Power(dBm)	Peak Output Power(mW)	Limits dBm / W
Low	2402	-1.96	0.64	21 / 0.125
Middle	2441	-1.78	0.66	21 / 0.125
High	2480	-1.44	0.72	21 / 0.125


8DPSK Mode

Channel	Frequency (MHz)	Peak Output Power(dBm)	Peak Output Power(mW)	Limits dBm / W
Low	2402	-2.14	0.61	21 / 0.125
Middle	2441	-1.47	0.71	21 / 0.125
High	2480	-1.66	0.68	21 / 0.125

The spectrum analyzer plots are attached as below.


GFSK Mode

Low channel

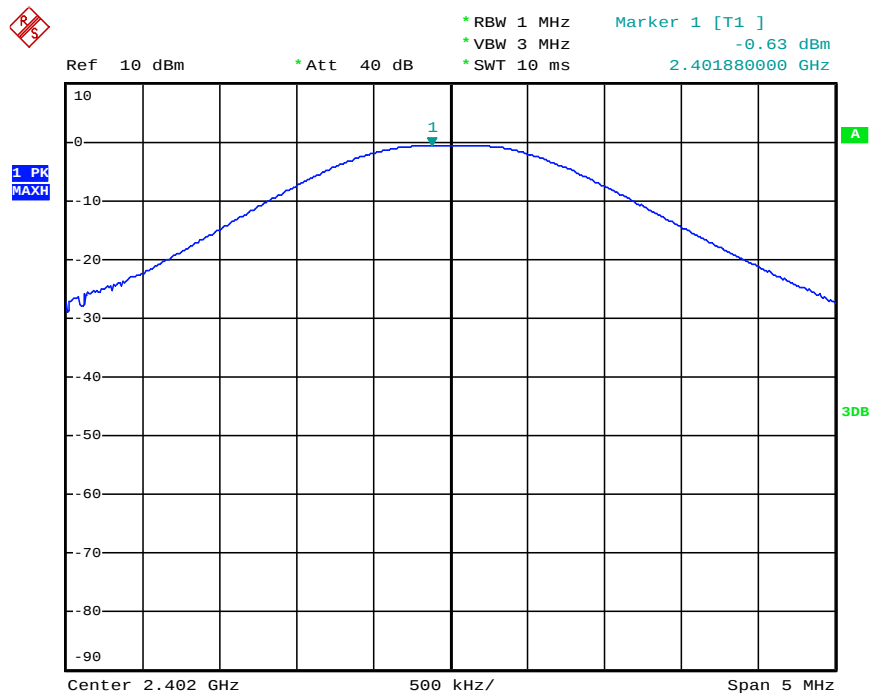


Date: 7.NOV.2014 09:58:02

Middle channel

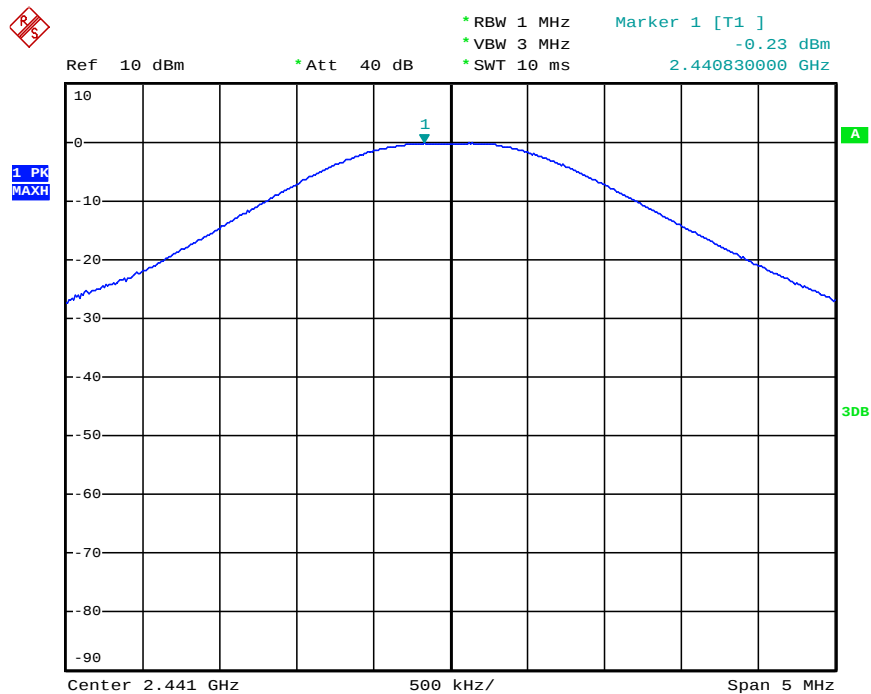

Date: 7.NOV.2014 09:58:42


High channel

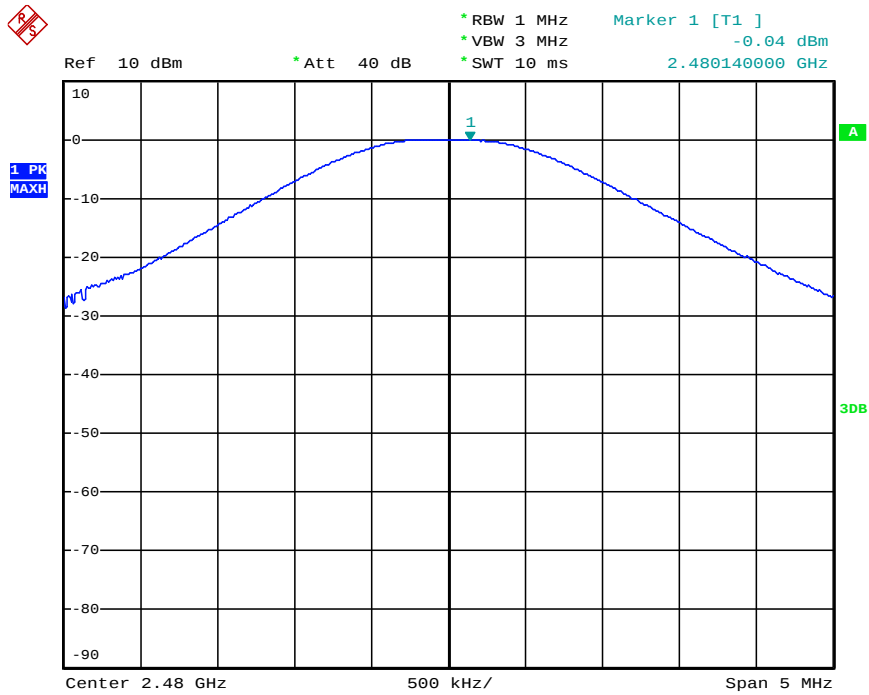

Date: 7.NOV.2014 10:00:57


Π/4-DQPSK Mode

Low channel

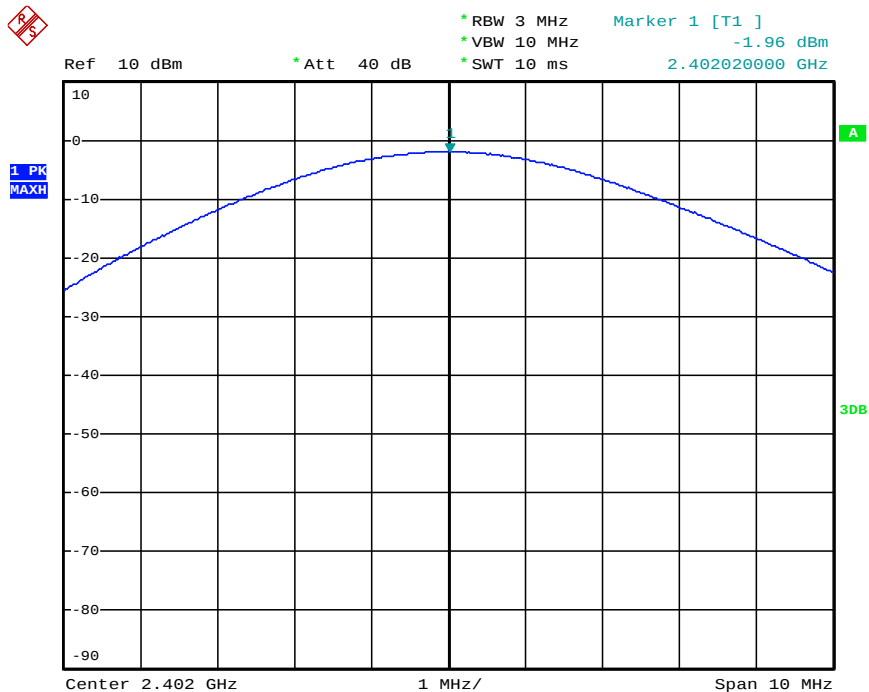


Date: 7.NOV.2014 09:57:20

Middle channel

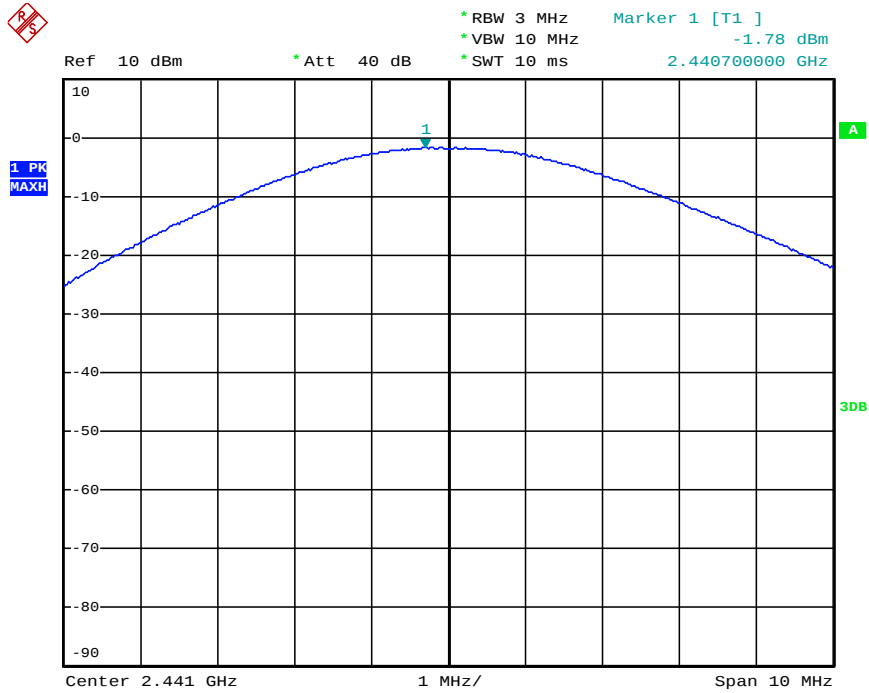

Date: 7.NOV.2014 09:59:42


High channel

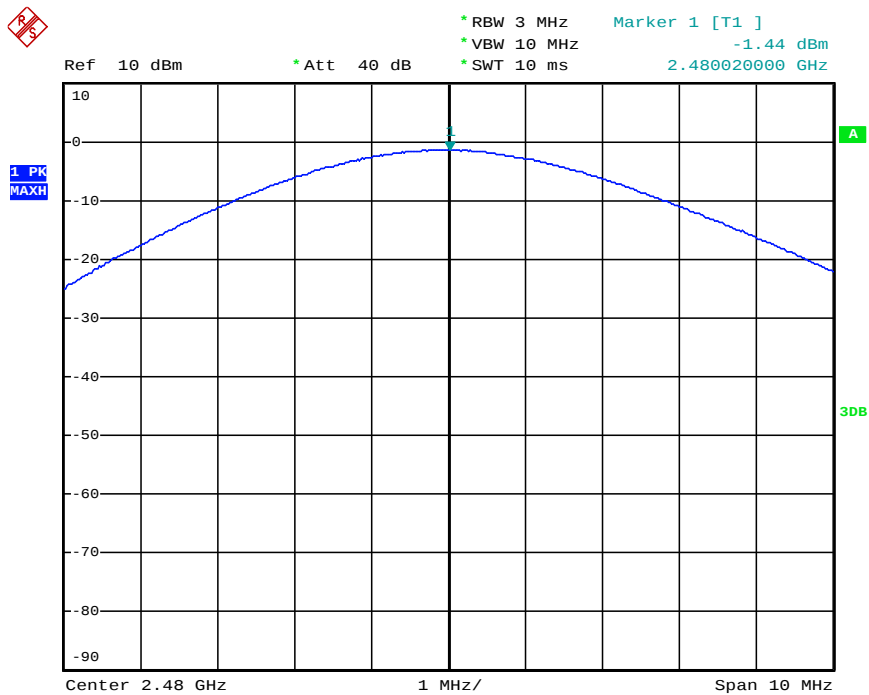

Date: 7.NOV.2014 10:00:24


8DPSK Mode

Low channel

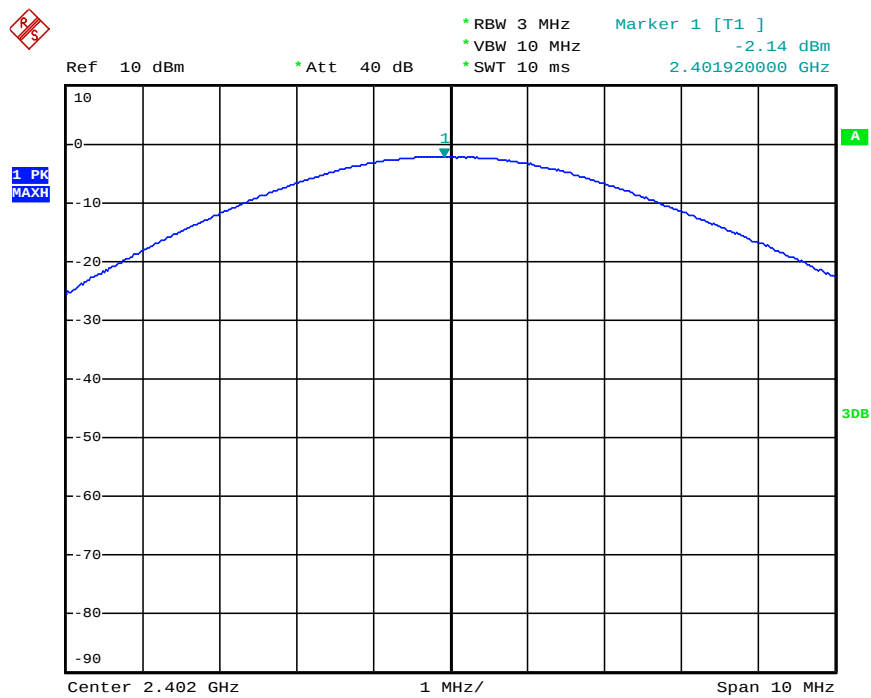


Date: 7.NOV.2014 09:57:35

Middle channel

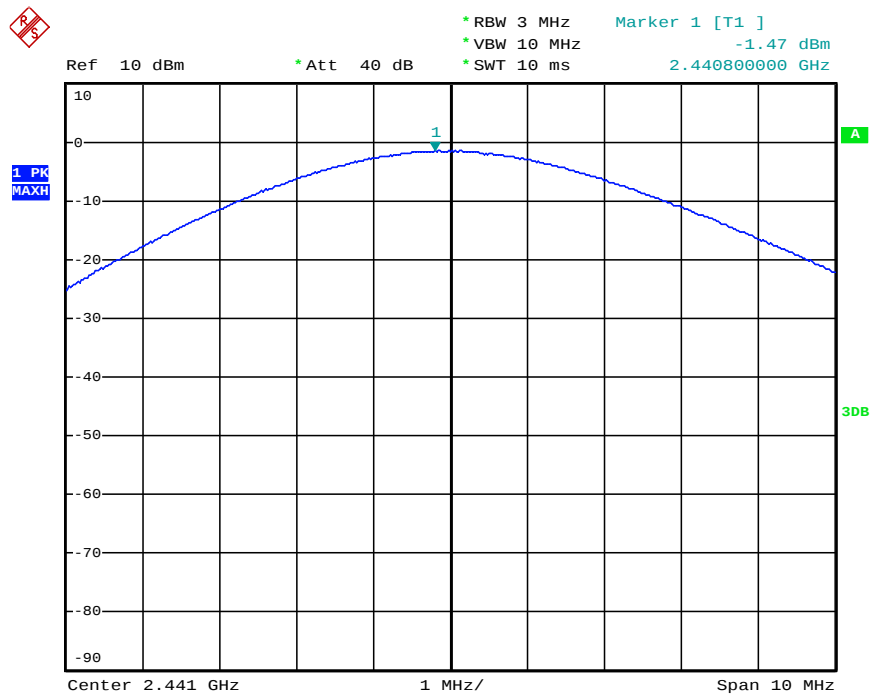

Date: 7.NOV.2014 09:59:54

High channel

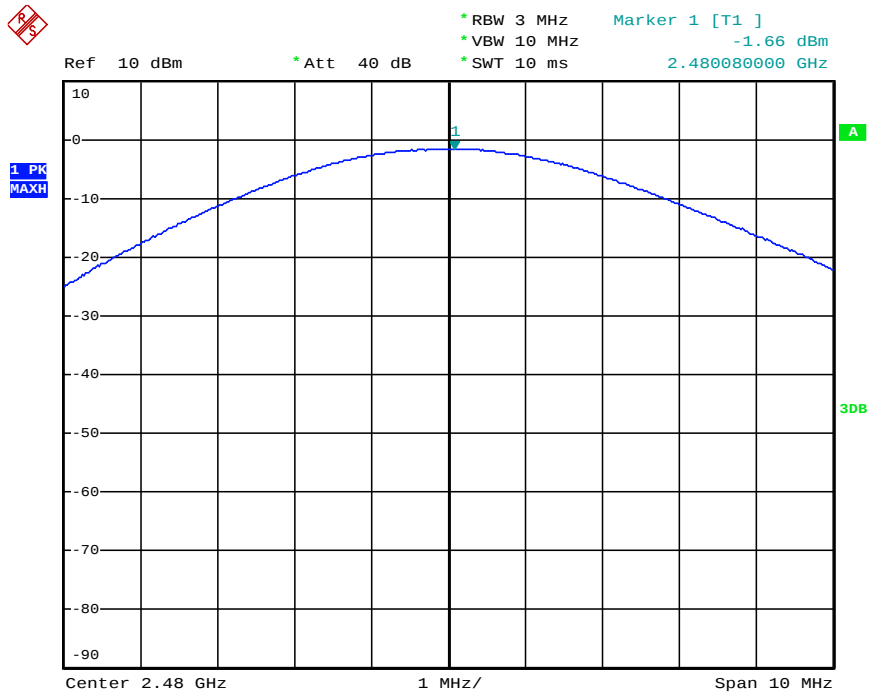

Date: 7.NOV.2014 10:00:40

10. RADIATED EMISSION TEST


10.1. Block Diagram of Test Setup

10.1.1. Block diagram of connection between the EUT and simulators



(EUT: PROPORT)

10.1.2. Anechoic Chamber Test Setup Diagram

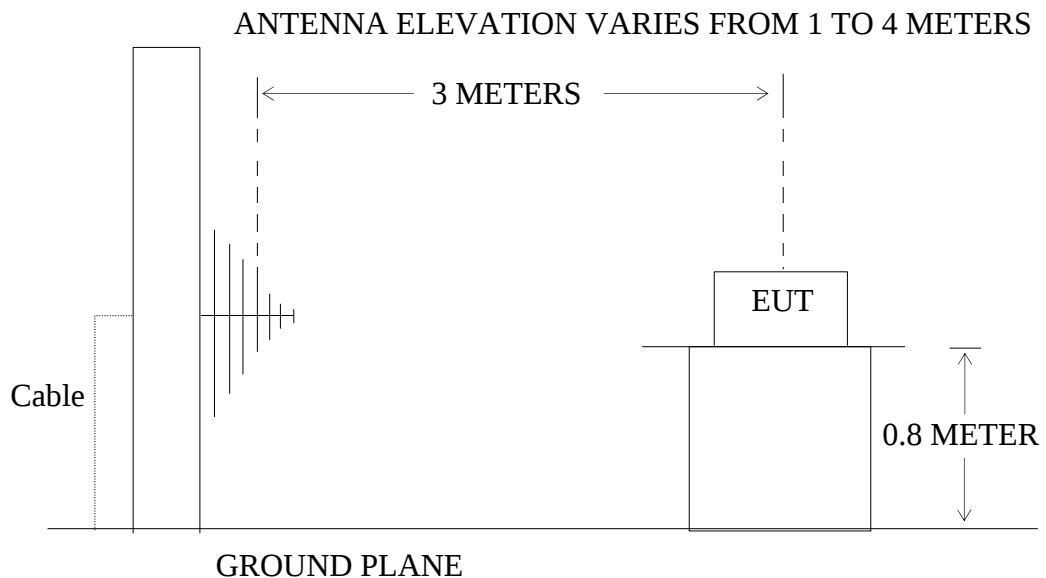

(EUT: PROPORT)

10.2. The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also

comply with the radiated emission limits specified in Section 15.209(a).

10.3.Restricted bands of operation

10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4- 2009 on radiated emission measurement.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

RBW (120 kHz), VBW (300 kHz) for QP detector below 1GHz

Peak detector above 1GHz

RBW (1 MHz), VBW (3MHz) for Peak measurement

RBW (1 MHz), VBW (10Hz) for AV measurement

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

10.6.The Field Strength of Radiation Emission Measurement Results

Note: 1.We tested GFSK mode, $\Pi/4$ -DQPSK Mode & 8DPSK mode and recorded the worst case data (GFSK mode) for all test mode.

2. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.

3. The 18-25GHz emissions are not reported, because the levels are too low against the limit.



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2014 #941

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: PROPORT

Mode: TX 2402MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/20/

Time: 10/18/57

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20141585

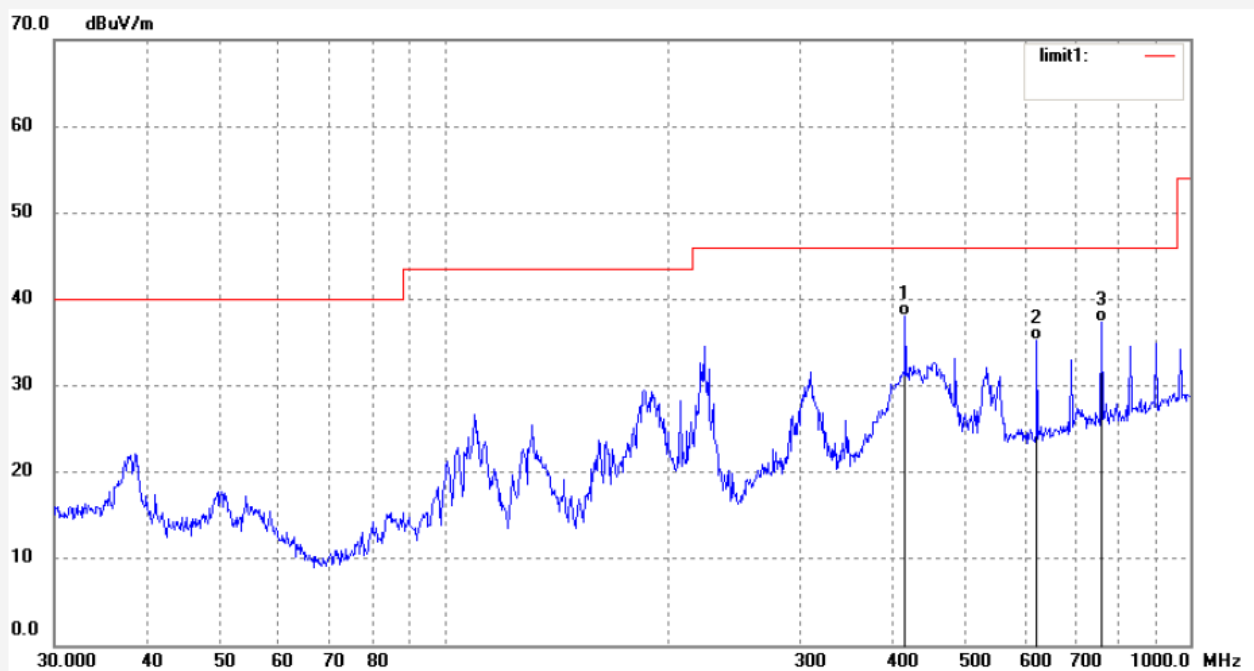

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	414.7223	44.43	-6.41	38.02	46.00	-7.98	QP			
2	622.8900	37.88	-2.65	35.23	46.00	-10.77	QP			
3	760.7036	38.29	-0.86	37.43	46.00	-8.57	QP			

Job No.: star2014 #943

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: PROPORT

Mode: TX 2402MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/20/

Time: 10/22/55

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20141585

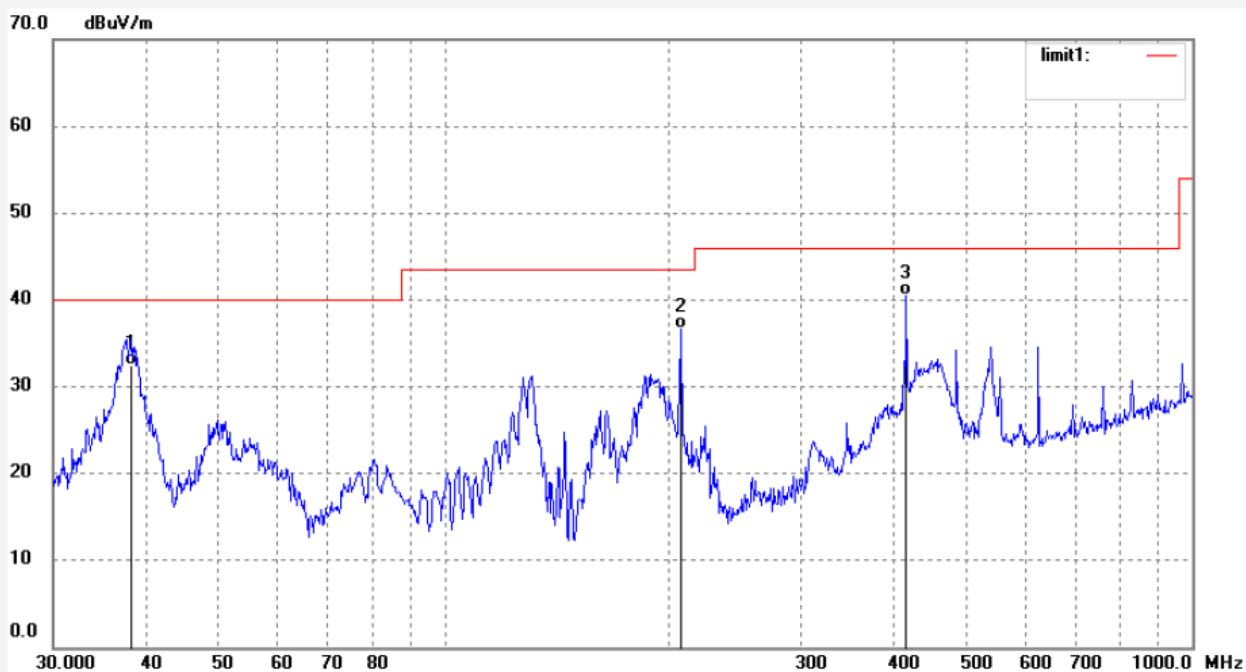

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	38.2120	43.56	-11.14	32.42	40.00	-7.58	QP			
2	207.1226	48.85	-12.24	36.61	43.50	-6.89	QP			
3	414.7223	46.97	-6.41	40.56	46.00	-5.44	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2014 #944

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: PROPORT

Mode: TX 2441MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/20/

Time: 10/25/57

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20141585

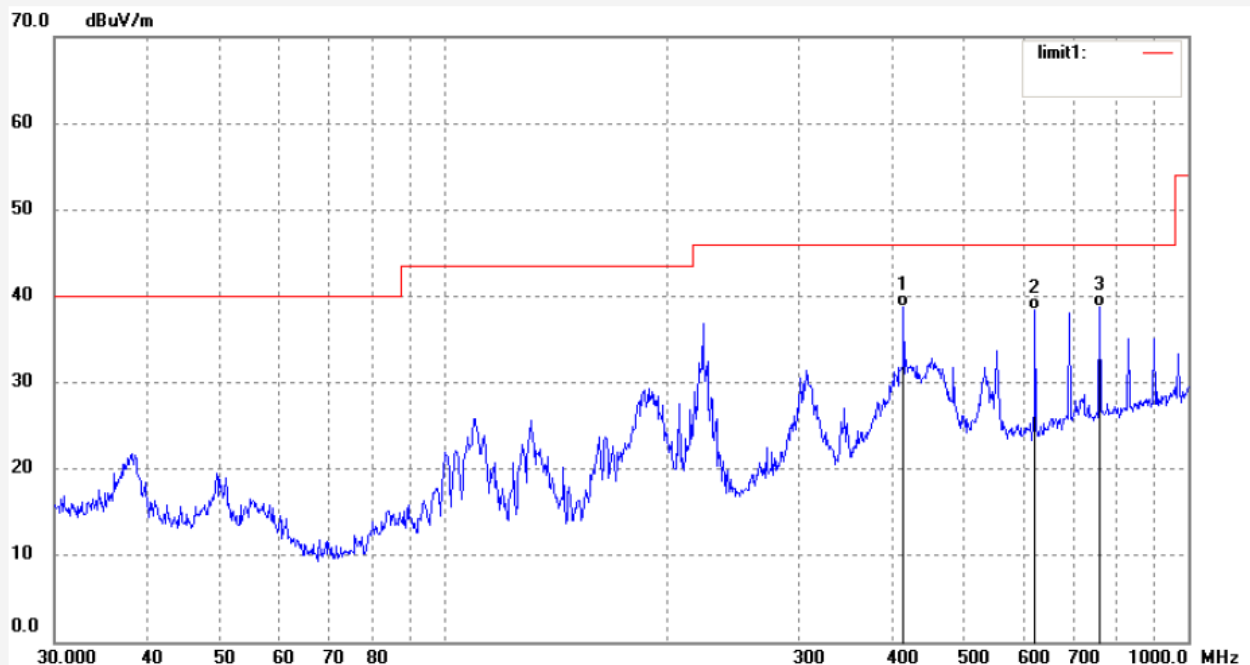

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	414.7223	45.15	-6.41	38.74	46.00	-7.26	QP			
2	622.8899	41.01	-2.65	38.36	46.00	-7.64	QP			
3	760.7036	39.66	-0.86	38.80	46.00	-7.20	QP			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2014 #945

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: PROPORT

Mode: TX 2441MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/20/

Time: 10/29/46

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20141585

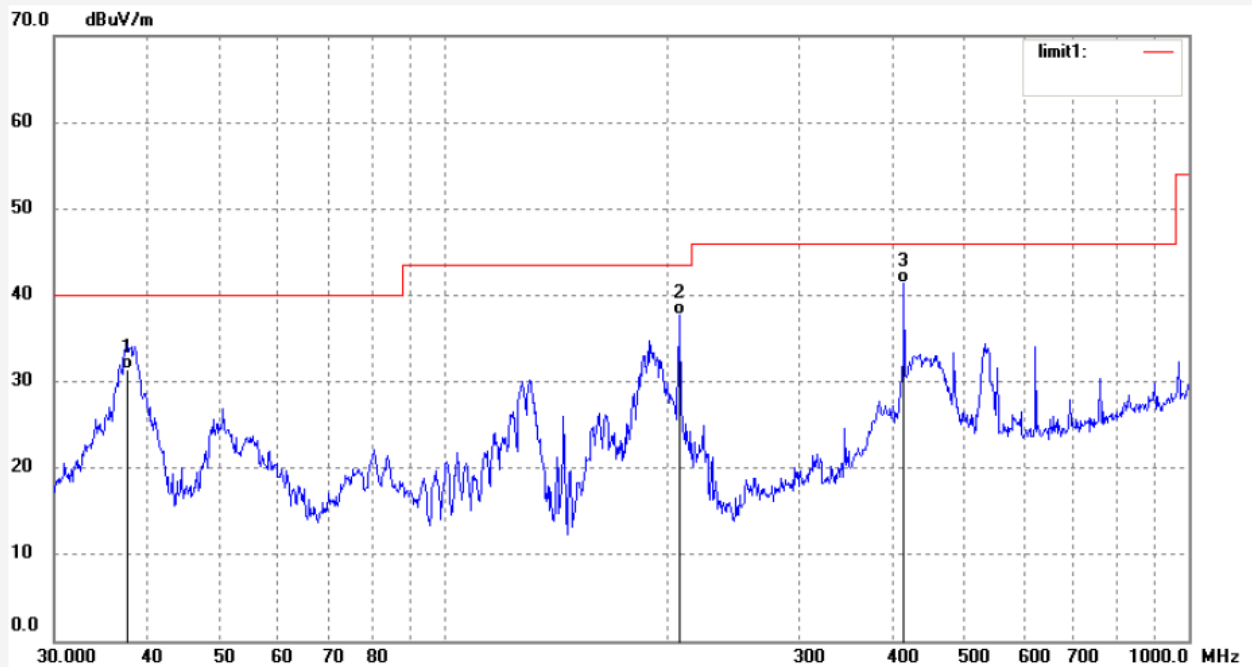

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	37.6798	42.36	-11.02	31.34	40.00	-8.66	QP			
2	207.1226	49.91	-12.24	37.67	43.50	-5.83	QP			
3	414.7223	47.81	-6.41	41.40	46.00	-4.60	QP			

Job No.: star2014 #946

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: PROPORT

Mode: TX 2480MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/20/

Time: 10/33/26

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20141585

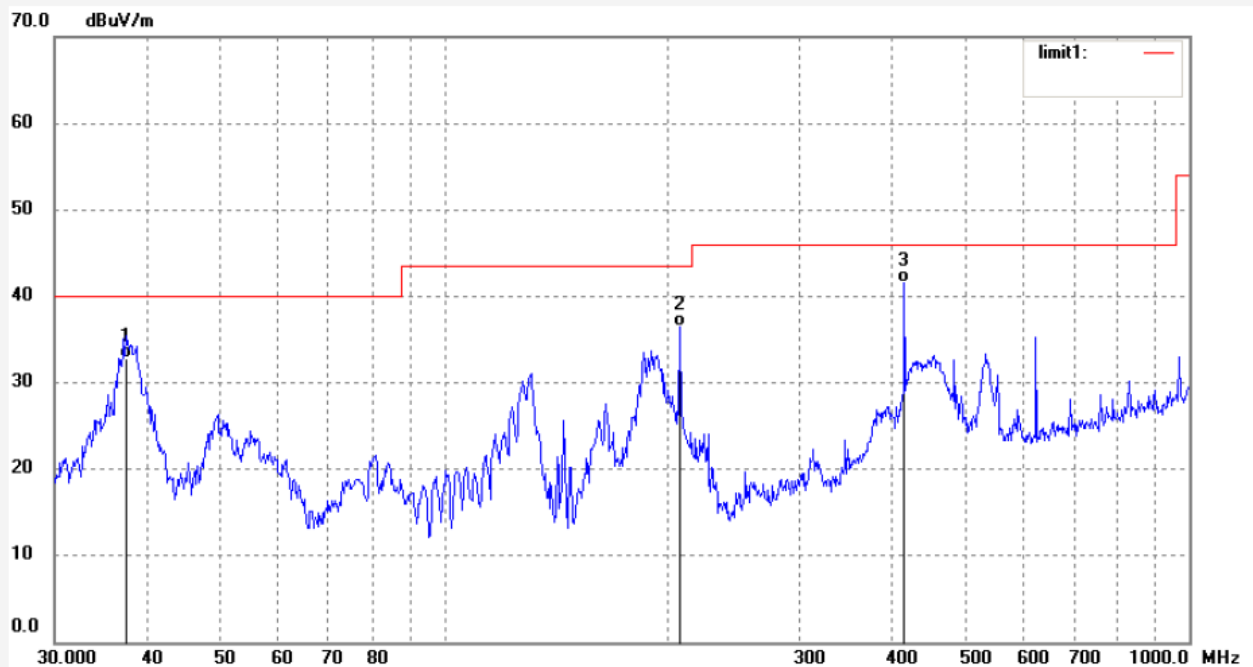

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	37.4164	43.82	-10.96	32.86	40.00	-7.14	QP			
2	207.1226	48.73	-12.24	36.49	43.50	-7.01	QP			
3	414.7223	48.03	-6.41	41.62	46.00	-4.38	QP			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2014 #947

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: PROPORT

Mode: TX 2480MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/20/

Time: 10/36/39

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20141585

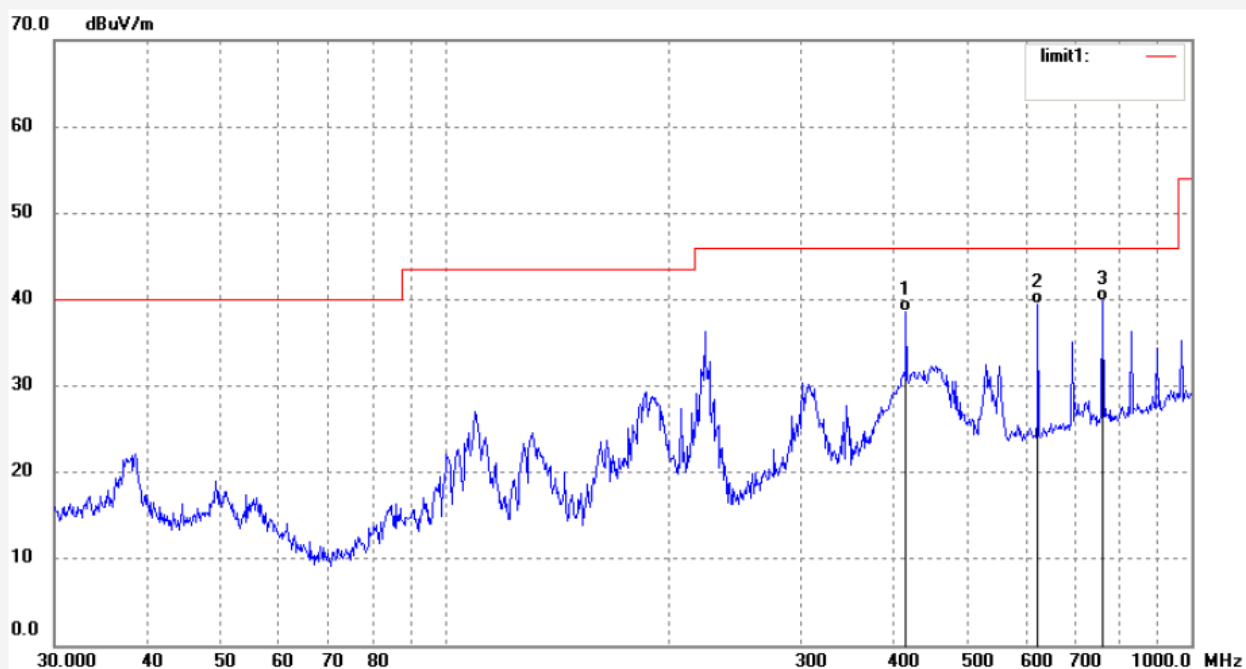

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	414.7223	44.97	-6.41	38.56	46.00	-7.44	QP			
2	622.8899	42.04	-2.65	39.39	46.00	-6.61	QP			
3	760.7036	40.68	-0.86	39.82	46.00	-6.18	QP			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2014 #1716

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2402MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2014/10/31

Time: 15:23:34

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20141585

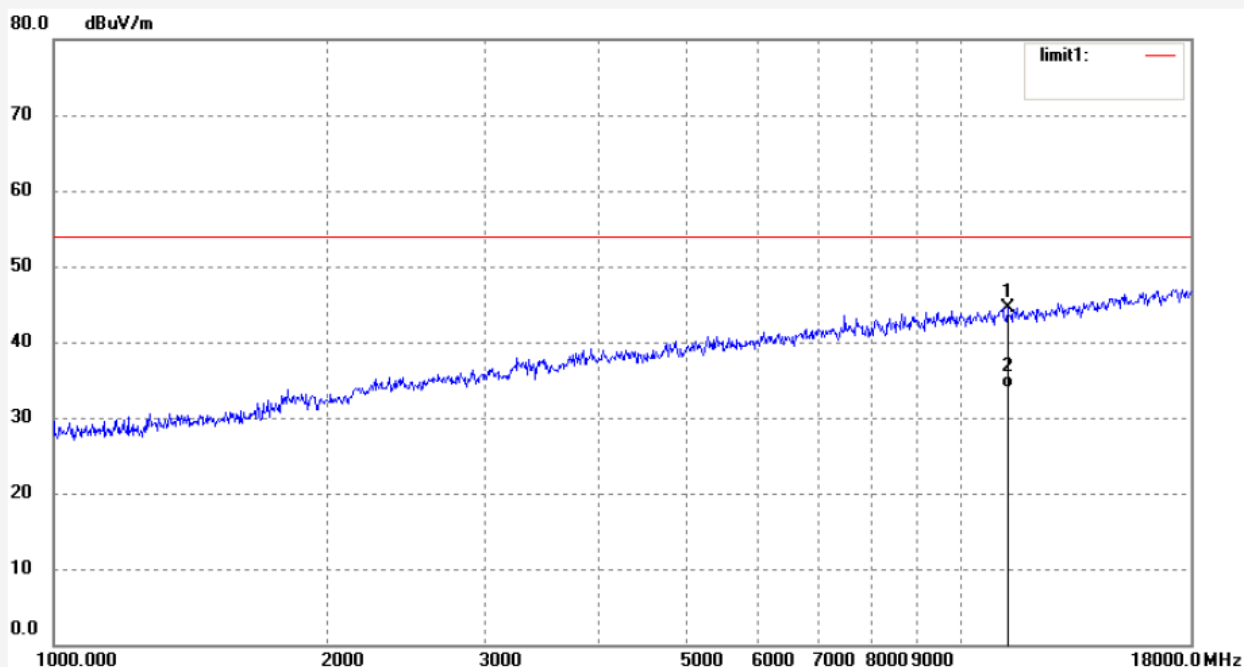

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	11298.300	37.29	7.19	44.48	54.00	-9.52	peak			
2	11298.300	26.78	7.19	33.97	54.00	-20.03	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2014 #1717

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2402MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2014/10/31

Time: 15:28:25

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20141585

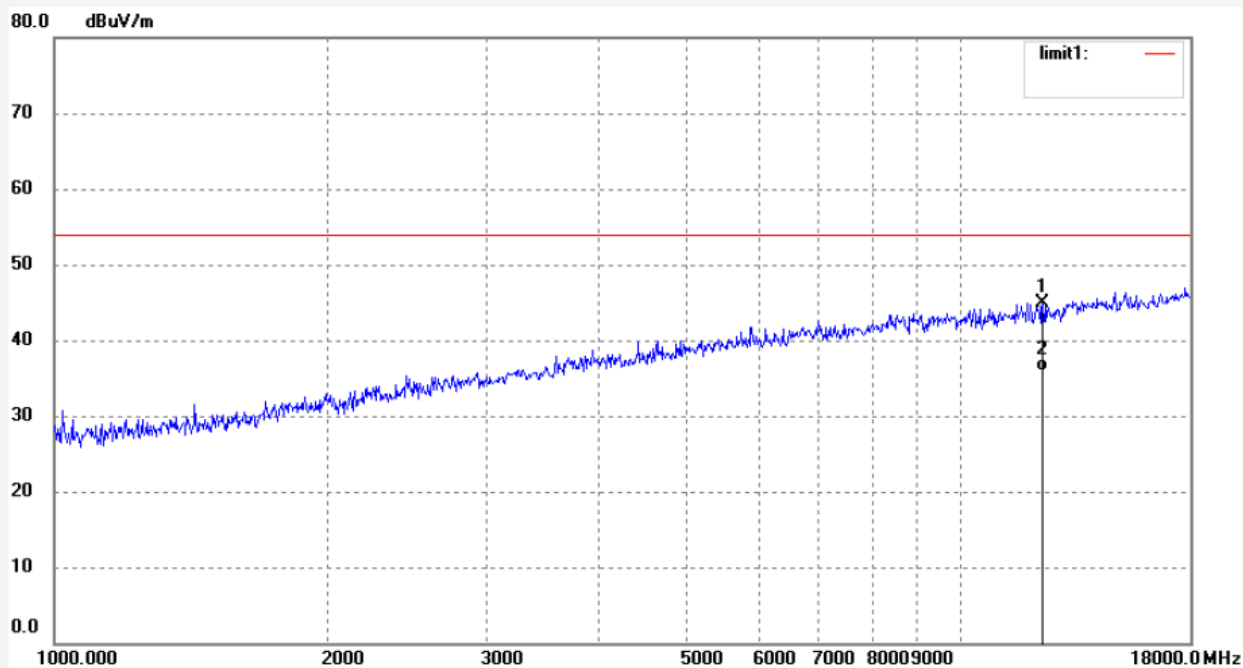

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	12365.192	36.33	8.62	44.95	54.00	-9.05	peak			
2	12365.192	27.30	8.62	35.92	54.00	-18.08	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2014 #1718

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2441MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2014/10/31

Time: 15:32:35

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20141585

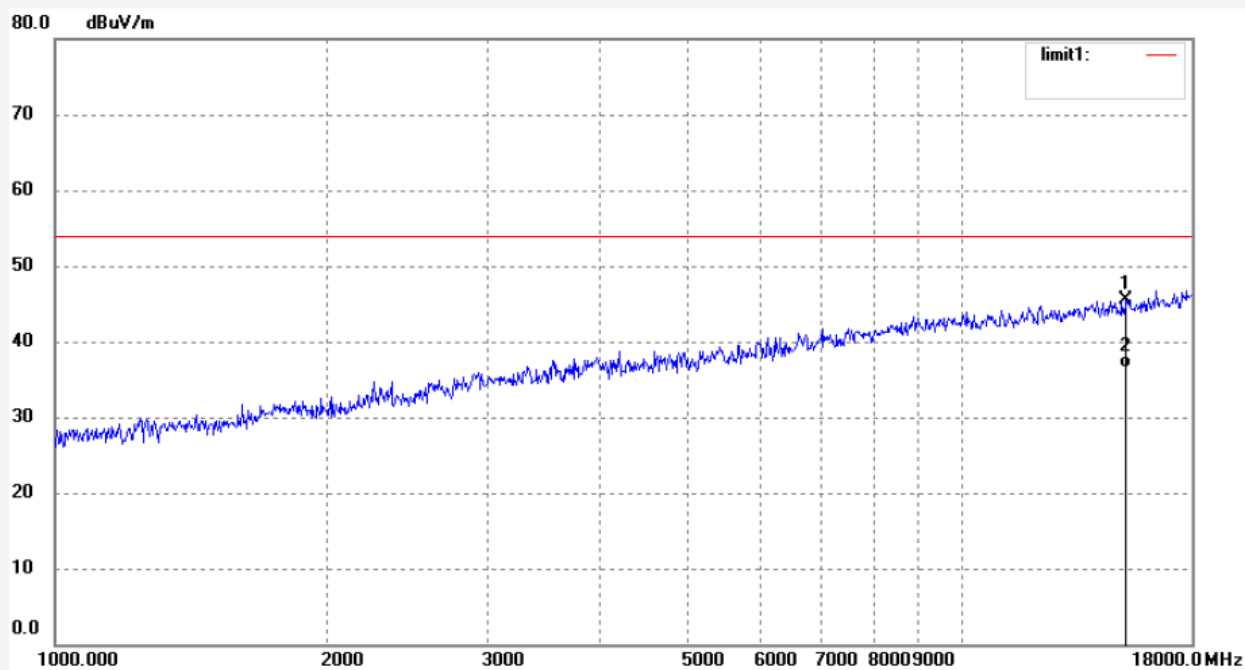

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	15248.165	32.07	13.50	45.57	54.00	-8.43	peak			
2	15248.165	23.10	13.50	36.60	54.00	-17.40	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2014 #1719

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2441MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2014/10/31

Time: 15:36:46

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20141585

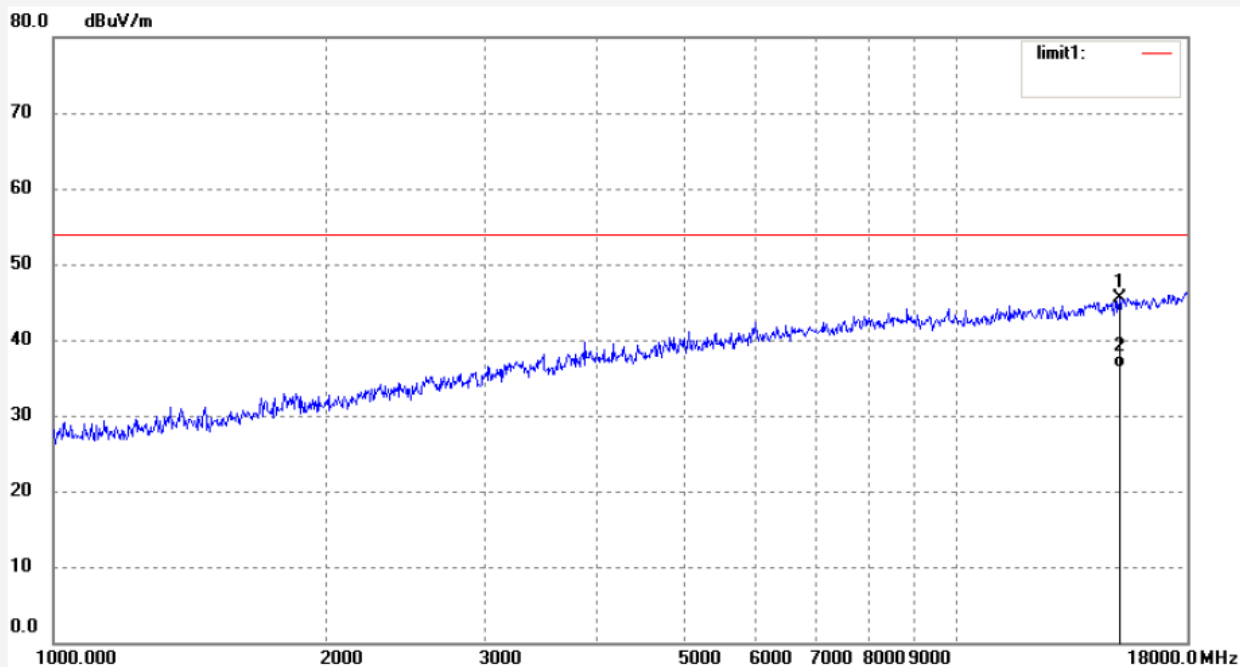

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	15159.656	31.91	13.64	45.55	54.00	-8.45	peak			
2	15159.656	22.58	13.64	36.22	54.00	-17.78	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2014 #1720

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2480MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2014/10/31

Time: 15:40:08

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20141585

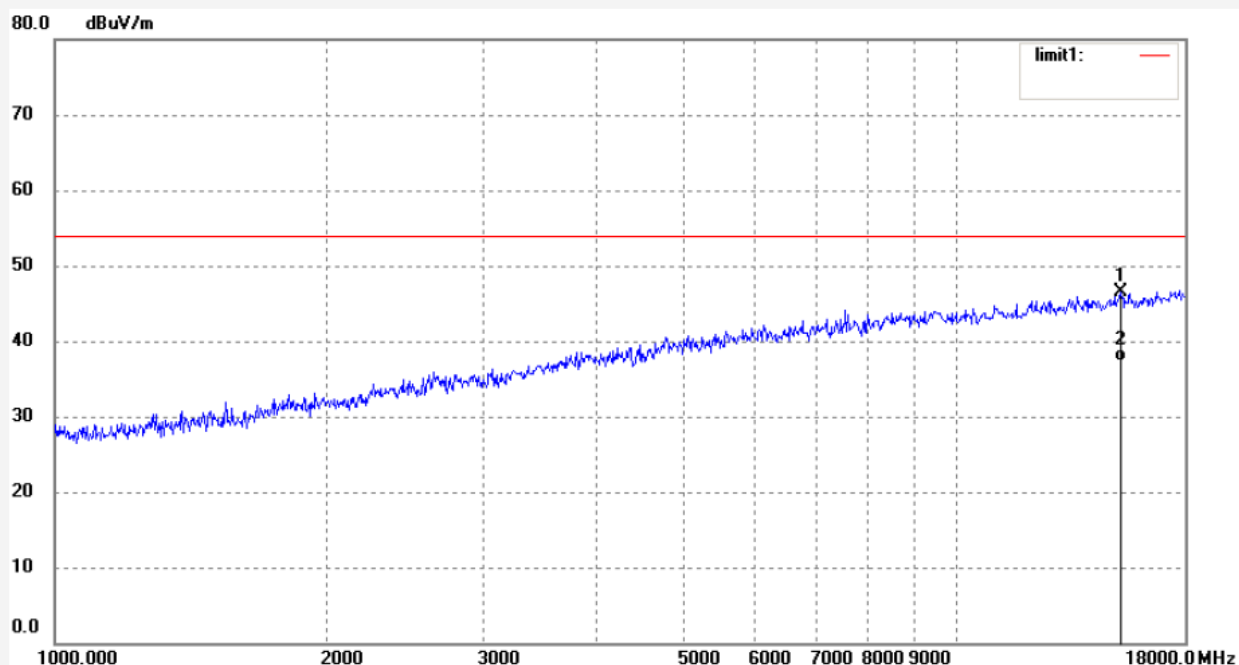

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	15292.613	33.12	13.43	46.55	54.00	-7.45	peak			
2	15292.613	23.78	13.43	37.21	54.00	-16.79	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2014 #1721

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2480MHz

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2014/10/31

Time: 15:43:09

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20141585

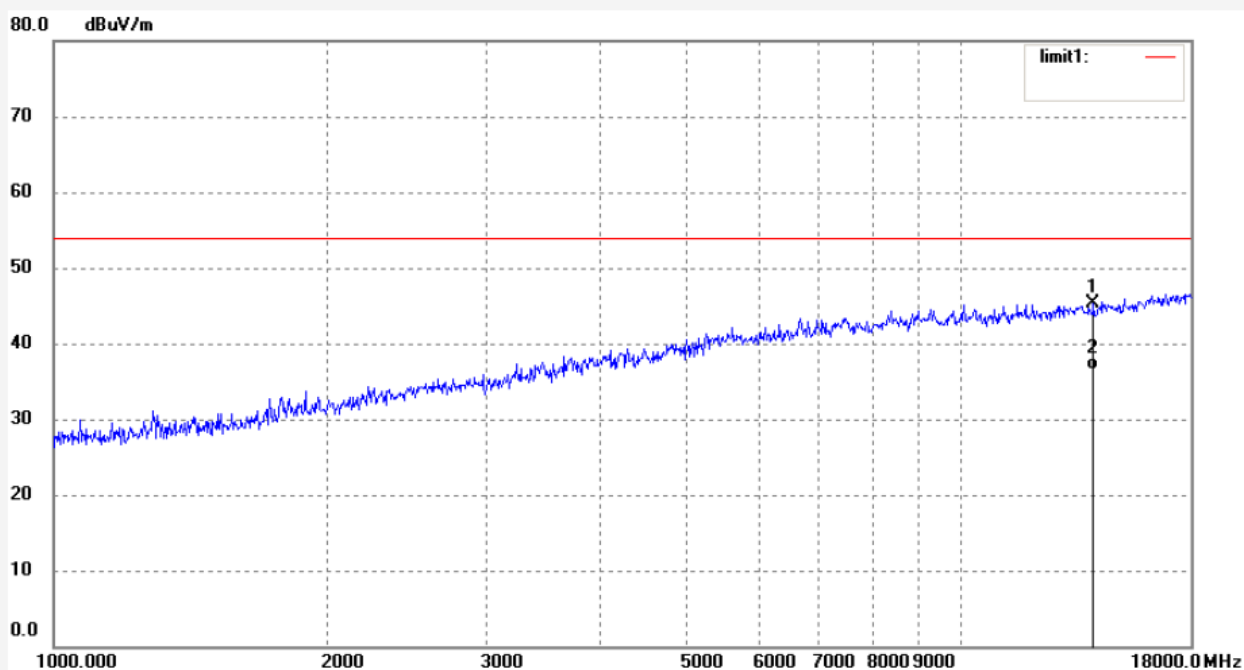

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	14054.720	33.45	11.95	45.40	54.00	-8.60	peak			
2	14054.720	24.63	11.95	36.58	54.00	-17.42	AVG			

11.BAND EDGE COMPLIANCE TEST

11.1.Block Diagram of Test Setup



(EUT: PROPORT)

11.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX (Hopping off, Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

11.5. Test Procedure


11.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

11.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz with convenient frequency span including 100 kHz bandwidth from band edge.


11.5.3. The band edges was measured and recorded.

11.6. Test Result

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
GFSK		
2399.880	52.36	> 20dBc
2483.998	54.39	> 20dBc
Π/4-DQPSK Mode		
2399.802	51.97	> 20dBc
2484.838	51.24	> 20dBc
8QPSK		
2399.750	50.20	> 20dBc
2483.788	51.61	> 20dBc

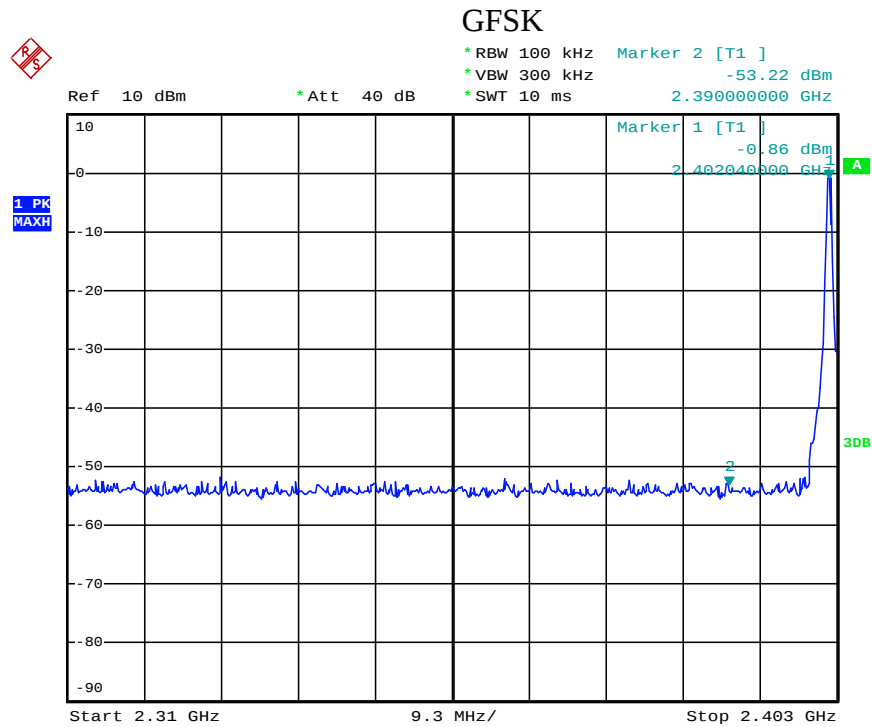


Date: 7.NOV.2014 10:05:57

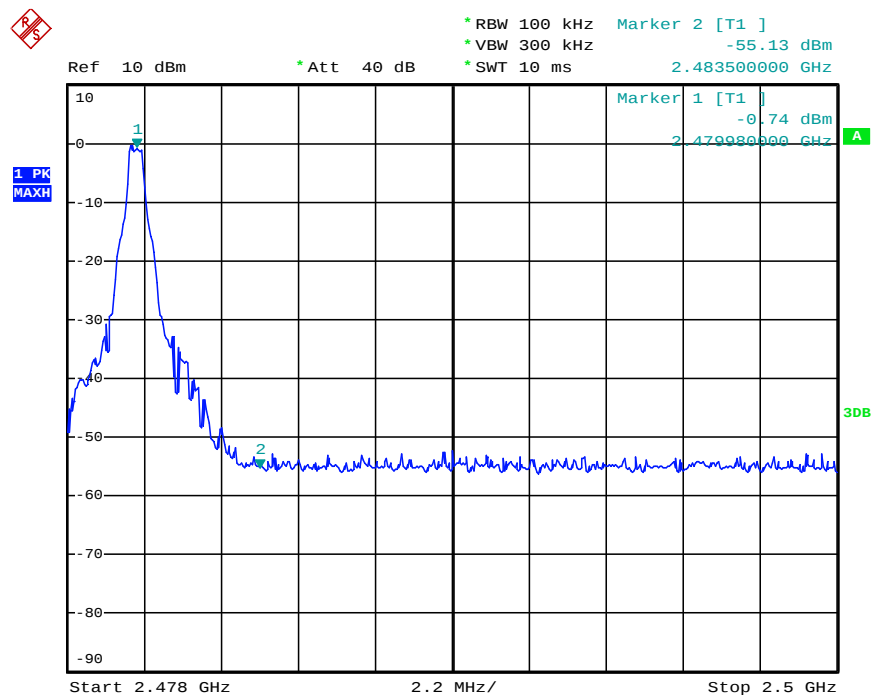


Date: 7.NOV.2014 10:08:21

Π/4-DQPSK Mode

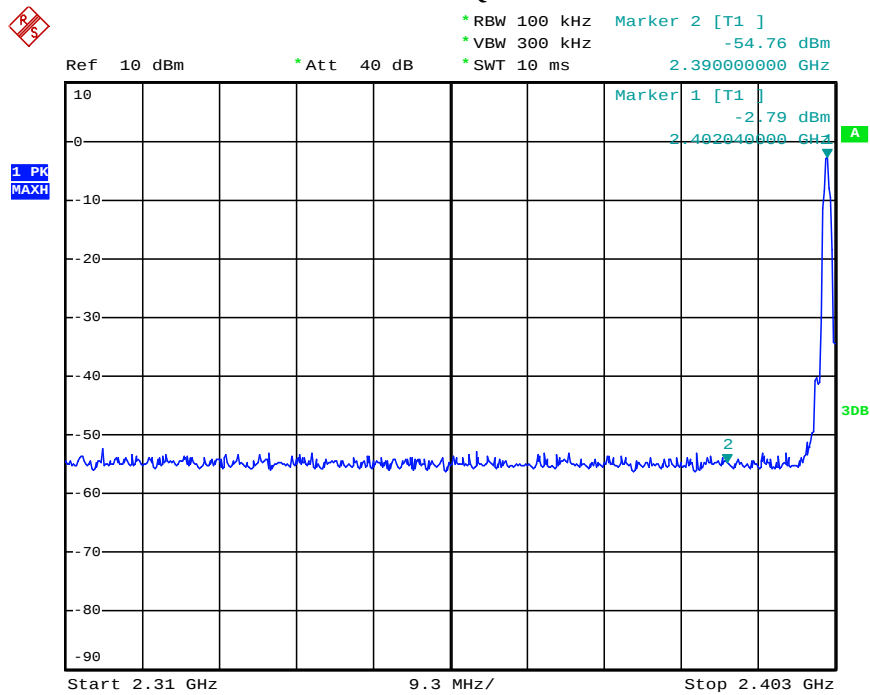


Date: 7.NOV.2014 10:06:15

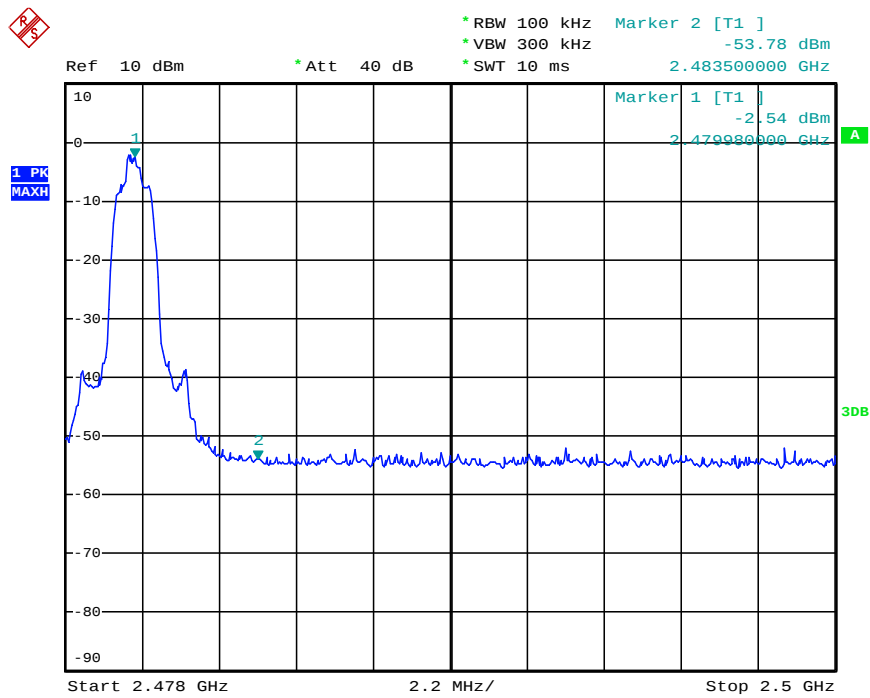


Date: 7.NOV.2014 10:07:34

8DPSK

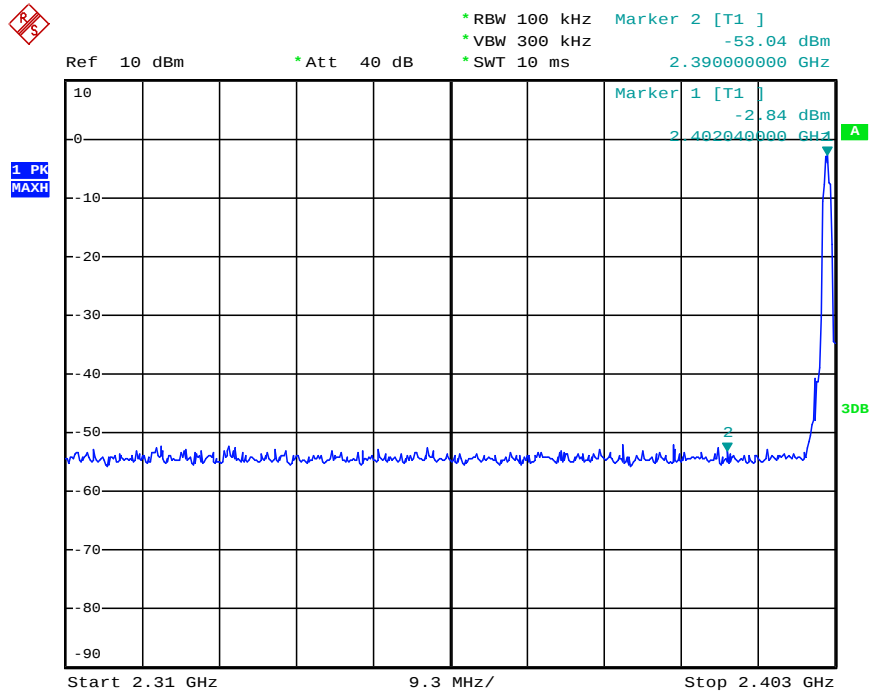

Date: 7.NOV.2014 10:06:45

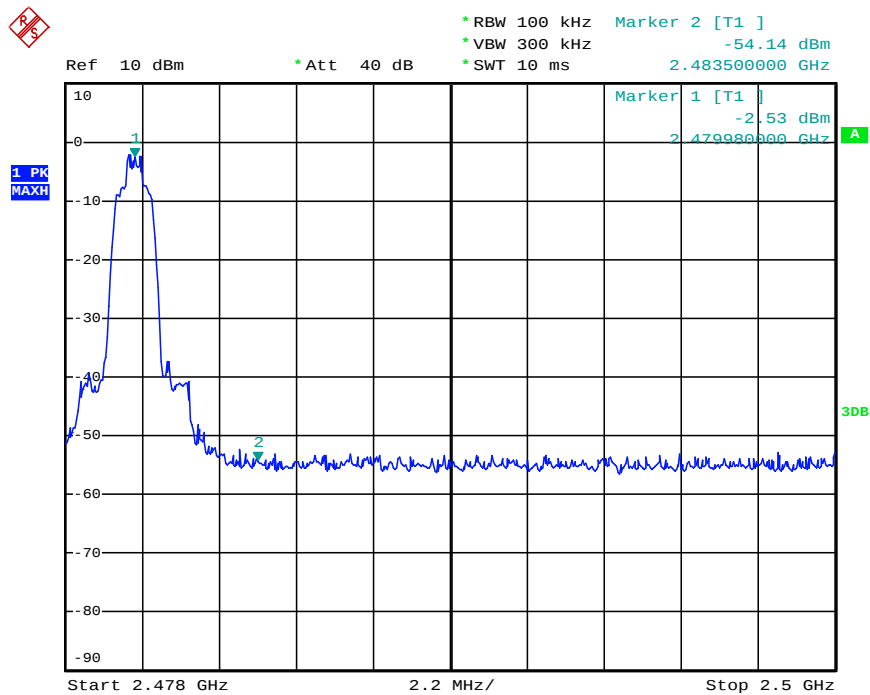

Date: 7.NOV.2014 10:08:05

Radiated Band Edge Result

Note:1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

Non-hopping mode



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3015

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2402MHz(GFSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 14/25/37

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

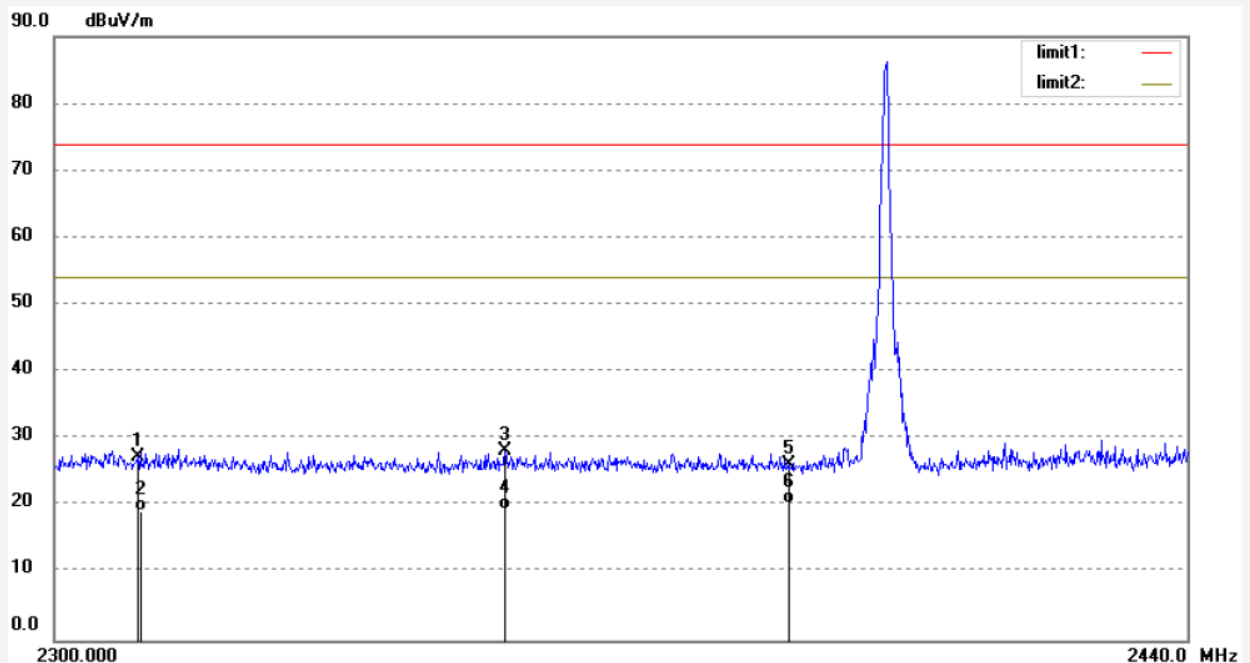

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	34.27	-6.99	27.28	74.00	-46.72	peak			
2	2310.000	26.25	-6.99	19.26	54.00	-34.74	AVG			
3	2354.740	35.04	-6.88	28.16	74.00	-45.84	peak			
4	2354.740	26.41	-6.88	19.53	54.00	-34.47	AVG			
5	2390.000	33.03	-6.78	26.25	74.00	-47.75	peak			
6	2390.000	27.20	-6.78	20.42	54.00	-33.58	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3016

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2402MHz(GFSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 14/29/06

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

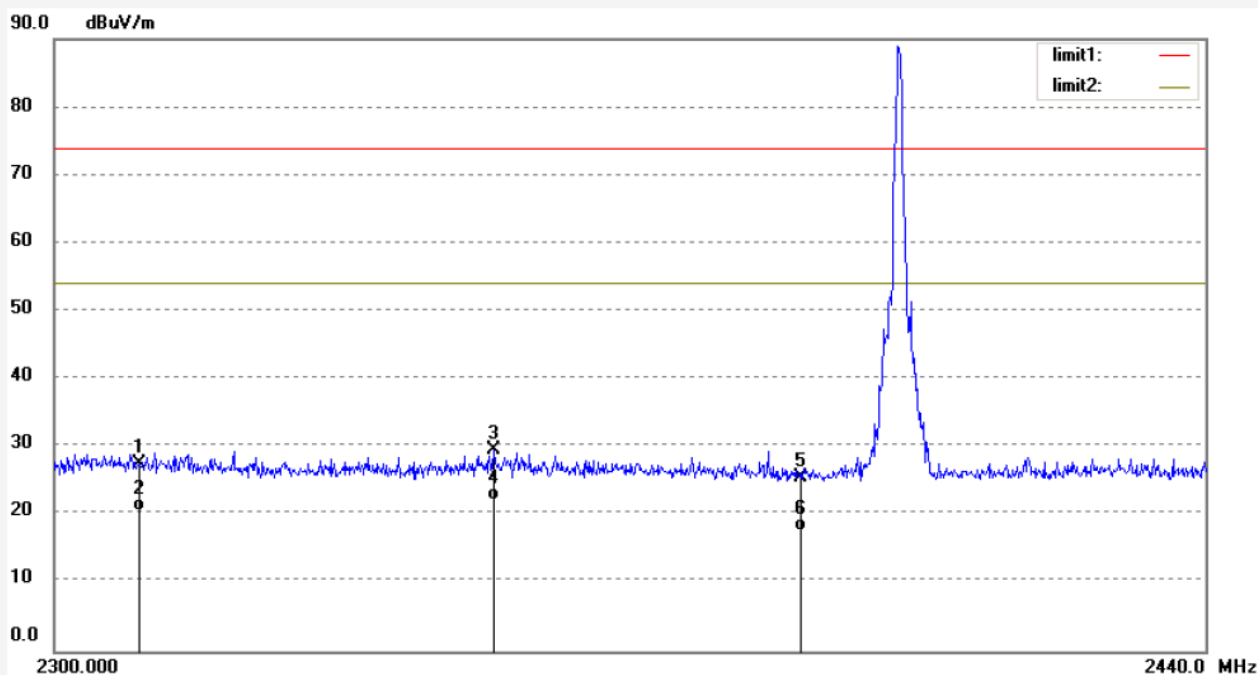

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	34.53	-6.99	27.54	74.00	-46.46	peak			
2	2310.000	27.58	-6.99	20.59	54.00	-33.41	AVG			
3	2352.640	36.54	-6.88	29.66	74.00	-44.34	peak			
4	2352.640	28.93	-6.88	22.05	54.00	-31.95	AVG			
5	2390.000	32.43	-6.78	25.65	74.00	-48.35	peak			
6	2390.000	24.55	-6.78	17.77	54.00	-36.23	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3017

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2480MHz(GFSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 14/32/02

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

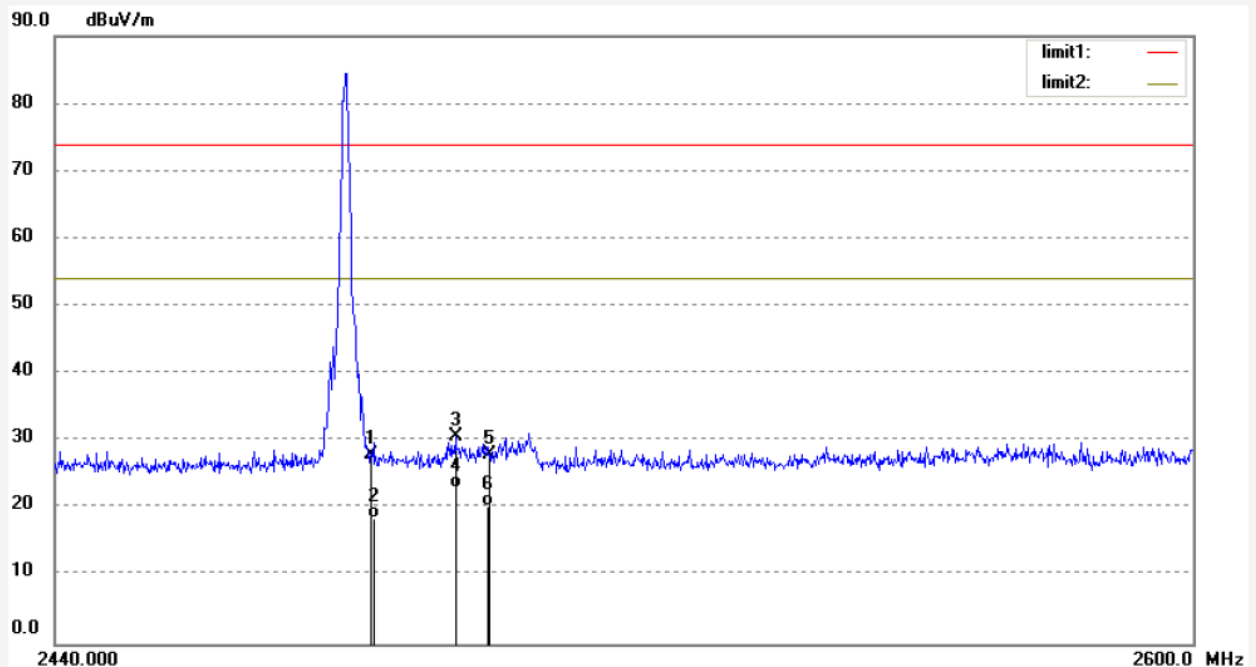

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	34.48	-6.54	27.94	74.00	-46.06	peak			
2	2483.500	25.17	-6.54	18.63	54.00	-35.37	AVG			
3	2495.200	37.21	-6.50	30.71	74.00	-43.29	peak			
4	2495.200	29.50	-6.50	23.00	54.00	-31.00	AVG			
5	2500.000	34.56	-6.50	28.06	74.00	-45.94	peak			
6	2500.000	26.93	-6.50	20.43	54.00	-33.57	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3018

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2480MHz(GFSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 14/36/21

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

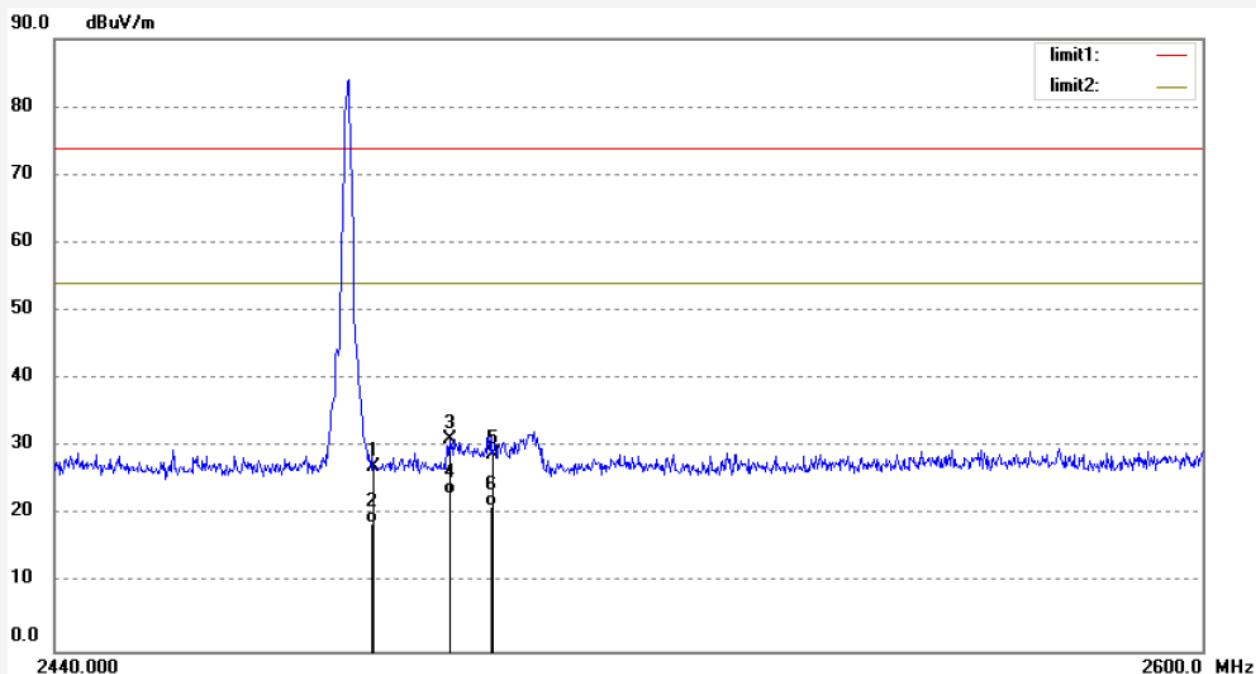

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	33.60	-6.54	27.06	74.00	-46.94	peak			
2	2483.500	25.40	-6.54	18.86	54.00	-35.14	AVG			
3	2493.920	37.76	-6.51	31.25	74.00	-42.75	peak			
4	2493.920	29.50	-6.51	22.99	54.00	-31.01	AVG			
5	2500.000	35.31	-6.50	28.81	74.00	-45.19	peak			
6	2500.000	27.80	-6.50	21.30	54.00	-32.70	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3019

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2402MHz(PI/4DQPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 14/40/13

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

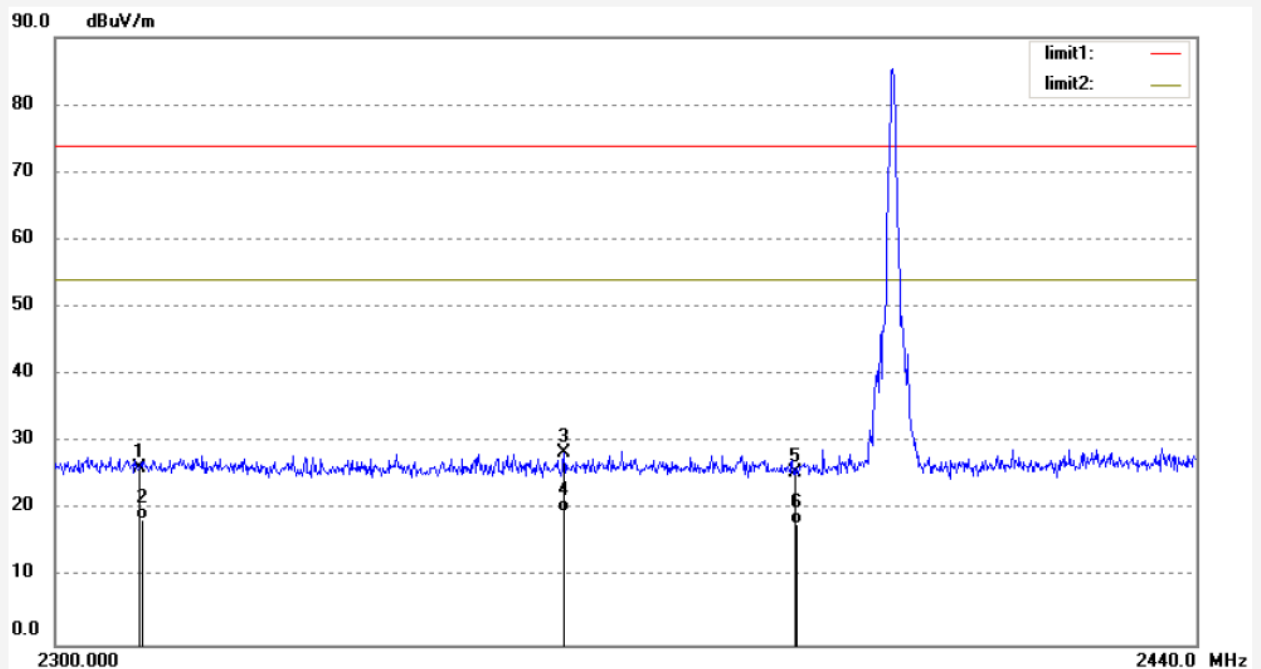

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	33.28	-6.99	26.29	74.00	-47.71	peak			
2	2310.000	25.46	-6.99	18.47	54.00	-35.53	AVG			
3	2361.460	35.25	-6.86	28.39	74.00	-45.61	peak			
4	2361.460	26.47	-6.86	19.61	54.00	-34.39	AVG			
5	2390.000	32.29	-6.78	25.51	74.00	-48.49	peak			
6	2390.000	24.77	-6.78	17.99	54.00	-36.01	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3020

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2402MHz(PI/4DQPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 14/43/43

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

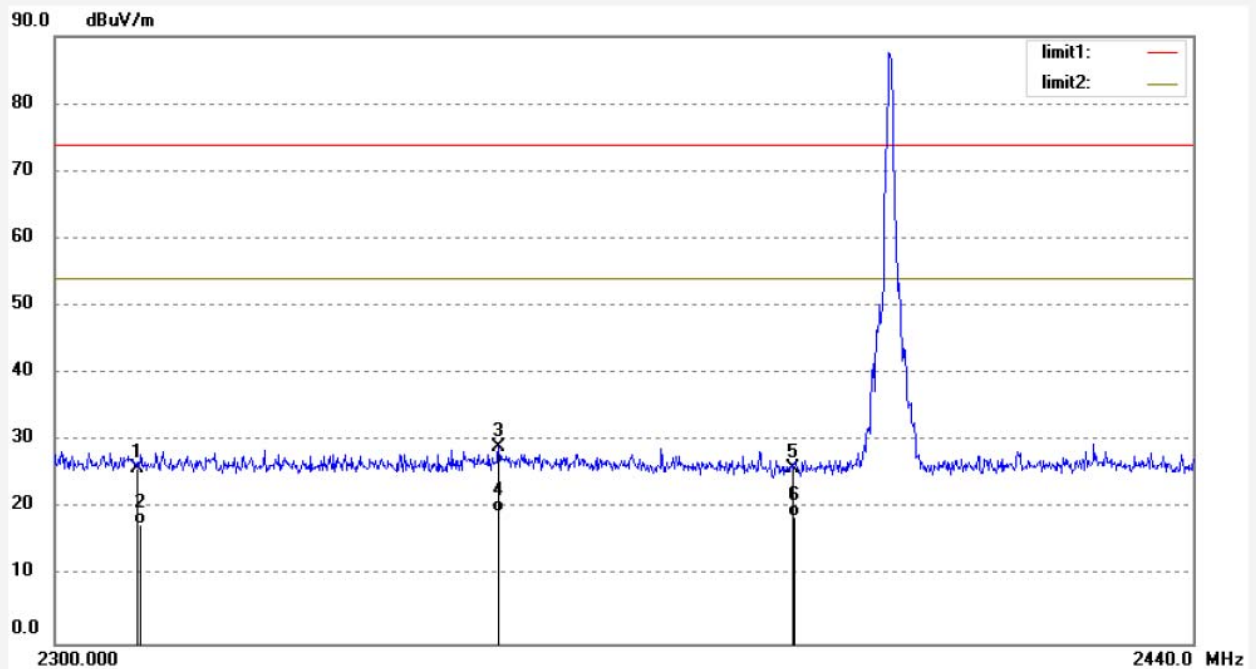

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	33.01	-6.99	26.02	74.00	-47.98	peak			
2	2310.000	24.55	-6.99	17.56	54.00	-36.44	AVG			
3	2353.620	35.99	-6.88	29.11	74.00	-44.89	peak			
4	2353.620	26.40	-6.88	19.52	54.00	-34.48	AVG			
5	2390.000	32.72	-6.78	25.94	74.00	-48.06	peak			
6	2390.000	25.60	-6.78	18.82	54.00	-35.18	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3025

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2480MHz(PI/4DQPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 15/01/26

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

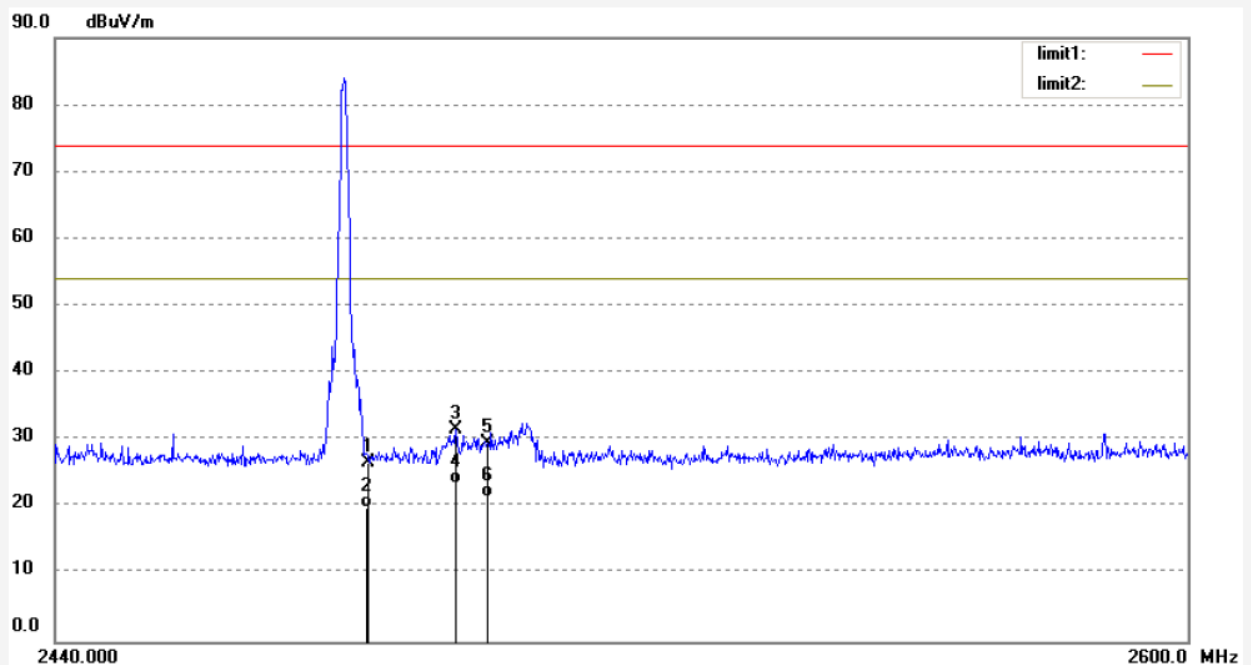

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	33.26	-6.54	26.72	74.00	-47.28	peak			
2	2483.500	26.50	-6.54	19.96	54.00	-34.04	AVG			
3	2495.520	38.08	-6.50	31.58	74.00	-42.42	peak			
4	2495.520	30.10	-6.50	23.60	54.00	-30.40	AVG			
5	2500.000	36.02	-6.50	29.52	74.00	-44.48	peak			
6	2500.000	27.91	-6.50	21.41	54.00	-32.59	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3026

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2480MHz(PI/4DQPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 15/04/18

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

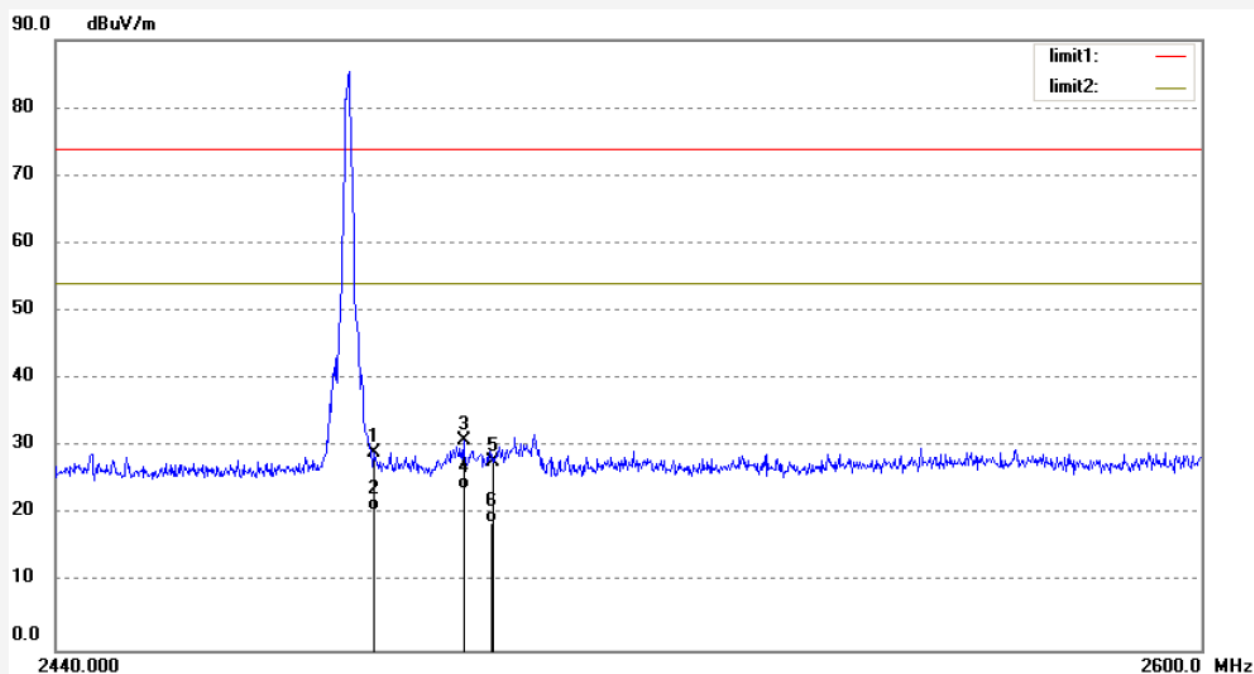

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	35.68	-6.54	29.14	74.00	-44.86	peak			
2	2483.500	27.22	-6.54	20.68	54.00	-33.32	AVG			
3	2495.840	37.34	-6.50	30.84	74.00	-43.16	peak			
4	2495.840	30.22	-6.50	23.72	54.00	-30.28	AVG			
5	2500.000	34.21	-6.50	27.71	74.00	-46.29	peak			
6	2500.000	25.34	-6.50	18.84	54.00	-35.16	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3021

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2402MHz(8DPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 14/46/17

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

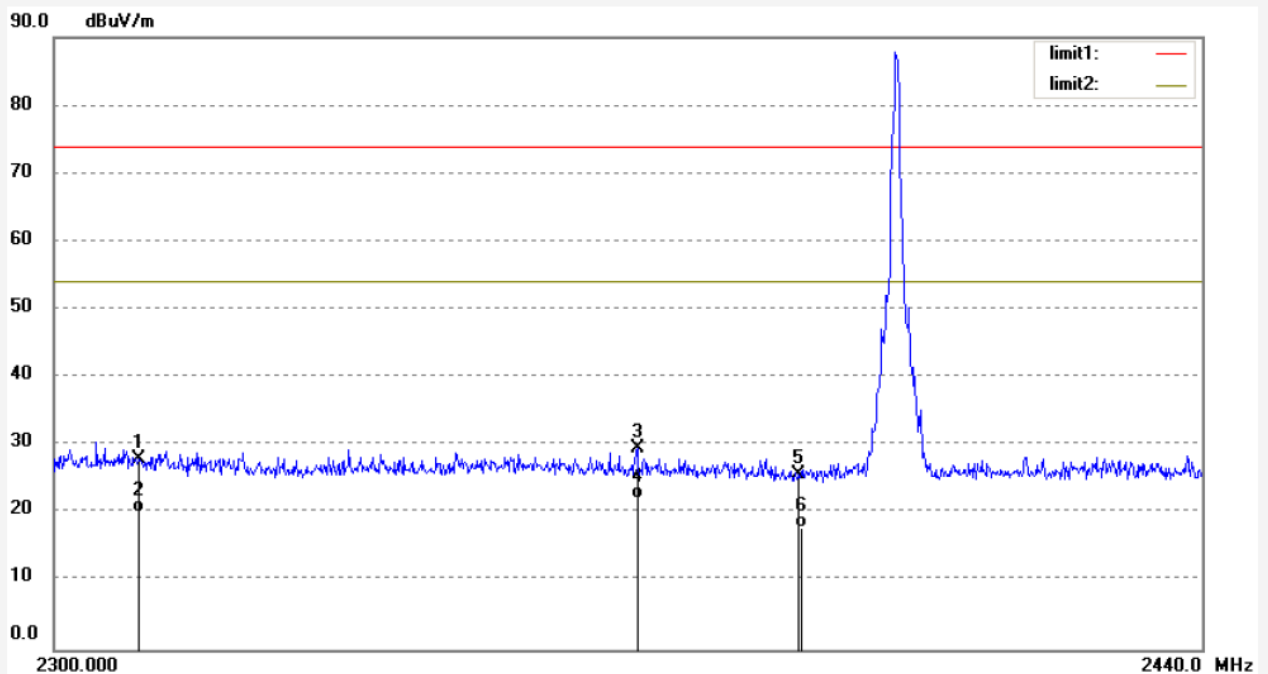

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	35.06	-6.99	28.07	74.00	-45.93	peak			
2	2310.000	27.17	-6.99	20.18	54.00	-33.82	AVG			
3	2370.140	36.32	-6.83	29.49	74.00	-44.51	peak			
4	2370.140	28.90	-6.83	22.07	54.00	-31.93	AVG			
5	2390.000	32.52	-6.78	25.74	74.00	-48.26	peak			
6	2390.000	24.67	-6.78	17.89	54.00	-36.11	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3022

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2402MHz(8DPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 14/49/56

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

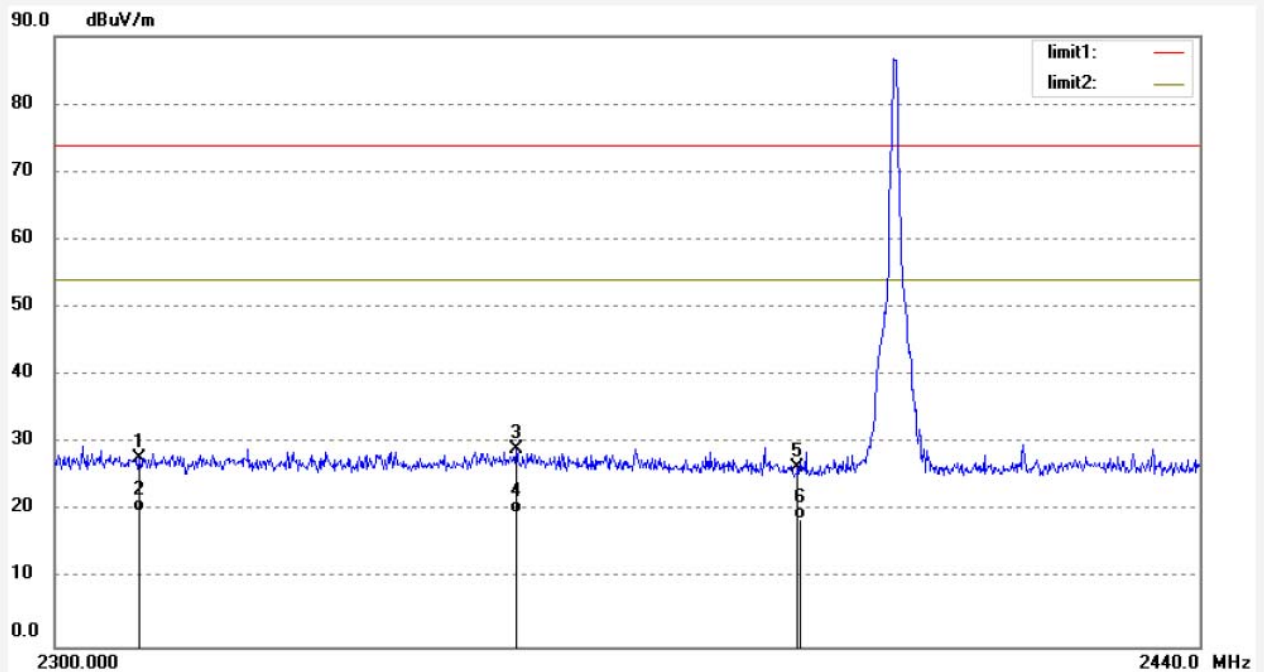

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	34.78	-6.99	27.79	74.00	-46.21	peak			
2	2310.000	26.87	-6.99	19.88	54.00	-34.12	AVG			
3	2355.440	35.96	-6.88	29.08	74.00	-44.92	peak			
4	2355.440	26.50	-6.88	19.62	54.00	-34.38	AVG			
5	2390.000	33.12	-6.78	26.34	74.00	-47.66	peak			
6	2390.000	25.63	-6.78	18.85	54.00	-35.15	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3023

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2480MHz(8DPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 14/52/38

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

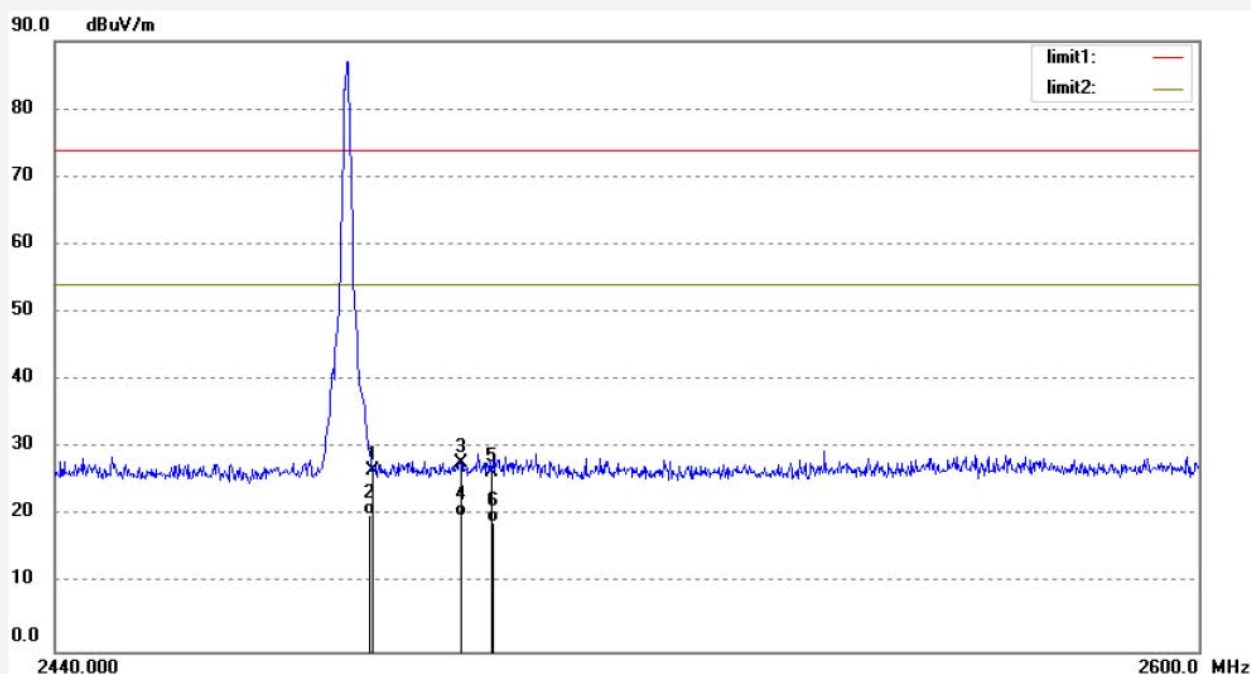

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	33.29	-6.54	26.75	74.00	-47.25	peak			
2	2483.500	26.78	-6.54	20.24	54.00	-33.76	AVG			
3	2495.680	34.31	-6.50	27.81	74.00	-46.19	peak			
4	2495.680	26.48	-6.50	19.98	54.00	-34.02	AVG			
5	2500.000	32.91	-6.50	26.41	74.00	-47.59	peak			
6	2500.000	25.61	-6.50	19.11	54.00	-34.89	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3024

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: TX 2480MHz(8DPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 14/56/46

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

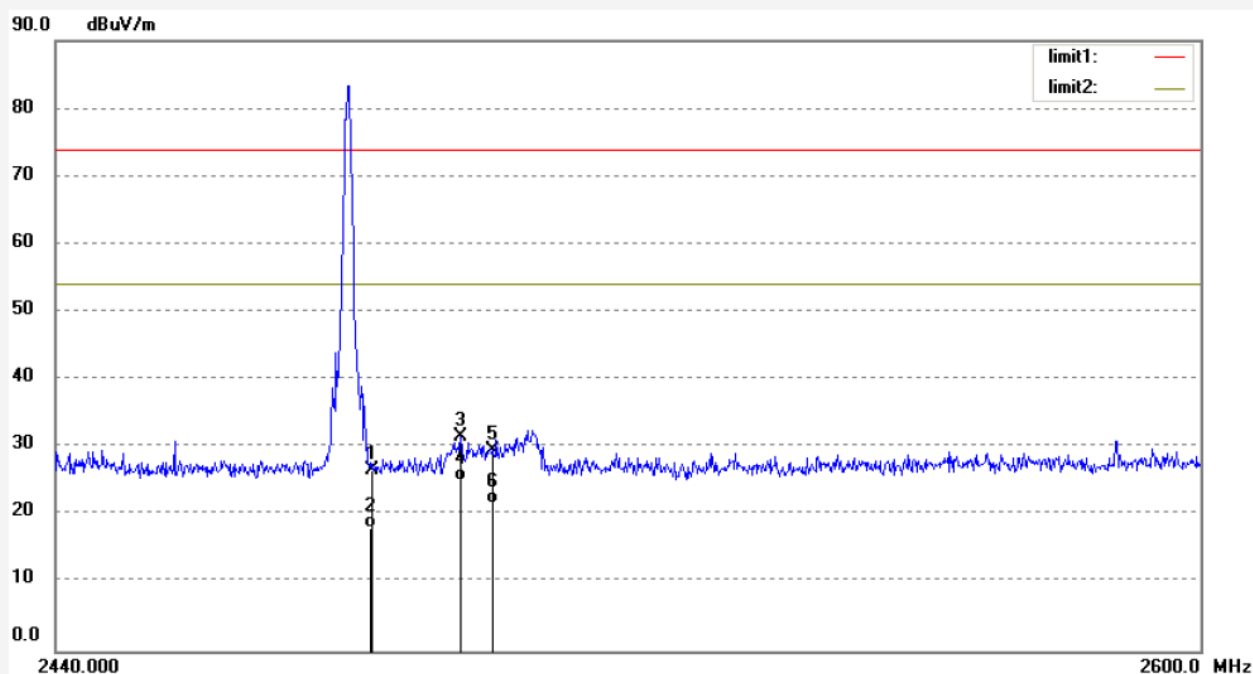

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	33.26	-6.54	26.72	74.00	-47.28	peak			
2	2483.500	24.60	-6.54	18.06	54.00	-35.94	AVG			
3	2495.520	38.08	-6.50	31.58	74.00	-42.42	peak			
4	2495.520	31.52	-6.50	25.02	54.00	-28.98	AVG			
5	2500.000	36.02	-6.50	29.52	74.00	-44.48	peak			
6	2500.000	28.11	-6.50	21.61	54.00	-32.39	AVG			

Hopping mode



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3027

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: HOPPING (GFSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 11/22/51

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

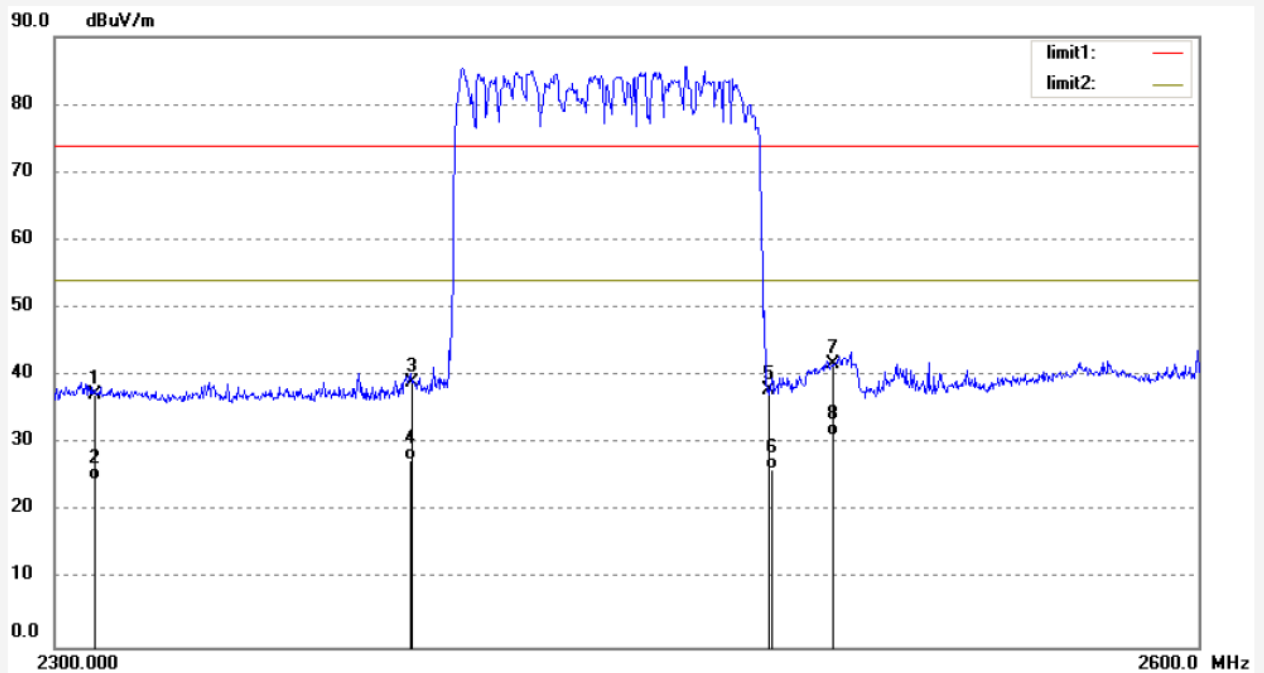

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	44.18	-6.99	37.19	74.00	-36.81	peak			
2	2310.000	31.58	-6.99	24.59	54.00	-29.41	AVG			
3	2390.000	45.89	-6.78	39.11	74.00	-34.89	peak			
4	2390.000	34.25	-6.78	27.47	54.00	-26.53	AVG			
5	2483.500	44.36	-6.54	37.82	74.00	-36.18	peak			
6	2483.500	32.69	-6.54	26.15	54.00	-27.85	AVG			
7	2500.000	48.29	-6.50	41.79	74.00	-32.21	peak			
8	2500.000	37.66	-6.50	31.16	54.00	-22.84	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3028

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: HOPPING (GFSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 11/25/42

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

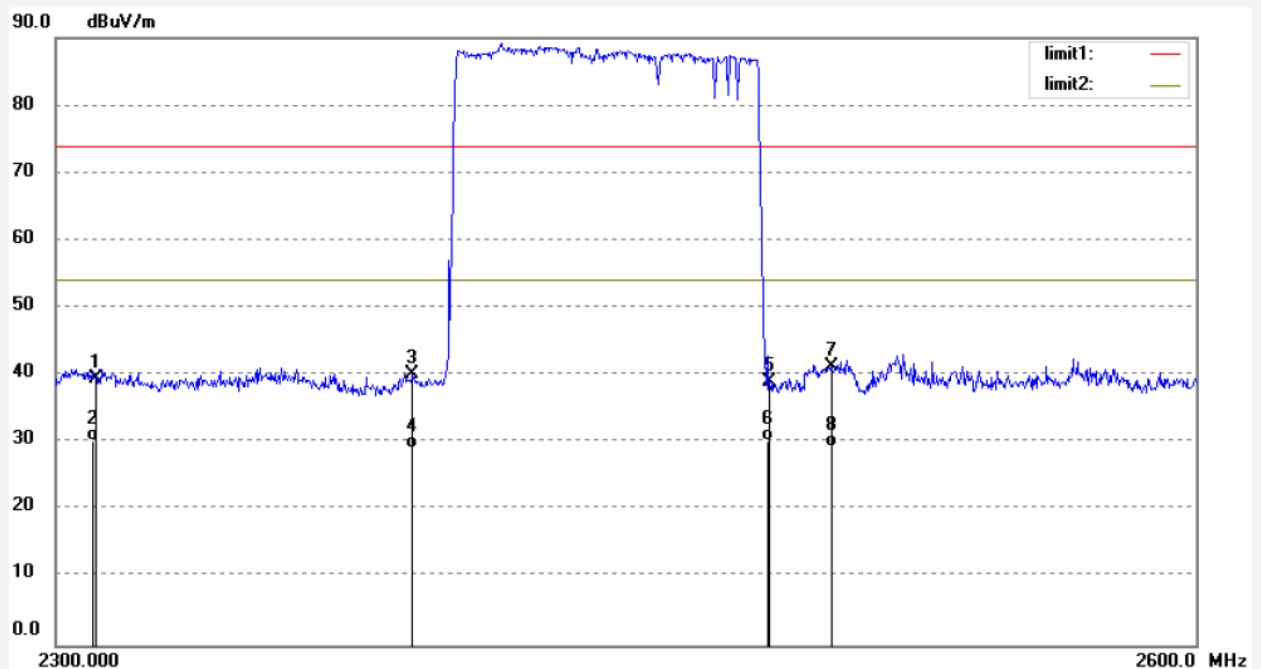

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	46.43	-6.99	39.44	74.00	-34.56	peak			
2	2310.000	37.25	-6.99	30.26	54.00	-23.74	AVG			
3	2390.000	46.86	-6.78	40.08	74.00	-33.92	peak			
4	2390.000	35.86	-6.78	29.08	54.00	-24.92	AVG			
5	2483.500	45.50	-6.54	38.96	74.00	-35.04	peak			
6	2483.500	36.87	-6.54	30.33	54.00	-23.67	AVG			
7	2500.000	47.78	-6.50	41.28	74.00	-32.72	peak			
8	2500.000	35.88	-6.50	29.38	54.00	-24.62	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3029

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: HOPPING (PI/4DQPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 11/28/17

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

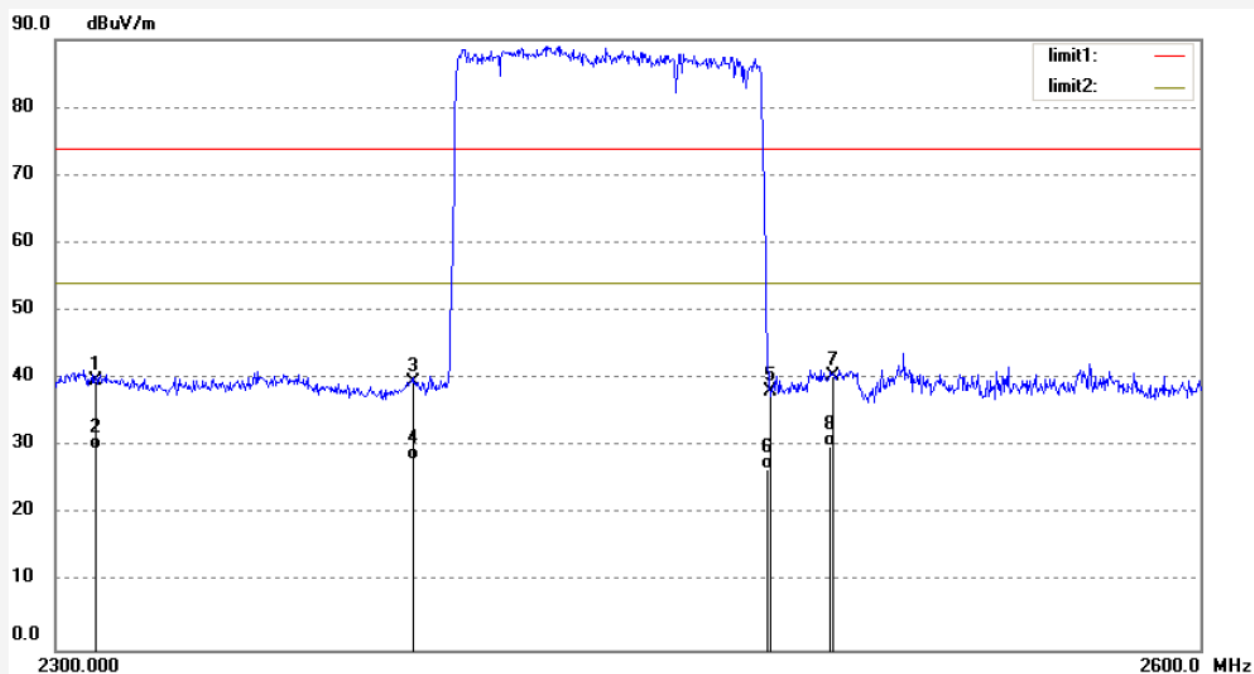

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	46.75	-6.99	39.76	74.00	-34.24	peak			
2	2310.000	36.55	-6.99	29.56	54.00	-24.44	AVG			
3	2390.000	46.28	-6.78	39.50	74.00	-34.50	peak			
4	2390.000	34.89	-6.78	28.11	54.00	-25.89	AVG			
5	2483.500	44.59	-6.54	38.05	74.00	-35.95	peak			
6	2483.500	33.24	-6.54	26.70	54.00	-27.30	AVG			
7	2500.000	46.93	-6.50	40.43	74.00	-33.57	peak			
8	2500.000	36.43	-6.50	29.93	54.00	-24.07	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3030

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: HOPPING (PI/4DQPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 11/31/16

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

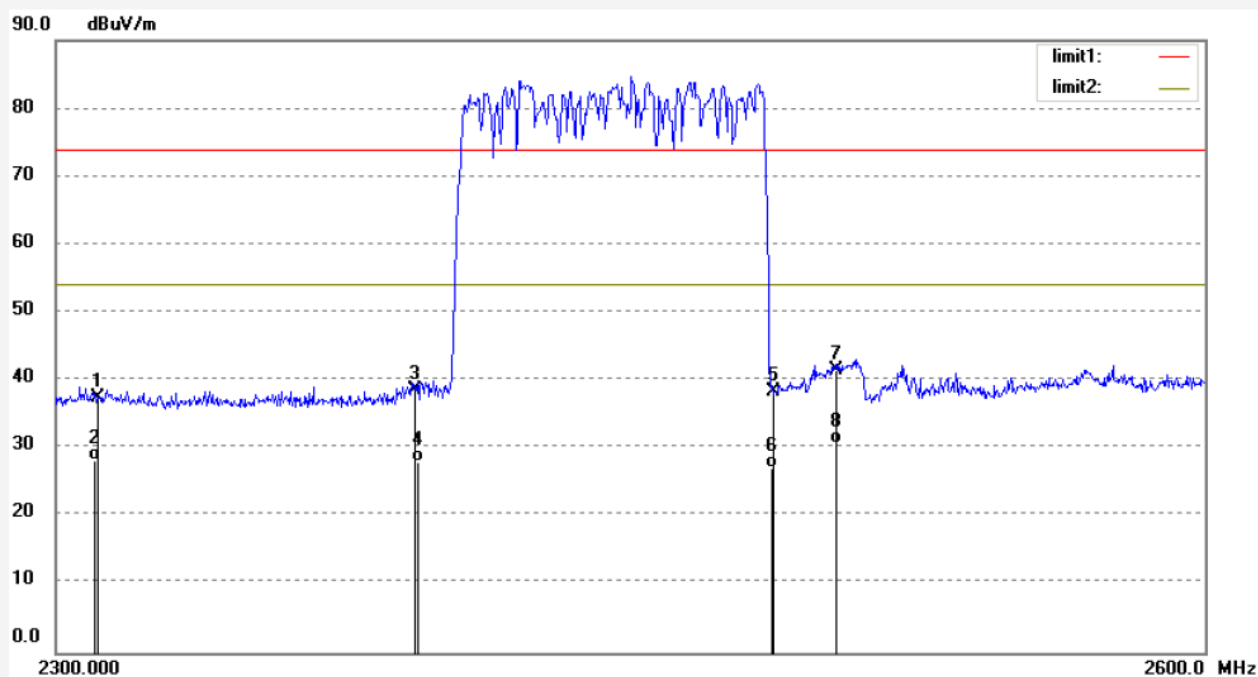

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	44.36	-6.99	37.37	74.00	-36.63	peak			
2	2310.000	35.24	-6.99	28.25	54.00	-25.75	AVG			
3	2390.000	45.45	-6.78	38.67	74.00	-35.33	peak			
4	2390.000	34.80	-6.78	28.02	54.00	-25.98	AVG			
5	2483.500	44.82	-6.54	38.28	74.00	-35.72	peak			
6	2483.500	33.58	-6.54	27.04	54.00	-26.96	AVG			
7	2500.000	48.09	-6.50	41.59	74.00	-32.41	peak			
8	2500.000	37.32	-6.50	30.82	54.00	-23.18	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3031

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: HOPPING (8DPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 11/36/34

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

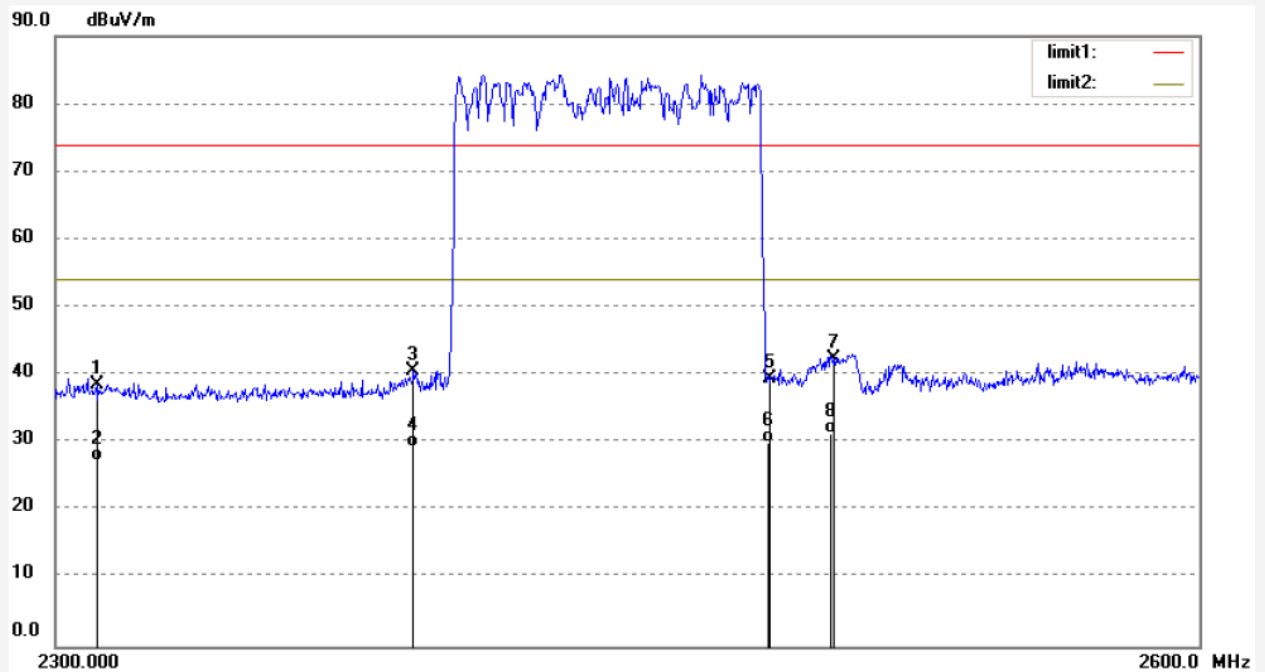

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	45.68	-6.99	38.69	74.00	-35.31	peak			
2	2310.000	34.29	-6.99	27.30	54.00	-26.70	AVG			
3	2390.000	47.42	-6.78	40.64	74.00	-33.36	peak			
4	2390.000	36.10	-6.78	29.32	54.00	-24.68	AVG			
5	2483.500	45.92	-6.54	39.38	74.00	-34.62	peak			
6	2483.500	36.61	-6.54	30.07	54.00	-23.93	AVG			
7	2500.000	48.96	-6.50	42.46	74.00	-31.54	peak			
8	2500.000	37.88	-6.50	31.38	54.00	-22.62	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3032

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PROPORT

Mode: HOPPING (8DPSK)

Model: TAB-10A

Manufacturer: AMES ADT,Inc./Applied Device Technologies

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/11/11/

Time: 11/39/37

Engineer Signature:STAR

Distance: 3m

Note: Report No.:ATE20141585

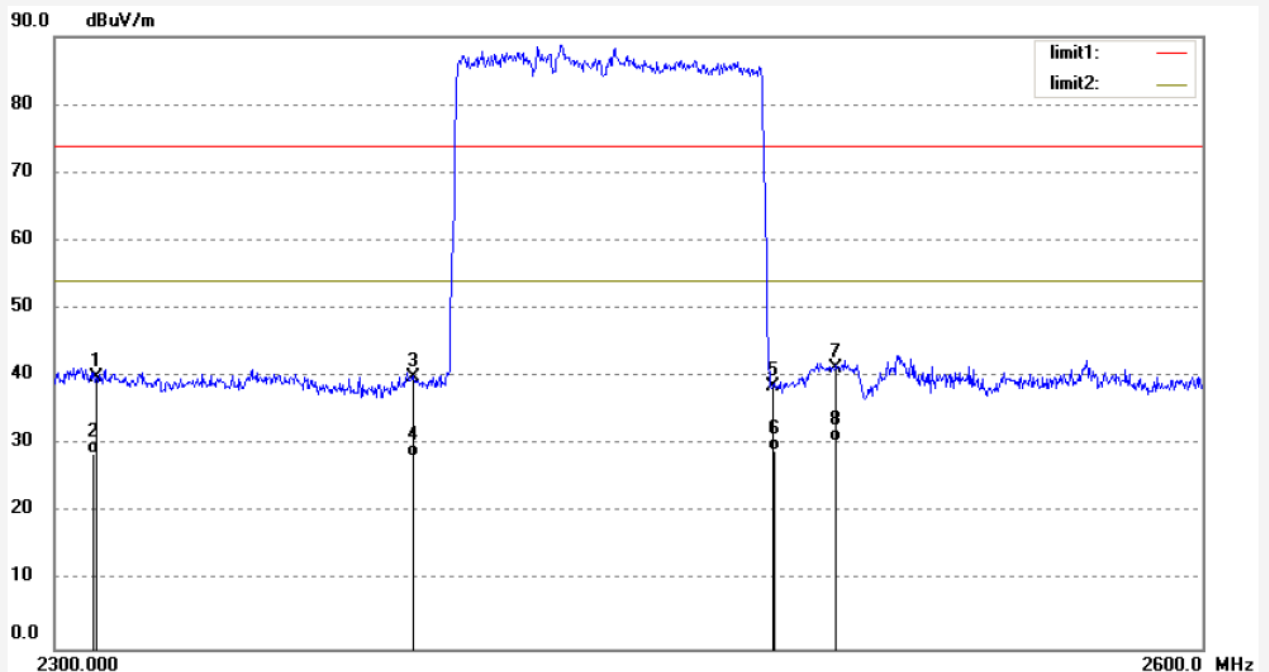

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	46.88	-6.99	39.89	74.00	-34.11	peak			
2	2310.000	35.60	-6.99	28.61	54.00	-25.39	AVG			
3	2390.000	46.74	-6.78	39.96	74.00	-34.04	peak			
4	2390.000	35.10	-6.78	28.32	54.00	-25.68	AVG			
5	2483.500	45.21	-6.54	38.67	74.00	-35.33	peak			
6	2483.500	35.66	-6.54	29.12	54.00	-24.88	AVG			
7	2500.000	47.76	-6.50	41.26	74.00	-32.74	peak			
8	2500.000	36.91	-6.50	30.41	54.00	-23.59	AVG			


12.AC POWER LINE CONDUCTED EMISSION FOR FCC PART

15 SECTION 15.207(A)

12.1.Block Diagram of Test Setup

12.1.1.Block diagram of connection between the EUT and simulators

12.1.2.Shielding Room Test Setup Diagram

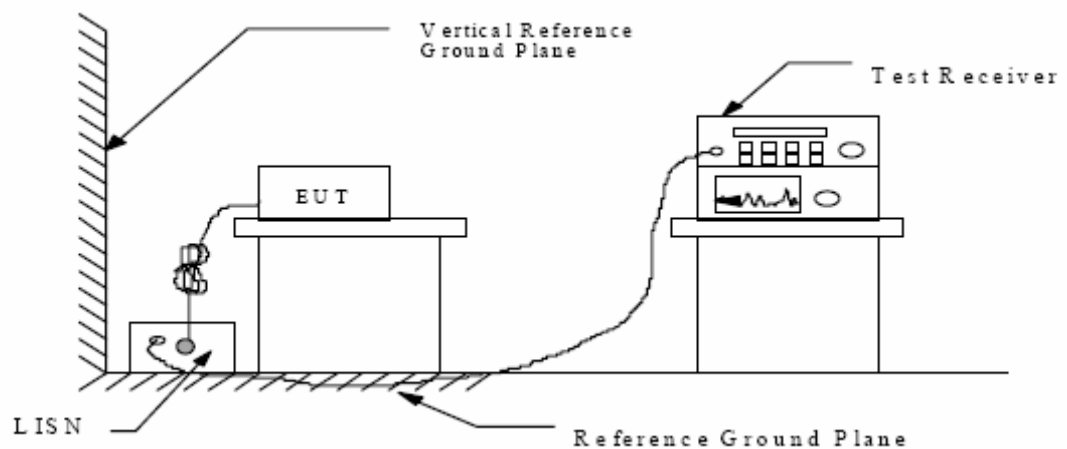

(EUT: PROPORT)

12.2.The Emission Limit

12.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

12.3.Configuration of EUT on Measurement

The equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

12.4.Operating Condition of EUT

12.4.1.Setup the EUT and simulator as shown as Section 11.1.

12.4.2.Turn on the power of all equipment.

12.4.3.Let the EUT work in TX (Operation) mode measure it.

12.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4- 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.

The frequency range from 150 kHz to 30MHz is checked.

12.6.Power Line Conducted Emission Measurement Results



ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART15B

EUT: PROPORT M/N:TAB-10A
Manufacturer: AMES ADT, Inc./Applied Device Technologies
Operating Condition: BT
Test Site: 1#Shielding Room
Operator: star
Test Specification: N 120V/60Hz
Comment: Report No.: ATE20141585
Start of Test: 10/16/2014 / 4:17:04PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average						

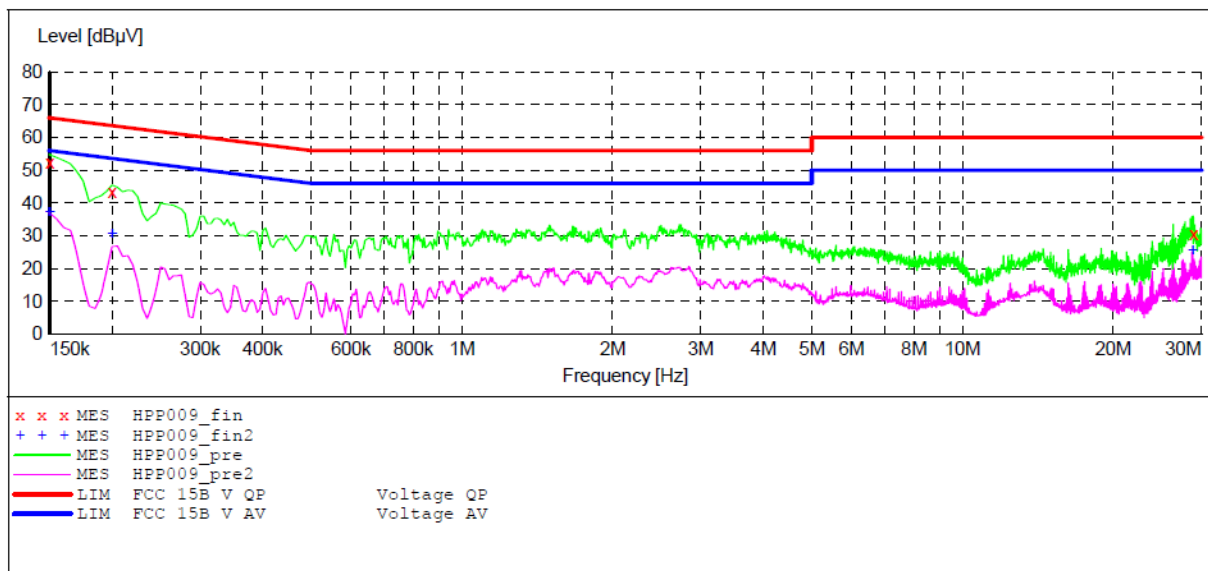

MEASUREMENT RESULT: "HPP009_fin"

10/16/2014 4:20PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	52.50	10.5	66	13.5	QP	N	GND
0.200000	43.20	10.5	64	20.4	QP	N	GND
28.925000	30.40	11.5	60	29.6	QP	N	GND

MEASUREMENT RESULT: "HPP009_fin2"

10/16/2014 4:20PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	37.30	10.5	56	18.7	AV	N	GND
0.200000	30.40	10.5	54	23.2	AV	N	GND
28.825000	25.30	11.5	50	24.7	AV	N	GND



ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART15B

EUT: PROPORT M/N:TAB-10A
Manufacturer: AMES ADT, Inc./Applied Device Technologies
Operating Condition: BT
Test Site: 1#Shielding Room
Operator: star
Test Specification: L 120V/60Hz
Comment: Report No.: ATE20141585
Start of Test: 10/16/2014 / 4:23:35PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
			Average			

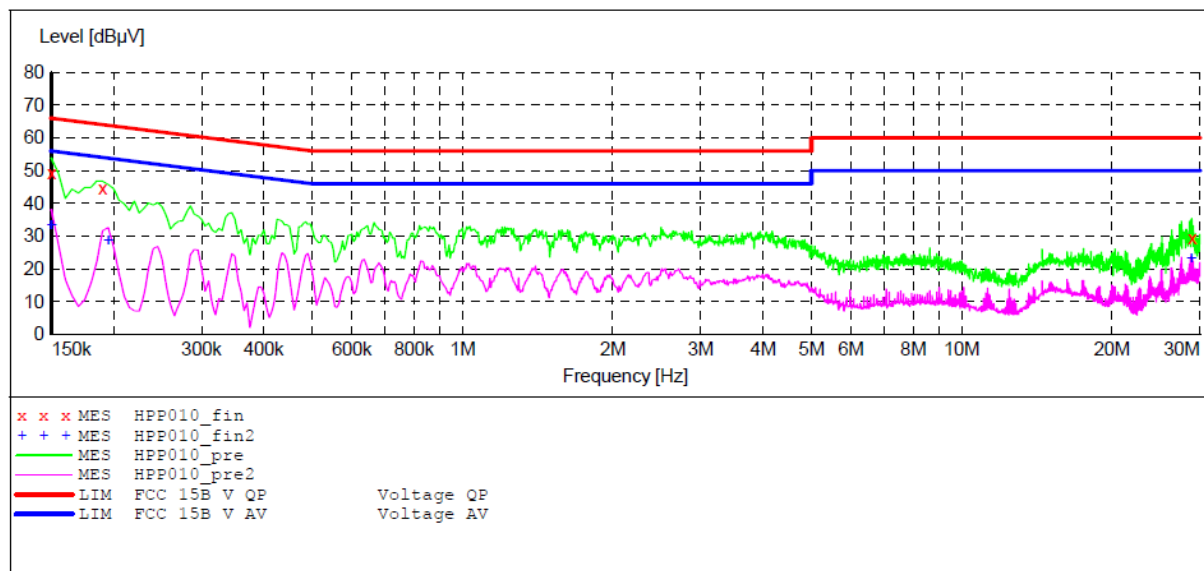

MEASUREMENT RESULT: "HPP010_fin"

10/16/2014 4:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	49.20	10.5	66	16.8	QP	L1	GND
0.190000	44.60	10.5	64	19.4	QP	L1	GND
28.925000	29.30	11.5	60	30.7	QP	L1	GND

MEASUREMENT RESULT: "HPP010_fin2"

10/16/2014 4:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	33.20	10.5	56	22.8	AV	L1	GND
0.195000	28.70	10.5	54	25.1	AV	L1	GND
28.825000	23.00	11.5	50	27.0	AV	L1	GND


13.ANTENNA REQUIREMENT

13.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

13.2.Antenna Construction

The antenna is PCB antenna, no consideration of replacement. Therefore, the equipment complies with the antenna requirement of Section 15.203.

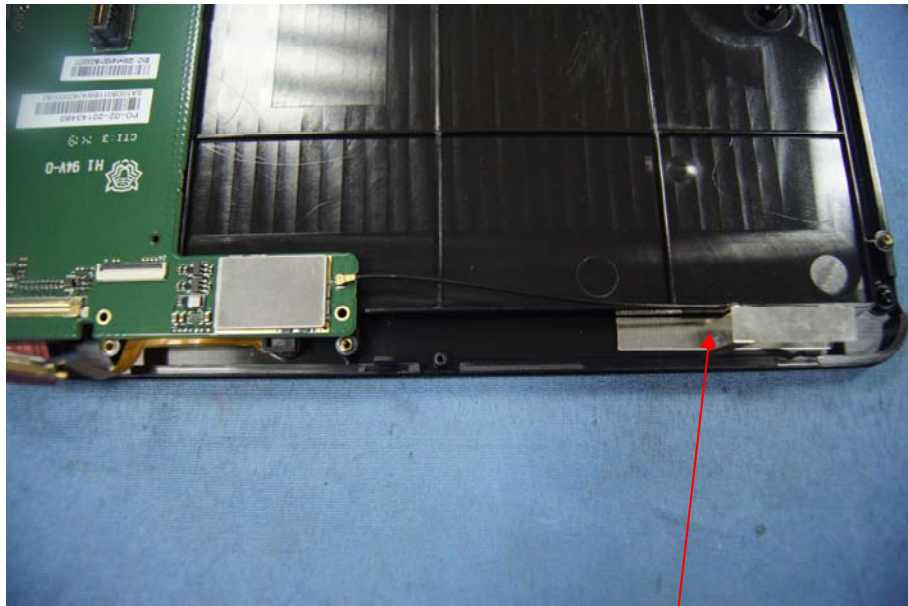

Antenna