

SAR EVALUATION REPORT

For

NXL, LLC.

3355 Bald Mountain Rd, Auburn Hills, Michigan, United States

FCC ID: 2ADM8-MASC09T

Report Type: Product Type:

Original Report C09T BY MASON

Test Engineer: Terry XiaHou

Report Number: RSZ151110015-20

Report Date: 2015-10-10

Bell Hu Bell Hu

Reviewed By: SAR Engineer

Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone

Shenzhen, Guangdong, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Attestation of Test Results										
	Company Name	NXL, LLC.								
	EUT Description	C09T BY MASON								
EUT Information	FCC ID	2ADM8-MASC09T								
22202 22202	Model Number	MASC09T								
	Test Date	2015-10-11								
Frequency	N	Max. SAR Level(s) Reported	Limit(W/Kg)							
GSM 850		0.235 W/kg 1g Head SAR 0.299 W/kg 1g Body SAR								
PCS 1900		0.222 W/kg 1g Head SAR 0.458 W/kg 1g Body SAR								
WCDMA 850		0.152 W/kg 1g Head SAR 0.211 W/kg 1g Body SAR								
WCDMA 1700		0.172 W/kg 1g Head SAR 0.302 W/kg 1g Body SAR	1.6							
WCDMA 1900		0.432 W/kg 1g Head SAR 0.704 W/kg 1g Body SAR								
Simultaneous		0.789 W/kg 1g Head SAR 0.882 W/kg 1g Body SAR								
Hotspot	0.882 W/kg 1g Body SAR									
Applicable Standards	ANSI / IEEE C95.1 : 2005 IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fileds, 3 kHz to 300 GHz. ANSI / IEEE C95.3 : 2002 IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to SuchFields, 100 kHz—300 GHz. FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques IEC 62209-1:2006 Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part1:Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3GHz) IEC 62209-2:2010 Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices-Human models, instrumentation, and procedures-Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices-Human models, instrumentation, and procedures-Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) KDB procedures KDB 447498 D01 General RF Exposure Guidance v06. KDB 648474 D04 Handset SAR v01r03. KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02									

SAR Evaluation Report 2 of 116

Report No: RSZ151110015-20

Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.

The results and statements contained in this report pertain only to the device(s) evaluated.

SAR Evaluation Report 3 of 116

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	6
EUT DESCRIPTION	7
TECHNICAL SPECIFICATION	7
REFERENCE, STANDARDS, AND GUILDELINES	8
SAR LIMITS	
FACILITIES	
DESCRIPTION OF TEST SYSTEM	
EQUIPMENT LIST AND CALIBRATION	
EQUIPMENT LIST AND CALIBRATION	
SAR MEASUREMENT SYSTEM VERIFICATION	
Liquid Verification	
SYSTEM ACCURACY VERIFICATIONSAR SYSTEM VALIDATION DATA	
EUT TEST STRATEGY AND METHODOLOGY	
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR	
EAR/TILT POSITION	
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	36
SAR EVALUATION PROCEDURE	
TEST METHODOLOGY	
CONDUCTED OUTPUT POWER MEASUREMENT	
Provision Applicable	
TEST PROCEDURE	
MAXIMUM OUTPUT POWER AMONG PRODUCTION UNITSTEST RESULTS:	
SAR MEASUREMENT RESULTS	
SAR TEST DATA	47
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	54
SAR PLOTS (SUMMARY OF THE HIGHEST SAR VALUES)	
APPENDIX A MEASUREMENT UNCERTAINTY	69
APPENDIX B – PROBE CALIBRATION CERTIFICATES	71
APPENDIX C DIPOLE CALIBRATION CERTIFICATES	81
APPENDIX D EUT TEST POSITION PHOTOS	108
Liquid depth ≥ 15cm	
LEFT HEAD TOUCH SETUP PHOTO	
LEFT HEAD TILT SETUP PHOTO	
RIGHT HEAD TOUCH SETUP PHOTO	
BODY-WORN BACK SETUP PHOTO	
BODY-WORN LEFT SETUP PHOTO	111
BODY-WORN BOTTOM SETUP PHOTO	111
APPENDIX E EUT PHOTOS	112
EUT – Front View	
EUT – BACK VIEW	
EUT – LEFT SIDE VIEWEUT – RIGHT SIDE VIEW	

Bay	/ Area	Compliance	Laboratories	Corp. ((Shenzhen)

APPE	ENDIX F INFORMATIVE REFERENCES	116
	JT – Uncovered View	
	T - BOTTOM VIEW	
EU	JT – Top View	114

Report No: RSZ151110015-20

5 of 116

SAR Evaluation Report

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision	
0	RSZ151110015-20	Original Report	2015-10-10	

SAR Evaluation Report 6 of 116

EUT DESCRIPTION

This report has been prepared on behalf of NXL, LLC. and their product, FCC ID: 2ADM8-MASC09T, Model: MASC09T or the EUT (Equipment under Test) as referred to in the rest of this report.

Report No: RSZ151110015-20

*Note:

1. The device is capable of personal hotspot mode. Wi-Fi Hotspot mode permits the device to share its cellular data connection with other 2.4 GHz Wi-Fi enabled devices (channels 1 - 11).

Technical Specification

Product Type	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Multi-slot Class:	Class12
On and Can Made	GSM Voice,GPRS/EDGE Data, WCDMA(Rel99, HSUPA,
Operation Mode :	HSDPA),Bluetooth and Wi-Fi
	GSM 850 : 824-849 MHz(TX) ; 869-894 MHz(RX)
	PCS 1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX)
	WCDMA850: 824-849 MHz(TX) ; 869-894 MHz(RX)
Engagonay Panda	WCDMA 1700: 1710-1755MHz(TX); 2110-2155MHz(RX)
Frequency Band:	WCDMA1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX)
	Wi-Fi(802.11b/g/n20): 2412MHz-2462MHz
	Wi-Fi(802.11n40): 2422MHz-2452MHz
	Bluetooth:2402-2480MHz
	GSM 850 :32.16 dBm
	PCS 1900 :28.71 dBm
	WCDMA 850 :22.45 dBm
	WCDMA 1700 : 21.56 dBm
Conducted RF Power:	WCDMA 1900 :21.39 dBm
	Wi-Fi(802.11b/g/n20) : 9.22 dBm
	Wi-Fi(802.11n40) :7.46 dBm
	Bluetooth3.0: 2.24 dBm
	BLE: -5.85 dBm
Dimensions (L*W*H):	143 mm (L) × 74 mm (W) × 11 mm (H)
Power Source:	3.8 V _{DC} Rechargeable Battery
Normal Operation:	Head and Body-worn

SAR Evaluation Report 7 of 116

REFERENCE, STANDARDS, AND GUILDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

Report No: RSZ151110015-20

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Evaluation Report 8 of 116

SAR Limits

FCC Limit (1g Tissue)

Report No: RSZ151110015-20

	SAR (W/kg)				
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

CE Limit (10g Tissue)

	SAR (W/kg)				
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 10 g of tissue)	2.0	10			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2~W/kg (CE) applied to the EUT.

SAR Evaluation Report 9 of 116

FACILITIES

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 6/F, the 3rd Phase of WanLi Industrial Building, Shi Hua Road, Fu Tian Free Trade Zone, Shenzhen, Guangdong, P.R. of China

Report No: RSZ151110015-20

SAR Evaluation Report 10 of 116

DESCRIPTION OF TEST SYSTEM

These measurements were performed with ALSAS 10 Universal Integrated SAR Measurement system from APREL Laboratories.

ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller. ALSAS-10U uses the latest methodologies. And FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm2 step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.



Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.

SAR Evaluation Report 11 of 116

ALSAS-10U Interpolation and Extrapolation Uncertainty


The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a+2z)^2} \right)$$

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

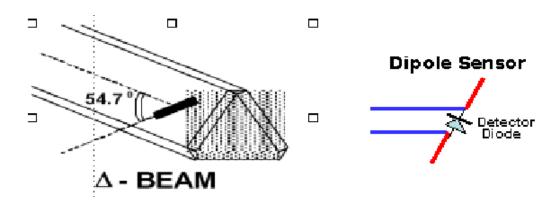

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_{i} = U_{i} + U_{i}^{2} \cdot \frac{cf}{dcp_{i}}$$

SAR Evaluation Report 12 of 116

Isotropic E-Field Probe Specification

Calibration Method	Frequency Dependent Below 1 GHz Calibration in air performed in a TEM Cell Above 1 GHz Calibration in air performed in waveguide
Sensitivity $0.70 \mu V/(V/m)^2 \text{ to } 0.85 \mu V/(V/m)^2$	
Dynamic Range	0.0005 W/kg to 100 W/kg
Isotropic Response	Better than 0.1 dB
Diode Compression Point (DCP)	Calibration for Specific Frequency
Probe Tip Diameter	< 2.9 mm
Sensor Offset	1.56 (+/- 0.02 mm)
Probe Length	289 mm
Video Bandwidth	@ 500 Hz: 1 dB @ 1.02 kHz: 3 dB
Boundary Effect	Less than 2.1% for distance greater than 0.58 mm
Spatial Resolution	The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe

Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from $5\mu V$ to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	12 Bit	
Amplifier Range	Amplifier Range 20 mV to 200 mV and 150 mV to 800 mV	
Field Integration Local Co-Processor utilizing proprietary integration algorithms and the control of the contro		
Number of Input Channels 4 in total 3 dedicated and 1 spare		
Communication	Packet data via RS232	

SAR Evaluation Report 13 of 116

Axis Articulated Robot

ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.



Robot/Controller Manufacturer	Thermo CRS		
Number of Axis	Six independently controlled axis		
Positioning Repeatability	0.05 mm		
Controller Type	Single phase Pentium based C500C		
Robot Reach	710 mm		
Communication	RS232 and LAN compatible		

ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.

SAR Evaluation Report 14 of 116




Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

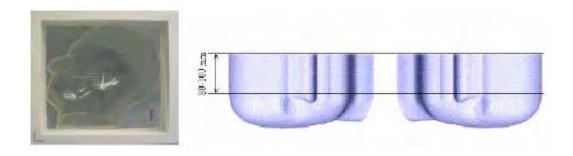


SAR Evaluation Report 15 of 116

APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software.

The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



SAR Evaluation Report 16 of 116

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Ingredients	Frequency (MHz)									
(% by weight)	45	0	83	35	91	15	19	00	24	50
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Recommended Tissue Dielectric Parameters for Head and Body

Frequency	Head	Tissue	Body Tissue		
(MHz)	Er	O'(S/m)	£r	O' (S/m)	
150	52.3	0.76	61.9	0.80	
300	45.3	0.87	58.2	0.92	
450	43.5	0.87	56.7	0.94	
835	41.5	0.90	55.2	0.97	
900	41.5	0.97	55.0	1.05	
915	41.5	0.98	55.0	1.06	
1450	40.5	1.20	54.0	1.30	
1610	40.3	1.29	53.8	1.40	
1800-2000	40.0	1.40	53.3	1.52	
2450	39.2	1.80	52.7	1.95	
3000	38.5	2.40	52.0	2.73	
5800	35.3	5.27	48.2	6.00	

SAR Evaluation Report 17 of 116

EQUIPMENT LIST AND CALIBRATION


Equipments List & Calibration Information

Equipment	Model	Calibration Date	Calibration Due Date	S/N
CRS F3 robot	ALS-F3	N/A	N/A	RAF0805352
CRS F3 Software	ALS-F3-SW	N/A	N/A	N/A
CRS C500C controller	ALS-C500	N/A	N/A	RCF0805379
Probe mounting device & Boundary Detection Sensor System	ALS-PMDPS-3	N/A	N/A	120-00270
Universal Work Station	ALS-UWS	N/A	N/A	100-00157
Data Acquisition Package	ALS-DAQ-PAQ-3	2014-10-14	2015-10-14	110-00212
Miniature E-Field Probe	ALS-E-020	2014-10-14	2015-10-14	500-00283
Dipole, 835MHz	ALS-D-835-S-2	2014-10-08	2017-10-08	180-00558
Dipole, 1750MHz	ALS-D-1750-S-2	2013-10-08	2016-10-08	198-00304
Dipole, 1900MHz	ALS-D-1900-S-2	2014-10-09	2017-10-09	210-00710
Dipole Spacer	ALS-DS-U	N/A	N/A	250-00907
Device holder/Positioner	ALS-H-E-SET-2	N/A	N/A	170-00510
Left ear SAM phantom	ALS-P-SAM-L	N/A	N/A	130-00311
Right ear SAM phantom	ALS-P-SAM-R	N/A	N/A	140-00359
UniPhantom	ALS-P-UP-1	N/A	N/A	150-00413
Simulated Tissue 835 MHz Head	ALS-TS-835-H	Each Time	Each Time	270-01002
Simulated Tissue 835 MHz Body	ALS-TS-835-B	Each Time	Each Time	270-02101
Simulated Tissue 1750 MHz Head	ALS-TS-1750-H	Each Time	Each Time	295-01103
Simulated Tissue 1750 MHz Body	ALS-TS-1750-B	Each Time	Each Time	295-02102
Simulated Tissue 1900 MHz Head	ALS-TS-1900-H	Each Time	Each Time	295-01103
Simulated Tissue 1900 MHz Body	ALS-TS-1900-B	Each Time	Each Time	295-02102
Directional couple	DC6180A	N/A	N/A	0325849
Power Amplifier	5S1G4	N/A	N/A	71377
Dielectric probe kit	HP85070B	2015-06-13	2016-06-13	US33020324
Attenuator	3dB	2015-05-08	2016-05-08	5402
Network analyzer	8752C	2015-06-03	2016-06-03	3410A02356
Synthesized Sweeper	HP 8341B	2015-06-03	2016-06-03	2624A00116
UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	2014-11-23	2015-11-23	106891
EMI Test Receiver	ESCI	2015-06-13	2016-06-13	101746

SAR Evaluation Report 18 of 116

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

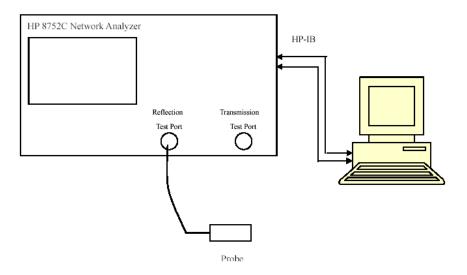

Liquid Verification Setup Block Diagram

SAR Evaluation Report 19 of 116

Frequency (MHz)	Liquid	Liquid Parameter		Target Value		Delta (%)		Tolerance
	Type	$\epsilon_{ m r}$	O (S/m)	$\epsilon_{ m r}$	O'(S/m)	$\Delta \epsilon_{ m r}$	ΔΟ (S/m)	(%)
824.2	Head	41.70	0.89	41.50	0.90	0.482	-1.111	±5
824.2	Body	55.10	0.96	55.20	0.97	-0.181	-1.031	±5
926.4	Head	41.63	0.89	41.50	0.90	0.313	-1.111	±5
826.4	Body	55.42	0.99	55.20	0.97	0.399	2.062	±5
926.6	Head	41.79	0.92	41.50	0.90	0.699	2.222	±5
836.6	Body	55.48	0.99	55.20	0.97	0.507	2.062	±5
046.6	Head	41.71	0.92	41.50	0.90	0.506	2.222	±5
846.6	Body	55.51	0.98	55.20	0.97	0.562	1.031	±5
0.40.0	Head	41.49	0.90	41.50	0.90	-0.024	0.000	±5
848.8	Body	55.10	0.99	55.20	0.97	-0.181	2.062	±5
1710.4	Head	40.16	1.36	40.08	1.37	0.200	-0.730	±5
1712.4	Body	53.44	1.50	53.43	1.49	0.019	0.671	±5
1722 6	Head	40.29	1.39	40.08	1.37	0.524	1.460	±5
1732.6	Body	53.80	1.50	53.43	1.49	0.692	0.671	±5
1752 (Head	40.21	1.38	40.08	1.37	0.324	0.730	±5
1752.6	Body	53.37	1.52	53.43	1.49	-0.112	2.013	±5
1850.2	Head	40.23	1.42	40.00	1.40	0.575	1.429	±5
	Body	53.21	1.53	53.30	1.52	-0.169	0.658	±5
1852.4	Head	40.35	1.41	40.00	1.40	0.875	0.714	±5
	Body	53.60	1.53	53.30	1.52	0.563	0.658	±5
1880.0	Head	40.14	1.42	40.00	1.40	0.350	1.429	±5
	Body	53.56	1.54	53.30	1.52	0.488	1.316	±5
1007.6	Head	40.26	1.39	40.00	1.40	0.650	-0.714	±5
1907.6	Body	53.38	1.54	53.30	1.52	0.150	1.316	±5
1909.8	Head	40.27	1.40	40.00	1.40	0.675	0.000	±5
1909.8	Body	53.52	1.54	53.30	1.52	0.413	1.316	±5

Report No: RSZ151110015-20

SAR Evaluation Report 20 of 116


 $[*]Liquid\ Verification\ was\ performed\ on\ 2015-10-11.$

System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

Report No: RSZ151110015-20

System Verification Setup Block Diagram

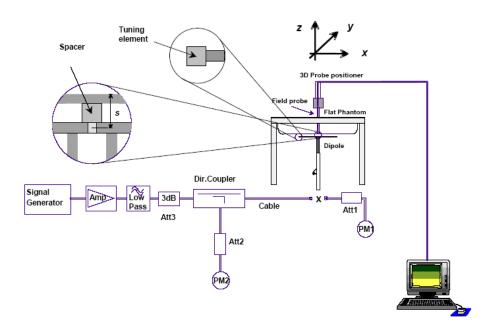

Probe and dipole antenna List and Detail

Manufacturer	Description	Model	Serial	Calibration	Calibration
			Number	Date	Due Date
APREL	Probe	ALS-E-020	500-00283	2014-10-14	2015-10-14
APREL	Dipole antenna(835MHz)	ALS-D-835-S-2	180-00558	2014-10-08	2017-10-08
APREL	Dipole antenna(1750MHz)	ALS-D-1750-S-2	198-00304	2013-10-08	2016-10-08
APREL	Dipole antenna(1900MHz)	ALS-D-1900-S-2	210-00710	2014-10-09	2017-10-09

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Measured SAR (W/Kg)				Target Value (W/Kg)	Delta (%)	Tolerance (%)
2015-10-11	835	Head	1g	9.606	9.773	-1.709	±10		
		Body	1g	9.351	9.736	-3.954	±10		
	1750	Head	1g	35.637	37.020	-3.736	±10		
		Body	1g	36.315	36.650	-0.914	±10		
	1900	Head	1g	39.771	39.481	0.735	±10		
		Body	1g	40.239	39.715	1.319	±10		

^{*}All SAR values are normalized to 1 Watt forward power.

SAR Evaluation Report 21 of 116

SAR SYSTEM VALIDATION DATA

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 835 MHz Head Liquid

Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558

Product Data

Device Name : Dipole 835 MHz Serial No. : 180-00558 Type : Dipole

Model : ALS-D-835-S-2

Frequency Band : 835

Max. Transmit Pwr : 1 W

Drift Time : 3 min(s)

Power Drift-Start : 9.613 W/kg

Power Drift-Finish : 9.632W/kg

Power Drift (%) : 0.198

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Phantom Data

Tissue Data

: Head Type : 270-01002 Serial No. : 835.0 MHz Frequency Last Calib. Date : 11-Oct-2015 Temperature : 20.00 °C Ambient Temp. : 21.00 °C : 56.00 RH% Humidity : 41.06 F/m Epsilon Sigma : 0.92 S/m Density : 1000.00 kg/cu. m

,

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Oct-2014

Frequency Band : 835 Duty Cycle Factor : 1 Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 21.00 °C Ambient Temp. : 21.00 °C

Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 22 of 116

1 gram SAR value : 9.606 W/kg 10 gram SAR value : 6.348 W/kg Area Scan Peak SAR : 9.757 W/kg Zoom Scan Peak SAR : 16.225 W/kg

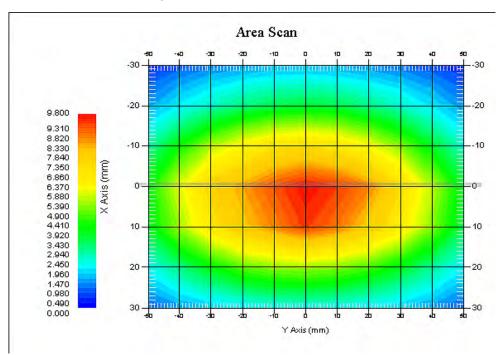

835 MHz System Validation with Head Tissue

SAR Evaluation Report 23 of 116

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 835 MHz Body Liquid

Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558

Product Data

Device Name : Dipole 835 MHz Serial No. : 180-00558 Type : Dipole

Model : ALS-D-835-S-2

Frequency Band : 835

Max. Transmit Pwr
Drift Time : 3 min(s)
Power Drift-Start : 9.569 W/kg
Power Drift-Finish
Power Drift (%) : -0.460

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Phantom Data

Tissue Data

Type : Body : 270-02101 Serial No. : 835.0 MHz Frequency Last Calib. Date : 11-Oct-2015 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity Epsilon : 53.78 F/m Sigma : 0.96 S/m : 1000.00 kg/cu. m Density

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Oct-2014

Frequency Band : 835 Duty Cycle Factor : 1 Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 21.00 °C Ambient Temp. : 21.00 °C

Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 24 of 116

1 gram SAR value : 9.351 W/kg 10 gram SAR value : 6.177 W/kg Area Scan Peak SAR : 9.642 W/kg Zoom Scan Peak SAR : 16.811 W/kg

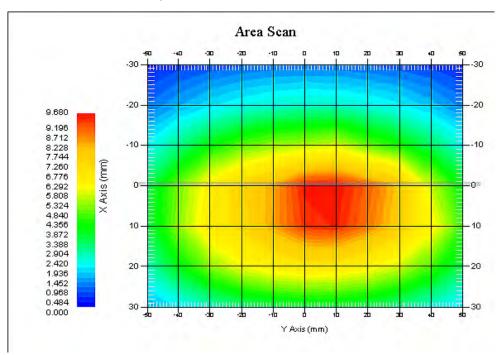

835 MHz System Validation with Body Tissue

SAR Evaluation Report 25 of 116

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 1750 MHz Head Liquid

Dipole 1750 MHz; Type: ALS-D-1750-S-2; S/N: 198-00304

Product Data

Device Name : Dipole 1750MHz Serial No. : 198-00304

Type : Dipole

Model : ALS-D-1750-S-2

Frequency Band : 1700

Max. Transmit Pwr : 1 W

Drift Time : 3 min(s)

Power Drift-Start : 32.132 W/kg

Power Drift-Finish : 32.831 W/kg

Power Drift (%) : 2.151

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Tissue Data

: Head Type : 295-01101 Serial No. : 1750.00 MHz Frequency Last Calib. Date : 11-Oct-2015 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity : 39.30 F/m Epsilon : 1.39 S/m Sigma

Density : 1000.00 kg/cu. M

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Oct-2014

Frequency Band : 1750 Duty Cycle Factor : 1 Conversion Factor : 5.4

Probe Sensitivity : 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 20.00 °C Ambient Temp. : 20.00 °C

Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 26 of 116

1 gram SAR value : 35.637 W/kg 10 gram SAR value : 19.739 W/kg Area Scan Peak SAR : 36.538 W/kg Zoom Scan Peak SAR : 68.793 W/kg

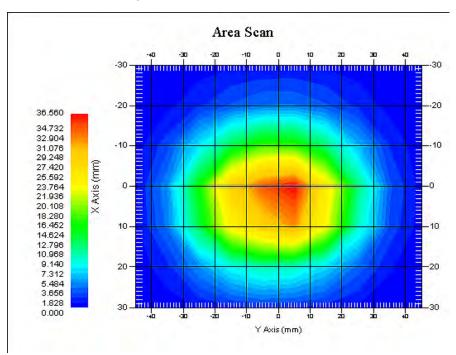

1750 MHz System Validation with Head Tissue

SAR Evaluation Report 27 of 116

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 1750 MHz Body Liquid

Dipole 1750 MHz; Type: ALS-D-1750-S-2; S/N: 198-00304

Product Data

Device Name : Dipole 1750MHz Serial No. : 198-00304 Type : Dipole

Model : ALS-D-1750-S-2

Frequency Band : 1700

Max. Transmit Pwr : 1 W

Drift Time : 3 min(s)

Power Drift-Start : 35.233 W/kg

Power Drift-Finish : 35.756 W/kg

Power Drift (%) : 1.426

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Tissue Data

Type : Body : 295-02105 Serial No. : 1750.00 MHz Frequency Last Calib. Date : 11-Oct-2015 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity : 51.89 F/m Epsilon : 1.52 S/m Sigma : 1000.00 kg/cu. m Density

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Oct-2014

Frequency Band : 1750 Duty Cycle Factor : 1 Conversion Factor : 5.3

Probe Sensitivity : 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 20.00 °C Ambient Temp. : 21.00 °C

Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 28 of 116

1 gram SAR value : 36.315 W/kg 10 gram SAR value : 19.137 W/kg Area Scan Peak SAR : 37.157 W/kg Zoom Scan Peak SAR : 66.537 W/kg

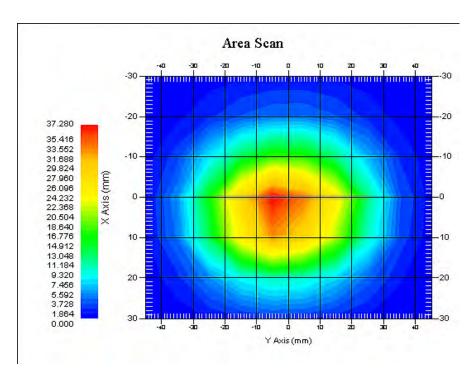

1750 MHz System Validation with Body Tissue

SAR Evaluation Report 29 of 116

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 1900 MHz Head Liquid

Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710

Product Data

Device Name : Dipole 1900MHz Serial No. : 210-00710 Type : Dipole

Model : ALS-D-1900-S-2

Frequency Band : 1900

Max. Transmit Pwr : 1 W

Drift Time : 3 min(s)

Power Drift-Start : 43.661 W/kg

Power Drift-Finish : 43.319 W/kg

Power Drift (%) : -0.783

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Tissue Data

: Head Type : 295-01103 Serial No. : 1900.00 MHz Frequency Last Calib. Date : 11-Oct-2015 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity : 39.64 F/m Epsilon Sigma : 1.41 S/m : 1000.00 kg/cu. M Density

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Oct-2014

Frequency Band : 1900 Duty Cycle Factor : 1 Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 20.00 °C Ambient Temp. : 20.00 °C

Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 30 of 116

1 gram SAR value : 39.771 W/kg 10 gram SAR value : 21.385 W/kg Area Scan Peak SAR : 45.773 W/kg Zoom Scan Peak SAR : 73.564 W/kg

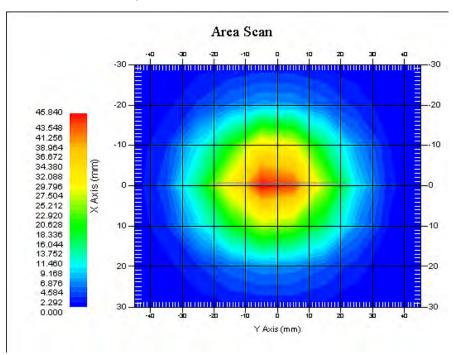

1900 MHz System Validation with Head Tissue

SAR Evaluation Report 31 of 116

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 1900 MHz Body Liquid

Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710

Product Data

Device Name : Dipole 1900MHz Serial No. : 210-00710 Type : Dipole

Model : ALS-D-1900-S-2

Frequency Band : 1900

Max. Transmit Pwr : 1 W

Drift Time : 3 min(s)

Power Drift-Start : 45.302 W/kg

Power Drift-Finish : 45.964 W/kg

Power Drift (%) : 1.461

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Tissue Data

Type : Body : 295-02102 Serial No. : 1900.00 MHz Frequency Last Calib. Date : 11-Oct-2015 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity : 51.90 F/m Epsilon : 1.53 S/m Sigma : 1000.00 kg/cu. m Density

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Oct-2014

Frequency Band : 1900 Duty Cycle Factor : 1 Conversion Factor : 4.5

Probe Sensitivity : 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 20.00 °C Ambient Temp. : 21.00 °C

Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 32 of 116

1 gram SAR value : 40.239 W/kg 10 gram SAR value : 21.586 W/kg Area Scan Peak SAR : 47.524 W/kg Zoom Scan Peak SAR : 72.838 W/kg

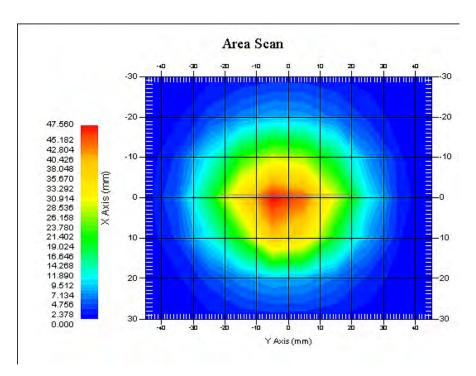

1900 MHz System Validation with Body Tissue


SAR Evaluation Report 33 of 116


EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

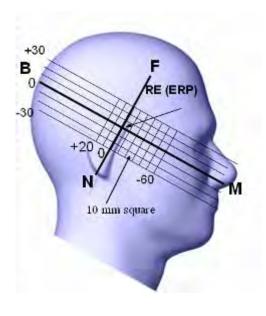

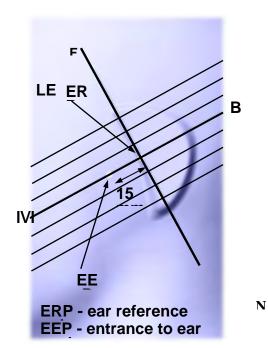

SAR Evaluation Report 34 of 116

Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the "ear reference point" or along the "N-F" line for the SCC-34/SC-2 head phantom.

This test position is established:

- When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- o (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek / Touch Position

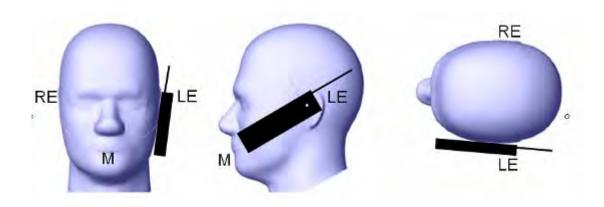

Ear/Tilt Position


With the handset aligned in the "Cheek/Touch Position":

- 1) If the earpiece of the handset is not in full contact with the phantom's ear spacer (in the "Cheek/Touch position") and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.
- 2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both "ear reference points" (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the "test device reference point" until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point isby 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

SAR Evaluation Report 35 of 116

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the "Cheek/Touch" and "Ear/Tilt" positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

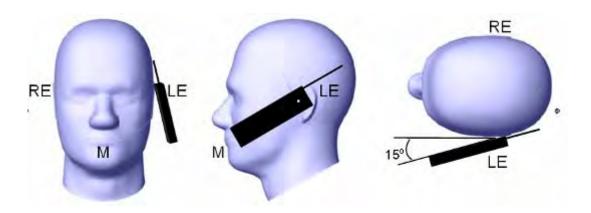

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

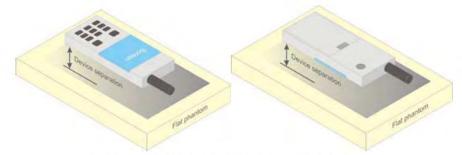


Figure 5 – Test positions for body-worn devices

SAR Evaluation Report 36 of 116

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Report No: RSZ151110015-20

- Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.
- Step 3: Around this point, a volume of 35 mm x 35 mm x 35 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:
 - 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

Test methodology

KDB 447498 D01 General RF Exposure Guidance v06.

KDB 648474 D04 Handset SAR v01r03.

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04

KDB 865664 D02 RF Exposure Reporting v01r02

KDB 941225 D01 3G SAR Procedures v03r01

KDB 941225 D06 Hotspot Mode v02r01

SAR Evaluation Report 37 of 116


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

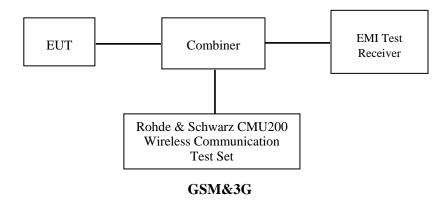

SAR Evaluation Report 38 of 116

Maximum Output Power among production units

Max Target Power for Production Unit (dBm)							
Mod	o/Rand		Channel				
Mode/Band		Low	Middle	High			
GM	S 850	32.20	32.20	32.20			
GPRS8	350 1 slot	32.10	32.10	32.10			
GPRS8	50 2 slots	31.30	31.30	31.30			
GPRS8	50 3 slots	29.40	29.40	29.40			
GPRS8	50 4 slots	28.10	28.10	28.10			
EGPRS	850 1 slot	28.40	28.40	28.40			
EGPRS8	350 2 slots	27.80	27.80	27.80			
EGPRS8	350 3 slots	26.80	26.80	26.80			
EGPRS8	350 4 slots	26.10	26.10	26.10			
PCS	1900	28.80	28.80	28.80			
GPRS1	900 1 slot	28.80	28.80	28.80			
GPRS19	900 2 slots	28.00	28.00	28.00			
GPRS19	900 3 slots	26.30	26.30	26.30			
GPRS19	900 4 slots	25.10	25.10	25.10			
EGPRS1	1900 1 slot	24.10	23.50	20.00			
EGPRS1	900 2 slots	23.20	22.50	22.00			
EGPRS1	900 3 slots	21.70	21.00	20.00			
EGPRS1	900 4 slots	20.90	20.50	19.00			
	RMC	22.50	22.50	22.50			
WCDMA 850	HSDPA	21.50	21.50	21.50			
	HSUPA	21.50	21.50	21.50			
	RMC	21.60	21.60	21.60			
WCDMA 1700	HSDPA	20.60	20.60	20.60			
	HSUPA	20.60	20.60	20.60			
	RMC	21.40	21.40	21.40			
WCDMA 1900	HSDPA	20.60	20.60	20.60			
	HSUPA	20.60	20.60	20.60			
Wi-Fi(802	2.11b/g/n20)	9.30	9.30	9.30			
Wi-Fi(8	02.11n40)	7.50	7.50	7.50			
Bluet	ooth3.0	2.30	2.30	2.30			
В	LE	-5.80	-5.80	-5.80			

SAR Evaluation Report 39 of 116

Test Results:

GSM:

Frequency		Conducted Output Power				
Band	(MHz)	Meas. Power (dBm)	Meas. Power (W)			
	824.2	32.07	1.611			
GSM 850	836.6	32.16	1.644			
	848.8	32.10	1.622			
	1850.2	28.71	0.743			
PCS 1900	1880.0	28.70	0.741			
	1909.8	28.45	0.700			

GPRS:

Dond	Channel	Frequency	RF Output Power (dBm)				
Band	No.	(MHz)	1 slot	2 slot	3 slots	4 slots	
	128	824.2	32.04	31.23	29.36	28.05	
GSM 850	190	836.6	32.07	31.24	29.37	28.04	
	251	848.8	32.09	31.22	29.28	27.93	
	512	1850.2	28.75	27.98	26.24	25.09	
PCS 1900	661	1880.0	28.75	27.94	26.14	24.98	
	810	1909.8	28.49	27.65	25.80	24.61	

EDGE:

Dond	Channel	Frequency	RF Output Power (dBm)				
Band	No.	(MHz)	1 slot	2 slot	3 slots	4 slots	
	128	824.2	28.39	27.78	26.74	26.01	
GSM 850	190	836.6	28.33	27.70	26.60	25.83	
	251	848.8	28.19	27.54	26.36	25.55	
	512	1850.2	24.07	23.18	21.67	20.81	
PCS 1900	661	1880.0	23.41	22.47	20.88	20.02	
	810	1909.8	19.85	21.55	19.85	18.96	

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

SAR Evaluation Report 40 of 116

The time based average power for GPRS

Dond	Channel	Channel Frequency		Time based average Power (dBm)				
Band	No.	(MHz)	1 slot	2 slot	3 slots	4 slots		
	128	824.2	23.04	25.23	25.11	25.05		
GSM 850	190	836.6	23.07	25.24	25.12	25.04		
	251	848.8	23.09	25.22	25.03	24.93		
	512	1850.2	19.75	21.98	21.99	22.09		
PCS 1900	661	1880.0	19.75	21.94	21.89	21.98		
	810	1909.8	19.49	21.65	21.55	21.61		

The time based average power for EDGE

Dand	Channel Frequency		Time based average Power (dBm)				
Band	No.	(MHz)	1 slot	2 slot	3 slots	4 slots	
	128	824.2	19.39	21.78	22.49	23.01	
GSM 850	190	836.6	19.33	21.70	22.35	22.83	
	251	848.8	19.19	21.54	22.11	22.55	
	512	1850.2	15.07	17.18	17.42	17.81	
PCS 1900	661	1880.0	14.41	16.47	16.63	17.02	
	810	1909.8	10.85	15.55	15.60	15.96	

Note:

- 1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
- 2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
- 3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
- 4. For EDGE, 1, 2, 3 and 4 timeslots has been activated separately with power control level 6(850 MHz band) and 5(1900 MHz band).

WCDMA-Release 99:

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

	Loopback Mode	Test Mode 1
WCDMA	Rel99 RMC	12.2kbps RMC
General Settings	Power Control Algorithm	Algorithm2
	βс /βd	8/15

SAR Evaluation Report 41 of 116

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

Report No: RSZ151110015-20

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RM	МС		
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
WCDMA	$eta \mathbf{c}$	2/15	12/15	15/15	15/15
General Settings	β d	15/15	15/15	8/15	4/15
Settings	βd (SF)	64			
	βc/βd	2/15	12/15	15/8	15/4
	βhs	4/15	24/15	30/15	30/15
	MPR(dB)	Algorithm2 2/15 15/15 15/15 15/15 64 2/15 12/15 15/15 15/8 4/15 24/15 0 0 0 0.5 8 8 8 8 7 3 4ms	0.5	0.5	
	D_{ACK}	8			
	$\mathrm{D}_{\mathrm{NAK}}$	8			
HSDPA	$\mathrm{D}_{\mathrm{CQI}}$	8			
Specific	Ack-Nack repetition factor	3			
Settings	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs= β hs/ β c	30/15			

SAR Evaluation Report 42 of 116

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA	
	Subset	1	2	3	4	5	
	Loopback Mode	Test Mode	e 1		•	•	
	Rel99 RMC	12.2kbps	RMC				
	HSDPA FRC	H-Set1					
	HSUPA Test	HSUPA L	oopback				
	Power Control Algorithm	Algorithm	12				
WCDMA	$eta_{f c}$	11/15	6/15	15/15	2/15	15/15	
General Settings	βd	15/15	15/15	9/15	15/15	0	
bettings	βec	209/225	12/15	30/15	2/15	5/15	
	βc/βd	11/15	6/15	15/9	2/15	-	
	βhs	22/15	12/15	30/15	4/15	5/15	
	CM(dB)	1.0	3.0	2.0	3.0	1.0	
	MPR(dB)	0	2	1	2	0	
	DACK	8					
	DNAK	8	8				
HSDPA	DCQI	8					
Specific	Ack-Nack repetition factor	3					
Settings	CQI Feedback	4ms					
	CQI Repetition Factor	2					
	Ahs= βhs/βc	30/15	T	1		_	
	DE-DPCCH	6	8	8	5	7	
	DHARQ	0	0	0	0	0	
	AG Index	20	12	15	17	21	
	ETFCI	75	67	92	71	81	
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9	
HSUPA Specific Settings	Reference E_FCls	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PC E-TFCI 71 E-TFCI PC E-TFCI PC E-TFCI PC E-TFCI PC E-TFCI PC E-TFCI PC	9 4 9 18 923 926	

SAR Evaluation Report 43 of 116

Results (12.2kbps RMC)

WCDMA 850

	Test Mode	3GPP Sub	Av	veraged Mean Po (dBm)	ower
	rest wione	Test	Low Frequency	Mid Frequency	High Frequency
	RMC1	2.2k	22.45	22.26	22.10
		1	21.41	21.14	21.06
	D 1 CHGDDA	2	21.41	21.15	21.03
Test Condition	Rel 6 HSDPA	3	21.43	21.13	21.03
Condition		4	21.45	21.16	21.05
		1	21.41	21.21	21.07
		2	21.42	21.15	21.08
	Rel 6 HSUPA	3	21.42	21.24	21.04
	HOULA	4	21.41	21.23	21.09
		5	21.43	21.22	21.06

WCDMA 1700

	Test	3GPP Sub	Averaged Mean Power (dBm)			
	Mode	Test	Low Frequency	Mid Frequency	High Frequency	
	RMO	C12.2k	21.56	21.16	21.20	
		1	20.59	20.09	20.24	
	Rel 6	2	20.42	20.08	20.25	
Test Condition	HSDPA	3	20.43	20.05	20.25	
Condition		4	20.44	20.09	20.27	
		1	20.54	20.13	20.19	
		2	20.47	20.19	20.12	
	Rel 6 HSUPA	3	20.45	20.18	20.17	
	1150171	4	20.46	20.14	20.14	
		5	20.53	20.11	20.13	

SAR Evaluation Report 44 of 116

WCDMA 1900

	Test	3GPP Sub	Averaged Mean Power (dBm)					
	Mode	Test	Low Frequency	Mid Frequency	High Frequency			
	RMO	C12.2k	21.39	20.93	20.78			
		1	20.55	19.76	19.66			
	Rel 6	2	20.31	19.65	19.76			
Test Condition	HSDPA	3	20.32	19.68	19.68			
Condition		4	20.31	19.67	19.67			
		1	20.53	19.74	19.78			
		2	20.55	19.65	19.66			
	Rel 6 HSUPA	3	20.54	19.84	19.62			
	110 0111	4	20.53	19.75	19.65			
		5	20.52	19.56	19.67			

Note:

- 1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
- Loop Model 1.

 2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

SAR Evaluation Report 45 of 116

Bluetooth

M. J.	Channel	Channel frequency	Conducte	ed Output Power
Mode	No.	(MHz)	(dBm)	(mW)
	0	2402	1.84	1.528
BDR(GFSK)	39	2441	2.18	1.652
	78	2480	2.24	1.675
	0	2402	1.44	1.393
EDR(4-DQPSK)	39	2441	1.87	1.538
	78	2480	1.99	1.581
	0	2402	1.80	1.514
EDR(8-DPSK)	39	2441	2.23	1.671
	78	2480	2.18	1.652
	0	2402	-6.26	0.237
BLE	19	2440	-5.85	0.260
	39	2480	-6.16	0.242

Report No: RSZ151110015-20

Wi-Fi

Dand	Channel	Channel frequency	Conducte	d Output Power
Band	No.	(MHz)	(dBm)	(mW)
	1	2412	8.69	7.396
802.11b	6	2437	8.95	7.852
	11	2462	8.75	7.499
	1	2412	8.70	7.413
802.11g	6	2437	8.90	7.762
	11	2462	8.98	7.907
	1	2412	8.65	7.328
802.11n HT20	6	2437	8.90	7.762
	11	2462	9.22	8.356
	1	2422	7.27	5.333
802.11n HT40	4	2437	7.46	5.572
	7	2452	7.28	5.346

Note:

 $1. \ The \ output \ power \ was \ tested \ under \ data \ rate \ 1Mbps \ for \ 802.11b, \ 6Mbps \ for \ 802.11g, \ 6.5Mbps \ for \ 802.11n \ HT20, \ 13.5Mbps \ for \ 802.11n \ HT40.$

SAR Evaluation Report 46 of 116

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	21-24 °C
Relative Humidity:	50-53 %
ATM Pressure:	1001-1002 mbar

Testing was performed by Terry XiaHou on 2015-10-11

GSM 850:

EUT	Engagonov	Test	Power	Max. Meas.	Max. Rated		1g SAR (W/Kg)	
Position	Frequency (MHz)	Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	824.2	GSM	/	/	/	/	/	/	/
Left Head Cheek	836.6	GSM	-1.639	32.16	32.20	1.009	0.233	0.235	1#
	848.8	GSM	/	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/	/
Left Head Tilt	836.6	GSM	-2.670	32.16	32.20	1.009	0.144	0.145	/
	848.8	GSM	/	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/	/
Right Head Cheek	836.6	GSM	3.512	32.16	32.20	1.009	0.210	0.212	/
	848.8	GSM	/	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/	/
Right Head Tilt	836.6	GSM	1.232	32.16	32.20	1.009	0.136	0.137	/
	848.8	GSM	/	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/	/
Body-Back-Headset	836.6	GSM	1.500	32.16	32.20	1.009	0.188	0.190	/
	848.8	GSM	/	/	/	/	/	/	/

Note:

- 1. When the 1-g SAR is \leq 0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 3. According to IEEE 1528-2013, the middle channel is required to be tested first.
- 4. KDB 447498D01- When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.
- 5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 47 of 116

PCS Band:

EUT	Frequency	Test	Power	Max. Meas.	Max. Rated	1g SAR (W/Kg)					
Position	(MHz)	Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot		
	1850.2	GSM	/	/	/	/	/	/	/		
Left Head Cheek	1880.0	GSM	2.215	28.70	28.80	1.023	0.217	0.222	2#		
	1909.8	GSM	/	/	/	/	/	/	/		
	1850.2	GSM	/	/	/	/	/	/	/		
Left Head Tilt	1880.0	GSM	-3.381	28.70	28.80	1.023	0.122	0.125	/		
	1909.8	GSM	/	/	/	/	/	/	/		
	1850.2	GSM	/	/	/	/	/	/	/		
Right Head Cheek	1880.0	GSM	-1.781	28.70	28.80	1.023	0.198	0.203	/		
	1909.8	GSM	/	/	/	/	/	/	/		
	1850.2	GSM	/	/	/	/	/	/	/		
Right Head Tilt	1880.0	GSM	-0.595	28.70	28.80	1.023	0.115	0.118	/		
	1909.8	GSM	/	/	/	/	/	/	/		
Body-Back-Headset	1850.2	GSM	/	/	/	/	/	/	/		
	1880.0	GSM	2.928	28.70	28.80	1.023	0.277	0.283	/		
	1909.8	GSM	/	/	/	/	/		/		

Note:

- 1. When the 1-g SAR is \leq 0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 3. According to IEEE 1528-2013, the middle channel is required to be tested first.
- 4. KDB 447498D01- When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 48 of 116

WCDMA 850

EUT	Frequency		Power	Max. Meas.	Max. Rated		1g SAR (W/Kg)	
Position	(MHz)	Test Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	826.4	RMC	/	/	/	/	/	/	/
Left Head Cheek	836.6	RMC	-1.817	22.26	22.50	1.057	0.144	0.152	3#
	846.6	RMC	/	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/	/
Left Head Tilt	836.6	RMC	1.566	22.26	22.50	1.057	0.093	0.098	/
	846.6	RMC	/	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/	/
Right Head Cheek	836.6	RMC	-2.572	22.26	22.50	1.057	0.137	0.145	/
	846.6	RMC	/	/	/	/	/	/	/
Right Head Tilt	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	0.799	22.26	22.50	1.057	0.096	0.101	/
	846.6	RMC	/	/	/	/	/	/	/

WCDMA 1700

EUT	Engagonov		Power	Max. Meas.	Max. Rated		1g SAR (V	V/Kg)	
Position	Frequency (MHz)	Test Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1712.4	RMC	/	/	/	/	/	/	/
Left Head Cheek	1732.6	RMC	3.396	21.16	21.60	1.107	0.143	0.158	/
	1752.6	RMC	/	/	/	/	/	/	/
	1712.4	RMC	/	/	/	/	/	/	/
Left Head Tilt	1732.6	RMC	3.225	21.16	21.60	1.107	0.081	0.090	/
	1752.6	RMC	/	/	/	/	/	/	/
	1712.4	RMC	/	/	/	/	/	/	/
Right Head Cheek	1732.6	RMC	1.311	21.16	21.60	1.107	0.155	0.172	4#
	1752.6	RMC	/	/	/	/	/	/	/
	1712.4	RMC	/	/	/	/	/	/	/
Right Head Tilt	1732.6	RMC	3.306	21.16	21.60	1.107	0.085	0.094	/
	1752.6	RMC	/	/	/	/	/	/	/

SAR Evaluation Report 49 of 116

WCDMA 1900

EUT	Frequency		Power	Max. Meas.	Max. Rated		1g SAR (V	V/Kg)	
Position	(MHz)	Test Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1852.4	RMC	/	/	/	/	/	/	/
Left Head Cheek	1880.0	RMC	-2.448	20.93	21.40	1.114	0.372	0.415	/
	1907.6	RMC	/	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Left Head Tilt	1880.0	RMC	1.425	20.93	21.40	1.114	0.185	0.206	/
	1907.6	RMC	/	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Right Head Cheek	1880.0	RMC	-2.227	20.93	21.40	1.114	0.388	0.432	5#
	1907.6	RMC	/	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Right Head Tilt	1880.0	RMC	-1.742	20.93	21.40	1.114	0.167	0.186	/
	1907.6	RMC	/	/	/	/	/	/	/

Note:

- 1. When the 1-g SAR is ≤ 0.8 W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same antenna while testing SAR.
- 3. According to IEEE 1528-2013, the middle channel is required to be tested first.
- 4. KDB 447498D01- When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.
- 5. The default test configuration is to measure SA R with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (refere nce measurement Channel) Configured in Test Loop Model.
- 6. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tole rance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 50 of 116

Mobile Hot-Spot Test Result

The DUT is capable of functioning as a Wi-Fi to Cellular Mobile hotspot. Additional SAR testing was performed according to KDB 941225 D06. Testing was performed with a separation of 1cm between the DUT and the flat phantom. The DUT was positioned for SAR tests with the front and back surfaces facing the phantom, and also with the edges facing the phantom in which the transmitting antenna is <2.5 cm from the edge. Each transmit band was utilized for SAR testing. The tested mode has been selected within each band that exhibits the highest time average output power.

Hot spot-GPRS (Frequency Band: 835)

EUT	Frequency	Test	Power	Max. Meas.	Max. Rated		1g SAR (W	/Kg)	
Position	(MHz)	Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	824.2	GPRS	/	/	/	/	/	/	/
Body-Back (10mm)	836.6	GPRS	-1.737	31.24	31.30	1.014	0.295	0.299	6#
(1011111)	848.8	GPRS	/	/	/	/	/	/	/
D 1 I C	824.2	GPRS	/	/	/	/	/	/	/
Body-Left (10mm)	836.6	GPRS	-3.215	31.24	31.30	1.014	0.176	0.178	/
(1011111)	848.8	GPRS	/	/	/	/	/	/	/
D 1 D 11	824.2	GPRS	/	/	/	/	/	/	/
Body-Bottom (10mm)	836.6	GPRS	0.675	31.24	31.30	1.014	0.089	0.090	/
, 3)	848.8	GPRS	/	/	/	/	/	/	/

Note:

- 1 .When the 1-g SAR is \leq 0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same antenna while testing SAR.
- 3. According to IEEE 1528-2013, the middle channel is required to be tested first.
- 4. KDB 447498D01- When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.
- 5. The EUT is a Capability Class B mobile phone which can be attached to both GPRS and GSM services.
- 6. The Multi-slot Classes of EUT is Class12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.
- 7. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tole rance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 51 of 116

Hot spot-GPRS (Frequency Band: 1900)

EUT	Frequency	Test	Power	Max. Meas.	Max. Rated	-	lg SAR (V	V/Kg)	
Position	(MHz)	Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1850.2	GPRS	/	/	/	/	/	/	/
Body-Back (10mm)	1880.0	GPRS	1.820	24.98	25.10	1.028	0.446	0.458	7#
(1011111)	1909.8	GPRS	/	/	/	/	/	/	/
D . 1 . 1 . 6	1850.2	GPRS	/	/	/	/	/	/	/
Body-Left (10mm)	1880.0	GPRS	-1.706	24.98	25.10	1.028	0.167	0.172	/
(= v====)	1909.8	GPRS	/	/	/	/	/	/	/
D - 1 D - 44	1850.2	GPRS	/	/	/	/	/	/	/
Body-Bottom (10mm)	1880.0	GPRS	1.474	24.98	25.10	1.028	0.322	0.331	/
()	1909.8	GPRS	/	/	/	/	/	/	/

Note:

- 1 .When the 1-g SAR is \leq 0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same antenna while testing SAR.
- 3. According to IEEE 1528-2013, the middle channel is required to be tested first.
- 4. KDB 447498D01- When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.
- 5. The EUT is a Capability Class B mobile phone which can be attached to both GPRS and GSM services.
- 6. The Multi-slot Classes of EUT is Class12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.
- 7. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tole rance limit according to the power applied to the individual channels tested to determine compliance.

Hot Spot-WCDMA 850

EUT	Frequency		Power	Max.	Max. Rated		1g SAR (W/Kg)	
Position	(MHz)	Test Mode	Drift (%)	Meas. Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	826.4	RMC	1	/	/	/	/	/	/
Body-Back (10mm)	836.6	RMC	-0.533	22.26	22.50	1.057	0.200	0.211	8#
(1011111)	846.6	RMC	1	/	/	/	/	/	/
D 1 I C	826.4	RMC	1	/	/	/	/	/	/
Body-Left (10mm)	836.6	RMC	1.315	22.26	22.50	1.057	0.157	0.166	/
(1011111)	846.6	RMC	/	/	/	/	/	/	/
D 1 D "	826.4	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	836.6	RMC	1.583	22.26	22.50	1.057	0.081	0.086	/
(======)	846.6	RMC	1	/	/	/	/	/	/

SAR Evaluation Report 52 of 116

Hot Spot-WCDMA 1700

EUT	Frequency		Power	Max. Meas.	Max. Rated	1g SAR (W/Kg)			
1	(MHz)	Test Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1712.4	RMC	/	/	/	/	/	/	/
Body-Back (10mm)	1732.6	RMC	-1.345	21.16	21.60	1.107	0.273	0.302	9#
(1011111)	1752.6	RMC	/	/	/	/	/	/	/
Dody Laft	1712.4	RMC	/	/	/	/	/	/	/
Body-Left (10mm)	1732.6	RMC	1.520	21.16	21.60	1.107	0.125	0.138	/
(1011111)	1752.6	RMC	/	/	/	/	/	/	/
Dady Dattam	1712.4	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	1732.6	RMC	1.866	21.16	21.60	1.107	0.187	0.207	/
(1011111)	1752.6	RMC	/	/	/	/	/	/	/

Hot Spot-WCDMA 1900

EUT	Frequency Total Mode		Power Max. Meas.		Max. Rated	1g SAR (W/Kg)			
Position (MHz)		Test Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1852.4	RMC	/	/	/	/	/	/	/
Body-Back (10mm)	1880.0	RMC	-2.633	20.93	21.40	1.114	0.632	0.704	10#
(Tollill)	1907.6	RMC	/	/	/	/	/	/	/
D. L. L. G	1852.4	RMC	/	/	/	/	/	/	/
Body-Left (10mm)	1880.0	RMC	-0.609	20.93	21.40	1.114	0.237	0.264	/
(1011111)	1907.6	RMC	/	/	/	/	/	/	/
Dady Dattom	1852.4	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	1880.0	RMC	1.040	20.93	21.40	1.114	0.469	0.523	/
(1011111)	1907.6	RMC	/	/	/	/	/	/	/


Note:

- 1. When the 1-g SAR is ≤ 0.8 W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same antenna while testing SAR.
- 3. According to IEEE 1528-2013, the middle channel is required to be tested first.
- 4. KDB 447498D01- When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 5. The default test configuration is to measure SA R with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (refere nce measurement Channel) Configured in Test Loop Model.
- 6. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tole rance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 53 of 116

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Bluetooth & Wi-Fi and GSM&3G Antennas Location:

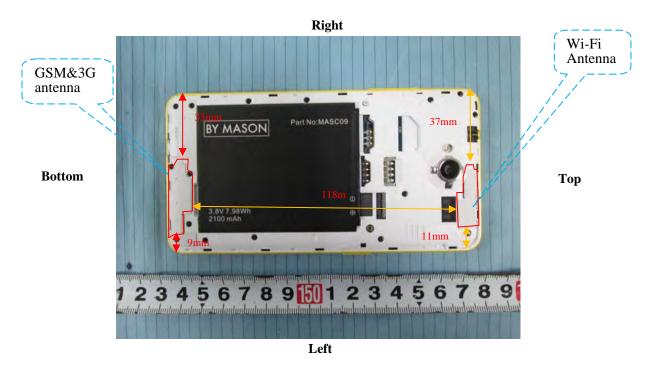

Simultaneous Transmission:

Description of Simultane	Automos Distance (mm)			
Transmitter Combination	Simultaneous?	Hotspot?	Antennas Distance (mm)	
GSM + WCDMA	×	×	0	
GSM + Bluetooth	√	×	118	
GSM + WLAN	√	\checkmark	118	
WCDMA + Bluetooth	√	×	118	
WCDMA + WLAN	√	V	118	

Standalone SAR test exclusion considerations

Mode	Frequency (GHz)	Test Position	P _{avg} (dBm)	P _{avg} (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
Bluetooth	2.48	Head	2.30	1.70	0	0.5	3.0	Yes
Bluetooth	2.48	Body	2.30	1.70	10	0.3	3.0	Yes
Wi-Fi	2.472	Head	9.30	8.51	0	2.7	3.0	Yes
Wi-Fi	2.472	Body	9.30	8.51	10	1.3	3.0	Yes

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

SAR Evaluation Report 54 of 116

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Report No: RSZ151110015-20

Standalone SAR estimation:

Mode	Frequency (GHz)	Distance (mm)	P _{avg} (dBm)	P _{avg} (mW)	Estimated 1-g (W/kg)
Bluetooth Head	2.48	0	2.30	1.70	0.071
Bluetooth Body	2.48	10	2.30	1.70	0.036
Wi-Fi Head	2.472	0	9.30	8.51	0.357
Wi-Fi Body	2.472	10	9.30	8.51	0.178

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance,mm)]·[$\sqrt{f(GHz)/x}$] W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

SAR Evaluation Report 55 of 116

Simultaneous SAR test exclusion considerations:

GSM with BT:

Mada	Do sition	Reported	SAR (W/kg)	ΣSAR
Mode	Position	GSM	BT	< 1.6W/kg
	Left Head Cheek	0.235	0.071	0.306
	Left Head Tile	0.145	0.071	0.216
GSM850	Right Head Cheek	0.212	0.071	0.283
	Right Head Tilt	0.137	0.071	0.208
	Body-Back-Headset	0.190	0.036	0.226
	Left Head Cheek	0.222	0.071	0.293
	Left Head Tile	0.125	0.071	0.196
PCS1900	Right Head Cheek	0.203	0.071	0.274
	Right Head Tilt	0.118	0.071	0.189
	Body-Back-Headset	0.283	0.036	0.319

Report No: RSZ151110015-20

WCDMA with BT:

Mode	Position	Reported	SAR (W/kg)	ΣSAR
Mode	Position	WCDMA	ВТ	< 1.6W/kg
	Left Head Cheek	0.152	0.071	0.223
WCDMA 850	Left Head Tile	0.098	0.071	0.169
WCDMA 850	Right Head Cheek	0.145	0.071	0.216
	Right Head Tilt	0.101	0.071	0.172
	Left Head Cheek	0.158	0.071	0.229
WCDMA	Left Head Tile	0.090	0.071	0.161
1700	Right Head Cheek	0.172	0.071	0.243
	Right Head Tilt	0.094	0.071	0.165
	Left Head Cheek	0.415	0.071	0.486
WCDMA 1900	Left Head Tile	0.206	0.071	0.277
	Right Head Cheek	0.432	0.071	0.503
	Right Head Tilt	0.186	0.071	0.257

GSM with Wi-Fi:

Mode	Position	Reported	SAR (W/kg)	ΣSAR
Mode	Position	GSM	Wi-Fi	< 1.6W/kg
	Left Head Cheek	0.235	0.357	0.592
	Left Head Tile	0.145	0.357	0.502
GSM850	Right Head Cheek	0.212	0.357	0.569
	Right Head Tilt	0.137	0.357	0.494
	Body-Back-Headset	0.190	0.178	0.368
	Left Head Cheek	0.222	0.357	0.579
	Left Head Tile	0.125	0.357	0.482
PCS1900	Right Head Cheek	0.203	0.357	0.560
	Right Head Tilt	0.118	0.357	0.475
	Body-Back-Headset	0.283	0.178	0.461

SAR Evaluation Report 56 of 116

WCDMA with Wi-Fi:

Mode	Position	Reported S	AR (W/kg)	ΣSAR
Mode	Position	WCDMA	Wi-Fi	< 1.6W/kg
	Left Head Cheek	0.152	0.357	0.509
WCDMA 850	Left Head Tile	0.098	0.357	0.455
WCDMA 830	Right Head Cheek	0.145	0.357	0.502
	Right Head Tilt	0.101	0.357	0.458
	Left Head Cheek	0.158	0.357	0.515
WCDMA	Left Head Tile	0.090	0.357	0.447
1700	Right Head Cheek	0.172	0.357	0.529
	Right Head Tilt	0.094	0.357	0.451
	Left Head Cheek	0.415	0.357	0.772
WCDMA	Left Head Tile	0.206	0.357	0.563
1900	Right Head Cheek	0.432	0.357	0.789
	Right Head Tilt	0.186	0.357	0.543

Report No: RSZ151110015-20

Conclusion:

 $\Sigma SAR < 1.6 \text{ W/kg}$ therefore simultaneous transmission SAR with Volume Scans is **not** required.

]	Evaluations for Si	multaneous SAR	R, Bluetooth and G	SM&3G	
Test Position	Body-Back (1.0cm)	Body-Left (1.0cm)	Body-Right (1.0cm)	Body-Bottom (1.0cm)	Body-Top (1.0cm)
Mode		Stand	l Alone 1-g SAR (W	V/Kg)	
GPRS 850	0.299	0.299 0.178		0.090	/
GPRS 1900	0.458	0.172	/	0.331	/
WCDMA 850	0.211	0.166	/	0.086	/
WCDMA 1700	0.302	0.138	/	0.207	/
WCDMA 1900	0.704	0.264	/	0.523	/
BT	0.036	0.036	0.036	0.036	0.036
			$\sum 1$ -g SAR(W/Kg)		
GPRS850 + BT	0.335	0.214	/	0.126	/
GPRS1900 + BT	0.494	0.208	/	0.367	/
WCDMA 850 + BT	0.247	0.202	/	0.122	/
WCDMA 1700 + BT	0.338	0.174	/	0.243	/
WCDMA 1900 + BT	0.740	0.300	/	0.559	/

SAR Evaluation Report 57 of 116

Hotspot:

F	Evaluations for Si	nultaneous SAR	, Mobile Hot Spot	Positions	
Test Position	Body-Back (1.0cm)	Body-Left (1.0cm)	Body-Right (1.0cm)	Body-Bottom (1.0cm)	Body-Top (1.0cm)
Mode		Stand	l Alone 1-g SAR (W	V/Kg)	
GPRS 850	0.299	0.178	/	0.090	/
GPRS 1900	0.458	0.172	/	0.331	/
WCDMA 850	0.211	0.166	/	0.086	/
WCDMA 1700	0.302	0.138	/	0.207	/
WCDMA 1900	0.704	0.264	/	0.523	/
Wi-Fi	0.178	0.178	0.178	0.178	0.178
			$\sum 1$ -g SAR(W/Kg)		
GPRS850 + Wi-Fi	0.477	0.356	/	0.268	/
GPRS1900 + Wi-Fi	0.636	0.350	/	0.509	/
WCDMA 850 + Wi-Fi	0.389	0.344	/	0.264	/
WCDMA 1700 + Wi-Fi	0.480	0.316	/	0.385	/
WCDMA 1900 + Wi-Fi	0.882	0.442	/	0.701	/

Note:

If the sum of the 1g SAR measured for the simultaneously transmitting antennas is less than the SAR limit, SAR measurement for simultaneous transmission is not required.

SAR Evaluation Report 58 of 116

SAR Plots (Summary of the Highest SAR Values)

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek (836.6 MHz Middle Channel)

Measurement Data

Test mode : GSM
Crest Factor : 8
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.031 W/kg Power Drift-Finish : 0.031 W/kg Power Drift (%) : -1.639

Tissue Data

 Type
 : Head

 Frequency
 : 836.6 MHz

 Epsilon
 : 41.79 F/m

 Sigma
 : 0.92 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 835 Duty Cycle Factor : 8 Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)^2$

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.233 W/kg 10 gram SAR value : 0.180 W/kg Area Scan Peak SAR : 0.251 W/kg Zoom Scan Peak SAR : 0.362 W/kg

Plot 1#

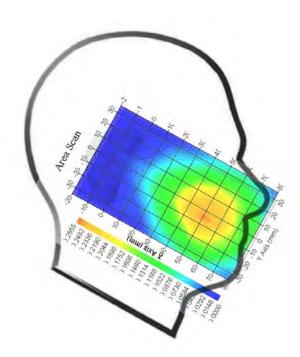

SAR Evaluation Report 59 of 116

Left Head Cheek(1880 MHz Middle Channel)

Measurement Data

Test mode : GSM
Crest Factor : 8
Scan Type : Complete

Area Scan : 11x8x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.003 W/kg Power Drift-Finish : 0.003 W/kg Power Drift (%) : 2.215

Tissue Data

 Type
 : Head

 Frequency
 : 1880 MHz

 Epsilon
 : 40.14 F/m

 Sigma
 : 1.42 S/m

 Density
 : 1000.00 kg/cu. M

Probe Data


Serial No. : 500-00283 Frequency Band : 1900 Duty Cycle Factor : 8 Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.217 W/kg 10 gram SAR value : 0.133 W/kg Area Scan Peak SAR : 0.238 W/kg Zoom Scan Peak SAR : 0.386 W/kg

Plot 2#

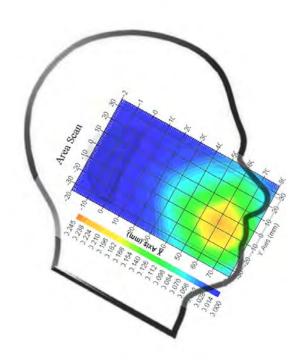

SAR Evaluation Report 60 of 116

WCDMA 850; Left Head Cheek (836.6 MHz Middle Channel)

Measurement Data

Test mode : RMC
Crest Factor : 1
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.021 W/kg Power Drift-Finish : 0.021 W/kg Power Drift (%) : -1.817

Tissue Data

 Type
 : Head

 Frequency
 : 836.6 MHz

 Epsilon
 : 41.79 F/m

 Sigma
 : 0.92 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 835 Duty Cycle Factor : 1 Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.144 W/kg 10 gram SAR value : 0.112 W/kg Area Scan Peak SAR : 0.156 W/kg Zoom Scan Peak SAR : 0.243 W/kg

Plot 3#

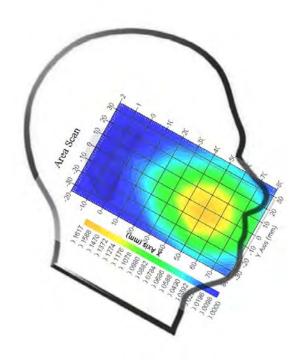

SAR Evaluation Report 61 of 116

WCDMA 1700; Right Head Cheek (1732.6 MHz Middle Channel)

Measurement Data

Test mode : RMC
Crest Factor : 1
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.002 W/kg Power Drift-Finish : 0.002 W/kg Power Drift (%) : 1.311

Tissue Data

 Type
 : Head

 Frequency
 : 1732.6 MHz

 Epsilon
 : 40.29 F/m

 Sigma
 : 1.39 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 1750
Duty Cycle Factor : 1
Conversion Factor : 5.4

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm


 1 gram SAR value
 : 0.155 W/kg

 10 gram SAR value
 : 0.088 W/kg

 Area Scan Peak SAR
 : 0.172 W/kg

 Zoom Scan Peak SAR
 : 0.266 W/kg

Plot 4#

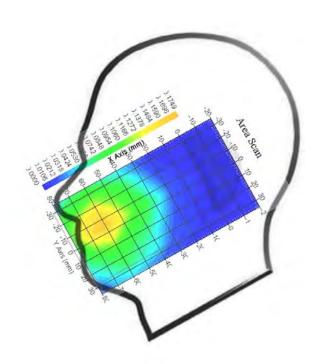

SAR Evaluation Report 62 of 116

WCDMA 1900; Right Head Cheek (1880 MHz Middle Channel)

Measurement Data

Test mode : RMC
Crest Factor : 1
Scan Type : Complete

Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.023 W/kg Power Drift-Finish : 0.023 W/kg Power Drift (%) : -2.227

Tissue Data

 Type
 : Head

 Frequency
 : 1880 MHz

 Epsilon
 : 40.14 F/m

 Sigma
 : 1.42 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283 Frequency Band : 1900 Duty Cycle Factor : 1 Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm


 1 gram SAR value
 : 0.388 W/kg

 10 gram SAR value
 : 0.215 W/kg

 Area Scan Peak SAR
 : 0.410 W/kg

 Zoom Scan Peak SAR
 : 0.637 W/kg

Plot 5#

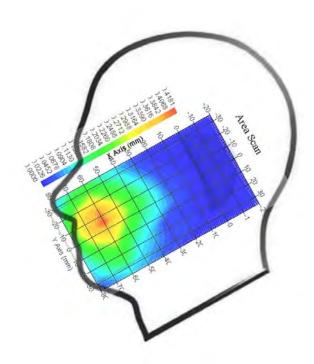

SAR Evaluation Report 63 of 116

GSM 850; Body-worn- Back (836.6 MHz Middle Channel)

Measurement Data

Test mode : GPRS
Crest Factor : 4
Scan Type : : Complete

Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.287 W/kg Power Drift-Finish : 0.282 W/kg Power Drift (%) : -1.737

Tissue Data

 Type
 : Body

 Frequency
 : 836.6 MHz

 Epsilon
 : 55.48 F/m

 Sigma
 : 0.99 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283
Frequency Band : 835
Duty Cycle Factor : 4
Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.295 W/kg 10 gram SAR value : 0.243 W/kg Area Scan Peak SAR : 0.311 W/kg Zoom Scan Peak SAR : 0.476 W/kg

Plot 6#

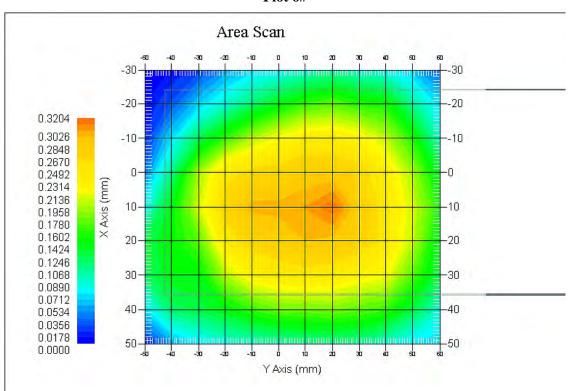

SAR Evaluation Report 64 of 116

PCS 1900; Body-worn- Back (1880 MHz Middle Channel)

Measurement Data

Test mode : GPRS
Crest Factor : 2
Scan Type : Complete

Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.162 W/kg Power Drift-Finish : 0.165 W/kg Power Drift (%) : 1.820

Tissue Data

 Type
 : Body

 Frequency
 : 18880 MHz

 Epsilon
 : 53.56 F/m

 Sigma
 : 1.54 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 1900 Duty Cycle Factor : 2 Conversion Factor : 4.5

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.446 W/kg 10 gram SAR value : 0.227 W/kg Area Scan Peak SAR : 0.485 W/kg Zoom Scan Peak SAR : 0.776 W/kg

Plot 7#

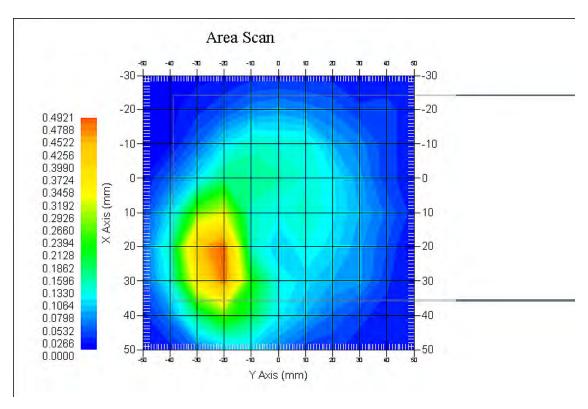

SAR Evaluation Report 65 of 116

WCDMA 850; Body-Worn- Back (836.6 MHz Middle Channel)

Measurement Data

Test mode : RMC
Crest Factor : 1
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.187 W/kg Power Drift-Finish : 0.186 W/kg Power Drift (%) : -0.533

Tissue Data

 Type
 : Body

 Frequency
 : 836.6 MHz

 Epsilon
 : 55.48 F/m

 Sigma
 : 0.99 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 835
Duty Cycle Factor : 1
Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm


 1 gram SAR value
 : 0.200 W/kg

 10 gram SAR value
 : 0.176 W/kg

 Area Scan Peak SAR
 : 0.205 W/kg

 Zoom Scan Peak SAR
 : 0.286 W/kg

Plot 8#

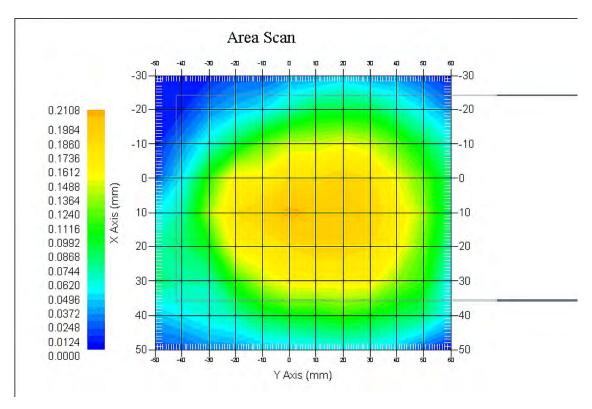

SAR Evaluation Report 66 of 116

WCDMA 1700; Body-Worn-Back (1732.6 MHz Middle Channel)

Measurement Data

Test mode : RMC
Crest Factor : 1
Scan Type : Complete

Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.223 W/kg Power Drift-Finish : 0.220 W/kg Power Drift (%) : -1.345

Tissue Data

 Type
 : Body

 Frequency
 : 1732.6 MHz

 Epsilon
 : 53.80 F/m

 Sigma
 : 1.50 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 1900 Duty Cycle Factor : 1 Conversion Factor : 5.3

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.273 W/kg 10 gram SAR value : 0.144 W/kg Area Scan Peak SAR : 0.303 W/kg Zoom Scan Peak SAR : 0.516 W/kg

Plot 9#

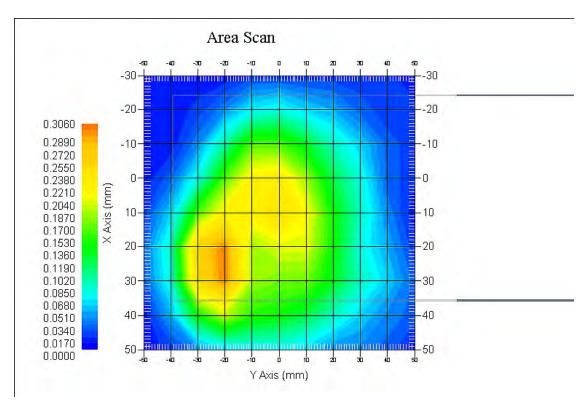

SAR Evaluation Report 67 of 116

WCDMA 1900; Body-Worn- Back (1880 MHz Middle Channel)

Measurement Data

Test mode : RMC
Crest Factor : 1
Scan Type : Complete

Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.225 W/kg Power Drift-Finish : 0.231 W/kg Power Drift (%) : -2.633

Tissue Data

 Type
 : Body

 Frequency
 : 1880 MHz

 Epsilon
 : 53.56 F/m

 Sigma
 : 1.54 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 1900 Duty Cycle Factor : 1 Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.632 W/kg 10 gram SAR value : 0.357 W/kg Area Scan Peak SAR : 0.659 W/kg Zoom Scan Peak SAR : 1.056 W/kg

Plot 10#

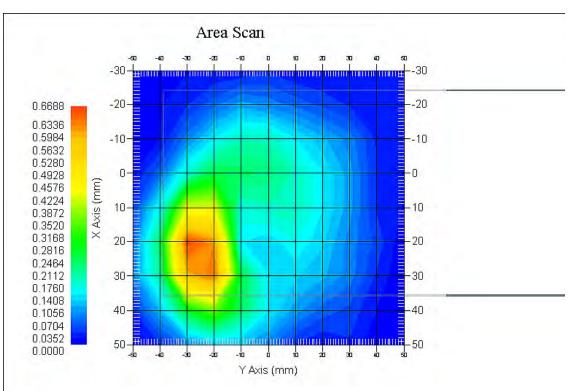

SAR Evaluation Report 68 of 116

APPENDIX A MEASUREMENT UNCERTAINTY

According to **IEEE1528:2013**, the uncertainty budget has been determined for the Head SAR measurement system and is given in the following Table.

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c _i ¹ (1-g)	c _i ¹ (10-g)	Standard Uncertain ty (1-g) %	Standard Uncertaint y (10-g) %				
Measurement System											
Probe Calibration	3.5	normal	1	1	1	3.5	3.5				
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5				
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	√ср	√ср	4.4	4.4				
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6				
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7				
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6				
Readout Electronics	1.0	normal	1	1	1	1.0	1.0				
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5				
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0				
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3				
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7				
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2				
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7				
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1				
	_	Test sar	nple relat	ed		_	_				
Test sample positioning	2.0	normal	1	1	1	2.0	2.0				
Device Holder Uncertainty	4.0	normal	1	1	1	6.215	6.215				
Drift of Output Power	5.0	rectangular	$\sqrt{3}$	1	1	2.67	2.67				
		Phanto	m and Set	up							
Phantom Uncertainty	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0				
SAR correction in permittivity and conductivity	1.2	normal	1	1	0.85	1.2	1.0				
Liquid conductivity measurement	5.0	normal	1	0.78	0.71	3.9	3.6				
Liquid permittivity measurement	5.0	normal	1	0.25	0.29	1.3	1.5				
conductivity—temperat ure	1.1	rectangular	$\sqrt{3}$	0.78	0.71	0.5	0.5				
permittivity—temperatu re	1.3	rectangular	$\sqrt{3}$	0.23	0.23	0.2	0.2				
Combined Uncertainty		RSS				10.78	10.55				
Expanded uncertainty (coverage factor=2)		Normal(k=2)				21.56	21.10				

SAR Evaluation Report 69 of 116

According to **IEC62209-2:2010**, the uncertainty budget has been determined for the Body SAR measurement system and is given in the following Table.

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c _i ¹ (1-g)	c _i ¹ (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	1	1	1.5	1.5
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1
Test sample related							
Test sample positioning	2.0	normal	1	1	1	2.0	2.0
Device Holder Uncertainty	4.0	normal	1	1	1	6.215	6.215
Drift of Output Power	5.0	rectangular	$\sqrt{3}$	1	1	2.67	2.67
Phantom and Setup							
Phantom Uncertainty	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
SAR correction in permittivity and conductivity	1.2	normal	1	1	0.84	1.2	1.0
Liquid conductivity measurement	5.0	normal	1	0.78	0.71	3.9	3.6
Liquid permittivity measurement	5.0	normal	1	0.23	0.26	1.3	1.5
conductivity—temperat ure	1.1	rectangular	$\sqrt{3}$	0.78	0.71	0.5	0.5
permittivity—temperatu re	1.3	rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.2
Combined Uncertainty		RSS				9.58	9.49
Expanded uncertainty (coverage factor=2)		Normal(k=2)				19.16	18.98

SAR Evaluation Report 70 of 116

APPENDIX B – PROBE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No.: PC-1598

Task No: BACL-5778

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe
Record of Calibration
Head and Body
Manufacturer: APREL Laboratories
Model No.: E-020
Serial No.: 500-00283

Calibration Procedure: D01-032-E020-V2, D22-012-Tissue, D28-002-Dipole

Project No: BACL-5745

Calibrated: 14th October 2014 Released on: 14th October 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

neleased by.

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr, OTTAWA, ONTARIO CANADA K2K 3J1 Division of APREL Lab, TEL: (613) 435-8300 FAX: (613) 435-8306

SAR Evaluation Report 71 of 116

NCL Calibration Laboratories

Division of APREL Inc.

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the references listed below. Calibration is performed using accepted methodologies as per the references listed below. Probes are calibrated for air, and tissue and the values reported are the results from the physical quantification of the probe through meteorgical practices.

Calibration Method

Probes are calibrated using the following methods.

<800 MHz

TEM Cell for sensitivity in air

Standard phantom using temperature transfer method for sensitivity in tissue

>800 MHz

Waveguide* method to determine sensitivity in air and tissue

"Waveguide is numerically (simulation) assessed to determine the field distribution and power

The boundary effect for the probe is assessed using a standard flat phantom where the probe output is compared against a numerically simulated series of data points

References

- o IEEE Standard 1528:2013
 - IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- o EN 62209-1:2006
 - Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices Human models, instrumentation, and procedures Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- o IEC 62209-2:2010
 - Human exposure to RF fields from hand-held and body-mounted wireless devices Human models, instrumentation, and procedures Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz 6 GHz)
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Page 2 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 72 of 116

Division of APREL Inc.

Conditions

Probe 500-00283 was a recalibration.

Ambient Temperature of the Laboratory: $22 \,^{\circ}\text{C}$ +/- $1.5 \,^{\circ}\text{C}$ Temperature of the Tissue: $21 \,^{\circ}\text{C}$ +/- $1.5 \,^{\circ}\text{C}$ Relative Humidity: $< 60 \,^{\circ}$

Primary Measurement Standards

 Instrument
 Serial Number
 Cal due date

 Tektronix USB Power Meter
 11C940
 May 14, 2015

 Signal Generator HP 83640B
 3844A00689
 Feb 12, 2015

Secondary Measurement Standards

Network Analyzer Anritsu 37347C 002106 Feb. 20, 2015

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Dan Brooks, Test Engineer

Page 3 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 73 of 116

Division of APREL Inc.

Probe Summary

E-Field Probe E020 Probe Type:

Serial Number: 500-00283

Frequency: As presented on page 5

Sensor Offset: 1.56 Sensor Length: 2.5

Tip Enclosure: Composite* Tip Diameter: < 2.9 mm Tip Length: 55 mm

*Resistive to recommended tissue recipes per IEEE-1528

Sensitivity in Air

Total Length:

Channel X: Channel Y: 1.2 μV/(V/m)² 1.2 μV/(V/m)² 1.2 μV/(V/m)² Channel Z:

289 mm

Diode Compression Point: 95 mV

SAR Evaluation Report 74 of 116

Page 4 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

Division of APREL Inc.

Calibration for Tissue (Head H. Body B)

Frequency	Tissue Type	Measured Epsilon	Measured Sigma	Standard Uncertainty (%)	Calibration Frequency Range (MHz)	Conversion Factor
450 H	Head	43.59	0.86	3.5	±50	5.7
450 B	Body	56.74	0.94	3.5	±50	5.8
750 H	Head	42.98	0.92	3.5	±50	6.0
750 B	Body	43.05	0.93	3.5	±50	5.5
835 H	Head	43.42	0.94	3.5	±50	5.9
835 B	Body	55.77	1.01	3.5	±50	5.9
900 H	Head	41.87	1.06	3.5	±50	6.0
900 B	Body	55.62	1.05	3.5	±50	5.9
1450 H	Head	X	X	X	X	X
1450 B	Body	X	X	Х	X	Χ
1500 H	Head	Х	X	X	X	X
1500 B	Body	X	X	X	X	Х
1640 H	Head	X	X	X	X	X
1640 B	Body	X	X	X	X	X
1750 H	Head	38.23	1.38	3.5	±75	5.4
1750 B	Body	52.86	1.54	3.5	±75	5.3
1800 H	Head	X	X	X	X	X
1800 B	Body	X	X	X	X	X
1900 H	Head	40.20	1.38	3.5	±75	4.8
1900 B	Body	52.63	1.46	3.5	±75	4.5
2000 H	Head	X	X	X	X	X
2000 B	Body	X	X	X	X	X
2100 H	Head	X	X	X	X	X
2100 B	Body	X	X	X	X	X
2300 H	Head	X	X	X	X	X
2300 B	Body	X	X	X	X	X
2450 H	Head	37.26	1.84	3.5	±75	4.9
2450B	Body	53.61	1.9	3.5	±75	4.3
3000 H	Head	X	X	X	X	X
3000 B	Body	X	X	X	X	X
3600 H	Head	37.49	3.16	3.5	±100	4.5
3600 B	Body	49.94	3.86	3.5	±100	4.0
5250 H	Head	35.51	4.78	3.5	±100	3.0
5250 B	Body	47.54	5.11	3.5	±100	2.8
5600 H	Head	36.05	5.15	3.5	±100	2.8
5600 B	Body	46.49	5.72	3.5	±100	2.2
5800 H	Head	45.99	6.01	3.5	±100	3.2
5800 B	Body	35.6	5.37	3.5	±100	2.5

Page 5 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 75 of 116

Division of APREL Inc.

Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2.1% for the distance between the tip of the probe and the tissue boundary, when less than 0.58mm.

Spatial Resolution:

The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe.

DAQ-PAQ Contribution

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 M Ω .

Probe Calibration Uncertainty


Uncertainty component	Tolerance (±%)	Probability distribution	Divisor	Standard uncertainty (± %)
Incident or forward power	2.5	R	√3	1.44
Reflected power	2	R	√3	1.15
Liquid conductivity measurement	1	R	V 3	0.58
Liquid permittivity measurement	1	R	√3	0.58
Liquid conductivity deviation	1.5	R	√3	0.87
Liquid permittivity deviation	1.5	R	√3	0.87
Frequency deviation	2.25	R	√3	1.30
Field homogeneity	2.5	R	√3	1.44
Field-probe positioning	2.5	R	V3	1.44
Field-probe linearity	1.55	R	V3	0.89
Combined standard uncertainty		RSS		3.50

SAR Evaluation Report 76 of 116

Page 6 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

Division of APREL Inc.

Receiving Pattern Air

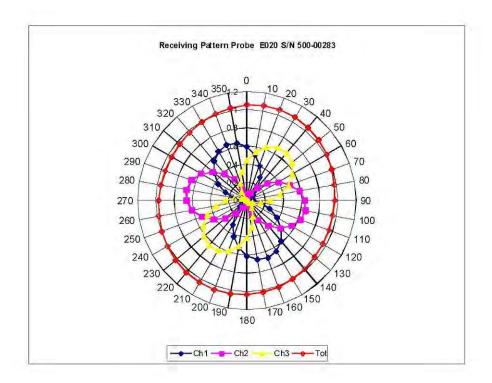



Page 7 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 77 of 116

Division of APREL Inc.

Isotropy Error Air

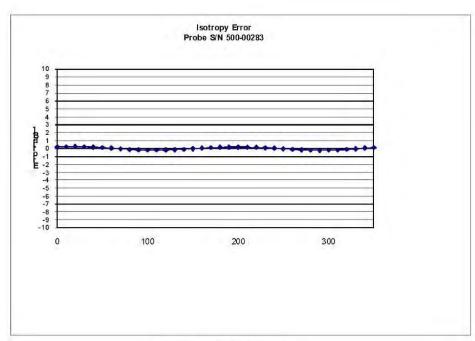

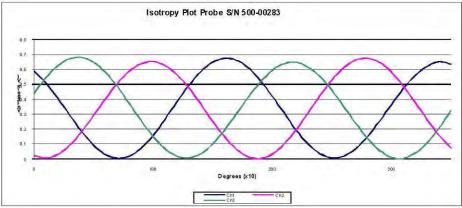

Isotropicity Tissue:


0.10 dB

Page 8 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 78 of 116

Division of APREL Inc.

Dynamic Range

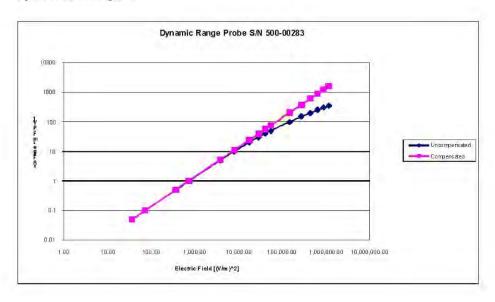


Page 9 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 79 of 116

Division of APREL Inc.

Video Bandwidth

Probe Frequency Characteristics

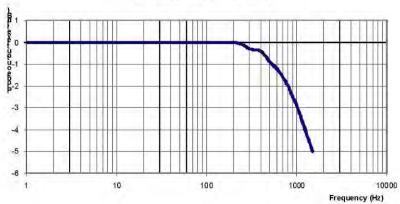

Video Bandwidth at 500 Hz 1 dB Video Bandwidth at 1.02 KHz: 3 dB

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2014.

Page 10 of 10 This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 80 of 116

APPENDIX C DIPOLE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1599 Project Number: BAC-dipole-cal-5779

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole(Head and Body)

Manufacturer: APREL Laboratories Part number: ALS-D-835-S-2 Frequency: 835 MHz Serial No: 180-00558

Customer: Bay Area Compliance Laboratory (China)

Calibrated: 8th October 2014 Released on: 8th October 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

ite 102, 303 Terry Fox Dr. Kanata, ONTARIO CANADA K2K 3J1 Division of APREL Lab. TEL: (613) 435-8300 FAX: (613)435-8306

SAR Evaluation Report 81 of 116

Division of APREL Laboratories.

Conditions

Dipole 180-00558 was received with a damaged connection for a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5 °C Temperature of the Tissue: 21 °C +/- 0.5 °C 21 °C +/- 0.5 °C

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Maryna Nesterova Calibration Engineer

Primary Measurement Standards

 Instrument
 Serial Number
 Cal due date

 Tektronix USB Power Meter
 11C940
 May 14, 2015

 Network Analyzer Anritsu 37347C
 002106
 Feb. 20, 2015

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 82 of 116

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 162.2 mm **Height:** 89.4 mm

Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	835 MHz	1.066 U	-30.344 dB	49.001 Ω
Body	835 MHz	1.089 U	-28.118 dB	53.117 Ω

System Validation Results

I	Tissue	Frequency	1 Gram	10 Gram	Peak
	Head	835 MHz	9.773	6.174	14.713
ıſ	Body	835 MHz	9.736	6.297	14.513



This page has been reviewed for content and attested to by signature within this document.

3

SAR Evaluation Report

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 180-00558. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 225.

References

- SSI-TP-018-ALSAS Dipole Calibration Procedure
- SSI-TP-016 Tissue Calibration Procedure
- IEEE 1528;2013 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques"
- IEC-62209-1:2006 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
 Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"
- IEC-62209-2:2010 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
 Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- D28-002 Procedure for validation of SAR system using a dipole

Conditions

Dipole 180-00558 was repaired prior to this calibration. The repair reliability depends upon correct usage of the dipole.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 20 °C +/- 0.5°C

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical1%Positioning Error1.22%Electrical1.7%Tissue2.2%Dipole Validation2.2%

TOTAL 8.32% (16.64% K=2)

4

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 84 of 116

NCL Calibration Laboratories Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL	APREL	Measured	Measured
Length	Height	Length	Height
161.0 mm	89.8 mm	162.2 mm	89.4 mm

Electrical Verification

Tissue Type	Return Loss:	SWR:	Impedance:
Head	-30.344 dB	1.066 U	49.001Ω
Body	-28.118 dB	1.089 U	53.117 Ω 🗆

Tissue Validation

	Dielectric constant, 6r	Conductivity, & [S/m]
Head Tissue 835MHz	43.42	0.94
Body Tissue 835MHz	55.77	1.01


This page has been reviewed for content and attested to by signature within this document.

Division of APREL Laboratories.


The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

Head Tissue: Frequency Range 0.817 to 0.848 GHz



Body Tissue: Frequency Range 0.823 to 0.851 GHz




This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 86 of 116


6

Division of APREL Laboratories.

SWR




Body




This page has been reviewed for content and attested to by signature within this document.

Division of APREL Laboratories.

Smith Chart Dipole Impedance



Body



This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 88 of 116

8

Division of APREL Laboratories.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List 2014.

9

Report No: RSZ151110015-20

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 89 of 116

Report No: RSZ151110015-20

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1531 Project Number: BACL-5745

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

BACL Head & Body Validation Dipole

Manufacturer: APREL Laboratories
Part number: ALS-D-1750-S-2
Frequency: 1750 MHz
Serial No: 198-00304

Customer: ISL

Calibrated: 8th October, 2013 Released on: 8th October, 2013

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr. OTTAWA, ONTARIO CANADA K2K 3J1 Division of APREL Lab. TEL. (613) 435-8300 FAX: (613) 435-8306

SAR Evaluation Report 90 of 116

Division of APREL Laboratories.

Conditions

Dipole 198-00304 was an original calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Constantin Teodorian, Test Engineer

2

This page has been reviewed for content and attested to by signature within this document.

3

NCL Calibration Laboratories

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions

Length: 75 mm Height: 42 mm


Electrical Calibration


Test	Result Head	Result Body
S11 R/L	-25.567	-20.548 dB
SWR	1.111U	1.207 U
Impedance	53.637Ω	55.929 Ω

System Validation Results, 1750 MHz

	1g	10g
Head	37.02	18.99
Body	36.65	18.85

Туре	Epsilon	Sigma
Head	38.51	1.36
Body	51.79	1.53





This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 92 of 116

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-030 130 MHz to 26 GHz E-Field Probe Serial Number 215.

References

SSI-TP-018-ALSAS Dipole Calibration Procedure

SSI-TP-016 Tissue Calibration Procedure

IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"

Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)" IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices — Human models, instrumentation, and procedures"

Part 2 Draft: "Procedure to determine the Specific Absorption Rate (SAR) for handheld devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"

Conditions

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 20 °C +/- 0.5°C

This was an original calibration taken from stock.

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical1%Positioning Error1.22%Electrical1.7%Tissue2.2%Dipole Validation2.2%

TOTAL 8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

4

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

Measured	Measured
Length	Height
75 mm	42 mm

Tissue Validation

Frequency	Permittivity &	Conductivity o
1750 Head	38.23	1.38
1750 Body	52.86	1.54

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 94 of 116

Division of APREL Laboratories.

Electrical Calibration

Test	Result Head	Result Body	
S11 R/L	-25.567	-20.548 dB	
SWR	1.111U	1.207 U	
Impedance	53.637Ω	55.929 Ω	

The Following Graphs are the results as displayed on the Vector Network Analyzer. **S11 Parameter Return Loss**

Head



Body



This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 95 of 116

6

Division of APREL Laboratories.

SWR

Head



Body






This page has been reviewed for content and attested to by signature within this document.

Division of APREL Laboratories.

Smith Chart Dipole Impedance

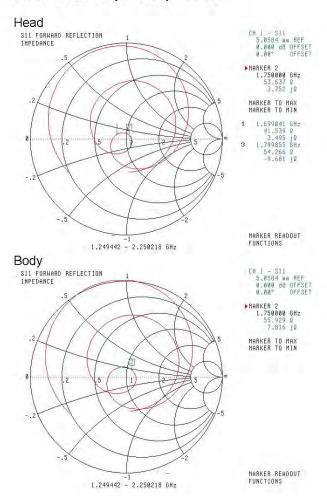

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 97 of 116

8

Division of APREL Laboratories.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2013

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 98 of 116

7

Report No: RSZ151110015-20

Report No: RSZ151110015-20

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1601 Project Number: BAC-dipole –cal-5779

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole (Head & Body)

Manufacturer: APREL Laboratories
Part number: ALS-D-1900-S-2
Frequency: 1900 MHz
Serial No: 210-00710

Customer: Bay Area Compliance Laboratory (China)

Calibrated: 9th October, 2014 Released on: 9th October, 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

uite 102, 303 Terry Fox Dr. Kanata, ONTARIO CANADA K2K 3J1 Division of APREL Lab. TEL: (613) 435-8300 FAX: (613)435-8306

SAR Evaluation Report 99 of 116

Division of APREL Laboratories.

Conditions

Dipole 210-00710 was received in good condition and was a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 21 °C +/- 0.5°C

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Maryna Nesterova Calibration Engineer

Primary Measurement Standards

 Instrument
 Serial Number
 Cal due date

 Tektronix USB Power Meter
 11C940
 May 14, 2015

 Network Analyzer Anritsu 37347C
 002106
 Feb. 20, 2015

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 100 of 116

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 67.1 mm **Height:** 38.9 mm

Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	1900MHz	1.084 U	-27.92 dB	52.247 Ω
Body	1900MHz	1.128 U	-24.40 dB	52.618 Ω

System Validation Results

Tissue	Frequency	1 Gram	10 Gram	Peak
Head	1900 MHz	39.481	20.44	73.364
Body	1900 MHz	39.715	20.552	73.565

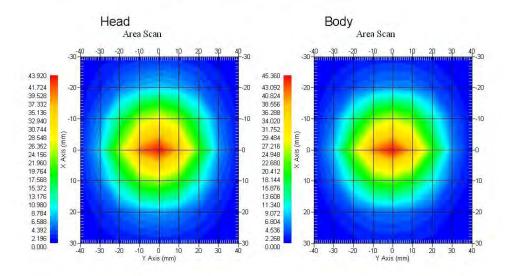

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 101 of 116

3

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 210-00710. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 225.

References

- SSI-TP-018-ALSAS Dipole Calibration Procedure
- SSI-TP-016 Tissue Calibration Procedure
- IEEE 1528:2013 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques"
- IEC-62209-1:2006 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
 Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"
- IEC-62209-2:2010 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
 Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- D28-002 Procedure for validation of SAR system using a dipole

Conditions

Dipole 210-00710 was a recalibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 20 °C +/- 0.5°C

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical1%Positioning Error1.22%Electrical1.7%Tissue2.2%Dipole Validation2.2%

TOTAL 8.32% (16.64% K=2)

4

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 102 of 116

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL	APREL	Measured	Measured
Length	Height	Length	Height
68.0 mm	39.5 mm	67.1mm	38.9 mm

Electrical Validation

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	1900MHz	1.084 U	-27.92 dB	52.247 Ω
Body	1900MHz	1.128 U	-24.40 dB	52.618 Ω

Tissue Validation

	Dielectric constant, Er	Conductivity, o [S/m]
Head Tissue 1900MHz	40.20	1.38
Body Tissue 1900MHz	52.63	1.46

5


This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 103 of 116


Division of APREL Laboratories.

The Following Graphs are the results as displayed on the Vector Network Analyzer.





Body: Frequency Range 1.869 to 1.931 MHz




This page has been reviewed for content and attested to by signature within this document.


104 of 116 **SAR** Evaluation Report

6

Division of APREL Laboratories.

SWR






This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 105 of 116


7

Division of APREL Laboratories.

Smith Chart Dipole Impedance



Body



This page has been reviewed for content and attested to by signature within this document.

8

SAR Evaluation Report 106 of 116

Division of APREL Laboratories.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List 2014


9

Report No: RSZ151110015-20

This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 107 of 116

APPENDIX D EUT TEST POSITION PHOTOS






Left Head Touch Setup Photo

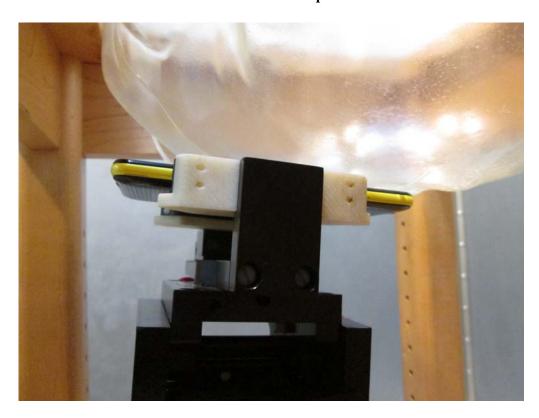


SAR Evaluation Report 108 of 116

Left Head Tilt Setup Photo

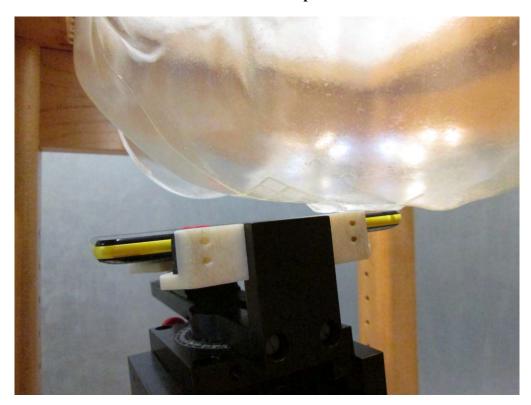


Right Head Touch Setup Photo

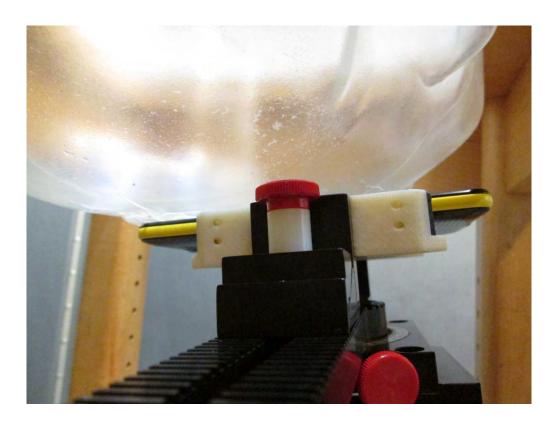


SAR Evaluation Report 109 of 116

Right Head Tilt Setup Photo

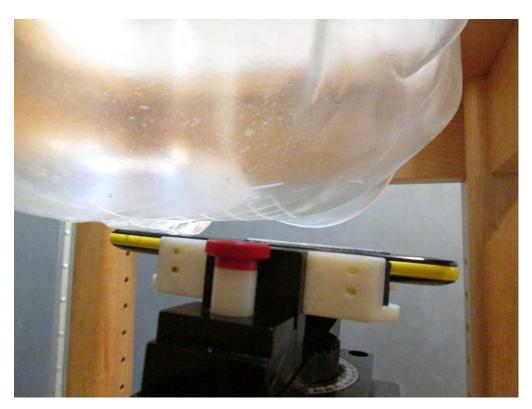

Body-worn Back Setup Photo

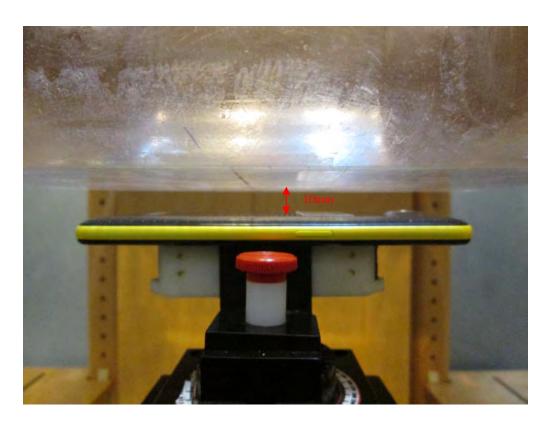


SAR Evaluation Report 110 of 116

Body-worn Left Setup Photo



Body-worn Bottom Setup Photo

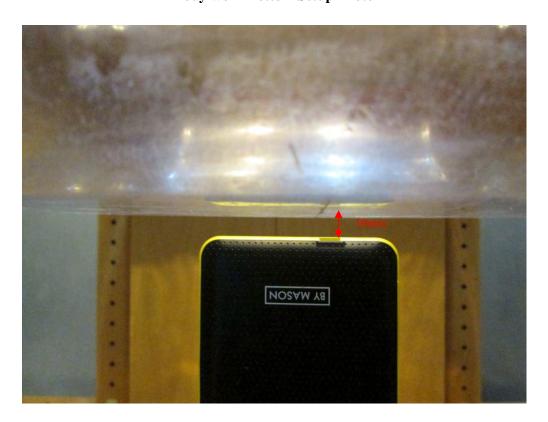

SAR Evaluation Report 111 of 116

APPENDIX E EUT PHOTOS

EUT - Front View



EUT – Back View



SAR Evaluation Report 112 of 116

EUT – Left Side View



EUT – Right Side View



SAR Evaluation Report 113 of 116

EUT – Top View



EUT – Bottom View



SAR Evaluation Report 114 of 116



SAR Evaluation Report 115 of 116

APPENDIX F INFORMATIVE REFERENCES

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, O_ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-_eld scanning system for dosimetricPage 116 of 116 assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph K.astle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15{17, 1997, pp. 120-24.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172-175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The depen-dence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865-1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10.

***** END OF REPORT *****

SAR Evaluation Report 116 of 116