
FCC Test Report

Report No.: AGC03432160201FE03

FCC ID : 2ADMO-CBT612A
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Wireless 3D Speaker
BRAND NAME : THEATRE BOX
MODEL NAME : CBT612
CLIENT : Shenzhen AceMile Electronics Co., Ltd.
DATE OF ISSUE : Apr.06, 2016
STANDARD(S) TEST PROCEDURE(S) : FCC Part 15 Rules
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr.06, 2016	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION.....	5
2.2. TABLE OF CARRIER FREQUENCYS.....	5
3. MEASUREMENT UNCERTAINTY.....	7
4. DESCRIPTION OF TEST MODES.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	9
7. ALL TEST EQUIPMENT LIST	9
8. RADIATED EMISSION	11
8.1 TEST LIMIT.....	11
8.2. MEASUREMENT PROCEDURE	12
8.3. TEST SETUP	14
8.4. TEST RESULT	16
9. BAND EDGE EMISSION	42
9.1. MEASUREMENT PROCEDURE	42
9.2 TEST SETUP	42
9.3 RADIATED TEST RESULT	43
10. 20DB BANDWIDTH	51
10.1. MEASUREMENT PROCEDURE	51
10.2. TEST SET-UP	51
10.3. LIMITS AND MEASUREMENT RESULTS.....	51
11. FCC LINE CONDUCTED EMISSION TEST	60
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	60
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....	60
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	61
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....	61
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST.....	62
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	66
APPENDIX B: PHOTOGRAPHS OF EUT	67

1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen AceMile Electronics Co., Ltd.
Address	Room1207Overseas Chinese Scholars VentureBuilding,No.29, Gaoxin Nanhuan Road,High Tech Park, Nanshan,Shenzhen,Guangdong 518057,China
Manufacturer	Shenzhen AceMile Electronics Co., Ltd.
Address	Room1207Overseas Chinese Scholars VentureBuilding,No.29, Gaoxin Nanhuan Road,High Tech Park, Nanshan,Shenzhen,Guangdong 518057,China
Product Designation	Wireless 3D Speaker
Brand Name	THEATRE BOX
Test Model	CBT612
Date of test	Mar.17, 2016 to Mar.21, 2016
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Tested By



Time Huang(Huang Nanhui)

Apr.06, 2016

Reviewed By



Forrest Lei(Lei Yonggang)

Apr.06, 2016

Approved By



Solger Zhang(Zhang Hongyi)

Authorized Officer

Apr.06, 2016

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	1.43dBm(Max)
Bluetooth Version	V4.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79 for BR/EDR, 40 for BLE
Hardware Version	V0.6
Software Version	V1.0
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Antenna Gain	2.12dBi
Power Supply	Input:AC100-240V, 50-60Hz,1.2A Output:DC15V, 3A

Note: The EUT may include different colors.

The EUT supports NFC Function, But the NFC tag is passive.

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	BT Link


Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

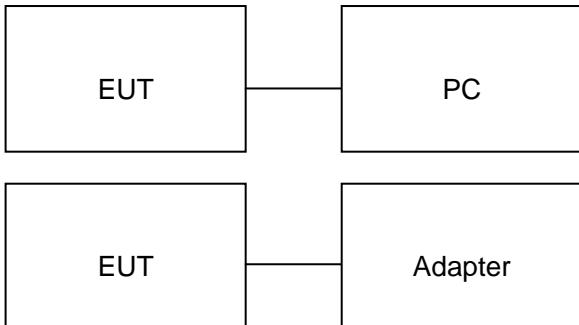

Configure 2: (Control continuous TX)

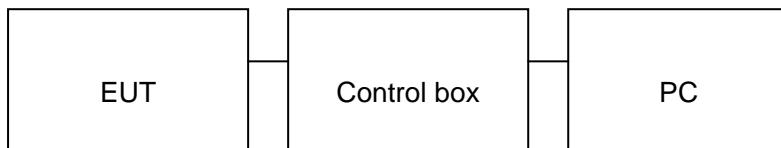

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless 3D Speaker	CBT612	2ADMO-CBT612A	EUT
2	PC	Dell	A1465	A.E
3	Control box	N/A	N/A	A.E
4	AC Adapter	GFP451DA-1530-1	1.2m, unshielded	A.E
5	Temporary Antenna Connector	T10	N/A	A.E.

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	BANDWIDTH	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road 2, Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

Conducted Emission Test Site

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6, 2015	June 5, 2016
Conduction Cable	MXT	SE1	S003	June 6, 2015	June 5, 2016

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $dB\mu$ V = $20 \log$ Emission level μ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

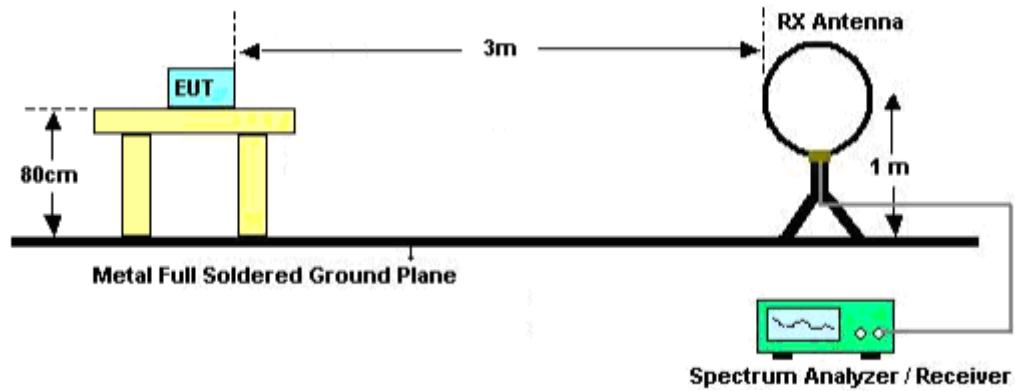

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

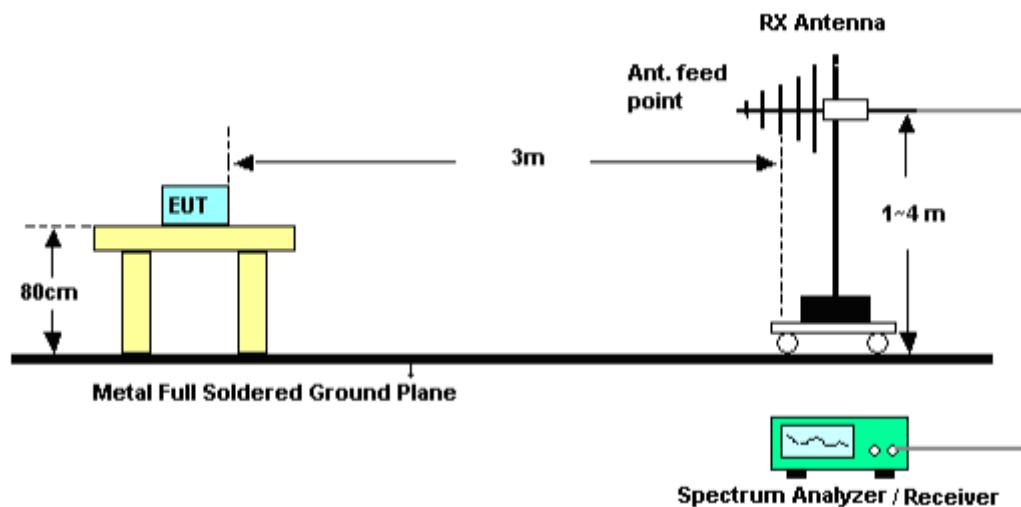

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

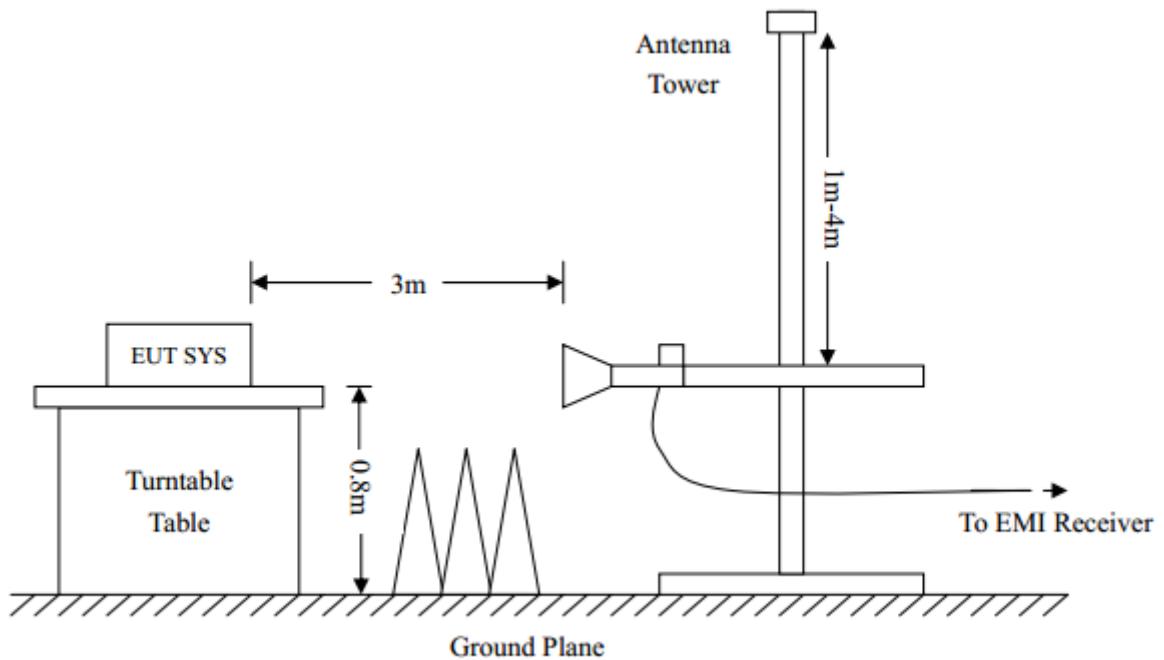


8.4. TEST RESULT
(Worst modulation:GFSK)
FOR BR/EDR

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

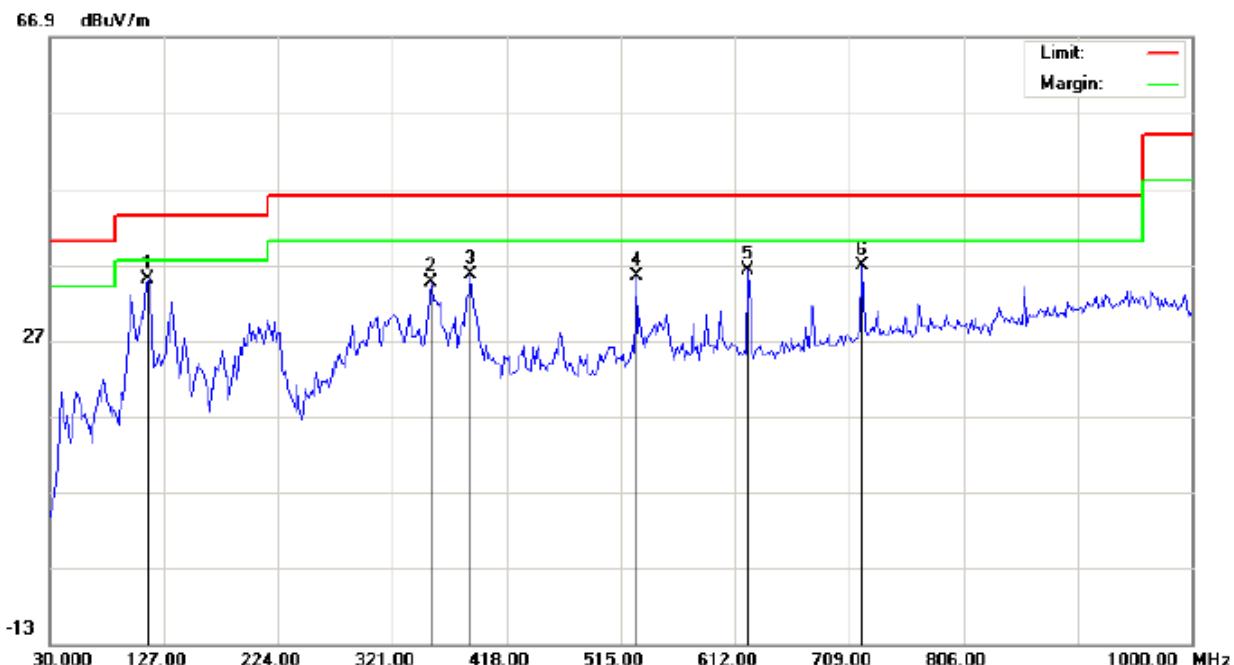


Site: site #1 Polarization: **Horizontal** Temperature: 22.5
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.4 %
EUT:Wireless 3D Speaker Distance:
M/N:CBT612
Mode:Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	114.0665	27.76	7.23	34.99	43.50	-8.51	peak			
2		353.3333	15.87	18.76	34.63	46.00	-11.37	peak			
3		387.2832	16.66	18.99	35.65	46.00	-10.35	peak			
4		527.9333	13.53	21.88	35.41	46.00	-10.59	peak			
5		623.3165	12.33	23.79	36.12	46.00	-9.88	peak			
6		720.3165	10.98	25.77	36.75	46.00	-9.25	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

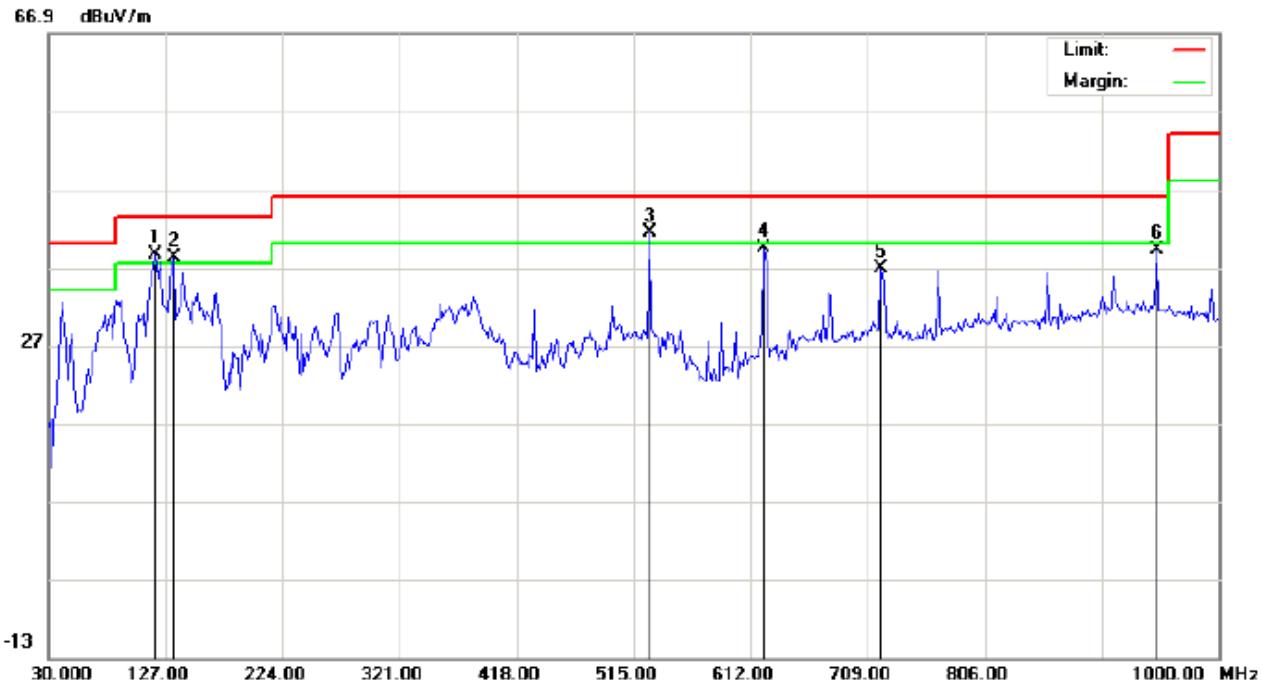

Site: site #1 Polarization: **Vertical** Temperature: 22.5
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.4 %
EUT:Wireless 3D Speaker Distance:
M/N:CBT612
Mode:Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	118.9167	32.22	6.32	38.54	43.50	-4.96	peak			
2	!	133.4667	25.78	12.48	38.26	43.50	-5.24	peak			
3	*	527.9333	19.49	21.88	41.37	46.00	-4.63	peak			
4		623.3165	16.20	23.25	39.45	46.00	-6.55	peak			
5		720.3165	10.99	25.77	36.76	46.00	-9.24	peak			
6		948.2667	9.33	29.95	39.28	46.00	-6.72	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL




Site: site #1 Polarization: **Horizontal** Temperature: 22.5
 Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.4 %
 EUT:Wireless 3D Speaker Distance:
 M/N:CBT612
 Mode:Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		112.4500	28.96	7.60	36.56	43.50	-6.94	peak			
2	*	133.4667	24.42	12.15	36.57	43.50	-6.93	peak			
3		353.3333	16.37	18.76	35.13	46.00	-10.87	peak			
4		387.2832	16.66	18.99	35.65	46.00	-10.35	peak			
5		623.3165	12.83	23.79	36.62	46.00	-9.38	peak			
6		720.3165	9.98	25.77	35.75	46.00	-10.25	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

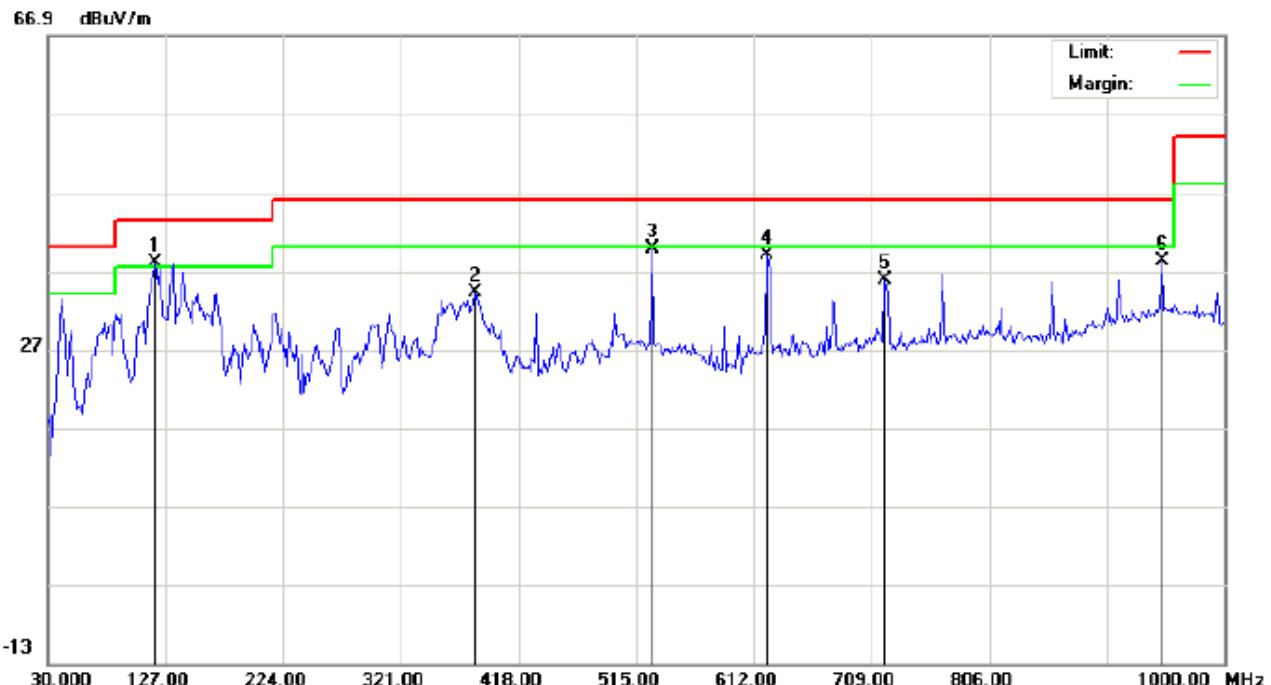

Site: site #1 Polarization: **Vertical** Temperature: 22.5
 Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.4 %
 EUT:Wireless 3D Speaker Distance:
 M/N:CBT612
 Mode:Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	118.9167	31.72	6.32	38.04	43.50	-5.46	peak			
2		382.4331	15.29	18.95	34.24	46.00	-11.76	peak			
3		527.9333	17.99	21.88	39.87	46.00	-6.13	peak			
4		623.3165	15.70	23.25	38.95	46.00	-7.05	peak			
5		720.3165	9.99	25.77	35.76	46.00	-10.24	peak			
6		948.2667	8.33	29.95	38.28	46.00	-7.72	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL




Site: site #1 Polarization: **Horizontal** Temperature: 22.5
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.4 %
EUT:Wireless 3D Speaker Distance:
M/N:CBT612
Mode:High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		99.5167	23.44	10.00	33.44	43.50	-10.06	peak			
2	*	114.0667	28.26	7.23	35.49	43.50	-8.01	peak			
3		199.7500	17.73	11.99	29.72	43.50	-13.78	peak			
4		387.2833	13.16	18.99	32.15	46.00	-13.85	peak			
5		623.3167	11.83	23.79	35.62	46.00	-10.38	peak			
6		720.3167	9.97	25.78	35.75	46.00	-10.25	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

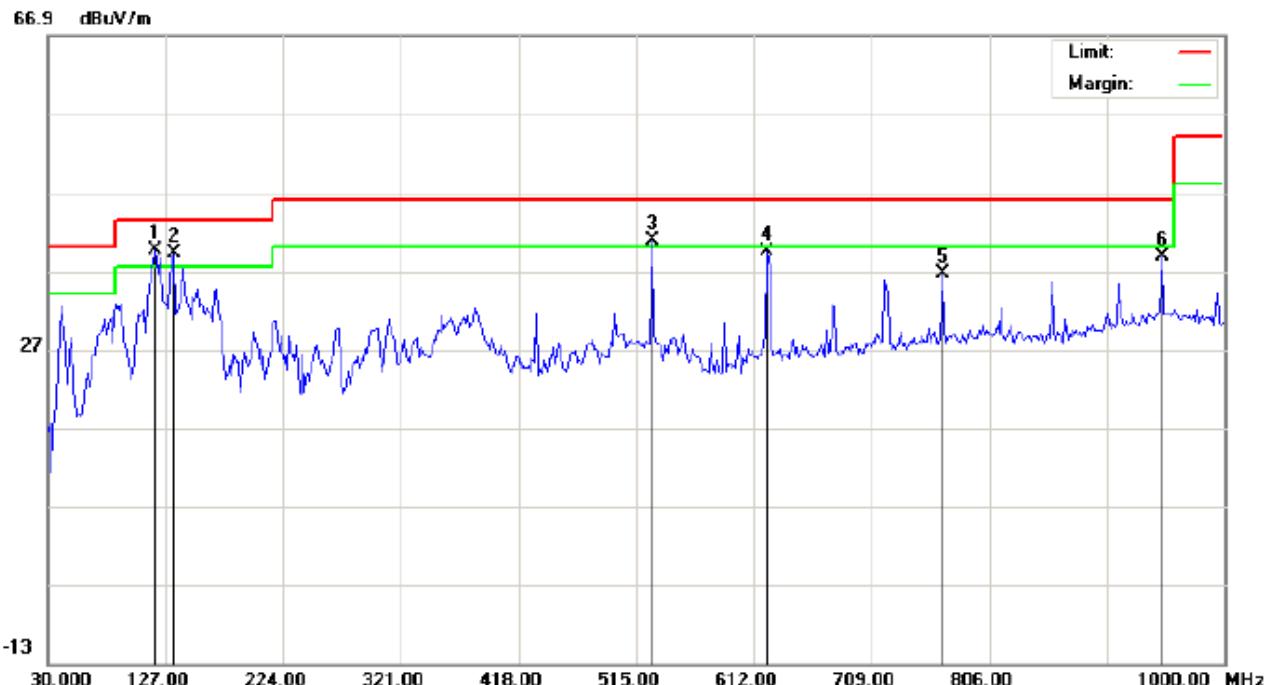

Site: site #1 Polarization: **Vertical** Temperature: 22.5
 Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.4 %
 EUT:Wireless 3D Speaker Distance:
 M/N:CBT612
 Mode:High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	118.9167	33.22	6.32	39.54	43.50	-3.96	peak			
2	!	133.4667	26.78	12.48	39.26	43.50	-4.24	peak			
3	!	527.9333	18.99	21.88	40.87	46.00	-5.13	peak			
4		623.3167	16.20	23.25	39.45	46.00	-6.55	peak			
5		767.2000	9.67	26.87	36.54	46.00	-9.46	peak			
6		948.2667	8.83	29.95	38.78	46.00	-7.22	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

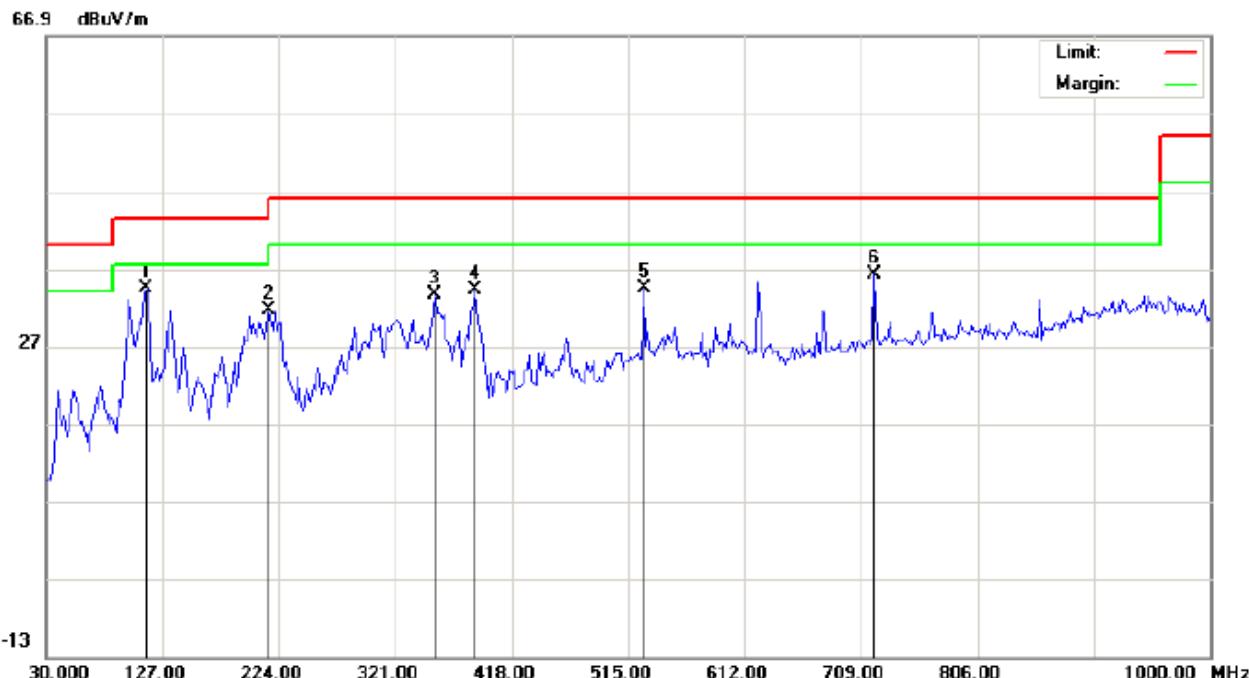


Site: site #1	Polarization: Horizontal	Temperature: 22.5
Limit: FCC Class B 3M Radiation	Power: AC 120V/60Hz	Humidity: 55.4 %
EUT:Wireless 3D Speaker	Distance:	
M/N:CBT612		
Mode:Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	114.0665	27.26	7.23	34.49	43.50	-9.01	peak			
2		215.9165	21.30	10.38	31.68	43.50	-11.82	peak			
3		353.3333	14.87	18.76	33.63	46.00	-12.37	peak			
4		387.2832	15.16	18.99	34.15	46.00	-11.85	peak			
5		527.9333	12.53	21.88	34.41	46.00	-11.59	peak			
6		720.3165	10.48	25.77	36.25	46.00	-9.75	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

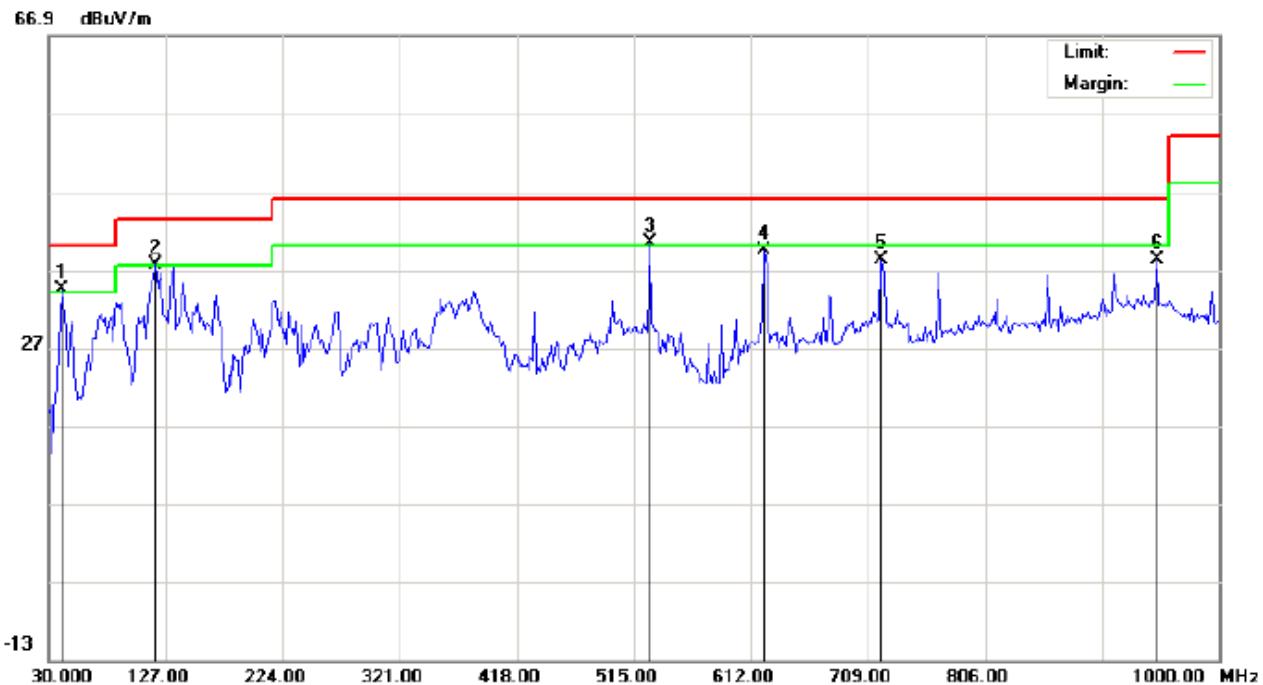

Site: site #1 Polarization: **Vertical** Temperature: 22.5
 Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.4 %
 EUT:Wireless 3D Speaker Distance:
 M/N:CBT612
 Mode:Low Channel TX
 Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	!	41.3166	25.55	8.81	34.36	40.00	-5.64	peak			
2	!	118.9167	31.22	6.32	37.54	43.50	-5.96	peak			
3	*	527.9333	18.49	21.88	40.37	46.00	-5.63	peak			
4		623.3165	16.20	23.25	39.45	46.00	-6.55	peak			
5		720.3165	12.49	25.77	38.26	46.00	-7.74	peak			
6		948.2667	8.33	29.95	38.28	46.00	-7.72	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

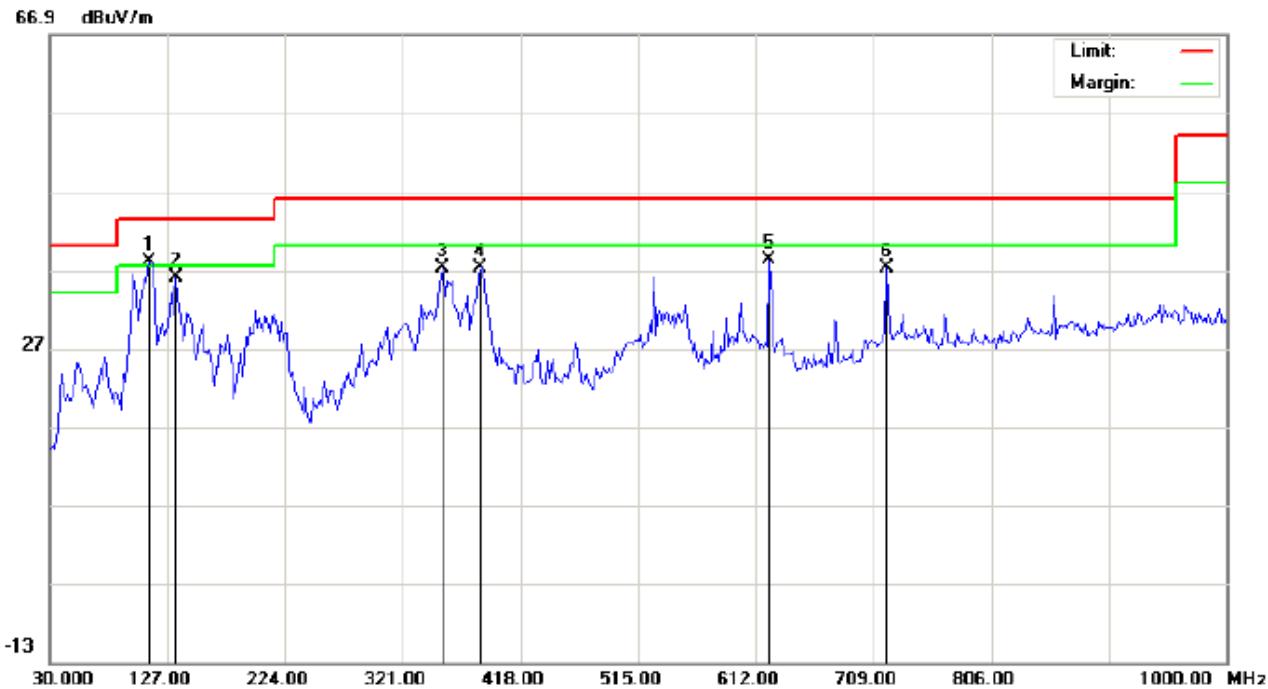


Site: site #1 Polarization: **Horizontal** Temperature: 22.5
 Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.4 %
 EUT:Wireless 3D Speaker Distance:
 M/N:CBT612
 Mode:Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	112.4500	30.46	7.60	38.06	43.50	-5.44	peak			
2		133.4667	23.92	12.15	36.07	43.50	-7.43	peak			
3		353.3333	18.37	18.76	37.13	46.00	-8.87	peak			
4		385.6666	18.18	18.98	37.16	46.00	-8.84	peak			
5		623.3165	14.33	23.79	38.12	46.00	-7.88	peak			
6		720.3165	11.48	25.77	37.25	46.00	-8.75	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

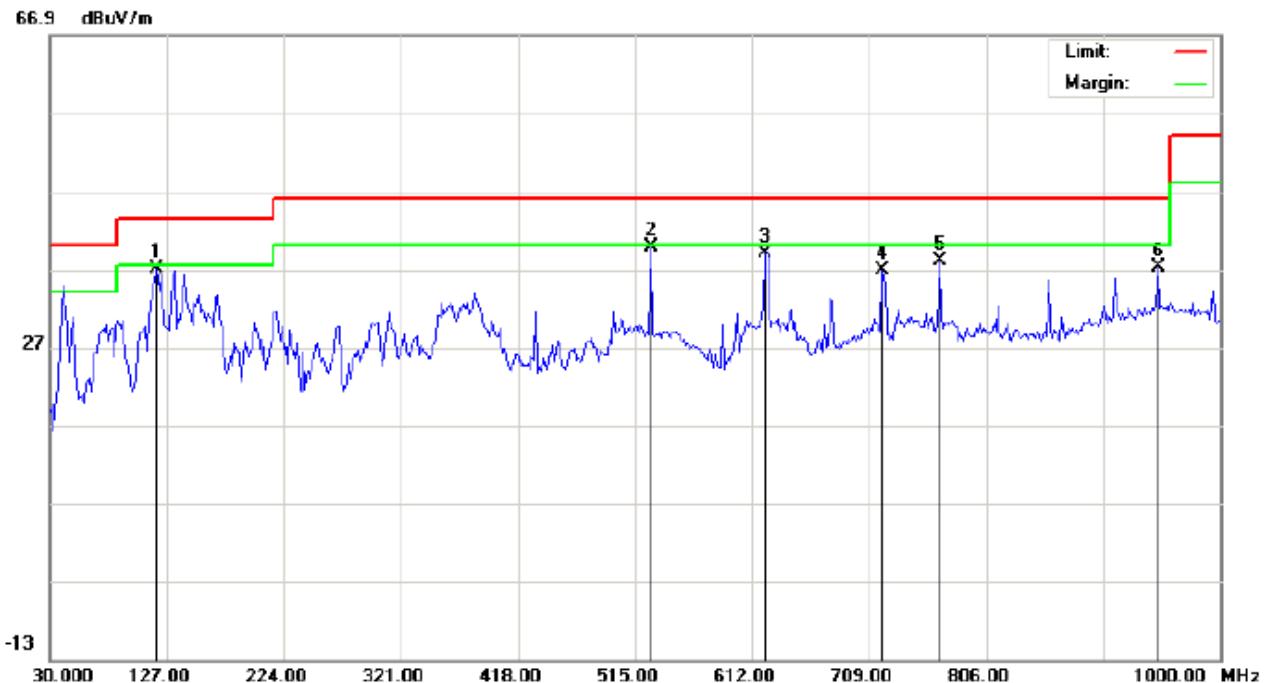

Site: site #1 Polarization: **Vertical** Temperature: 22.5
 Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.4 %
 EUT: Wireless 3D Speaker Distance:
 M/N: CBT612
 Mode: Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		118.9167	30.72	6.32	37.04	43.50	-6.46	peak			
2	*	527.9333	17.99	21.88	39.87	46.00	-6.13	peak			
3		623.3165	15.70	23.25	38.95	46.00	-7.05	peak			
4		720.3165	10.99	25.77	36.76	46.00	-9.24	peak			
5		767.2000	11.17	26.87	38.04	46.00	-7.96	peak			
6		948.2667	7.33	29.95	37.28	46.00	-8.72	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL




Site: site #1 Polarization: **Horizontal** Temperature: 22.5
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.4 %
EUT:Wireless 3D Speaker Distance:
M/N:CBT612
Mode:High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	114.0666	29.26	7.23	36.49	43.50	-7.01	peak			
2		199.7500	18.72	11.99	30.71	43.50	-12.79	peak			
3		324.2332	13.78	17.02	30.80	46.00	-15.20	peak			
4		387.2832	15.66	18.99	34.65	46.00	-11.35	peak			
5		720.3166	10.47	25.78	36.25	46.00	-9.75	peak			
6		857.7332	6.06	27.51	33.57	46.00	-12.43	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

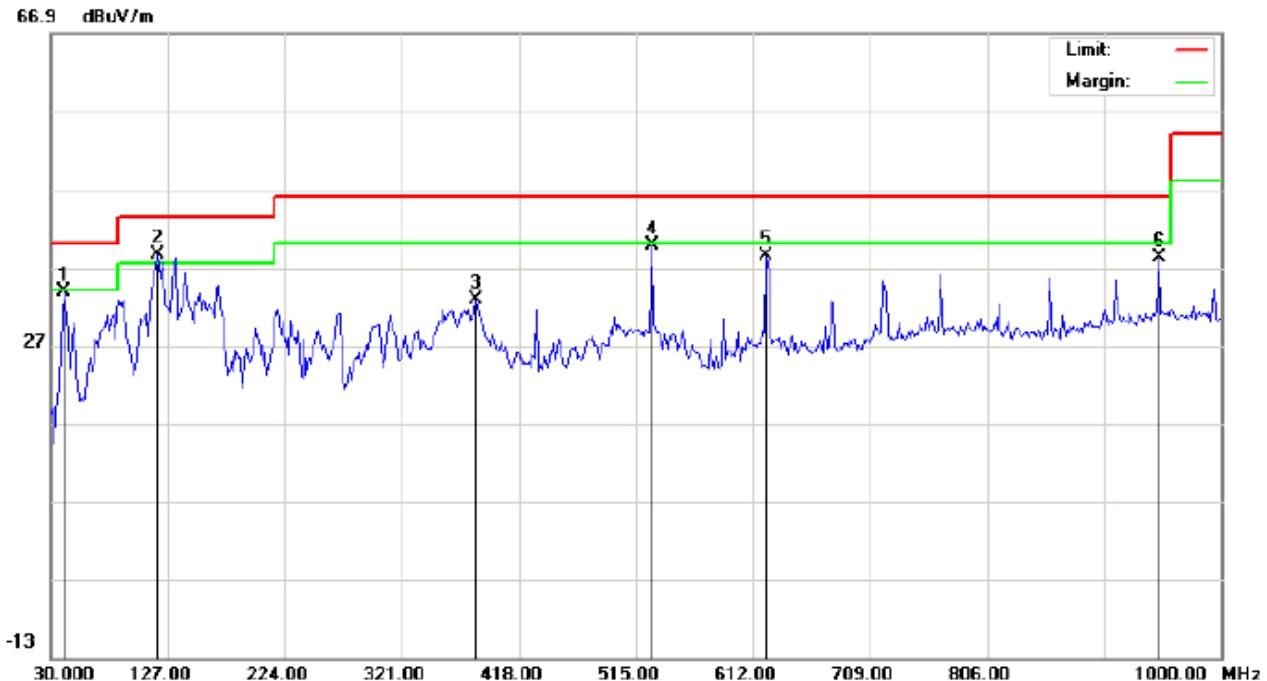

Site: site #1 Polarization: **Vertical** Temperature: 22.5
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.4 %
EUT:Wireless 3D Speaker Distance:
M/N:CBT612
Mode:High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		41.3166	25.05	8.81	33.86	40.00	-6.14	peak			
2	*	118.9167	32.22	6.32	38.54	43.50	-4.96	peak			
3		382.4331	13.79	18.95	32.74	46.00	-13.26	peak			
4		527.9333	17.99	21.88	39.87	46.00	-6.13	peak			
5		623.3166	15.20	23.25	38.45	46.00	-7.55	peak			
6		948.2667	8.33	29.95	38.28	46.00	-7.72	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The “Factor” value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ

(Worst modulation: GFSK)

FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

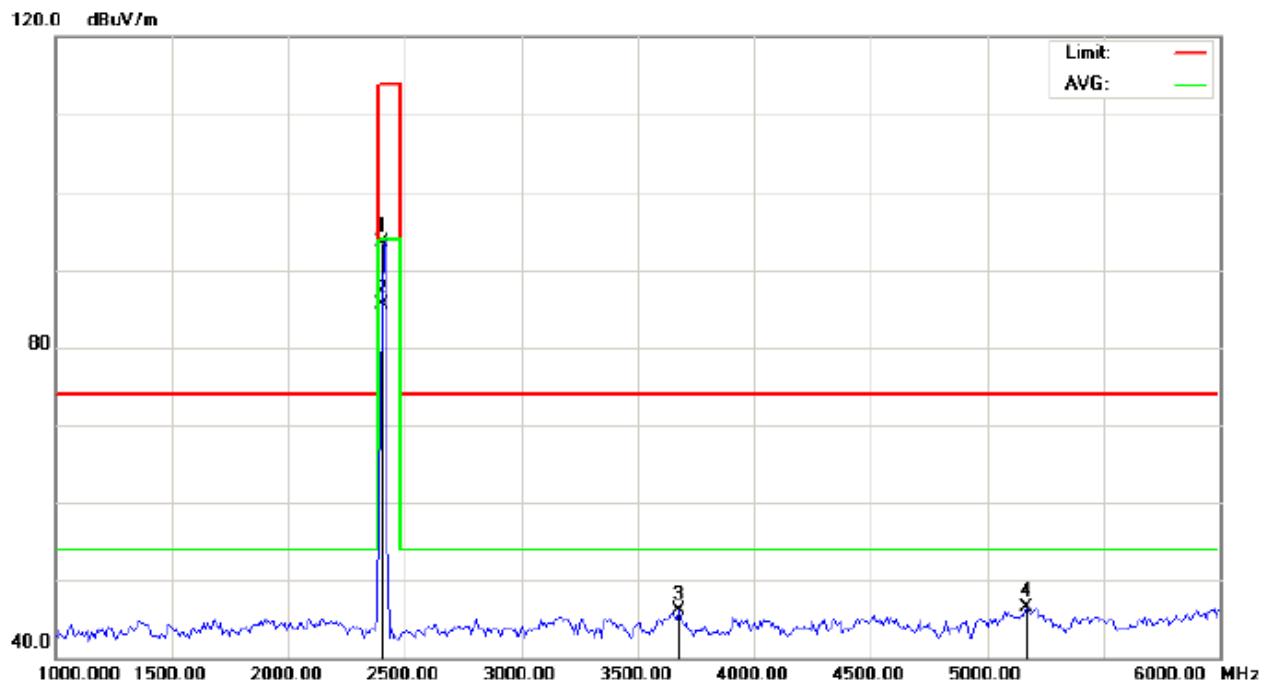


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance: 3m
M/N:CBT612
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	103.13	-9.68	93.45	114.00	-20.55	peak			
2	*	2402.000	95.17	-9.68	85.49	94.00	-8.51	AVG	100	67	
3		3675.000	52.95	-6.81	46.14	74.00	-27.86	peak			
4		5166.667	48.22	-1.80	46.42	74.00	-27.58	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

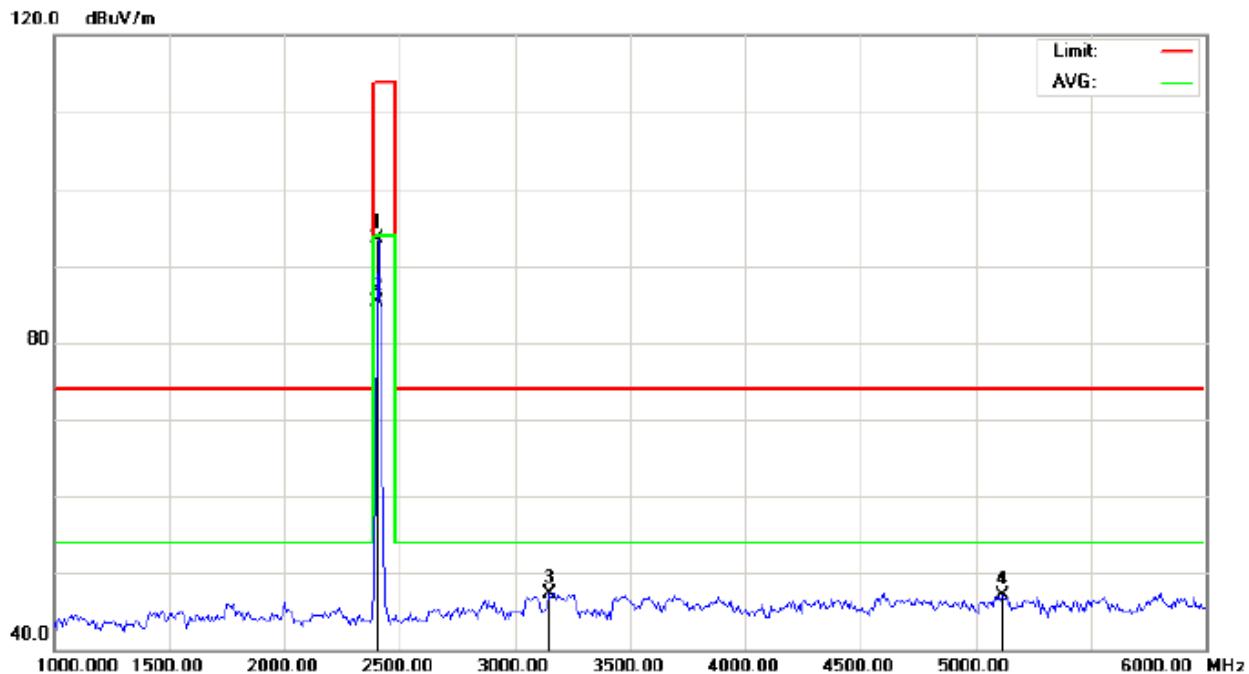


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance: 3m
M/N:CBT612
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	103.27	-9.68	93.59	114.00	-20.41	peak			
2	*	2402.000	95.05	-9.68	85.37	94.00	-8.63	AVG	150	163	
3		3150.000	55.54	-8.22	47.32	74.00	-26.68	peak			
4		5116.667	48.84	-1.80	47.04	74.00	-26.96	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

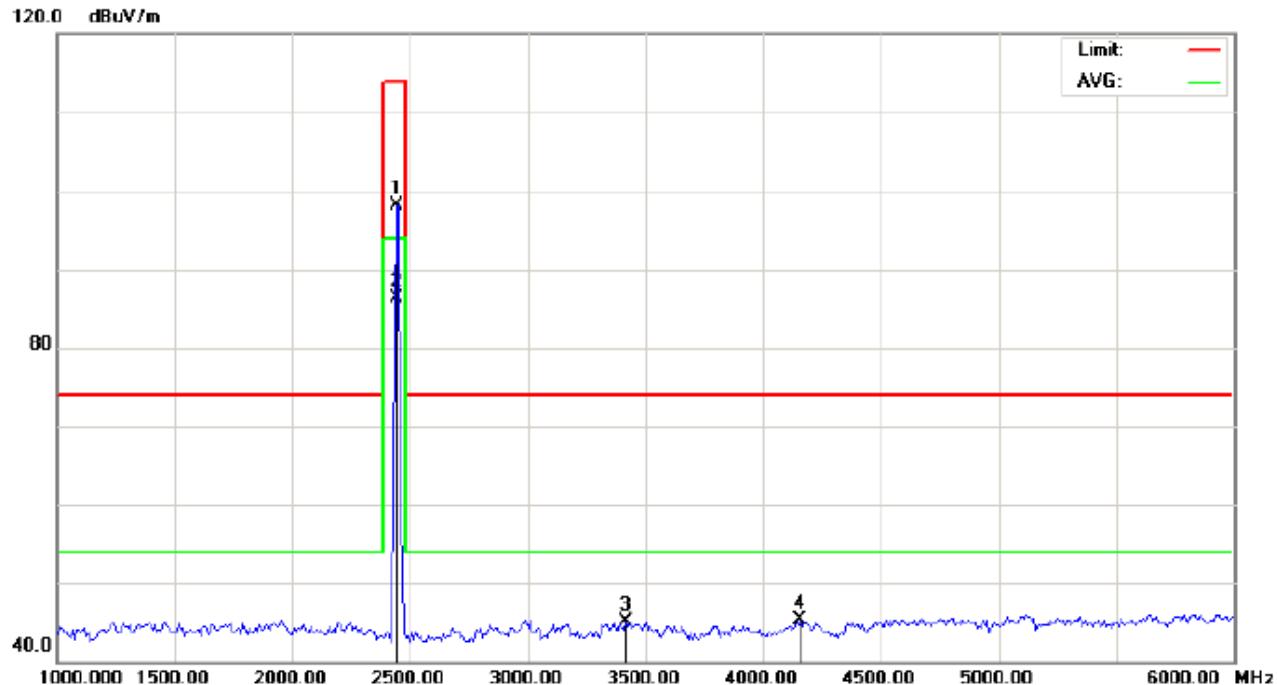


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance: 3m
M/N:CBT612
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	107.69	-9.63	98.06	114.00	-15.94	peak			
2	*	2441.000	95.97	-9.63	86.34	94.00	-7.66	AVG	150	94	
3		3416.667	53.16	-7.97	45.19	74.00	-28.81	peak			
4		4158.333	49.51	-4.27	45.24	74.00	-28.76	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

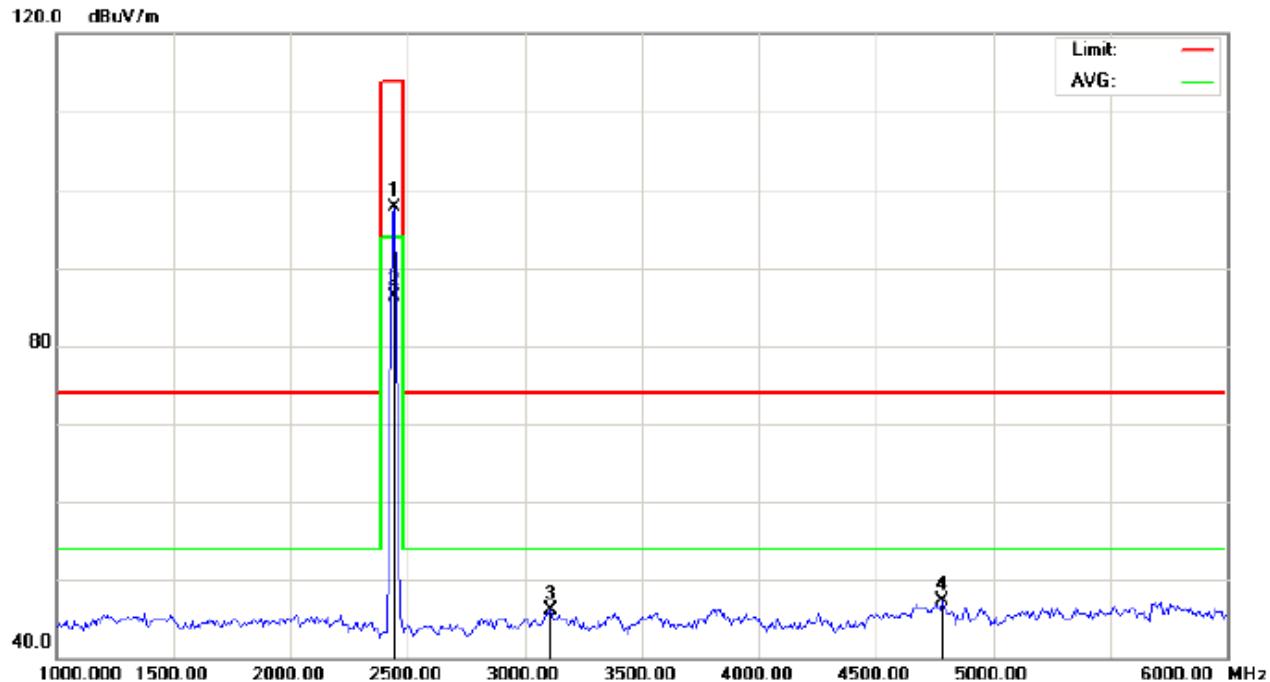


Site: site #1 Polarization: *Vertical* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT:Wireless 3D Speaker Distance: 3m
 M/N:CBT612
 Mode: Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2441.000	107.43	-9.63	97.80	114.00	-16.20	peak			
2	*	2441.000	96.00	-9.63	86.37	94.00	-7.63	AVG	150	169	
3		3108.333	54.42	-8.26	46.16	74.00	-27.84	peak			
4		4783.333	49.64	-2.37	47.27	74.00	-26.73	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

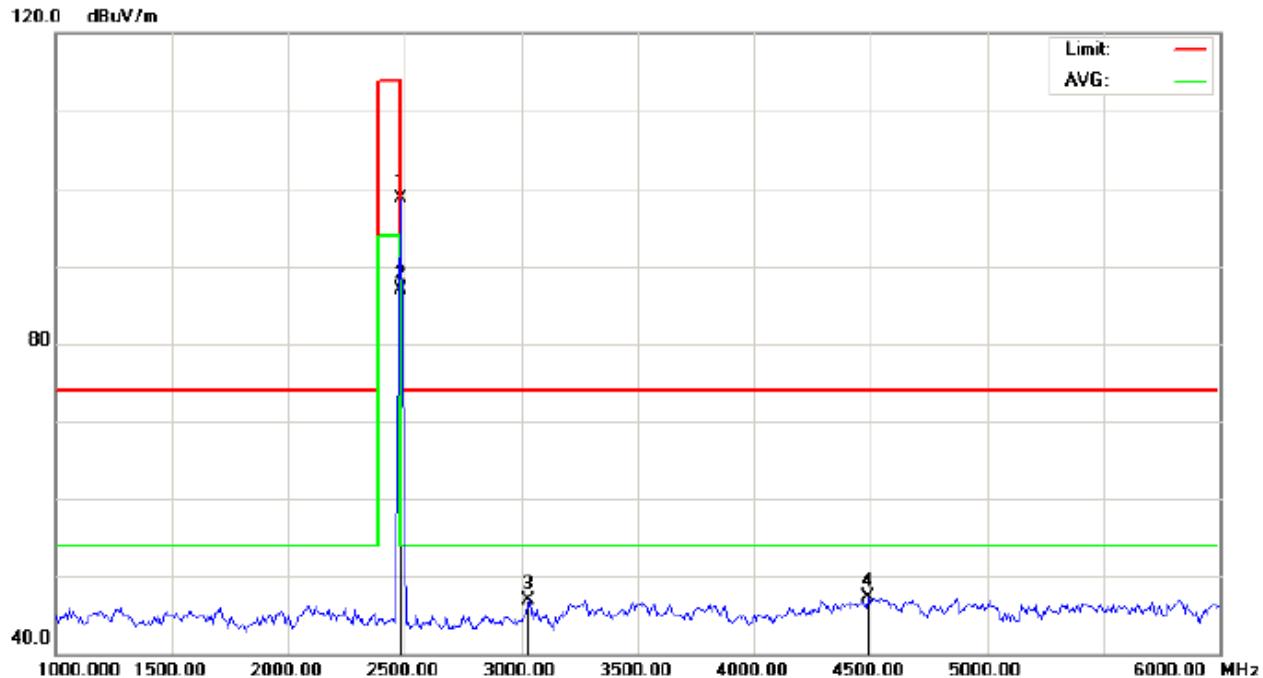


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance: 3m
M/N:CBT612
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.37	-9.59	98.78	114.00	-15.22	peak			
2	*	2480.000	96.53	-9.59	86.94	94.00	-7.06	AVG	100	37	
3		3033.333	55.23	-8.33	46.90	74.00	-27.10	peak			
4		4491.667	50.43	-3.14	47.29	74.00	-26.71	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

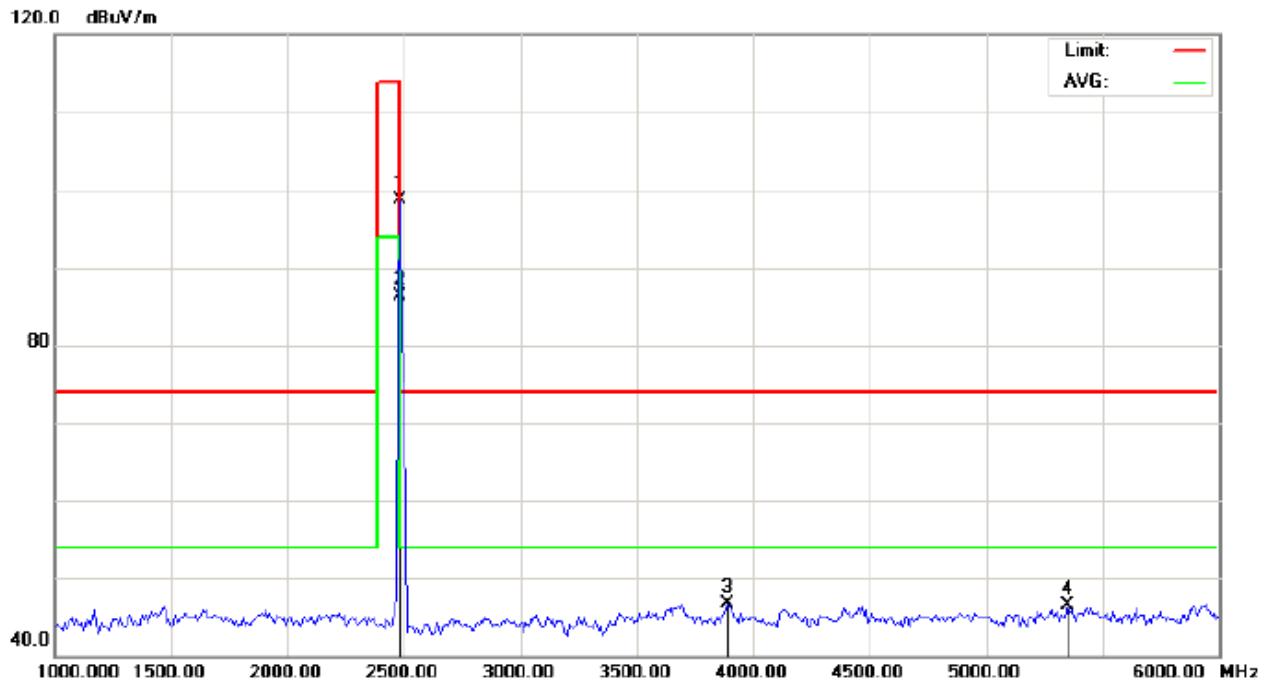

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance: 3m
M/N:CBT612
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.27	-9.59	98.68	114.00	-15.32	peak			
2	*	2480.000	95.98	-9.59	86.39	94.00	-7.61	AVG	100	236	
3		3891.667	52.21	-5.48	46.73	74.00	-27.27	peak			
4		5350.000	48.37	-1.81	46.56	74.00	-27.44	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value


Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	103.13	-9.68	93.45	114	-20.55	Horizontal
2402	103.27	-9.68	93.59	114	-20.41	Vertical
2441	107.69	-9.63	98.06	114	-15.94	Horizontal
2441	107.43	-9.63	97.80	114	-16.20	Vertical
2480	108.37	-9.59	98.78	114	-15.22	Horizontal
2480	108.27	-9.59	98.68	114	-15.32	Vertical

Average value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	95.17	-9.68	85.49	94	-8.51	Horizontal
2402	95.05	-9.68	85.37	94	-8.63	Vertical
2441	95.97	-9.63	86.34	94	-7.66	Horizontal
2441	96.00	-9.63	86.37	94	-7.63	Vertical
2480	96.53	-9.59	86.94	94	-7.06	Horizontal
2480	95.98	-9.59	86.39	94	-7.61	Vertical

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

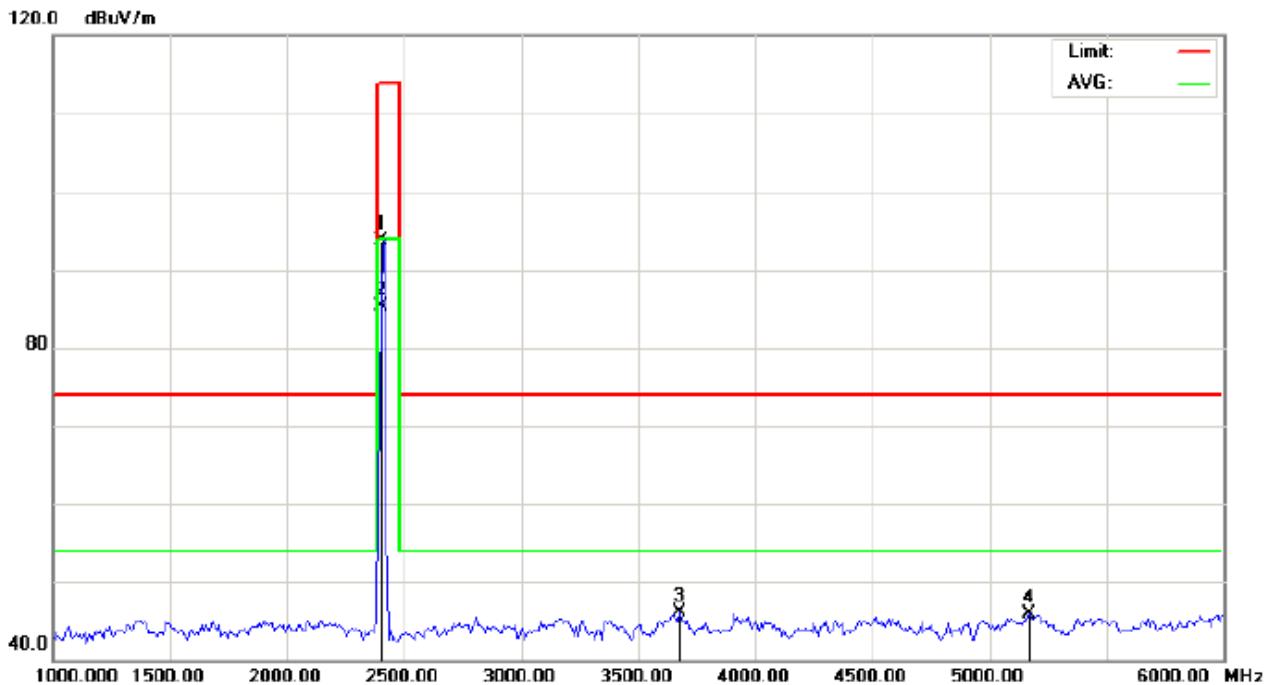


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance: 3m
M/N:CBT612
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	103.43	-9.68	93.75	114.00	-20.25	peak			
2	*	2402.000	95.05	-9.68	85.37	94.00	-8.63	AVG	100	157	
3		3675.000	52.95	-6.81	46.14	74.00	-27.86	peak			
4		5166.667	47.72	-1.80	45.92	74.00	-28.08	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

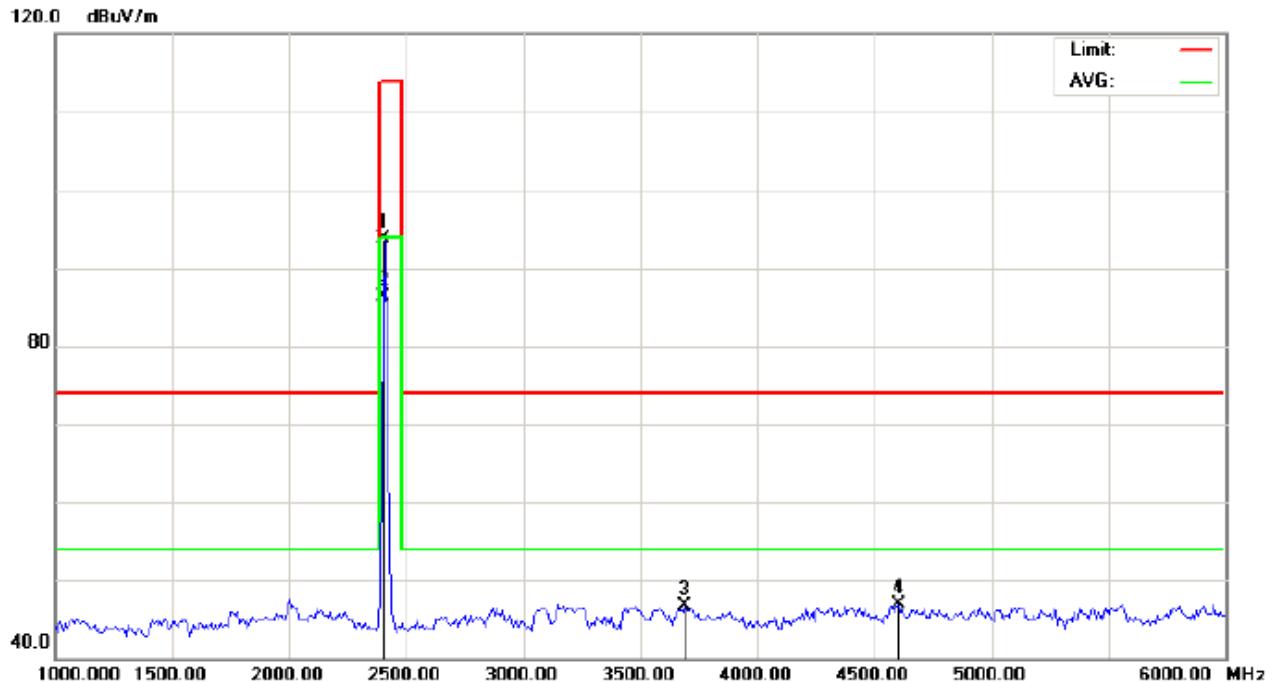


Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT:Wireless 3D Speaker Distance: 3m
 M/N:CBT612
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2402.000	103.36	-9.68	93.68	114.00	-20.32	peak			
2	*	2402.000	96.01	-9.68	86.33	94.00	-7.67	AVG	100	69	
3		3691.667	53.33	-6.71	46.62	74.00	-27.38	peak			
4		4600.000	49.74	-2.85	46.89	74.00	-27.11	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

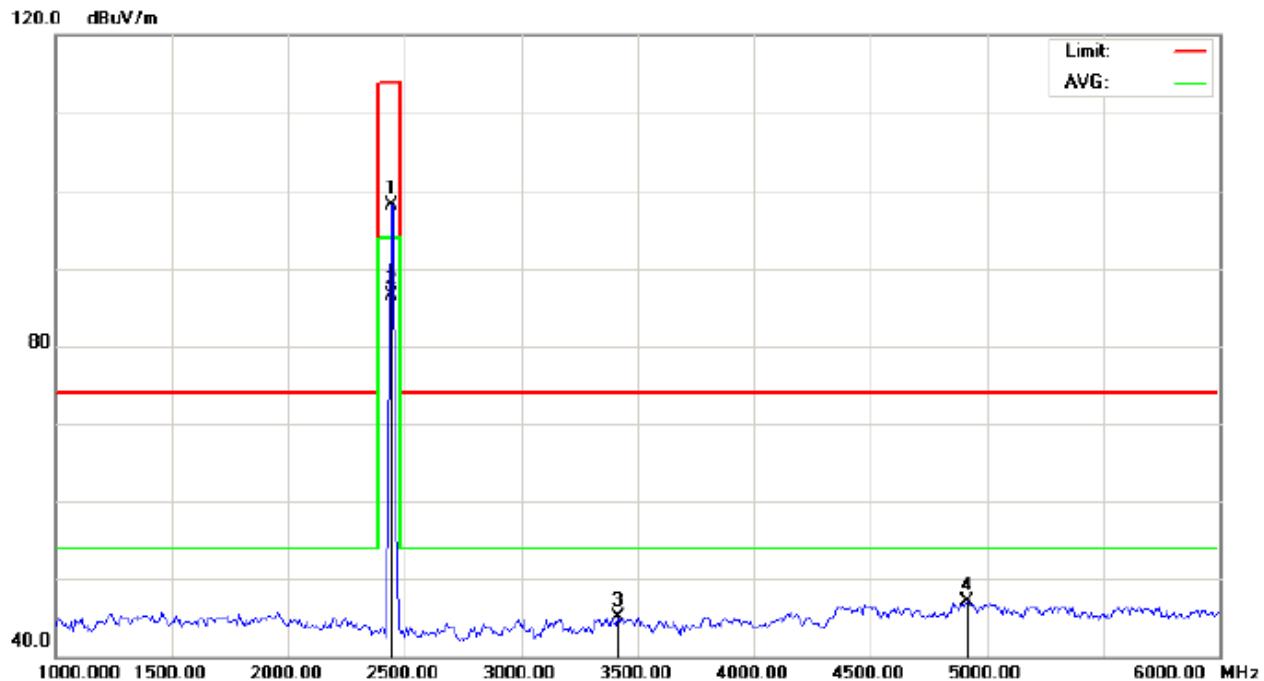


Site: site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT:Wireless 3D Speaker Distance: 3m
 M/N:CBT612
 Mode: Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	107.67	-9.63	98.04	114.00	-15.96	peak			
2	*	2441.000	96.08	-9.63	86.45	94.00	-7.55	AVG	100	267	
3		3416.667	53.16	-7.97	45.19	74.00	-28.81	peak			
4		4916.667	49.06	-2.02	47.04	74.00	-26.96	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

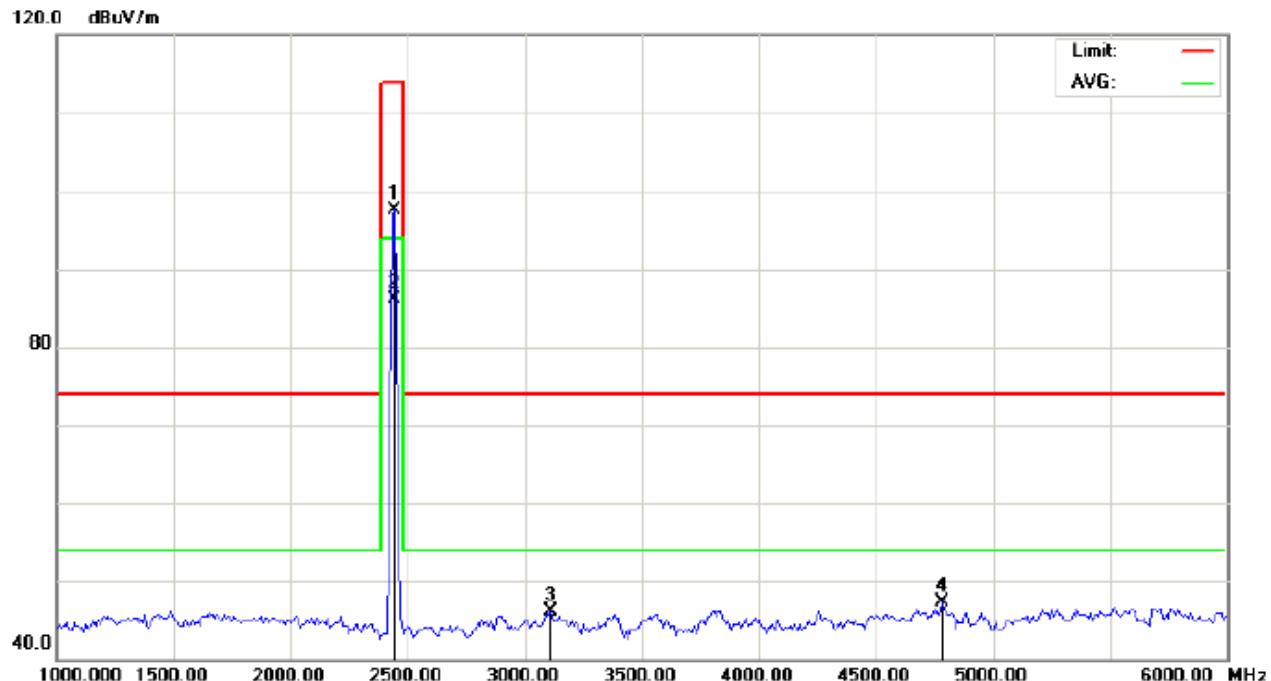


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance: 3m
M/N:CBT612
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	107.22	-9.63	97.59	114.00	-16.41	peak			
2	*	2441.000	95.82	-9.63	86.19	94.00	-7.81	AVG	100	309	
3		3108.333	54.42	-8.26	46.16	74.00	-27.84	peak			
4		4783.333	49.64	-2.37	47.27	74.00	-26.73	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

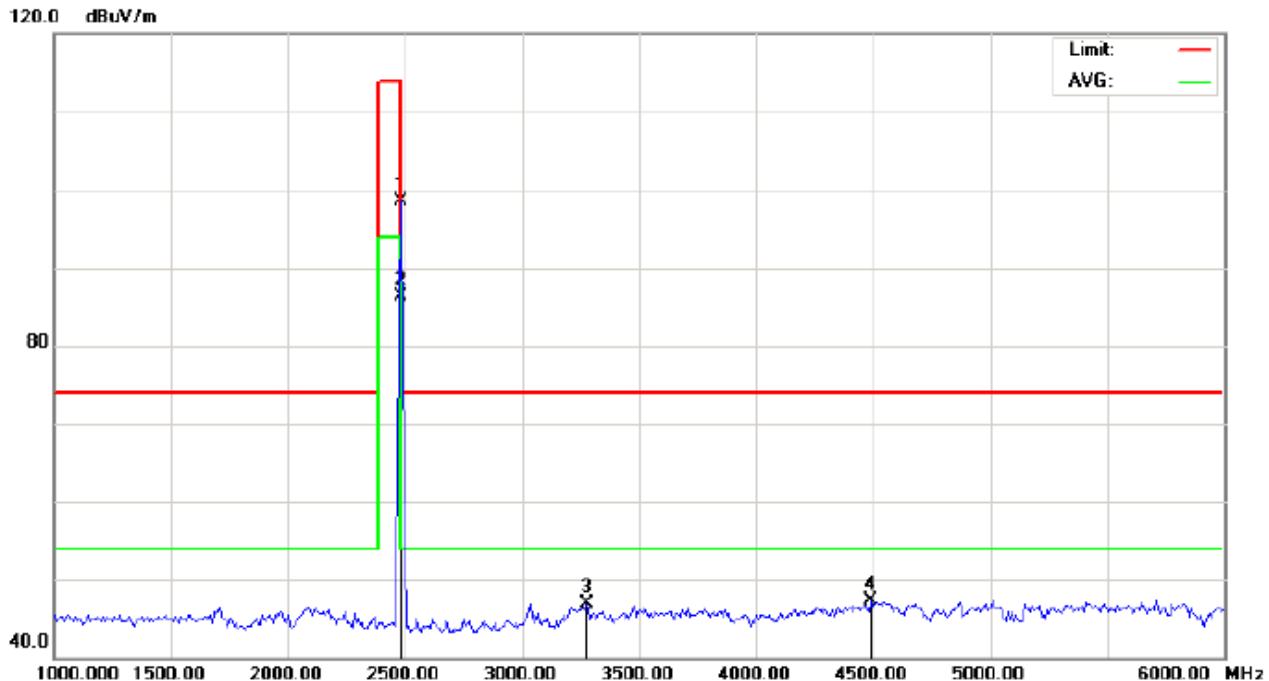


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance: 3m
M/N:CBT612
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.07	-9.59	98.48	114.00	-15.52	peak			
2	*	2480.000	95.90	-9.59	86.31	94.00	-7.69	AVG	150	342	
3		3275.000	54.98	-8.10	46.88	74.00	-27.12	peak			
4		4491.667	50.43	-3.14	47.29	74.00	-26.71	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

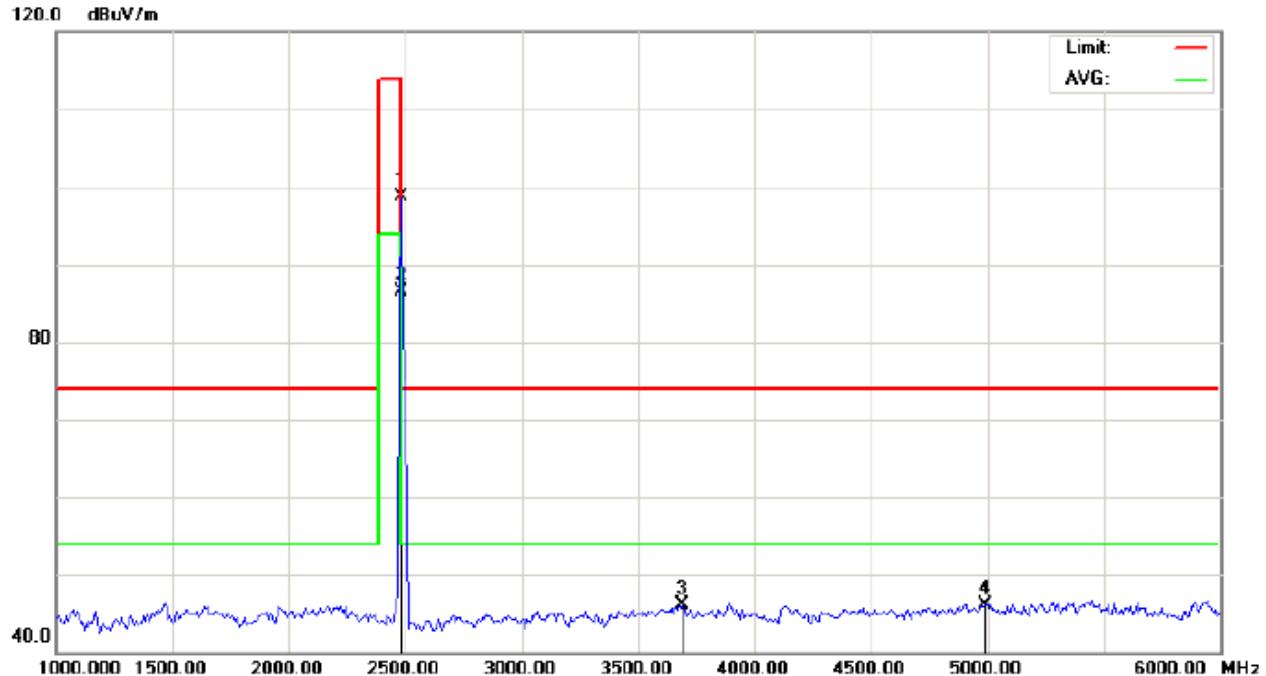

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance: 3m
M/N:CBT612
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.27	-9.59	98.68	114.00	-15.32	peak			
2	*	2480.000	96.16	-9.59	86.57	94.00	-7.43	AVG	100	214	
3		3691.667	52.81	-6.71	46.10	74.00	-27.90	peak			
4		4991.667	47.95	-1.82	46.13	74.00	-27.87	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	103.43	-9.68	93.75	114	-20.25	Horizontal
2402	103.36	-9.68	93.68	114	-20.32	Vertical
2440	107.67	-9.63	98.04	114	-15.96	Horizontal
2440	107.22	-9.63	97.59	114	-16.41	Vertical
2480	108.07	-9.59	98.48	114	-15.52	Horizontal
2480	108.27	-9.59	98.68	114	-15.32	Vertical

Average value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	95.05	-9.68	85.37	94	-8.63	Horizontal
2402	96.01	-9.68	86.33	94	-7.67	Vertical
2440	96.08	-9.63	86.45	94	-7.55	Horizontal
2440	95.82	-9.63	86.19	94	-7.81	Vertical
2480	95.90	-9.59	86.31	94	-7.69	Horizontal
2480	96.16	-9.59	86.57	94	-7.43	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the step 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

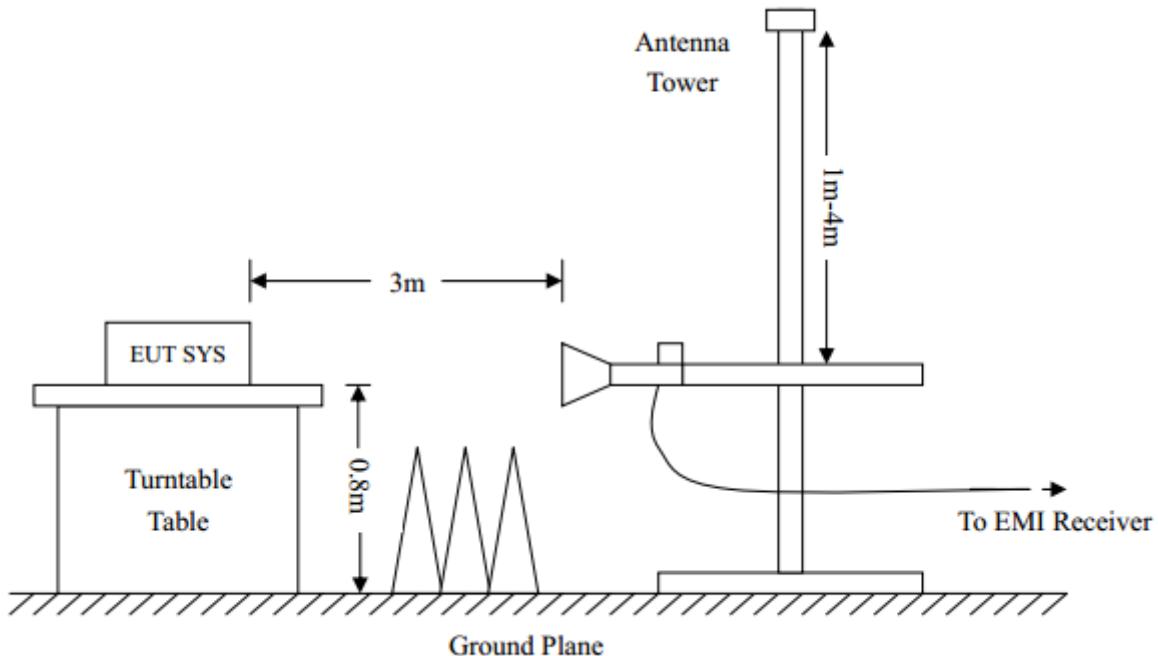


9.3 RADIATED TEST RESULT

(Worst modulation:GFSK)

FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

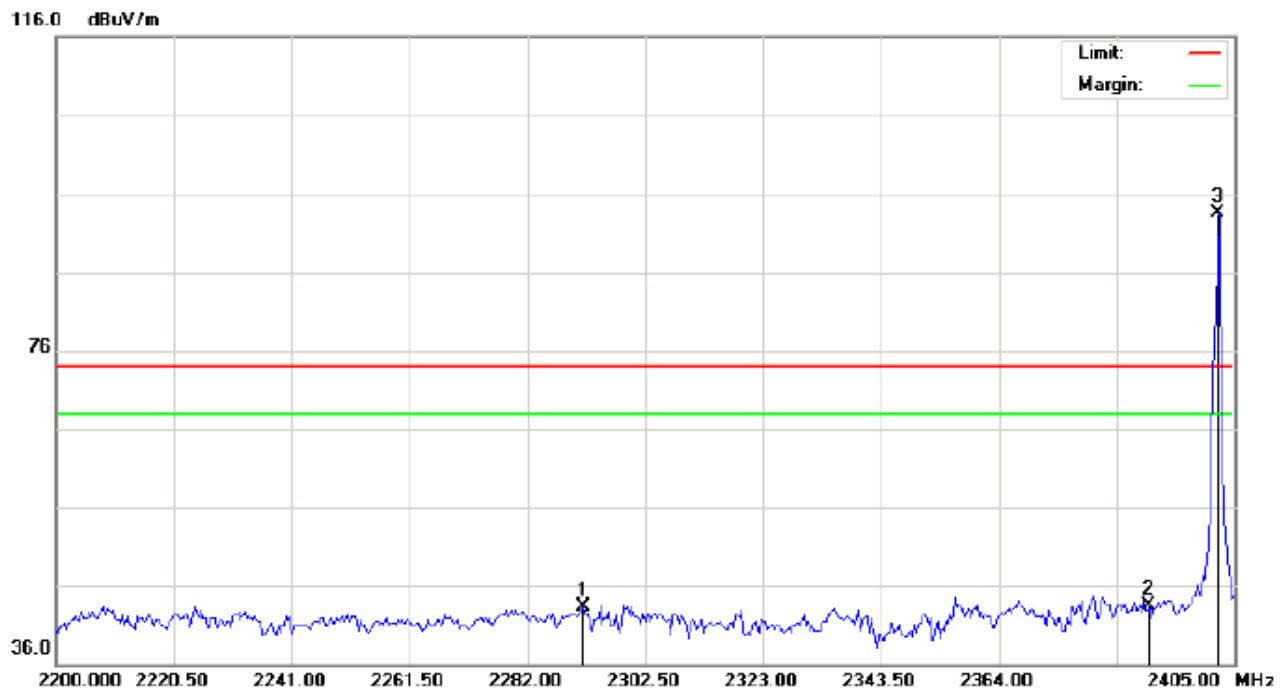

Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance:
M/N:CBT612
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2291.567	33.04	10.20	43.24	74.00	-30.76	peak			
2		2390.000	33.12	10.31	43.43	74.00	-30.57	peak			
3	*	2402.000	83.21	10.32	93.53	74.00	19.53	peak			

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical



Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT:Wireless 3D Speaker Distance:
 M/N:CBT612
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2302.500	34.69	10.21	44.90	74.00	-29.10	peak			
2		2390.000	33.85	10.31	44.16	74.00	-29.84	peak			
3	*	2402.000	83.32	10.32	93.64	74.00	19.64	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal



Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance:
M/N:CBT612
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.06	10.41	98.47	74.00	24.47	peak			
2		2483.500	34.25	10.41	44.66	74.00	-29.34	peak			
3		2494.830	35.00	10.42	45.42	74.00	-28.58	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

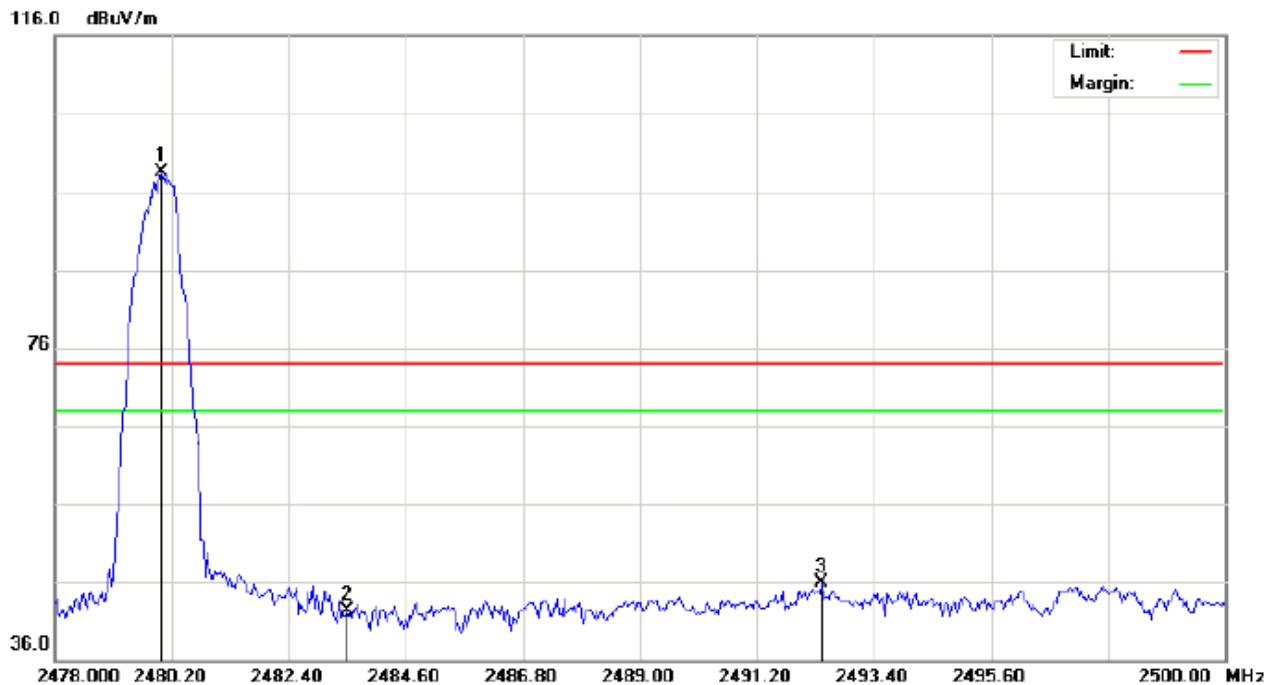

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance:
M/N:CBT612
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.15	10.41	98.56	74.00	24.56	peak			
2		2483.500	31.87	10.41	42.28	74.00	-31.72	peak			
3		2492.410	35.41	10.42	45.83	74.00	-28.17	peak			

RESULT: PASS


Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

FOR BLE


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

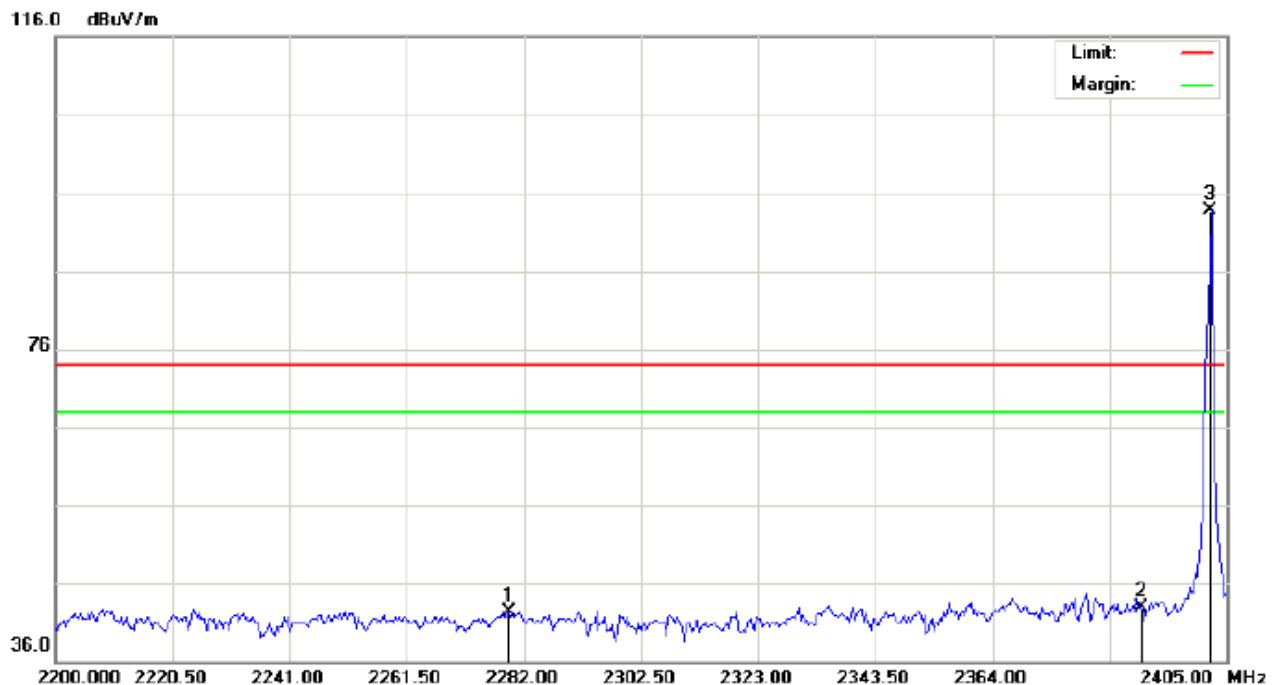

Site: site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT:Wireless 3D Speaker Distance:
 M/N:CBT612
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2279.267	32.18	10.19	42.37	74.00	-31.63	peak			
2		2390.000	32.62	10.31	42.93	74.00	-31.07	peak			
3	*	2402.000	83.41	10.32	93.73	74.00	19.73	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

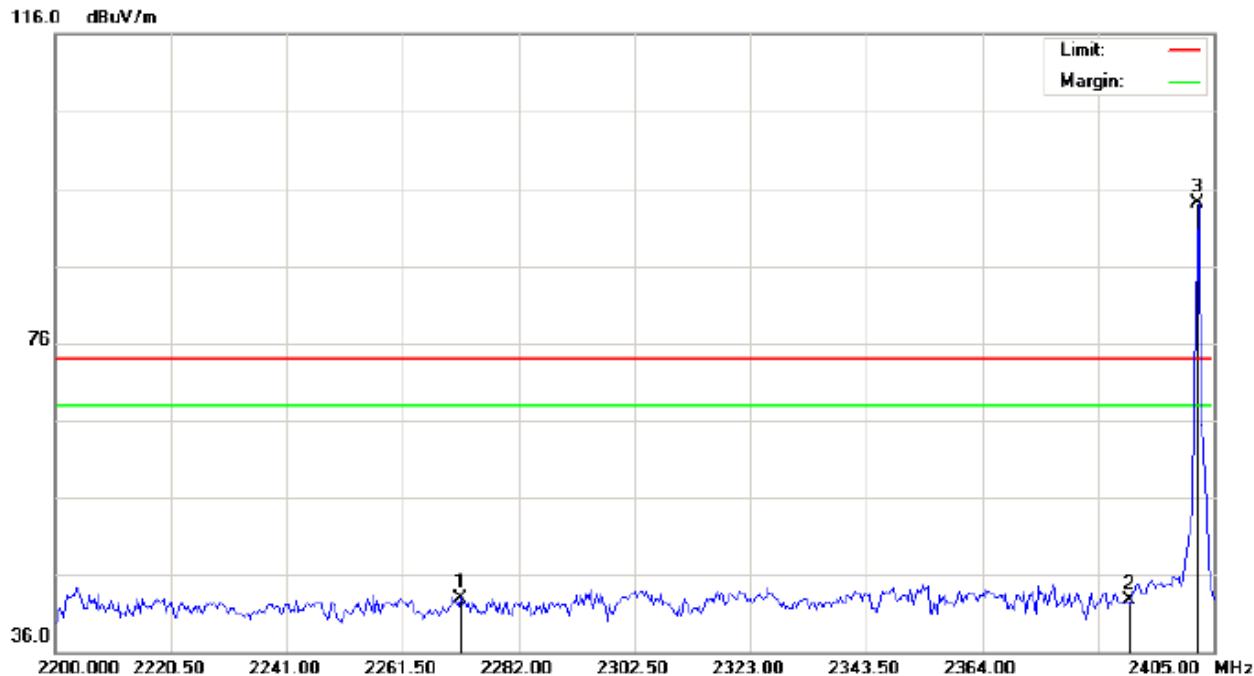

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance:
M/N:CBT612
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2271.750	32.82	10.18	43.00	74.00	-31.00	peak			
2		2390.000	32.35	10.31	42.66	74.00	-31.34	peak			
3	*	2402.000	83.76	10.32	94.08	74.00	20.08	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

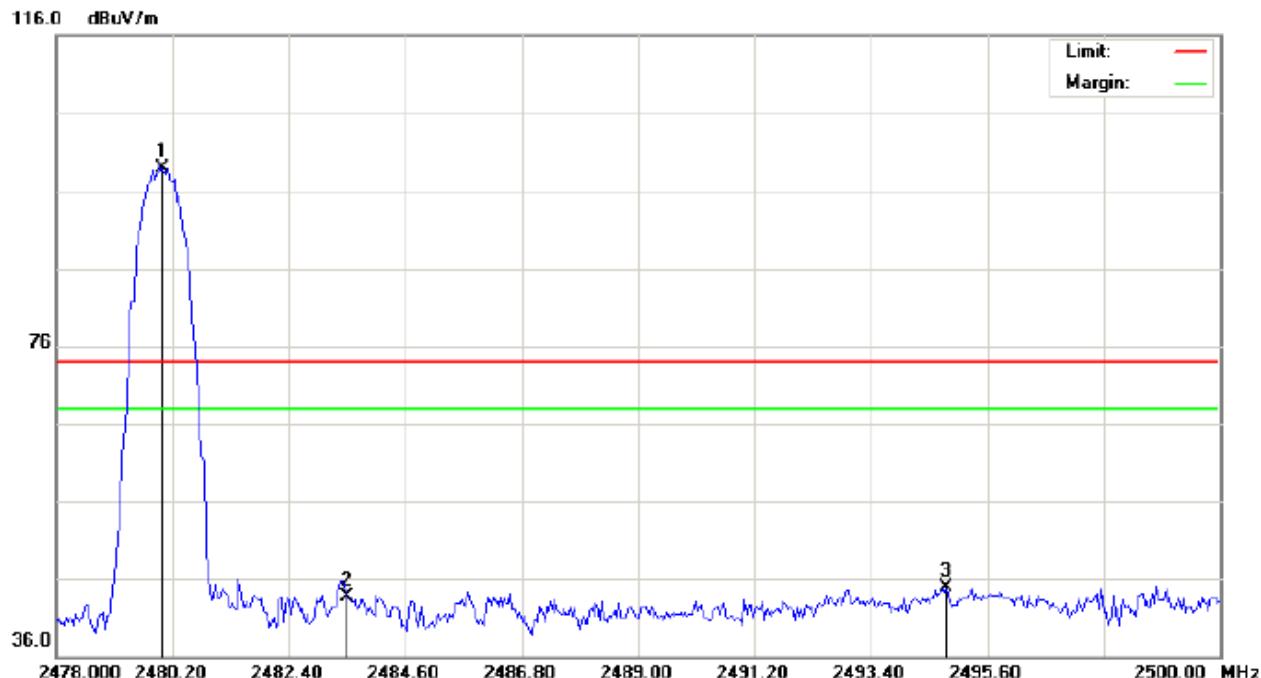

Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance:
M/N:CBT612
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.46	10.41	98.87	74.00	24.87	peak			
2		2483.500	33.25	10.41	43.66	74.00	-30.34	peak			
3		2494.830	34.50	10.42	44.92	74.00	-29.08	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

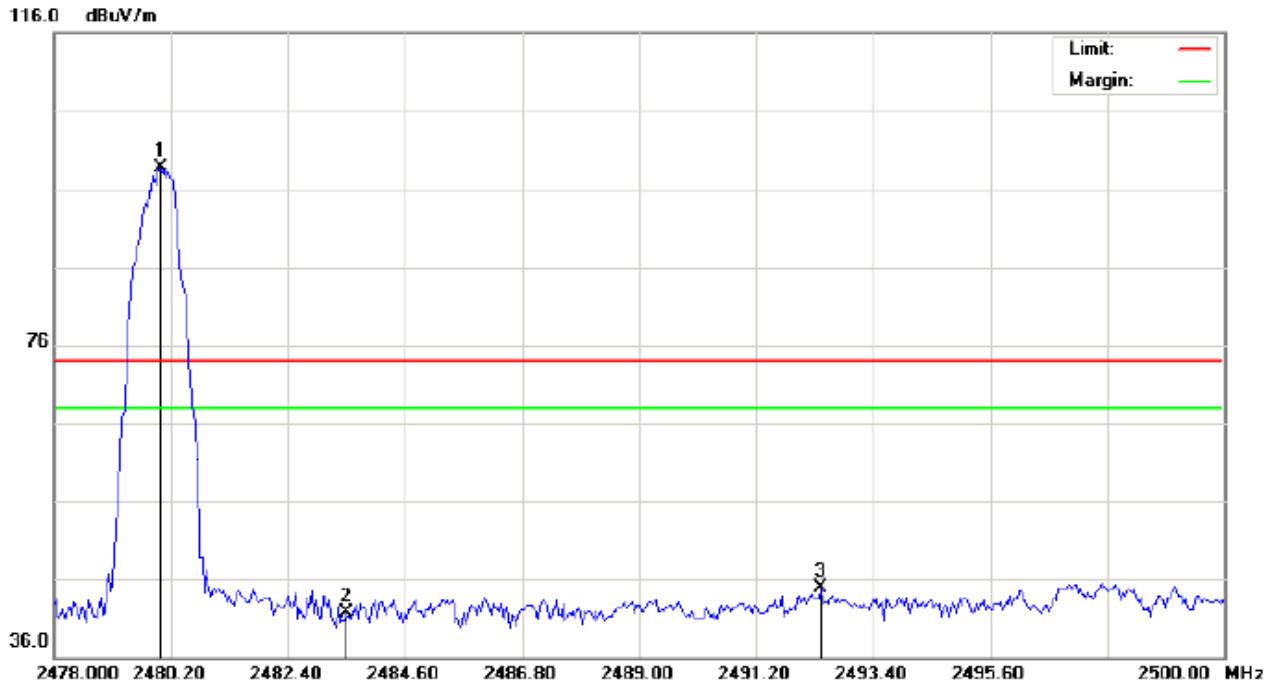

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT:Wireless 3D Speaker Distance:
M/N:CBT612
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.35	10.41	98.76	74.00	24.76	peak			
2		2483.500	31.37	10.41	41.78	74.00	-32.22	peak			
3		2492.410	34.41	10.42	44.83	74.00	-29.17	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 $RBW \geq 1\% \text{ of the } 20 \text{ dB bandwidth}$, $VBW \geq RBW$; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

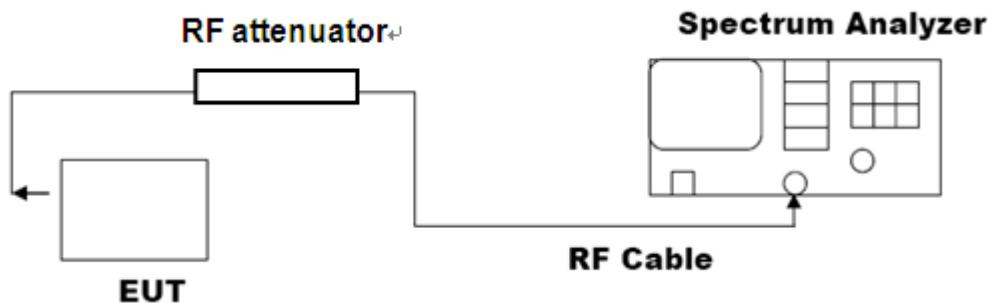


Note: The EUT has been used temporary antenna connector for testing.

10.3. LIMITS AND MEASUREMENT RESULTS


FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
N/A	Low Channel	1.084	PASS
	Middle Channel	2.036	PASS
	High Channel	1.069	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

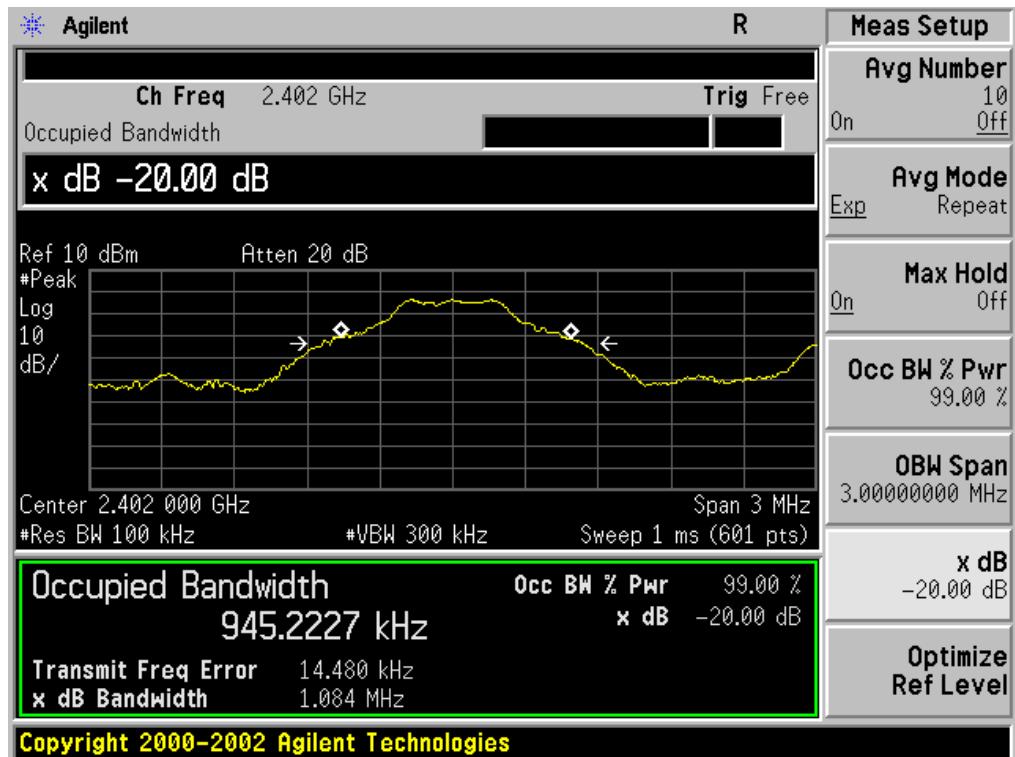

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

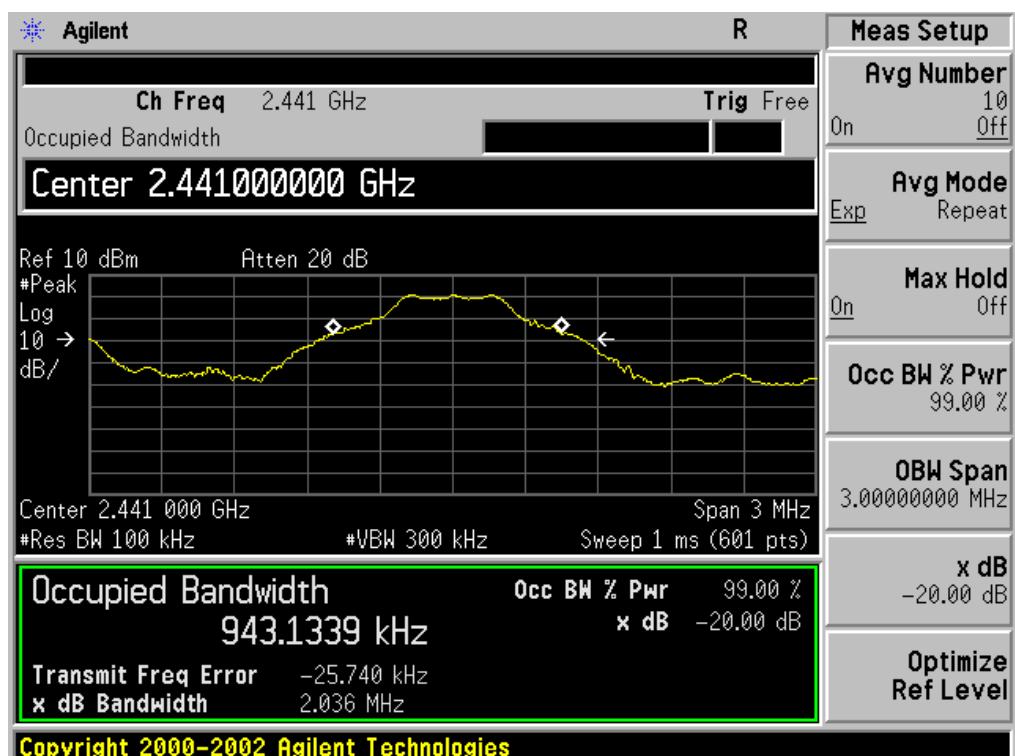


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

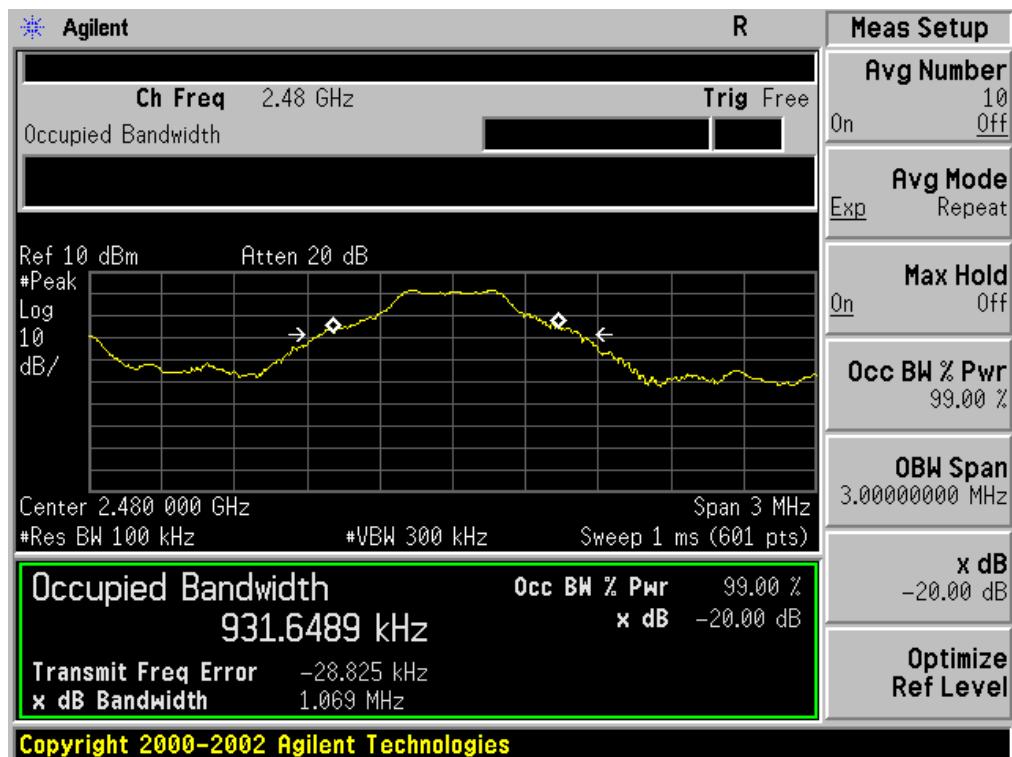


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT

Applicable Limits	Measurement Result	
	Test Data (MHz)	Criteria
N/A	Low Channel	1.350
	Middle Channel	1.392
	High Channel	1.349

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

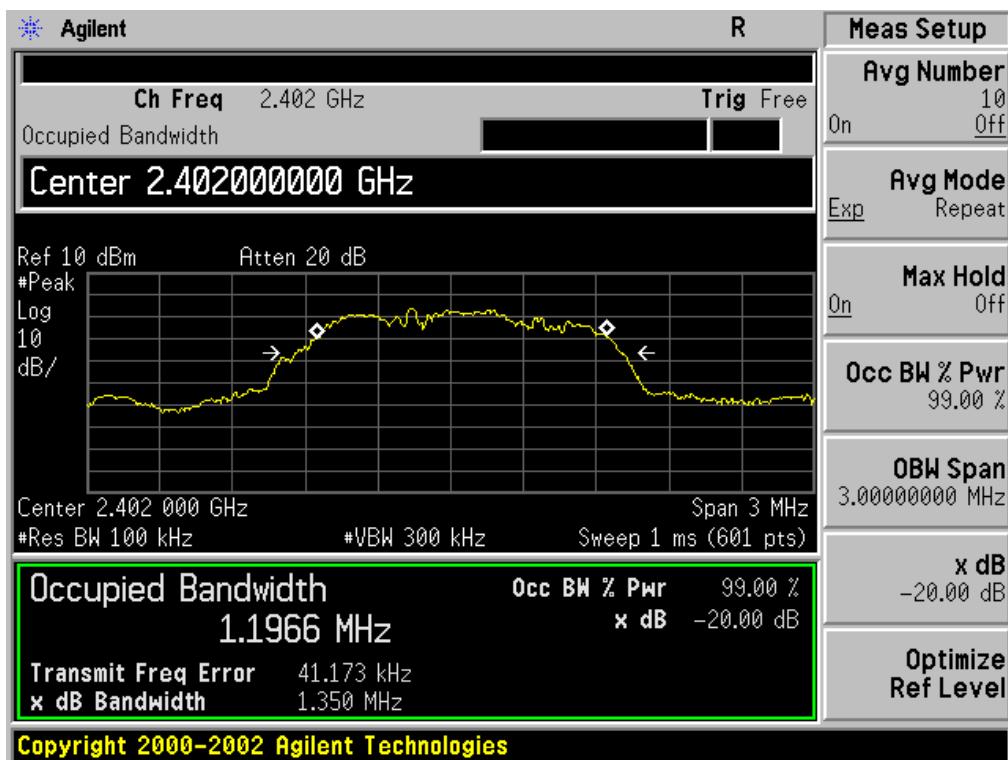

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

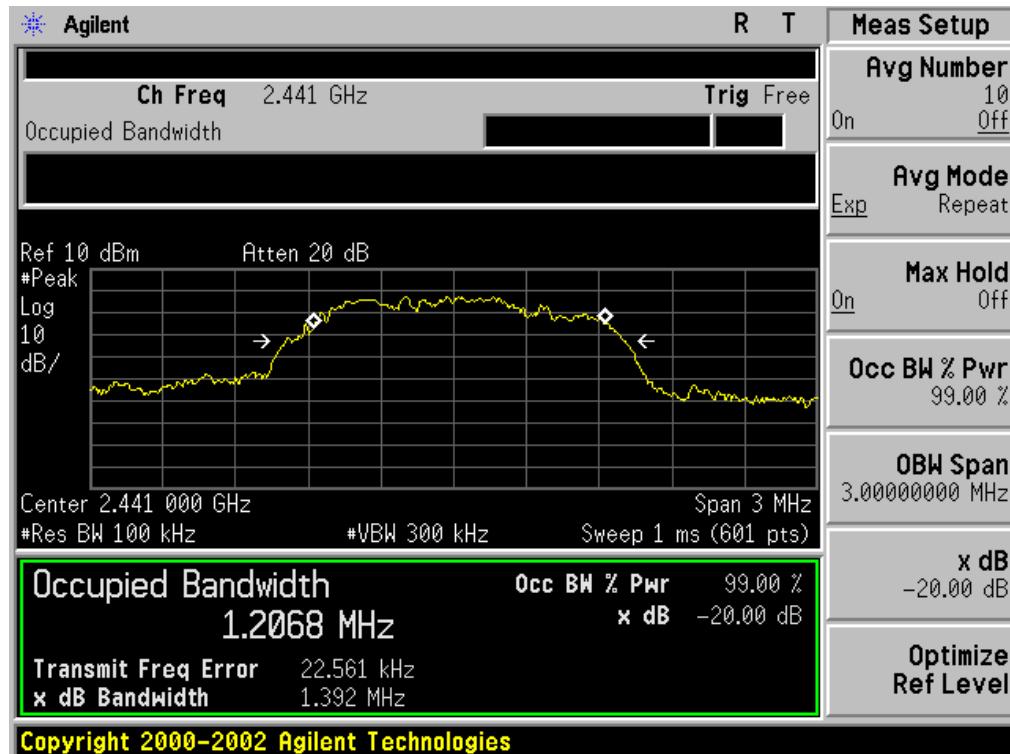


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL




BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT

Applicable Limits	Measurement Result	
	Test Data (MHz)	Criteria
N/A	Low Channel	1.354
	Middle Channel	1.340
	High Channel	1.338

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

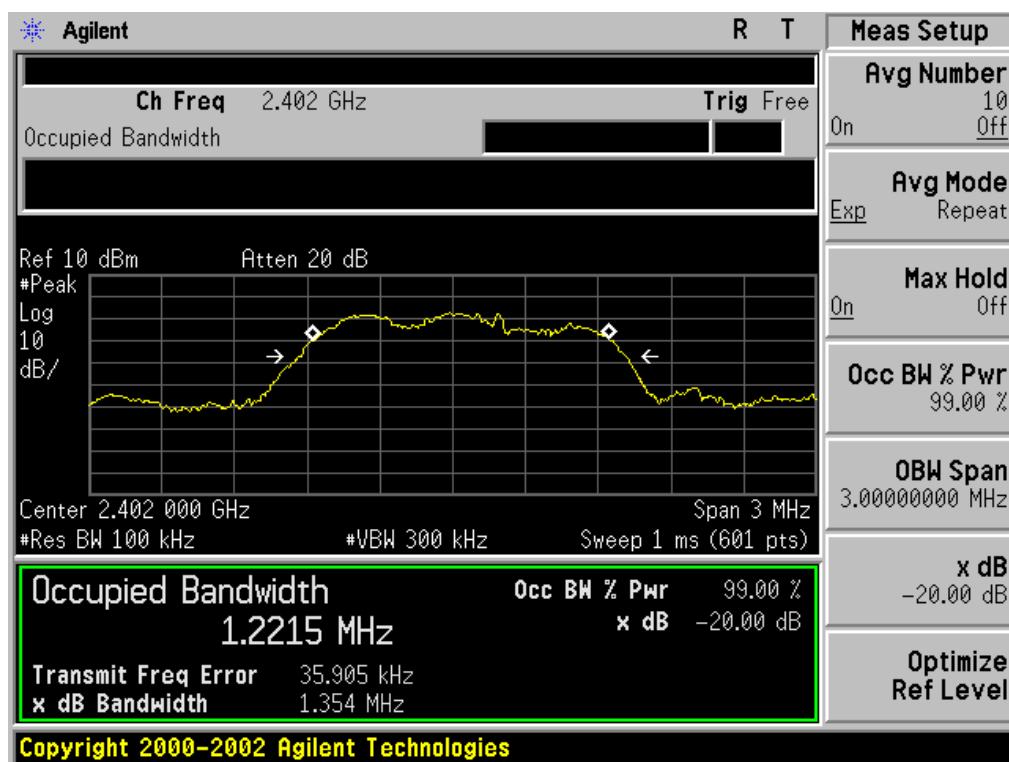


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

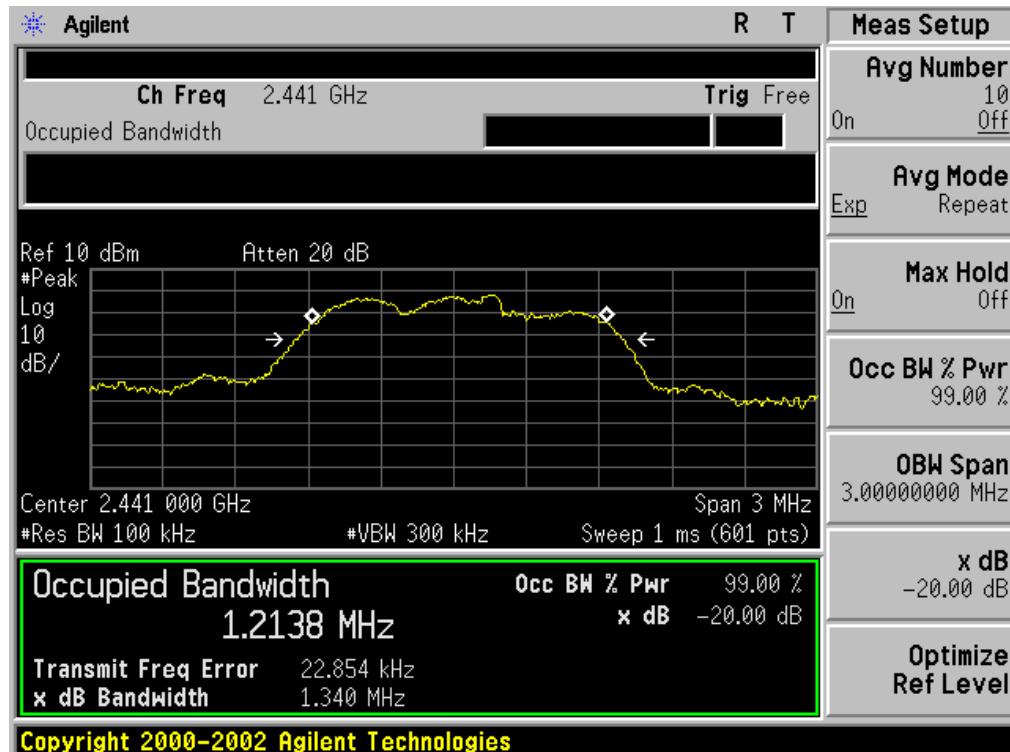


FOR BLE

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.204	PASS
	Middle Channel	1.196	PASS
	High Channel	1.201	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

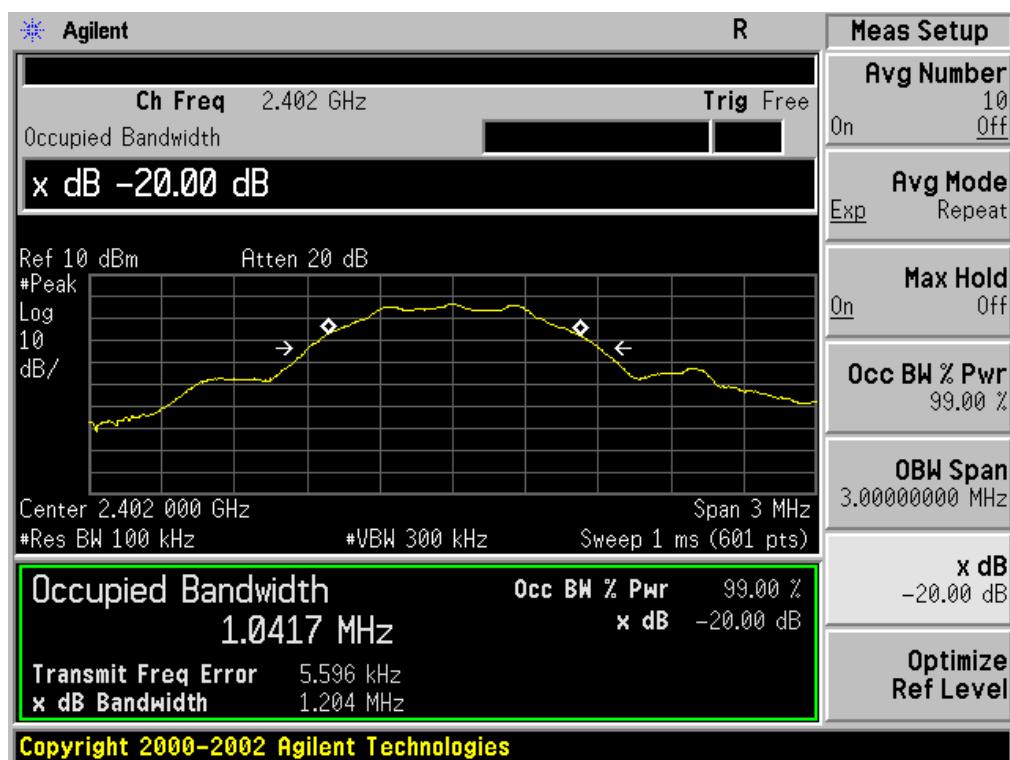

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

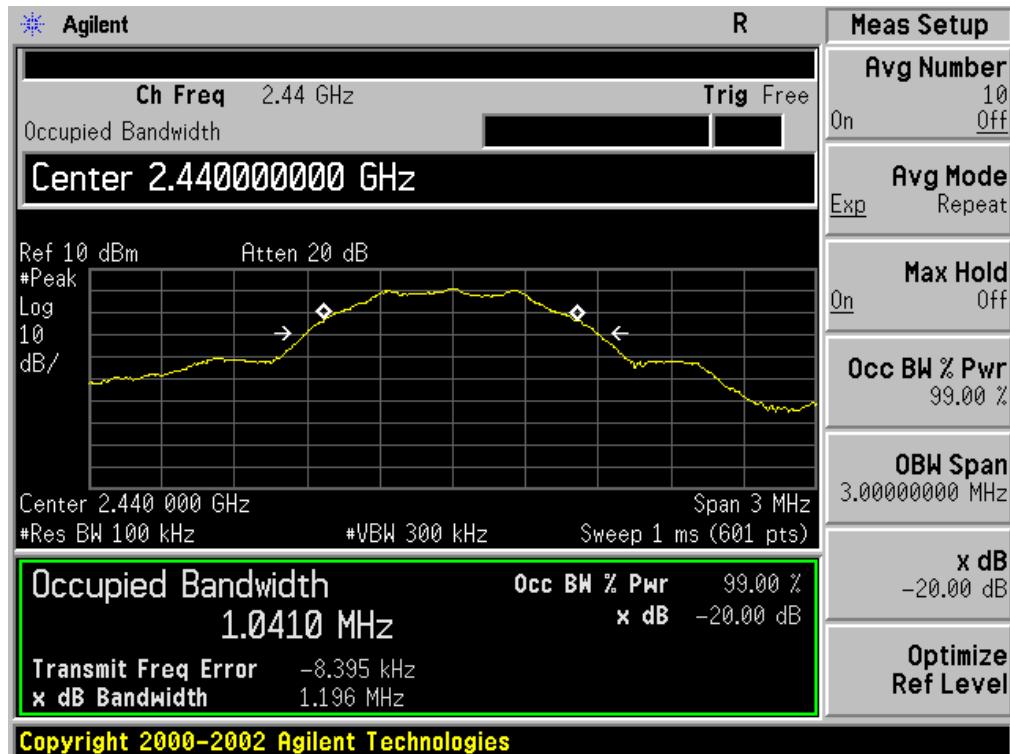

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

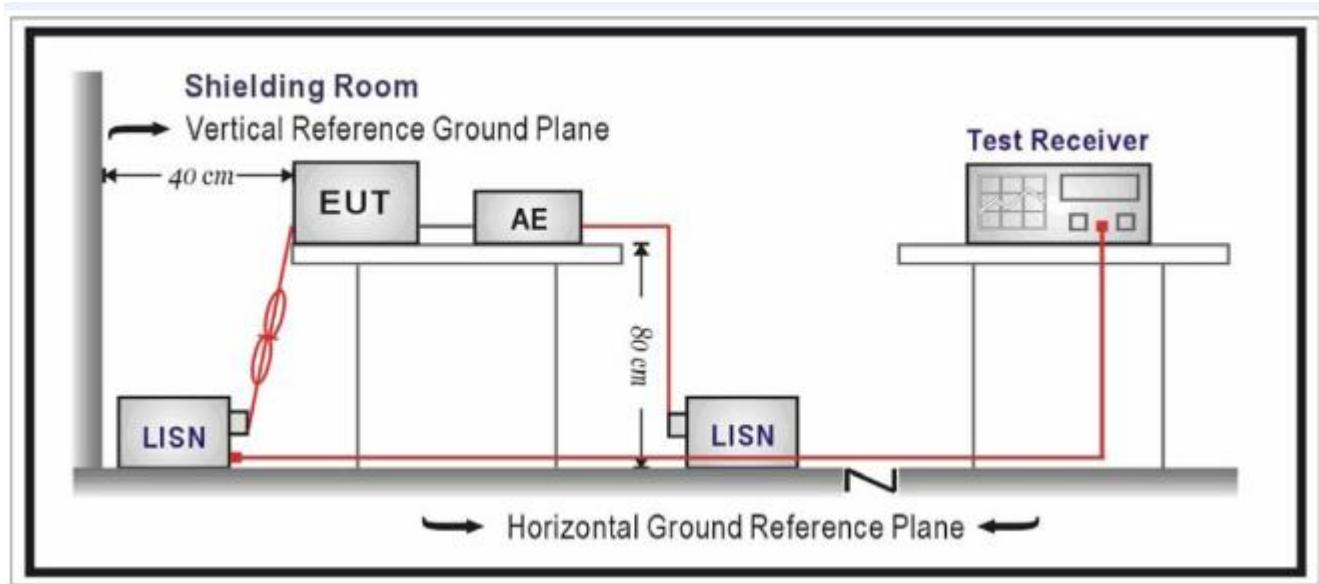

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter which received 120V/60Hzpower by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported.

**11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST
FOR BR/EDR**


Line Conducted Emission Test Line 1-L

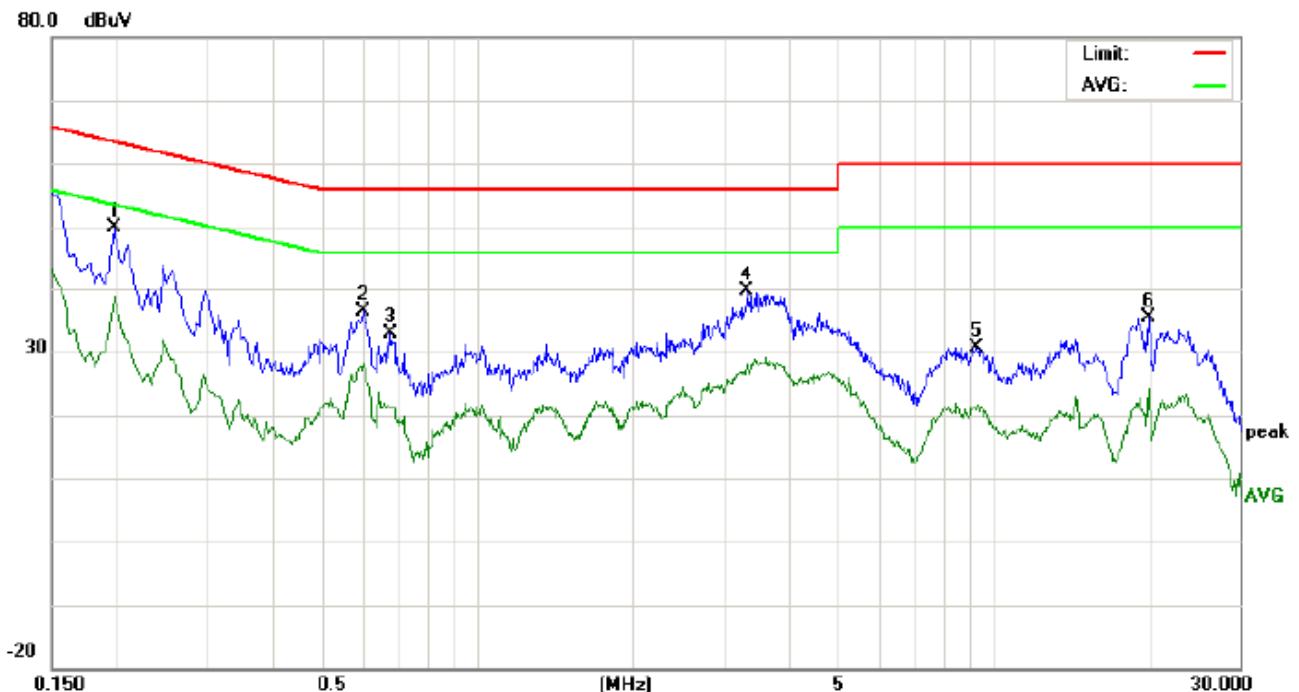

Site: Conduction Phase: **L1** Temperature: 23.9
 Limit: FCC Class B Conduction(QP) Power: Humidity: 55.2 %
 EUT:Wireless 3D Speaker
 M/N:CBT612
 Mode:BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.1980	39.69		28.48	10.21	49.90		38.69	63.69	53.69	-13.79	-15.00	P	
2	0.6020	26.19		17.72	10.31	36.50		28.03	56.00	46.00	-19.50	-17.97	P	
3	0.6820	44.92		32.68	10.34	55.26		43.02	56.00	46.00	-0.74	-2.98	P	
4	3.3380	28.98		17.15	10.52	39.50		27.67	56.00	46.00	-16.50	-18.33	P	
5	9.2659	20.45		10.66	10.30	30.75		20.96	60.00	50.00	-29.25	-29.04	P	
6	20.0180	25.28		14.06	10.11	35.39		24.17	60.00	50.00	-24.61	-25.83	P	

Line Conducted Emission Test Line 2-N

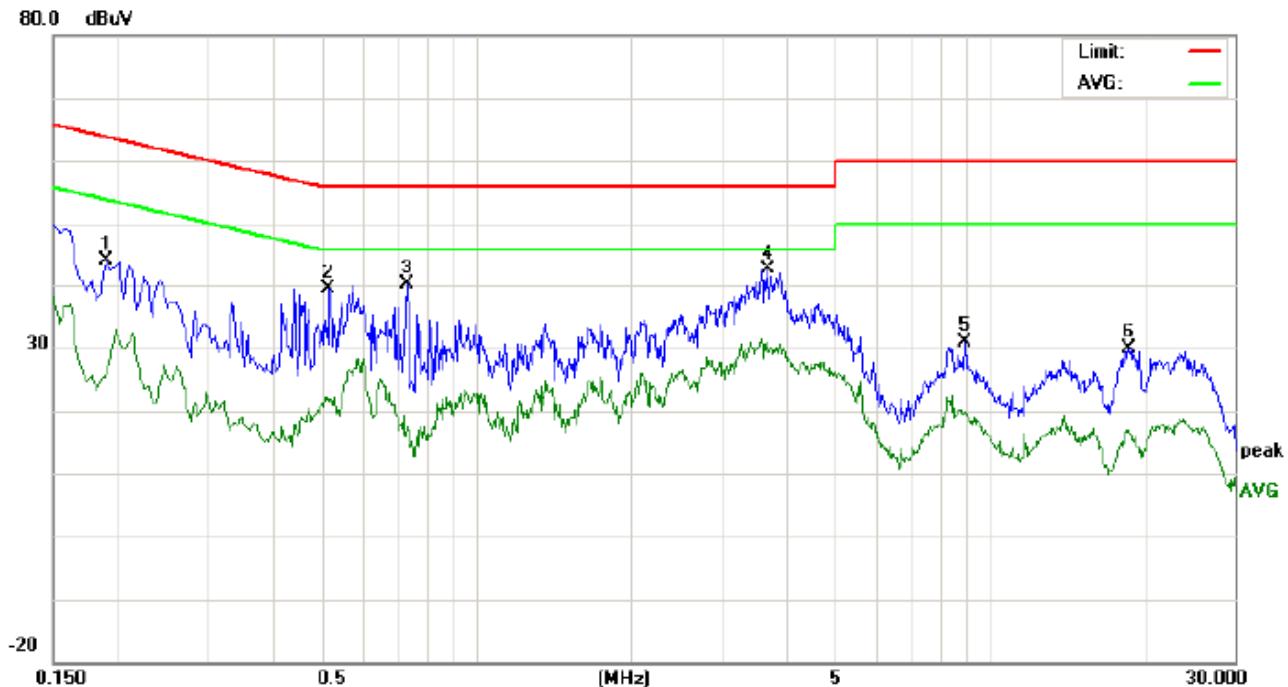


Site: Conduction Phase: **N** Temperature: 23.9
 Limit: FCC Class B Conduction(QP) Power: Humidity: 55.2 %
 EUT:Wireless 3D Speaker
 M/N:CBT612
 Mode:BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1900	33.96		15.68	10.20	44.16		25.88	64.03	54.03	-19.87	-28.15	P	
2	0.5180	29.09		11.55	10.38	39.47		21.93	56.00	46.00	-16.53	-24.07	P	
3	0.7339	29.82		7.09	10.33	40.15		17.42	56.00	46.00	-15.85	-28.58	P	
4	3.6939	32.23		20.42	10.48	42.71		30.90	56.00	46.00	-13.29	-15.10	P	
5	8.9298	20.56		9.57	10.23	30.79		19.80	60.00	50.00	-29.21	-30.20	P	
6	18.6339	19.67		6.78	10.12	29.79		16.90	60.00	50.00	-30.21	-33.10	P	

FOR BLE


Line Conducted Emission Test Line 1-L

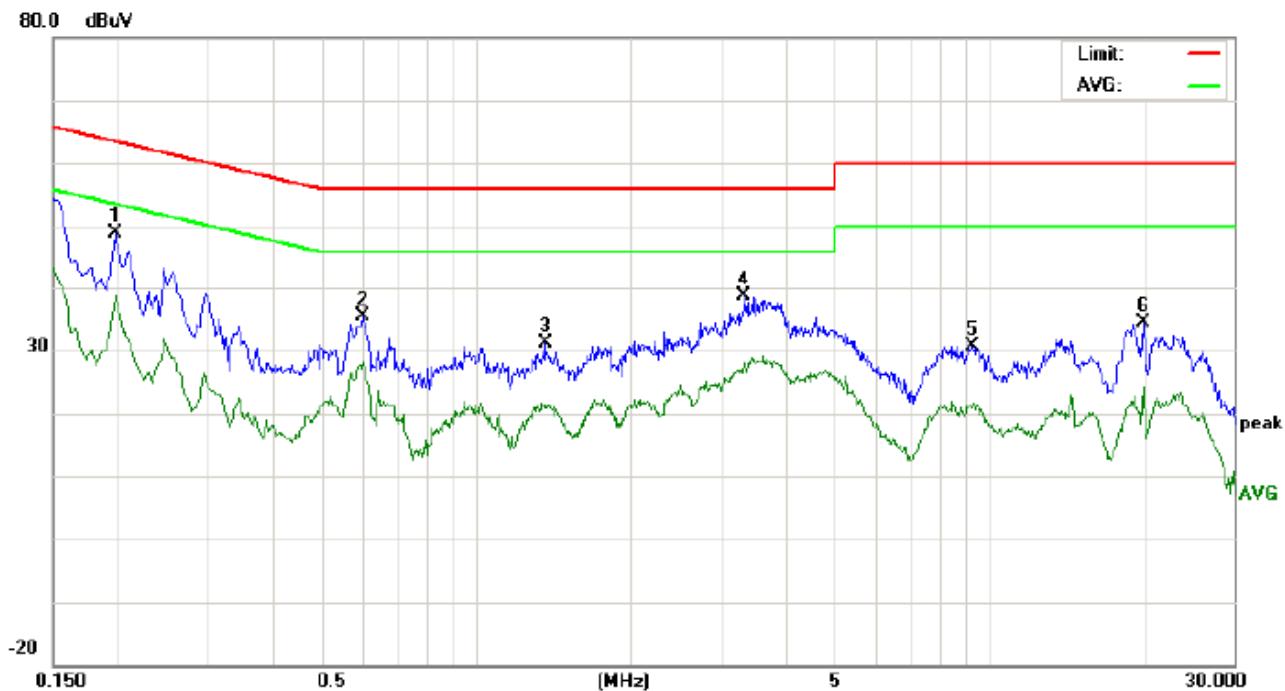

Site: Conduction Phase: **L1** Temperature: 23.9
 Limit: FCC Class B Conduction(QP) Power: Humidity: 55.2 %
 EUT:Wireless 3D Speaker
 M/N:CBT612
 Mode:BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.1980	38.69		28.48	10.21	48.90		38.69	63.69	53.69	-14.79	-15.00	P	
2	0.6019	25.19		17.72	10.31	35.50		28.03	56.00	46.00	-20.50	-17.97	P	
3	1.3619	20.71		11.07	10.38	31.09		21.45	56.00	46.00	-24.91	-24.55	P	
4	3.3380	27.98		17.15	10.52	38.50		27.67	56.00	46.00	-17.50	-18.33	P	
5	9.2659	20.45		10.66	10.30	30.75		20.96	60.00	50.00	-29.25	-29.04	P	
6	20.0180	24.28		14.06	10.11	34.39		24.17	60.00	50.00	-25.61	-25.83	P	

Line Conducted Emission Test Line 2-N

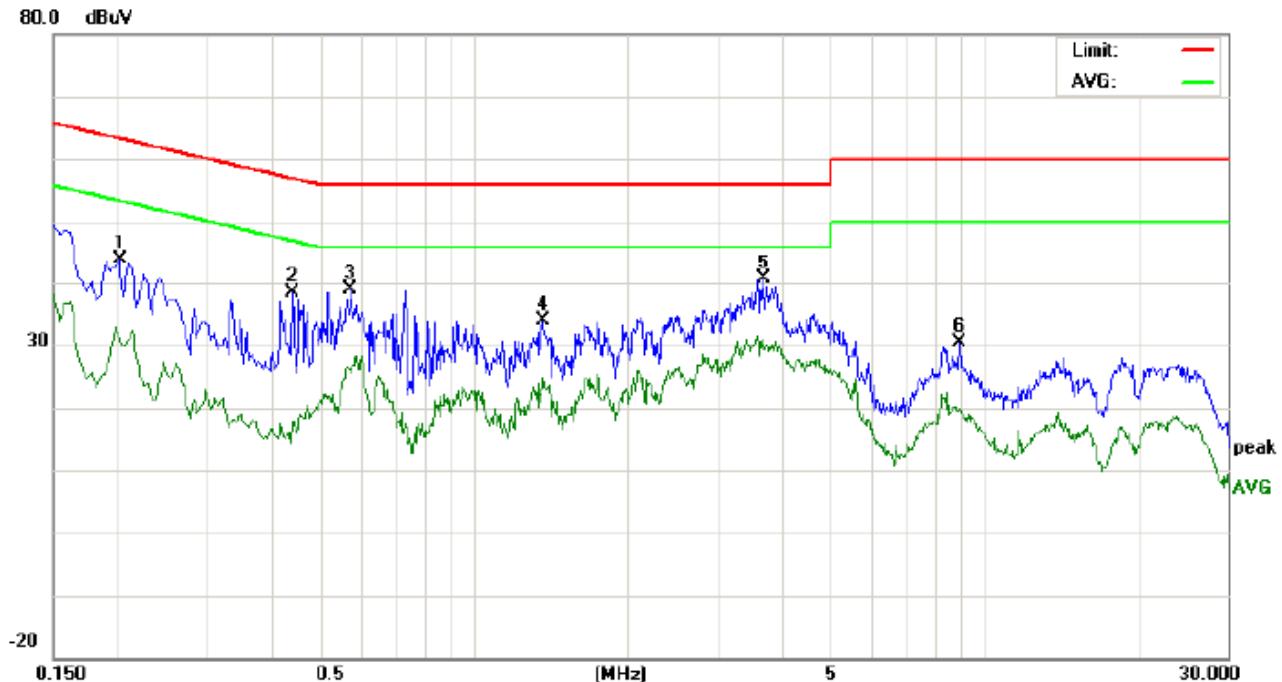

Site: Conduction Phase: N Temperature: 23.9
 Limit: FCC Class B Conduction(QP) Power: Humidity: 55.2 %
 EUT: Wireless 3D Speaker
 M/N: CBT612
 Mode: BT Link with charging
 Note:


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.2020	33.70		20.67	10.22	43.92		30.89	63.52	53.52	-19.60	-22.63	P	
2	0.4420	27.97		7.57	10.36	38.33		17.93	57.02	47.02	-18.69	-29.09	P	
3	0.5738	28.61		15.23	10.33	38.94		25.56	56.00	46.00	-17.06	-20.44	P	
4	1.3619	23.50		12.75	10.38	33.88		23.13	56.00	46.00	-22.12	-22.87	P	
5	3.6939	30.23		20.42	10.48	40.71		30.90	56.00	46.00	-15.29	-15.10	P	
6	8.9298	20.06		9.57	10.23	30.29		19.80	60.00	50.00	-29.71	-30.20	P	

APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

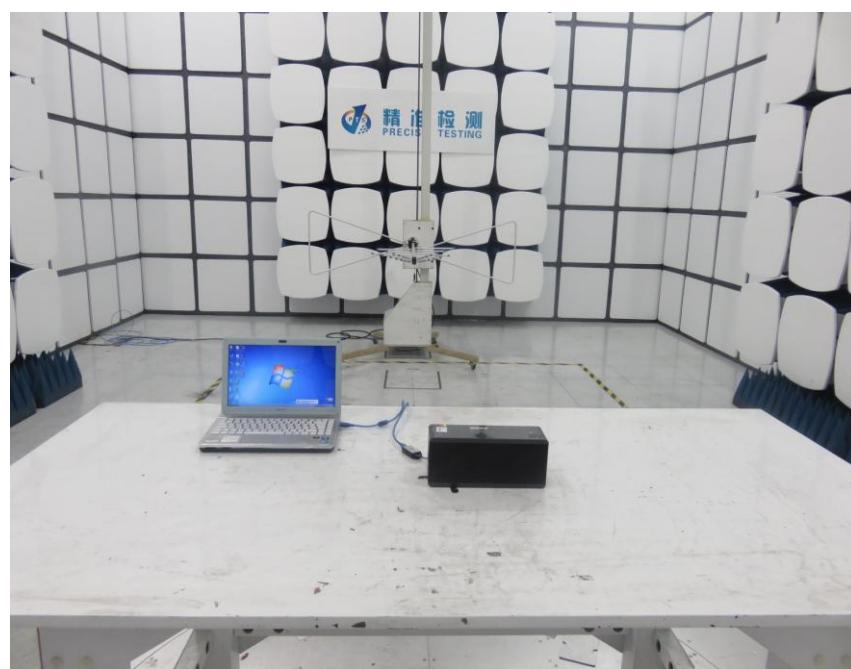


FCC RADIATED EMISSION ABOVE 1G TEST SETUP

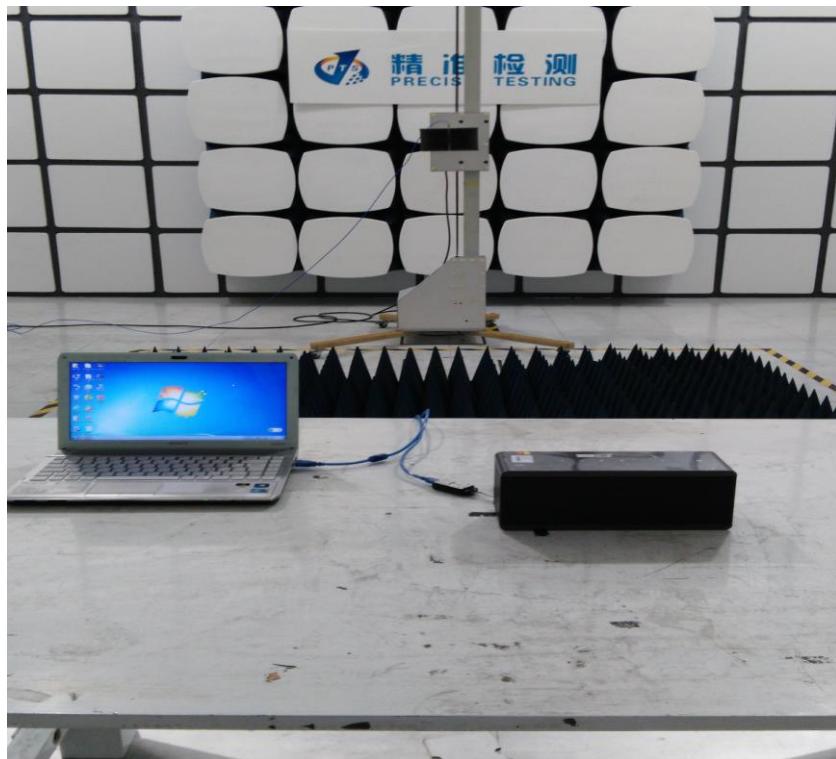


APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT

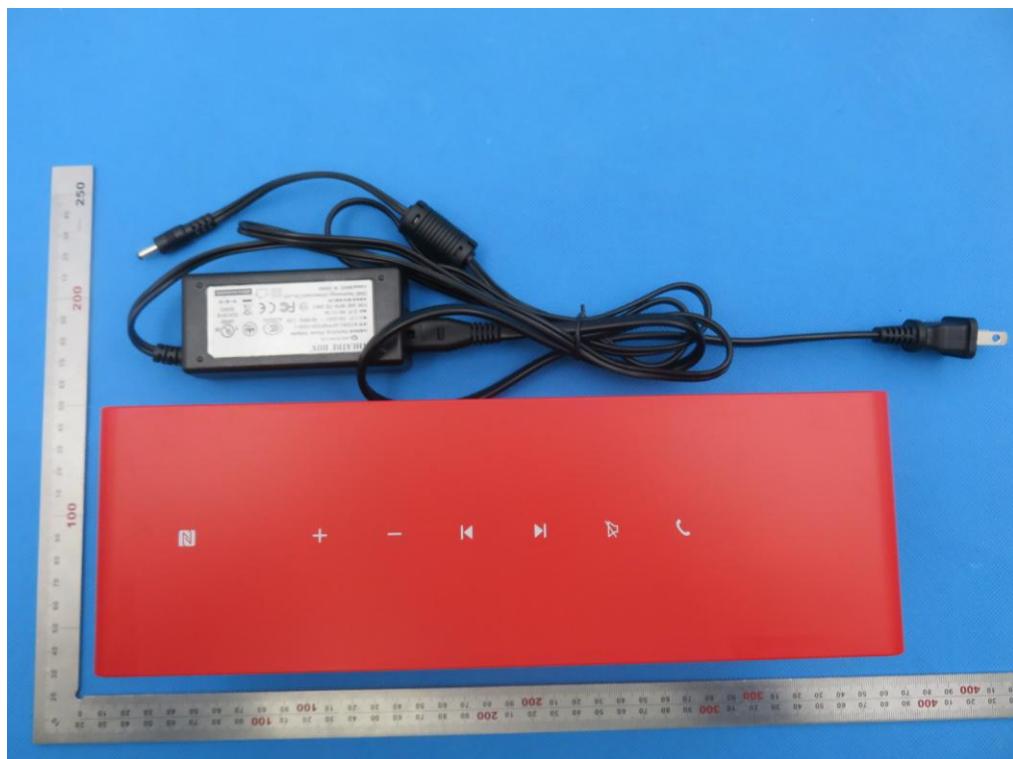


TOP VIEW OF EUT

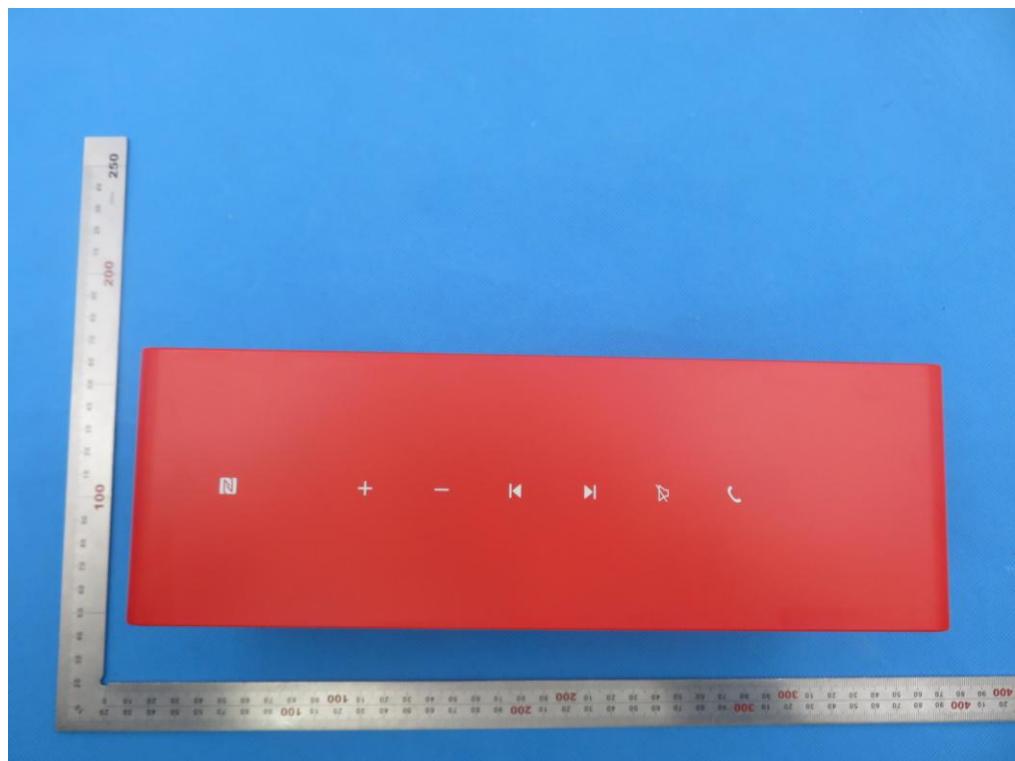


BOTTOM VIEW OF EUT




FRONT VIEW OF EUT

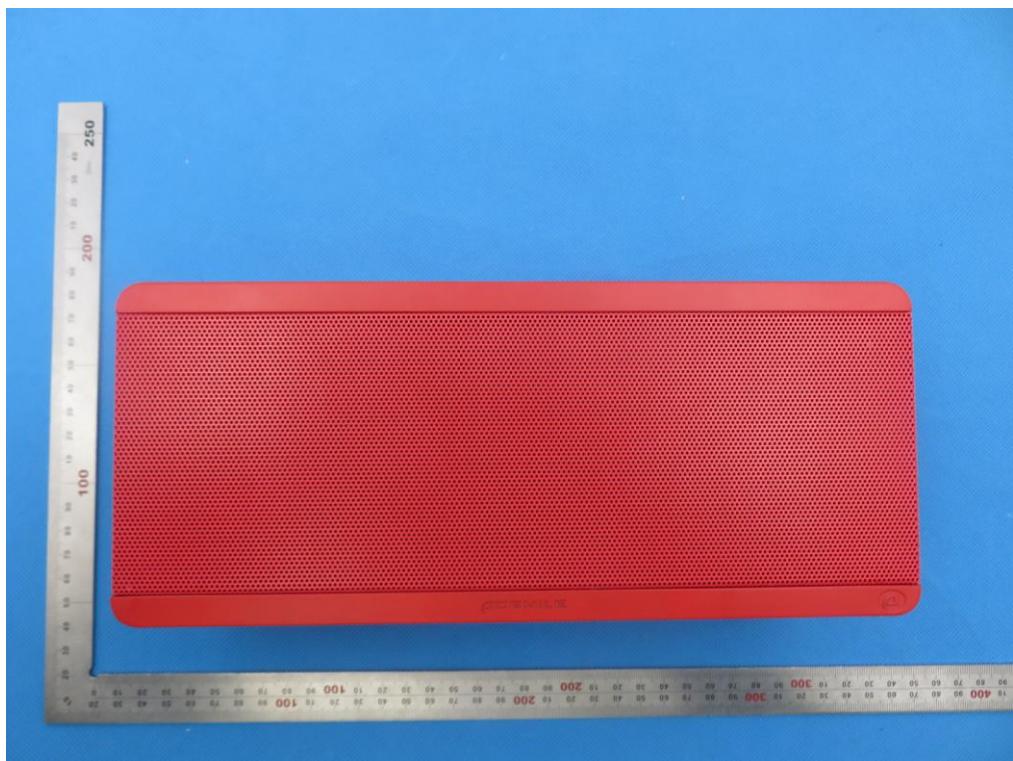


BACK VIEW OF EUT

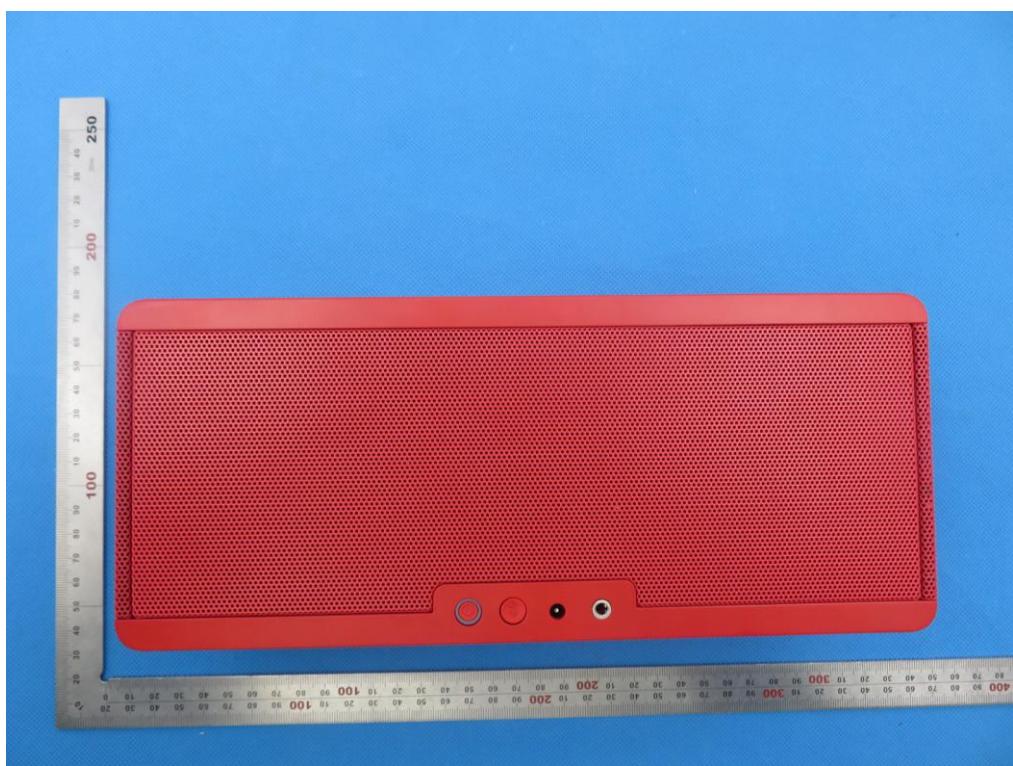


LEFT VIEW OF EUT

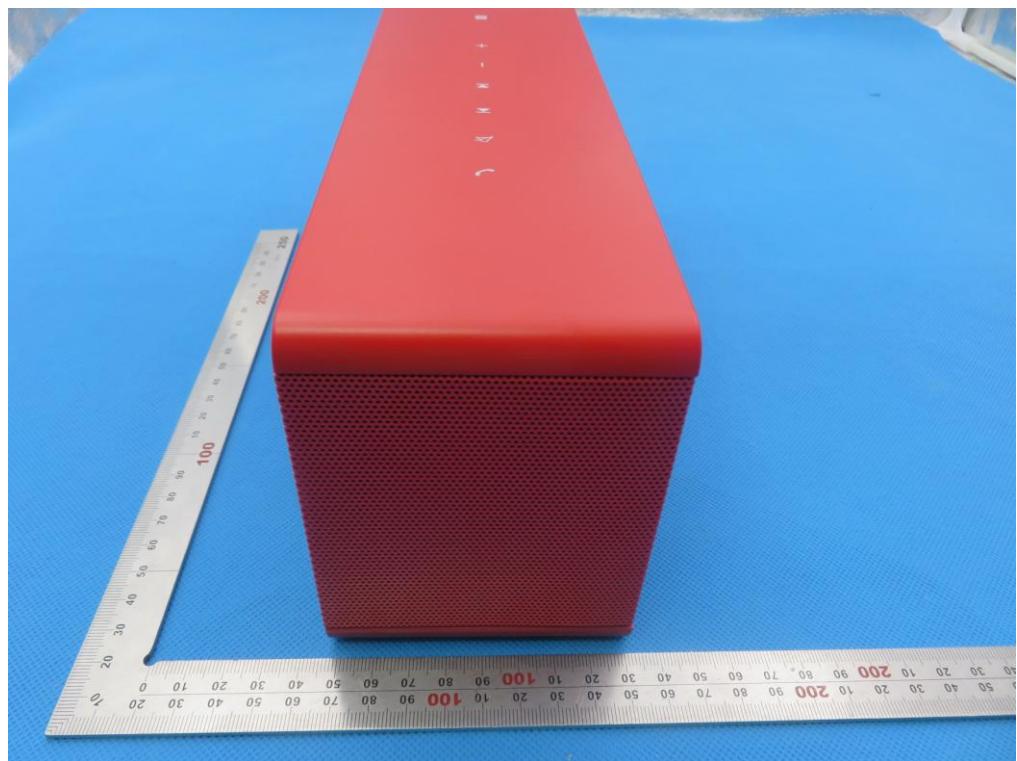


RIGHT VIEW OF EUT

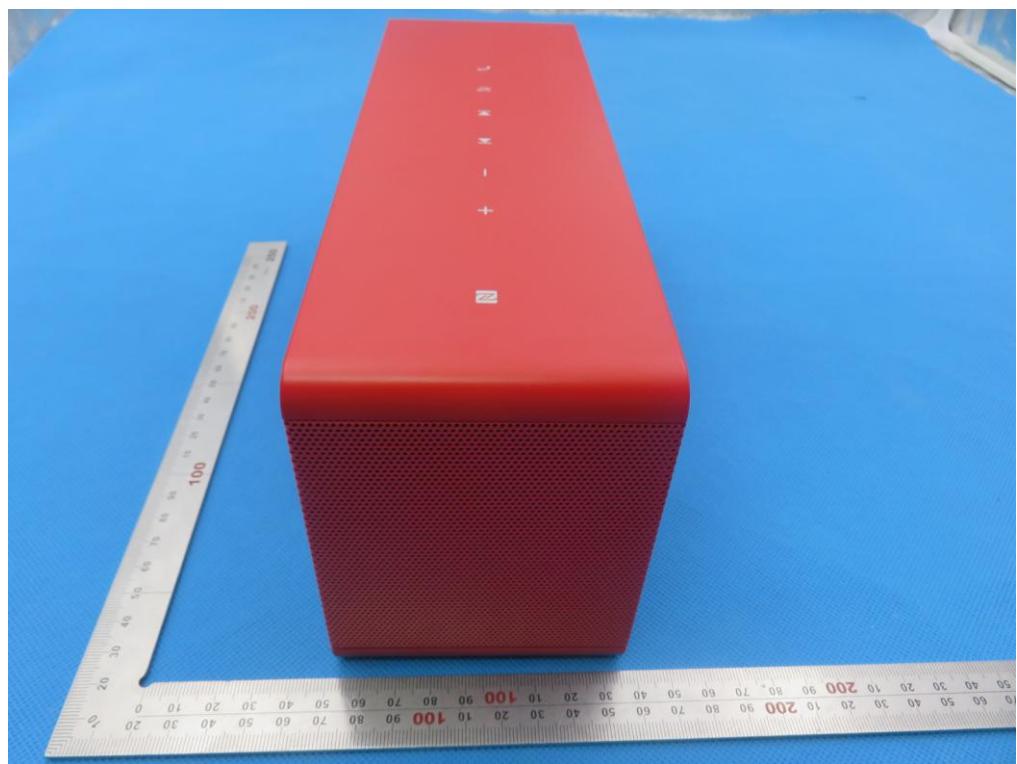


OPEN VIEW OF EUT-1

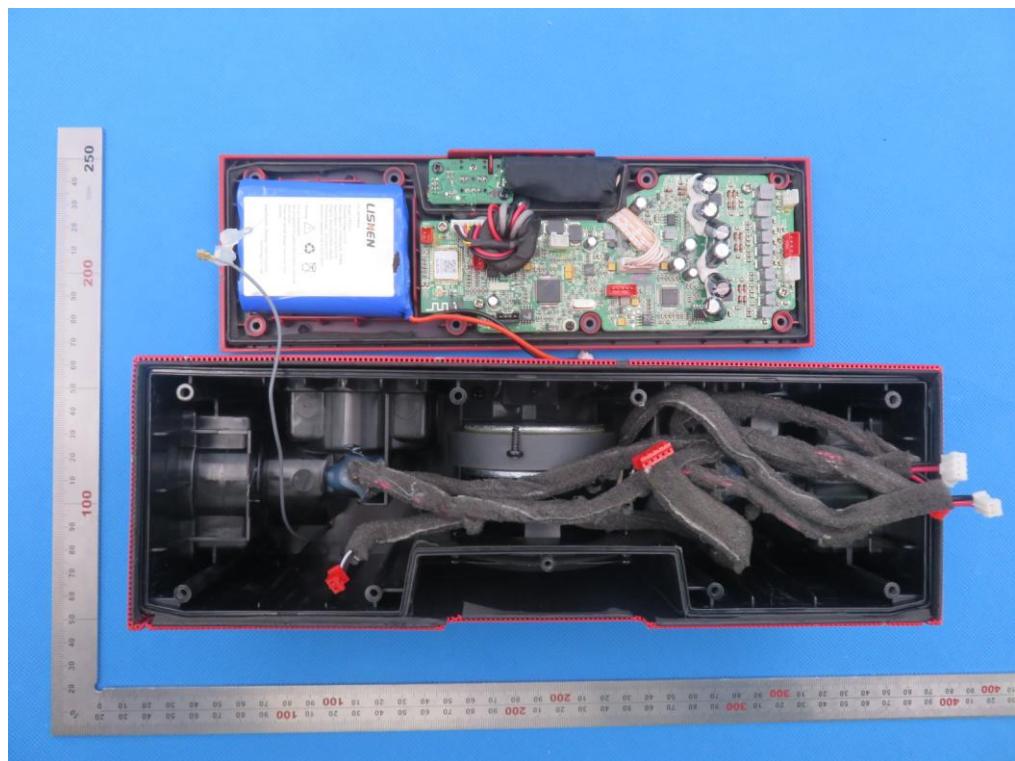


OPEN VIEW OF EUT-2

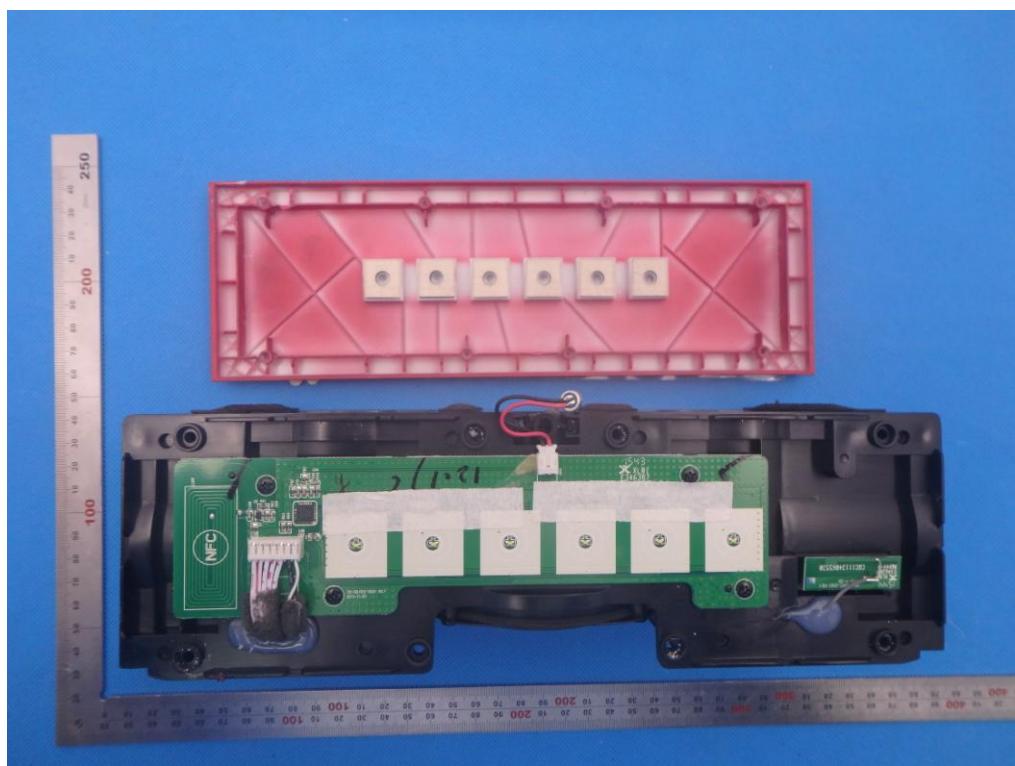


INTERNAL VIEW OF EUT-1

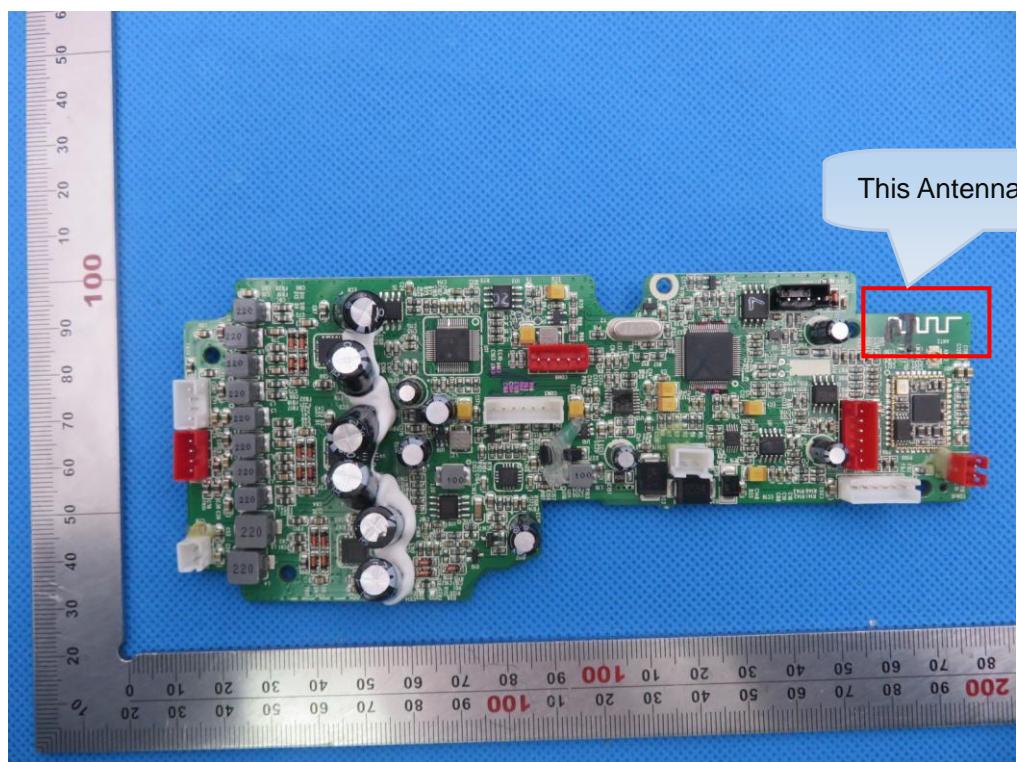


INTERNAL VIEW OF EUT-2

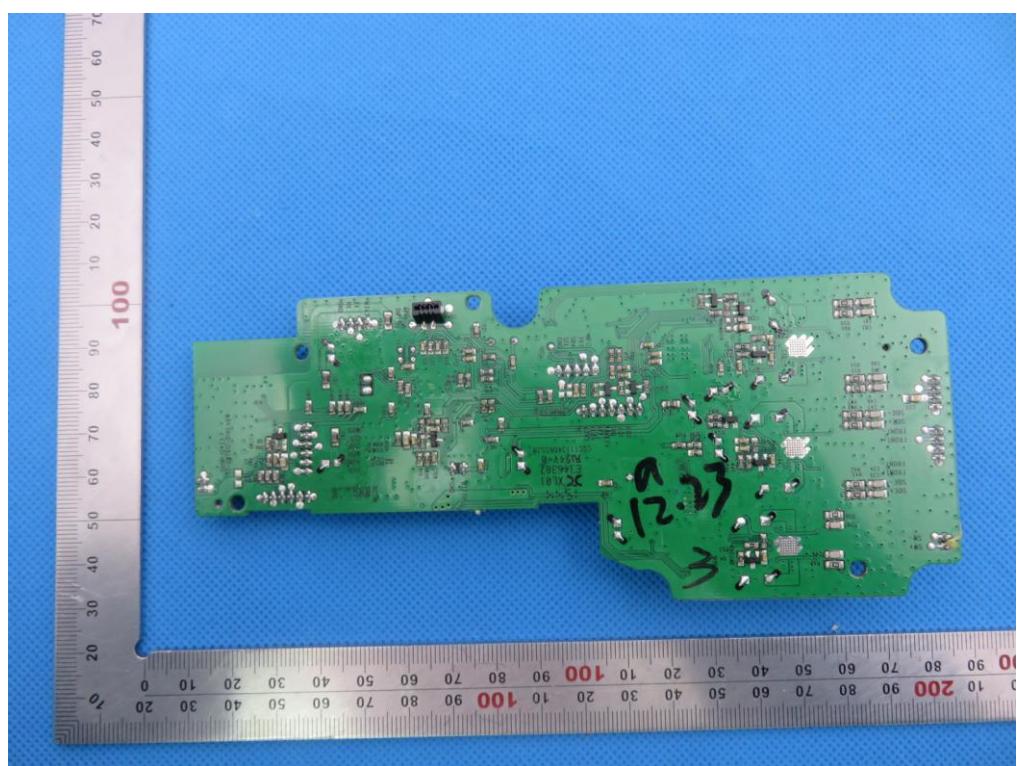


INTERNAL VIEW OF EUT-3

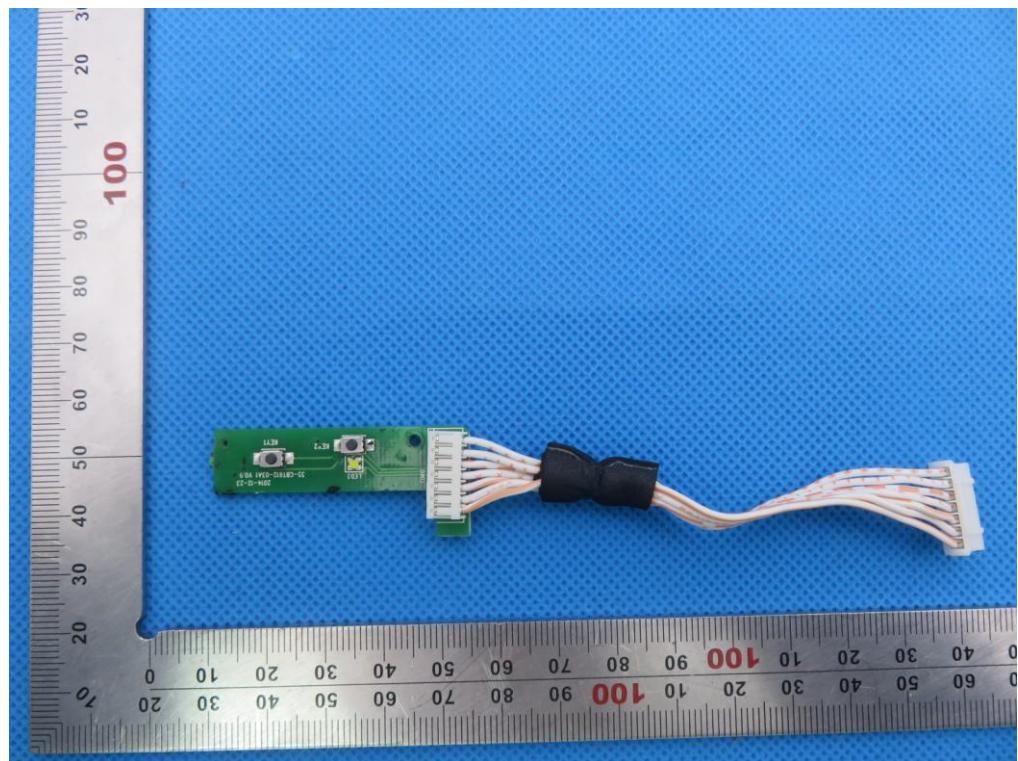


INTERNAL VIEW OF EUT-4

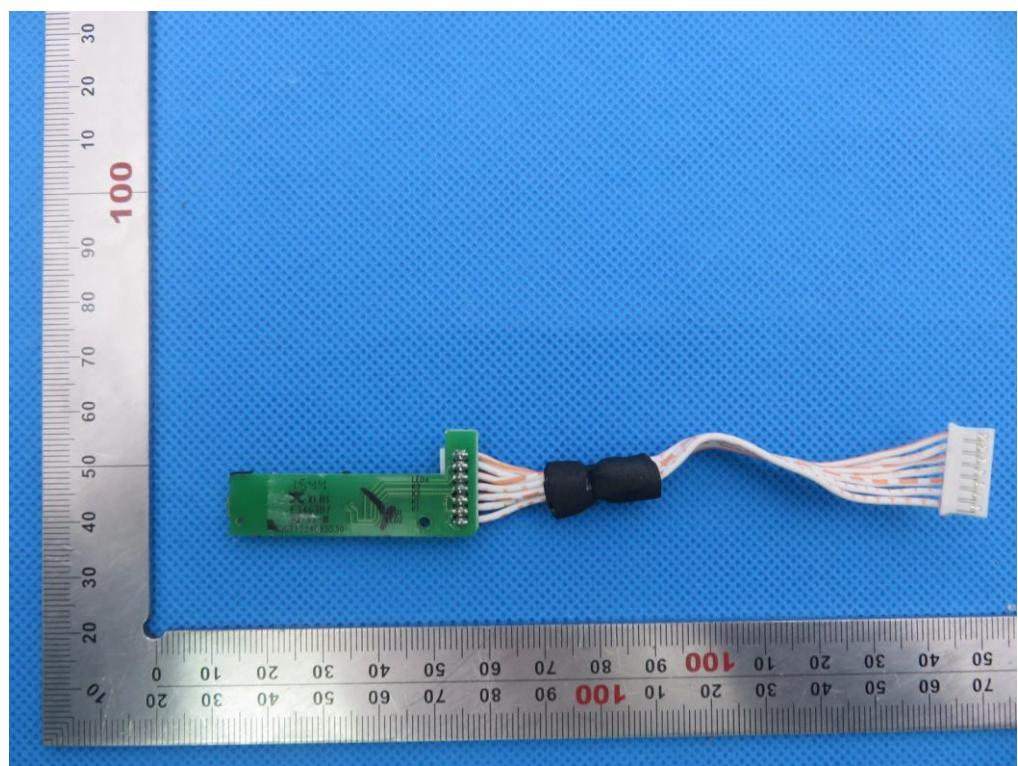


INTERNAL VIEW OF EUT-5

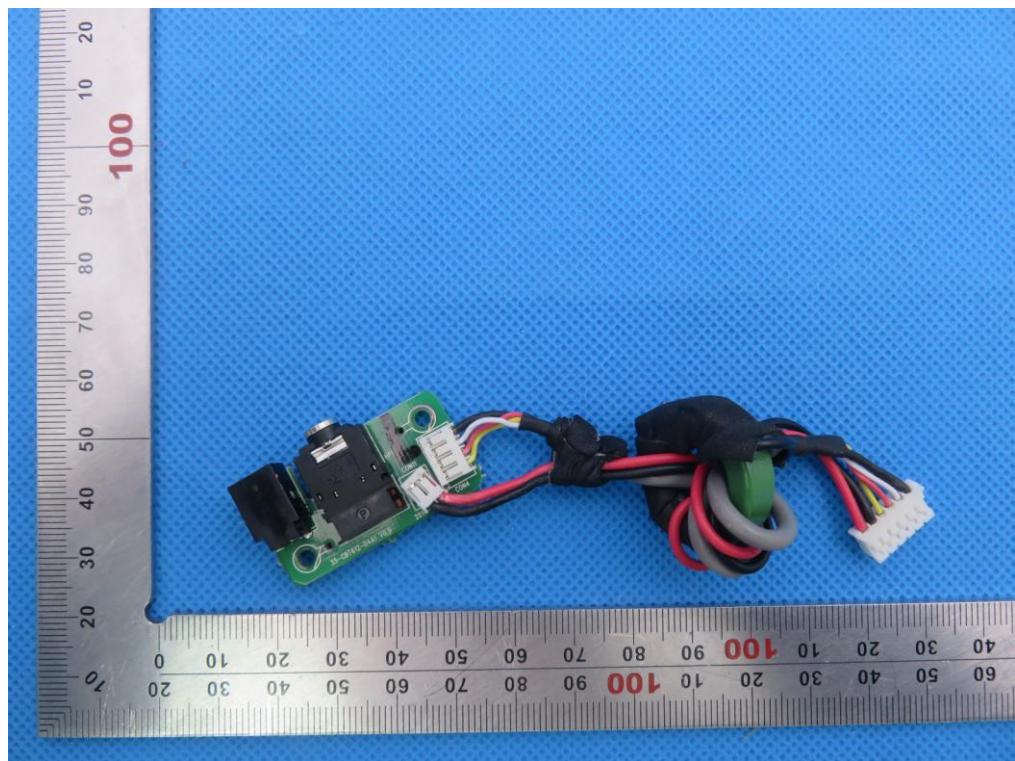


INTERNAL VIEW OF EUT-6

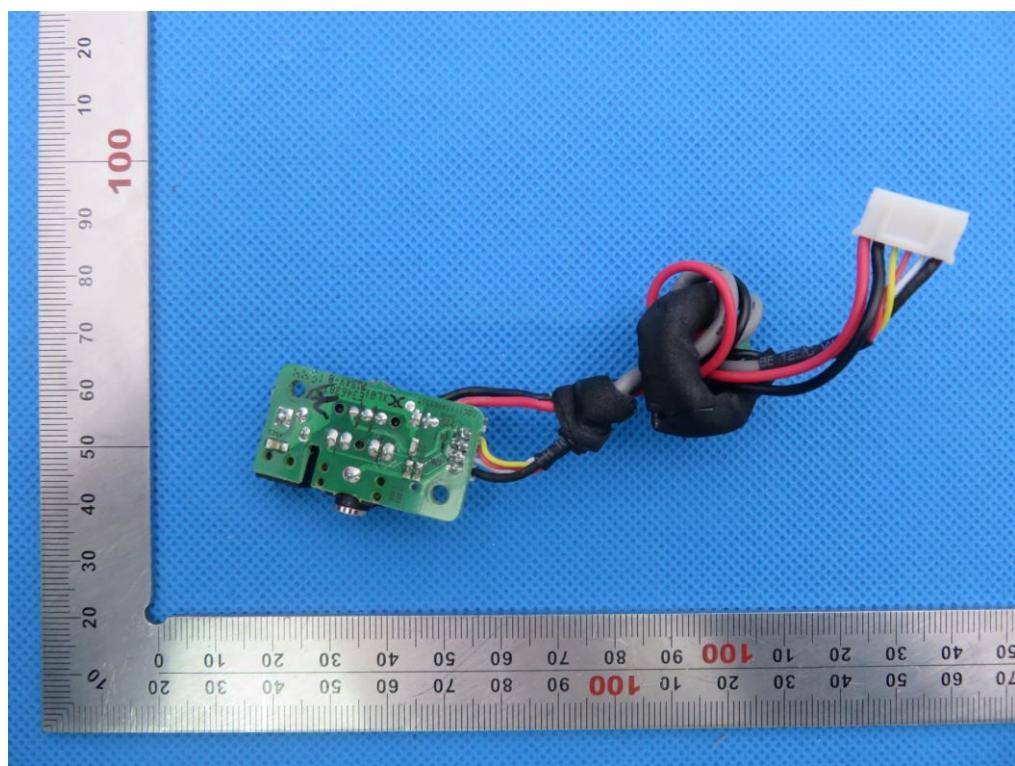


INTERNAL VIEW OF EUT-7

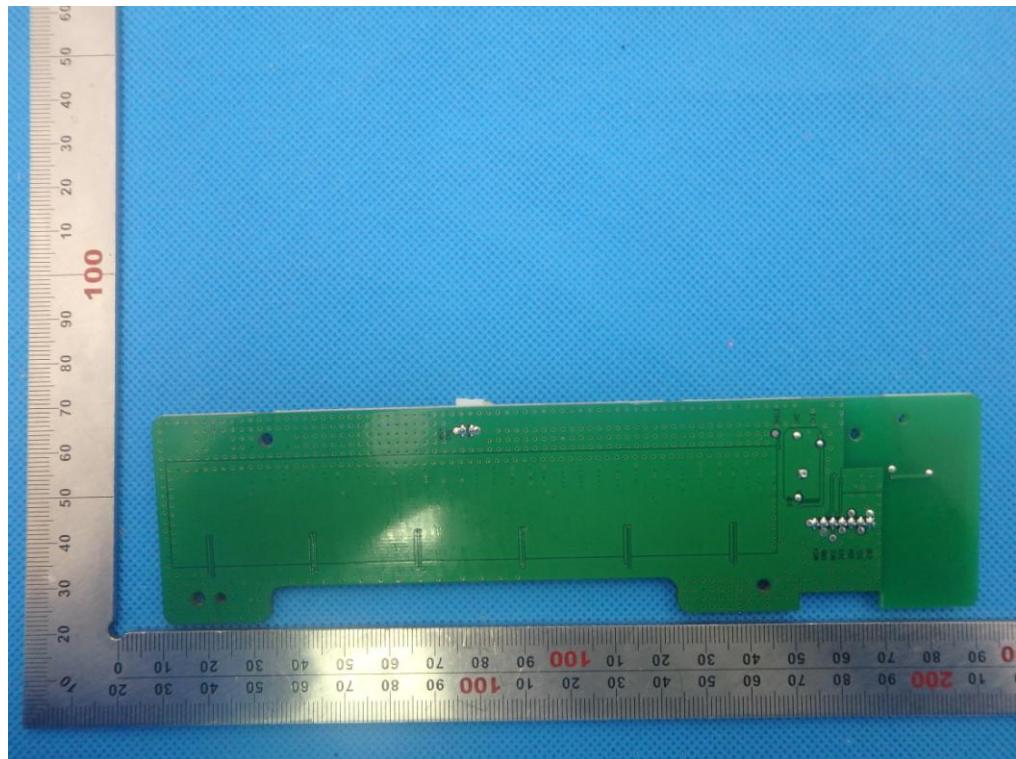

INTERNAL VIEW OF EUT-8

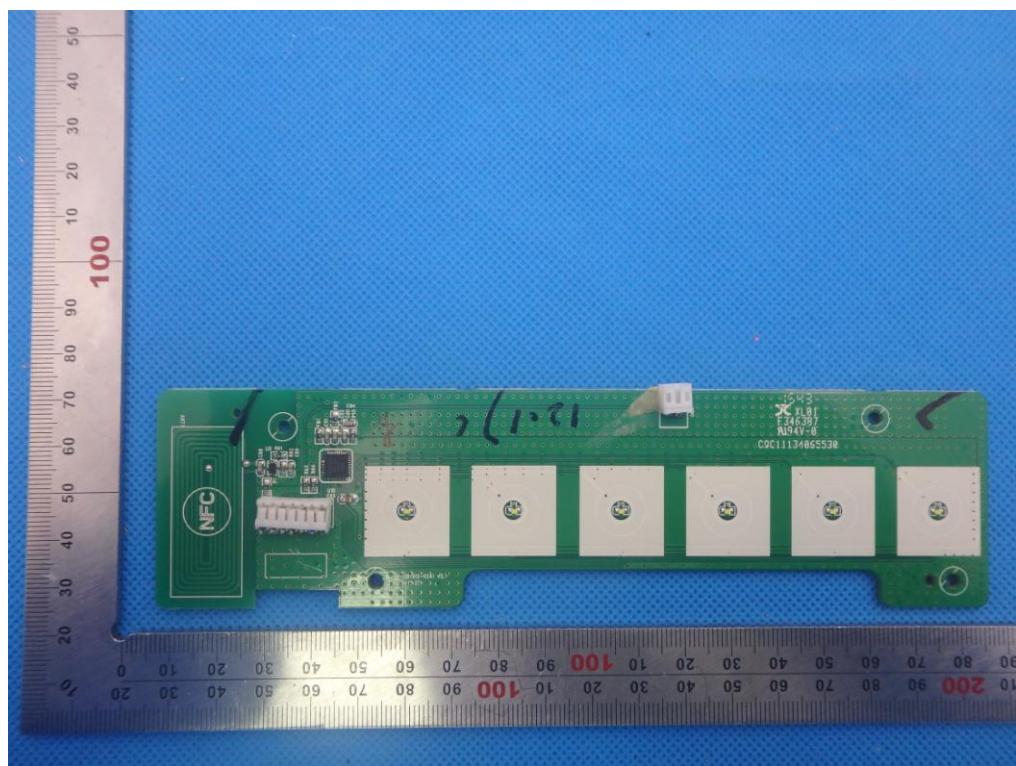

INTERNAL VIEW OF EUT-9

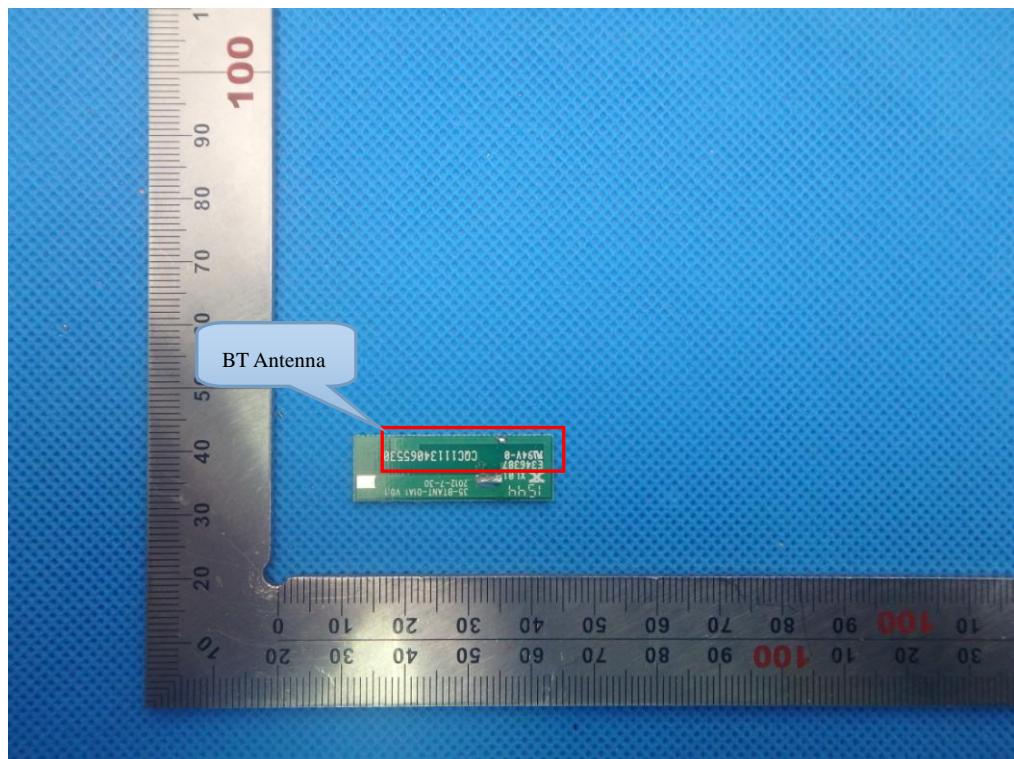

INTERNAL VIEW OF EUT-10



----END OF REPORT----