

FCC ID TEST REPORT

for

Sports Sunglasses Camera

Model: S62

FCC ID: 2ADOARC

Prepared for: Shenghong Electronic Science & Technology Co., Ltd.
Earnway Star Sakta Industrial Building, North Dawugang,
Shiwan, Foshan, Guangdong, China.

Prepared by: Shenzhen TCT Testing Technology Co.,Ltd
1F, Building 1, Yibaolai Industrial Park, Qiaotou Village, Fuyong Town,
Baoan District, Shenzhen, Guangdong, China

TEL: +86-0755-27673339

FAX: +86-0755-27673332

Report Number: TCT141029E008
Date of Test: Oct. 29-Dec. 02, 2014
Date of Report: Dec. 02, 2014

The results detailed in this test report relate only to the specific sample(s) tested. It is the Application's responsibility to ensure that all production units are manufactured with equivalent EMC characteristics. This report is not to be reproduced except in full, without written approval from TCT Testing Technology.

Table of Contents

1.0 General Details	3
1.1 Test Lab Details	3
1.2 Applicant Details	3
1.3 Description of EUT.....	4
1.4 Statement	4
1.5 Test Engineer	4
2.0 Test equipments and Associated Equipment used during the test.	5
2.1 Test Equipments.....	5
2.2 AE used during the test	5
3.0 Technical Details	6
3.1 Summary of test results	6
3.2 Test Standards	6
4.0 EUT Modification	6
5.0 Measurement Uncertainty	6
6.0 Power Line Conducted Emission Test	7
6.1 Schematics of the test	7
6.2 Test Method and test Procedure.....	7
6.3 EUT Operating Condition.....	7
6.4 Test Equipment	7
6.5 Conducted Emission Limit.....	8
6.7 Test result.....	8
7.0 Radiated Emission Test	10
7.1 Test Method and test Procedure:.....	10
7.2 Block diagram of Test setup	10
7.3 Limit	12
7.4 Test Equipment	13
7.5 Test specification:.....	13
8. Band Edge	18
8.1 Band Edge Limit.....	18
8.2 Test Equipment	18
9.0 Occupied Bandwidth	19
9.1 Test Equipment	19
9.2 Test Specification:.....	19
9.3 Limit	19
9.4 Test Result:	19
10.0 Antenna Requirement	20
10.1 Standard Applicable.....	20
10.2 Antenna Specification	20

1.0 General Details

1.1 Test Lab Details

Name :	Shenzhen Tongce Testing Lab
Address:	1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China
Telephone:	13410377511
Fax:	--

The test facility is recognized, certified, or accredited by the following organizations:

FCC Registration Number: 572331

Shenzhen TCT Testing Technology Co., Ltd., Shenzhen EMC Laboratory: Shenzhen Tongce Testing Lab
The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

Registration Number: 572331

Industry Canada (IC)

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by

Certification and Engineering Bureau of Industry Canada for radio equipment testing

Registration Number IC: 10668A-1

1.2 Applicant Details

Applicant:	Shenghong Electronic Science & Technology Co., Ltd.
Address:	Earnway Star Sakta Industrial Building, North Dawugang, Shiwan, Foshan, Guangdong, China.
Telephone:	0757-82780739
Fax:	0757-82780737

Manufacturer:	Shenghong Electronic Science & Technology Co., Ltd.
Address:	Earnway Star Sakta Industrial Building, North Dawugang, Shiwan, Foshan, Guangdong, China.
Telephone:	0757-82780739
Fax:	0757-82780737

1.3 Description of EUT

Product:	Sports Sunglasses Camera
Model No.:	S62
Additional Model No.:	N/A
Brand Name:	
Operation Frequency:	2408 MHz
Modulation Type:	FSK
Antenna Designation:	Internal antenna, and the maximum antenna gain is 2.15dBi.
Rating:	DC 3.0V Via Battery Battery Information: Model: CR2032

1.4 Statement:

N/A

1.5 Test Engineer

The sample tested by



Printed name: Beryl Zhao

2.0 Test equipments and Associated Equipment used during the test.

2.1 Test Equipments

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	July 2, 2014	July 1, 2015
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 3, 2014	July 2, 2015
Spectrum Analyzer	ROHDE&SCHWARZ	FSU	1166.1660.03	July 3, 2014	July 2, 2015
Pre-amplifier	Teseq	LAN6900	--	July 3, 2014	July 2, 2015
Pre-amplifier	Agilent	8447D	83153007374	July 3, 2014	July 2, 2015
Pre-amplifier	Agilent	8449B	3008A01738	July 3, 2014	July 2, 2015
Loop antenna	ZHINAN	ZN30900A	1024	July 3, 2014	July 2, 2015
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	July 3, 2014	July 2, 2015
Horn Antenna	ETS LINDGREN	3117	--	July 3, 2014	July 2, 2015
Horn Antenna	ETS LINDGREN	3160	--	July 3, 2014	July 2, 2015
Coaxial Cable	TCT	N/A	N/A	July 2, 2014	July 1, 2015
Coaxial Cable	TCT	N/A	N/A	July 2, 2014	July 1, 2015
Coaxial cable	TCT	N/A	N/A	July 2, 2014	July 1, 2015
Coaxial Cable	TCT	N/A	N/A	July 2, 2014	July 1, 2015

2.2 AE used during the test

Equipment type	Manufacturer	Model
N.A.		
N.A.		
N.A.		

3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications

Requirement	CFR 47 Section	Result
Conduction Emission, 0.15MHz to 30MHz	15.207(a)	N.A.
Radiated Emission Test	Section 15.209, 15.35 Section 15.249(a)(d)	PASS
Band Edge Test	15.249(d)	PASS
Occupied Bandwidth	Section 15.215(c)	PASS
Antenna Requirement	Section 15.203	PASS

Note: This EUT is power by battery only, the conducted emission is not applicable

3.2 Test Standards

FCC Rules and Regulations Part 15 Subpart C: 2013

4.0 EUT Modification

No modification by Shenzhen TCT Testing Technology Co., Ltd

5.0 Measurement Uncertainty


(95% confidence levels, k=2)

No.	Item	MU
1.	Radio Frequency	$\pm 1 \times 10^{-9}$
2.	Temperature	$\pm 0.1^\circ\text{C}$
3.	Humidity	$\pm 1.0\%$
4.	RF power, conducted	$\pm 0.34\text{dB}$
5.	RF power density, conducted	$\pm 1.45\text{dB}$
6.	Spurious emissions, conducted	$\pm 3.70\text{dB}$
7.	All emissions, radiated	$\pm 4.50\text{dB}$

Note: 1) The EUT is a 2.4G RF remote control transmitter.

6.0 Power Line Conducted Emission Test

6.1 Schematics of the test

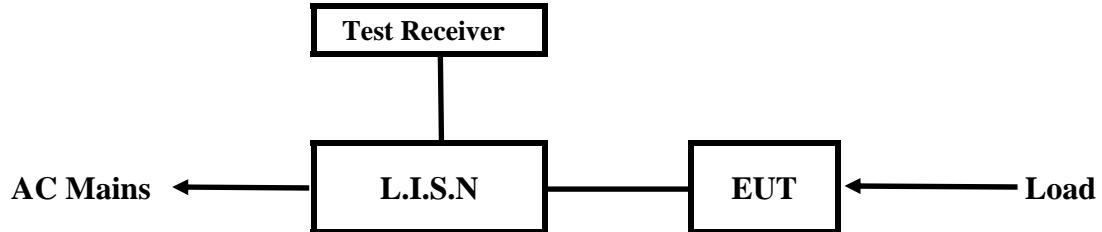


EUT: Equipment Under Test

6.2 Test Method and test Procedure

The EUT was tested according to RSS-Gen Issue 3-2010. The Frequency spectrum From 0.15MHz to 30MHz was investigated.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

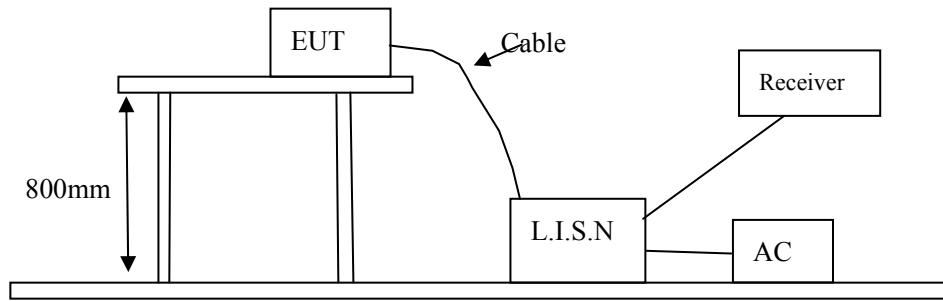

6.3 EUT Operating Condition

Operating condition is according to RSS-Gen Issue 3-2010

- 1) Setup the EUT and simulators as shown on the following
- 2) Enable AF signal and confirm EUT active to normal condition

6.4 Test Equipment

Please refer to the Section 2

6.5 Conducted Emission Limit

Frequency(MHz)	Class A Limits (dB μ V)		Class B Limits (dB μ V)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*
0.50 ~ 5.00	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes: 1) *Decreasing linearly with logarithm of frequency.
2) The tighter limit shall apply at the transition frequencies

6.6 Test specification:

Environmental conditions: Temperature: 22° C Humidity: 52% Atmospheric pressure: 103kPa

Frequency range: 0.15 MHz – 30 MHz

The test was carried out in the following operation mode(s):

- --

6.7 Test result

--

The requirements are FULFILLED

Remarks: The EUT is powered by batteries, so this test is not applicable.

A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT Description: --

Operation Mode: --

Tested By: --

Test date: --

Start Frequency	Stop Frequency	Step	IF BW	Detector	Final M-Time
0.15MHz	30MHz	4.5KHz	10KHz	QP+AV	1s

Frequency (MHz)	Reading(dB μ V)				Limit	
	Live		Neutral		(dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
--	--	--	--	--	--	--
--	--	--	--	--	--	--
--	--	--	--	--	--	--

B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT Description: --

Operation Mode: --

Tested By: --

Test Data: --

Start Frequency	Stop Frequency	Step	IF BW	Detector	Final M-Time
0.15MHz	30MHz	4.5KHz	10KHz	QP+AV	1s

Frequency (MHz)	Reading(dB μ V)				Limit	
	Live		Neutral		(dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
--	--	--	--	--	--	--
--	--	--	--	--	--	--
--	--	--	--	--	--	--


7.0 Radiated Emission Test

7.1 Test Method and test Procedure:


- 1) The EUT was tested according to ANSI C63.10 –2009
- 2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10 –2009.
- 3) The frequency spectrum from 9 kHz to 25GHz was investigated. All readings from 9kHz to 30MHz are quasi-peak values with a resolution bandwidth of 9 kHz, measured with loop antenna.
All readings from 30MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz, measured with Bi-log antenna.
All readings above 1 GHz are peak values with a resolution bandwidth of 1 MHz, measured with horn antenna.
- 4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for above 30MHz each frequency .
The antenna high is 1 m to find the maximum emission for each frequency below 30MHz
- 5) Tested distance: 3 meters
- 6) The antenna polarization: Vertical polarization and Horizontal polarization.
- 7) Each azimuth of E.U.T will be tested.

7.2 Block diagram of Test setup


Block diagram of Test setup for frequency 30-1000MHz

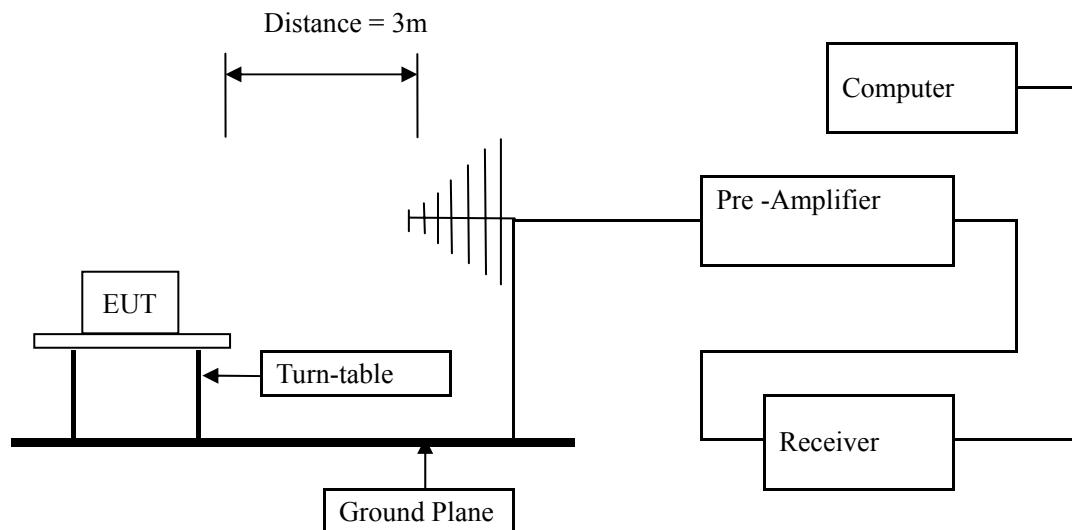

Block diagram of Test setup for frequency below 30MHz

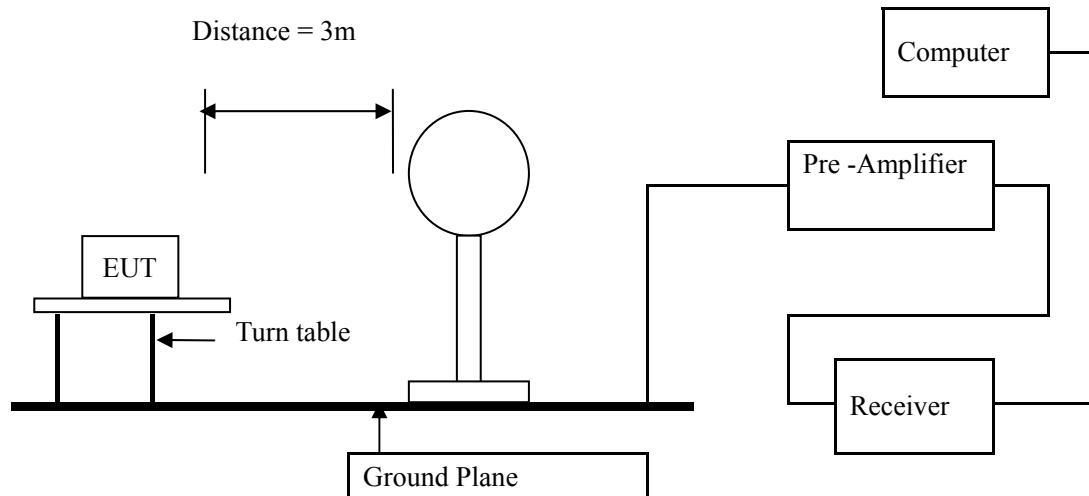

Block diagram of Test setup for frequency above 1GHz

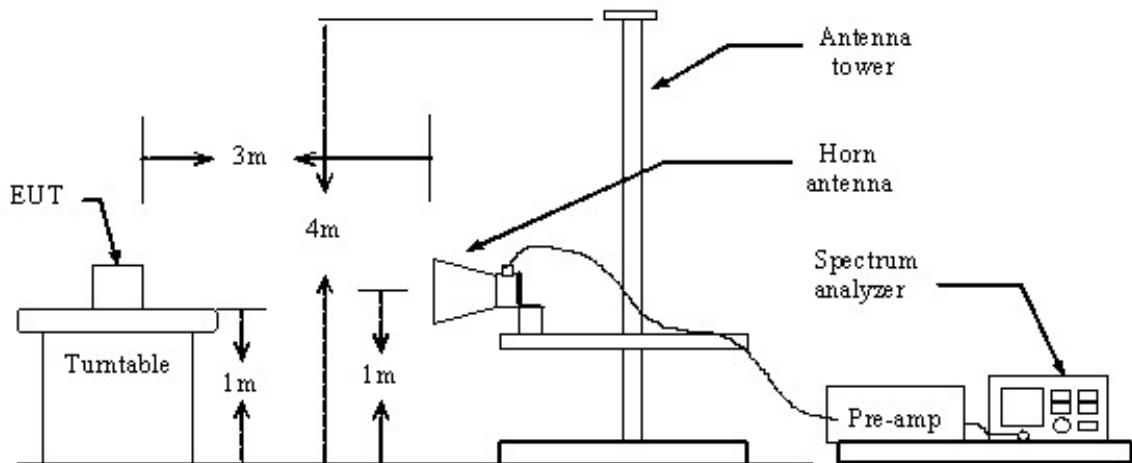

7.3 Limit

According to 15.249(a) requirements:

Fundamental Frequency (MHz)	Field Strength of(millivolts/meter)	
	Fundamental	Harmonics
902-928	50	0.5
2400-2483.5	50	0.5
5725-5875	50	0.5
24000-24250	250	2.5

For this E.U.T

Fundamental Frequency (MHz)	Field Strength of Fundamental (3m)		Field Strength of Harmonics (3m)		
	mV/m	dBuV/m	mV/m	dBuV/m	
2400-2483.5	50	94 (Average)	114 (Peak)	0.5	54 (Average) 74 (Peak)

Note:

- 1) RF Field Strength (dBuV) = $20 \log \text{RF Voltage (uV)}$
- 2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

According to 15.249(d) requirements: Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Frequencies in restricted band are complied to limit

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.490	3	$20 \log 2400/F$ (kHz) + 80
0.490-1.705	3	$20 \log 24000/F$ (kHz) + 40
1.705-30	3	$20 \log 30 + 40$
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1) RF Voltage (dBuV) = $20 \log \text{RF Voltage (uV)}$
- 2) In the Above Table, the tighter limit applies at the band edges.
- 3) Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4) The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula $Ld1 = Ld2 * (d2/d1)$



7.4 Test Equipment

Please refer to the Section 2

7.5 Test specification:

Environmental conditions: Temperature 23° C Humidity: 50% Atmospheric pressure: 103kPa

7.6 Test result

Result: Pass

A Radiated Emission (9 kHz----30 MHz)

Note: 1) Emission Level=Reading+ Cable loss-Antenna factor-Amp factor
2) The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Result: Pass


Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB μ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

B General Radiated Emissions Data

Radiated Emission (30MHz----1000MHz)

In Horizontal


Please refer to following diagram for individual

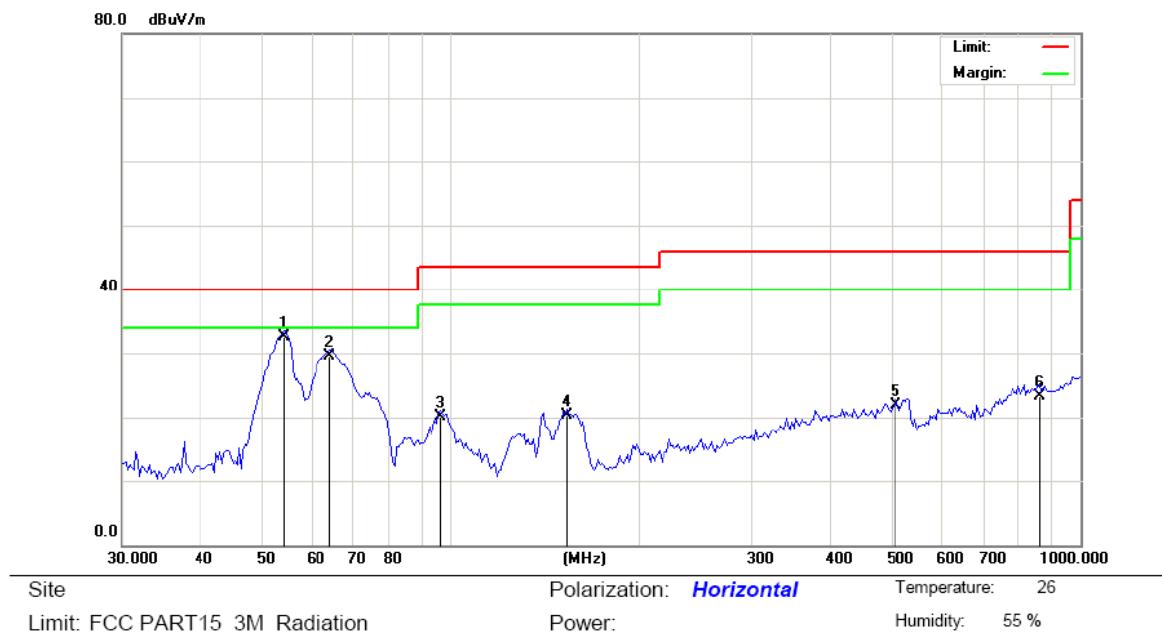

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment				Height	Degree
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	54.1350	44.90	-12.49	32.41	40.00	-7.59	QP		0
2		64.0800	43.90	-14.32	29.58	40.00	-10.42	QP		0
3		96.3230	32.10	-12.09	20.01	43.50	-23.49	QP		0
4		153.1627	35.40	-15.05	20.35	43.50	-23.15	QP		0
5		509.3560	25.50	-3.69	21.81	46.00	-24.19	QP		0
6		862.8015	24.50	-1.16	23.34	46.00	-22.66	QP		0

In Vertical

Please refer to following diagram for individual

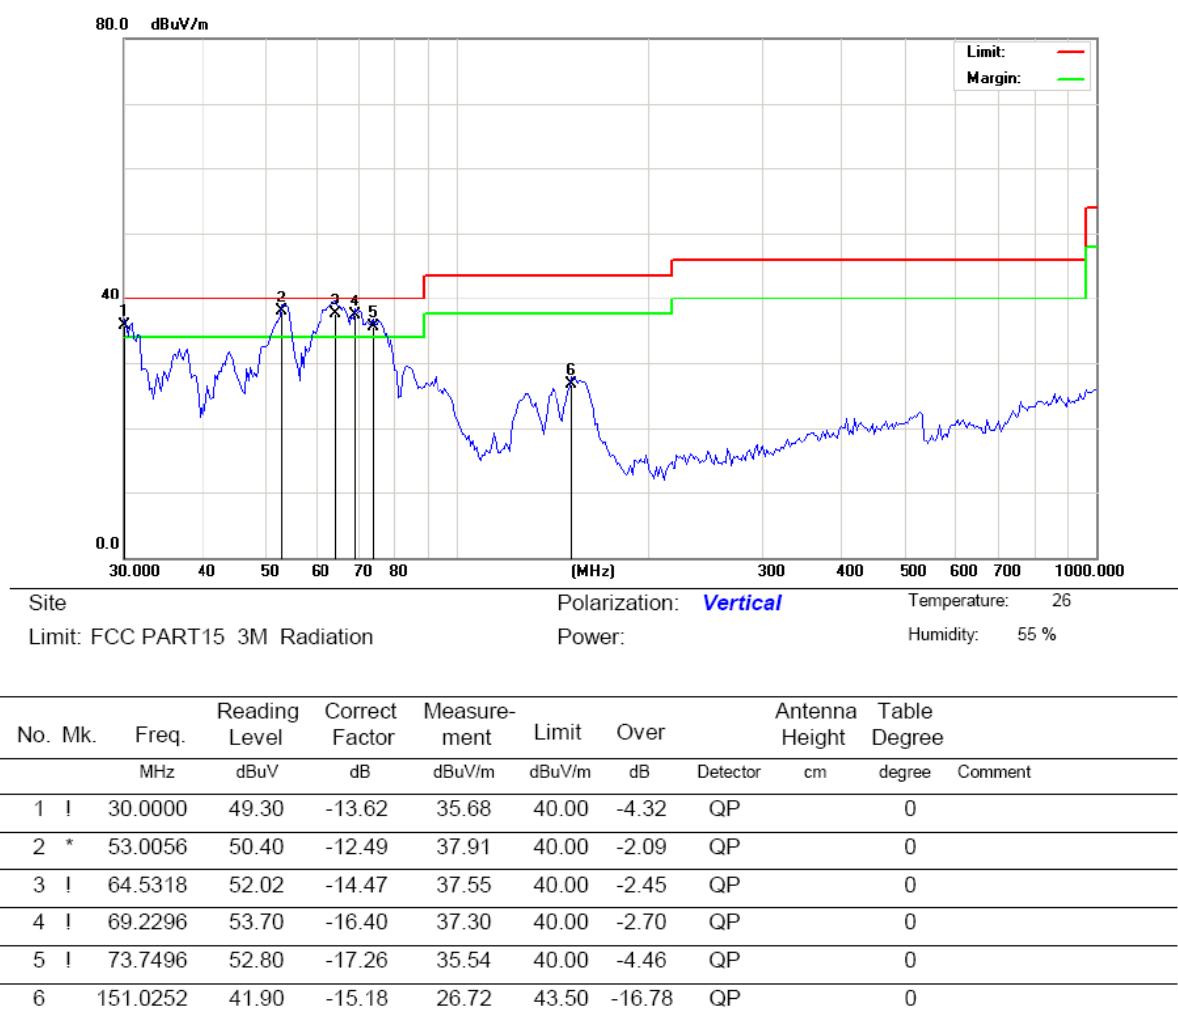

Note: Measurements were conducted in all channels (high, middle, low), and the worst case (low channel) was submitted only.

C Fundamental & Harmonics and Spurious Radiated Emission Data (1000MHz-25000MHz)

channel: 2408 MHz				
Frequency (MHz)	Emission PK/AV (dBuV/m)	Horizontal / Vertical	Limits PK/AV (dBuV/m)	Margin (dB)
2408	89.16(PK)	H	114/94	4.84
2408	87.52(PK)	V	114/94	6.48
4816	45.58 (PK)	H	74/54	8.42
4816	41.22(PK)	V	74/54	12.78
16856	45.19(PK)	H	74/54	8.81
16856	39.70(PK)	V	74/54	14.30

Note:

- 1) PK= Peak, AV= Average
- 2) Emission Level = Reading Level + Antenna Factor + Cable Loss.
- 3) Margin= Limit(AV) – Emission Level
- 4) If the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
- 5) The other emission levels are too small, which are not reported. It is deemed to comply with the requirement of the rule.

8. Band Edge

8.1 Band Edge Limit

1) According to 15.249(d) requirements: Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

2) For Emissions in Restricted band, the limit is below the general radiated emission limits in 15.209

8.2 Test Equipment

Please refer to the Section 2

8.3 Test Result

Pass

Frequency (MHz)	Level@3m (dB μ V/m)	Detector	Limit@3m (dB μ V/m)	Polarization
2403	33.11	Peak	74.00	H
2403	29.74	Peak	74.00	V

9.0 Occupied Bandwidth

9.1 Test Equipment

Please refer to the Section 2

9.2 Test Specification:

Environmental conditions: Temperature 22° C Humidity: 50% Atmospheric pressure: 103kPa


9.3 Limit

According to 15.215(c), 20dB Bandwidth should be test

9.4 Test Result:

Channel (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Conclusion
2408	169.9	--	PASS

Test Data as follows:

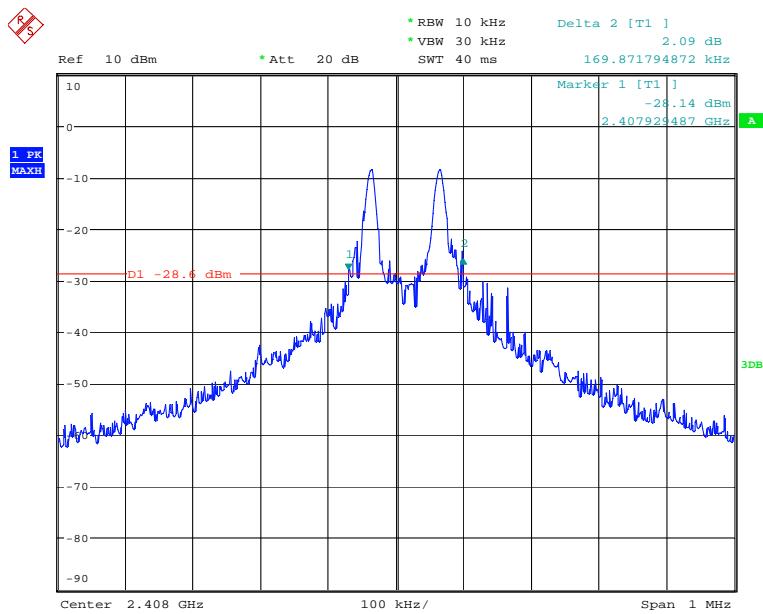

Date: 2.DEC.2014 18:42:14


10.0 Antenna Requirement

10.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 Antenna Specification

According to the manufacturer declared, internal antennas; the maximum gain of antennas is 2.15 dBi. and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

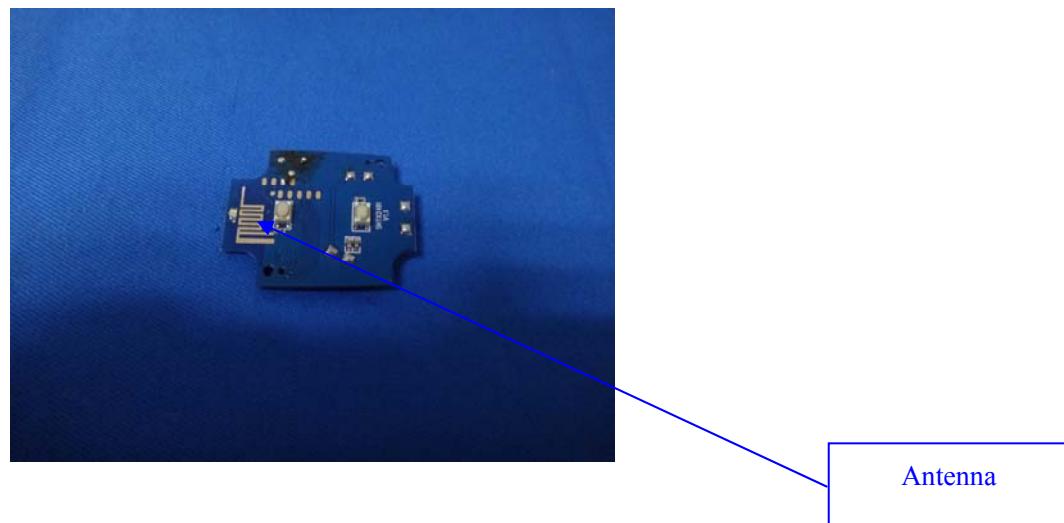

--End of the report--