
TEST REPORT FOR GSM TESTING

Report No.: SRTC2019-9004(F)-19111901(A)

Product Name: Mobile Phone

Product Model: HLTE321E

Applicant: Hisense International Co., Ltd.

Manufacturer: Hisense Communications Co., Ltd.

Specification: FCC Part 24E, Part 22H, Part 2 (2019)

FCC ID: 2ADOBHLTE321E

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District,

Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT'S DETAILS	2
1.4 MANUFACTURER'S DETAILS	2
1.5 TEST ENVIRONMENT	3
2 DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 FINAL EQUIPMENT BUILD STATUS	4
2.2 SUPPORT EQUIPMENT	4
2.3 SUMMARY TABLE	5
3 REFERENCE SPECIFICATION	6
4 KEY TO NOTES AND RESULT CODES	6
5 RESULT SUMMARY	7
6 TEST RESULT	8
6.1 RF POWER OUTPUT	8
6.2 EFFECTIVE RADIATED POWER	9
6.3 OCCUPIED BANDWIDTH	11
6.4 EMISSION BANDWIDTH	12
6.5 SPURIOUS EMISSIONS AT ANTENNA TERMINAL	13
6.6 BAND EDGES COMPLIANCE	14
6.7 FREQUENCY STABILITY	15
6.8 RADIATED SPURIOUS EMISSIONS	16
6.9 PEAK-AVERAGE RATIO	17
7 MEASUREMENT UNCERTAINTIES	19
8 TEST EQUIPMENTS	20
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	21
APPENDIX B – TEST DATA OF RADIATED EMISSION	45

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

1.3 Applicant's details

Company:	Hisense International Co., Ltd.
Address:	Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071, China
City:	Qingdao
Country or Region:	China
Contacted person:	Geng Ruifeng
Tel:	+86-532-80877742
Fax:	---
Email:	gengruifeng@hisense.com

1.4 Manufacturer's details

Company:	Hisense Communications Co., Ltd.
Address:	No.218 Qianwangang Road, Economic & Technological Development Zone, Qingdao, China
City:	Qingdao
Country or Region:	China
Contacted person:	Deng Tingting
Tel:	+86-532-55753708
Fax:	---
Email:	dengtingting@hisense.com

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2019-11-19
Testing Start Date:	2019-11-19
Testing End Date:	2020-01-09

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	30
Maximum Extreme	55	---
Minimum Extreme	-10	---

Normal Supply Voltage (V d.c.):	3.80
Maximum Extreme Supply Voltage (V d.c.):	4.40
Minimum Extreme Supply Voltage (V d.c.):	3.50

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Range	GSM850 Tx:824~849MHz Rx:869~894MHz PCS1900 Tx:1850~1910MHz Rx:1930~1990MHz
Modulation Type	GPRS:GMSK EDGE: GMSK/8PSK
Emission Designator	300KGXW/300KG7W
Duplex Mode	FDD
Duplex Spacing	GSM850:45MHz/PCS1900:80MHz
Antenna Type	Fixed Internal Antenna
Antenna Gain	GSM850: 0.5dBi/DCS1800: 1.0dBi
Power Supply	Battery/Charger
Hardware Version	V1.00
Software Version	L1702.6.01.01.MX05
IMEI	002101542033133

Note1: The equipments have two supplies, is different on the supplier of Memory/PFC.
Main Supply

Part Name	Model	Supplier(Brand)	Description
FPC	HYT7.762.1283	SHENZHEN ZHONGRUANXINDA ELECTRONICS CO.,LTD	MAIN FPC

Secondary Supply

Part Name	Model Name	supplier	Remark
FPC	HYT7.762.1283	ZHUHAI HONGGUANG TECHNOLOGY CO.,LTD	Same specification and different manufacturers

Note2: There are two SIM (SIM1/2) of EUT. The relevant tests have been performed in order to verify in which combination case the EUT would have the worst features. So all the tests shown in this test report are performed when the EUT use SIM 1.

Note3: Worst Case Test Mode

Band	Conducted Measurement Test Mode	Radiated Measurement Test Mode
GSM850	Down Ant	Down Ant and Up Ant
GSM1900	Down Ant	Down Ant and Up Ant

Upper Ant and Down Ant are TX diversity switching. Both the up and down antennas of the conducted power were tested. Up Ant and Down Ant are both verified, we test the worst mode.

2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment	Battery
Manufacturer	ZHONGSHAN TIANMAO BATTERY CO., LTD.
Model Number	LPN385438
Serial Number	---

Equipment	Charger
Manufacturer	SHENZHEN TIANYIN ELECTRONICS CO., LTD.
Model Number	TPA-10120150UU
Serial Number	---

Equipment	Headset
Manufacturer	NEW LEADER INDUSTRY CO.,LTD.
Model Number	A106-0022-S
Serial Number	---

Equipment	USB Cable
Manufacturer	SHENZHEN KOAR ELECTRIC CO.,LTD.
Model Number	GET1-2824L10WHR-AC
Serial Number	---

2.3 Summary table.

FCC Rule Part	Mode	Frequency Range (MHz)	ERP/ EIRP (dBm)	ERP/ EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
22H	GSM850	824.2-848.8	32.10	1.622	0.098	249KGXW
22H	EDGE850	824.2-848.8	32.13	1.633	-0.099	243KG7W
24E	GSM1900	1850.2-1909.8	29.66	0.925	0.098	249KGXW
24E	EDGE1900	1850.2-1909.8	29.51	0.893	0.095	253KG7W

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC Part2	2019	Frequency allocations and radio treaty matters; general rules and regulations
FCC Part22	2019	Public mobile services
FCC Part24	2019	Personal communications services
ANSI C63.26	2015	American national standard for compliance testing of transmitters used in licensed radio services
KDB 971168 D01	April 9, 2018	Measurement guidance for certification of licensed digital transmitters
TIA-603-E-2016	March 2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards




4 KEY TO NOTES AND RESULT CODES

The following are the definition of the test result.

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
NT	Normal Temperature
NV	Nominal voltage
HV	High voltage
LV	Low voltage

5 RESULT SUMMARY

No.	Test case	FCC reference	Verdict
1	RF Power Output	2.1046	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	22.913(a)(5)/24.232(c)	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Emission Bandwidth	2.1049	Pass
5	Spurious Emissions at antenna terminals	2.1051/22.917(a)/24.238(a)	Pass
6	Band Edges Compliance	2.1051/22.917(a)/24.238(a)	Pass
7	Frequency Stability	2.1055/22.355/24.235	Pass
8	Radiated Spurious Emissions	2.1053/22.917(a)/24.238(a)	Pass
9	Peak-Average Ratio	24.232(d)	Pass

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. He Dengshun 	Issued date: 20200109

6 TEST RESULT


6.1 RF Power Output

Rule Part(s)
FCC Part 2.1046

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:



Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration. The measurement will be conducted at three channels (Low, Middle and High channels)

Limits: No specific conduct power requirements in part 2.1046.

Test result:

The test results are shown in Appendix A.

6.2 Effective Radiated Power


Rule Part(s)

FCC Part 22.913(a)(5)/Part 24.232(c)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test setup:

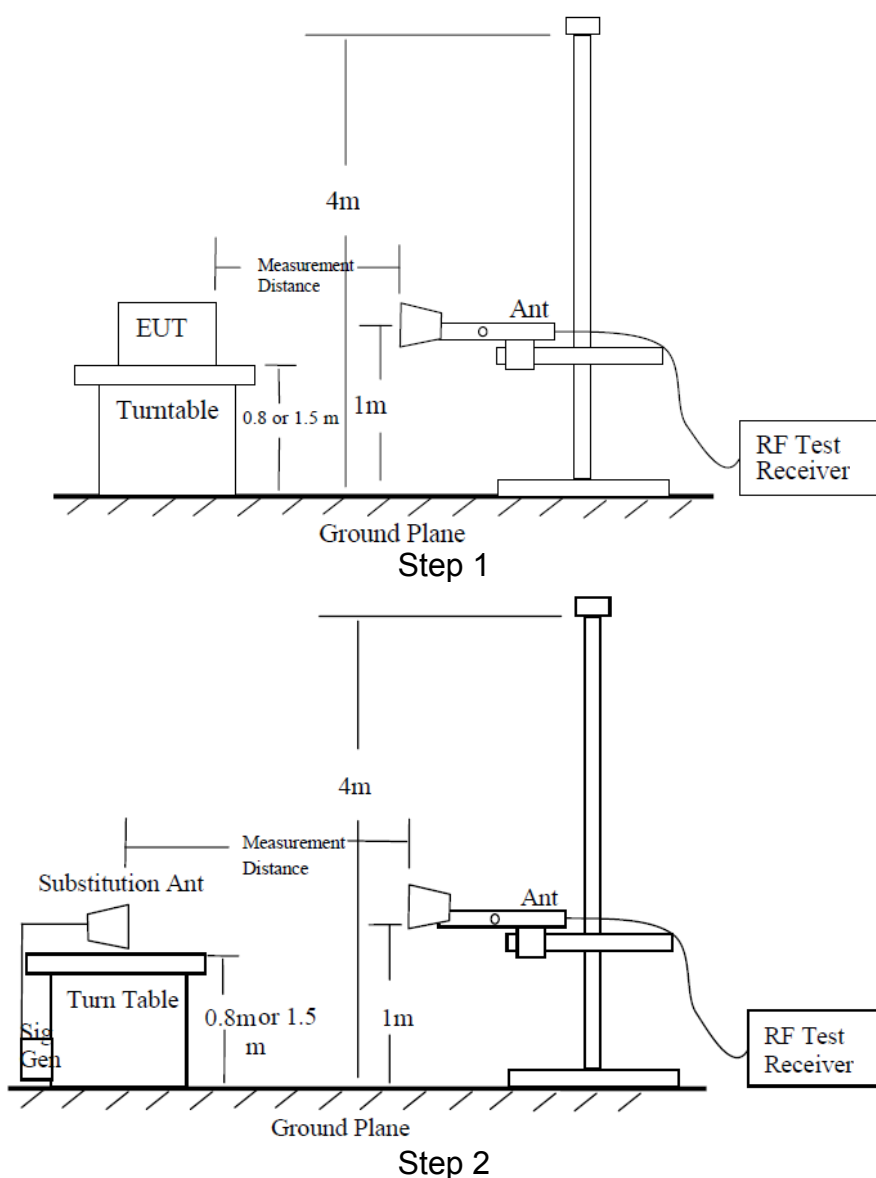

Test procedure:

The measurements procedures in TIA-603-E-2016 are used.

Step 1:

The measurement is carried out in the chamber. EUT was placed on a 0.8m ($f < 1\text{GHz}$)/1.5m ($f > 1\text{GHz}$) high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna from 1m to 4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 100KHz($f < 1\text{GHz}$)/1MHz ($f > 1\text{GHz}$). The antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{\text{mea}} + P_{\text{ca}} + G_{\text{a}}$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15 \text{ (dB)}$.

Limits for GSM850:

Operation Mode	Power Step	E.R.P. (dBm)
GSM	5	≤ 38.45
GPRS	3	≤ 38.45
EDGE	6	≤ 38.45

Limits for PCS1900:

Operation Mode	Power Step	E.I.R.P. (dBm)
GSM	0	≤ 33
GPRS	3	≤ 33
EDGE	5	≤ 33

Test result:

The test results are shown in Appendix B.


6.3 Occupied Bandwidth

Rule Part(s)
Part 2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

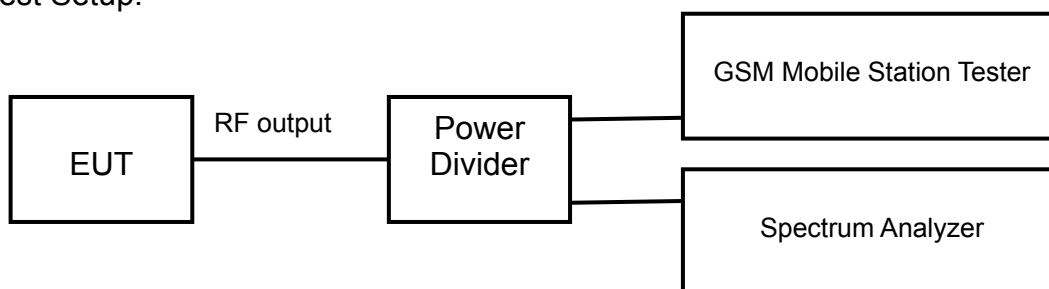

Test procedure:
KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:

The test results are shown in Appendix A.


6.4 Emission Bandwidth-

Rule Part(s)
Part 2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

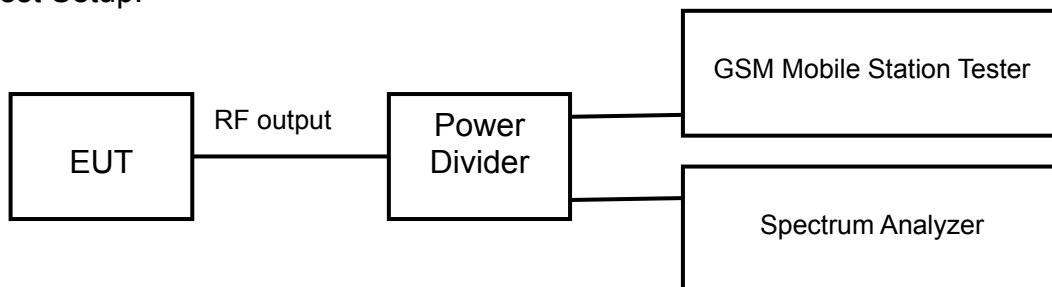

Test procedure:

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 26dB occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the emission bandwidth observed in Step 7

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:

The test results are shown in Appendix A.

6.5 Spurious Emissions at antenna terminal


Rule Part(s)

FCC Part 2.1053/22.917 (a)/ 24.238(a)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

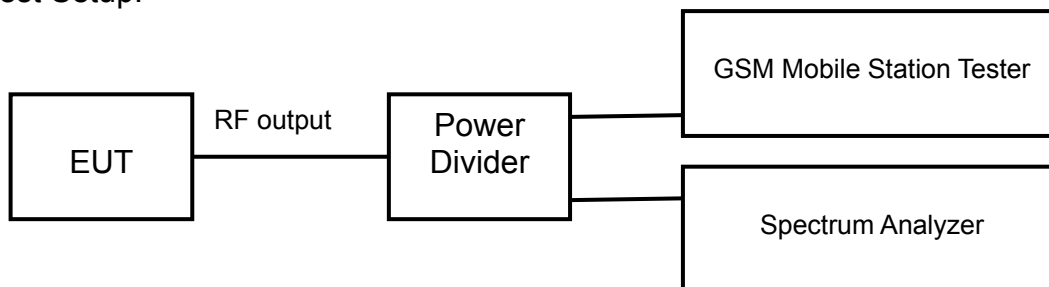

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for PCS
2. RBW=100 kHz (For below 1GHz), 1MHz (For above 1GHz)
3. VBW $\geq 3 \times$ RBW
4. Detector = RMS
5. Trace mode = trace average for continuous emissions, max hold for pulse emissions
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Limits:

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{[Watts]}})$, where P is the transmitter power in Watts.

Test result:

The test results are shown in Appendix A.

6.6 Band Edges Compliance


Rule Part (s)

FCC Part 2.1051/ 22.917(a) /Part 24.238(a)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

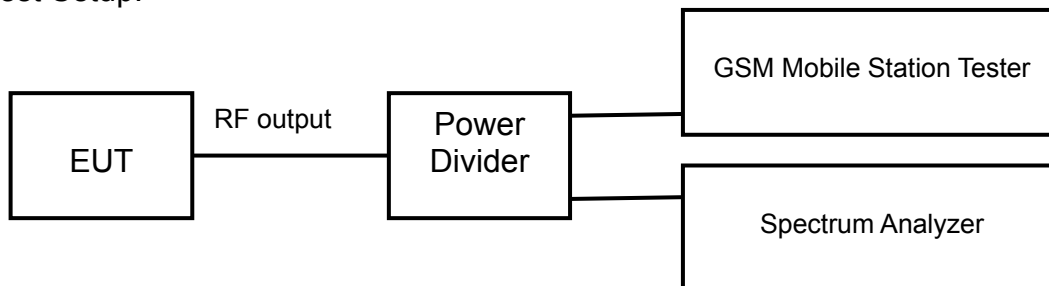

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span=2MHz
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Limit: The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts]), where P is the transmitter power in Watts.

Test result:

The test results are shown in Appendix A.


6.7 Frequency Stability

Rule Part(s)
FCC Part 2.1055/22.355 /Part 24.235

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test setup:

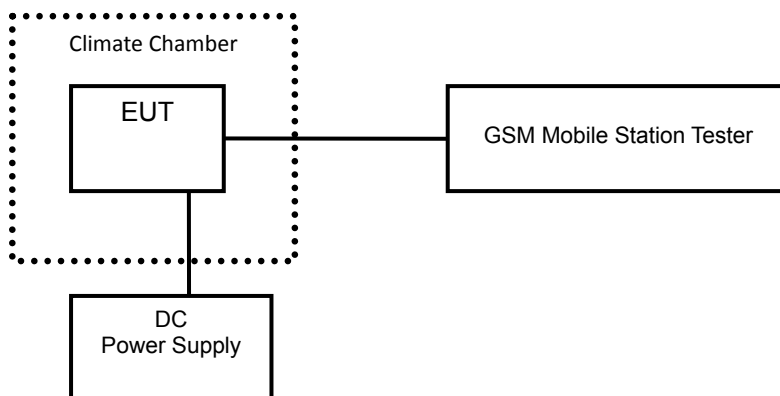

Test Procedure:
ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C (The temperature range can be declared by the manufacturer). A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Limits: For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test result:
The test results are shown in Appendix A.

6.8 Radiated Spurious Emissions



Rule Part(s)

FCC Part2.1053/ 22.917(a)/Part 24.238(a)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

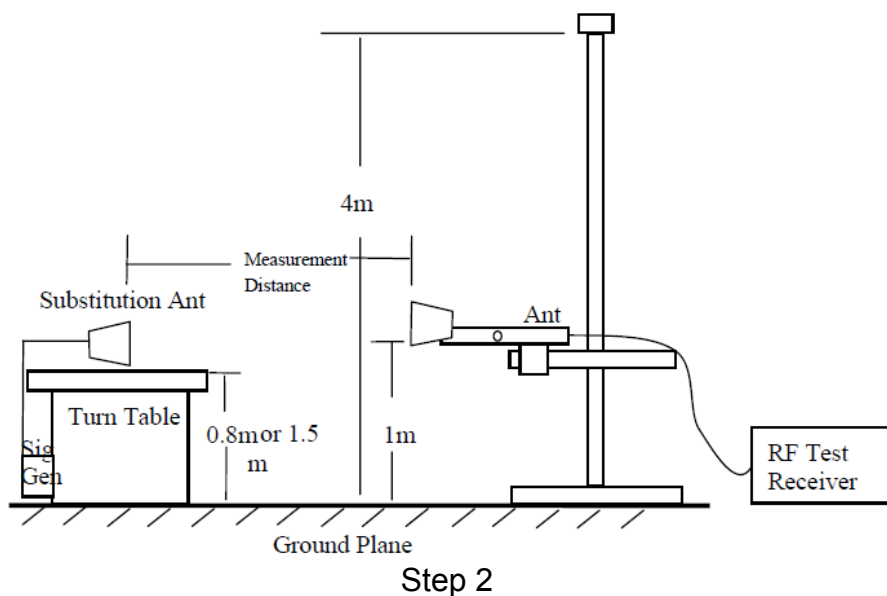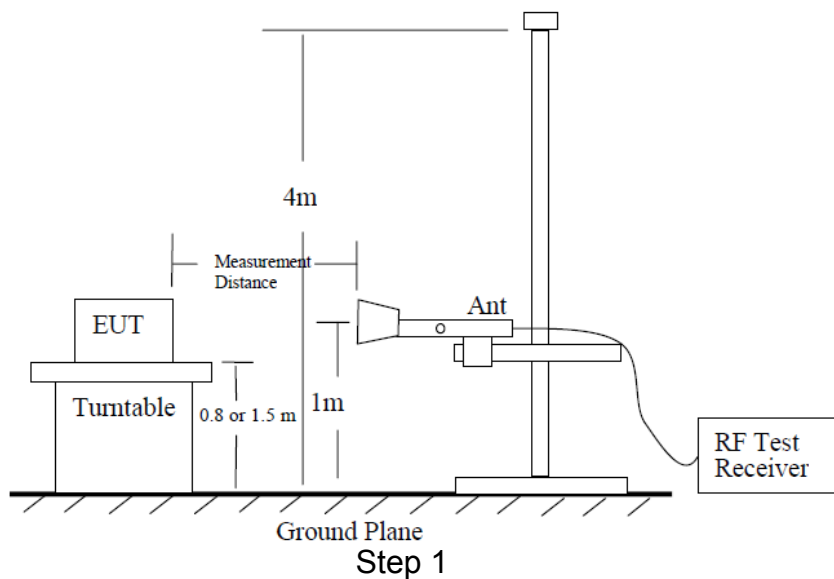

Test procedure:

The measurements procedures in TIA-603-E-2016 are used.

The spectrum was scanned from 30MHz to the 10th harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the chamber. EUT was placed on a 0.8m ($f < 1\text{GHz}$)/1.5m ($f > 1\text{GHz}$) high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna from 1m to 4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 100 kHz ($f < 1\text{GHz}$)/1MHz ($f > 1\text{GHz}$). The antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 10th harmonic of the carrier. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P_{mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna (P_{ca}) and the Substitution Antenna Gain (G_a).

Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power (EIRP)} = P_{\text{mea}} + P_{\text{ca}} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15 \text{ (dB)}$.

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

Test result:

The test results are shown in Appendix B.


6.9 Peak-Average Ratio

Rule Part(s)
FCC Part 24.232(d)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

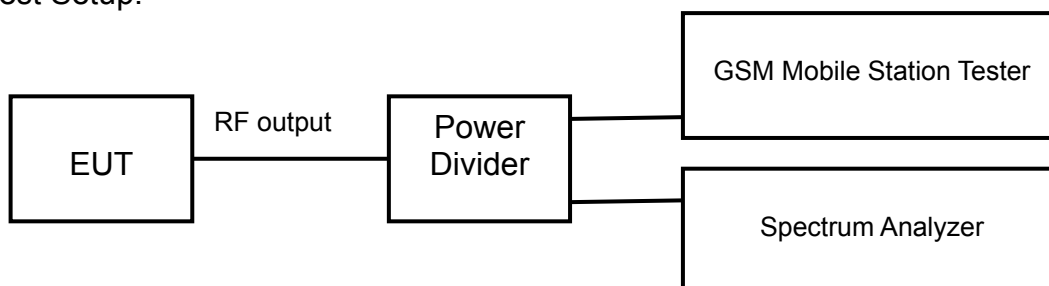

Test procedure:
KDB 971168 D01 v03r01 – Section 5.7.1

Test settings:

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Limits: the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test result:

The test results are shown in Appendix A

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

8 TEST EQUIPMENTS

No.	Name/Model	Manufacturer	S/N	Calibration Date	Calibration Due Date
1	E5515C(8960) Mobile Station Tester	Agilent	MY50266302	2019.08.20	2020.08.19
2	N9020A Spectrum Analyzer	Agilent	MY48010771	2019.08.20	2020.08.19
3	6007 Power Divider	Weinschel	6007-GJ-1	2019.08.20	2020.08.19
4	DC Power Supply E3645A	Agilent	MY40000741	2019.03.01	2020.02.29
5	Temperature chamber SH241	ESPEC	92013758	2019.08.20	2020.08.19
6	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	-----	-----	-----
7	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	-----	-----
8	Turn table Diameter:1m	FRANKONIA	-----	-----	-----
9	Turn table Diameter:5m	FRANKONIA	-----	-----	-----
10	Antenna master FAC(MA4.0)	MATURO	-----	-----	-----
11	Antenna master SAC(MA4.0)	MATURO	-----	-----	-----
12	9.080m×5.255m×3.525m Shielding room	FRANKONIA	-----	-----	-----
13	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2019.08.20	2020.08.19
14	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100513	2019.08.20	2020.08.19
15	HL562 Ultra log antenna	R&S	100016	2019.08.20	2020.08.19
16	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2019.08.20	2020.08.19
17	ESI 40 EMI test receiver	R&S	100015	2019.08.20	2020.08.19
18	ESCS30 EMI test receiver	R&S	100029	2019.08.20	2020.08.19
19	HL562 Receive antenna	R&S	100167	2019.08.20	2020.08.19
20	ENV216 AMN	R&S	3560.6550.12	2019.08.20	2020.08.19

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

RF Power Output

Up Antenna

GSM850

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.2	128	32.19
836.4	189	32.08
848.8	251	31.91

GPRS/EGPRS (GMSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
824.2	128	4Downlink1uplink	32.19
836.4	189		32.06
848.8	251		31.90
824.2	128	3Downlink2uplink	31.65
836.4	189		31.54
848.8	251		31.39
824.2	128	2Downlink3uplink	30.13
836.4	189		30.06
848.8	251		29.97
824.2	128	1Downlink4uplink	29.10
836.4	189		29.03
848.8	251		28.95

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
824.2	128	8PSK 4Downlink1uplink	26.82
836.4	189		26.85
848.8	251		26.98
824.2	128	8PSK 3Downlink2uplink	25.75
836.4	189		25.76
848.8	251		25.87
824.2	128	8PSK 2Downlink3uplink	23.47
836.4	189		23.43
848.8	251		23.53
824.2	128	8PSK 1Downlink4uplink	22.36
836.4	189		22.31
848.8	251		22.28

Down Antenna

GSM850

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.2	128	32.18
836.4	189	32.21
848.8	251	32.20

GPRS/EGPRS (GMSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
824.2	128	4Downlink1uplink	32.18
836.4	189		32.21
848.8	251		32.20
824.2	128	3Downlink2uplink	31.67
836.4	189		31.66
848.8	251		31.65
824.2	128	2Downlink3uplink	30.25
836.4	189		30.23
848.8	251		30.22
824.2	128	1Downlink4uplink	29.27
836.4	189		29.24
848.8	251		29.22

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
824.2	128	8PSK 4Downlink1uplink	27.21
836.4	189		27.22
848.8	251		27.32
824.2	128	8PSK 3Downlink2uplink	26.06
836.4	189		26.07
848.8	251		26.12
824.2	128	8PSK 2Downlink3uplink	23.82
836.4	189		23.84
848.8	251		23.95
824.2	128	8PSK 1Downlink4uplink	22.79
836.4	189		22.65
848.8	251		22.72

Up Antenna

PCS1900

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1850.2	512	29.29
1880.0	661	29.27
1909.8	810	29.08

GPRS/EGPRS (GMSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
1850.2	512	4Downlink1uplink	29.29
1880.0	661		29.27
1909.8	810		29.08
1850.2	512	3Downlink2uplink	28.55
1880.0	661		28.52
1909.8	810		28.42
1850.2	512	2Downlink3uplink	26.73
1880.0	661		26.69
1909.8	810		26.62
1850.2	512	1Downlink4uplink	25.63
1880.0	661		25.61
1909.8	810		25.52

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
1850.2	512	8PSK 4Downlink1uplink	25.52
1880.0	661		25.49
1909.8	810		25.48
1850.2	512	8PSK 3Downlink2uplink	24.40
1880.0	661		24.31
1909.8	810		24.36
1850.2	512	8PSK 2Downlink3uplink	22.35
1880.0	661		22.32
1909.8	810		22.27
1850.2	512	8PSK 1Downlink4uplink	21.17
1880.0	661		20.93
1909.8	810		20.92

Down Antenna

PCS1900

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1850.2	512	29.58
1880.0	661	29.63
1909.8	810	29.34

GPRS/EGPRS (GMSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
1850.2	512	4Downlink1uplink	29.58
1880.0	661		29.63
1909.8	810		29.34
1850.2	512	3Downlink2uplink	28.83
1880.0	661		28.89
1909.8	810		28.68
1850.2	512	2Downlink3uplink	26.99
1880.0	661		27.06
1909.8	810		26.97
1850.2	512	1Downlink4uplink	25.89
1880.0	661		25.97
1909.8	810		25.89

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
1850.2	512	8PSK 4Downlink1uplink	25.95
1880.0	661		25.99
1909.8	810		25.94
1850.2	512	8PSK 3Downlink2uplink	24.84
1880.0	661		24.82
1909.8	810		24.65
1850.2	512	8PSK 2Downlink3uplink	22.77
1880.0	661		22.74
1909.8	810		22.61
1850.2	512	8PSK 1Downlink4uplink	21.62
1880.0	661		21.66
1909.8	810		21.57

Occupied Bandwidth

GSM850

GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	248.86
836.4	189	246.06
848.8	251	241.05

EDGE (8PSK) MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	239.16
836.4	189	242.84
848.8	251	238.78

PCS1900

GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	236.83
1880.0	661	248.78
1909.8	810	247.37

EDGE (8PSK) MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	252.68
1880.0	661	248.24
1909.8	810	251.65

GSM850


GPRS MODE:



Channel 128

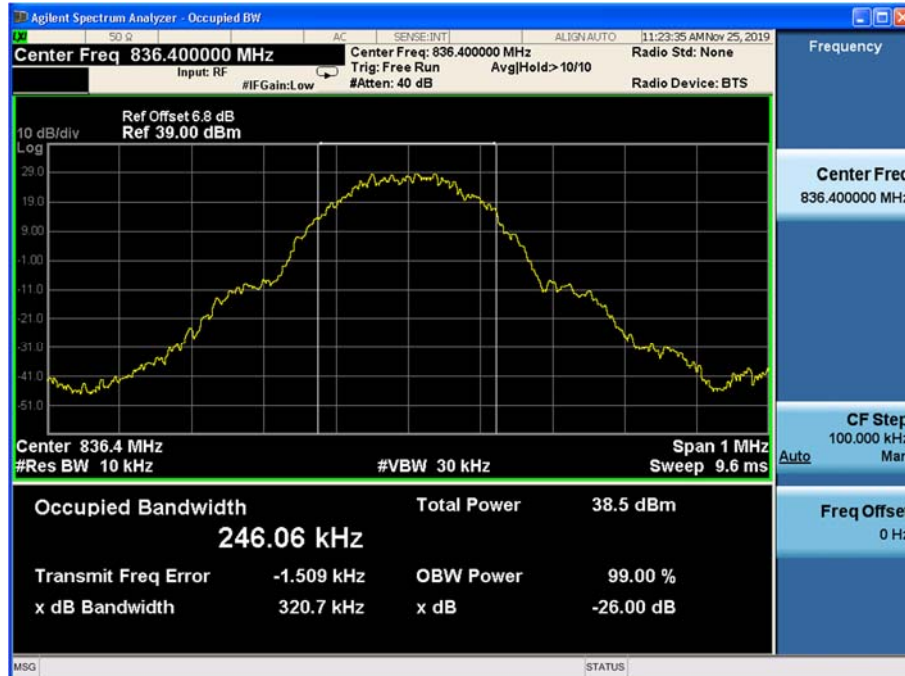

Channel 189

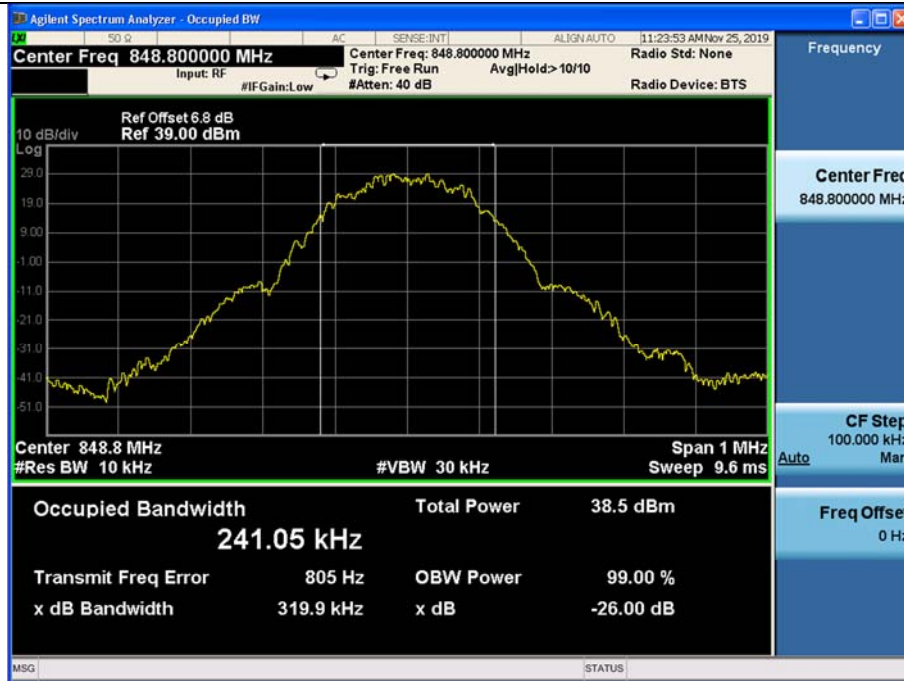

Channel 251

EDGE (8PSK) MODE:



Channel 128



Channel 189



Channel 251

PCS1900

GPRS MODE:



Channel 512



Channel 661




Channel 810

EDGE (8PSK) MODE:



Channel 512

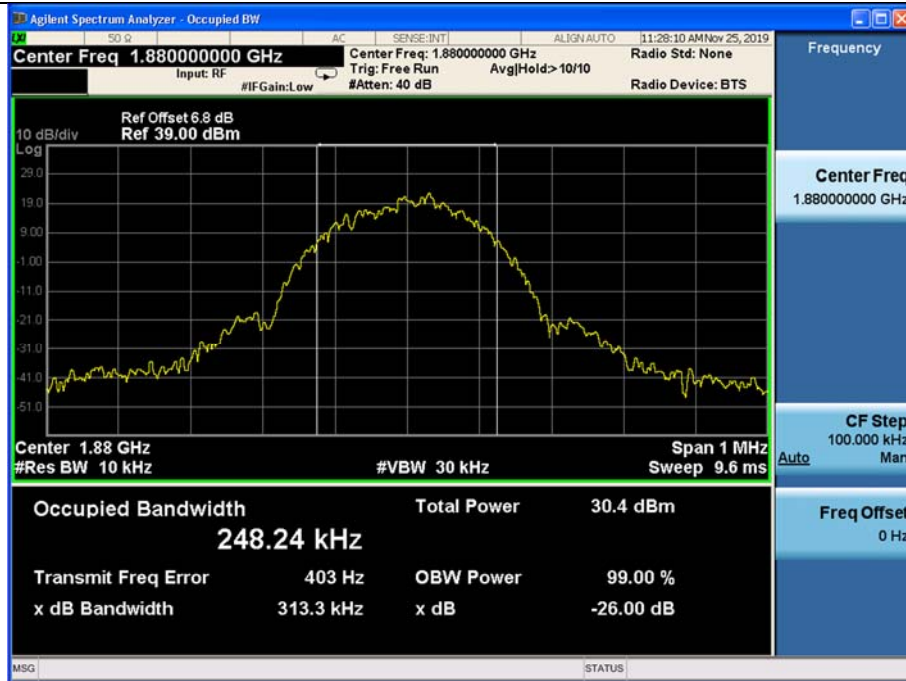

Channel 661



Channel 810

Emission Bandwidth

GSM850

GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power (kHz)
824.2	128	318.4
836.4	189	320.7
848.8	251	319.9

EDGE (8PSK) MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power (kHz)
824.2	128	299.4
836.4	189	308.3
848.8	251	309.9

PCS1900

GSM/GPRS MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power (kHz)
1850.2	512	305.1
1880.0	661	321.3
1909.8	810	315.9

EDGE (8PSK) MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power (kHz)
1850.2	512	315.9
1880.0	661	313.3
1909.8	810	316.7

Spurious Emissions at antenna terminal GSM850

GPRS MODE:

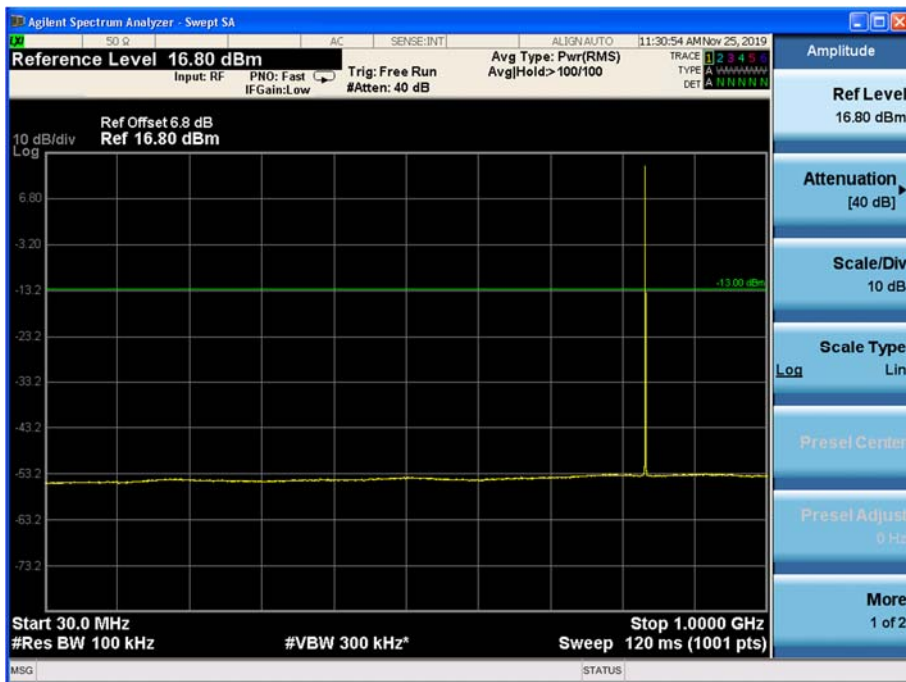

Channel 189, 30MHz~1GHz

Note: The signal beyond the limit is the signal transmitted by EUT.



Channel 189, 1GHz~10GHz

EDGE (8PSK) MODE:



Channel 189, 30MHz~1GHz

Note: The signal beyond the limit is the signal transmitted by EUT.



Channel 189, 1GHz~10GHz

PCS1900

GPRS MODE:



Channel 661, 30MHz~1GHz



Channel 661, 1GHz~20GHz

Note: The signal beyond the limit is the signal transmitted by EUT.

EDGE (8PSK) MODE:



Channel 661, 30MHz~1GHz




Channel 661, 1GHz~20GHz

Note: The signal beyond the limit is the signal transmitted by EUT.


Band Edges Compliance

GSM850

GPRS MODE:

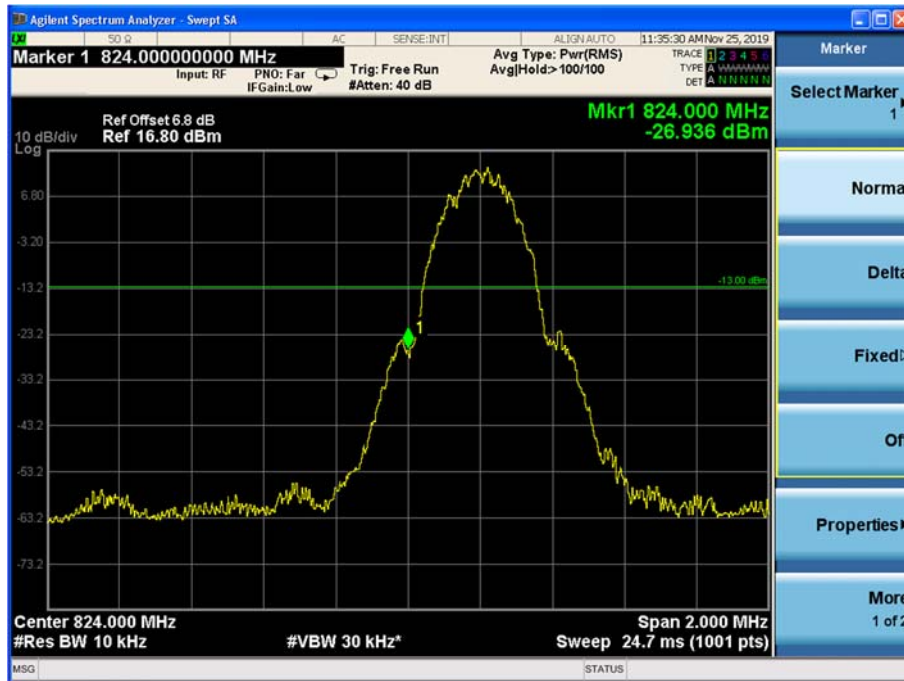

Channel 128

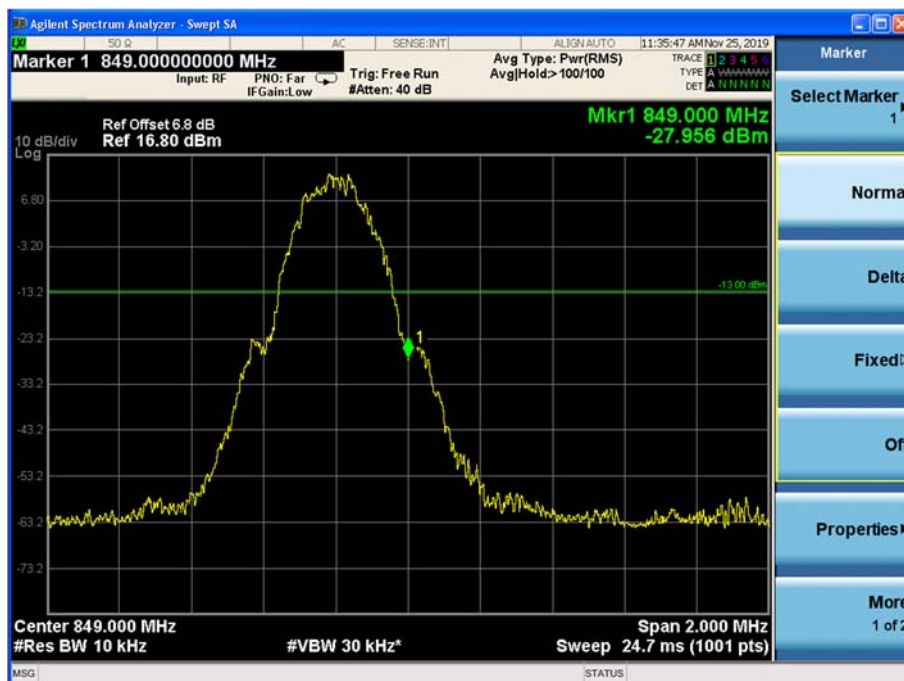


Channel 251

EDGE (8PSK) MODE:




Channel 128

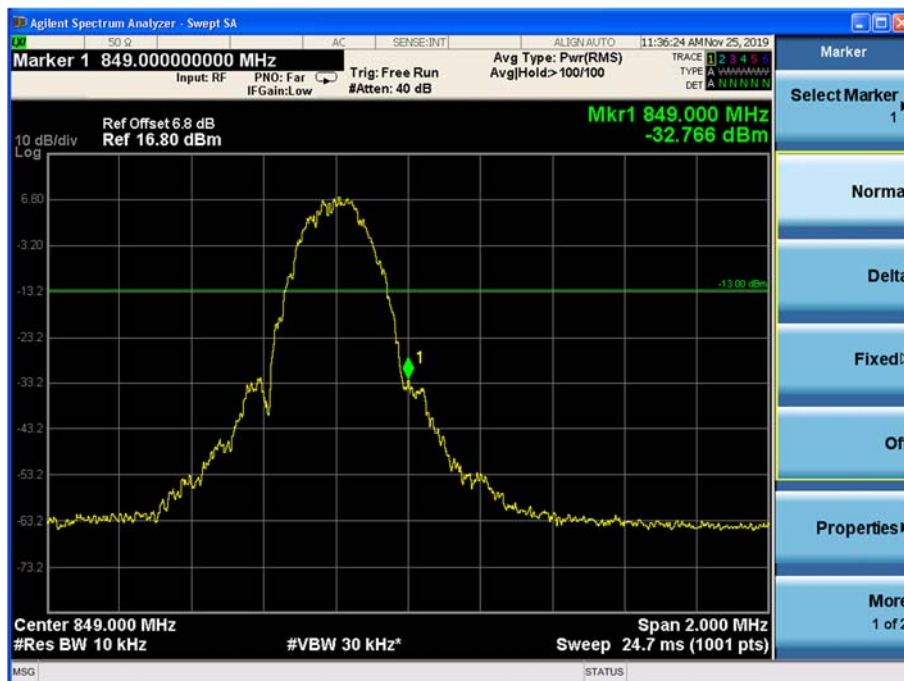


Channel 251

PCS1900

GPRS MODE:

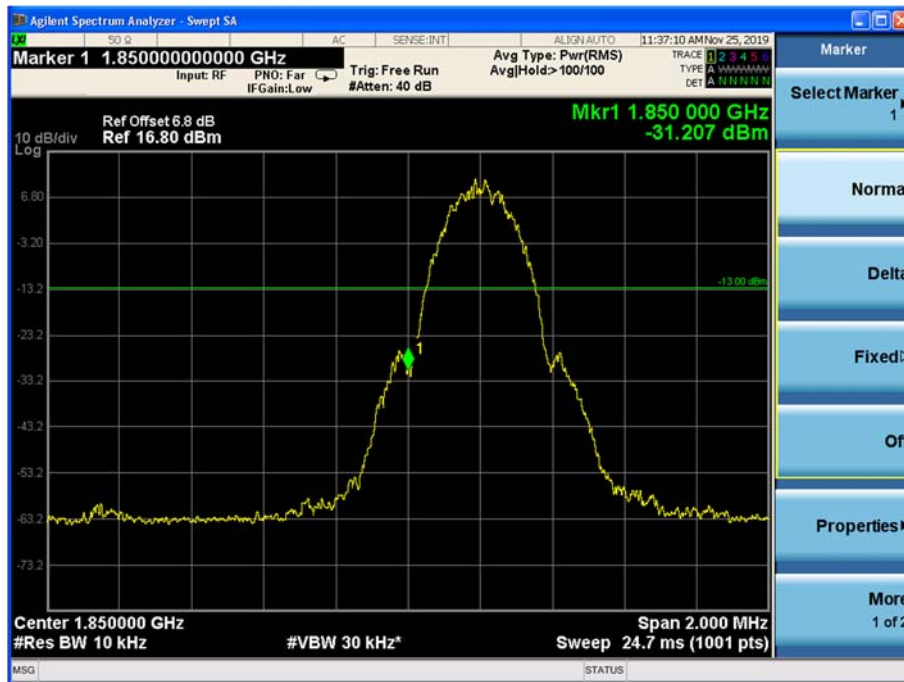


Channel 512

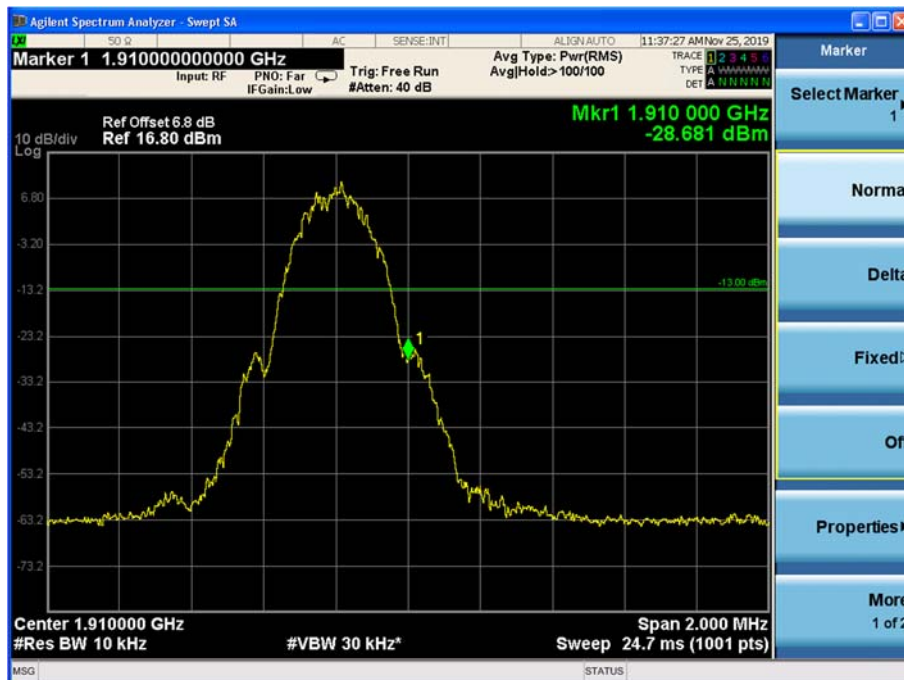


Channel 810

EDGE (8PSK) MODE:

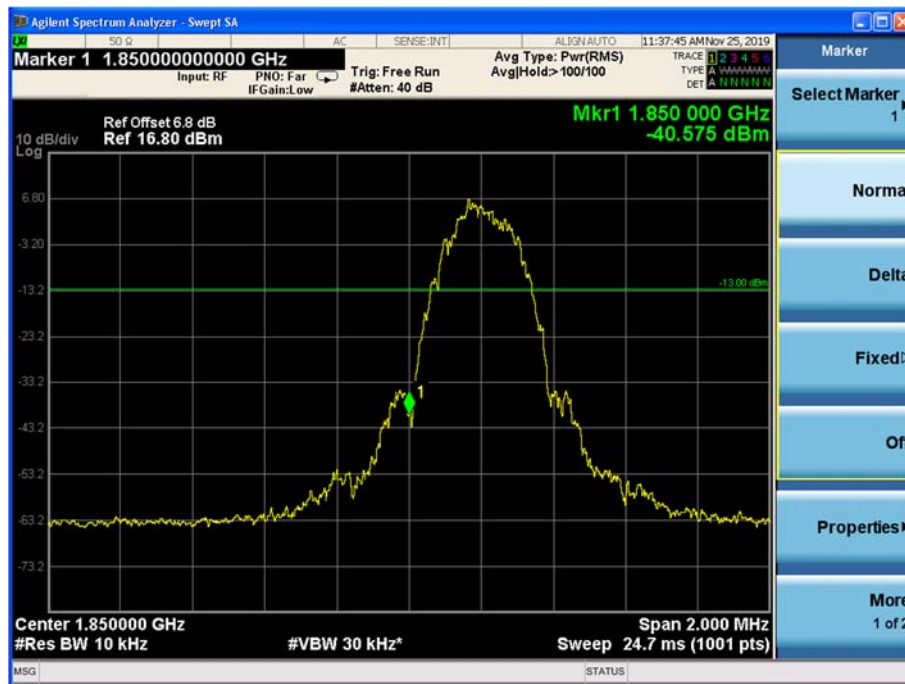

Channel 512

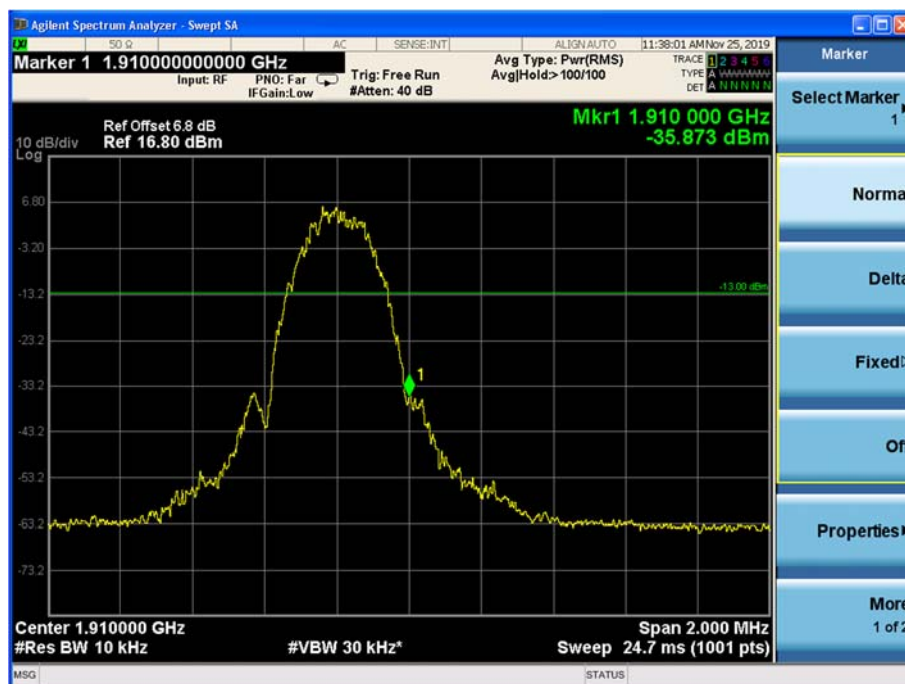

Channel 810

Frequency Stability

GSM850

GPRS MODE:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 128	Channel 189	Channel 251
-10	0.047	0.058	-0.041
0	0.006	0.085	-0.087
+10	0.032	0.001	0.061
+20	0.000	0.000	0.000
+30	-0.020	0.018	-0.031
+40	0.065	0.045	0.028
+50	0.038	0.080	0.098
+55	-0.080	0.053	-0.049
Voltage	Test Result (ppm)@NT		
	Channel 128	Channel 189	Channel 251
LV	0.085	0.041	0.056
HV	-0.079	0.088	-0.071

EDGE (8PSK) MODE:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 128	Channel 189	Channel 251
-10	-0.022	-0.064	0.025
0	0.006	-0.047	0.065
+10	-0.021	0.021	-0.036
+20	0.000	0.000	0.000
+30	0.098	-0.070	-0.079
+40	0.060	-0.085	-0.039
+50	0.069	0.039	-0.099
+55	-0.011	0.024	0.032
Voltage	Test Result (ppm)@NT		
	Channel 128	Channel 189	Channel 251
LV	0.036	0.054	0.052
HV	0.041	-0.062	-0.016

PCS1900

GPRS MODE:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 512	Channel 661	Channel 810
-10	0.057	-0.068	-0.008
0	-0.098	-0.050	0.054
+10	-0.005	0.030	-0.054
+20	0.000	0.000	0.000
+30	-0.086	0.092	0.024
+40	-0.057	0.002	-0.048
+50	0.067	0.093	0.098
+55	-0.059	0.094	-0.042
Voltage	Test Result (ppm)@NT		
	Channel 512	Channel 661	Channel 810
LV	0.059	0.082	0.062
HV	-0.008	-0.091	0.058


EDGE (8PSK) MODE:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 512	Channel 661	Channel 810
-10	0.065	0.034	0.022
0	-0.053	-0.095	0.049
+10	0.032	-0.044	-0.082
+20	0.000	0.000	0.000
+30	-0.040	0.083	0.075
+40	0.034	0.031	-0.080
+50	0.028	0.095	0.095
+55	-0.084	-0.072	0.062
Voltage	Test Result (ppm)@NT		
	Channel 512	Channel 661	Channel 810
LV	-0.027	-0.068	0.012
HV	0.030	0.082	0.055

Peak-Average Ratio

GSM850


GPRS MODE:

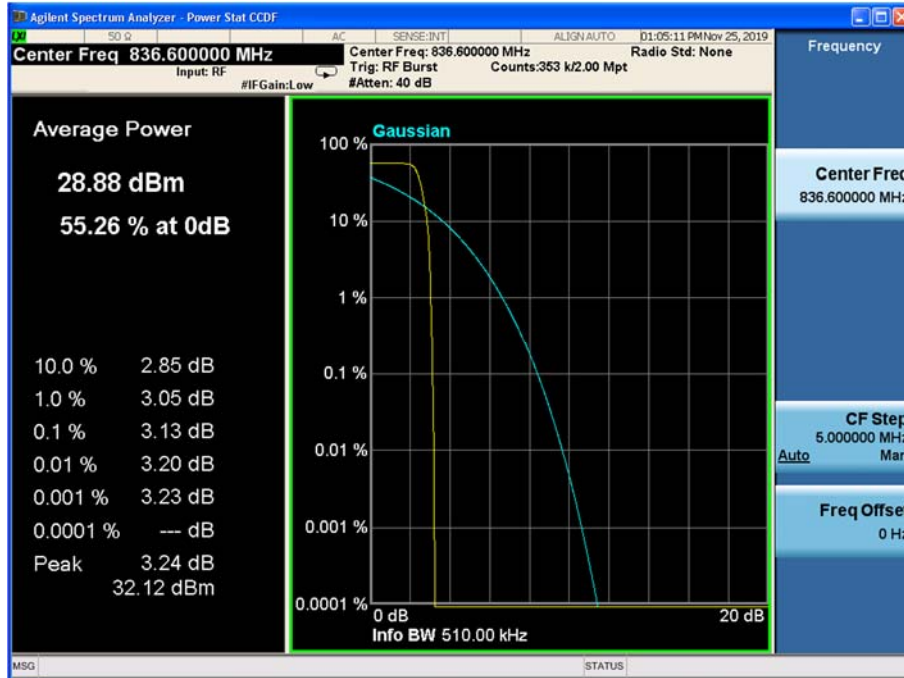

EDGE (8PSK) MODE:



PCS1900
GPRS MODE:

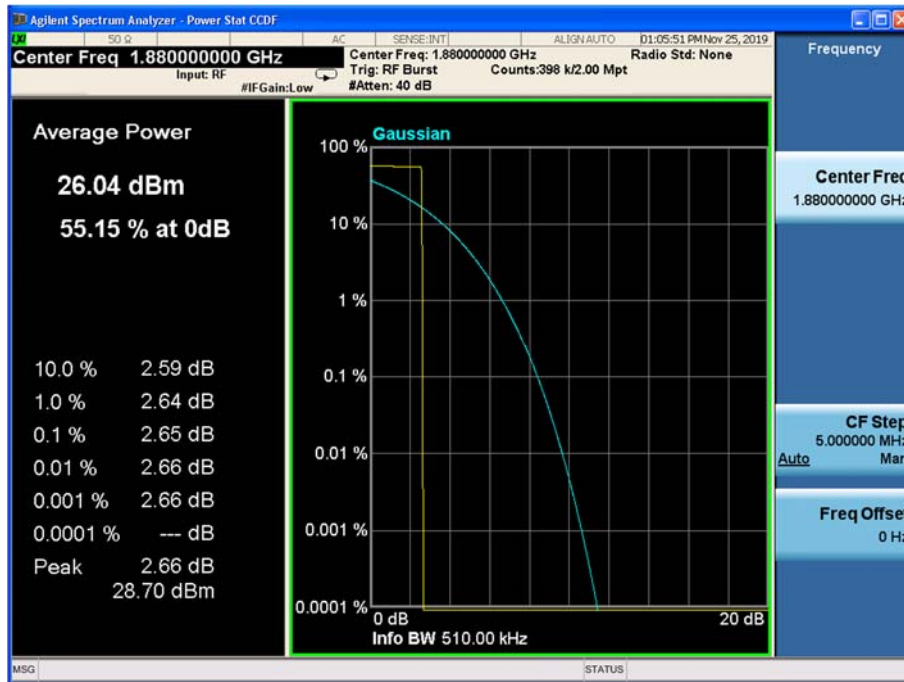

EDGE (8PSK) MODE:



APPENDIX B – TEST DATA OF RADIATED EMISSION

850 Test result:

The measurement results are obtained as described below:

Peak ERP = Pmea + Pca Cable loss+ Ga Antenna Gain- Correction

Sample calculation: (32.10 dBm) = (29.35 dBm) + (-3.8 dB) + (8.3 dB)- (2.15 dB), the corresponding frequency is 824.2MHz.

Frequency (MHz)	Power step	Peak ERP (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Correction (dB)	Pmea (dBm)	Polarization
824.2	5	32.10	-3.4	8.3	2.15	29.35	Vertical

Up Antenna

GSM/GPRS MODE:

Frequency (MHz)	Power step	Peak ERP (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Correction (dB)	Pmea (dBm)	Polarization
824.2	5	32.10	-3.4	8.3	2.15	29.35	Vertical
836.6	5	31.64	-3.4	8.3	2.15	28.89	Vertical
848.8	5	31.38	-3.4	8.3	2.15	28.63	Vertical

EDGE MODE:

Frequency (MHz)	Power step	Peak ERP (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Correction (dB)	Pmea (dBm)	Polarization
824.2	5	31.35	-3.4	8.3	2.15	28.60	Vertical
836.6	5	32.13	-3.4	8.3	2.15	29.38	Vertical
848.8	5	31.33	-3.4	8.3	2.15	28.58	Vertical

Test result:

GSM/GPRS MODE Channel 128:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1646.99	-53.26	-13	Vertical
1665.43	-51.59	-13	Vertical
2535.17	-44.21	-13	Vertical
2576.69	-44.14	-13	Vertical
8962.82	-39.89	-13	Vertical
9971.47	-36.02	-13	Vertical

EDGE (8PSK) MODE Channel 128:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1648.29	-52.70	-13	Vertical
1667.62	-50.87	-13	Vertical
2532.49	-44.71	-13	Vertical
2579.04	-44.19	-13	Vertical
8961.08	-39.92	-13	Vertical
9973.58	-35.94	-13	Vertical

GSM/GPRS MODE Channel 189:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1649.40	-53.00	-13	Vertical
1667.42	-50.82	-13	Vertical
2534.93	-44.55	-13	Vertical
2577.94	-44.62	-13	Vertical
8963.14	-39.71	-13	Vertical
9971.50	-36.78	-13	Vertical

EDGE (8PSK) MODE Channel 189:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1648.53	-53.24	-13	Vertical
1665.92	-51.14	-13	Vertical
2536.13	-44.65	-13	Vertical
2576.73	-44.50	-13	Vertical
8962.56	-39.49	-13	Vertical
9972.84	-36.03	-13	Vertical

GSM/GPRS MODE Channel 251:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1647.13	-53.44	-13	Vertical
1665.62	-50.86	-13	Vertical
2533.47	-44.55	-13	Vertical
2578.52	-43.76	-13	Vertical
8960.83	-39.30	-13	Vertical
9971.08	-36.62	-13	Vertical

EDGE (8PSK) MODE Channel 251:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1646.68	-52.73	-13	Vertical
1667.55	-51.26	-13	Vertical
2532.86	-44.60	-13	Vertical
2575.43	-44.14	-13	Vertical
8964.02	-39.12	-13	Vertical
9972.09	-36.36	-13	Vertical

Down Antenna

GSM/GPRS MODE:

Frequency (MHz)	Power step	Peak ERP (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Correction (dB)	Pmea (dBm)	Polarization
824.2	5	31.41	-3.4	8.3	2.15	28.66	Vertical
836.6	5	31.98	-3.4	8.3	2.15	29.23	Vertical
848.8	5	31.35	-3.4	8.3	2.15	28.60	Vertical

EDGE MODE:

Frequency (MHz)	Power step	Peak ERP (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Correction (dB)	Pmea (dBm)	Polarization
824.2	5	31.49	-3.4	8.3	2.15	28.74	Vertical
836.6	5	31.43	-3.4	8.3	2.15	28.68	Vertical
848.8	5	31.49	-3.4	8.3	2.15	28.74	Vertical

Test result:

GSM/GPRS MODE Channel 128:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1647.40	-52.78	-13	Vertical
1668.08	-51.59	-13	Vertical
2535.29	-44.25	-13	Vertical
2576.55	-44.49	-13	Vertical
8963.36	-39.36	-13	Vertical
9970.24	-36.24	-13	Vertical

EDGE (8PSK) MODE Channel 128:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1647.29	-53.04	-13	Vertical
1666.18	-51.40	-13	Vertical
2534.97	-44.60	-13	Vertical
2576.16	-43.81	-13	Vertical
8962.43	-39.80	-13	Vertical
9970.24	-35.91	-13	Vertical

GSM/GPRS MODE Channel 189:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1648.33	-53.29	-13	Vertical
1665.69	-51.30	-13	Vertical
2535.85	-44.50	-13	Vertical
2577.47	-44.61	-13	Vertical
8964.26	-39.16	-13	Vertical
9972.14	-36.31	-13	Vertical

EDGE (8PSK) MODE Channel 189:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1647.24	-53.41	-13	Vertical
1665.96	-51.51	-13	Vertical
2535.55	-44.29	-13	Vertical
2576.95	-43.70	-13	Vertical
8961.13	-39.91	-13	Vertical
9972.47	-36.72	-13	Vertical

GSM/GPRS MODE Channel 251:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1649.19	-52.74	-13	Vertical
1668.49	-51.05	-13	Vertical
2533.33	-44.03	-13	Vertical
2578.99	-44.39	-13	Vertical
8961.01	-39.49	-13	Vertical
9970.50	-35.87	-13	Vertical

EDGE (8PSK) MODE Channel 251:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1647.75	-53.08	-13	Vertical
1667.69	-51.41	-13	Vertical
2533.85	-44.46	-13	Vertical
2575.86	-44.35	-13	Vertical
8962.74	-39.10	-13	Vertical
9972.07	-35.96	-13	Vertical

Up Antenna

GSM1900 Test result:

GSM/GPRS MODE:

Frequency (MHz)	Power step	Peak EIRP(dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1850.2	0	28.93	-3.8	8.6	24.13	Vertical
1880.0	0	28.90	-3.8	8.6	24.10	Vertical
1909.8	0	29.35	-3.8	8.6	24.55	Vertical

EDGE MODE:

Frequency (MHz)	Power step	Peak EIRP(dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1850.2	0	29.18	-3.8	8.6	24.38	Vertical
1880.0	0	29.51	-3.8	8.6	24.71	Vertical
1909.8	0	29.51	-3.8	8.6	24.71	Vertical

Test result:

GSM/GPRS MODE Channel 512

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2458.43	-49.48	-13	Vertical
2780.26	-46.91	-13	Vertical
3727.92	-40.45	-13	Vertical
6677.95	-39.48	-13	Vertical
9961.67	-37.23	-13	Vertical
17818.94	-34.15	-13	Vertical

EDGE (8PSK) MODE Channel 512:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2459.43	-49.14	-13	Vertical
2779.24	-47.55	-13	Vertical
3727.25	-40.52	-13	Vertical
6675.94	-39.18	-13	Vertical
9960.45	-37.34	-13	Vertical
17819.87	-34.06	-13	Horizontal

GSM/GPRS MODE Channel 661:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2460.92	-48.74	-13	Vertical
2779.25	-47.20	-13	Vertical
3726.01	-40.77	-13	Vertical
6676.31	-39.64	-13	Vertical
9959.59	-37.35	-13	Vertical
17820.32	-33.99	-13	Vertical

EDGE (8PSK) MODE Channel 661:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2459.11	-48.98	-13	Vertical
2778.58	-47.06	-13	Vertical
3725.20	-40.63	-13	Vertical
6678.22	-39.45	-13	Vertical
9960.30	-37.76	-13	Vertical
17818.44	-34.19	-13	Vertical

GSM/GPRS MODE Channel 810:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2458.37	-49.22	-13	Vertical
2778.72	-47.41	-13	Vertical
3725.35	-40.40	-13	Vertical
6675.59	-40.06	-13	Vertical
9961.29	-36.81	-13	Vertical
17822.02	-34.00	-13	Vertical

EDGE (8PSK) MODE Channel 810:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2459.26	-48.97	-13	Vertical
2780.81	-47.45	-13	Vertical
3727.50	-40.93	-13	Vertical
6677.54	-39.83	-13	Vertical
9961.85	-37.45	-13	Vertical
17819.69	-33.73	-13	Vertical

Down Antenna

GSM 1900 Test result:

GSM/GPRS MODE:

Frequency (MHz)	Power step	Peak EIRP(dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1850.2	0	28.71	-3.8	8.6	23.91	Vertical
1880.0	0	29.66	-3.8	8.6	24.86	Vertical
1909.8	0	29.44	-3.8	8.6	24.64	Vertical

EDGE MODE:

Frequency (MHz)	Power step	Peak EIRP(dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1850.2	0	28.93	-3.8	8.6	24.13	Vertical
1880.0	0	29.04	-3.8	8.6	24.24	Vertical
1909.8	0	29.18	-3.8	8.6	24.38	Vertical

Test result:

GSM/GPRS MODE Channel 512

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2459.10	-48.83	-13	Vertical
2778.45	-47.41	-13	Vertical
3725.76	-41.34	-13	Vertical
6677.26	-40.12	-13	Vertical
9960.14	-37.04	-13	Vertical
17820.47	-33.48	-13	Vertical

EDGE (8PSK) MODE Channel 512:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2461.52	-49.37	-13	Vertical
2779.78	-47.55	-13	Vertical
3724.96	-40.72	-13	Vertical
6675.86	-40.08	-13	Vertical
9962.03	-37.37	-13	Vertical
17820.34	-33.85	-13	Horizontal

GSM/GPRS MODE Channel 661:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2458.07	-49.31	-13	Vertical
2779.28	-47.36	-13	Vertical
3726.78	-41.07	-13	Vertical
6678.01	-39.34	-13	Vertical
9960.86	-37.02	-13	Vertical
17820.08	-34.00	-13	Vertical

EDGE (8PSK) MODE Channel 661:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2460.57	-49.21	-13	Vertical
2781.12	-47.26	-13	Vertical
3726.69	-41.13	-13	Vertical
6676.06	-39.51	-13	Vertical
9961.03	-36.93	-13	Vertical
17820.90	-33.84	-13	Vertical

GSM/GPRS MODE Channel 810:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2460.65	-49.24	-13	Vertical
2779.75	-47.19	-13	Vertical
3728.07	-41.29	-13	Vertical
6677.16	-39.92	-13	Vertical
9963.29	-36.83	-13	Vertical
17820.23	-34.31	-13	Vertical

EDGE (8PSK) MODE Channel 810:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2457.77	-49.30	-13	Vertical
2778.74	-47.00	-13	Vertical
3727.43	-41.29	-13	Vertical
6676.65	-39.75	-13	Vertical
9961.28	-37.33	-13	Vertical
17821.35	-33.99	-13	Vertical

Test with secondary supply:

GSM/GPRS MODE Up Antenna Channel 128 is selected as the worst point for RSE.

GSM/GPRS MODE Channel 128:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2461.40	-48.90	-13	Vertical
2779.63	-47.52	-13	Vertical
3726.63	-41.05	-13	Vertical
6677.66	-39.53	-13	Vertical
9960.94	-37.31	-13	Vertical
17818.38	-33.64	-13	Vertical

---End of Test Report---