

# FCC RADIO TEST REPORT

**FCC ID:2ADOY0989**

**Sample:** ROLL-FLEX LED SERIES PANEL

**Trade Name:** FALCONEYES

**Main Model:** RX-24TDX

RX-18TD, RX-36TDX, RX-48TDX,

RX-120TDX, RX-7120, RX-18TDX

II,RX-24TDX II,RX-36TDX II, RX-48TDX

II,RX-120TDX, RX-7120II, RX-718, RX-724,

RX-736,

RX-748,RX-818,RX-824,RX-836,RX-848,

RX-18TDX III, RX-24TDXIII,RX-36TDX III,

RX-48TDX III, RX-120TDX III, RX-7120 III

**Report No.:** UNIA22030115ER-61

**Additional Model:**

## Prepared for

FALCON EYES LTD.

Unit E1,11/F,Phase1,Hang Fung Building,2G Hok Yuen Street Hung  
Hom,Kowloon,HongKong,CHINA

## Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang  
Community, Xixiang Str, Bao'an District, Shenzhen, China



深圳市优测检测技术有限公司  
Shenzhen United Testing Technology Co.,Ltd.  
United Testing Technology (Hong Kong) Limited

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China  
深圳市宝安区西乡街道铁岗社区宝田一路365号嘉皇源科技园附楼2楼 邮编: 518102 Tel: +86-755-86180996 Fax: +86-755-86180156

<http://www.uni-lab.hk>

**TEST RESULT CERTIFICATION**

**Applicant**.....: FALCON EYES LTD.

Address.....: Unit E1,11/F,Phase1,Hang Fung Building,2G Hok Yuen Street  
Hung Hom,Kowloon,Hong Kong,CHINA

**Manufacturer**.....: FALCON EYES LTD.

Address.....: Unit E1,11/F,Phase1,Hang Fung Building,2G Hok Yuen Street  
Hung Hom,Kowloon,Hong Kong,CHINA

**Product description**

Product.....: ROLL-FLEX LED SERIES PANEL

Trade Name.....: FALCONEYES

RX-24TDX, RX-18TD, RX-36TDX, RX-48TDX, RX-120TDX,  
RX-7120, RX-18TDX II, RX-24TDX II, RX-36TDX II,

Model Name.....: RX-48TDX II, RX-120TDX, RX-7120II, RX-718, RX-724, RX-736,  
RX-748, RX-818, RX-824, RX-836, RX-848, RX-18TDX III,  
RX-24TDXIII, RX-36TDX III, RX-48TDX III, RX-120TDX III,  
RX-7120 III

**Test Methods**.....: FCC Rules and Regulations Part 15 Subpart C Section 15.249,  
ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

**Date of Test**.....:

Date (s) of performance of tests.....: February 25, 2022 to March 11, 2022

Date of Issue.....: March 26, 2022

Test Result.....: Pass



Prepared by:

Jackson Fang/Editor

  
**kahn.yang**

Reviewer:

Kahn yang/Supervisor



Approved & Authorized Signer:

Liuze/Manager

## Table of Contents

|   | Page |
|---|------|
| <b>1 TEST SUMMARY</b>                                     | 4    |
| <b>2 GENERAL INFORMATION</b>                              | 6    |
| <b>2.1 GENERAL DESCRIPTION OF EUT</b>                     | 6    |
| <b>2.2 CARRIER FREQUENCY OF CHANNELS</b>                  | 7    |
| <b>2.3 TEST MODE</b>                                      | 7    |
| <b>2.4 TEST SETUP</b>                                     | 7    |
| <b>2.5 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL</b> | 8    |
| <b>2.6 MEASUREMENT INSTRUMENTS LIST</b>                   | 9    |
| <b>3 CONDUCTED EMISSION</b>                               | 10   |
| <b>3.1 TESTLIMIT</b>                                      | 10   |
| <b>3.2 TEST SETUP</b>                                     | 10   |
| <b>3.3 TEST PROCEDURE</b>                                 | 11   |
| <b>3.4 TESTRESULT</b>                                     | 11   |
| <b>4 RADIATED EMISSION</b>                                | 14   |
| <b>4.1 TESTLIMIT</b>                                      | 14   |
| <b>4.2 TESTSETUP</b>                                      | 15   |
| <b>4.3 TEST PROCEDURE</b>                                 | 16   |
| <b>4.4 TESTRESULT</b>                                     | 16   |
| <b>5 BAND EDGE</b>  | 21   |
| <b>5.1 TESTLIMIT</b>                                      | 21   |
| <b>5.2 TEST PROCEDURE</b>                                 | 21   |
| <b>5.3 TESTRESULT</b>                                     | 21   |
| <b>6 OCCUPIED BANDWIDTH</b>                               | 24   |
| <b>6.1 TESTSETUP</b>                                      | 24   |
| <b>6.2 TEST PROCEDURE</b>                                 | 24   |
| <b>6.4 TESTRESULT</b>                                     | 24   |
| <b>7 ANTENNA REQUIREMENT</b>                              | 25   |
| <b>8 PHOTO OF TEST</b>                                    | 26   |
| <b>8.1 RADIATED EMISSION</b>                              | 26   |
| <b>8.2 CONDUCTED EMISSION</b>                             | 27   |

**TEST SUMMARY****TEST PROCEDURES AND RESULTS**

| ITEM                | STANDARD               | RESULT    |
|---------------------|------------------------|-----------|
| CONDUCTED EMISSION  | FCC Part 15.207        | COMPLIANT |
| RADIATED EMISSION   | FCC Part 15.209/15.249 | COMPLIANT |
| BAND EDGE           | FCC Part 15.249/15.205 | COMPLIANT |
| OCCUPIEDBANDWIDTH   | FCC Part 15.215        | COMPLIANT |
| ANTENNA REQUIREMENT | FCC Part 15.203        | COMPLIANT |

**TEST FACILITY**

Test Firm : Shenzhen United Testing Technology Co.,Ltd.  
Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 21947

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

## MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

### A. Conducted Measurement:

| Test Site | Method | Measurement Frequency Range | U, (dB) | NOTE |
|-----------|--------|-----------------------------|---------|------|
| UNI       | ANSI   | 9kHz ~ 150kHz               | 2.96    |      |
|           |        | 150kHz ~ 30MHz              | 2.44    |      |

### B. Radiated Measurement:

| Test Site | Method | Measurement Frequency Range | U, (dB) | NOTE |
|-----------|--------|-----------------------------|---------|------|
| UNI       | ANSI   | 9kHz ~ 30MHz                | 2.50    |      |
|           |        | 30MHz ~ 1000MHz             | 4.80    |      |
|           |        | Above 1000MHz               | 4.13    |      |

## GENERAL INFORMATION

## GENERAL DESCRIPTION OF EUT

|                     |  |
|---------------------|--|
| Product:            | ROLL-FLEX LED SERIES PANEL   |
| Trade Name:         | FALCONEYES   |
| Main Model:         | RX-24TDX   |
| Additional Model:   | RX-18TD, RX-36TDX, RX-48TDX, RX-120TDX, RX-7120, RX-18TDX II, RX-24TDX II, RX-36TDX II, RX-48TDX II, RX-120TDX, RX-7120II, RX-718, RX-724, RX-736, RX-748, RX-818, RX-824, RX-836, RX-848, RX-18TDX III, RX-24TDXIII, RX-36TDX III, RX-48TDX III, RX-120TDX III, RX-7120 III |
| Model Difference:   | All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: RX-24TDX   |
| FCC ID:             | 2ADOY0989  |
| Frequency Range:    | 2407MHz  |
| Number of Channels: | 1CH  |
| Modulation Type:    | GFSK   |
| Antenna Type:       | FPC Antenna  |
| Antenna Gain:       | 0dBi   |
| Battery:            | N/A  |
| Adapter:            | N/A  |
| Power Source:       | AC 100-240V~, 50/60Hz, 150W  |

## CARRIER FREQUENCY OF CHANNELS

| Channel List |                 |         |                 |         |                 |         |                 |
|--------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01           | 2407            | --      | --              | --      | --              | --      | --              |

## TEST MODE

The EUT was programmed to be in continuously transmitting mode.

| Channel List                         |             |                      |
|--------------------------------------|-------------|----------------------|
| Test Channel                         | EUT Channel | Test Frequency (MHz) |
| Only One Channel provided to the EUT | CH01        | 2407                 |

## TEST SETUP

Operation of EUT during Conducted and Radiation testing:



## DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                  | Mfr/Brand  | Model/Type No. | Note |
|------|----------------------------|------------|----------------|------|
| E-1  | ROLL-FLEX LED SERIES PANEL | FALCONEYES | RX-24TDX       | EUT  |
|      |                            |            |                |      |
|      |                            |            |                |      |
|      |                            |            |                |      |
|      |                            |            |                |      |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |

## Note:

1. The support equipment was authorized by Declaration of Confirmation.
2. For detachable type I/O cable should be specified the length in cm in 『Length』 column.
3. "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

## MEASUREMENT INSTRUMENTS LIST

| Item                             | Equipment                           | Manufacturer  | Model No.      | Serial No.    | Calibrated until |
|----------------------------------|-------------------------------------|---------------|----------------|---------------|------------------|
| Conduction Emissions Measurement |                                     |               |                |               |                  |
| 1                                | Conducted Emission Test Software    | EZ-EMC        | Ver.CCS-3A1-CE | N/A           | N/A              |
| 2                                | AMN                                 | Schwarzbeck   | NNLK8121       | 8121370       | 2022.09.22       |
| 3                                | AAN                                 | TESEQ         | T8-Cat6        | 38888         | 2022.09.22       |
| 4                                | Pulse Limiter                       | CYBRTEK       | EM5010         | E115010056    | 2022.05.17       |
| 5                                | EMI Test Receiver                   | Rohde&Schwarz | ESCI           | 101210        | 2022.09.22       |
| Radiated Emissions Measurement   |                                     |               |                |               |                  |
| 1                                | Radiated Emission Test Software     | EZ-EMC        | Ver.CCS-03A1   | N/A           | N/A              |
| 2                                | Horn Antenna                        | Sunol         | DRH-118        | A101415       | 2022.09.27       |
| 3                                | Broadband Hybrid Antenna            | Sunol         | JB1            | A090215       | 2024.02.26       |
| 4                                | PREAMP                              | HP            | 8449B          | 3008A00160    | 2022.09.22       |
| 5                                | PREAMP                              | HP            | 8447D          | 2944A07999    | 2022.05.17       |
| 6                                | EMI TEST RECEIVER                   | Rohde&Schwarz | ESR3           | 101891        | 2022.09.22       |
| 7                                | VECTOR Signal Generator             | Rohde&Schwarz | SMU200A        | 101521        | 2022.09.22       |
| 8                                | Signal Generator                    | Agilent       | E4421B         | MY4335105     | 2022.09.22       |
| 9                                | MXA Signal Analyzer                 | Agilent       | N9020A         | MY50510140    | 2022.09.22       |
| 10                               | MXA Signal Analyzer                 | Keysight      | N9020A         | MY51110104    | 2022.09.22       |
| 11                               | RF Power sensor                     | DARE          | RPR3006W       | 15I00041SNO88 | 2022.05.17       |
| 12                               | RF Power sensor                     | DARE          | RPR3006W       | 15I00041SNO89 | 2022.05.17       |
| 13                               | RF power divider                    | Anritsu       | K241B          | 992289        | 2022.09.22       |
| 14                               | Wideband radio communication tester | Rohde&Schwarz | CMW500         | 154987        | 2022.09.22       |
| 15                               | Active Loop Antenna                 | Com-Power     | AL-130R        | 10160009      | 2022.07.25       |
| 16                               | Broadband Hybrid Antennas           | Schwarzbeck   | VULB9163       | VULB9163#958  | 2022.09.22       |
| 17                               | Horn Antenna                        | Schwarzbeck   | BBHA9120D      | 9120D-1680    | 2022.05.23       |
| 18                               | Horn Antenna                        | A-INFOMW      | LB-180400-KF   | J211060660    | 2022.09.27       |
| 19                               | Microwave Broadband Preamplifier    | Schwarzbeck   | BBV 9721       | 100472        | 2022.09.22       |
| 20                               | Signal Generator                    | Agilent       | N5183A         | MY47420153    | 2022.09.22       |
| 21                               | Spectrum Analyzer                   | Rohde&Schwarz | FSP 40         | 100501        | 2022.09.22       |
| 22                               | Power Meter                         | KEYSIGHT      | N1911A         | MY50520168    | 2022.09.22       |
| 23                               | Frequency Meter                     | VICTOR        | VC2000         | 997406086     | 2022.09.22       |
| 24                               | DC Power Source                     | HYELEC        | HY5020E        | 055161818     | 2022.09.22       |

## CONDUCTED EMISSION

### 3.1 TESTLIMIT


For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following

| Frequency<br>(MHz) | Maximum RF Line Voltage(dB $\mu$ V) |      |         |        |
|--------------------|-------------------------------------|------|---------|--------|
|                    | CLASS A                             |      | CLASS B |        |
|                    | Q.P.                                | Ave. | Q.P.    | Ave.   |
| 0.15~0.50          | 79                                  | 66   | 66~56*  | 56~46* |
| 0.50~5.00          | 73                                  | 60   | 56      | 46     |
| 5.00~30.0          | 73                                  | 60   | 60      | 50     |

\* Decreasing linearly with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

### 3.2 TEST SETUP

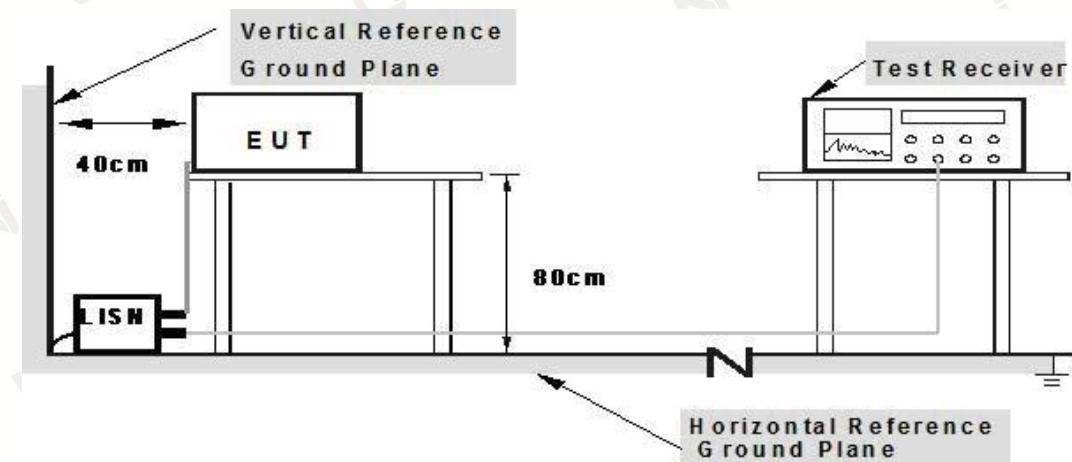

**Note:**

- 1. Support units were connected to second LISH.
- 2. Both of LISHs (A M M) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.3 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is placed on a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.


### 3.4 TESTRESULT

PASS

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.


|               |                   |                    |         |
|---------------|-------------------|--------------------|---------|
| Temperature:  | 24°C              | Relative Humidity: | 48%     |
| Test Date:    | March 01, 2022    | Pressure:          | 1010hPa |
| Test Voltage: | AC 120V, 60Hz     | Phase:             | Line    |
| Test Mode:    | Keep Transmitting |                    |         |

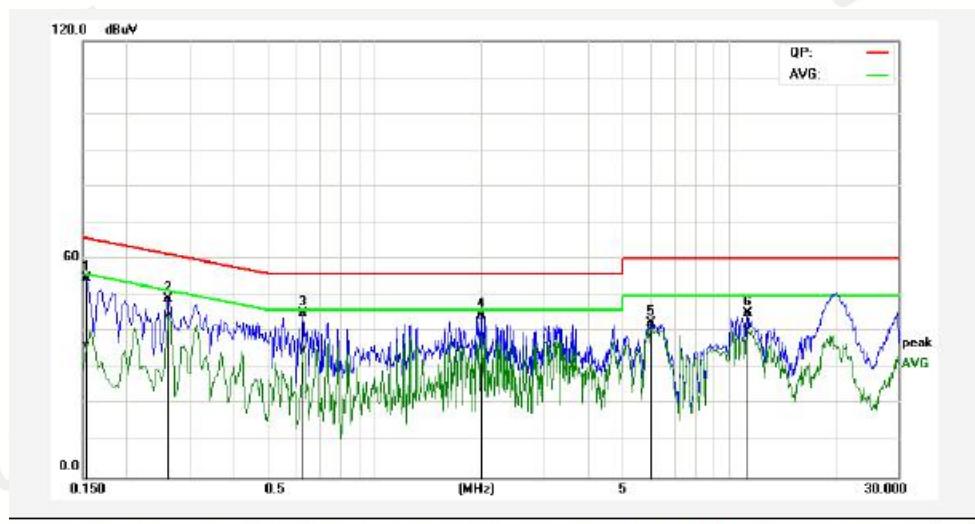

| No. | Frequency<br>(MHz) | QuasiPeak<br>reading<br>(dBuV) | Average<br>reading<br>(dBuV) | Correction<br>factor<br>(dB) | QuasiPeak<br>result<br>(dBuV) | Average<br>result<br>(dBuV) | QuasiPeak<br>limit<br>(dBuV) | Average<br>limit<br>(dBuV) | QuasiPeak<br>margin<br>(dB) | Average<br>margin<br>(dB) | Remark |
|-----|--------------------|--------------------------------|------------------------------|------------------------------|-------------------------------|-----------------------------|------------------------------|----------------------------|-----------------------------|---------------------------|--------|
| 1P  | 0.1540             | 44.74                          | 26.58                        | 10.01                        | 54.75                         | 36.59                       | 65.78                        | 55.78                      | -11.03                      | -19.19                    | Pass   |
| 2*  | 0.2620             | 39.03                          | 34.68                        | 10.00                        | 49.03                         | 44.68                       | 61.36                        | 51.37                      | -12.33                      | -6.69                     | Pass   |
| 3P  | 0.6300             | 35.11                          | 25.16                        | 9.98                         | 45.09                         | 35.14                       | 56.00                        | 46.00                      | -10.91                      | -10.86                    | Pass   |
| 4P  | 1.9980             | 34.62                          | 28.87                        | 10.03                        | 44.65                         | 38.90                       | 56.00                        | 46.00                      | -11.35                      | -7.10                     | Pass   |
| 5P  | 6.0500             | 32.38                          | 30.96                        | 10.07                        | 42.45                         | 41.03                       | 60.00                        | 50.00                      | -17.55                      | -8.97                     | Pass   |
| 6P  | 11.3140            | 35.12                          | 30.80                        | 10.14                        | 45.26                         | 40.94                       | 60.00                        | 50.00                      | -14.74                      | -9.06                     | Pass   |

Remark: Factor = Insertion Loss + Cable Loss, Result=Reading + Factor, Margin=Result – Limit.

|               |                   |                    |         |
|---------------|-------------------|--------------------|---------|
| Temperature:  | 24°C              | Relative Humidity: | 48%     |
| Test Date:    | March 01, 2022    | Pressure:          | 1010hPa |
| Test Voltage: | AC 120V, 60Hz     | Phase:             | Neutral |
| Test Mode:    | Keep Transmitting |                    |         |

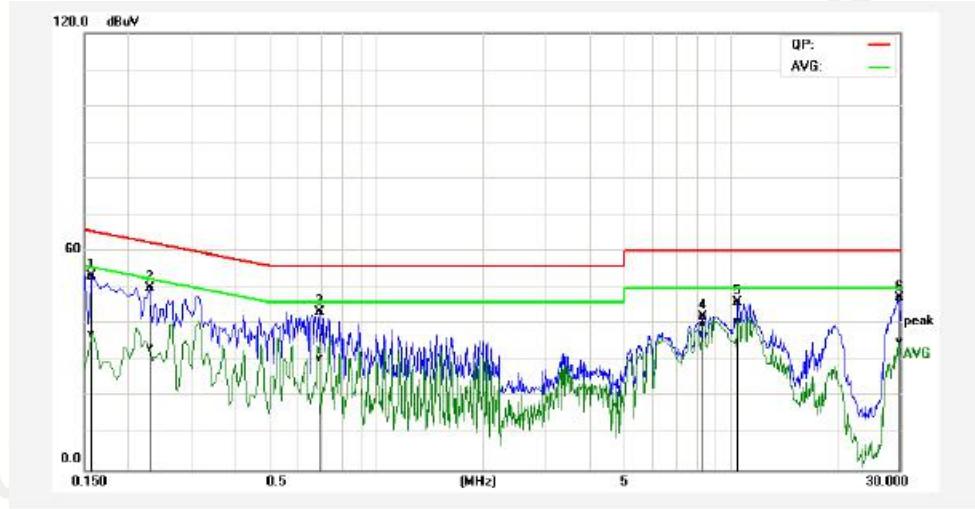

| No. | Frequency (MHz) | QuasiPeak reading (dBuV) | Average reading (dBuV) | Correction factor (dB) | QuasiPeak result (dBuV) | Average result (dBuV) | QuasiPeak limit (dBuV) | Average limit (dBuV) | QuasiPeak margin (dB) | Average margin (dB) | Remark |
|-----|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------|
| 1P  | 0.1580          | 43.31                    | 27.33                  | 10.01                  | 53.32                   | 37.34                 | 65.56                  | 55.57                | -12.24                | -18.23              | Pass   |
| 2P  | 0.2300          | 39.92                    | 23.51                  | 10.02                  | 49.94                   | 33.53                 | 62.45                  | 52.45                | -12.51                | -18.92              | Pass   |
| 3P  | 0.6900          | 33.50                    | 20.74                  | 9.99                   | 43.49                   | 30.73                 | 56.00                  | 46.00                | -12.51                | -15.27              | Pass   |
| 4P  | 8.3580          | 32.14                    | 29.78                  | 10.08                  | 42.22                   | 39.86                 | 60.00                  | 50.00                | -17.78                | -10.14              | Pass   |
| 5*  | 10.4980         | 36.00                    | 30.68                  | 10.11                  | 46.11                   | 40.79                 | 60.00                  | 50.00                | -13.89                | -9.21               | Pass   |
| 6P  | 29.9820         | 36.27                    | 24.42                  | 10.86                  | 47.13                   | 35.28                 | 60.00                  | 50.00                | -12.87                | -14.72              | Pass   |

Remark: Factor = Insertion Loss + Cable Loss, Result=Reading + Factor, Margin=Result – Limit.

## 4 RADIATED EMISSION

### 4.1 TESTLIMIT

For unintentional device, according to § 15.209(a), except for Class B digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency         | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark     | Measurement distance (m) |
|-------------------|----------------------------------|----------------|------------|--------------------------|
| 0.009MHz-0.490MHz | 2400/F (kHz)                     | -              | Quasi-peak | 300                      |
| 0.490MHz-1.705MHz | 24000/F (kHz)                    | -              | Quasi-peak | 30                       |
| 1.705MHz-30MHz    | 30                               | -              | Quasi-peak | 30                       |
| 30MHz-88MHz       | 100                              | 40.0           | Quasi-peak | 3                        |
| 88MHz-216MHz      | 150                              | 43.5           | Quasi-peak | 3                        |
| 216MHz-960MHz     | 200                              | 46.0           | Quasi-peak | 3                        |
| 960MHz-1GHz       | 500                              | 54.0           | Quasi-peak | 3                        |
| Above 1GHz        | 500                              | 54.0           | Average    | 3                        |
|                   |                                  | 74.0           | Peak       | 3                        |


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

Limit: (Field strength of the fundamental signal)


| Frequency         | Limit (dBuV/m @3m) | Remark        |
|-------------------|--------------------|---------------|
| 2400MHz-2483.5MHz | 94.0               | Average Value |
|                   | 114.0              | Peak Value    |

## 4.2 TESTSETUP


### 1. Radiated Emission Test-Up Frequency Below 30MHz

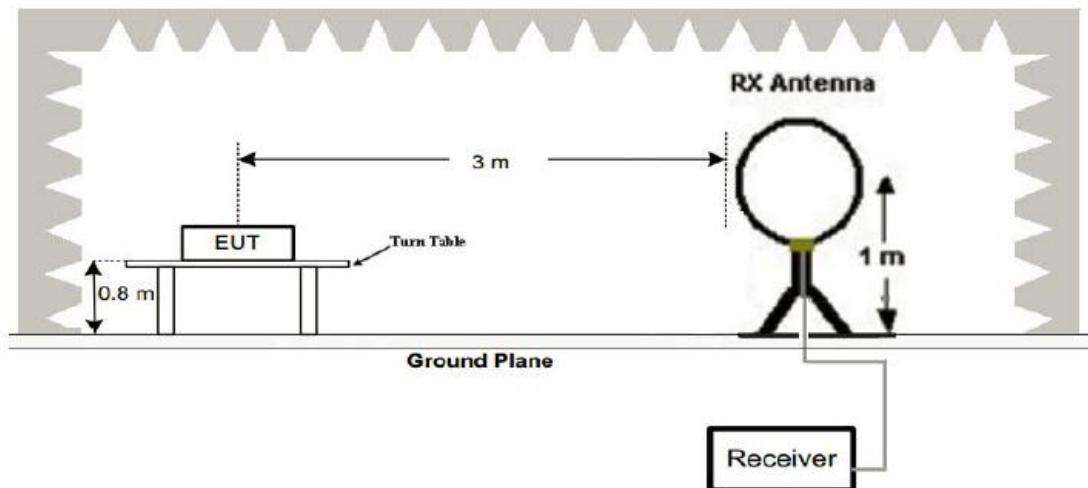

### 2. Radiated Emission Test-Up Frequency 30MHz~1GHz

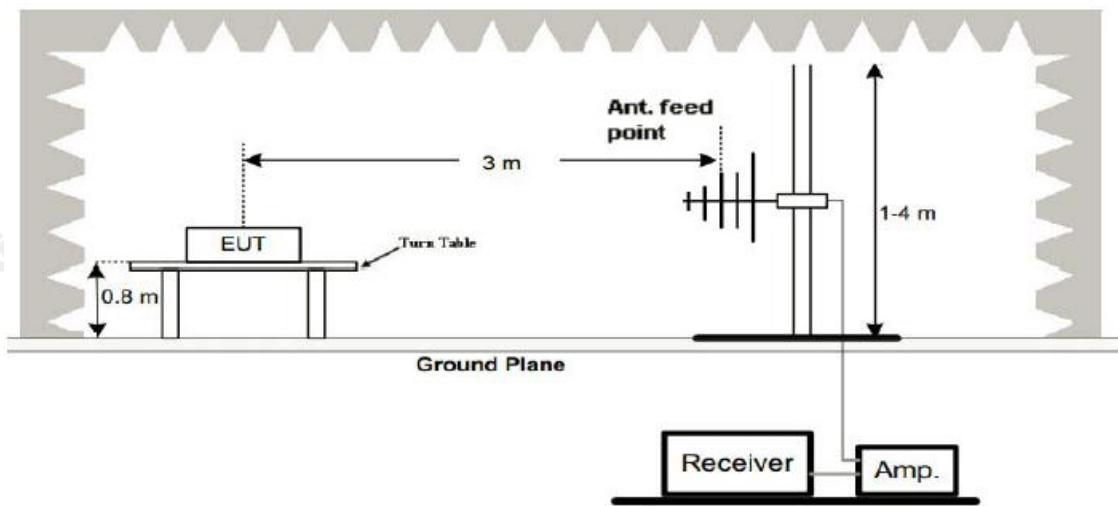

### 3. Radiated Emission Test-Up Frequency Above 1GHz

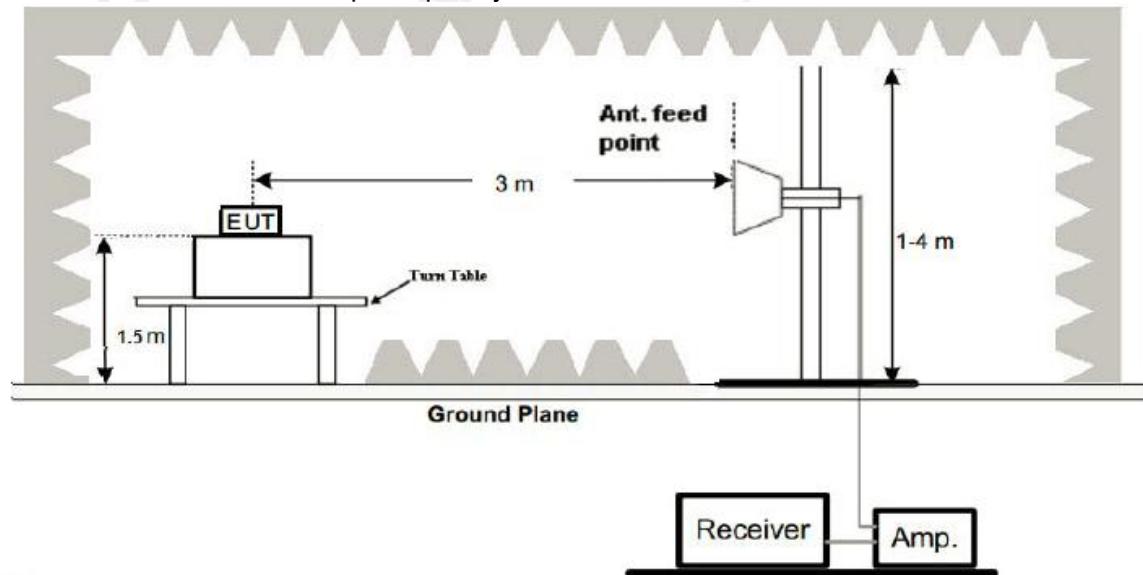

#### 4.3 TEST PROCEDURE

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9kHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 4.4 TESTRESULT


PASS

Remark:

Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.


## Below 1GHz Test Results:

|               |                   |                    |            |
|---------------|-------------------|--------------------|------------|
| Temperature:  | 24°C              | Relative Humidity: | 48%        |
| Test Date:    | Mar 04, 2022      | Pressure:          | 1010hPa    |
| Test Voltage: | AC 120V, 60Hz     | Phase:             | Horizontal |
| Test Mode:    | Transmitting mode |                    |            |

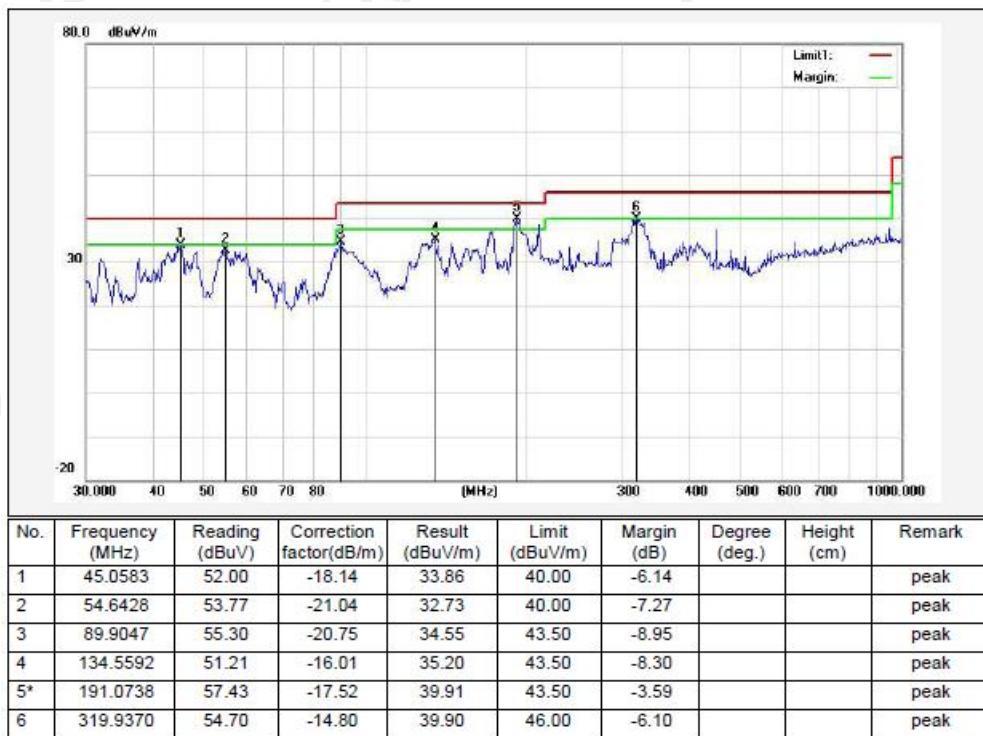

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit  
Factor=Ant. Factor + Cable Loss – Pre-amplifier

|               |                   |                    |          |
|---------------|-------------------|--------------------|----------|
| Temperature:  | 24°C              | Relative Humidity: | 48%      |
| Test Date:    | March 04, 2022    | Pressure:          | 1010hPa  |
| Test Voltage: | AC 120V, 60Hz     | Phase:             | Vertical |
| Test Mode:    | Transmitting mode |                    |          |

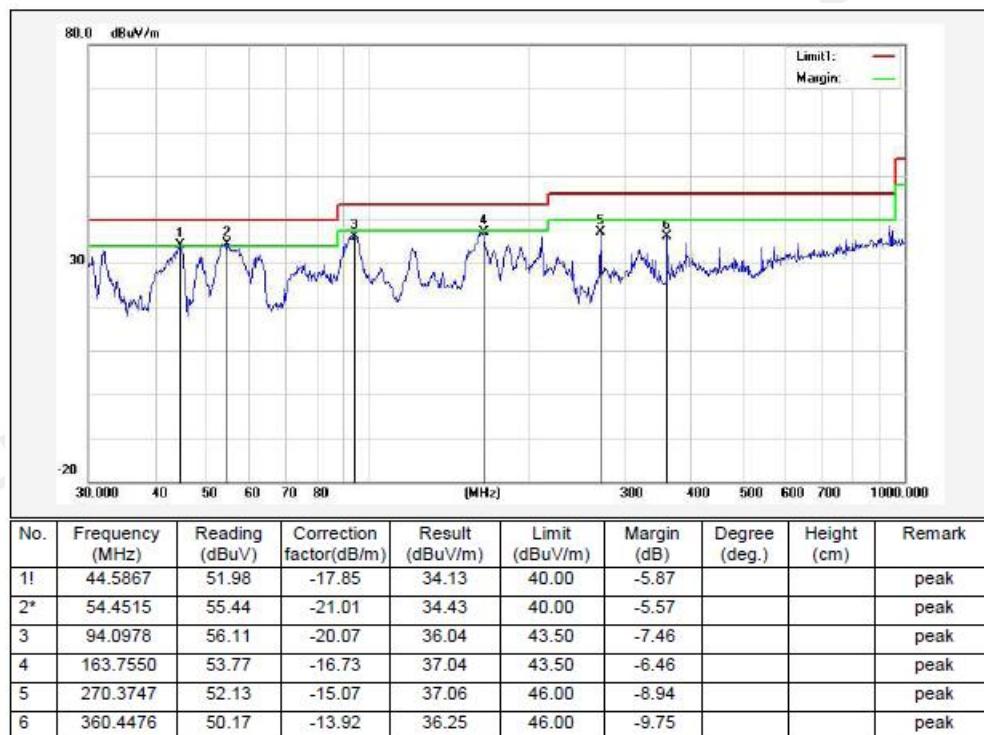

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit  
 Factor=Ant. Factor + Cable Loss – Pre-amplifier

Remark:

1. Measuring frequencies from 9 kHz to the 1 GHz, Radiated emission test from 9kHz to 30MHz was verified, and no any emission was found except system noise floor.
2. \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
3. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10kHz.

## Above 1 GHz Test Results:

## Horizontal:

| Frequency<br>(MHz) | Reading<br>Result<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-----------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2407               | 92.12                             | -5.84          | 86.28                            | 114                      | -27.72         | PK               |
| 2407               | 80.30                             | -5.84          | 74.46                            | 94                       | -19.54         | AV               |
| 4814               | 55.76                             | -3.64          | 52.12                            | 74                       | -21.88         | PK               |
| 4814               | 48.53                             | -3.64          | 44.89                            | 54                       | -9.11          | AV               |
| 7221               | NF                                |                |                                  |                          |                |                  |
| 9628               | NF                                |                |                                  |                          |                |                  |
| 12035              | NF                                |                |                                  |                          |                |                  |
| 14442              | NF                                |                |                                  |                          |                |                  |
| 16849              | NF                                |                |                                  |                          |                |                  |
| 19256              | NF                                |                |                                  |                          |                |                  |
| 21663              | NF                                |                |                                  |                          |                |                  |
| 24070              | NF                                |                |                                  |                          |                |                  |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

## Vertical:

| Frequency<br>(MHz) | Reading<br>Result<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-----------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2407               | 88.89                             | -5.84          | 83.05                            | 114                      | -30.95         | PK               |
| 2407               | 77.26                             | -5.84          | 71.42                            | 94                       | -22.58         | AV               |
| 4814               | 49.83                             | -3.64          | 46.19                            | 74                       | -27.81         | PK               |
| 4814               | 43.05                             | -3.64          | 39.41                            | 54                       | -14.59         | AV               |
| 7221               | NF                                |                |                                  |                          |                |                  |
| 9628               | NF                                |                |                                  |                          |                |                  |
| 12035              | NF                                |                |                                  |                          |                |                  |
| 14442              | NF                                |                |                                  |                          |                |                  |
| 16849              | NF                                |                |                                  |                          |                |                  |
| 19256              | NF                                |                |                                  |                          |                |                  |
| 21663              | NF                                |                |                                  |                          |                |                  |
| 24070              | NF                                |                |                                  |                          |                |                  |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

**Remark:**

1. Measuring frequencies from 1 GHz to the 25 GHz.
2. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
3. \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10kHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
6. When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB<sub>UV</sub>/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB<sub>UV</sub>/m(PK Value) <54 dB<sub>UV</sub>/m(AV Limit), the Average Detected not need to completed.
7. NF= No peak noise found
8. For fundamental frequency, RBW >20dB BW, VBW=3XRBW, PK detector for PK value, AV detector for AV value.

## 5 BAND EDGE

### 5.1 TESTLIMIT

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 TEST PROCEDURE

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSIC63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. Peak detector is for both.

### 5.3 TESTRESULT

PASS

## Operation Mode: Keep Transmitting at 2407MHz

Horizontal:

| Frequency<br>(MHz) | Reading Result<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|--------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2310               | 48.24                          | -5.81          | 42.43                            | 74                       | -31.57         | PK               |
| 2310               | /                              | -5.81          | /                                | 54                       | /              | AV               |
| 2390               | 48.92                          | -5.84          | 43.08                            | 74                       | -30.92         | PK               |
| 2390               | /                              | -5.84          | /                                | 54                       | /              | AV               |
| 2400               | 53.52                          | -5.84          | 47.68                            | 74                       | -26.32         | PK               |
| 2400               | /                              | -5.84          | /                                | 54                       | /              | AV               |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The measured the PK level less than the AV limit. No necessary to record the AV emission level.

Vertical:

| Frequency<br>(MHz) | Reading Result<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|--------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2310               | 47.56                          | -5.81          | 41.75                            | 74                       | -32.25         | PK               |
| 2310               | /                              | -5.81          | /                                | 54                       | /              | AV               |
| 2390               | 48.69                          | -5.84          | 42.85                            | 74                       | -31.15         | PK               |
| 2390               | /                              | -5.84          | /                                | 54                       | /              | AV               |
| 2400               | 52.37                          | -5.84          | 46.53                            | 74                       | -27.47         | PK               |
| 2400               | /                              | -5.84          | /                                | 54                       | /              | AV               |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The measured the PK level less than the AV limit. No necessary to record the AV emission level.

## Operation Mode: Keep Transmitting at 2407MHz

## Horizontal:

| Frequency<br>(MHz) | Reading Result<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|--------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2483.5             | 46.91                          | -5.65          | 41.26                            | 74                       | -33.74         | PK               |
| 2483.5             | /                              | -5.65          | /                                | 54                       | /              | AV               |
| 2500               | 47.45                          | -5.72          | 41.73                            | 74                       | -32.27         | PK               |
| 2500               | /                              | -5.72          | /                                | 54                       | /              | AV               |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The measured the PK level less than the AV limit. No necessary to record the AV emission level.

## Vertical:

| Frequency<br>(MHz) | Reading Result<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|--------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2483.5             | 46.32                          | -5.65          | 40.67                            | 74                       | -33.33         | PK               |
| 2483.5             | /                              | -5.65          | /                                | 54                       | /              | AV               |
| 2500               | 47.07                          | -5.72          | 41.35                            | 74                       | -32.65         | PK               |
| 2500               | /                              | -5.72          | /                                | 54                       | /              | AV               |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The measured the PK level less than the AV limit. No necessary to record the AV emission level.

## 6 OCCUPIED BANDWIDTH

### 6.1 TESTSETUP

Same as Radiated Emission Measurement.

### 6.2 TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW=30kHz, VBW=100kHz, Span=3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

### 6.4 TESTRESULT

PASS

GFSK Modulation:

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | Result |
|---------|-----------------|----------------------|--------|
| CH01    | 2407            | 1.107                | PASS   |

CH01:2407MHz



## 7 ANTENNA REQUIREMENT


### Standard Applicable:


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Antenna Connected Construction

The antenna used in this product is aFPC Antenna, The directional gains of antenna used for transmitting is 0dBi.

### ANTENNA:

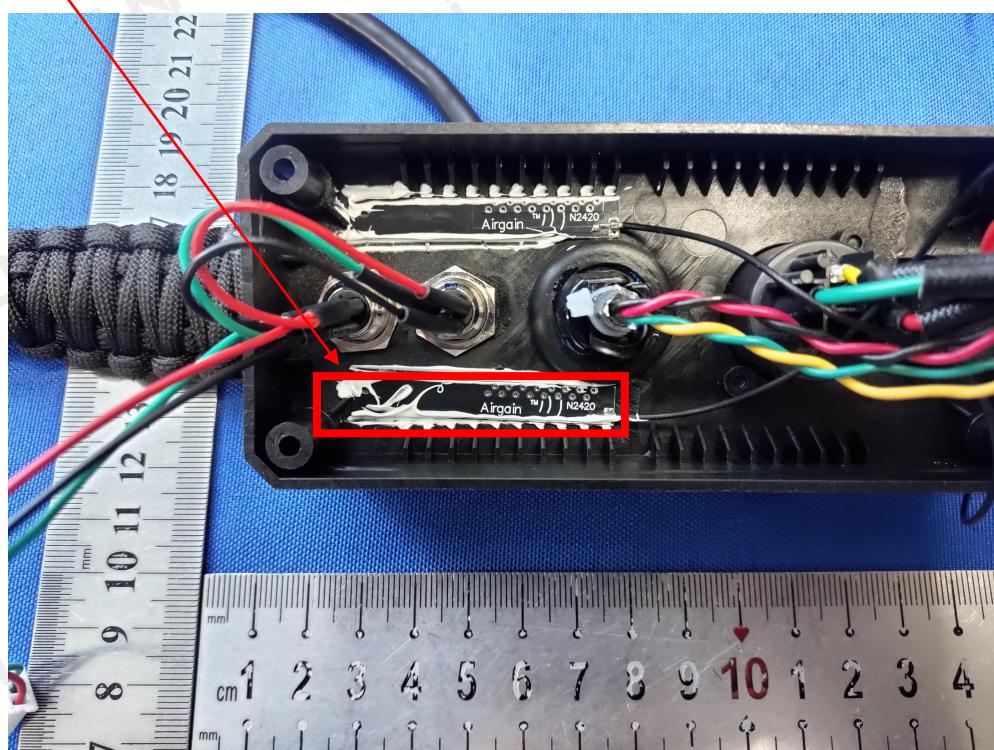

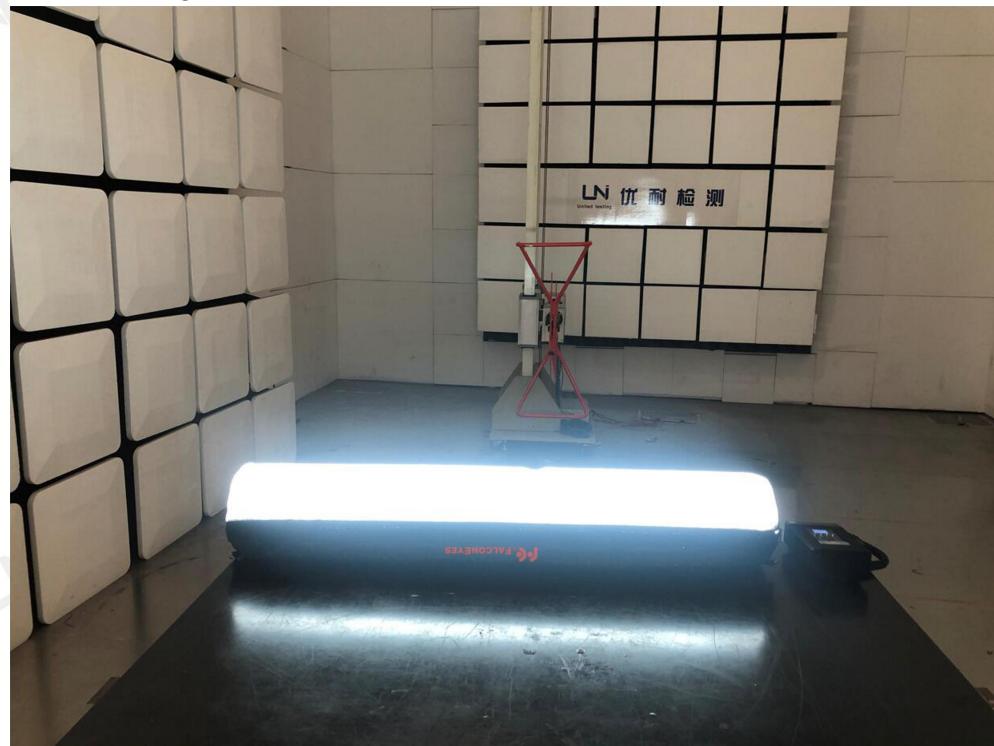**8 PHOTO OF TEST****8.1 RADIATED EMISSION**

## 8.2 CONDUCTED EMISSION



\*\*\*End of Report\*\*\*