

SAR EVALUATION REPORT

For

Global Distribution FZE

508/509, The Business Centre Building, Al Hamriya – Bur Dubai,

P.O.Box 126963, Dubai, U.A.E

FCC ID: 2ADPL-I121

Report Type: Product Type: Original Report Mobile Phone Wilson then **Test Engineer:** Wilson Chen **Report Number:** RDG141208003-20 **Report Date:** 2014-12-13 BeilHu Bell Hu **Reviewed By:** SAR Engineer Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, Prepared By: ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

Attestation of Test Results							
	Company Name	Global Distribution FZE					
	EUT Description	MOBILE PHONE					
EUT Information	FCC ID	2ADPL-I121					
	Model Number	i 121					
	Test Date	2014-12-05					
Frequency	1	Max. SAR Level(s) Reported	Limit(W/Kg)				
GSM 850		0.575 W/kg 1g Head SAR 0.785 W/kg 1g Body SAR					
PCS 1900		0.192 W/kg 1g Head SAR 0.093 W/kg 1g Body SAR					
Simultaneous		0.618 W/kg 1g Head SAR 0.800 W/kg 1g Body SAR					
	ANSI / IEEE C95.1: 2005 IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fileds,3 kHz to 300 GHz. ANSI / IEEE C95.3: 2002						
	IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to SuchFields,100 kHz—300 GHz.						
Applicable Standards	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques						
	KDB procedures KDB 447498 D01 Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies. KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets KDB 865664 D01SAR Measurement Requirements for 100 MHz to 6 GHz						

Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.

The results and statements contained in this report pertain only to the device(s) evaluated.

SAR Evaluation Report 2 of 82

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	5
EUT DESCRIPTION	6
TECHNICAL SPECIFICATION	6
REFERENCE, STANDARDS, AND GUILDELINES	7
SAR LIMITS	8
FACILITIES	9
DESCRIPTION OF TEST SYSTEM	10
EQUIPMENT LIST AND CALIBRATION	17
EQUIPMENTS LIST & CALIBRATION INFORMATION	17
SAR MEASUREMENT SYSTEM VERIFICATION	18
Liquid Verification System Accuracy Verification SAR SYSTEM VALIDATION DATA	21
EUT TEST STRATEGY AND METHODOLOGY	30
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR. CHEEK/TOUCH POSITION EAR/TILT POSITION	31 31
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS SAR EVALUATION PROCEDURE TEST METHODOLOGY	33
CONDUCTED OUTPUT POWER MEASUREMENT	
PROVISION APPLICABLE	
TEST PROCEDURE MAXIMUM OUTPUT POWER AMONG PRODUCTION UNITS TEST RESULTS:	34
SAR MEASUREMENT RESULTS	37
SAR TEST DATA	37
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	39
SAR PLOTS (SUMMARY OF THE HIGHEST SAR VALUES)	41
APPENDIX A MEASUREMENT UNCERTAINTY	45
APPENDIX A MEASUREMENT UNCERTAINTY	46
APPENDIX B – PROBE CALIBRATION CERTIFICATES	47
APPENDIX C DIPOLE CALIBRATION CERTIFICATES	57
APPENDIX D EUT TEST POSITION PHOTOS	75
Liquid depth ≥ 15cm	
BODY-WORN BACK SETUP PHOTO (15MM)LEFT HEAD TOUCH SETUP PHOTO	
LEFT HEAD TILT SETUP PHOTO	
RIGHT HEAD TOUCH SETUP PHOTO	77
RIGHT HEAD TILT SETUP PHOTO	
APPENDIX E EUT PHOTOS	
EUT – FRONT VIEWEUT – BACK VIEW	
EUT – BACK VIEW	
EUT – RIGHT SIDE VIEW	79

Bay	/ Area	Compliance	Laboratories	Corn	(Shenzhen)
Du	y z li cu	Compilation	Laboratories	COIP.	DITCHEIL

EUT – UNCOVER VIEW APPENDIX F INFORMATIVE REFERENCES	
EUT – BOTTOM VIEW	
EUT – TOP VIEW	80
FLIT Ton Virgi	

Report No: RDG141208003-20

SAR Evaluation Report 4 of 82

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision	
0	RDG141208003-20	Original Report	2014-12-12	

SAR Evaluation Report 5 of 82

EUT DESCRIPTION

This report has been prepared on behalf of Global Distribution FZE and their product, FCC ID: 2ADPL-i 121, Model: i 121 or the EUT (Equipment under Test) as referred to in the rest of this report.

Technical Specification

Product Type	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Multi-slot Class:	Class12
Operation Mode:	GSM Voice, GPRS Data and Bluetooth
	GSM 850 : 824-849 MHz(TX) ; 869-894 MHz(RX)
Frequency Band:	PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX)
	Bluetooth: 2402MHz-2480MHz
	GSM 850 : 33.42 dBm
Conducted RF Power:	PCS 1900: 28.64 dBm
	Bluetooth: 0.10dBm
Dimensions (L*W*H):	$108 \text{ mm (L)} \times 47 \text{ mm (W)} \times 14 \text{ mm (H)}$
Power Source:	$3.7 V_{DC}$ Rechargeable Battery
Normal Operation:	Head and Body-worn

SAR Evaluation Report 6 of 82

REFERENCE, STANDARDS, AND GUILDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Evaluation Report 7 of 82

SAR Limits

FCC Limit (1g Tissue)

	SAR (W/kg)			
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)		
Spatial Average (averaged over the whole body)	0.08	0.4		
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0		
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0		

CE Limit (10g Tissue)

	SAR (W/kg)				
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 10 g of tissue)	2.0	10			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

SAR Evaluation Report 8 of 82

FACILITIES

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 6/F, the 3rd Phase of WanLi Industrial Building, Shi Hua Road, Fu Tian Free Trade Zone, Shenzhen, Guangdong, P.R. of China

SAR Evaluation Report 9 of 82

DESCRIPTION OF TEST SYSTEM

These measurements were performed with ALSAS 10 Universal Integrated SAR Measurement system from APREL Laboratories.

ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller. ALSAS-10U uses the latest methodologies. And FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm2 step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.



Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.

SAR Evaluation Report 10 of 82

ALSAS-10U Interpolation and Extrapolation Uncertainty


The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a+2z)^2} \right)$$

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

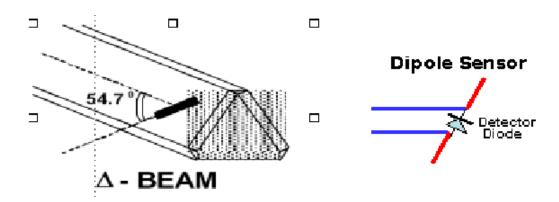

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_{i} = U_{i} + U_{i}^{2} \cdot \frac{cf}{dcp_{i}}$$

SAR Evaluation Report 11 of 82

Isotropic E-Field Probe Specification

Calibration Method	Frequency Dependent Below 1 GHz Calibration in air performed in a TEM Cell Above 1 GHz Calibration in air performed in waveguide			
Sensitivity	$0.70 \ \mu V/(V/m)^2$ to $0.85 \ \mu V/(V/m)^2$			
Dynamic Range	0.0005 W/kg to 100 W/kg			
Isotropic Response	Better than 0.1 dB			
Diode Compression Point (DCP)	Calibration for Specific Frequency			
Probe Tip Diameter	< 2.9 mm			
Sensor Offset	1.56 (+/- 0.02 mm)			
Probe Length	289 mm			
Video Bandwidth	@ 500 Hz: 1 dB @ 1.02 kHz: 3 dB			
Boundary Effect	Less than 2.1% for distance greater than 0.58 mm			
Spatial Resolution	The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe			

Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from $5\mu V$ to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	12 Bit
Amplifier Range 20 mV to 200 mV and 150 mV to 800 mV	
Field Integration Local Co-Processor utilizing proprietary integration algori	
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232

SAR Evaluation Report 12 of 82

Axis Articulated Robot

ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.



Robot/Controller Manufacturer	Thermo CRS		
Number of Axis	Six independently controlled axis		
Positioning Repeatability	0.05 mm		
Controller Type	Single phase Pentium based C500C		
Robot Reach	710 mm		
Communication	RS232 and LAN compatible		

ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.

SAR Evaluation Report 13 of 82




Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

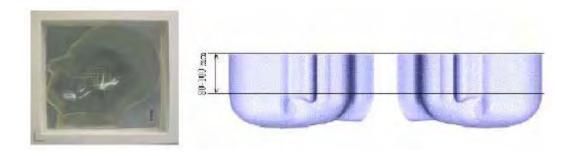

SAR Evaluation Report 14 of 82

APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software.

The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



SAR Evaluation Report 15 of 82

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Ingredients	Frequency (MHz)									
(% by weight)	45	0	83	35	91	15	19	00	24	50
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Recommended Tissue Dielectric Parameters for Head and Body

Frequency	Head '	Tissue	Body Tissue		
(MHz)	Er	O'(S/m)	E r	O'(S/m)	
150	52.3	0.76	61.9	0.80	
300	45.3	0.87	58.2	0.92	
450	43.5	0.87	56.7	0.94	
835	41.5	0.90	55.2	0.97	
900	41.5	0.97	55.0	1.05	
915	41.5	0.98	55.0	1.06	
1450	40.5	1.20	54.0	1.30	
1610	40.3	1.29	53.8	1.40	
1800-2000	40.0	1.40	53.3	1.52	
2450	39.2	1.80	52.7	1.95	
3000	38.5	2.40	52.0	2.73	
5800	35.3	5.27	48.2	6.00	

SAR Evaluation Report 16 of 82

EQUIPMENT LIST AND CALIBRATION


Equipments List & Calibration Information

Equipment	Model	Calibration Date	S/N
CRS F3 robot	ALS-F3	N/A	RAF0805352
CRS F3 Software	ALS-F3-SW	N/A	N/A
CRS C500C controller	ALS-C500	N/A	RCF0805379
Probe mounting device & Boundary Detection Sensor System	ALS-PMDPS-3	N/A	120-00270
Universal Work Station	ALS-UWS	N/A	100-00157
Data Acquisition Package	ALS-DAQ-PAQ-3	2014-10-14	110-00212
Miniature E-Field Probe	ALS-E-020	2014-10-14	500-00283
Dipole, 835MHz	ALS-D-835-S-2	2014-10-08	180-00558
Dipole, 1900MHz	ALS-D-1900-S-2	2014-10-09	210-00710
Dipole Spacer	ALS-DS-U	N/A	250-00907
Device holder/Positioner	ALS-H-E-SET-2	N/A	170-00510
Left ear SAM phantom	ALS-P-SAM-L	N/A	130-00311
Right ear SAM phantom	ALS-P-SAM-R	N/A	140-00359
UniPhantom	ALS-P-UP-1	N/A	150-00413
Simulated Tissue 835 MHz Head	ALS-TS-835-H	Each Time	270-01002
Simulated Tissue 835 MHz Body	ALS-TS-835-B	Each Time	270-02101
Simulated Tissue 1900 MHz Head	ALS-TS-1900-H	Each Time	295-01103
Simulated Tissue 1900 MHz Body	ALS-TS-1900-B	Each Time	295-02102
Directional couple	DC6180A	N/A	0325849
Power Amplifier	5S1G4	N/A	71377
Dielectric probe kit	HP85070B	2014-06-13	N/A
Attenuator	3dB	2014-05-08	5402
Network analyzer	8752C	2014-06-03	3410A02356
Synthesized Sweeper	HP 8341B	2014-06-03	2624A00116
UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	2013-11-23	106891
EMI Test Receiver	ESCI	2014-06-13	101746

SAR Evaluation Report 17 of 82

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

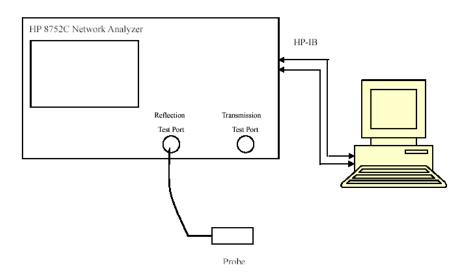

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency	Liquid	Liquid Parameter		Target Value		Delta (%)		Tolerance
1	Туре	$\epsilon_{\rm r}$	O'(S/m)	ε _r	O'(S/m)	$\Delta \epsilon_{ m r}$	ΔΟ (S/m)	(%)
824.2	Head	41.17	0.90	41.50	0.90	-0.795	0.000	±5
024.2	Body	53.96	0.93	55.20	0.97	-2.246	-4.124	±5
836.6	Head	41.26	0.91	41.50	0.90	-0.578	1.111	±5
830.0	Body	53.97	0.95	55.20	0.97	-2.228	-2.062	±5
848.8	Head	41.13	0.91	41.50	0.90	-0.892	1.111	±5
040.0	Body	53.88	0.97	55.20	0.97	-2.391	0.000	±5
1850.2	Head	39.84	1.36	40.00	1.40	-0.400	-2.857	±5
1830.2	Body	53.88	1.49	53.30	1.52	1.088	-1.974	±5
1000.0	Head	39.77	1.38	40.00	1.40	-0.575	-1.429	±5
1880.0	Body	52.03	1.48	53.30	1.52	-2.383	-2.632	±5
1000 8	Head	39.72	1.41	40.00	1.40	-0.700	0.714	±5
1909.8	Body	51.99	1.51	53.30	1.52	-2.458	-0.658	±5

^{*}Liquid Verification was performed on 2014-12-05.

SAR Evaluation Report 18 of 82

Please refer to the following tables.

835 MHz Head				835 MHz Body	,
Frequency (MHz)	e'	e''	Frequency (MHz)	e'	e''
824.0	41.1657	19.5699	824.0	53.9611	20.3633
824.5	41.2458	19.5362	824.5	54.0071	20.2780
825.0	41.1549	19.5383	825.0	53.8835	20.4233
825.5	41.1555	19.6364	825.5	54.0200	20.3925
826.0	41.0590	19.5789	826.0	53.9477	20.4507
826.5	41.2300	19.5982	826.5	53.9357	20.4095
827.0	41.1231	19.5845	827.0	54.0737	20.3230
827.5	41.1347	19.5614	827.5	54.1041	20.4013
828.0	41.1989	19.6189	828.0	53.9308	20.3968
828.5	41.1894	19.5953	828.5	54.0236	20.3122
829.0	41.2164	19.5643	829.0	53.9621	20.3548
829.5	41.1558	19.6395	829.5	53.9506	20.3682
830.0	41.1949	19.5040	830.0	53.9674	20.4008
830.5	41.1889	19.5331	830.5	53.9273	20.4383
831.0	41.1662	19.5252	831.0	53.9589	20.4124
831.5	41.0749	19.5642	831.5	54.0278	20.4113
832.0	41.1749	19.6738	832.0	54.0098	20.4558
832.5	41.1749	19.5874	832.5	54.0638	20.3483
833.0	41.1776	19.5095	833.0	53.9271	20.4257
833.5	41.2101	19.5656	833.5	54.0232	20.3556
834.0	41.2290	19.5806	834.0	53.9516	20.3330
834.5	41.1733	19.5309	834.5	53.9880	20.3699
835.0	41.1498	19.6358	835.0	54.0310	20.3012
835.5	41.1496	19.6131	835.5	53.9893	20.3976
836.0	41.2167	19.6025	836.0	53.9352	20.3297
836.5	41.2563	19.5896	836.5	53.9722	20.3353
837.0	41.2223	19.5782	837.0	53.9645	20.4090
837.5	41.1557	19.5027	837.5	54.0013	20.3375
838.0	41.2302	19.5280	838.0	53.9855	20.4232
838.5	41.1406	19.5621	838.5	53.9685	20.3787
839.0	41.1776	19.5396	839.0	53.9878	20.3987
839.5	41.1492	19.4513	839.5	54.0257	20.4252
840.0	41.1650	19.3240	840.0	54.0037	20.4312
840.5	41.2814	19.3439	840.5	53.9488	20.4125
841.0	41.2069	19.3185	841.0	53.9819	20.3130
841.5	41.1490	19.2914	841.5	53.9988	20.3984
842.0	41.2031	19.2883	842.0	54.0277	20.3243
842.5	41.2115	19.3383	842.5	53.9471	20.3417
843.0	41.2167	19.3391	843.0	53.9573	20.2945
843.5	41.1615	19.2156	843.5	53.8756	20.3473
844.0	41.1540	19.2339	844.0	53.9976	20.4117
844.5	41.1198	19.2579	844.5	54.0914	20.4104
845.0	41.1803	19.3127	845.0	54.0106	20.3546
845.5	41.2574	19.3235	845.5	53.9423	20.3243
846.0	41.1374	19.3143	846.0	53.9689	20.3298
846.5	41.2170	19.3133	846.5	53.9593	20.4642
847.0	41.1794	19.2340	847.0	53.9440	20.4225
847.5	41.1735	19.3177	847.5	53.9632	20.4352
848.0	41.2135	19.2733	848.0	53.9756	20.3846
848.5	41.1531	19.2404	848.5	53.9306	20.4216
849.0	41.1318	19.2038	849.0	53.8828	20.4636

SAR Evaluation Report 19 of 82


1	1900 MHz Head	ı	1900 MHz Body		
Frequency (MHz)	e'	e"	Frequency (MHz)	e'	e''
1850.0	39.8431	13.2595	1850.0	52.2333	14.1508
1851.2	39.8132	13.1844	1851.2	52.1495	14.0312
1852.4	39.7605	13.1738	1852.4	52.0144	14.1395
1853.6	39.8188	13.2278	1853.6	51.9851	14.1050
1854.8	39.7253	13.1794	1854.8	51.9573	14.1911
1856.0	39.8110	13.2635	1856.0	52.1785	14.0659
1857.2	39.8013	13.1511	1857.2	52.0285	14.2083
1858.4	39.8843	13.1126	1858.4	52.1357	14.0672
1859.6	39.7281	13.2011	1859.6	51.9863	14.1154
1860.8	39.8054	13.1683	1860.8	52.0079	14.1618
1862.0	39.8074	13.2596	1862.0	52.1287	14.1611
1863.2	39.7402	13.2530	1863.2	52.2349	14.1920
1864.4	39.6954	13.1699	1864.4	52.1020	14.0557
1865.6	39.6697	13.1391	1865.6	52.1305	14.1716
1866.8	39.7550	13.2511	1866.8	52.2564	14.1430
1868.0	39.8085	13.2094	1868.0	51.9995	14.1423
1869.2	39.8392	13.2079	1869.2	51.8941	14.0743
1870.4	39.6797	13.1476	1870.4	51.9783	14.1345
1871.6	39.7777	13.1742	1871.6	52.1608	14.2350
1872.8	39.8106	13.2351	1872.8	52.2306	14.0907
1874.0	39.8115	13.2563	1874.0	52.3124	14.0820
1875.2	39.8252	13.3368	1875.2	52.0960	14.1037
1876.4	39.6547	13.3275	1876.4	52.1293	14.1538
1877.6	39.6971	13.1703	1877.6	52.2204	14.1439
1878.8	39.7047	13.2767	1878.8	52.1360	14.1187
1880.0	39.7684	13.1823	1880.0	52.0316	14.1446
1881.2	39.8119	13.2258	1881.2	51.8919	14.1182
1882.4	39.7558	13.2060	1882.4	52.0896	14.1247
1883.6	39.7742	13.1306	1883.6	52.0420	14.0348
1884.8	39.9168	13.0731	1884.8	52.0840	14.1568
1886.0	39.7030	13.1682 13.2262	1886.0	52.1830 52.1429	14.0518
1887.2 1888.4	39.6720		1887.2 1888.4	52.1429	14.1354
1889.6	39.8000 39.8156	13.3015 13.2759	1889.6	52.1532	14.1388 14.0922
1890.8	39.8599	13.2924	1890.8	51.9587	14.0600
1892.0	39.6780	13.2859	1892.0	51.9387	14.2527
1893.2	39.7739	13.1692	1893.2	51.9580	14.2005
1894.4	39.6823	13.0963	1894.4	52.0971	14.1784
1895.6	39.8689	13.2608	1895.6	52.1251	14.1835
1896.8	39.8543	13.1326	1896.8	52.0682	14.0377
1898.0	39.6546	13.1230	1898.0	52.2051	14.1313
1899.2	39.7669	13.2503	1899.2	52.2568	14.0726
1900.4	39.8001	13.3308	1900.4	52.3164	14.1509
1901.6	39.8773	13.1562	1901.6	52.1987	14.0912
1902.8	39.7747	13.1955	1902.8	52.1814	14.2344
1904.0	39.6900	13.1613	1904.0	52.0695	14.0623
1905.2	39.7046	13.2701	1905.2	52.1893	14.0701
1906.4	39.8587	13.1451	1906.4	52.1777	14.2644
1907.6	39.7206	13.2214	1907.6	51.9527	14.0834
1908.8	39.8660	13.1581	1908.8	52.2756	14.0762
1910.0	39.7195	13.2806	1910.0	51.9850	14.1787

SAR Evaluation Report 20 of 82

System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Verification Setup Block Diagram

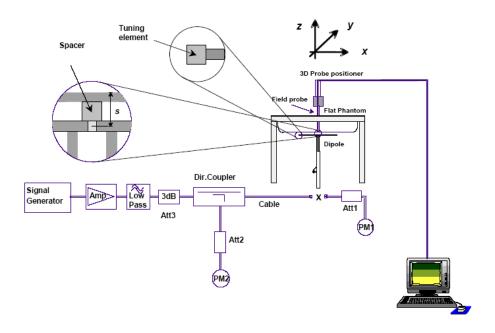

Probe and dipole antenna List and Detail

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
APREL	Probe	ALS-E-020	500-00283	2014-10-14	2015-10-13
APREL	Dipole antenna(850MHz)	ALS-D-835-S-2	180-00558	2014-10-08	2017-10-07
APREL	Dipole antenna(1900MHz)	ALS-D-1900-S-2	210-00710	2014-10-09	2017-10-08

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Measured SAR (W/Kg)		Target Value (W/Kg)	Delta (%)	Tolerance (%)
	025	Head	1g	10.253	9.773	4.911	±10
2014-12-05	833	Body	1g	9.872	9.736	1.397	±10
	1900	Head	1g	40.159	39.481	1.717	±10
		Body	1g	40.227	39.715	1.289	±10

^{*}All SAR values are normalized to 1 Watt forward power.

SAR Evaluation Report 21 of 82

SAR SYSTEM VALIDATION DATA

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 835 MHz Head Liquid

Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558

Product Data

Device Name : Dipole 835 MHz Serial No. : 180-00558 Type : Dipole

Model : ALS-D-835-S-2

Frequency Band : 835

Max. Transmit Pwr
Drift Time : 3 min(s)
Power Drift-Start : 9.725 W/kg
Power Drift-Finish
Power Drift (%) : 0.411

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Phantom Data

Tissue Data

: Head Type Serial No. : 270-01002 Frequency : 835.0 MHz Last Calib. Date : 05-Dec-2014 : 20.00 °C Temperature Ambient Temp. : 21.00 °C Humidity : 56.00 RH% : 41.08 F/m Epsilon Sigma : 0.92 S/m

Density : 1000.00 kg/cu. m

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Oct-2014

Frequency Band : 835 Duty Cycle Factor : 1 Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 21.00 °C Ambient Temp. : 21.00 °C

Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 22 of 82

1 gram SAR value : 10.253 W/kg 10 gram SAR value : 6.955 W/kg Area Scan Peak SAR : 12.081 W/kg Zoom Scan Peak SAR : 16.327 W/kg

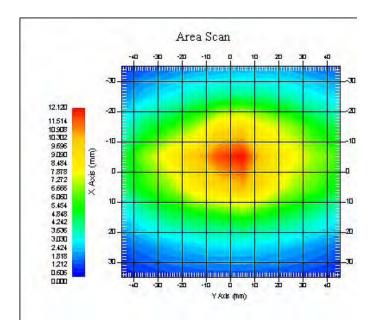

835 MHz System Validation with Head Tissue

SAR Evaluation Report 23 of 82

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 835 MHz Body Liquid

Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558

Product Data

Device Name : Dipole 835 MHz Serial No. : 180-00558 Type : Dipole

Model : ALS-D-835-S-2

Frequency Band : 835

Max. Transmit Pwr : 1 W

Drift Time : 3 min(s)

Power Drift-Start : 10.557 W/kg

Power Drift-Finish : 10.422 W/kg

Power Drift (%) : -1.279

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Phantom Data

Tissue Data

: Body Type 270-02101 Serial No. : 835.0 MHz Frequency Last Calib. Date : 05-Dec-2014 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity · 53 91 F/m Epsilon Sigma : 0.96 S/m Density : 1000.00 kg/cu. m

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Oct-2014

Frequency Band : 835 Duty Cycle Factor : 1 Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 21.00 °C Ambient Temp. : 21.00 °C

Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 24 of 82

1 gram SAR value : 9.872 W/kg 10 gram SAR value : 6.459 W/kg Area Scan Peak SAR : 11.723 W/kg Zoom Scan Peak SAR : 15.858 W/kg

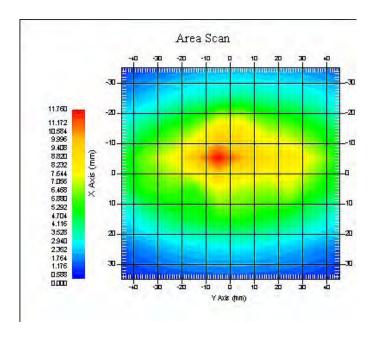

835 MHz System Validation with Body Tissue

SAR Evaluation Report 25 of 82

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 1900 MHz Head Liquid

Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710

Product Data

Device Name : Dipole 1900MHz Serial No. : 210-00710 Type : Dipole

Model : ALS-D-1900-S-2

Frequency Band : 1900

Max. Transmit Pwr : 1 W

Drift Time : 3 min(s)

Power Drift-Start : 39.862 W/kg

Power Drift-Finish : 39.631 W/kg

Power Drift (%) : -0.579

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Tissue Data

: Head Type 295-01103 Serial No. : 1900.00 MHz Frequency Last Calib. Date : 05-Dec-2014 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity · 39 68 F/m Epsilon Sigma : 1.42 S/m Density : 1000.00 kg/cu. M

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Oct-2014

Frequency Band : 1900 Duty Cycle Factor : 1 Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 20.00 °C Ambient Temp. : 20.00 °C

Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 26 of 82

1 gram SAR value : 40.159 W/kg 10 gram SAR value : 21.531 W/kg Area Scan Peak SAR : 43.257 W/kg Zoom Scan Peak SAR : 76.857 W/kg

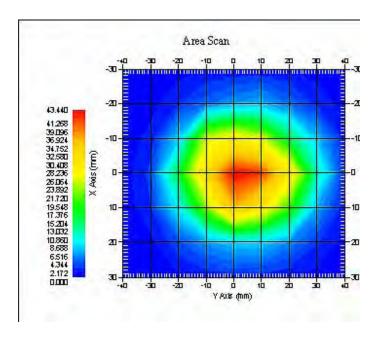

1900 MHz System Validation with Head Tissue

SAR Evaluation Report 27 of 82

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 1900 MHz Body Liquid

Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710

Product Data

Device Name : Dipole 1900MHz Serial No. : 210-00710

Type : Dipole Model : ALS-D-1900-S-2

Frequency Band : 1900
Max. Transmit Pwr
Drift Time : 3 min(s)
Power Drift-Start : 40.119 W/kg
Power Drift-Finish : 40.825 W/kg

Power Drift (%) : 1.760

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Tissue Data

Type : Body 295-02102 Serial No. : 1900.00 MHz Frequency Last Calib. Date : 05-Dec-2014 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity : 52.13 F/m Epsilon Sigma : 1.51 S/m

Density : 1000.00 kg/cu. m

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Oct-2014

Frequency Band : 1900 Duty Cycle Factor : 1 Conversion Factor : 4.5

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 20.00 °C Ambient Temp. : 21.00 °C

Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 28 of 82

1 gram SAR value : 40.227 W/kg 10 gram SAR value : 21.416 W/kg Area Scan Peak SAR : 45.951 W/kg Zoom Scan Peak SAR : 79.852 W/kg

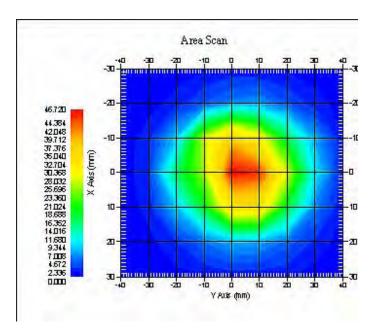

1900 MHz System Validation with Body Tissue


SAR Evaluation Report 29 of 82


EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:



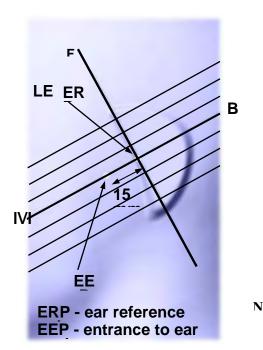

SAR Evaluation Report 30 of 82

Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the "ear reference point" or along the "N-F" line for the SCC-34/SC-2 head phantom.

This test position is established:

- When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- o (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek / Touch Position

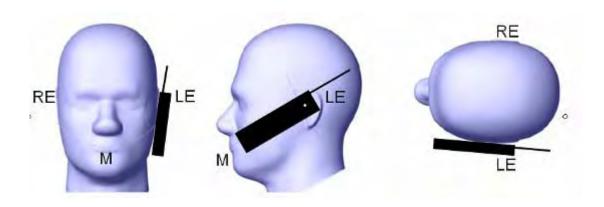

Ear/Tilt Position


With the handset aligned in the "Cheek/Touch Position":

- 1) If the earpiece of the handset is not in full contact with the phantom's ear spacer (in the "Cheek/Touch position") and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.
- 2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both "ear reference points" (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the "test device reference point" until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point isby 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

SAR Evaluation Report 31 of 82

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the "Cheek/Touch" and "Ear/Tilt" positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

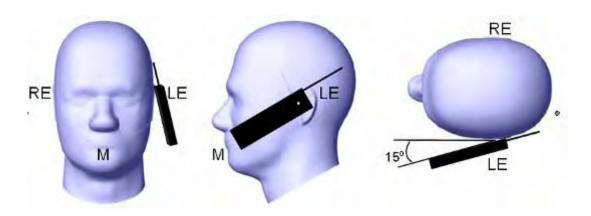

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

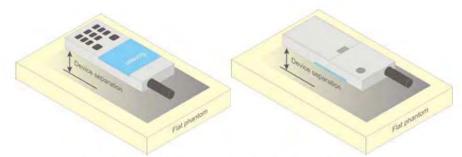


Figure 5 - Test positions for body-worn devices

SAR Evaluation Report 32 of 82

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

- Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.
- Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.
- Step 3: Around this point, a volume of 35 mm x 35 mm x 35 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:
 - 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

Test methodology

KDB 447498 D01. KDB 648474 D04 KDB 865664 D01

SAR Evaluation Report 33 of 82


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

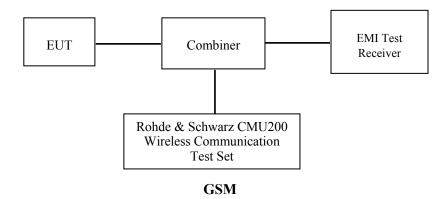

Maximum Output Power among production units

	Max Target Power for Production Unit (dBm)							
Mada/Dand	Channel							
Mode/Band	Low	Middle	High					
GSM 850	33.50	33.50	33.50					
GPRS 1 slot	33.40	33.40	33.40					
GPRS 2 slot	32.70	32.70	32.70					
GPRS 3 slot	30.70	30.70	30.70					
GPRS 4 slot	29.70	29.70	29.70					
PCS 1900	28.70	28.70	28.70					
GPRS 1 slot	28.70	28.70	28.70					
GPRS 2 slot	28.40	28.40	28.40					
GPRS 3 slot	26.40	26.40	26.40					
GPRS 4 slot	25.70	25.70	25.70					
Bluetooth	0.10	0.10	0.10					

SAR Evaluation Report 34 of 82

Test Results:

GSM:

DJ	Frequency	Conducted Output Power				
Band	(MHz)	Meas. Power (dBm)	Meas. Power (W)			
	824.2	33.32	2.148			
GSM 850	836.6	33.18	2.080			
	848.8	33.42	2.198			
	1850.2	28.64	0.731			
PCS 1900	1880.0	28.26	0.670			
	1909.8	28.19	0.659			

GPRS:

Band	Channel Frequency		RF Output Power (dBm)			
	No.	(MHz)	1 slot	2 slot	3 slots	4 slots
	128	824.2	33.26	32.64	30.61	29.69
GSM 850	190	836.6	33.17	31.90	30.00	28.51
	251	848.8	33.38	32.24	30.34	29.22
	512	1850.2	28.64	28.33	26.37	25.63
PCS 1900	661	1880.0	28.28	27.93	25.74	24.91
	810	1909.8	28.20	27.77	25.33	24.37

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

SAR Evaluation Report 35 of 82

The time based average power for GPRS

Band	Channel Frequency		Time based average Power (dBm)			
	No.	(MHz)	1 slot	2 slot	3 slots	4 slots
	128	824.2	24.26	26.64	26.36	26.69
GSM 850	190	836.6	24.17	25.90	25.75	25.51
	251	848.8	24.38	26.24	26.09	26.22
	512	1850.2	19.64	22.33	22.12	22.63
PCS 1900	661	1880.0	19.28	21.93	21.49	21.91
	810	1909.8	19.20	21.77	21.08	21.37

Note:

- Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz
- band).
- 3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).

Bluetooth

Mode	Channel frequency (MHz)	Conducted Output Power	
		(dBm)	(mw)
BDR(GFSK)	(Low)2402	-0.41	0.910
	(Middle)2441	-0.59	0.873
	(High)2480	0.10	1.023
EDR(4-DQPSK)	(Low)2402	-1.35	0.733
	(Middle)2441	-1.50	0.708
	(High)2480	-0.82	0.828
EDR-8DPSK	(Low)2402	-1.02	0.791
	(Middle)2441	-1.20	0.759
	(High)2480	-0.49	0.893

SAR Evaluation Report 36 of 82

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	21-24 °C
Relative Humidity:	50-53 %
ATM Pressure:	1001-1002 mbar

Testing was performed by Wilson Chen on 2014-12-05

GSM 850:

FIT	Euganopar	Test	Power	Max. Meas.	Max. Rated	FC	CC 1g SAI	R (W/Kg)	
EUT Position	Frequency (MHz)	Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	824.2	GSM	0.724	33.42	33.50	1.019	0.398	0.406	/
Left Head Cheek	836.6	GSM	-1.855	33.18	33.50	1.076	0.534	0.575	1#
	848.8	GSM	0.996	33.18	33.50	1.076	0.419	0.451	/
	824.2	GSM	/	/	/	/	/	/	/
Left Head Tilt	836.6	GSM							
	848.8	GSM	2.114	33.32	33.50	1.042	0.474	0.494	/
	824.2	GSM	/	/	/	/	/	/	/
Right Head Cheek	836.6	GSM	-2.614	33.18	33.50	1.076	0.506	0.544	/
	848.8	GSM	/	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/	/
Right Head Tilt	836.6	GSM	0.816	33.18	33.50	1.076	0.388	0.417	/
	848.8	GSM	/	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/	/
Body-Back-Headset (15mm)	836.6	GSM	-1.084	33.18	33.50	1.076	0.529	0.569	/
(======)	848.8	GSM	/	/	/	/	/	/	/
	824.2	GPRS	-1.376	29.69	29.70	1.002	0.783	0.785	2#
Body-Back (15mm)	836.6	GPRS	/	/	/	/	/	/	/
(10.1111)	848.8	GPRS	/	/	/	/	/	/	/

SAR Evaluation Report 37 of 82

PCS Band:


DUT	Emaguanay	Toot	Power	Max.	Max. Rated	FC	C 1g SAR	(W/Kg)	
EUT Position	Frequency (MHz)	Test Mode	Drift (%)	Meas. Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1850.2	GSM	-1.891	28.64	28.70	1.014	0.189	0.192	3#
Left Head Cheek	1880.0	GSM	2.704	28.26	28.70	1.107	0.166	0.184	/
	1909.8	GSM	-2.037	28.19	28.70	1.125	0.173	0.195	/
	1850.2	GSM	/	/	/	/	/	/	/
Left Head Tilt	1880.0	GSM	2.365	28.26	28.70	1.107	0.123	0.136	/
	1909.8	GSM	/	/	/	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/	/
Right Head Cheek	1880.0	GSM	-2.958	28.26	28.70	1.107	0.159	0.176	
	1909.8	GSM	/	/	/	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/	/
Right Head Tilt	1880.0	GSM	0.776	28.26	28.70	1.107	0.114	0.126	/
	1909.8	GSM	/	/	/	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/	/
Body-Back-Headset (15mm)	1880.0	GSM	0.924	28.26	28.70	1.107	0.058	0.064	/
(======)	1909.8	GSM	/	/	/	/	/	/	/
	1850.2	GPRS	-1.619	25.63	25.70	1.016	0.092	0.093	4#
Body-Back (15mm)	1880.0	GPRS	/	/	/	/	/	/	/
(10.1111)	1909.8	GPRS	/	/	/	/	/	/	/

- 1. When the 1-g SAR is \leq 0.8W/Kg, testing for other channels are optional. 2.The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.
- 3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
- 4. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

38 of 82 SAR Evaluation Report

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

BT and GSM Antennas Location:

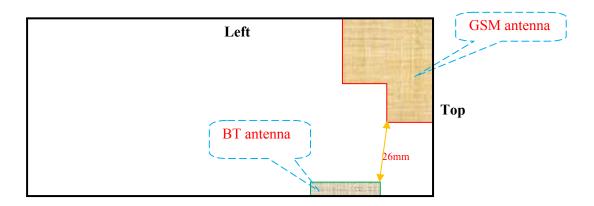

Simultaneous Transmission:

Description of Simultaneo	ous Transmit Cap	abilities	Antennas Distance (mm)	
Transmitter Combination	Simultaneous?	Hotspot?	Antennas Distance (mm)	
GSM + Bluetooth	√	×	26	
GPRS + Bluetooth	√	×	26	

Standalone SAR test exclusion considerations

Mode	Position	Frequency (MHz)	P _{avg} (dBm)	P _{avg} (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
GSM850	Head	850	24.50	281.84	0	51.97	3.0	No
PCS1900	Head	1900	19.70	93.33	0	25.73	3.0	No
GPRS850	Body	850	26.70	467.74	15.00	28.75	3.0	No
GPRS1900	Body	1900	22.70	186.21	15.00	17.11	3.0	No
Bluetooth	Head	2450	0.10	1.02	0	0.32	3.0	No
Bluetooth	Body	2450	0.10	1.02	15.00	0.11	3.0	No

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

SAR Evaluation Report 39 of 82

Standalone SAR estimation:

Mode	Frequency (GHz)	Distance (mm)	P _{avg} (dBm)	P _{avg} (mW)	Estimated 1-g (W/kg)
BT Head	2.45	0	0.10	1.02	0.043
BT Body	2.45	15	0.10	1.02	0.015

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance,mm)]·[$\sqrt{f(GHz)/x}$] W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

Simultaneous SAR test exclusion considerations:

GSM with BT:

Mode	Position	Reported S	AR (W/kg)	ΣSAR
Mode	POSITION	GSM	BT	< 1.6W/kg
	Left Head Cheek	0.575	0.043	0.618
	Left Head Tile	0.451	0.043	0.494
GSM850	Right Head Cheek	0.544	0.043	0.587
	Right Head Tilt	0.417	0.043	0.460
	Body-Back	0.785	0.015	0.800
	Left Head Cheek	0.192	0.043	0.235
	Left Head Tile	0.136	0.043	0.179
PCS1900	Right Head Cheek	0.176	0.043	0.219
	Right Head Tilt	0.126	0.043	0.169
	Body-Back	0.093	0.015	0.108

Conclusion:

 Σ SAR < 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not** required.

SAR Evaluation Report 40 of 82

SAR Plots (Summary of the Highest SAR Values)

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek (836.6 MHz Middle Channel)

Measurement Data

Test mode : GSM
Crest Factor : 8
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.428 W/kg Power Drift-Finish : 0.420 W/kg Power Drift (%) : -1.855

Tissue Data

 Type
 : Head

 Frequency
 : 836.6 MHz

 Epsilon
 : 41.26 F/m

 Sigma
 : 0.91 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283
Frequency Band : 835
Duty Cycle Factor : 8
Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.534 W/kg 10 gram SAR value : 0.389 W/kg Area Scan Peak SAR : 0.558 W/kg Zoom Scan Peak SAR : 0.819 W/kg

Plot 1#

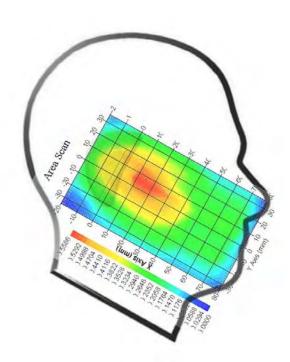

SAR Evaluation Report 41 of 82

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-worn-Back (824.2 MHz Low Channel)

Measurement Data

Test mode : GPRS
Crest Factor : 2
Scan Type : : Complete

Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.639 W/kg Power Drift-Finish : 0.630 W/kg Power Drift (%) : -1.376

Tissue Data

 Type
 : Body

 Frequency
 : 824.2 MHz

 Epsilon
 : 53.96 F/m

 Sigma
 : 0.93 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283
Frequency Band : 835
Duty Cycle Factor : 2
Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.783 W/kg 10 gram SAR value : 0.511 W/kg Area Scan Peak SAR : 0.810 W/kg Zoom Scan Peak SAR : 1.227 W/kg

Plot 2#

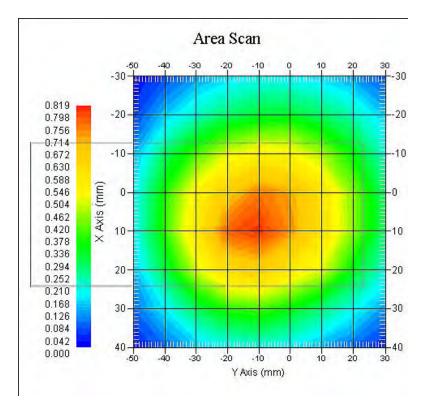

SAR Evaluation Report 42 of 82

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek(1850.2MHz Low Channel)

Measurement Data

Test mode : GSM
Crest Factor : 8
Scan Type : Complete

Area Scan : 11x8x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.163 W/kg Power Drift-Finish : 0.160 W/kg Power Drift (%) : -1.891

Tissue Data

 Type
 : Head

 Frequency
 : 1850.2 MHz

 Epsilon
 : 39.84 F/m

 Sigma
 : 1.36 S/m

 Density
 : 1000.00 kg/cu. M

Probe Data


Serial No. : 500-00283 Frequency Band : 1900 Duty Cycle Factor : 8 Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)2$

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.189 W/kg 10 gram SAR value : 0.093 W/kg Area Scan Peak SAR : 0.211 W/kg Zoom Scan Peak SAR : 0.329 W/kg

Plot 3#

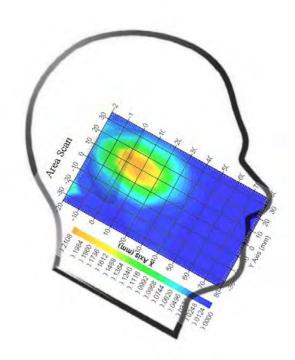

SAR Evaluation Report 43 of 82

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-worn-Back (1850.2MHz Low Channel)

Measurement Data

Test mode : GPRS
Crest Factor : 2
Scan Type : Complete

Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.063 W/kg Power Drift-Finish : 0.062 W/kg Power Drift (%) : -1.619

Tissue Data

 Type
 : Body

 Frequency
 : 1850.2 MHz

 Epsilon
 : 53.88 F/m

 Sigma
 : 1.49 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 1900 Duty Cycle Factor : 2 Conversion Factor : 4.5

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)2$

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.089 W/kg 10 gram SAR value : 0.047 W/kg Area Scan Peak SAR : 0.092 W/kg Zoom Scan Peak SAR : 0.150 W/kg

Plot 4#

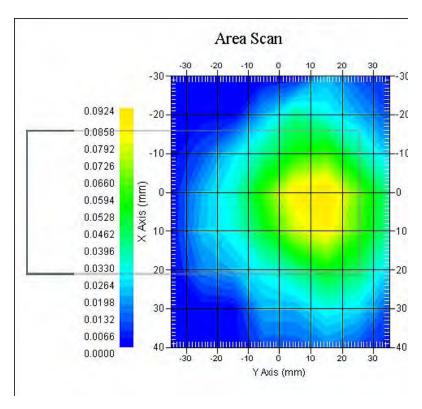

SAR Evaluation Report 44 of 82

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement Uncertainty for 30MHz to 6GHz

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c _i ¹ (1-g)	c _i ¹ (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
		Measure	ment Syst	em	•		
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	(1-cp) ¹	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	√ср	√ср	4.4	4.4
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
		Res	triction				
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1
Test Sample Positioning	2.3	normal	1	1	1	2.3	2.3
Device Holder Uncertainty	6.215	normal	1	1	1	6.215	6.215
Drift of Output Power	4.627	rectangular	$\sqrt{3}$	1	1	2.67	2.67
		Phantor	n and Setu	ıp			
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	$\sqrt{3}$	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	1.938	normal	1	0.7	0.5	1.36	0.97
Liquid Permittivity(target)	5.0	rectangular	$\sqrt{3}$	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	3.093	normal	1	0.6	0.5	1.86	1.55
Combined Uncertainty		RSS				10.78	10.55
Expanded uncertainty (coverage factor=2)		Normal(k=2)				21.56	21.10

SAR Evaluation Report 45 of 82

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement Uncertainty for 30MHz to 6GHz

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c _i ¹ (1-g)	c _i ¹ (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
		Measure	ment Syst	em	•		
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	(1-cp) ¹	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	√ср	√ср	4.4	4.4
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
		Res	triction				
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1
Test Sample Positioning	2.3	normal	1	1	1	2.3	2.3
Device Holder Uncertainty	6.215	normal	1	1	1	6.215	6.215
Drift of Output Power	4.627	rectangular	$\sqrt{3}$	1	1	2.67	2.67
		Phantor	n and Setu	ıp			
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	$\sqrt{3}$	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	1.938	normal	1	0.7	0.5	1.36	0.97
Liquid Permittivity(target)	5.0	rectangular	$\sqrt{3}$	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	3.093	normal	1	0.6	0.5	1.86	1.55
Combined Uncertainty		RSS				10.78	10.55
Expanded uncertainty (coverage factor=2)		Normal(k=2)				21.56	21.10

SAR Evaluation Report 46 of 82

APPENDIX B – PROBE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No.: PC-1598

Task No: BACL-5778

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe
Record of Calibration
Head and Body
Manufacturer: APREL Laboratories
Model No.: E-020
Serial No.: 500-00283

Calibration Procedure: D01-032-E020-V2, D22-012-Tissue, D28-002-Dipole

Project No: BACL-5745

Calibrated: 14th October 2014 Released on: 14th October 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr. OTTAWA, ONTARIO CANADA K2K 3J1 Division of APREL Lab. TEL: (613) 435-8300 FAX: (613) 435-8306

SAR Evaluation Report 47 of 82

Division of APREL Inc.

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the references listed below. Calibration is performed using accepted methodologies as per the references listed below. Probes are calibrated for air, and tissue and the values reported are the results from the physical quantification of the probe through meteorgical practices.

Calibration Method

Probes are calibrated using the following methods.

<800 MHz

TEM Cell for sensitivity in air

Standard phantom using temperature transfer method for sensitivity in tissue

>800 MHz

Waveguide* method to determine sensitivity in air and tissue

"Waveguide is numerically (simulation) assessed to determine the field distribution and power

The boundary effect for the probe is assessed using a standard flat phantom where the probe output is compared against a numerically simulated series of data points

References

- Die IEEE Standard 1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- EN 62209-1:2006
 Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- IEC 62209-2:2010 Human exposure to RF fields from hand-held and body-mounted wireless devices - Human models, instrumentation, and procedures - Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz - 6 GHz)
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Page 2 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 48 of 82

Division of APREL Inc.

Conditions

Probe 500-00283 was a recalibration.

Ambient Temperature of the Laboratory: $22 \,^{\circ}\text{C}$ +/- $1.5 \,^{\circ}\text{C}$ Temperature of the Tissue: $21 \,^{\circ}\text{C}$ +/- $1.5 \,^{\circ}\text{C}$ Relative Humidity: $< 60 \,^{\circ}\text{M}$

Primary Measurement Standards

 Instrument
 Serial Number
 Cal due date

 Tektronix USB Power Meter
 11C940
 May 14, 2015

 Signal Generator HP 83640B
 3844A00689
 Feb 12, 2015

Secondary Measurement Standards

Network Analyzer Anritsu 37347C 002106 Feb. 20, 2015

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Dan Brooks, Test Engineer

Page 3 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 49 of 82

Division of APREL Inc.

Probe Summary

Probe Type: E-Field Probe E020

Serial Number: 500-00283

Frequency: As presented on page 5

Sensor Offset: 1.56 Sensor Length: 2.5

Tip Enclosure: Composite* Tip Diameter: < 2.9 mm Tip Length: 55 mm

Total Length: 289 mm

*Resistive to recommended tissue recipes per IEEE-1528

Sensitivity in Air

1.2 μV/(V/m)² 1.2 μV/(V/m)² 1.2 μV/(V/m)² Channel X: Channel Y: Channel Z:

Diode Compression Point: 95 mV

50 of 82 SAR Evaluation Report

Page 4 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

NCL Calibration Laboratories Division of APREL Inc.

Calibration for Tissue (Head H. Body B)

Frequency	Tissue Type	Measured Epsilon	Measured Sigma	Standard Uncertainty (%)	Calibration Frequency Range (MHz)	Conversion Factor
450 H	Head	43.59	0.86	3.5	±50	5.7
450 B	Body	56.74	0.94	3.5	±50	5.8
750 H	Head	42.98	0.92	3.5	±50	6.0
750 B	Body	43.05	0.93	3.5	±50	5.5
835 H	Head	43.42	0.94	3.5	±50	5.9
835 B	Body	55.77	1.01	3.5	±50	5.9
900 H	Head	41.87	1.06	3.5	±50	6.0
900 B	Body	55.62	1.05	3.5	±50	5.9
1450 H	Head	X	X	X	X	X
1450 B	Body	X	X	X	X	Х
1500 H	Head	X	X	X	X	Х
1500 B	Body	X	X	X	X	X
1640 H	Head	X	X	X	X	X
1640 B	Body	X	X	X	X	X
1750 H	Head	38.23	1.38	3.5	±75	5.4
1750 B	Body	52.86	1.54	3.5	±75	5.3
1800 H	Head	X	X	X	X	X
1800 B	Body	X	X	X	X	X
1900 H	Head	40.20	1.38	3.5	±75	4.8
1900 B	Body	52.63	1.46	3.5	±75	4.5
2000 H	Head	X	X	X	X	X
2000 B	Body	X	X	X	X	X
2100 H	Head	X	Х	X	X	Х
2100 B	Body	X	X	X	X	X
2300 H	Head	X	X	X	X	X
2300 B	Body	X	X	X	X	X
2450 H	Head	37.26	1.84	3.5	±75	4.9
2450B	Body	53.61	1.9	3.5	±75	4.3
3000 H	Head	X	X	X	X	X
3000 B	Body	X	X	X	X	X
3600 H	Head	37.49	3.16	3.5	±100	4.5
3600 B	Body	49.94	3.86	3.5	±100	4.0
5250 H	Head	35.51	4.78	3.5	±100	3.0
5250 B	Body	47.54	5.11	3.5	±100	2.8
5600 H	Head	36.05	5.15	3.5	±100	2.8
5600 B	Body	46.49	5.72	3.5	±100	2.2
5800 H	Head	45.99	6.01	3.5	±100	3.2
5800 B	Body	35.6	5.37	3.5	±100	2.5

Page 5 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 51 of 82

Division of APREL Inc.

Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2.1% for the distance between the tip of the probe and the tissue boundary, when less than 0.58mm.

Spatial Resolution:

The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe.

DAQ-PAQ Contribution

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 M Ω .

Probe Calibration Uncertainty

Uncertainty component	Tolerance (±%)	Probability distribution	Divisor	Standard uncertainty (± %)
Incident or forward power	2.5	R	√3	1.44
Reflected power	2	R	√3	1.15
Liquid conductivity measurement	1	R	√3	0.58
Liquid permittivity measurement	1	R	V3	0.58
Liquid conductivity deviation	1.5	R	√3	0.87
Liquid permittivity deviation	1.5	R	√3	0.87
Frequency deviation	2.25	R	√3	1.30
Field homogeneity	2.5	R	V3	1.44
Field-probe positioning	2.5	R	V3	1.44
Field-probe linearity	1.55	R	√3	0.89
Combined standard uncertainty		RSS		3.50


SAR Evaluation Report 52 of 82

Page 6 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

Division of APREL Inc.

Receiving Pattern Air

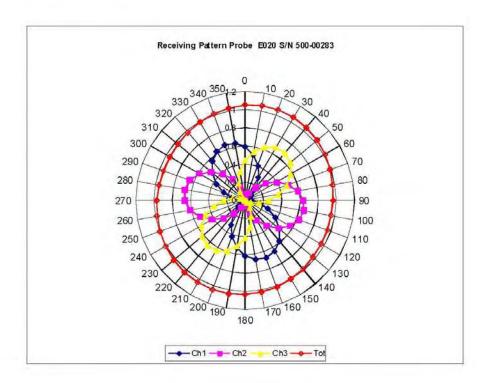



Page 7 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 53 of 82

Division of APREL Inc.

Isotropy Error Air

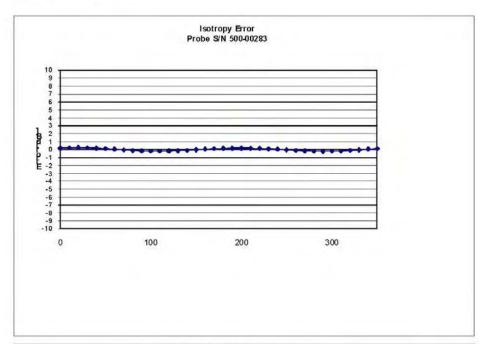

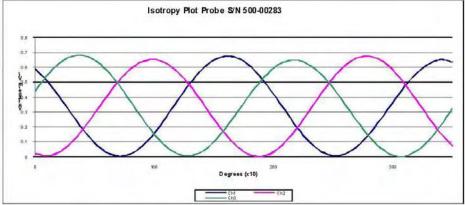

Isotropicity Tissue:


0.10 dB

Page 8 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 54 of 82

Division of APREL Inc.

Dynamic Range

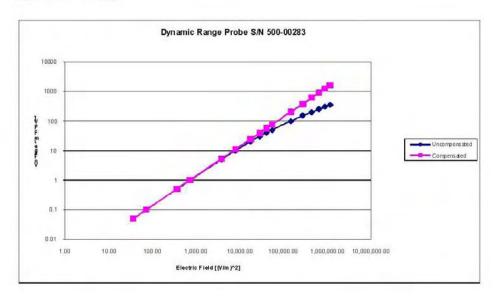


Page 9 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 55 of 82

Division of APREL Inc.

Video Bandwidth

Probe Frequency Characteristics

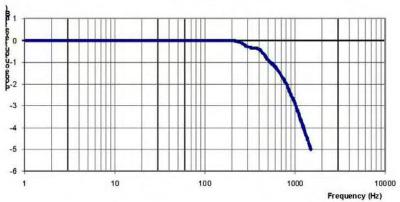

Video Bandwidth at 500 Hz 1 dB Video Bandwidth at 1.02 KHz: 3 dB

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2014.

Page 10 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 56 of 82

APPENDIX C DIPOLE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1599 Project Number: BAC-dipole-cal-5779

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole(Head and Body)

Manufacturer: APREL Laboratories Part number: ALS-D-835-S-2 Frequency: 835 MHz Serial No: 180-00558

Customer: Bay Area Compliance Laboratory (China)

Calibrated: 8th October 2014 Released on: 8th October 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

uite 102, 303 Terry Fox Dr. Kanata, ONTARIO CANADA K2K 3J1 Division of APREL Lab. TEL: (613) 435-8300 FAX: (613)435-8306

SAR Evaluation Report 57 of 82

Division of APREL Laboratories.

Conditions

Dipole 180-00558 was received with a damaged connection for a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 21 °C +/- 0.5°C

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Maryna Nesterova Calibration Engineer

Primary Measurement Standards

 Instrument
 Serial Number
 Cal due date

 Tektronix USB Power Meter
 11C940
 May 14, 2015

 Network Analyzer Anritsu 37347C
 002106
 Feb. 20, 2015

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 58 of 82

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 162.2 mm **Height**: 89.4 mm

Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	835 MHz	1.066 U	-30.344 dB	49.001 Ω
Body	835 MHz	1.089 U	-28.118 dB	53.117 Ω

System Validation Results

Tissue	Frequency	1 Gram	10 Gram	Peak
Head	835 MHz	9.773	6.174	14.713
Body	835 MHz	9.736	6.297	14.513



This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 59 of 82

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 180-00558. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 225.

References

- SSI-TP-018-ALSAS Dipole Calibration Procedure
- SSI-TP-016 Tissue Calibration Procedure
- IEEE 1528:2013 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques"
- IEC-62209-1:2006 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
 Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"
- IEC-62209-2:2010 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
 Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- D28-002 Procedure for validation of SAR system using a dipole

Conditions

Dipole 180-00558 was repaired prior to this calibration. The repair reliability depends upon correct usage of the dipole.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 20 °C +/- 0.5°C

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical1%Positioning Error1.22%Electrical1.7%Tissue2.2%Dipole Validation2.2%

TOTAL 8.32% (16.64% K=2)

4

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 60 of 82

NCL Calibration Laboratories Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL	APREL	Measured	Measured
Length	Height	Length	Height
161.0 mm	89.8 mm	162.2 mm	89.4 mm

Electrical Verification

Tissue Type	Return Loss:	SWR:	Impedance:
Head	-30.344 dB	1.066 U	49.001Ω
Body	-28.118 dB	1.089 U	53.117 Ω 🗆

Tissue Validation

	Dielectric constant, 6r	Conductivity, o [S/m]
Head Tissue 835MHz	43.42	0.94
Body Tissue 835MHz	55.77	1.01

5

This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 61 of 82

Division of APREL Laboratories.


The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

Head Tissue: Frequency Range 0.817 to 0.848 GHz



Body Tissue: Frequency Range 0.823 to 0.851 GHz




This page has been reviewed for content and attested to by signature within this document.

6


SAR Evaluation Report 62 of 82

Division of APREL Laboratories.

SWR



Body




This page has been reviewed for content and attested to by signature within this document.


7

Division of APREL Laboratories.

Smith Chart Dipole Impedance



Body



This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 64 of 82

8

Division of APREL Laboratories.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List 2014.

9

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 65 of 82

Report No: RDG141208003-20

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1601 Project Number: BAC-dipole –cal-5779

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole (Head & Body)

Manufacturer: APREL Laboratories
Part number: ALS-D-1900-S-2
Frequency: 1900 MHz
Serial No: 210-00710

Customer: Bay Area Compliance Laboratory (China)

Calibrated: 9th October, 2014 Released on: 9th October, 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

uite 102, 303 Terry Fox Dr. Kanata, ONTARIO CANADA K2K 3J1 Division of APREL Lab. TEL: (613) 435-8300 FAX: (613)435-8306

SAR Evaluation Report 66 of 82

Division of APREL Laboratories.

Conditions

Dipole 210-00710 was received in good condition and was a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 21 °C +/- 0.5°C

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Maryna Nesterova Calibration Engineer

Primary Measurement Standards

 Instrument
 Serial Number
 Cal due date

 Tektronix USB Power Meter
 11C940
 May 14, 2015

 Network Analyzer Anritsu 37347C
 002106
 Feb. 20, 2015

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 67 of 82

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 67.1 mm **Height:** 38.9 mm

Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	1900MHz	1.084 U	-27.92 dB	52.247 Ω
Body	1900MHz	1.128 U	-24.40 dB	52.618 Ω

System Validation Results

Tissue	Frequency	1 Gram	10 Gram	Peak
Head	1900 MHz	39.481	20.44	73.364
Body	1900 MHz	39.715	20.552	73.565

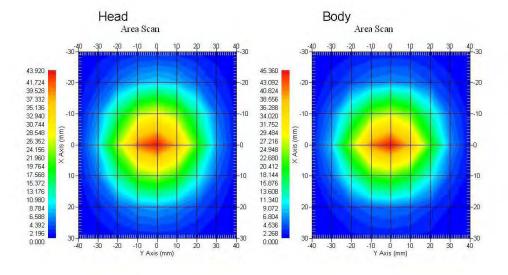

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 68 of 82

3

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 210-00710. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 225.

References

- SSI-TP-018-ALSAS Dipole Calibration Procedure
- SSI-TP-016 Tissue Calibration Procedure
- IEEE 1528:2013 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques"
- IEC-62209-1:2006 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
 Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"
- IEC-62209-2:2010 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
 Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- D28-002 Procedure for validation of SAR system using a dipole

Conditions

Dipole 210-00710 was a recalibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 20 °C +/- 0.5°C

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical 1%
Positioning Error 1.22%
Electrical 1.7%
Tissue 2.2%
Dipole Validation 2.2%

TOTAL 8.32% (16.64% K=2)

4

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 69 of 82

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL	APREL	Measured	Measured
Length	Height	Length	Height
68.0 mm	39.5 mm	67.1mm	38.9 mm

Electrical Validation

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	1900MHz	1.084 U	-27.92 dB	52.247 Ω
Body	1900MHz	1.128 U	-24.40 dB	52.618 Ω

Tissue Validation

	Dielectric constant, ε _r	Conductivity, o [S/m]
Head Tissue 1900MHz	40.20	1.38
Body Tissue 1900MHz	52.63	1.46

5

This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 70 of 82

Division of APREL Laboratories.


The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss





Body: Frequency Range 1.869 to 1.931 MHz




6


This page has been reviewed for content and attested to by signature within this document.

71 of 82 SAR Evaluation Report

Division of APREL Laboratories.

SWR





This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 72 of 82


7

8


NCL Calibration Laboratories

Division of APREL Laboratories.

Smith Chart Dipole Impedance



Body



This page has been reviewed for content and attested to by signature within this document.

s been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 73 of 82

Division of APREL Laboratories.

Test Equipment


The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List 2014

9

This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 74 of 82

APPENDIX D EUT TEST POSITION PHOTOS






Body-worn Back Setup Photo (15mm)

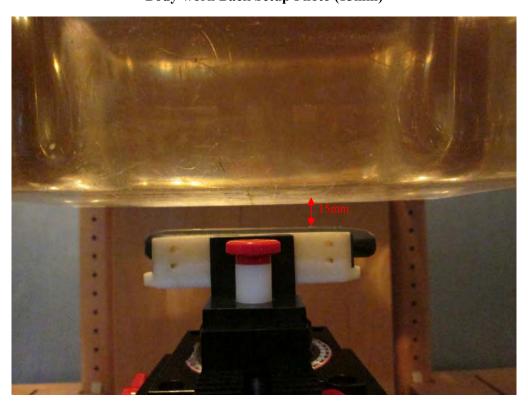

SAR Evaluation Report 75 of 82

Left Head Touch Setup Photo

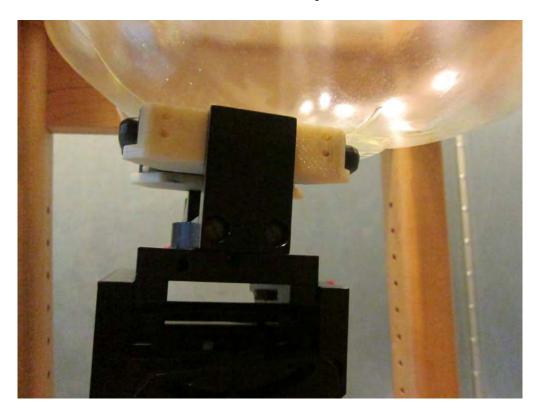

Left Head Tilt Setup Photo




SAR Evaluation Report 76 of 82

Right Head Touch Setup Photo



Right Head Tilt Setup Photo

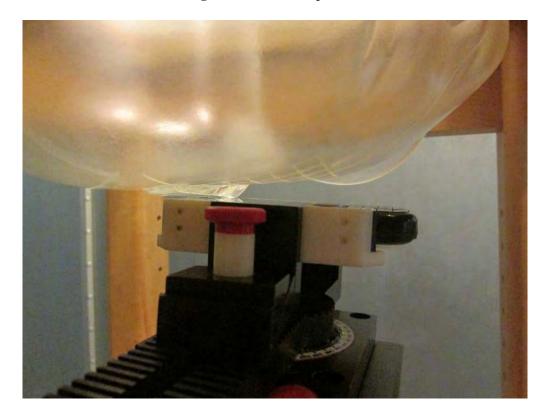

SAR Evaluation Report 77 of 82

APPENDIX E EUT PHOTOS

EUT – Front View



EUT – Back View



SAR Evaluation Report 78 of 82

EUT –Left Side View



EUT – Right Side View



SAR Evaluation Report 79 of 82

EUT – Top View



EUT – Bottom View



SAR Evaluation Report 80 of 82

EUT – Uncover View



SAR Evaluation Report 81 of 82

APPENDIX F INFORMATIVE REFERENCES

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, O ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-_eld scanning system for dosimetricPage 82 of 82 assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph K.astle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645 (652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15 {17, 1997, pp. 120-24.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23 {25 June, 1996, pp. 172-175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865-1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10.

***** END OF REPORT *****

SAR Evaluation Report 82 of 82