



FCC SAR TEST REPORT

Report No: STS1512179H01

Issued for

Global Distribution FZE

508/509, The Business Centre Building, Al Hamriya – Bur
Dubai,Po Box 126963,U.A.E.

Product Name:	3G Smart Phone
Brand Name:	i.onik
Model No.:	i422
Series Model:	N/A
FCC ID:	2ADPL-I422
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report SAR (1g):	Head:1.185 W/kg
	Body:0.740 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.



Test Report Certification

Applicant's name : Global Distribution FZE
Address : 508/509, The Business Centre Building, Al Hamriya – Bur Dubai, Po Box 126963, U.A.E.

Manufacture's Name : Hong Kong Umedia Limited
Address : Room402, Bld.7, F518 idea land, Baoyuan Road, Bao'an District, Shenzhen, Guangdong, P.R.C

Product description

Product name : 3G Smart Phone

Trademark : i.onik

Model and/or type reference : i422

Serial Model : N/A

Standards : ANSI/IEEE Std. C95.1-1992
FCC 47 CFR Part 2 (2.1093)
IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.


Date of Test :

Date (s) of performance of tests : 16 Jan. 2016

Date of Issue : 17 Jan. 2016


Test Result : **Pass**

Testing Engineer :




(Allen Chen)

Technical Manager :



(John Zou)

Authorized Signatory :



(Bovey Yang)





TABLE OF CONTENTS

1. General Information	4
1.1 EUT Description	4
1.2 Test Environment	5
1.3 Test Facility	5
2. Test Standards And Limits	6
3. SAR Measurement System	7
3.1 Definition Of Specific Absorption Rate (SAR)	7
3.2 SAR System	7
3.2.1 Probe	8
3.2.2 Phantom	9
3.2.3 Device Holder	9
4. Tissue Simulating Liquids	10
4.1 Simulating Liquids Parameter Check	10
5. SAR System Validation	12
5.1 Validation System	12
5.2 Validation Result	12
6. SAR Evaluation Procedures	13
7. EUT Antenna Location Sketch	14
7.1 SAR TEST EXCLUSION CONSIDER TABLE	15
8. EUT Test Position	17
8.1 Define Two Imaginary Lines On The Handset	17
8.2 Hotspot mode exposure position condition	18
9. Uncertainty	19
9.1 Measurement Uncertainty	19
9.2 System validation Uncertainty	21
10. Conducted Power Measurement	23
11. EUT And Test Setup Photo	27
11.1 EUT Photo	27
11.2 Setup Photo	30
12. SAR Result Summary	38
12.1 Head SAR	38
12.2 Body SAR And Hotspot	39
12.3 repeated SAR measurement	40
13. Equipment List	43
Appendix A. System Validation Plots	44
Appendix B. SAR Test Plots	60

Appendix C. Probe Calibration And Dipole Calibration Report	116
---	-----



1. General Information

1.1 EUT Description

Equipment	3G Smart Phone			
Brand Name	i.onik			
Model No.	i422			
Serial Model	N/A			
FCC ID	2ADPL-I422			
Model Difference	N/A			
Adapter	Input: AC110-240V, 0.35A, 50/60 Hz Output: DC 5V, 700mA			
Battery	Rated Voltage: 3.7V Charge Limit: 4.2V Capacity: 1400mAh			
Hardware Version	G223_MB_V43			
Software Version	g223_s40_amm_b145			
Frequency Range	GSM 850:824.2~848.8 MHz PCS1900:1850.2~1909.8 MHz WCDMA II:1852.4~1907.6 MHz WCDMA IV:1712.4~1752.6 MHz WCDMA V:826.4~846.6 MHz WLAN 802.11 b/g/n(HT20):2412~2462 MHz WLAN 802.11 n(HT40):2422~2452 MHz Bluetooth:2402~2480 MHz			
Transmit Power(Average):	GSM 850: 32.28dBm GSM 1900: 28.72dBm WCDMA II: 21.58dBm WCDMA IV: 21.58dBm WCDMA V: 21.81dBm		802.11b: 17.60dBm 802.11g: 14.93dBm 802.11 n(HT20): 14.99dBm 802.11 n(HT40): 11.58dBm Bluetooth: 5.887dBm	
Max. Reported SAR(1g):	Band	Mode	Head(W/kg)	Body-worn(W/kg)
	PCE	GSM 850	0.073	0.121
	PCE	GSM 1900	1.083	0.607
	PCE	WCDMA II	1.039	0.740
	PCE	WCDMA IV	1.185	0.651
	PCE	WCDMA V	0.116	0.093
	DTS	WIFI	0.127	0.084
1-g Sum SAR(W/kg)			0.167 ^{Note}	0.084 ^{Note}
			1.352	0.824
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter (DSS) Digital Transmission System (DTS)			
Operating Mode:	GSM: GSM Voice, GPRS EDGE Class 12; WCDMA: RMC, HSDPA, HSUPA Release 6; WLAN: 802.11 b/g/n; Bluetooth: V4.0 + EDR (GFSK + π /4DQPSK+8DPSK)			
Antenna Specification:	GSM/WCDMA: PIFA Antenna BT/WIFI: PIFA Antenna			
Hotspot Mode:	Support			
DTM Mode:	Not Support			

Note : Bluetooth SAR was estimated.



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65

1.3 Test Facility

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F, Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong,
Baoan District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649

FCC Registration No.: 842334;

IC Registration No.: 12108A-1



2. Test Standards And Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 447498 D02 v02r01	SAR measurement procedures for USB dongle transmitters
6	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
7	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
8	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
9	FCC KDB 941225 D06 Hotspot Mode v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.4 8.0 20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.08 1.6 4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 10 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

3. SAR Measurement System

3.1 Definition Of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

SATIMO SAR System Diagram:

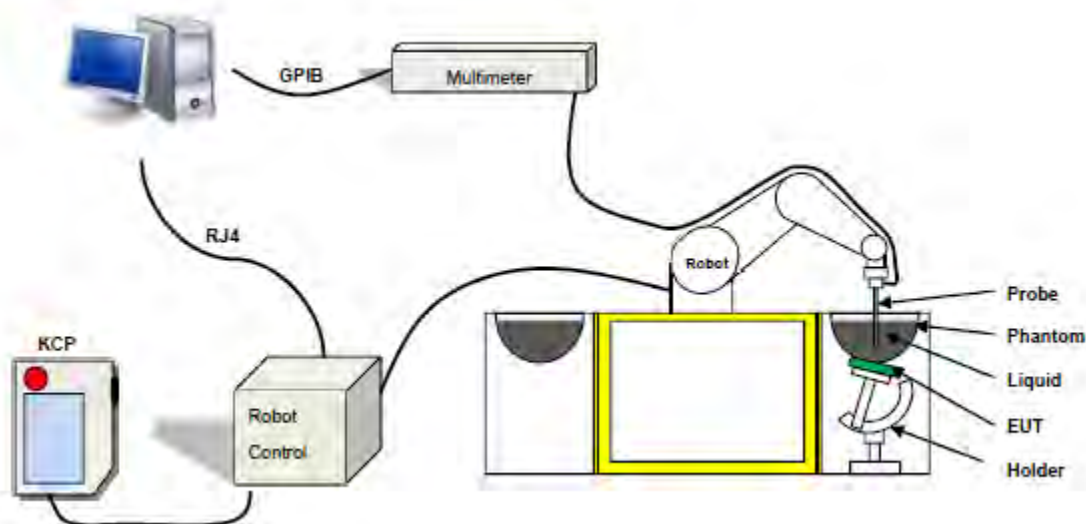

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 17/14 EP221 with following specifications is used

- Dynamic range: 0.01-100 W/kg
 - Tip Diameter :5 mm
 - Distance between probe tip and sensor center: 2.7mm
 - Distance between sensor center and the inner phantom surface: 4 mm (repeatability better than +/- 1mm)
 - Probe linearity: <0.25 dB
 - Axial Isotropy: <0.25 dB
 - Spherical Isotropy: <0.25 dB
 - Calibration range: 450MHz to 2600MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1 – Satimo COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.


SN 32/14 SAM115



SN 32/14 SAM116



3.2.3 Device Holder

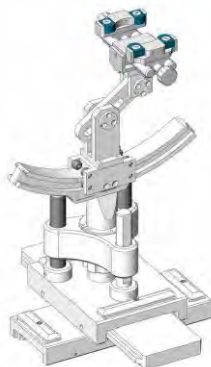

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Frequency (MHz)	Bactericide	DGBE	HEC	NaCl	Sucrose	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	σ	ϵ_r
835	0.10	/	1.00	1.45	57.00	/	40.45	0.90	41.6
900	0.10	/	1.00	1.48	56.50	/	40.92	0.98	41.2
1800	/	44.92	/	0.18	/	/	54.9	1.40	40.4
1900	/	44.92	/	0.18	/	/	54.9	1.42	39.9
2100	/	50.0	/	/	/	/	50.0	1.51	36.8
2450	/	7.99	/	0.16	/	/	50.0	1.88	40.3

Tissue dielectric parameters for head and body phantoms				
Frequency	ϵ_r		σ S/m	
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	58.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
3000	38.5	52.0	2.40	2.73
5800	35.3	48.2	5.27	6.00

**LIQUID MEASUREMENT RESULTS****Date:** 16 Jan. 2016**Ambient condition:** Temperature 22.0°C **Relative humidity:** 49%

Head Simulating Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
835 MHz	21.5	Permittivity:	41.5	40.6	-2.17	±5
		Conductivity:	0.97	0.95	-2.06	± 5
1800 MHz	21.5	Permittivity:	40.00	38.2	-4.50	±5
		Conductivity:	1.40	1.373	-1.93	± 5
1900 MHz	21.5	Permittivity:	40	39.5	-1.25	± 5
		Conductivity:	1.4	1.44	2.86	± 5
2450 MHz	21.5	Permittivity:	39.2	39.5	0.77	± 5
		Conductivity:	1.8	1.87	3.89	± 5


Body Simulating Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
835 MHz	21.5	Permittivity:	55.2	54.6	-1.09	± 5
		Conductivity:	0.97	0.99	2.06	± 5
1800 MHz	22.30	Permittivity:	53.30	51.079	-4.17	± 5
		Conductivity:	1.52	1.581	4.01	± 5
1900 MHz	21.5	Permittivity:	53.3	52.78	-0.98	± 5
		Conductivity:	1.52	1.55	1.97	± 5
2450 MHz	21.5	Permittivity:	52.7	52.41	-0.55	± 5
		Conductivity:	1.95	1.93	-1.03	± 5

5. SAR System Validation

5.1 Validation System

Each SATIMO system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

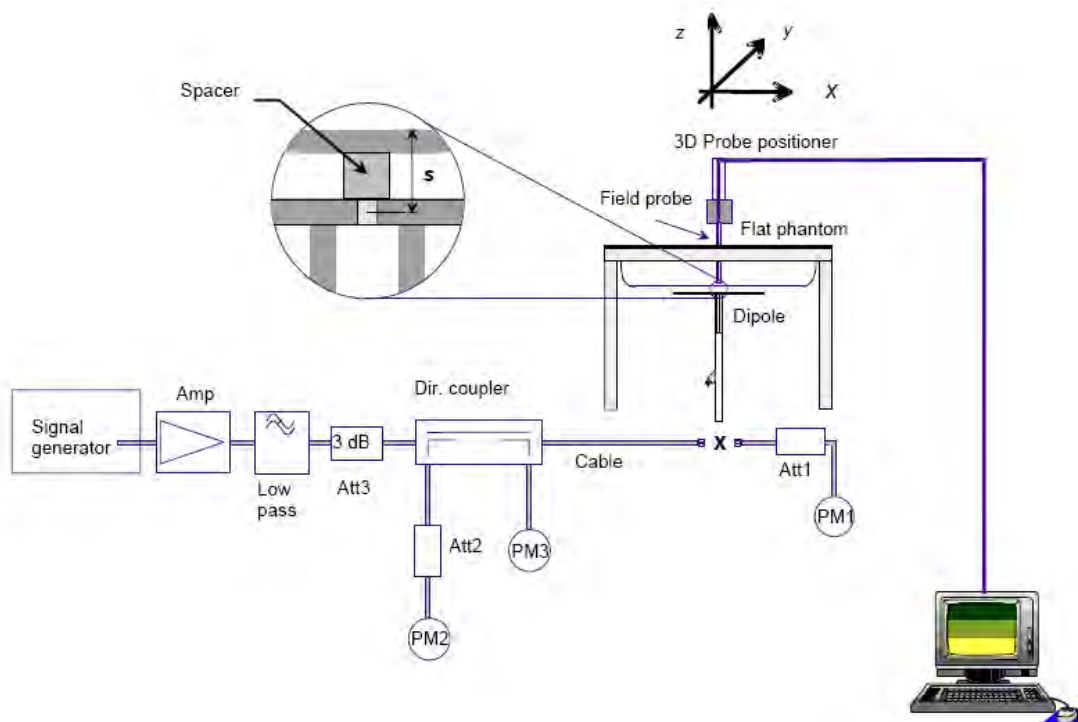

5.2 Validation Result

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %.

Ambient condition: Temperature 22.7°C **Relative humidity:** 49%

Freq.(MHz)	Power(mW)	Tested Value (W/Kg)	Normalized SAR (W/kg)	Target(W/Kg)	Tolerance(%)	Date
835 Head	100	0.952	9.52	9.56	-0.42	2016-01-16
835 Body	100	0.964	9.64	9.56	0.84	2016-01-16
1800 Head	100	3.790	37.90	38.4	-1.30	2016-01-16
1800 Body	100	3.701	37.01	38.4	-3.62	2016-01-16
1900 Head	100	3.892	38.92	39.8	2.26	2016-01-16
1900 Body	100	4.124	41.24	39.8	-3.49	2016-01-16
2450 Head	100	5.156	51.56	52.4	1.63	2016-01-16
2450 Body	100	5.108	51.08	52.4	2.58	2016-01-16

Note: The tolerance limit of System validation $\pm 10\%$.

6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:


The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

➤ Area Scan& Zoom Scan


First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

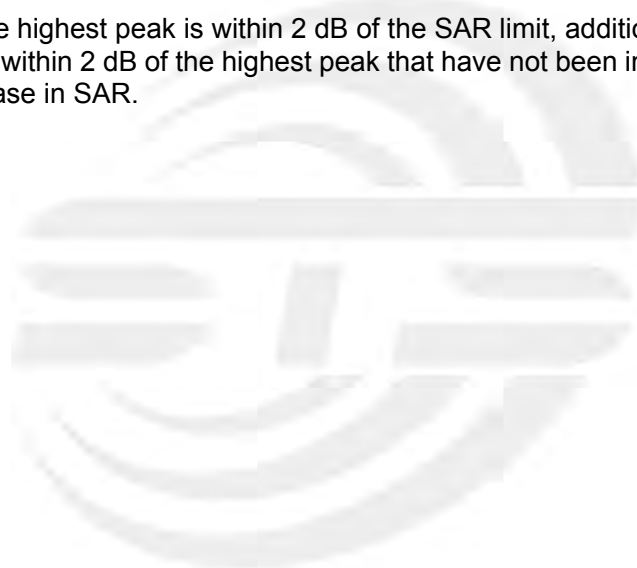

7. EUT Antenna Location Sketch

It is a 3G Smart Phone, support GSM mode and WCDMA mode.

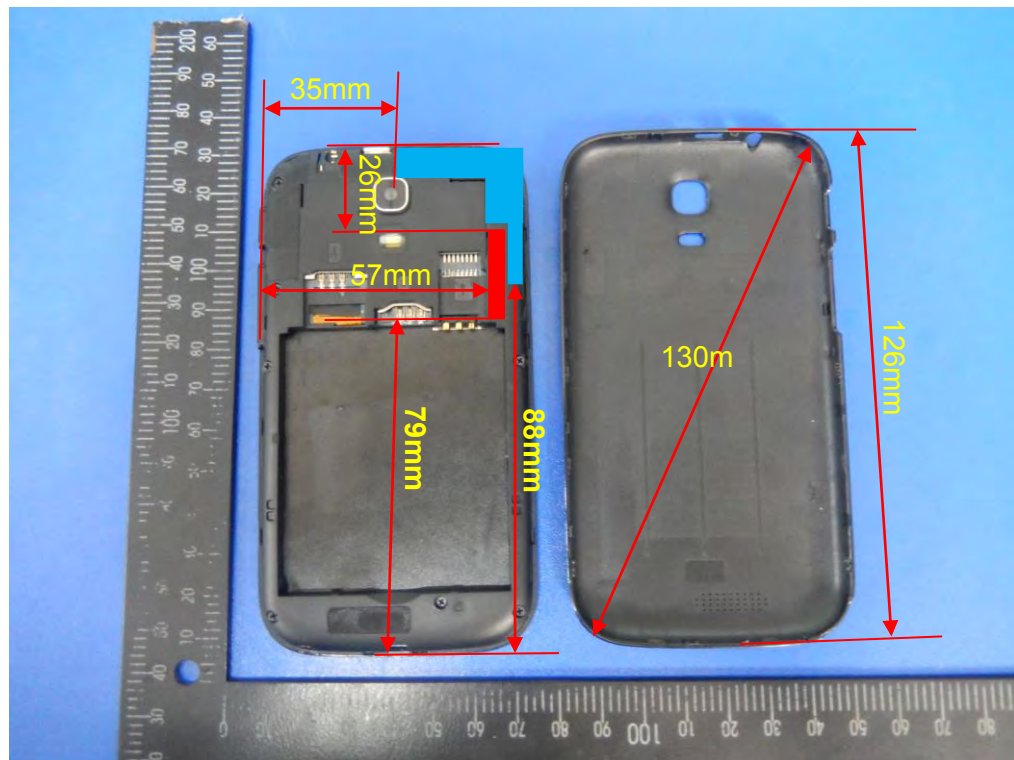

- WWAN Antenna
- WIFI/BT Antenna

7.1 SAR TEST EXCLUSION CONSIDER TABLE

According with FCC KDB 447498 D01v05r02, appendix A, <SAR test exclusion thresholds for 100MHz~6GHz and $\leq 50\text{mm}$ > table, this device SAR test configurations consider as following:

Band	Test position configurations					
	Front	Back	Left edge	Right edge	Top edge	Bottom edge
GSM850	<5mm	<5mm	<5mm	35mm	<5mm	88mm
	Yes	Yes	Yes	No	Yes	No
GSM1900	<5mm	<5mm	<5mm	35mm	<5mm	88mm
	Yes	Yes	Yes	No	Yes	No
WCDMA Band2	<5mm	<5mm	<5mm	35mm	<5mm	88mm
	Yes	Yes	Yes	No	Yes	No
WCDMA Band4	<5mm	<5mm	<5mm	35mm	<5mm	88mm
	Yes	Yes	Yes	No	Yes	No
WCDMA Band5	<5mm	<5mm	<5mm	35mm	<5mm	88mm
	Yes	Yes	Yes	No	Yes	No
WLAN	<5mm	<5mm	<5mm	57mm	26mm	79mm
	Yes	Yes	Yes	No	No	No
Bluetooth	<5mm	<5mm	<5mm	57mm	26mm	79mm
	Yes	Yes	Yes	No	No	No

Note:

- maximum power is the source-based time-average power and represents the maximum RF output power among production units.
- per KDB 447498 D01v05r02, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- per KDB 447498 D01v05r02, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <5mm, 5mm is user to determine SAR exclusion threshold
- per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance $\leq 50\text{mm}$ are determined by:

$$[(\text{max.power of channel, including tune-up tolerance, Mw})/(\text{min. test separation distance, mm})] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

f(GHz) is the RF channel transmit frequency in GHz
Power and distance are rounded to the nearest mW and mm before calculation
The result is rounded to one decimal place for comparison
For <50mm distance, we just calculate mW of the exclusion threshold value(3.0)to do compare
- per KDB 447498 D01v05r02, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following
a)[threshold at 50mm in step 1]+(test separation distance -50mm)*(f (MHz)/150)]Mw, at 100 MHz to 1500 MHz



b) [threshold at 50mm in step1]+(test separation distance -50mm) *10]mW at $> 1500\text{MHz}$ and $\leq 6\text{GHz}$

6. Per KDB 447498 D02v02r02,RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is $< 0.25\text{db}$ higher than RMC 12.2Kbps,or reported SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/Kg}$, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
7. Per KDB 248227 D01v01r02,choose the highest output power channel to test SAR and determine futher SAR exclusion 8.for each frequency band ,testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than $1/4\text{db}$ higher than those measured at the lower data rate than 11b mode ,thus the SAR can be excluded.




8. EUT Test Position

This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.


8.1 Define Two Imaginary Lines On The Handset

- (1) The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the handset.
- (2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

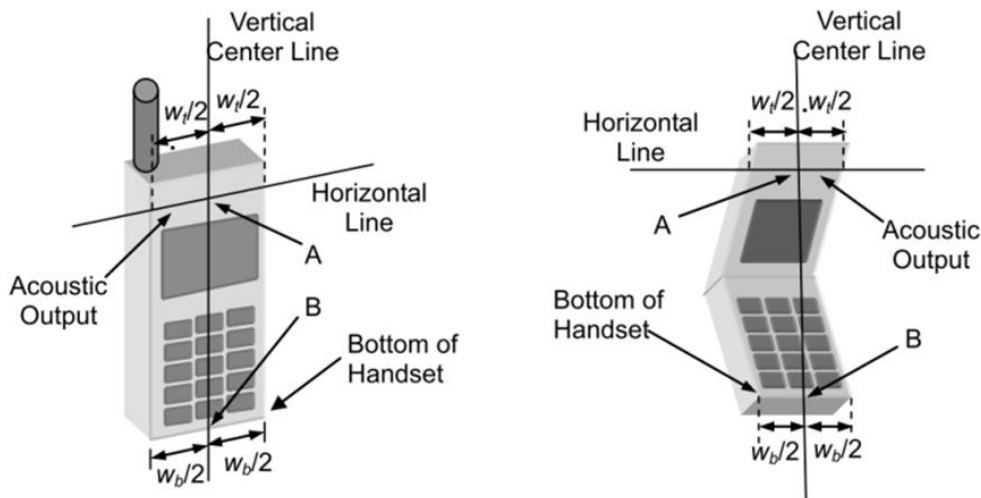


Cheek Position

- 1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- 2) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

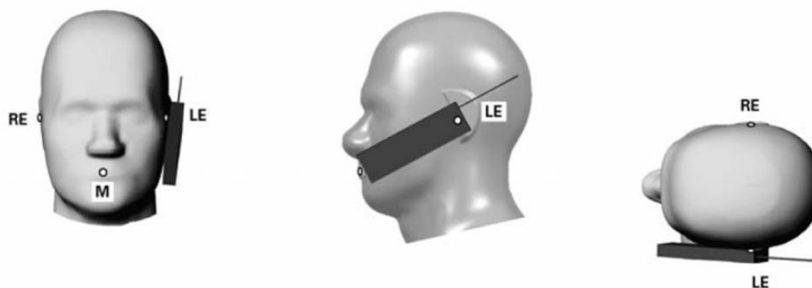


Title Position

- (1) To position the device in the "cheek" position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.

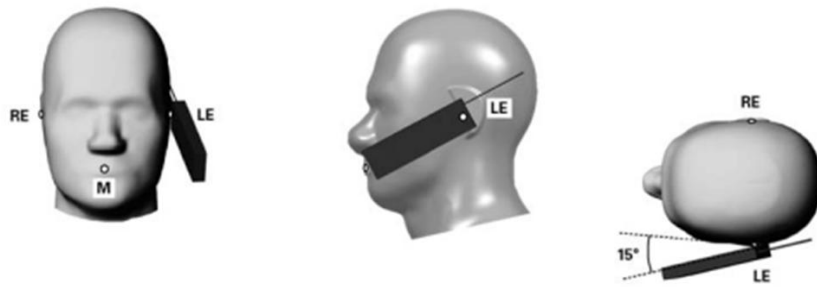


Body-worn Position Conditions

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to 5mm.

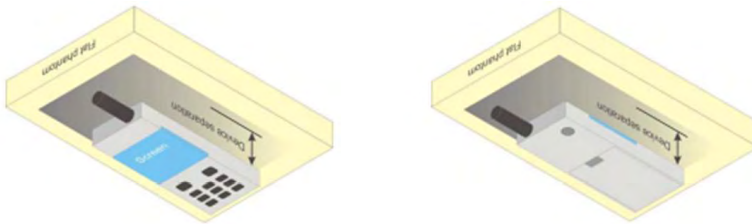

8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

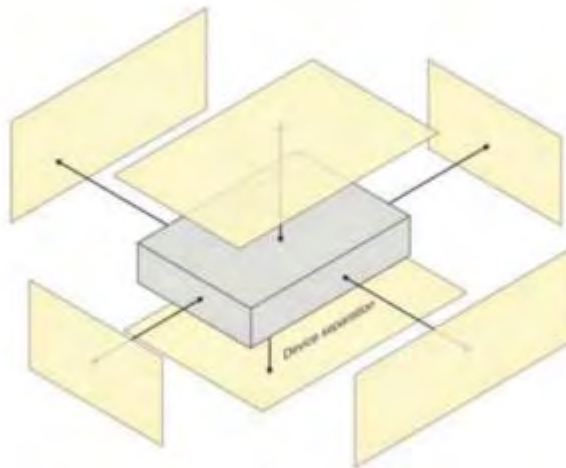

9. Uncertainty


9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

NO	Source	Tol(%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	1gUi	10gUi	Veff
Measurement System									
1	Probe calibration	5.8	N	1	1	1	5.8	5.8	∞
2	Axial isotropy	3.5	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	$(1-c_p)^{1/2}$	1.43	1.43	∞
3	Hemispherical isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
4	Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
5	Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
6	System Detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
7	Readout electronics	0.5	N	1	1	1	0.50	0.50	∞
8	Response time	0	R	$\sqrt{3}$	1	1	0	0	∞
9	Integration time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
10	Ambient noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
11	Ambient reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
12	Probe positioner mech. restrictions	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
13	Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
14	Max.SAR evaluation	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related									
15	Device positioning	2.6	N	1	1	1	2.6	2.6	11
16	Device holder	3	N	1	1	1	3.0	3.0	7



17	Drift of output power	5.0	R	√3	1	1	2.89	2.89	∞
Phantom and set-up									
18	Phantom uncertainty	4.0	R	√3	1	1	2.31	2.31	∞
19	Liquid conductivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	5
20	Liquid conductivity (meas)	4	N	1	0.23	0.26	0.92	1.04	5
21	Liquid Permittivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	∞
22	Liquid Permittivity (meas)	5.0	N	1	0.23	0.26	1.15	1.30	∞
Combined standard			RSS	$U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$			10.63%	10.54%	
Expanded uncertainty (P=95%)		$U = k U_c, k=2$					21.26%	21.08%	

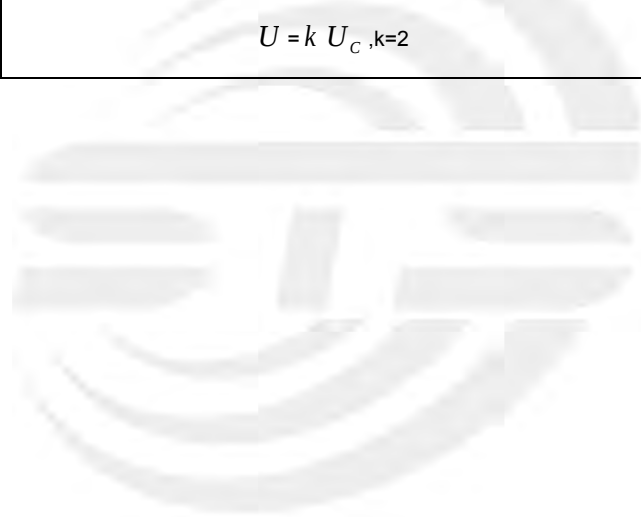



9.2 System validation Uncertainty

NO	Source	Tol(%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	1gUi	10gUi	Veff
Monument System									
1	Probe calibration	5.8	N	1	1	1	5.8	5.8	∞
2	Axial isotropy	3.5	R	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.43	1.43	∞
3	Hemispherical isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
4	Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
5	Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
6	System Detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
7	Modulation response	0	N	1	1	1	0	0	∞
8	Readout electronics	0.5	N	1	1	1	0.50	0.50	∞
9	Response time	0	R	$\sqrt{3}$	1	1	0	0	∞
10	Integration time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
11	Ambient noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
12	Ambient reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
13	Probe positioner mech. restrictions	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
14	Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
15	Max.SAR evaluation	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Dipole									
16	Deviation of experimental source from	4	N	1	1	1	4.00	4.00	∞
17	Input power and SAR drit measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞



18	Dipole Axis to liquid Distance	2	R	√3	1	1			∞
Phantom and set-up									
19	Phantom uncertainty	4.0	R	√3	1	1	2.31	2.31	∞
20	Uncertainty in SAR correction for deviation(in	2.0	N	1	1	0.84	2	1.68	∞
21	Liquid conductivity (target)	2	N	1	1	0.84	2.00	1.68	∞
22	Liquid conductivity (temperature uncertainty)	2.5	N	1	0.78	0.71	1.95	1.78	5
23	Liquid conductivity (meas)	4	N	1	0.23	0.26	0.92	1.04	5
24	Liquid Permittivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	∞
25	Liquid Permittivity (temperature uncertainty)	2.5	N	1	0.78	0.71	1.95	1.78	5
26	Liquid Permittivity (meas)	5.0	N	1	0.23	0.26	1.15	1.30	∞
Combined standard			RSS	$U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$			10.15%	10.05%	
Expanded uncertainty (P=95%)		$U = k U_c ,k=2$					21.29%	21.10%	

10. Conducted Power Measurement

Test Result:

Maximum Burst-Averaged Output Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	32.28	31.10	31.78	28.67	28.72	28.63
GPRS (GMSK, 1-Slot)	32.26	31.09	31.71	28.63	28.65	28.53
GPRS (GMSK, 2-Slot)	31.31	30.15	30.87	27.72	27.83	27.71
GPRS (GMSK, 3-Slot)	30.06	28.79	29.59	26.44	26.47	26.35
GPRS (GMSK, 4-Slot)	29.36	28.16	28.91	25.89	25.84	25.69
EGPRS(8PSK, 1-Slot)	32.24	31.02	31.68	28.54	28.60	28.48
EGPRS(8PSK, 2-Slot)	31.40	30.10	30.81	27.69	27.82	27.73
EGPRS(8PSK, 3-Slot)	30.19	28.83	29.53	26.45	26.53	26.49
EGPRS(8PSK, 4-Slot)	29.68	28.31	28.98	25.92	25.95	25.91
Remark: GPRS, CS4 coding scheme. EGPRS, MCS9 coding scheme. Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link						

Maximum Frame-Averaged Output Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	23.28	22.10	22.78	19.67	19.72	19.63
GPRS (GMSK, 1-Slot)	23.26	22.09	22.71	19.63	19.65	19.53
GPRS (GMSK, 2-Slot)	25.31	24.15	24.87	21.72	21.83	21.71
GPRS (GMSK, 3-Slot)	25.80	24.53	25.33	22.18	22.21	22.09
GPRS (GMSK, 4-Slot)	26.36	25.16	25.91	22.89	22.84	22.69
EGPRS(8PSK, 1-Slot)	23.24	22.02	22.68	19.54	19.60	19.48
EGPRS(8PSK, 2-Slot)	25.40	24.10	24.81	21.69	21.82	21.73
EGPRS(8PSK, 3-Slot)	25.93	24.57	25.27	22.19	22.27	22.23
EGPRS(8PSK, 4-Slot)	26.68	25.31	25.98	22.92	22.95	22.91
Remark : 1. SAR testing was performed on the maximum frame-averaged power mode. 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below: Frame-averaged power = Burst averaged power (1 Tx Slot) - 9 dB Frame-averaged power = Burst averaged power (2 Tx Slots) - 6 dB Frame-averaged power = Burst averaged power (3 Tx Slots) - 4.26 dB Frame-averaged power = Burst averaged power (4 Tx Slots) - 3 dB						

Band	WCDMA Band V			WCDMA Band IV			WCDMA Band II		
Channel	4132	4182	4233	1312	1413	1513	9263	9400	9537
Frequency (MHz)	826.4	836.6	846.6	1712.4	1732.6	1752.6	1852.4	1880.0	1907.6
RMC 12.2Kbps	21.81	21.67	21.76	21.48	21.54	21.58	21.18	21.14	21.58
HSDPA Subtest-1	21.32	21.23	21.34	20.99	21.14	21.15	20.72	20.68	21.16
HSDPA Subtest-2	20.99	20.76	20.83	20.65	20.63	20.75	20.37	20.31	20.77
HSDPA Subtest-3	20.56	20.27	20.35	20.22	20.23	20.25	19.95	19.87	20.36
HSDPA Subtest-4	19.97	19.62	19.68	19.53	19.56	19.60	19.34	19.18	19.81
HSUPA Subtest-1	20.85	20.74	20.84	20.55	20.70	20.69	20.28	20.19	20.66
HSUPA Subtest-2	20.44	20.25	20.39	20.13	20.19	20.18	19.76	19.78	20.32
HSUPA Subtest-3	20.00	19.76	19.95	19.66	19.75	19.75	19.33	19.33	19.85
HSUPA Subtest-4	19.48	19.13	19.26	19.08	19.18	19.08	18.66	18.82	19.22
HSUPA Subtest-5	18.90	18.55	18.71	18.57	18.51	18.39	18.14	18.13	18.57

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$MAX(CM-1,0)$
Note: CM=1 for $\beta_{cl}/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced.

The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11b	1	2412	17.50
	6	2437	17.60
	11	2462	17.20
802.11g	1	2412	14.36
	6	2437	14.25
	11	2462	14.93
802.11n(HT-20)	1	2412	14.28
	6	2437	14.24
	11	2462	14.99
802.11n(HT-40)	3	2422	11.24
	6	2437	11.58
	9	2452	11.29

Justification for test configurations for WLAN per KDB publication 248227 D01Wi-Fi SAR v02:

1. Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
2. For transmission modes with the same maximum output power specification, power were measured for the largest Channel bandwidth, lowest order modulation and lowest data rate.
3. For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
4. For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
5. The bolded data rate and channel above were tested for SAR.

Bluetooth

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1M)	0	2402	4.564
	39	2441	4.173
	78	2480	4.325
$\pi/4$ -DQPSK(2bps)	0	2402	3.846
	39	2441	3.759
	78	2480	4.018
8-DPSK(3Mbps)	0	2402	4.400
	39	2441	5.676
	78	2480	5.887

BT 4.0

Mode	Channel Number	Frequency (MHz)	PEAK Power (dBm)
GFSK	0	2402	-1.488
	19	2422	-1.426
	39	2442	-0.983



Turn Power

Note: The all sensors didn't have any influence to the all output power.

Mode	GSM850(AVG)	GSM1900(AVG)
GSM/PCS	31.3±1dBm	28.0±1dBm
GPRS (1 Slot)	31.3±1dBm	28.0±1dBm
GPRS (2 Slot)	30.5±1dBm	27.0±1dBm
GPRS (3 Slot)	29.5±1dBm	25.5±1dBm
GPRS (4 Slot)	28.5±1dBm	25.0±1dBm
EDGE (1 Slot)	31.3±1dBm	28.0±1dBm
EDGE (2 Slot)	30.5±1dBm	27.0±1dBm
EDGE (3 Slot)	29.5±1dBm	25.6±1dBm
EDGE (4 Slot)	29.0±1dBm	25.0±1dBm

Mode	WCDMA Band V(AVG)	WCDMA Band IV	WCDMA Band II(AVG)
AMR	21.0±1dBm	20.6±1dBm	20.6±1dBm
HSDPA Subtest-1	20.5±1dBm	20.2±1dBm	20.2±1dBm
HSDPA Subtest-2	20.0±1dBm	20.0±1dBm	20.0±1dBm
HSDPA Subtest-3	20.0±1dBm	19.5±1dBm	19.5±1dBm
HSDPA Subtest-4	19.0±1dBm	18.7±1dBm	18.5±1dBm
HSUPA Subtest-1	20.0±1dBm	20.0±1dBm	20.0±1dBm
HSUPA Subtest-2	20.0±1dBm	19.5±1dBm	19.5±1dBm
HSUPA Subtest-3	20.0±1dBm	19.0±1dBm	19.0±1dBm
HSUPA Subtest-4	19.0±1dBm	18.5±1dBm	18.5±1dBm
HSUPA Subtest-5	18.0±1dBm	18.0±1dBm	18.0±1dBm

Mode	WIFI
IEEE 802.11b	17.0±1dBm
IEEE 802.11g	14.0±1dBm
IEEE 802.11n HT20	14.0±1dBm
IEEE 802.11n HT40	11.0±1dBm

Mode	BT
GFSK	4±1dBm
$\pi/4$ -DQPSK	4±1dBm
8DPSK	5±1dBm

Mode	BT 4.0
GFSK	-1±1dBm

11. EUT And Test Setup Photo

11.1 EUT Photo

Front side



Back side



Top side



Bottom side




Left side




Right side




Right Touch

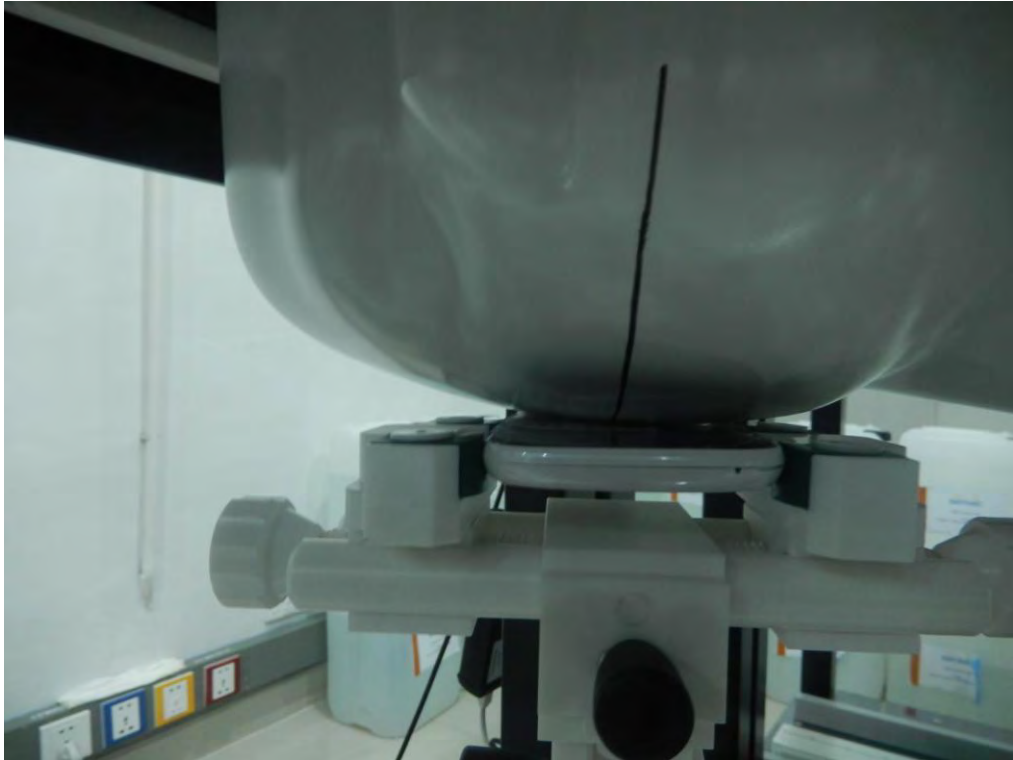


Right Tilt

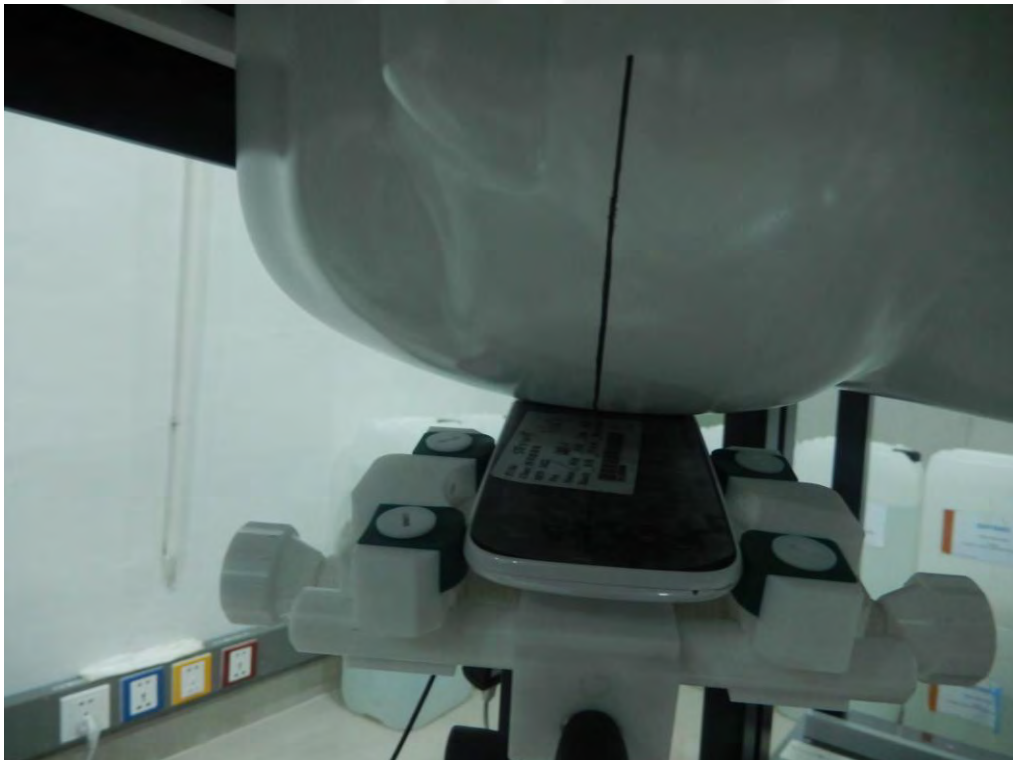


Left Touch

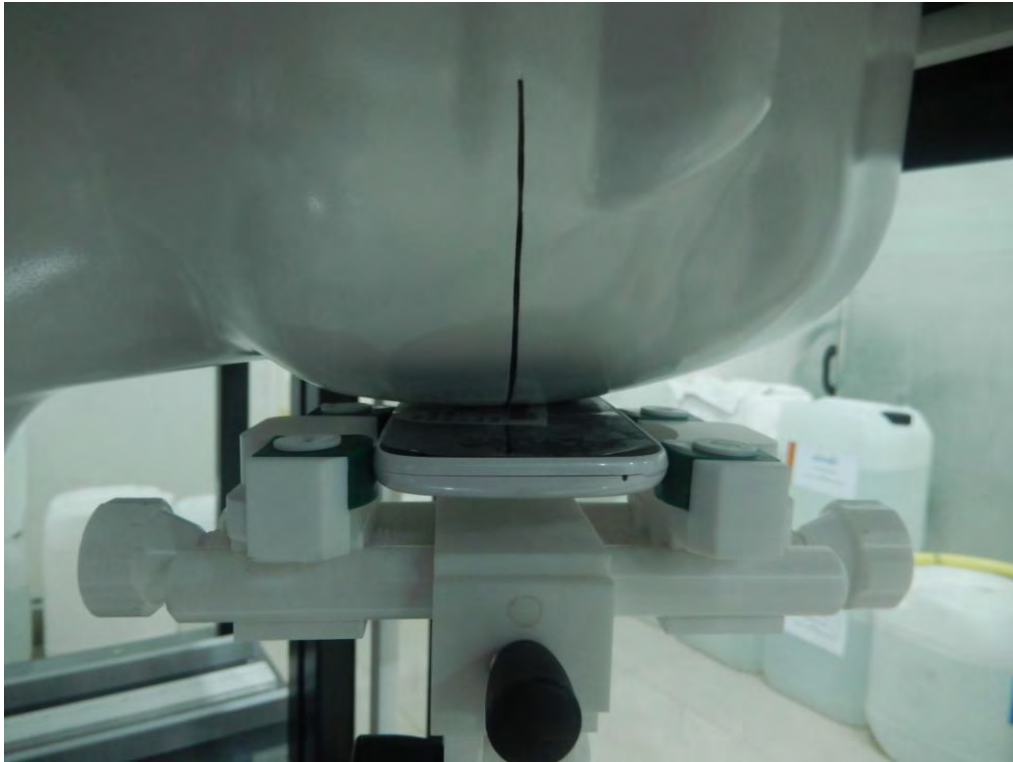


Left Tilt

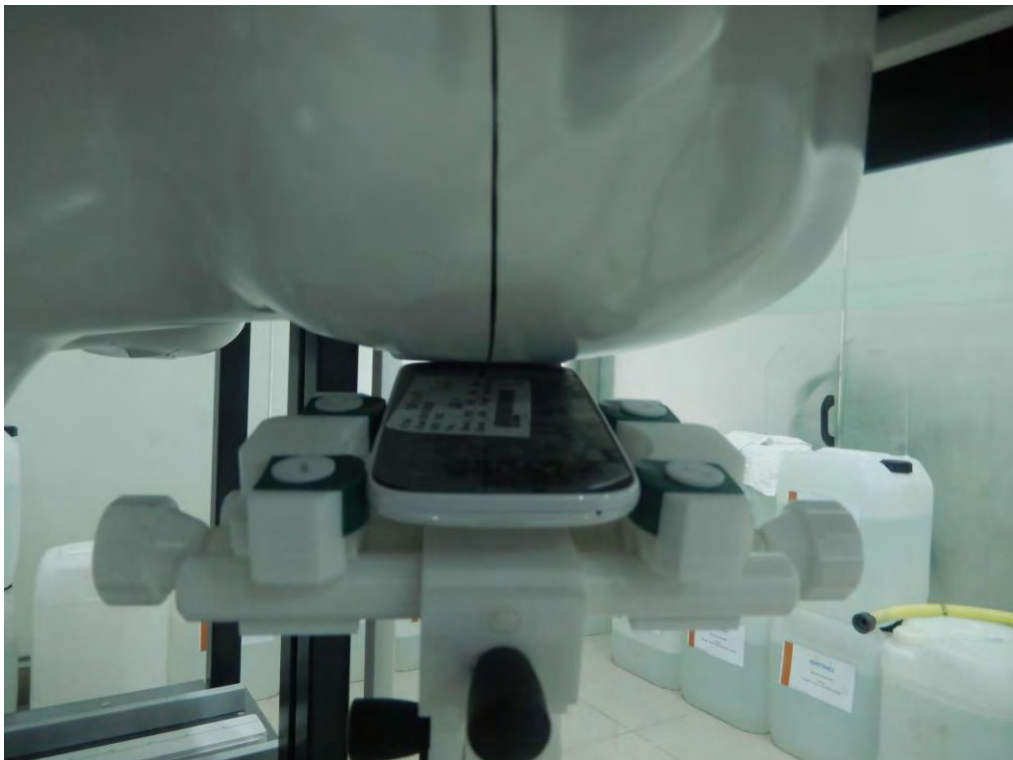


Body Front side

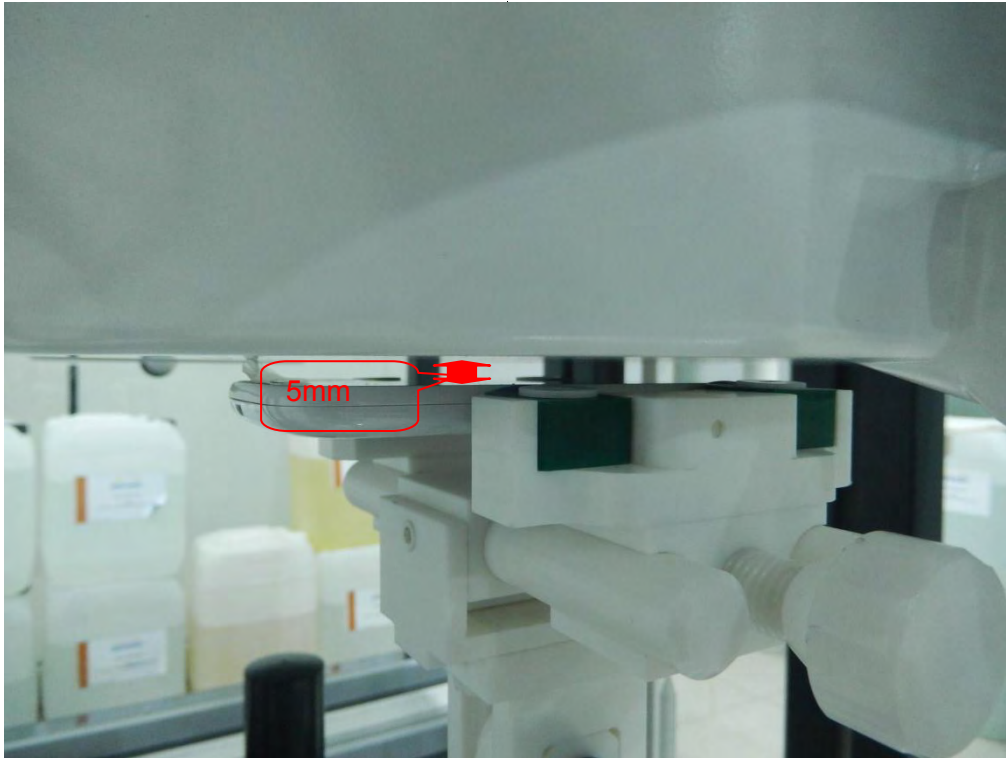

Body Back side

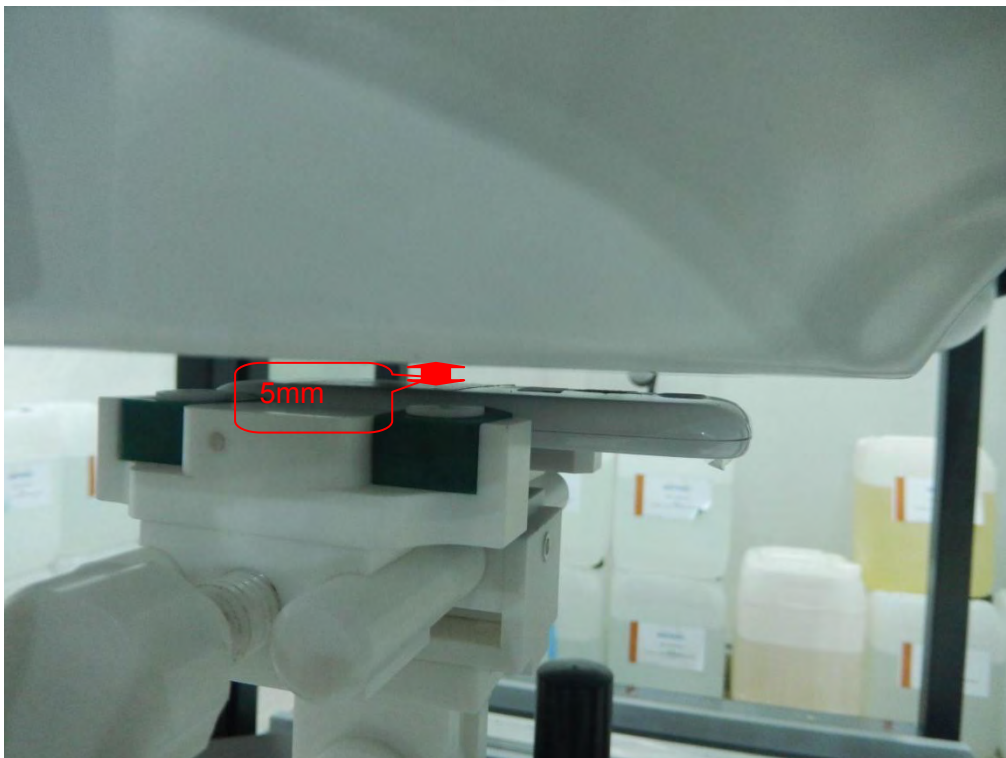


Body Left side

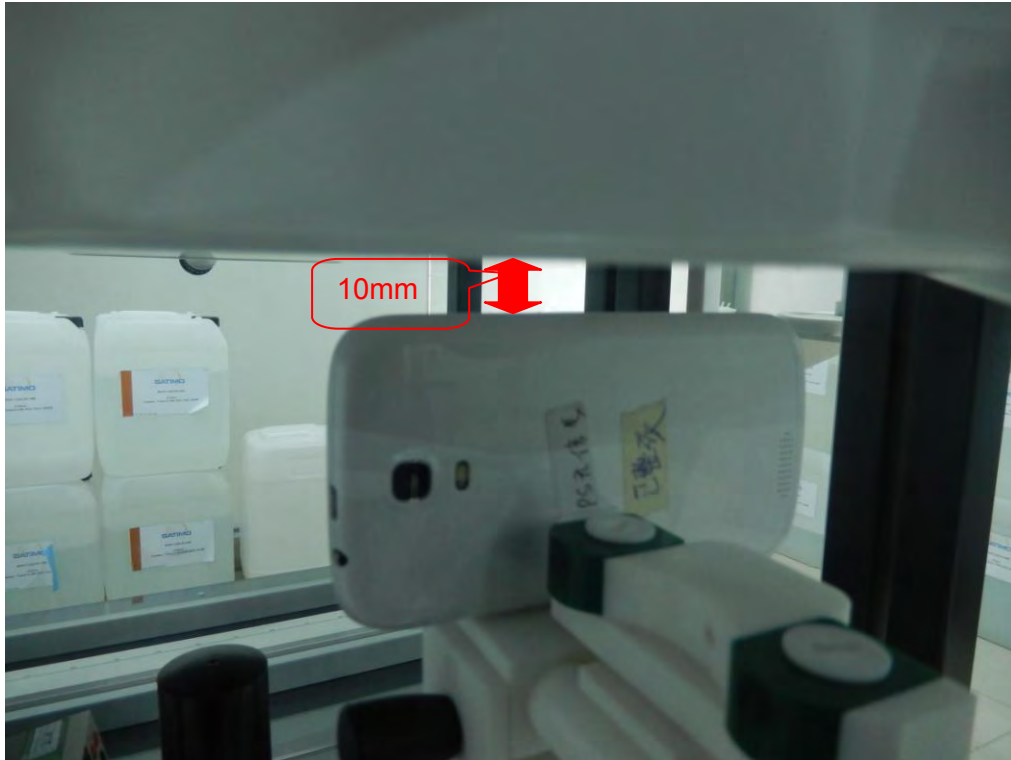


Body Top side



835 Head Liquid depth (15 cm)

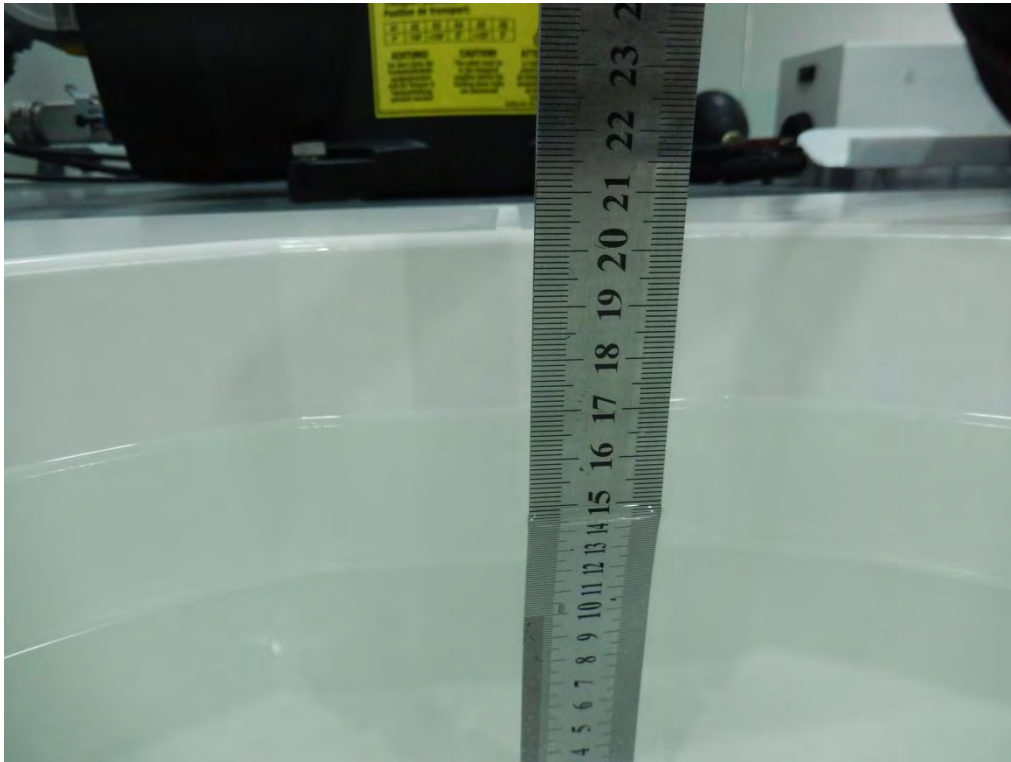


835 Body Liquid depth (15 cm)

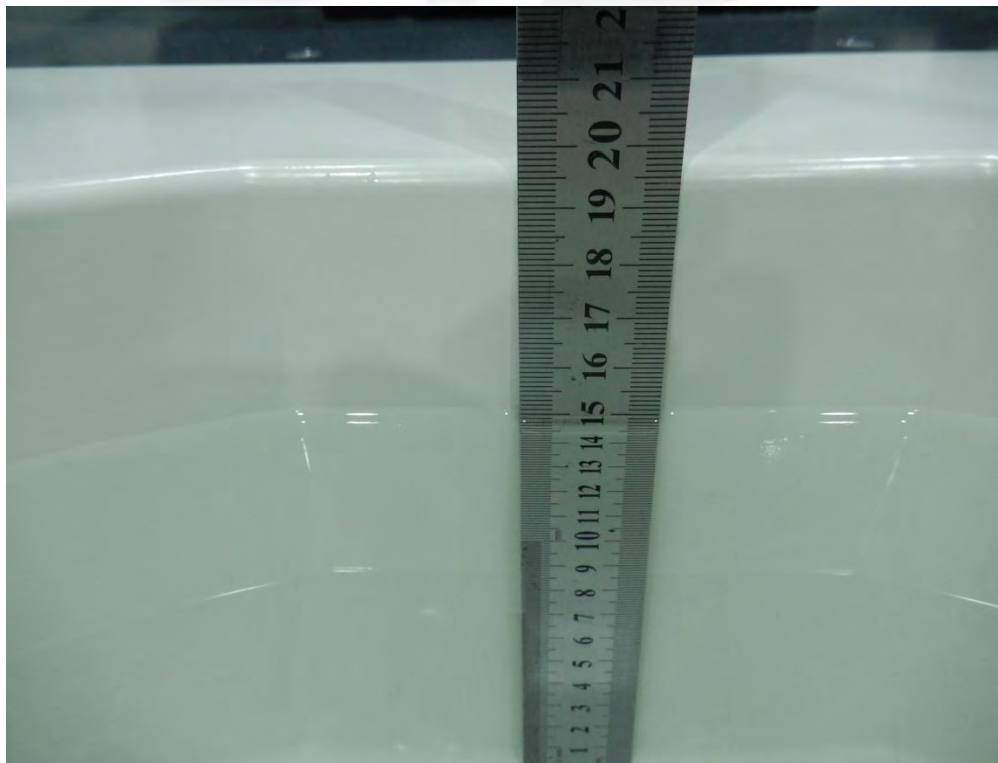

1750 Head Liquid depth (15 cm)




1750 Body depth (15 cm)

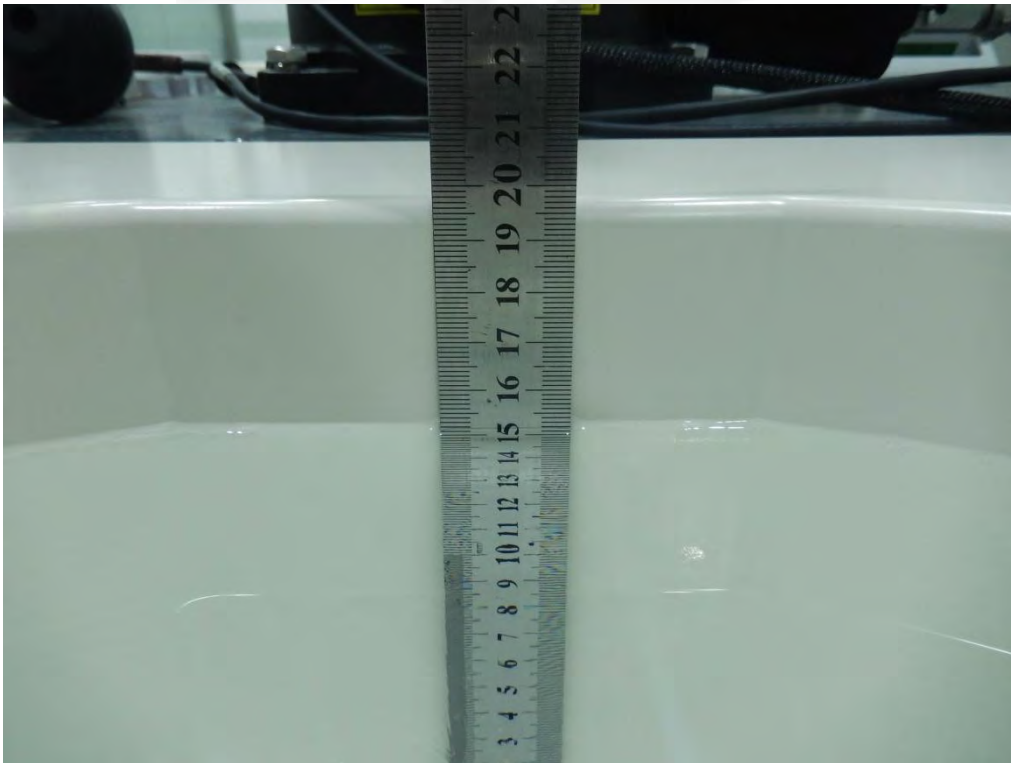


1900 Head Liquid depth (15 cm)




1900 Body depth (15 cm)

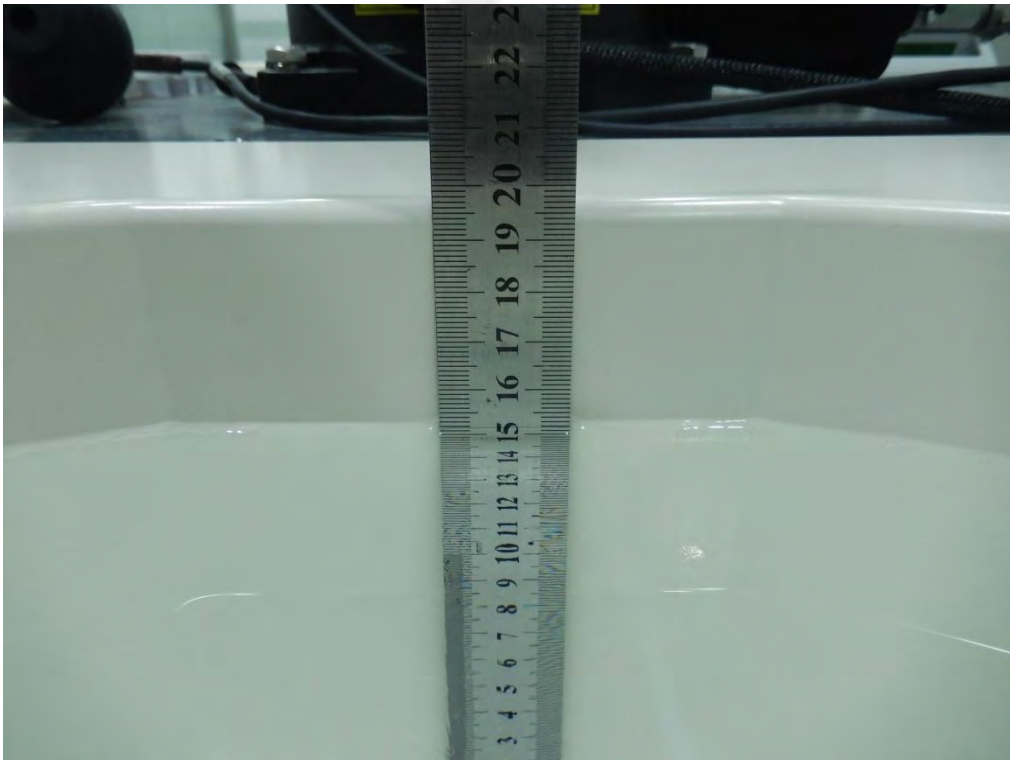

2450 Head Liquid depth (15 cm)

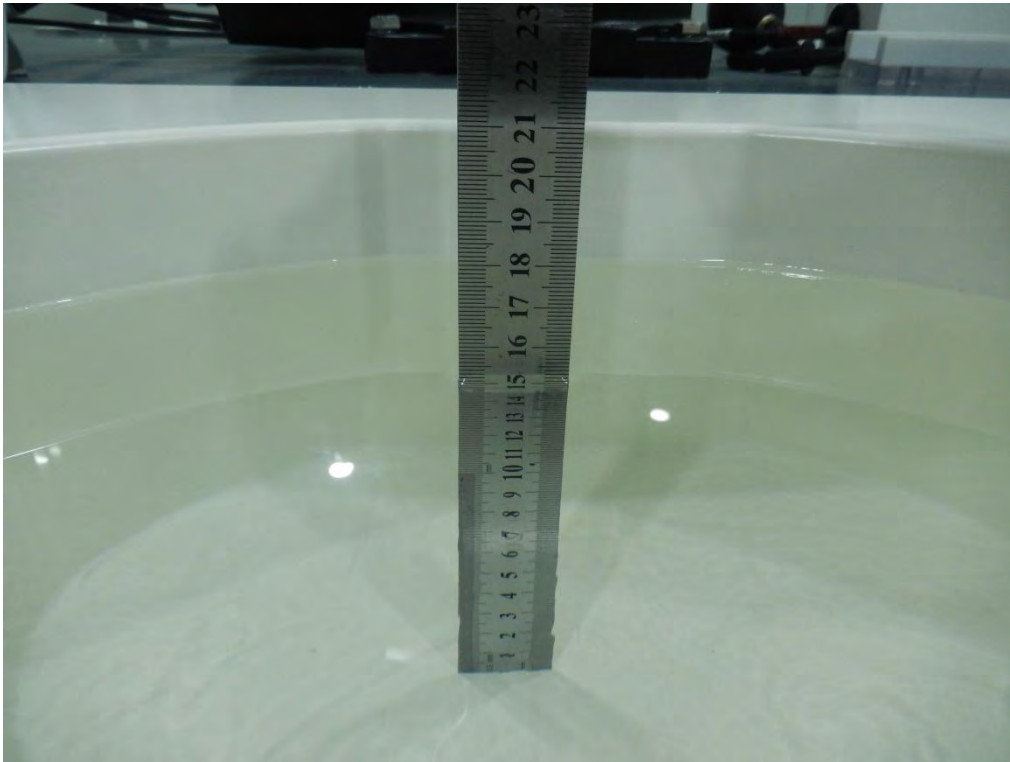

2450 Body Liquid depth (15 cm)

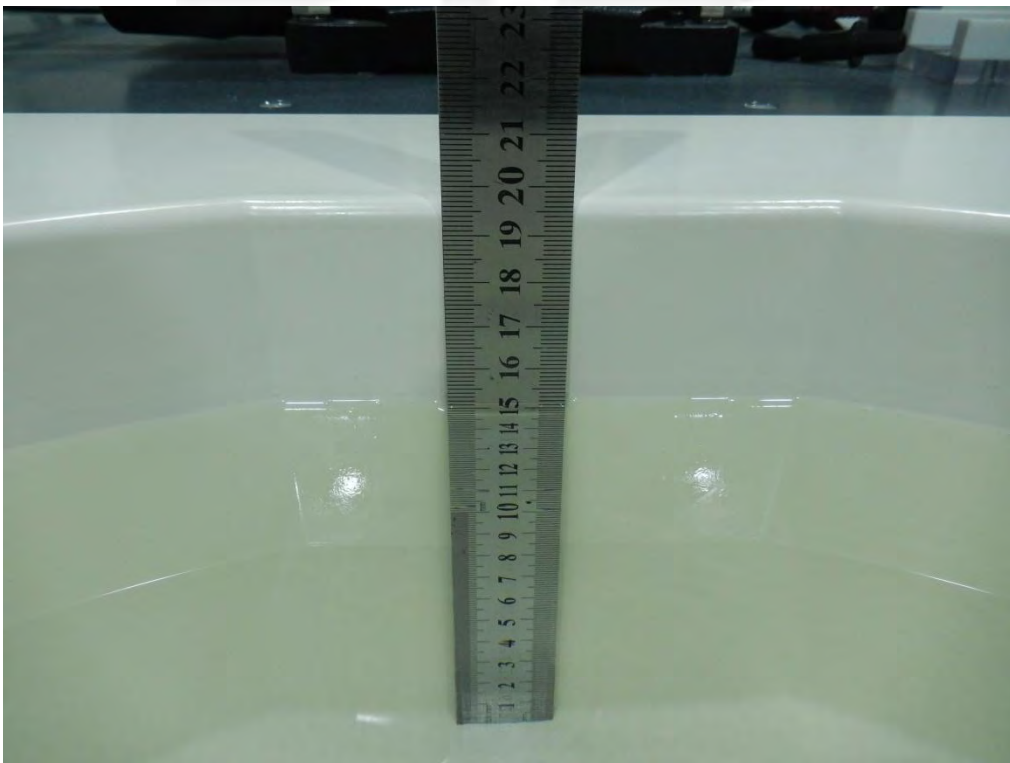



12. SAR Result Summary

12.1 Head SAR

Band	Mode	Test Position	Channel	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	Voice	Right Cheek	CH 128	0.073	-3.77	32.3	32.28	0.073	1
		Right Tilt	CH 128	0.071	-3.50	32.3	32.28	0.071	2
		Left Cheek	CH 128	0.044	-2.94	32.3	32.28	0.044	3
		Left Tilt	CH 128	0.040	1.92	32.3	32.28	0.040	4
GSM1900	Voice	Right Cheek	CH 512	0.768	-3.53	29	28.67	0.829	9
		Right Cheek	CH 661	1.015	1.86	29	28.72	1.083	10
		Right Cheek	CH 810	0.775	-0.62	29	28.63	0.844	12
		Right Tilt	CH 661	0.787	-0.10	29	28.72	0.839	13
		Left Cheek	CH 661	0.677	-0.17	29	28.72	0.722	14
		Left Tilt	CH 661	0.738	2.56	29	28.72	0.787	15
WCDMA II	RMC	Right Cheek	CH 9263	0.871	0.32	21.6	21.18	0.959	20
		Right Cheek	CH 9400	0.643	1.20	21.6	21.14	0.715	21
		Right Cheek	CH 9537	1.034	-2.50	21.6	21.58	1.039	22
		Right Tilt	CH 9537	0.728	0.07	21.6	21.58	0.731	24
		Left Cheek	CH 9537	0.616	-2.13	21.6	21.58	0.619	25
		Left Tilt	CH 9537	0.402	-1.00	21.6	21.58	0.404	26
WCDMA IV	RMC	Right Cheek	CH 1513	0.964	0.55	21.6	21.48	0.991	31
		Right Cheek	CH 1513	0.803	4.48	21.6	21.54	0.814	32
		Right Cheek	CH 1513	1.180	-3.36	21.6	21.58	1.185	33
		Right Tilt	CH 1513	0.517	0.55	21.6	21.58	0.519	35
		Left Cheek	CH 1513	0.718	2.62	21.6	21.58	0.721	36
		Left Tilt	CH 1513	0.544	-1.74	21.6	21.58	0.547	37
WCDMA V	RMC	Right Cheek	CH4132	0.111	-0.50	22	21.81	0.116	42
		Right Tilt	CH4132	0.093	-2.36	22	21.81	0.097	43
		Left Cheek	CH4132	0.076	2.12	22	21.81	0.079	44
		Left Tilt	CH4132	0.062	2.64	22	21.81	0.065	45

Band	Mode	Test Position	Channel	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WIFI	802.11b	Right Cheek	CH11	0.116	-1.53	18	17.60	100	0.127	50
		Right Tilt	CH11	0.070	1.10	18	17.60	100	0.077	51
		Left Cheek	CH11	0.044	-3.05	18	17.60	100	0.048	52
		Left Tilt	CH11	0.029	-1.17	18	17.60	100	0.032	53

12.2 Body SAR And Hotspot

Band	Mode	Test Position	Channel	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(d Bm)	Meas.Ou tput Power(d Bm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	EGPRS Data-4 Slot (hotspot)	Front side	CH 128	0.062	0.91	30	29.68	0.067	5
		Back side	CH 128	0.112	-1.39	30	29.68	0.121	6
		Left side	CH 128	0.077	1.31	30	29.68	0.083	7
		Top side	CH 128	0.014	2.53	30	29.68	0.015	8
GSM 1900	EGPRS Data-2 Slot (hotspot)	Front side	CH 661	0.133	-1.39	26	25.95	0.135	16
		Back side	CH 661	0.240	2.06	26	25.95	0.243	17
		Left side	CH 661	0.127	-4.95	26	25.95	0.128	18
		Top side	CH 661	0.600	-0.33	26	25.95	0.607	19
WCDMA II	RMC (body-worn and hotspot)	Front side	CH 9537	0.233	-1.02	21.6	21.58	0.234	27
		Back side	CH 9537	0.737	-0.13	21.6	21.58	0.740	28
		Left side	CH 9537	0.274	-0.94	21.6	21.58	0.275	29
		Top side	CH 9537	0.364	-1.85	21.6	21.58	0.366	30
WCDMA IV	RMC (body-worn and hotspot)	Front side	CH 1513	0.268	-1.69	21.6	21.58	0.269	38
		Back side	CH 1513	0.648	-2.77	21.6	21.58	0.651	39
		Left side	CH 1513	0.261	-0.69	21.6	21.58	0.262	40
		Top side	CH 1513	0.214	-0.24	21.6	21.58	0.215	41
WCDMA V	RMC (body-worn and hotspot)	Front side	CH4132	0.041	1.44	22	21.81	0.043	46
		Back side	CH4132	0.089	2.21	22	21.81	0.093	47
		Left side	CH4132	0.069	4.09	22	21.81	0.072	48
		Top side	CH4132	0.012	-2.04	22	21.81	0.013	49

Band	Mode	Test Position	Channel	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(d Bm)	Meas.Ou tput Power(d Bm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WIFI	802.11b	Front side	CH11	0.015	-0.50	18	17.60	100	0.016	54
		Back side	CH11	0.077	2.09	18	17.60	100	0.084	55
		Left side	CH11	0.018	-1.96	18	17.60	100	0.020	56

Note:

1. The test separation of all above table is 10mm, Only Front side and Back side is 5mm.
2. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.070** W/Kg for Head and **0.046** W/Kg for Body/Hotspot)
3. When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

Repeated SAR

Band	Mode	Test Position	Channel	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM1900	Voice	Right Cheek	CH 661	0.927	-0.62	29	28.72	0.989	11
WCDMA II	RMC	Right Cheek	CH 9537	0.966	-0.22	21.6	21.58	0.970	23
WCDMA IV	RMC	Right Cheek	CH 1513	1.062	0.30	21.6	21.58	1.067	34

12.3 repeated SAR measurement

Band	Mode	Test Position	Channel	Original Measured SAR 1g(mW/g)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(mW/g)	2nd Repeated SAR 1g	Ratio
GSM1900	Voice	Right Cheek	CH 661	1.015	0.927	1.09	-	-	-
WCDMA II	RMC	Right Cheek	CH 9537	1.034	0.966	1.07	-	-	-
WCDMA IV	RMC	Right Cheek	CH 1513	1.180	1.062	1.11	-	-	-

Note:

1. Per KDB 865664 D01V01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$.
2. Per KDB 865664 D01V01,if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45\text{W/Kg}$
4. The ratio is the difference in percentage between original and repeated measured SAR.

**Simultaneous Multi-band Transmission Evaluation:**

Application Simultaneous Transmission information:

Position	Simultaneous state
Head	1. GSM + WIFI
	2. GSM + Bluetooth
	3. WCDMA + WIFI
	4. WCDMA + Bluetooth
Body	1. GSM + WIFI
	2. GSM + Bluetooth
	3. WCDMA + WIFI
	4. WCDMA + Bluetooth

NOTE:

- Bluetooth and WIFI can't simultaneous transmission at the same time.
- For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
- Based upon KDB 447498 D01 v05, BT SAR is excluded as below table.
- If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
- For minimum test separation distance $\leq 50\text{mm}$, Bluetooth standalone SAR is excluded according to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} (\text{GHz}) / x] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
- The reported SAR summation is calculated based on the same configuration and test position.
- KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} (\text{GHz}) / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$;
Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is $>50\text{mm}$.

Estimated SAR		Maximum Average Power		Antenna to user(mm)	Frequency(GHz)	Stand alone SAR(1g) [W/kg]
		dBm	mW			
BT	Head	6	3.98	5	2.480	0.167
	Body			10	2.480	0.084



Simultaneous Mode	Position	Mode	Max. 1-g SAR (W/kg)	1-g Sum SAR (W/kg)
GSM + WIFI	Head	GSM Voice	1.083	1.210
		WIFI	0.127	
	Body-worn	GSM DATA	0.607	0.691
		WIFI	0.084	
GSM + Bluetooth	Head	GSM Voice	1.083	1.250
		Bluetooth	0.167	
	Body-worn	GSM Voice	0.607	0.691
		Bluetooth	0.084	
WCDMA RMC+ WIFI	Head	WCDMA RMC	1.185	1.312
		WIFI	0.127	
	Body-worn Hotspot	WCDMA RMC	0.740	0.824
		WIFI	0.084	
WCDMA RMC+ Bluetooth	Head	WCDMA RMC	1.185	1.352
		Bluetooth	0.167	
	Body-worn Hotspot	WCDMA RMC	0.740	0.824
		Bluetooth	0.084	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
835MHz Dipole	SATIMO	SID835	SN 30/14 DIP0G835-332	2014.09.01	2017.08.31
1800MHz Dipole	SATIMO	SID1800	SN 30/14 DIP1G800-329	2014.09.01	2017.08.31
1900MHz Dipole	SATIMO	SID1900	SN 30/14 DIP1G900-333	2014.09.01	2017.08.31
2450MHzDipole	SATIMO	SID2450	SN 30/14 DIP2G450-335	2014.09.01	2017.08.31
E-Field Probe	SATIMO	SSE5	SN 17/14 EP221	2014.09.01	2015.08.31
Antenna	SATIMO	ANTA3	SN 07/13 ZNTA52	2014.09.01	2017.08.31
Waveguide	SATIMO	SWG5500	SN 13/14 WGA32	2014.09.01	2017.08.31
Phantom1	SATIMO	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	SATIMO	SAM	SN 32/14 SAM116	N/A	N/A
SAR TEST BENCH	SATIMO	GSM and WCDMA mobile phone POSITIONNIN G SYSTEM	SN 32/14 MSH97	N/A	N/A
SAR TEST BENCH	SATIMO	LAPTOP POSITIONNIN G SYSTEM	SN 32/14 LSH29	N/A	N/A
Dielectric Probe Kit	SATIMO	SCLMP	SN 32/14 OCPG52	2015.09.01	2016.08.31
Multi Meter	Keithley	Multi Meter 2000	4050073	2015.11.20	2016.11.19
Signal Generator	Agilent	N5182A	MY50140530	2015.11.18	2016.11.17
Power Meter	R&S	NRP	100510	2015.10.25	2016.10.24
Power Sensor	R&S	NRP-Z11	101919	2015.10.24	2016.10.23
Power Sensor	R&S	NRP-Z21	103971	2015.12.12	2016.12.11
Network Analyzer	Agilent	5071C	EMY46103472	2015.12.12	2016.12.11
Attenuator 1	PE	PE7005-10	N/A	2015.10.25	2016.10.24
Attenuator 2	PE	PE7005-3	N/A	2015.10.24	2016.10.23
Attenuator 3	Woken	WK0602-XX	N/A	2015.12.12	2016.12.11
Dual Directional Coupler	Agilent	778D	50422	2015.11.18	2016.11.17
Dual Directional Coupler	Pasternack	PE2209-10	N/A	2015.10.24	2016.10.23

Appendix A. System Validation Plots

System Performance Check Data (835MHz Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-01-16

Measurement duration: 13 minutes 27 seconds

Experimental conditions

Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity (real part)	41.19
Relative permittivity	18.72
Conductivity (S/m)	0.89
Power drift (%)	0.45
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	4.83
Crest factor:	1:1

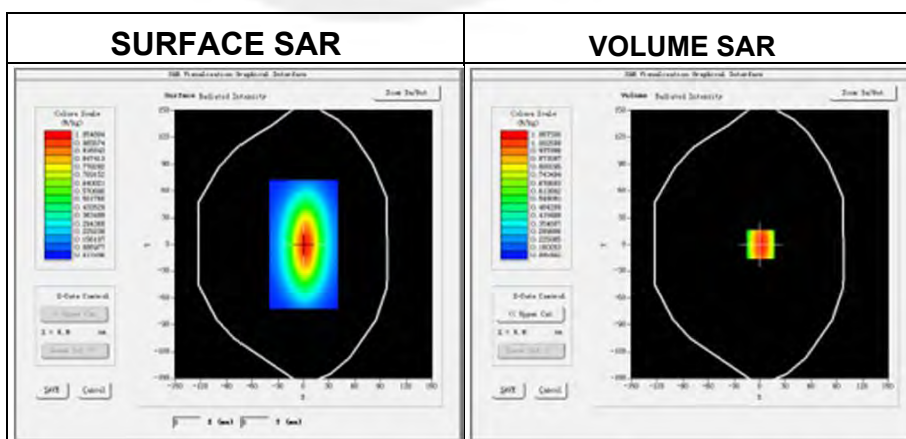






Maximum location: X=1.00, Y=0.00

SAR Peak: 1.46 W/kg

SAR 10g (W/Kg)	0.612584
SAR 1g (W/Kg)	0.928356

Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	1.3472	0.97891	0.66265	0.5042	0.3512	0.2505	0.11794

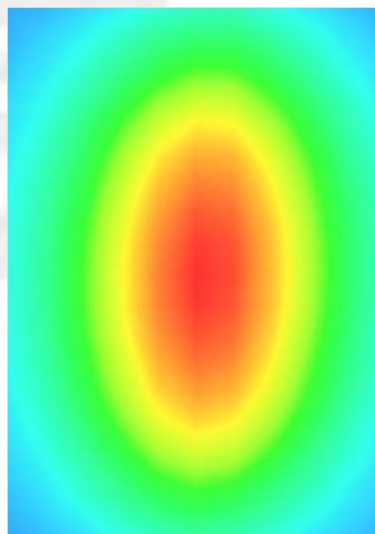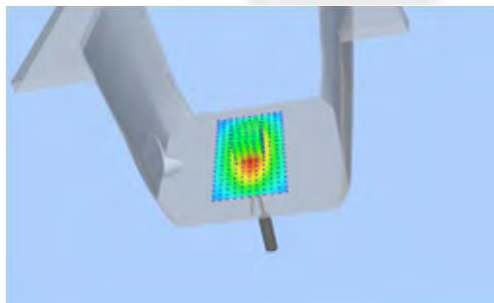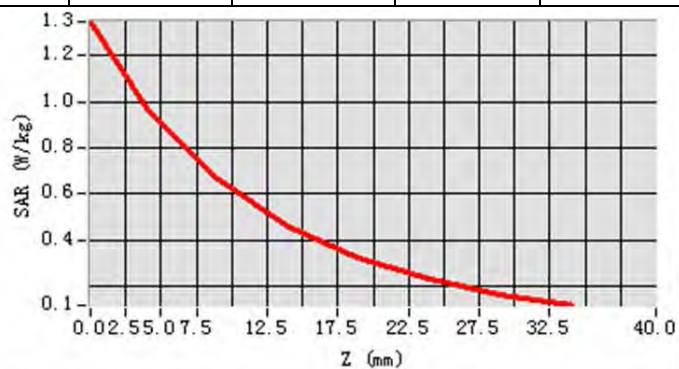

System Performance Check Data (835MHz Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-01-16

Measurement duration: 14 minutes 13 seconds

Experimental conditions.

Probe	
Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity (real part)	54.26
Relative permittivity	21.408187
Conductivity (S/m)	0.99
Power drift (%)	0.090000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	5.02
Crest factor:	1:1

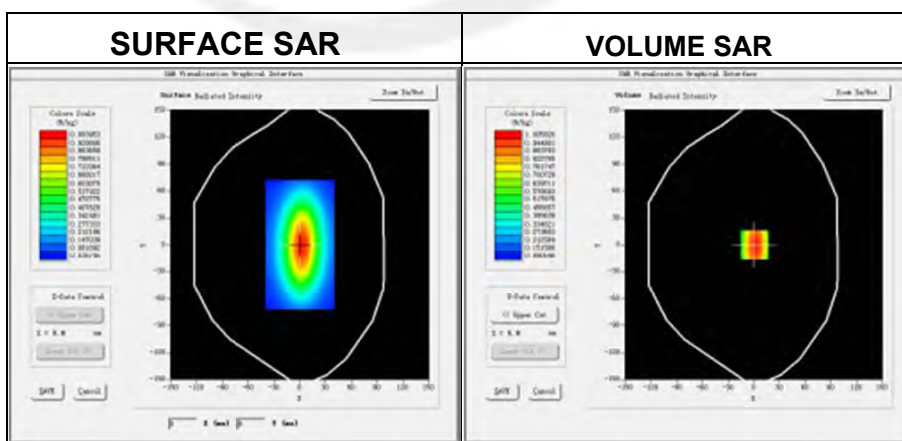




Maximum location: X=1.00, Y=0.00

SAR Peak: 1.48 W/kg

SAR 10g (W/Kg)	0.695261
SAR 1g (W/Kg)	0.987695

Z Axis Scan

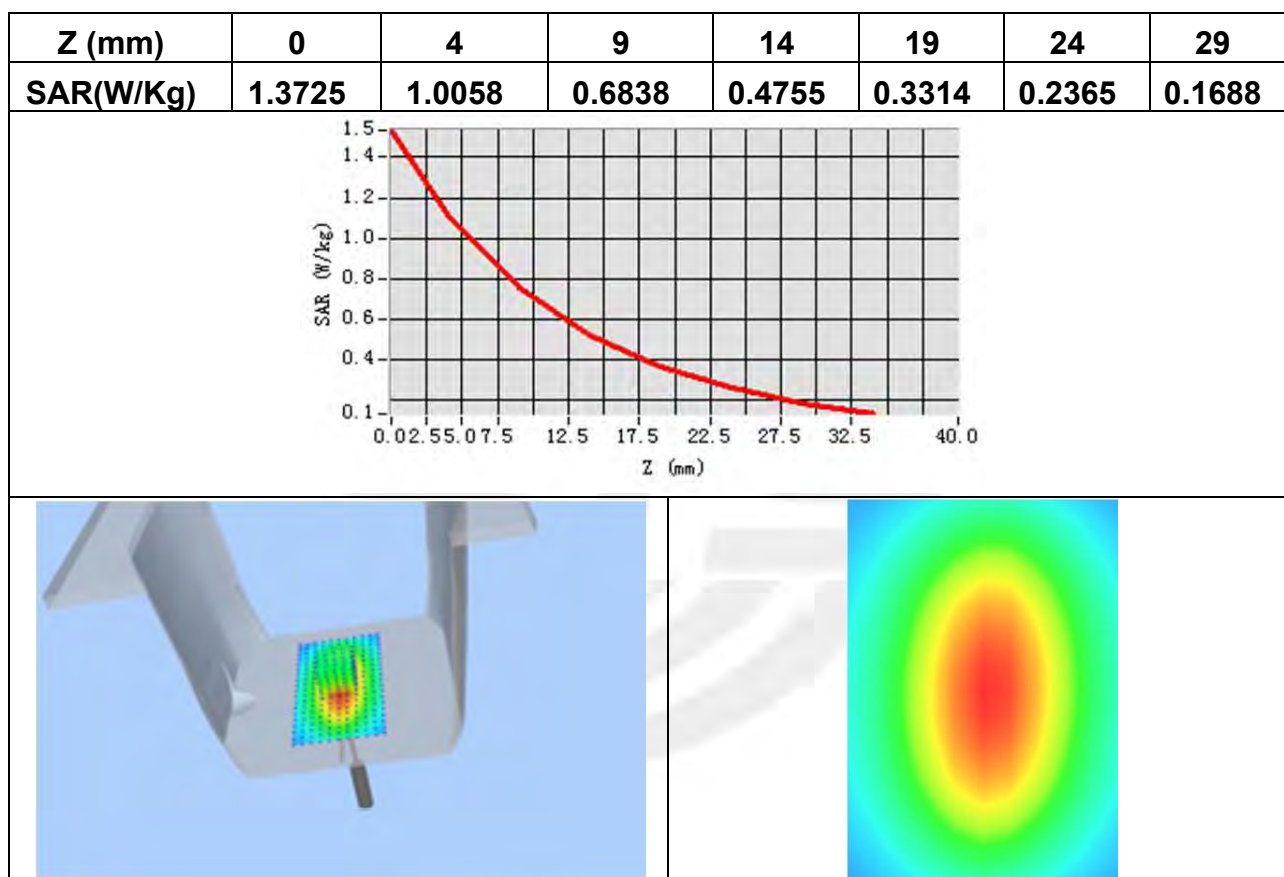



System Performance Check Data(1750MHz Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-01-16

Measurement duration: 14 minutes 10 seconds

Experimental conditions.


Phantom	Validation plane
Device Position	-
Band	1750MHz
Channels	-
Signal	CW
Frequency (MHz)	1750MHz
Relative permittivity (real part)	40.102364
Relative permittivity	14.096855
Conductivity (S/m)	1.368491
Power drift (%)	-1.390000
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 17/14 EP221
ConvF	4.25
Crest factor:	1:1

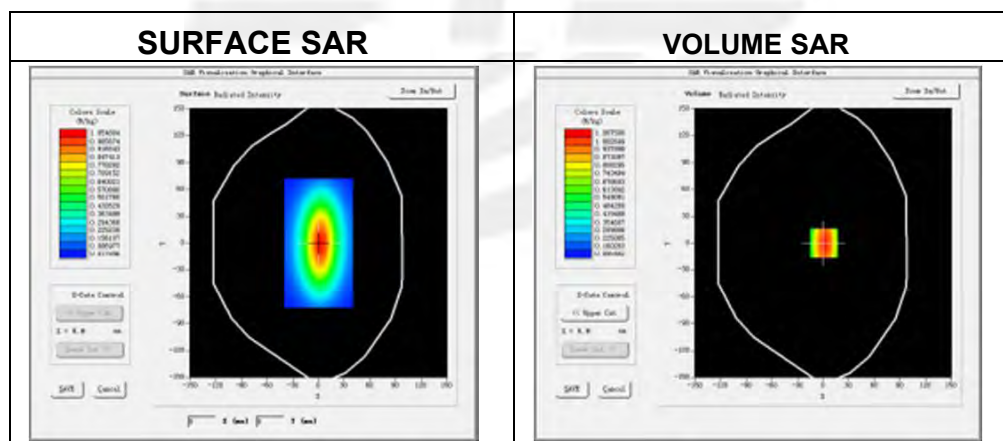

Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.613545
SAR 1g (W/Kg)	3.831264

Z Axis Scan

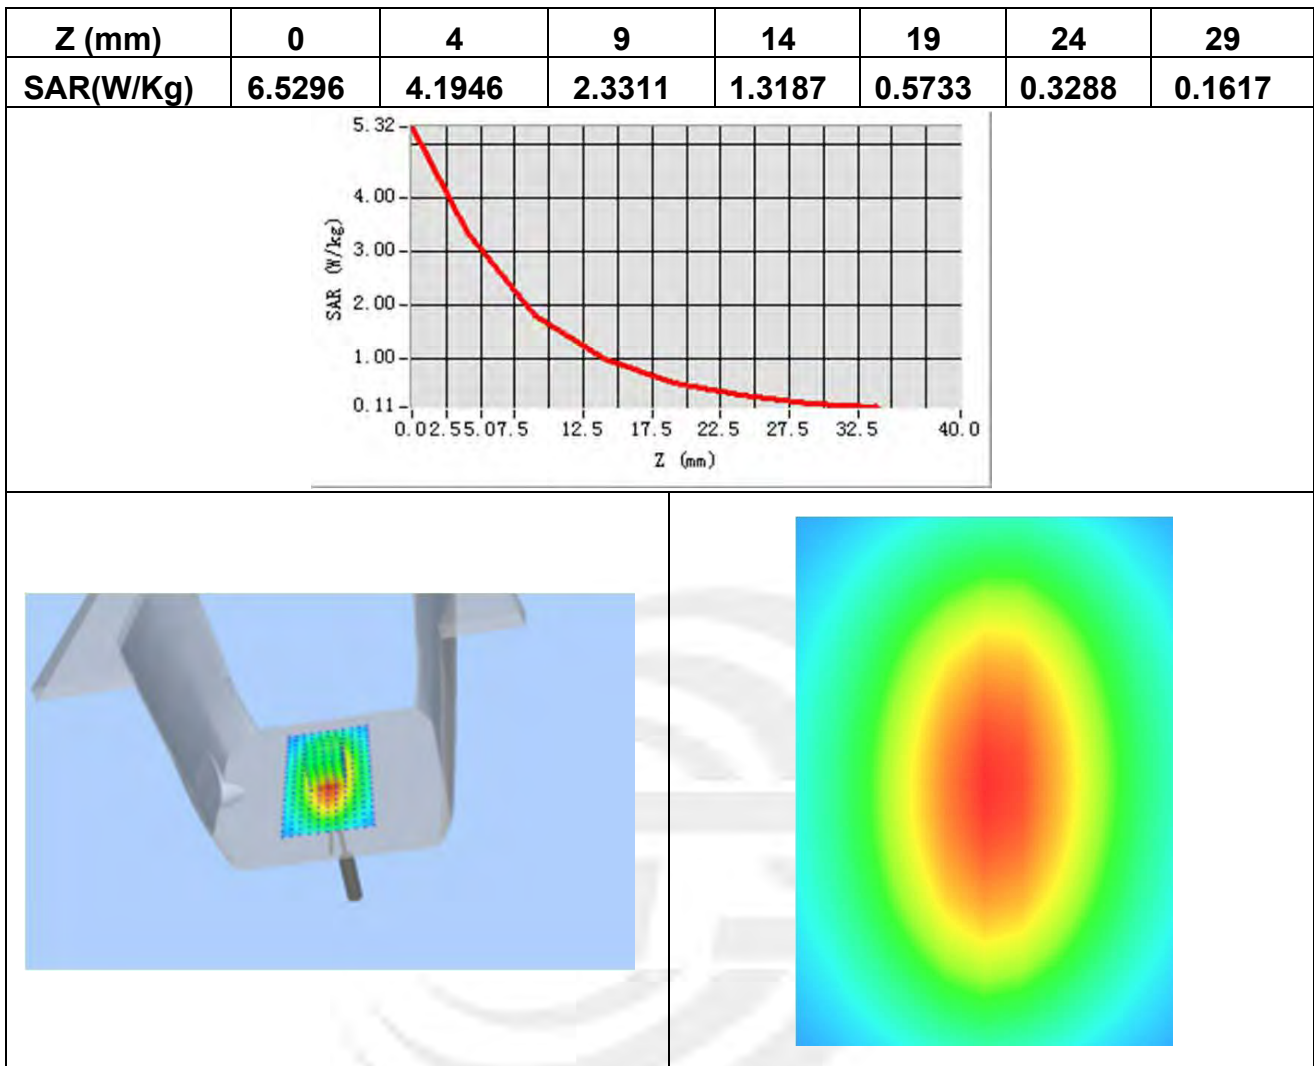

System Performance Check Data(1750MHz Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-01-16

Measurement duration: 14 minutes 11 seconds

Experimental conditions.


Phantom	Validation plane
Device Position	-
Band	1750MHz
Channels	-
Signal	CW
Frequency (MHz)	1750MHz
Relative permittivity (real part)	50.102364
Relative permittivity	14.096855
Conductivity (S/m)	1.438491
Power drift (%)	-1.390000
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 17/14 EP221
ConvF	4.34
Crest factor:	1:1

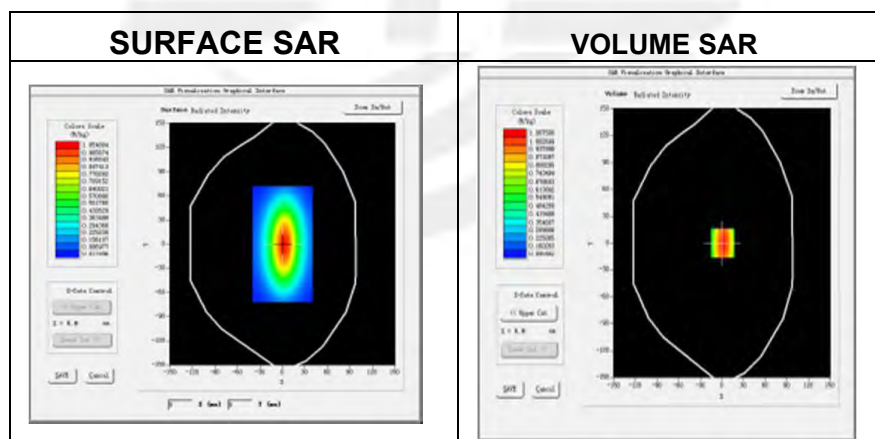

Maximum location: X=3.00, Y=0.00

SAR 10g (W/Kg)	1.956348
SAR 1g (W/Kg)	3.861233

Z Axis Scan

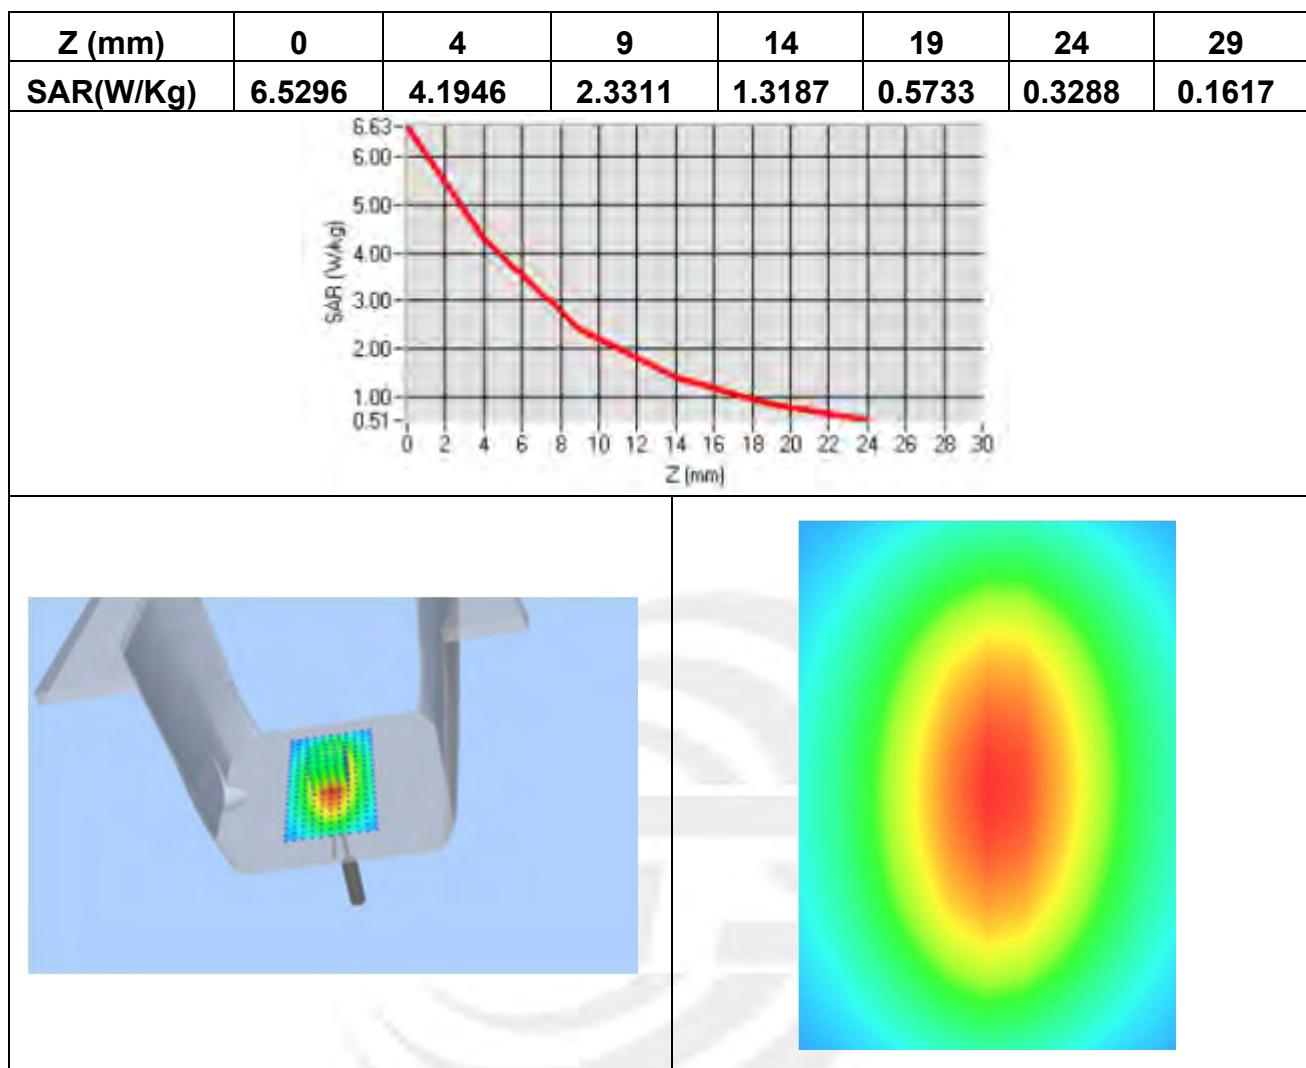

System Performance Check Data (1900MHz Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-01-16

Measurement duration: 14 minutes 12 seconds

Experimental conditions.

Phantom	Validation plane
Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity (real part)	39.44
Relative permittivity	13.26
Conductivity (S/m)	1.42
Power drift (%)	0.47
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
Probe	SN 17/14 EP221
ConvF:	4.71
Crest factor:	1:1

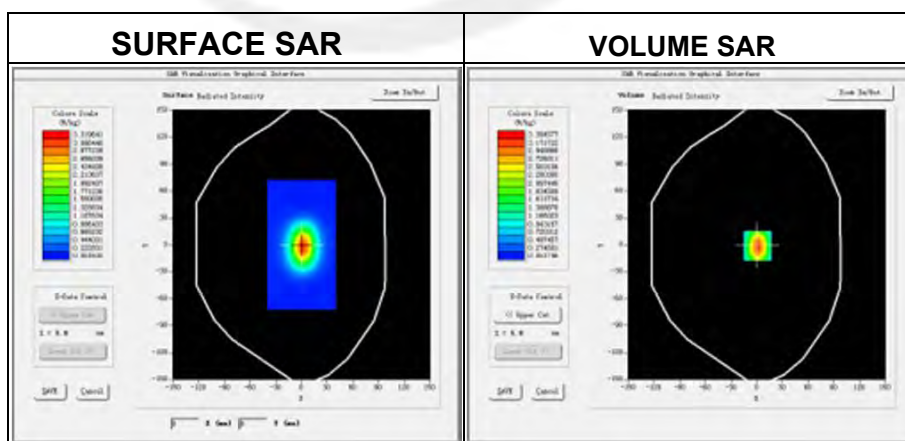




Maximum location: X=1.00, Y=0.00

SAR Peak: 5.39 W/kg

SAR 10g (W/Kg)	1.975658
SAR 1g (W/Kg)	3.892354

Z Axis Scan

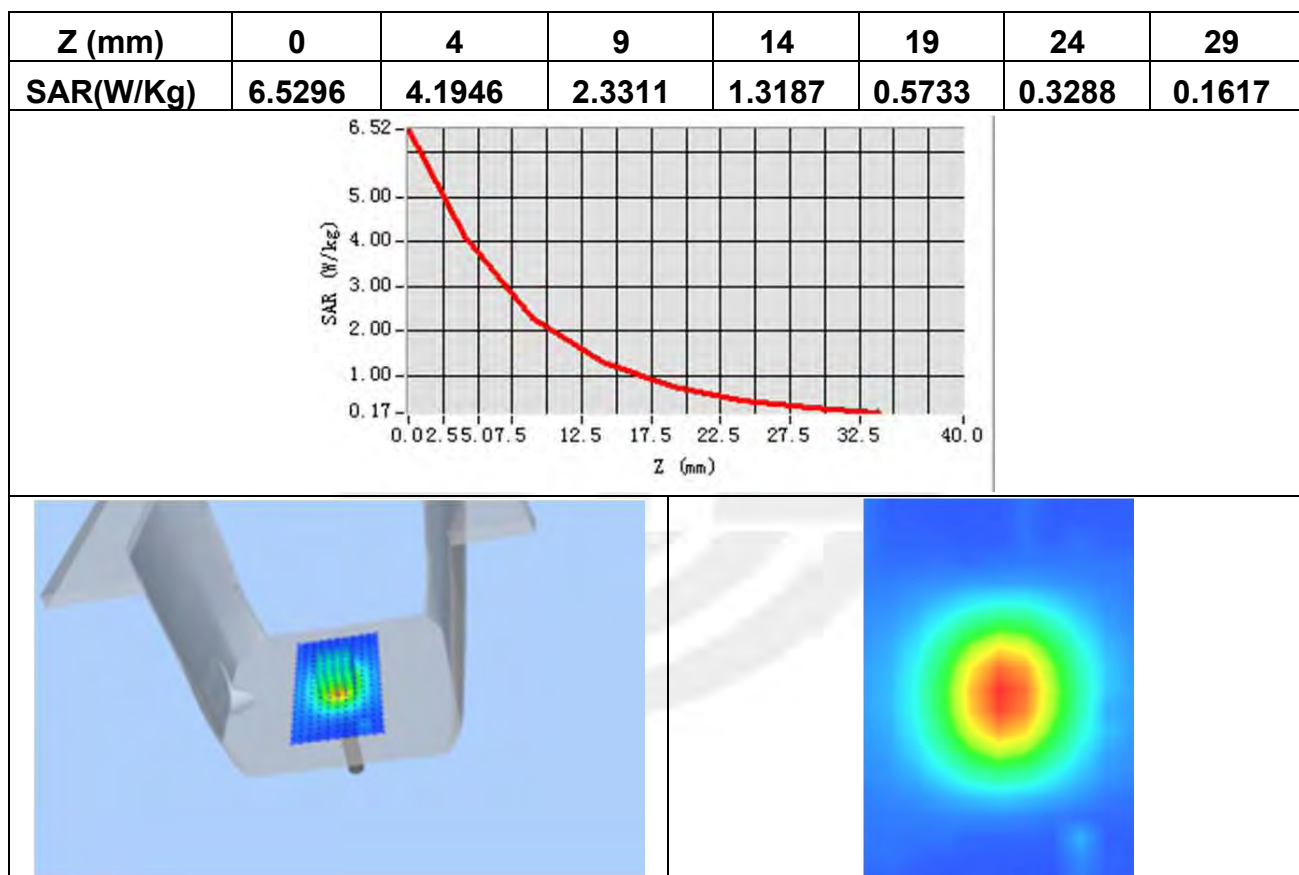

**System Performance Check Data (1900MHz Body)**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-01-16

Measurement duration: 14 minutes 46 seconds

Experimental conditions.

Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900
Relative permittivity (real part)	52.78
Relative permittivity	12.87531
Conductivity (S/m)	1.55
Power drift (%)	0.37
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
Probe	SN 17/14 EP221
ConvF:	4.85
Crest factor:	1:1

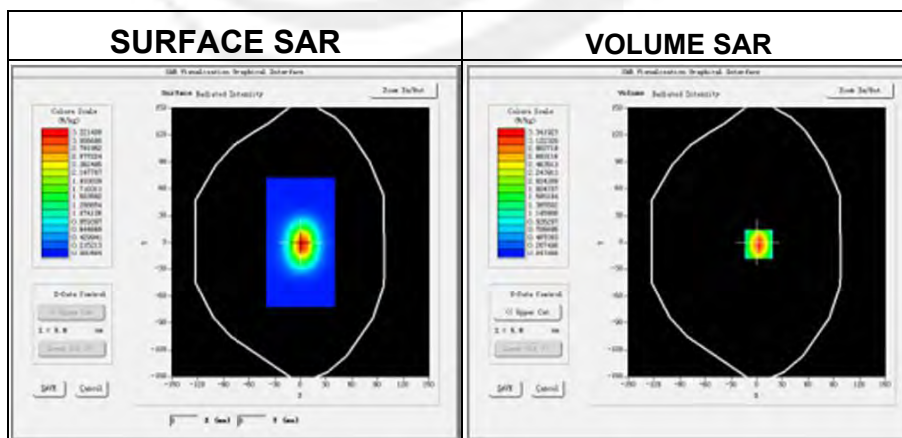




Maximum location: X=2.00, Y=2.00

SAR Peak: 5.27 W/kg

SAR 10g (W/Kg)	2.135625
SAR 1g (W/Kg)	4.123621

Z Axis Scan

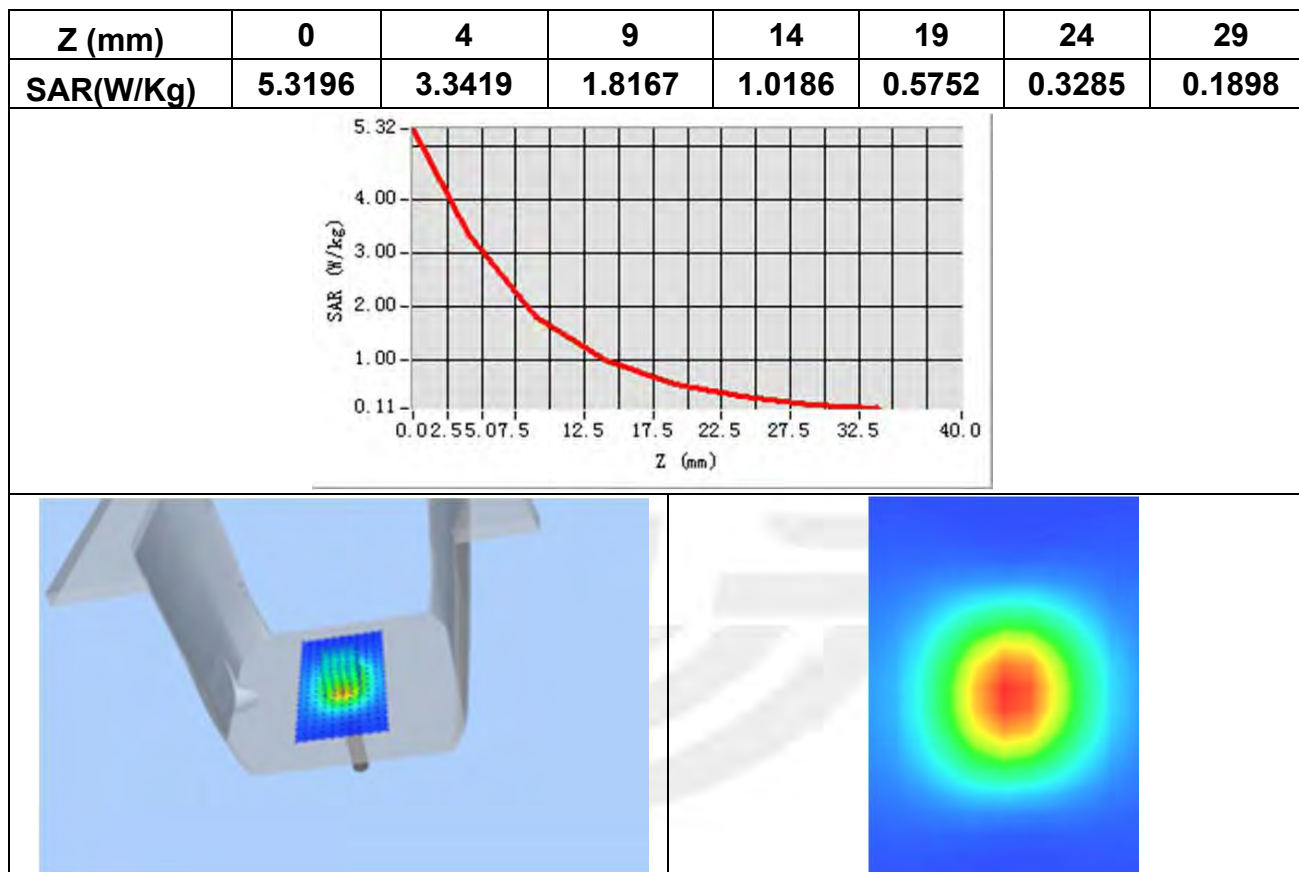

System Performance Check Data (2450MHz Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-01-16

Measurement duration: 13 minutes 51seconds

Experimental conditions.


Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity (real part)	39.38
Relative permittivity	12.930000
Conductivity (S/m)	1.77
Power drift (%)	-1.200000
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 17/14 EP221
ConvF	4.11
Crest factor:	1:1

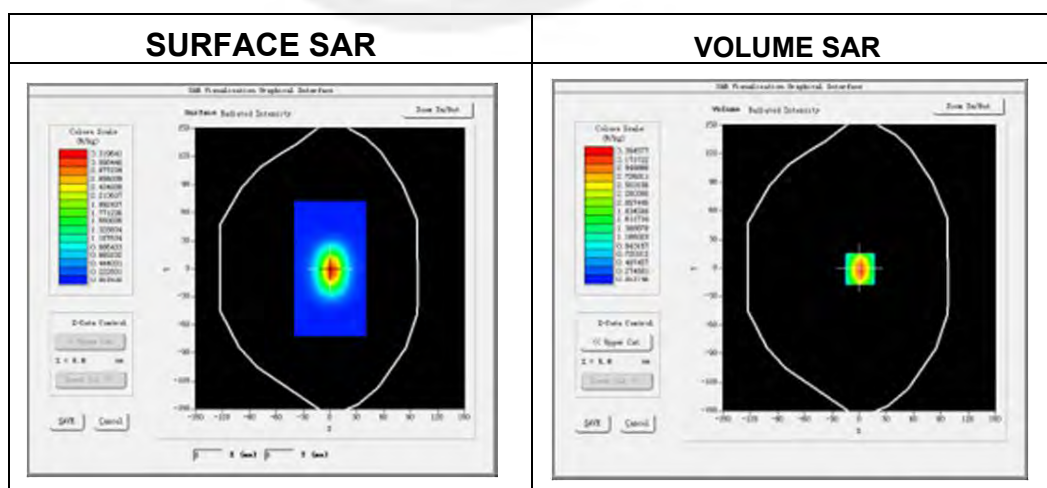

Maximum location: X=7.00, Y=6.00

SAR 10g (W/Kg)	2.635821
SAR 1g (W/Kg)	5.156285

Z Axis Scan

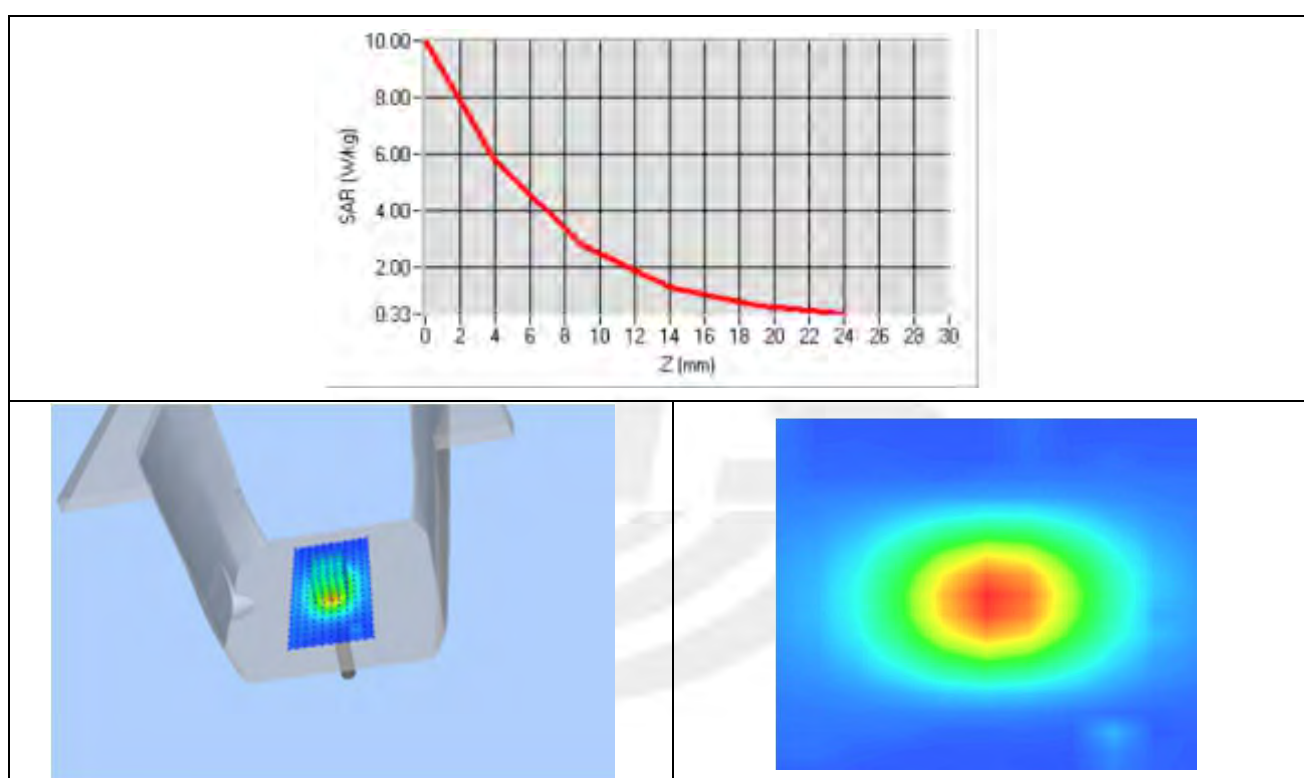

System Performance Check Data (2450MHz Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-01-16

Measurement duration: 14 minutes 23 seconds

Experimental conditions.


Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity (real part)	52.41
Relative permittivity	12.930000
Conductivity (S/m)	1.93
Power drift (%)	-1.200000
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 17/14 EP221
ConvF	4.25
Crest factor:	1:1

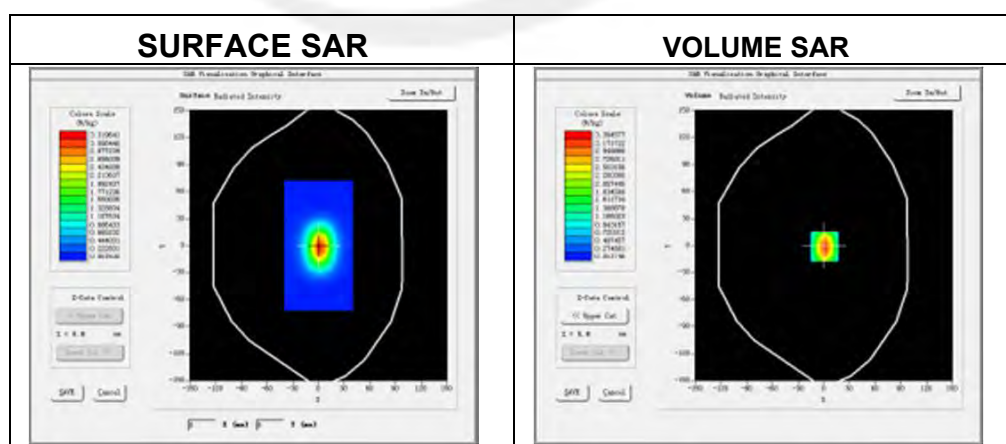

Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	2.536281
SAR 1g (W/Kg)	5.108165

Z Axis Scan

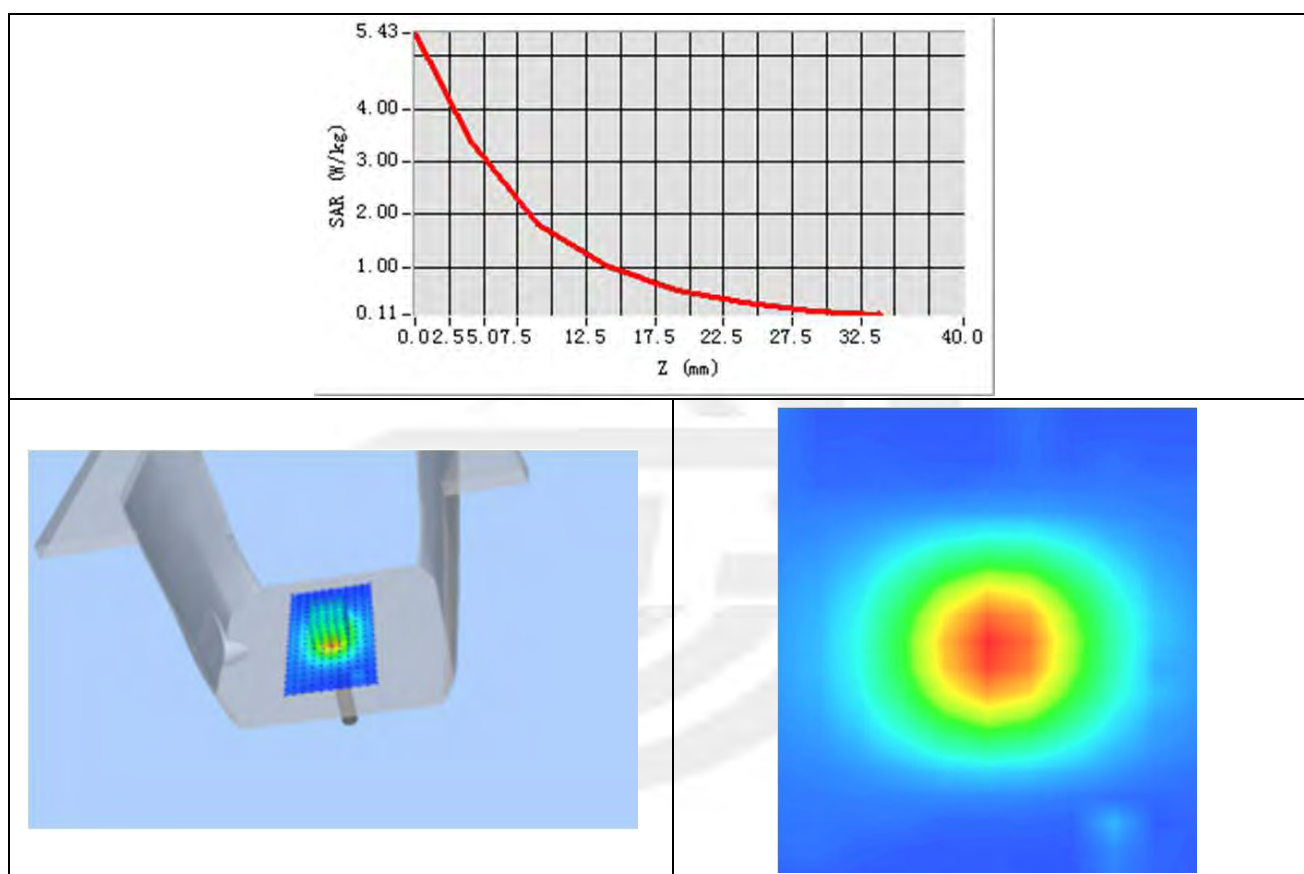

Appendix B. SAR Test Plots


Plot 1: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	824.2
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.91
Variation (%)	-3.77

Maximum location: X=-25.00, Y=8.00

SAR Peak: 0.13 W/kg

SAR 10g (W/Kg)	0.041505
SAR 1g (W/Kg)	0.072542

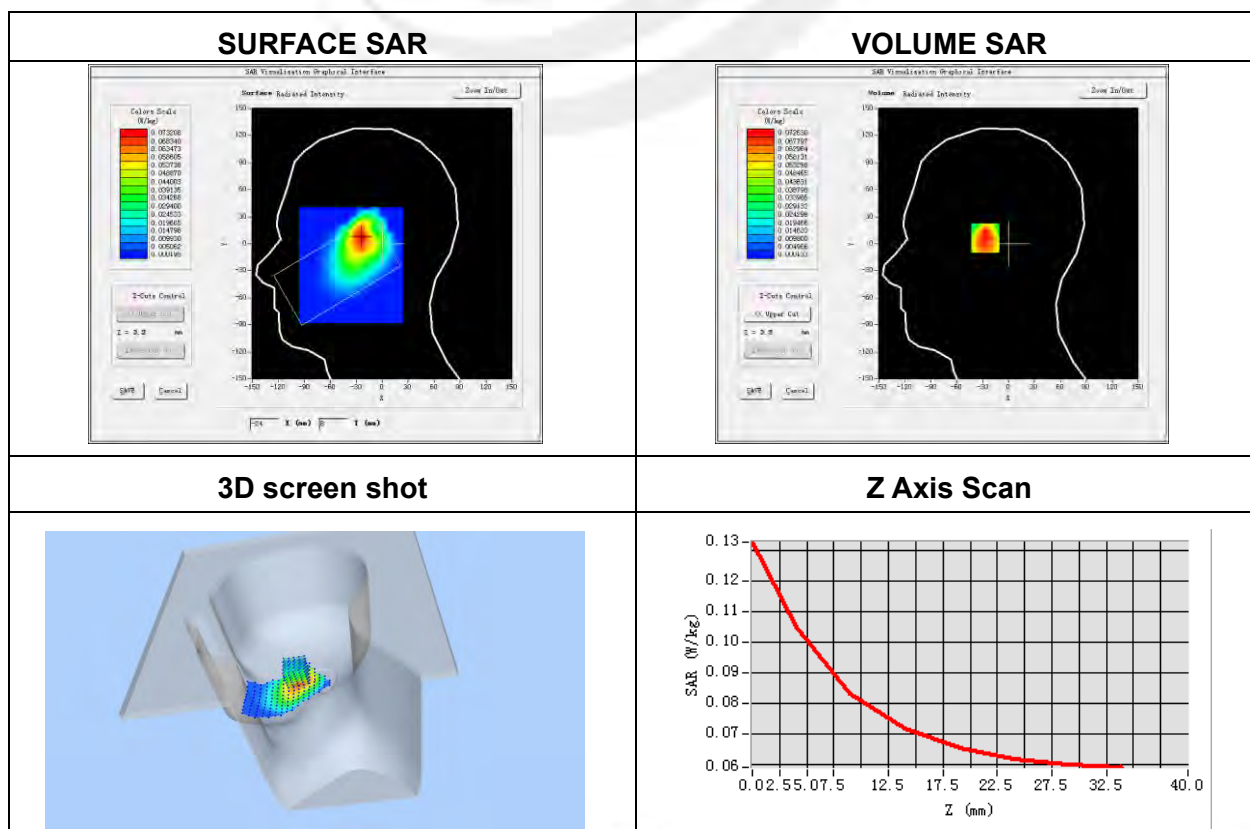


Plot 2: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mmdy=8mmdz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	824.2
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.91
Variation (%)	-3.50

Maximum location: X=-25.00, Y=3.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.040286
SAR 1g (W/Kg)	0.070985

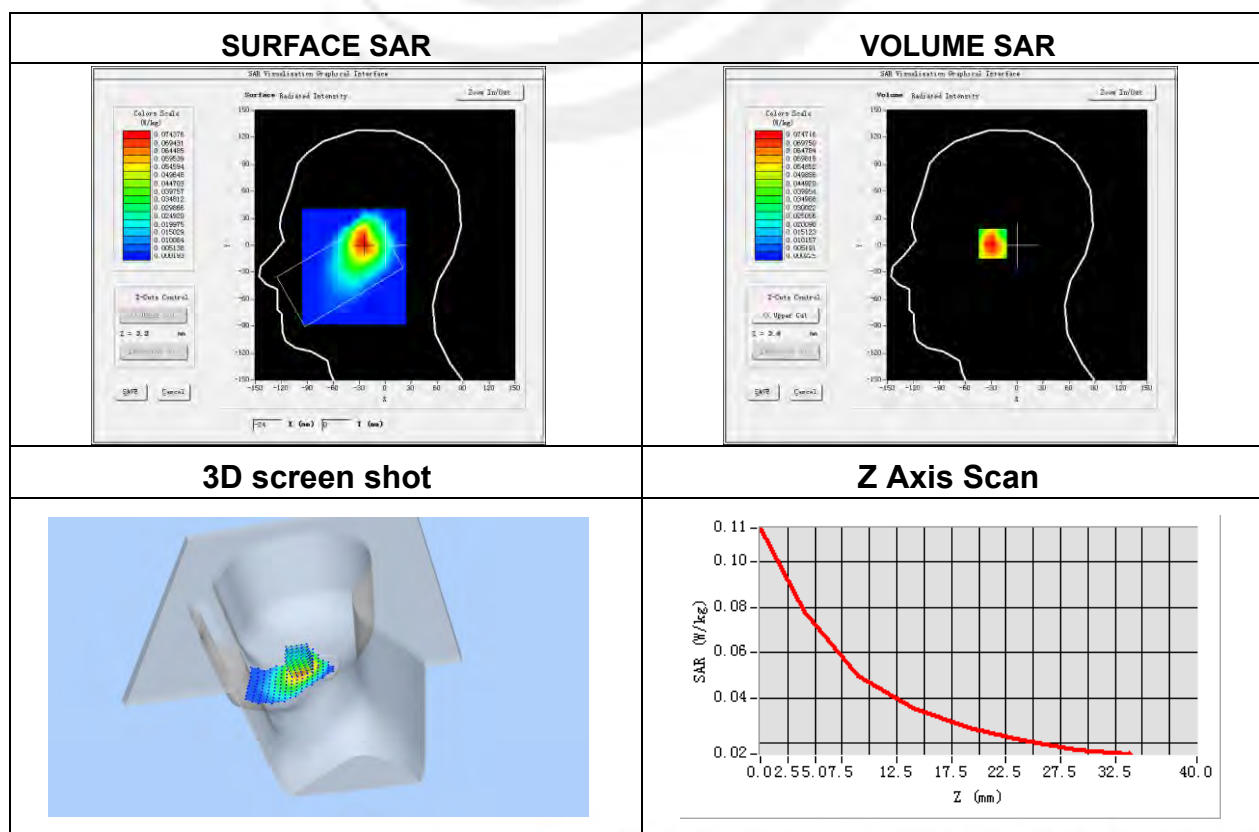


Plot 3: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	824.2
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.91
Variation (%)	-2.94

Maximum location: X=-13.00, Y=-16.00

SAR Peak: 0.07 W/kg

SAR 10g (W/Kg)	0.026016
SAR 1g (W/Kg)	0.044331

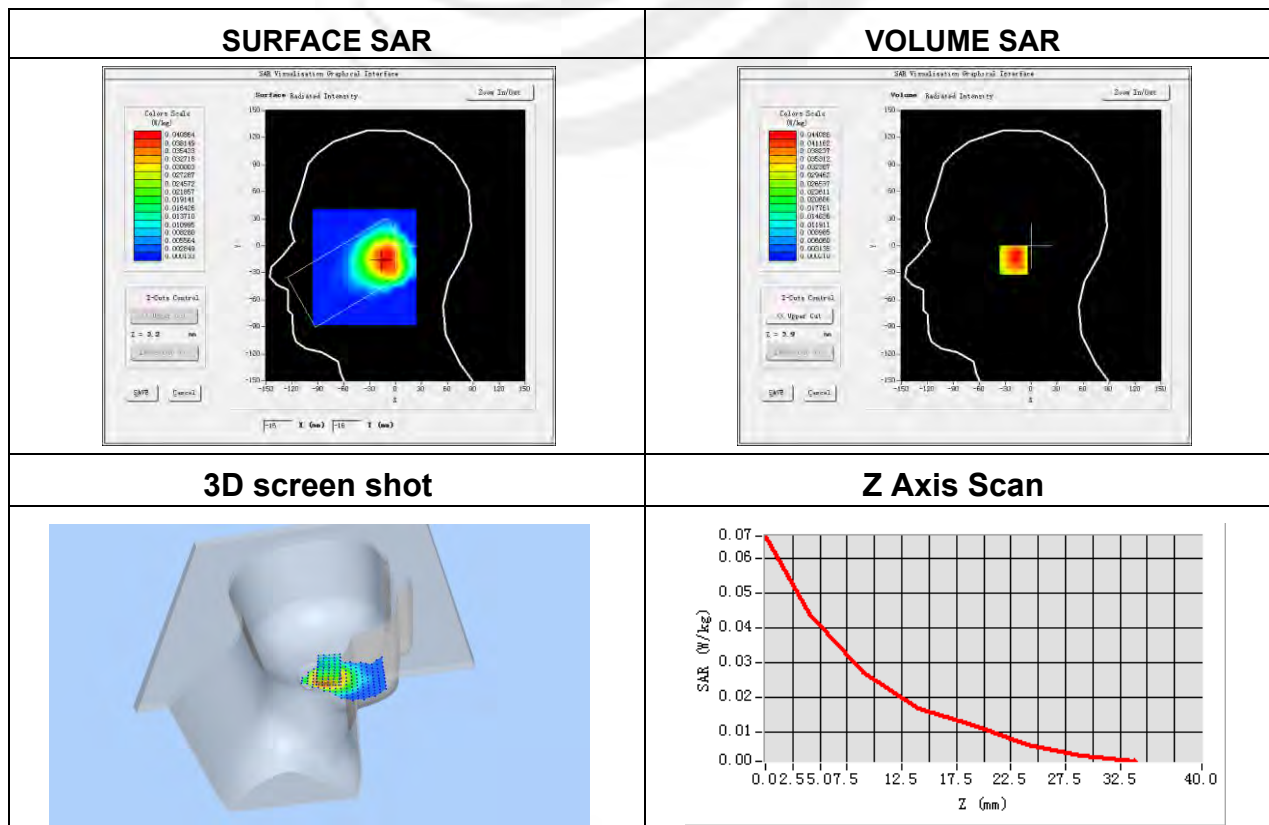


Plot 4: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	824.2
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.91
Variation (%)	1.92

Maximum location: X=-10.00, Y=-16.00

SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)	0.024225
SAR 1g (W/Kg)	0.040349

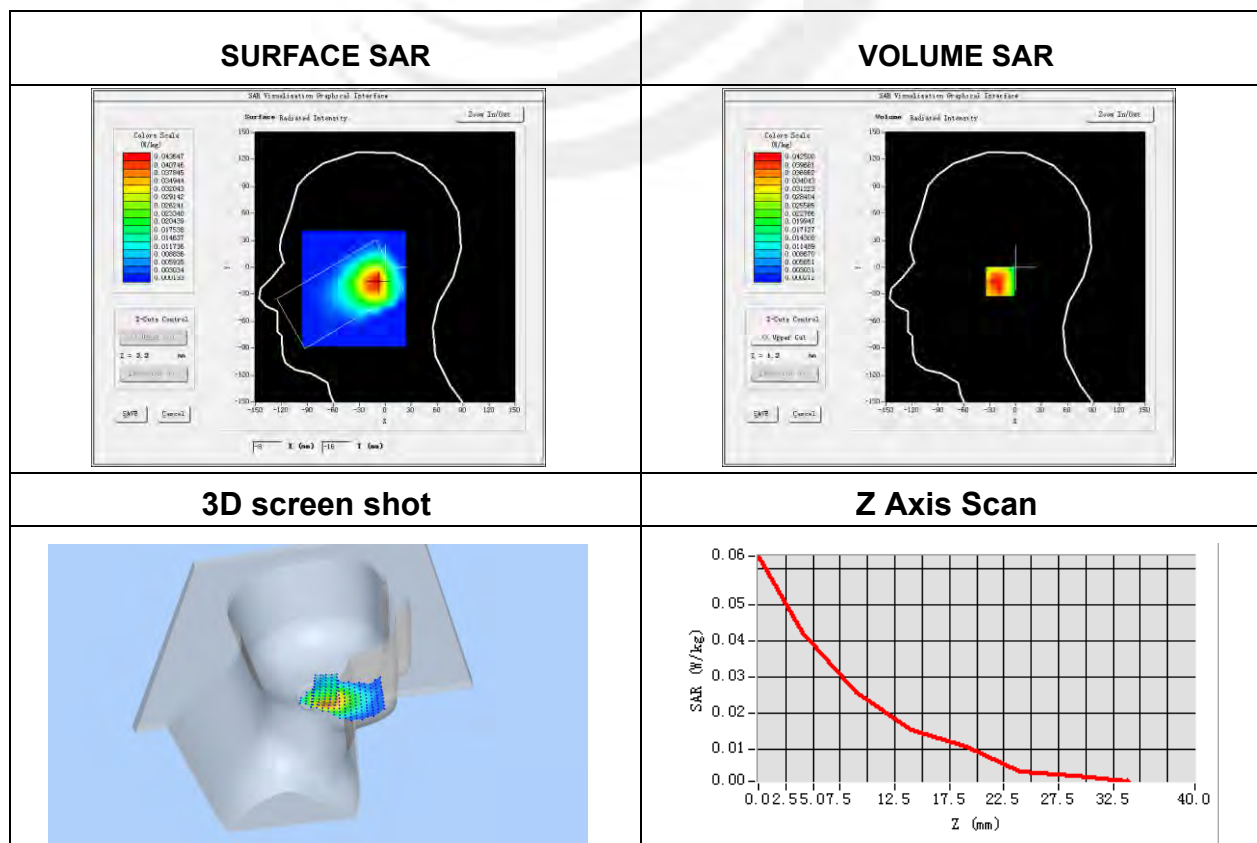


Plot 5: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	5.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Front
Band	EGPRS 850
Channels	Low
Signal	Duty Cycle:2.0 (Crest factor:2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	55.5
Conductivity (S/m)	0.96
Variation (%)	0.91

Maximum location: X=8.00, Y=1.00

SAR Peak: 0.09 W/kg

SAR 10g (W/Kg)	0.039254
SAR 1g (W/Kg)	0.062499

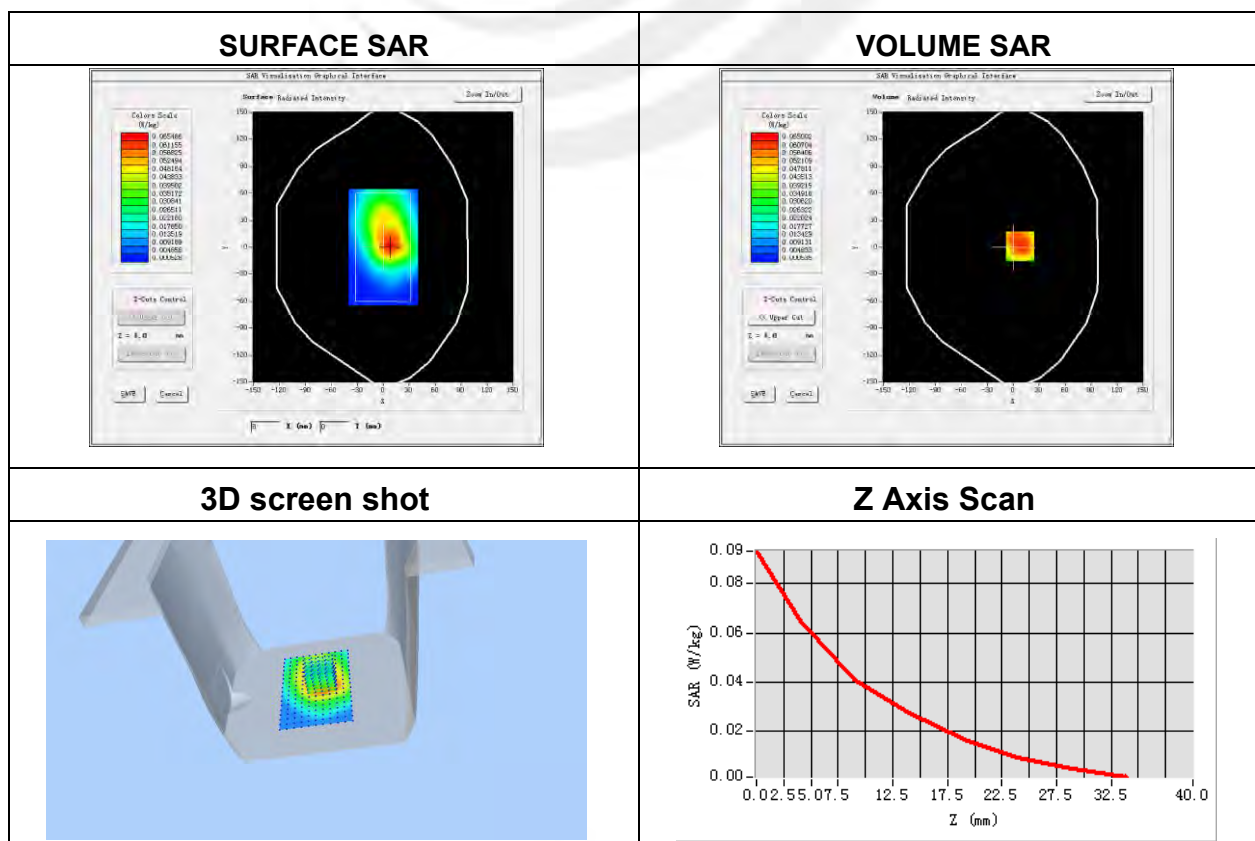


Plot 6: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	5.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Back
Band	EGPRS 850
Channels	Low
Signal	Duty Cycle:2.0 (Crest factor:2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	55.5
Conductivity (S/m)	0.96
Variation (%)	-1.39

Maximum location: X=-1.00, Y=9.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.072128
SAR 1g (W/Kg)	0.112019

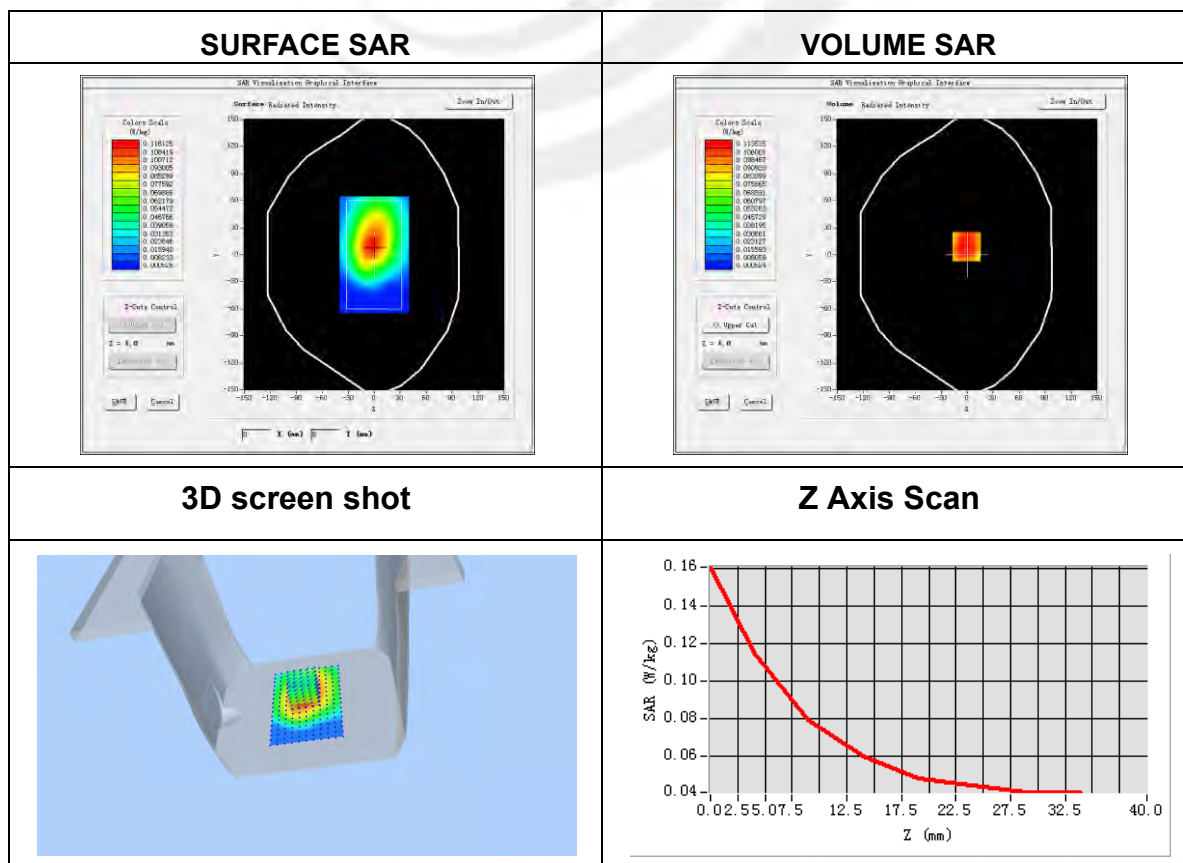


Plot 7: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	5.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body left side
Band	EGPRS 850
Channels	Low
Signal	Duty Cycle:2.0 (Crest factor:2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	55.5
Conductivity (S/m)	0.96
Variation (%)	1.31

Maximum location: X=1.00, Y=-46.00

SAR Peak: 0.13 W/kg

SAR 10g (W/Kg)	0.035626
SAR 1g (W/Kg)	0.076582

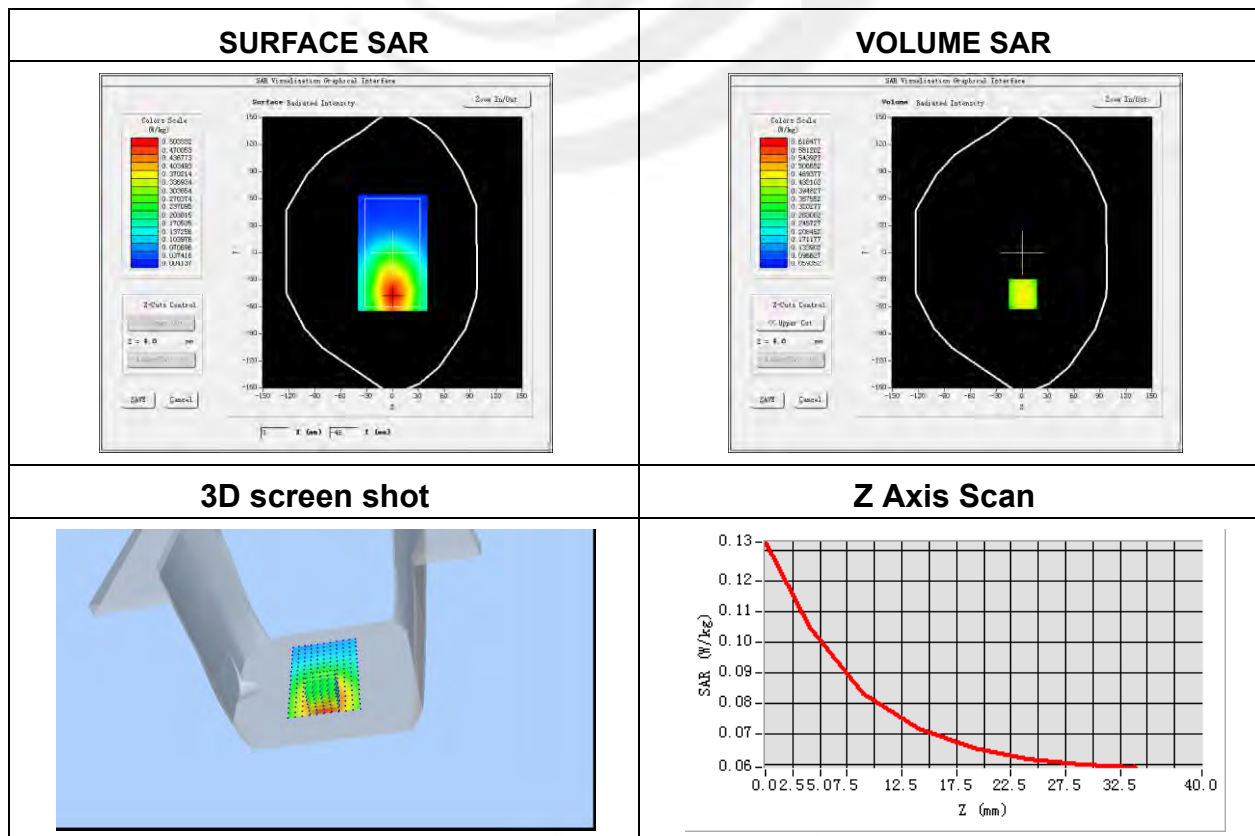


Plot 8: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	5.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body top side
Band	EGPRS 850
Channels	Low
Signal	Duty Cycle:2.0 (Crest factor:2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	55.5
Conductivity (S/m)	0.96
Variation (%)	2.53

Maximum location: X=10.00, Y=13.00

SAR Peak: 0.02 W/kg

SAR 10g (W/Kg)	0.007424
SAR 1g (W/Kg)	0.014193

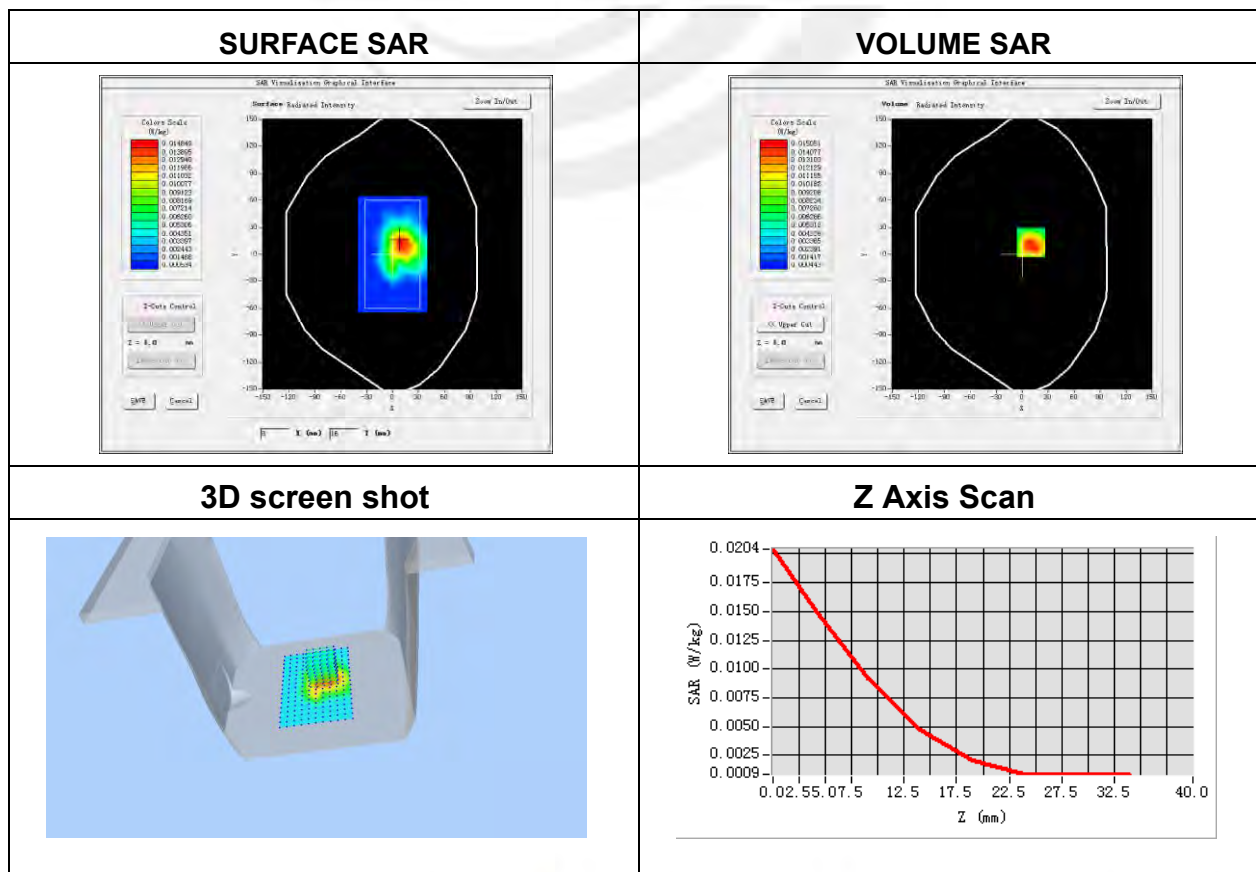


Plot 9: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	1850.4
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	-3.53

Maximum location: X=-7.00, Y=8.00
SAR Peak: 1.29 W/kg

SAR 10g (W/Kg)	0.393876
SAR 1g (W/Kg)	0.767926

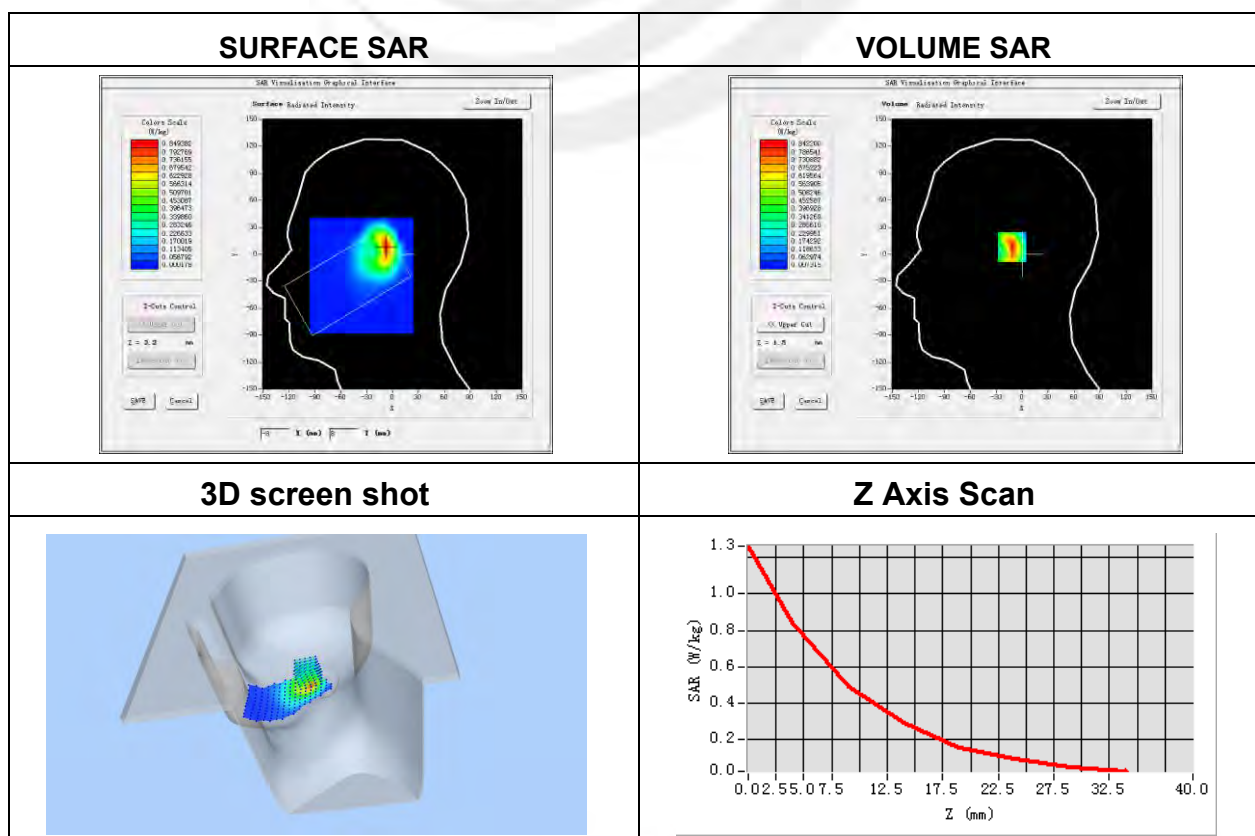


Plot 10: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	1880.0
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	1.86

Maximum location: X=-1.00, Y=13.00

SAR Peak: 1.75 W/kg

SAR 10g (W/Kg)	0.499242
SAR 1g (W/Kg)	1.014783

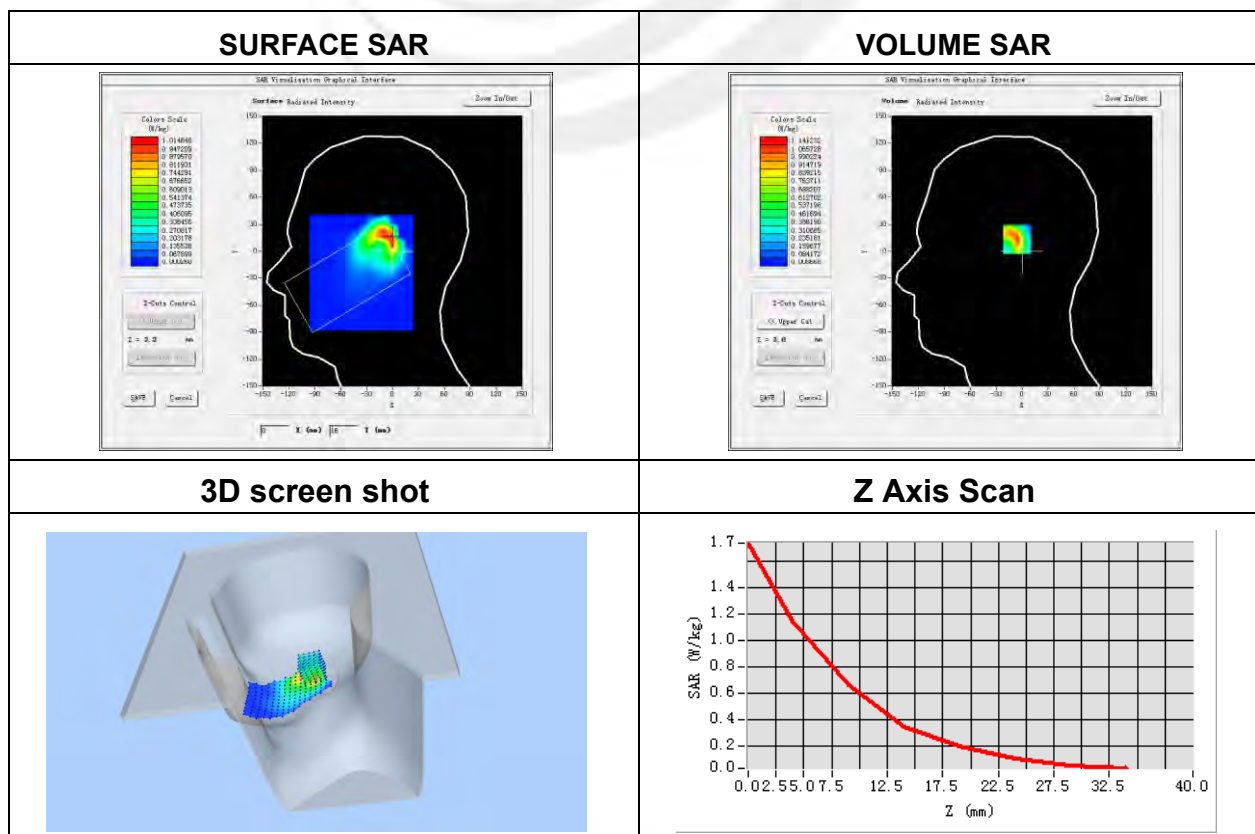


Plot 11: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head-Repeated
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	1880.0
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	-0.62

Maximum location: X=-2.00, Y=15.00
SAR Peak: 1.61 W/kg

SAR 10g (W/Kg)	0.376837
SAR 1g (W/Kg)	0.926724

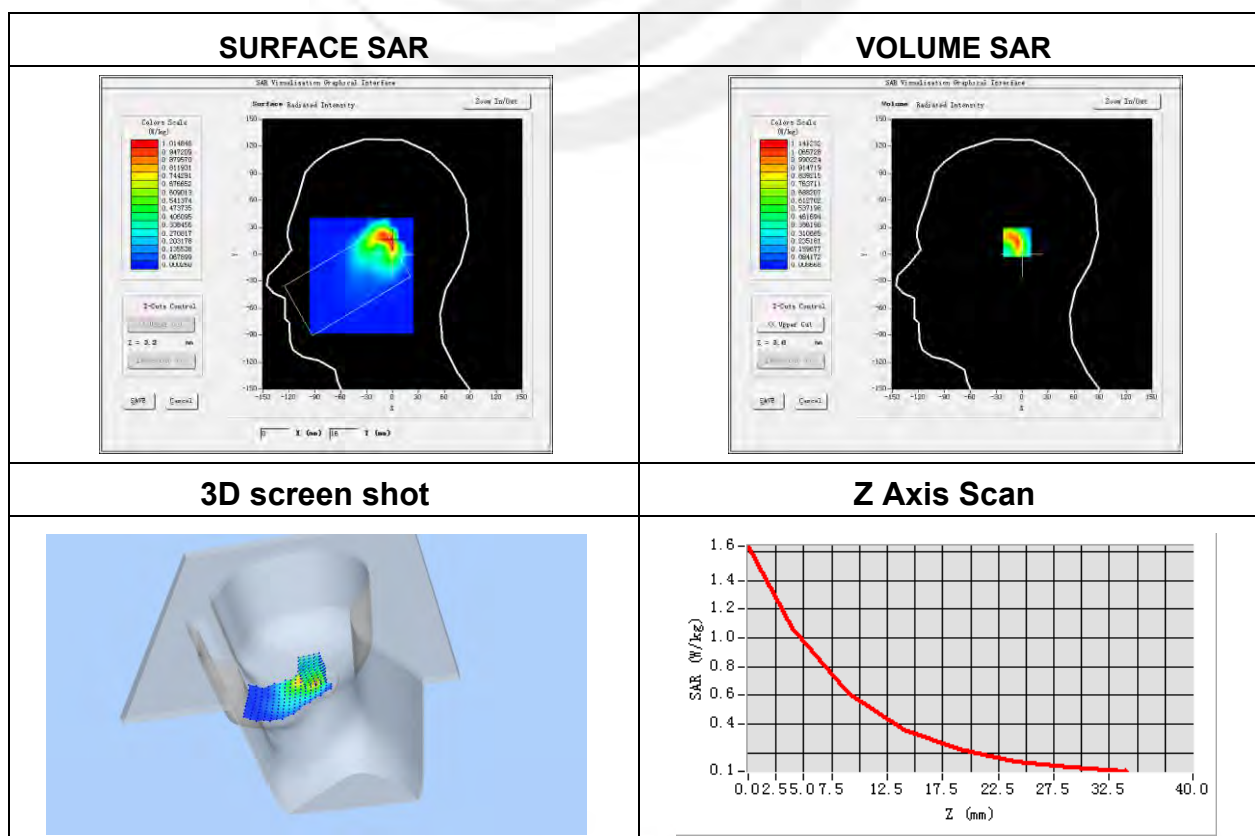


Plot 12: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	1880.0
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	-4.10

Maximum location: X=-7.00, Y=8.00

SAR Peak: 1.29 W/kg

SAR 10g (W/Kg)	0.395101
SAR 1g (W/Kg)	0.774944

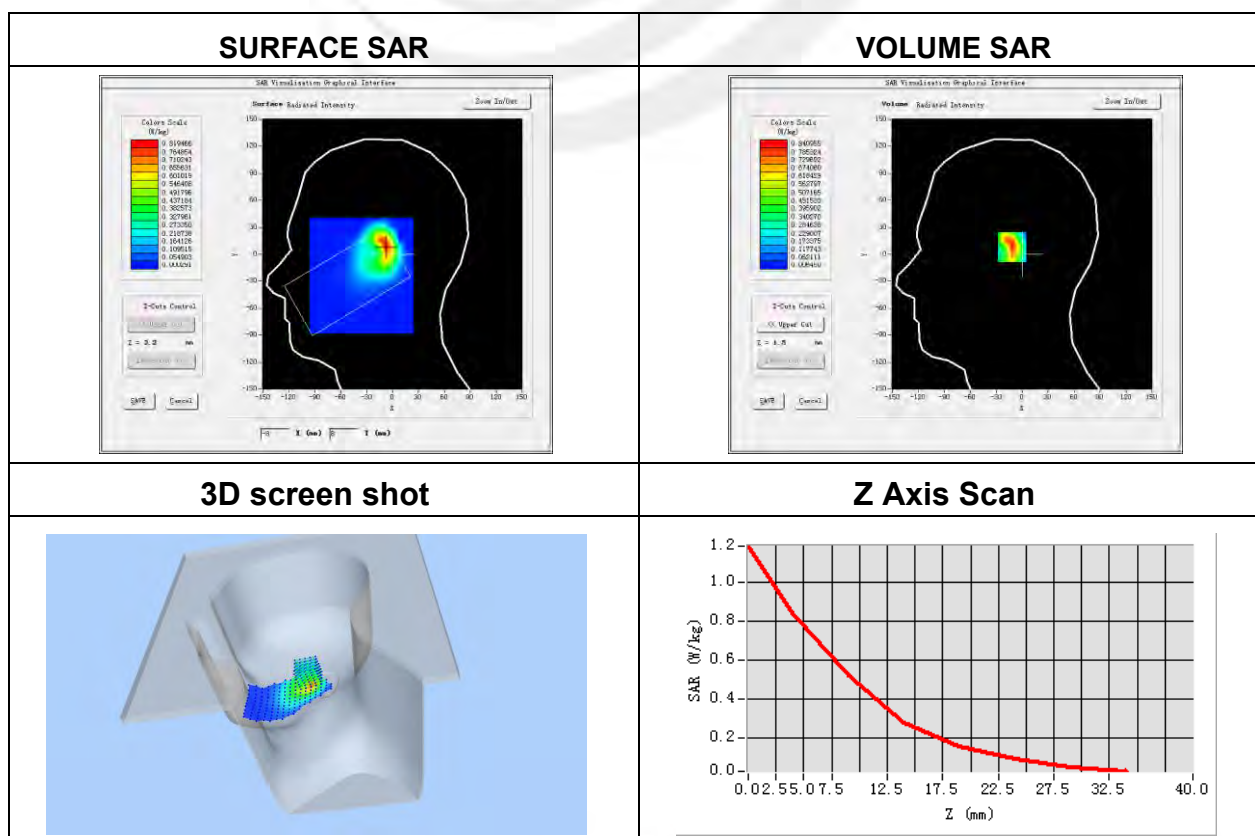


Plot 13: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	1880.0
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	-0.10

Maximum location: X=-7.00, Y=8.00

SAR Peak: 1.33 W/kg

SAR 10g (W/Kg)	0.398316
SAR 1g (W/Kg)	0.786591

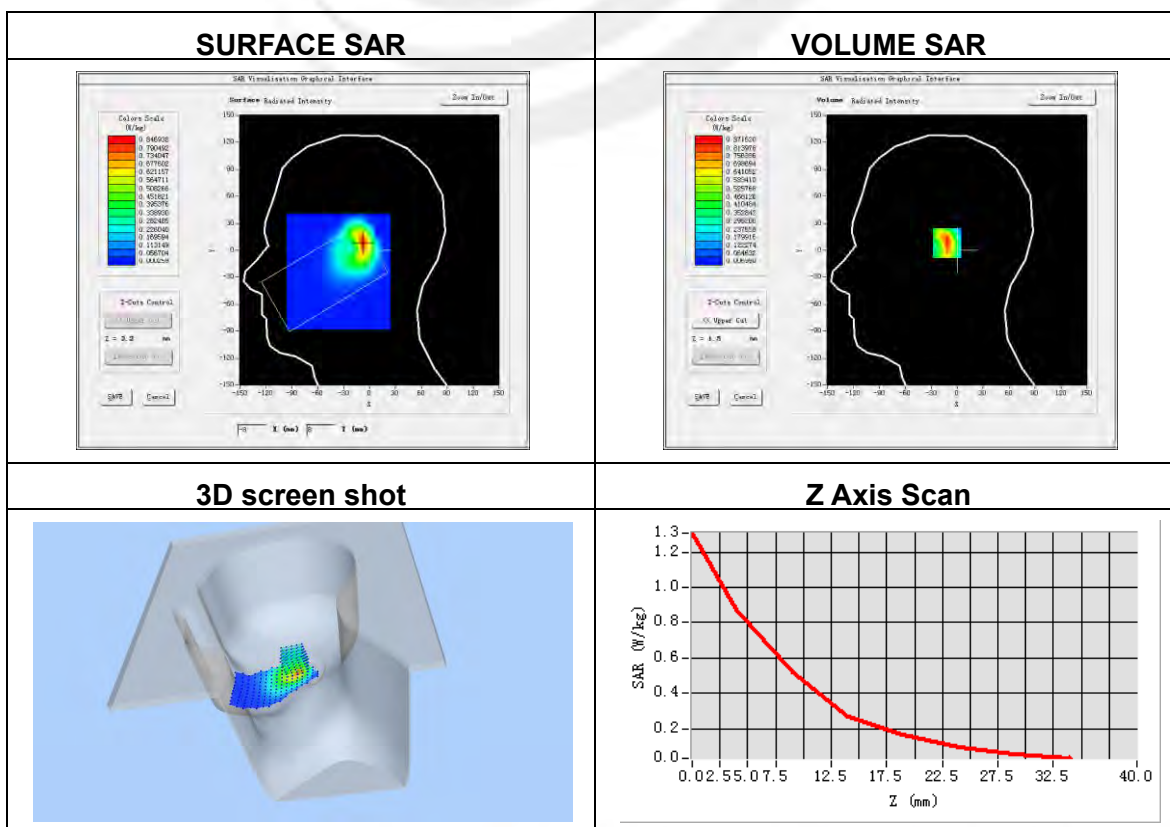


Plot 14: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	1880.0
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	-0.17

Maximum location: X=0.00, Y=1.00

SAR Peak: 1.08 W/kg

SAR 10g (W/Kg)	0.352672
SAR 1g (W/Kg)	0.676679

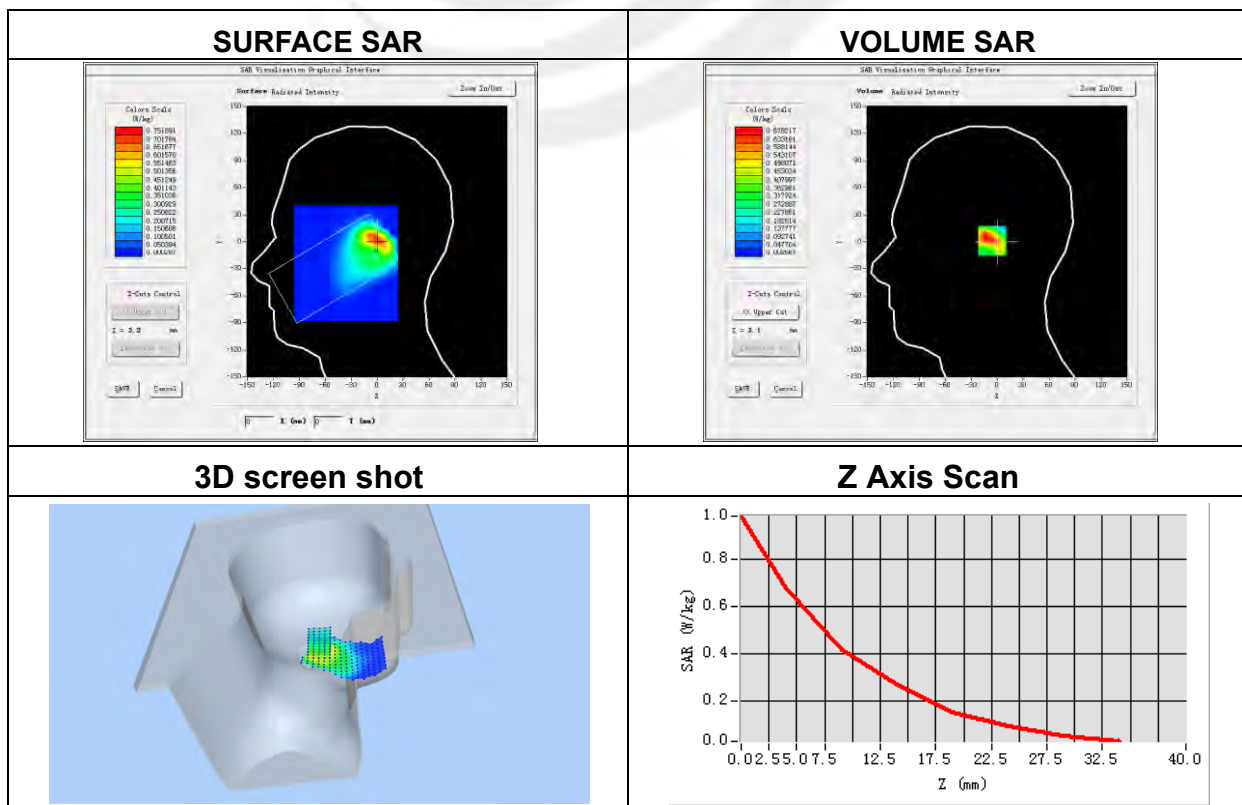





Plot 15: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	1880.0
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	2.56

Maximum location: X=7.00, Y=1.00

SAR Peak: 1.20 W/kg

SAR 10g (W/Kg)	0.392202
SAR 1g (W/Kg)	0.737608

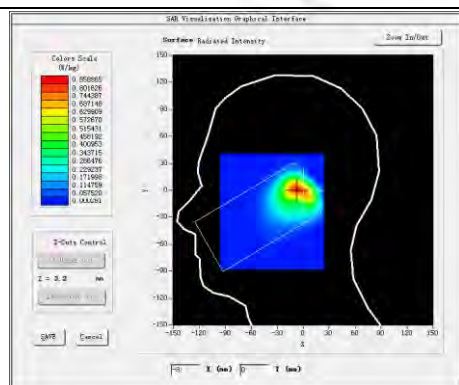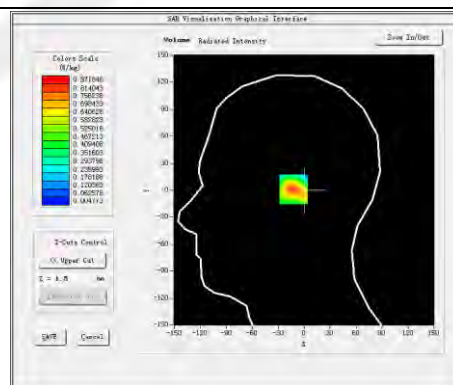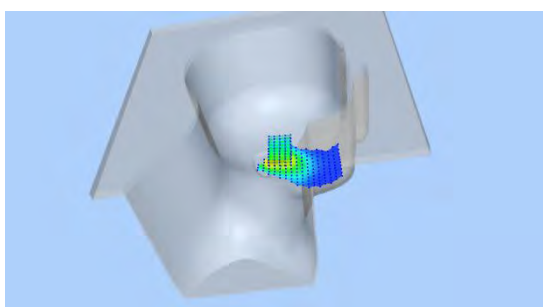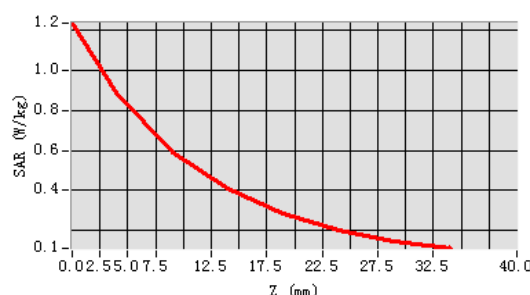SURFACE SAR

VOLUME SAR

3D screen shot

Z Axis Scan


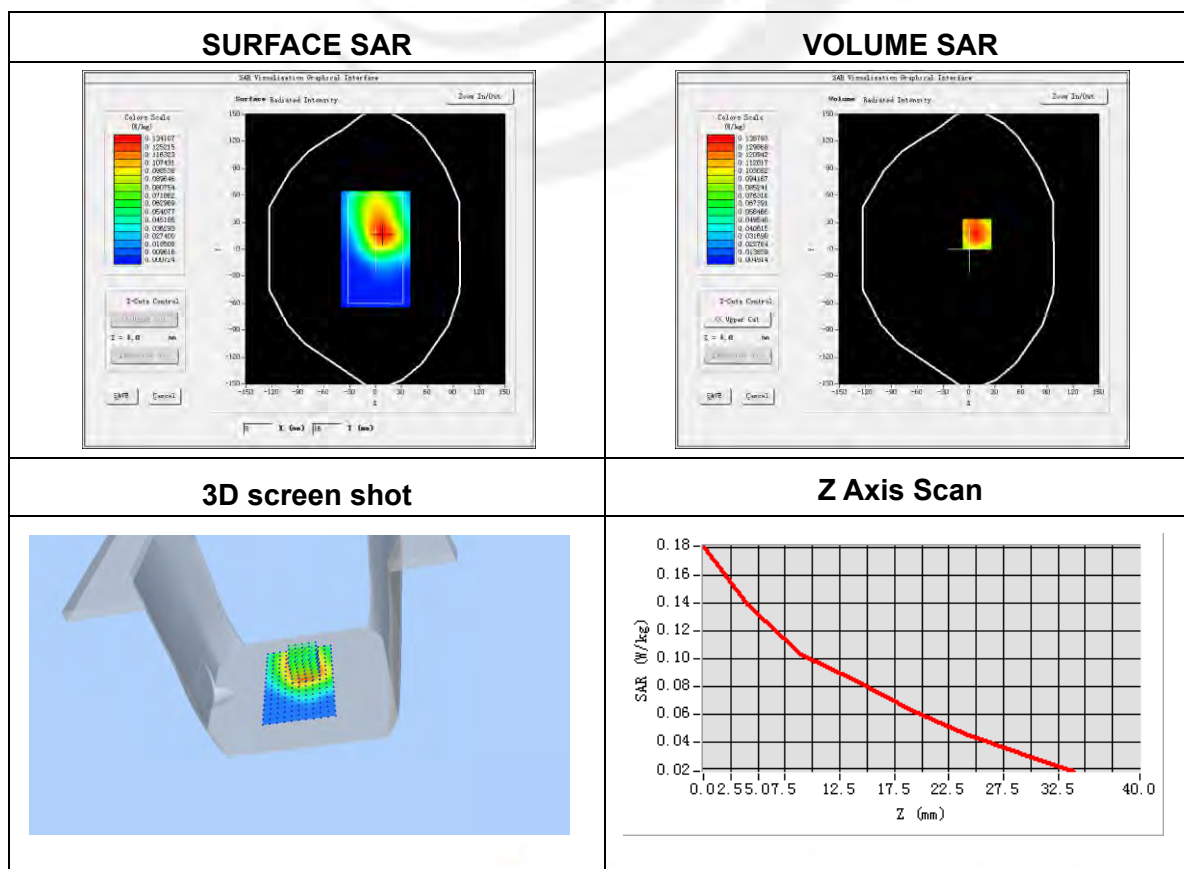
Plot 16: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body front
Band	EGPRS 1900
Channels	Middle
Signal	Duty Cycle:2.00 (Crest factor:2.0)
Frequency (MHz)	1880.0
Relative permittivity (real part)	51.68
Conductivity (S/m)	1.51
Variation (%)	-1.39

Maximum location: X=9.00, Y=17.00

SAR Peak:0.18 W/kg

SAR 10g (W/Kg)	0.095601
SAR 1g (W/Kg)	0.133030




Plot 17: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Behind
Band	EGPRS 1900
Channels	Middle
Signal	Duty Cycle:2.00 (Crest factor:2.0)
Frequency (MHz)	1880.0
Relative permittivity (real part)	51.68
Conductivity (S/m)	1.51
Variation (%)	2.06

Maximum location: X=2.00, Y=32.00

SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.182948
SAR 1g (W/Kg)	0.239649

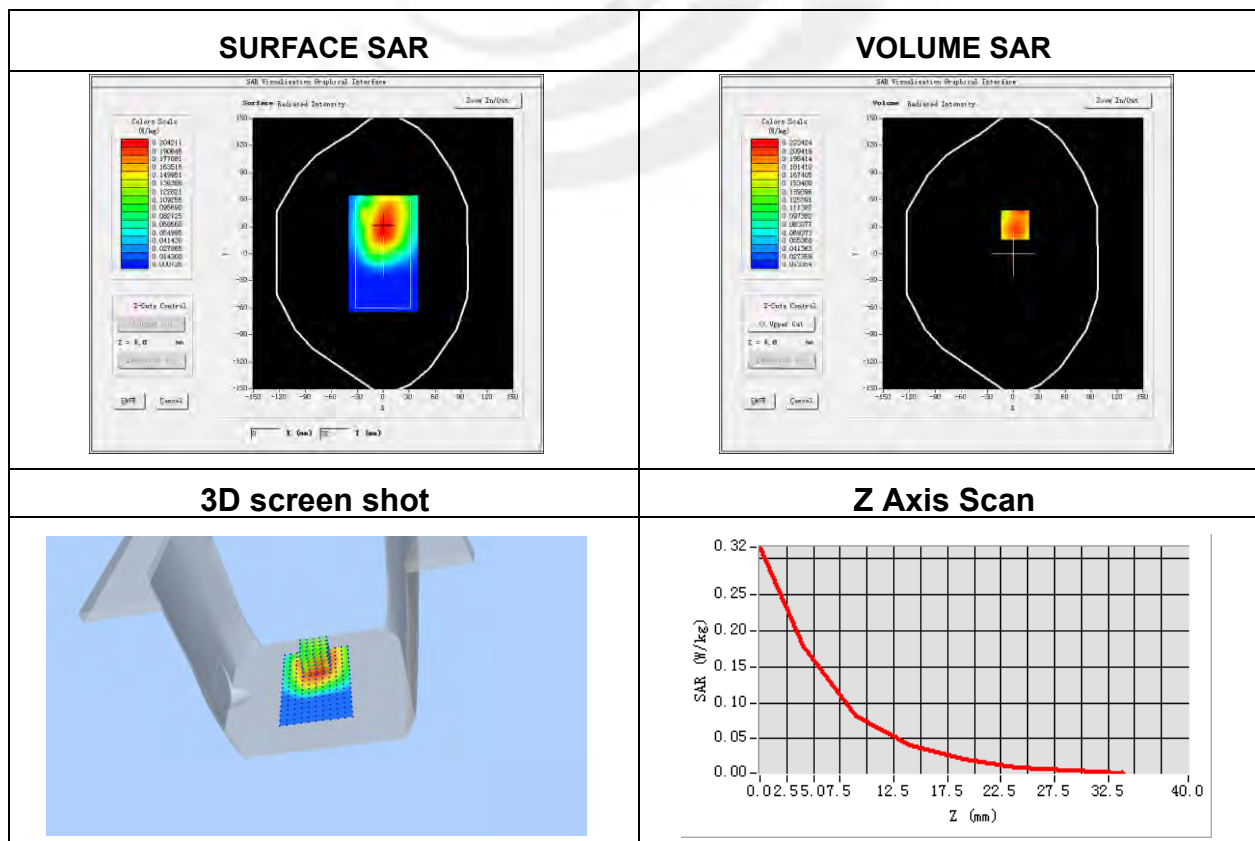


Plot 18: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body left side
Band	EGPRS 1900
Channels	Middle
Signal	Duty Cycle:2.00 (Crest factor:2.0)
Frequency (MHz)	1880.0
Relative permittivity (real part)	51.68
Conductivity (S/m)	1.51
Variation (%)	-4.95

Maximum location: X=7.00, Y=-1.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.067613
SAR 1g (W/Kg)	0.126741

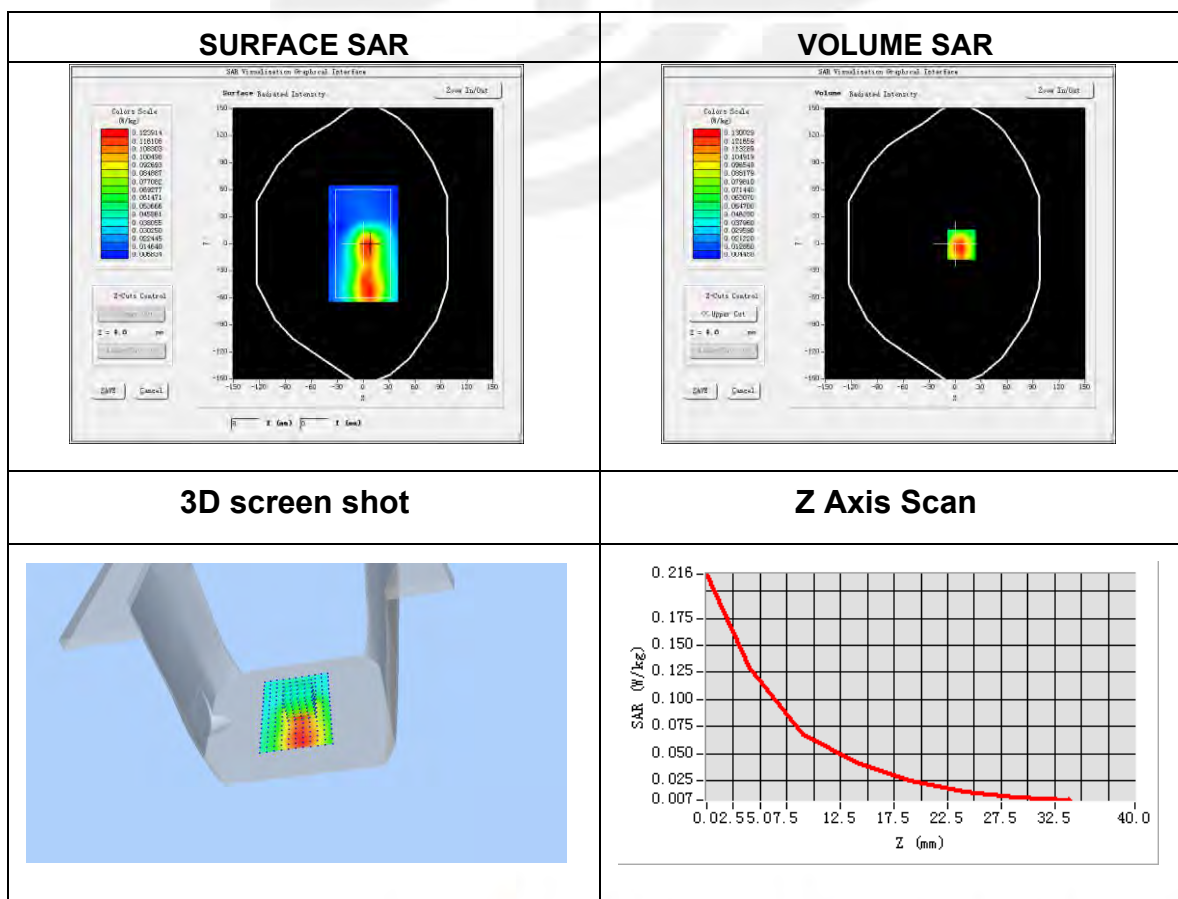


Plot 19: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body top side
Band	EGPRS 1900
Channels	Middle
Signal	Duty Cycle:2.00 (Crest factor:2.0)
Frequency (MHz)	1880.0
Relative permittivity (real part)	51.68
Conductivity (S/m)	1.51
Variation (%)	-0.33

Maximum location: X=-14.00, Y=9.00

SAR Peak: 0.96 W/kg

SAR 10g (W/Kg)	0.326313
SAR 1g (W/Kg)	0.599627

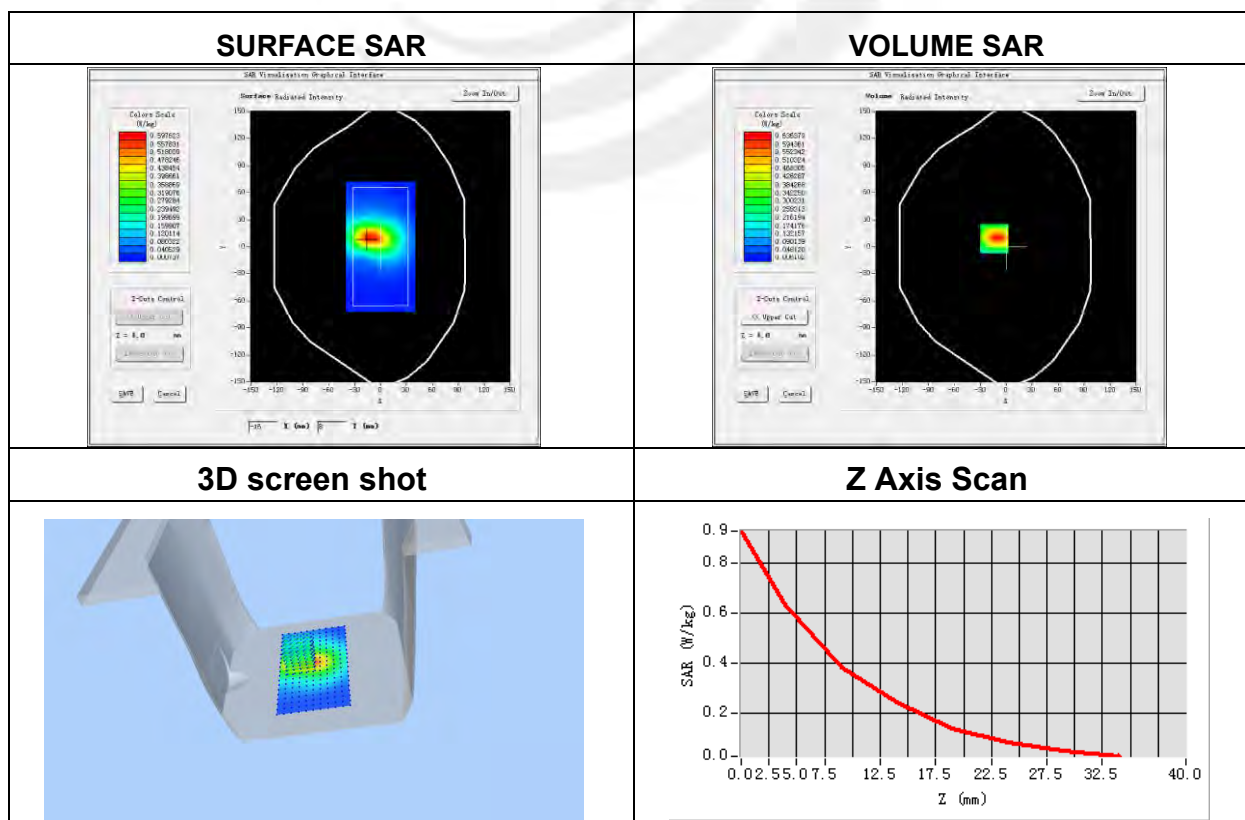


Plot 20: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA II
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1852.4
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	0.32

Maximum location: X=-1.00, Y=13.00

SAR Peak: 1.48 W/kg

SAR 10g (W/Kg)	0.434019
SAR 1g (W/Kg)	0.871254

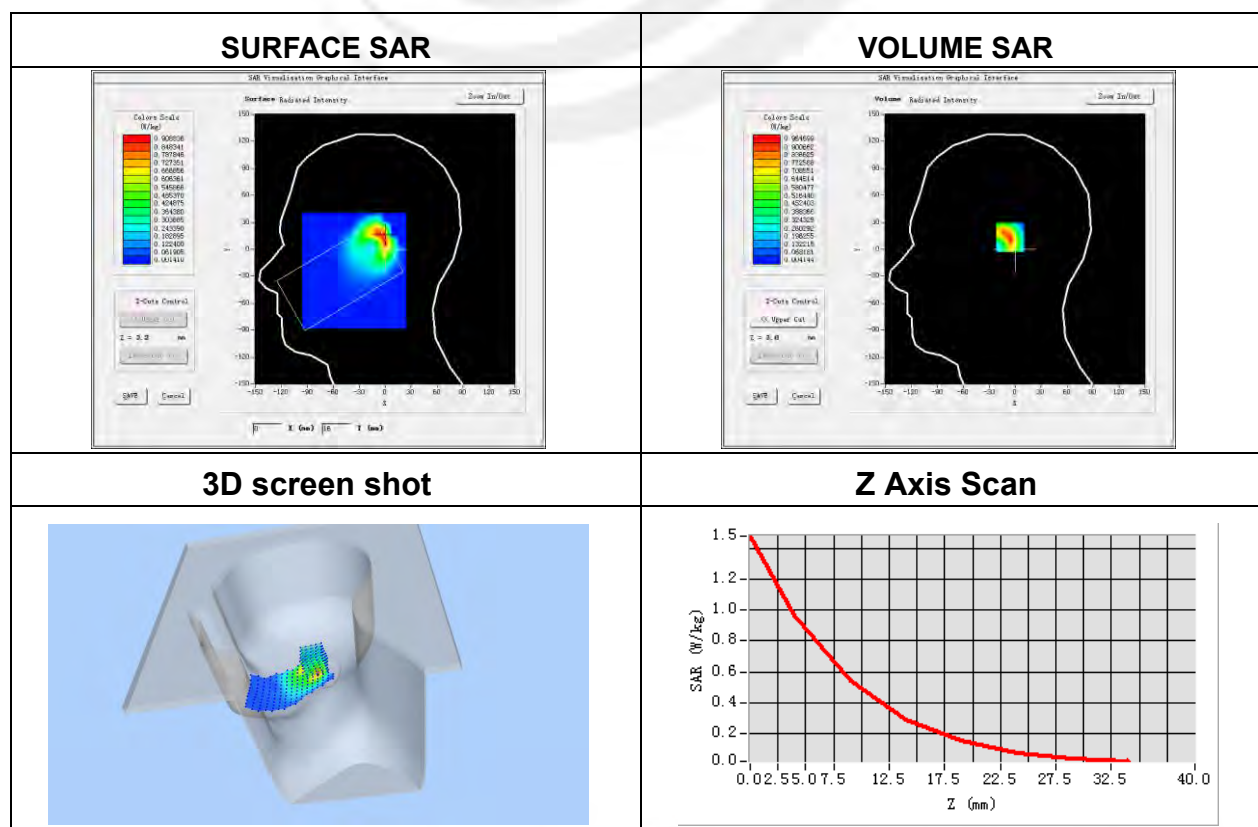


Plot 21: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA II
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1880.0
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	1.20

Maximum location: X=-1.00, Y=-14.00

SAR Peak: 0.90 W/kg

SAR 10g (W/Kg)	0.412837
SAR 1g (W/Kg)	0.642731

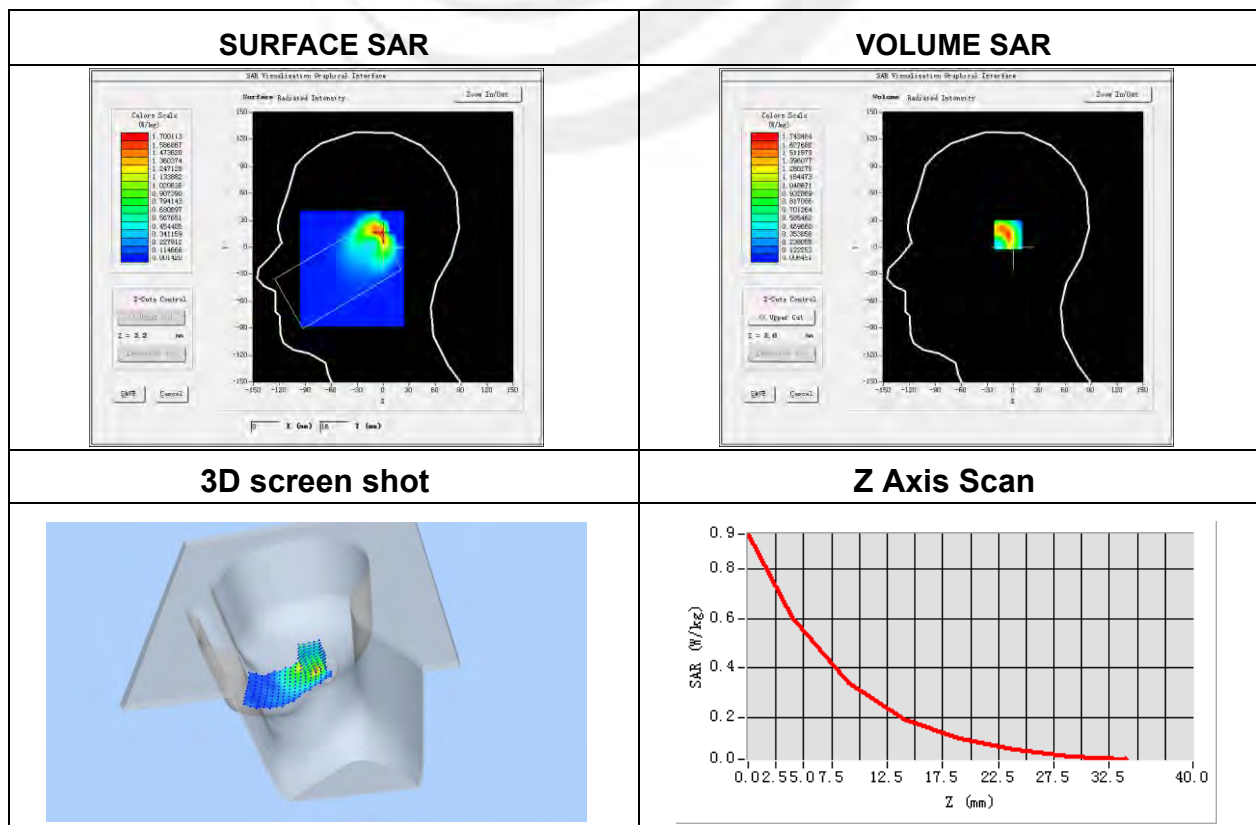


Plot 22: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-2.50

Maximum location: X=0.00, Y=8.00

SAR Peak: 1.80 W/kg

SAR 10g (W/Kg)	0.510907
SAR 1g (W/Kg)	1.034375

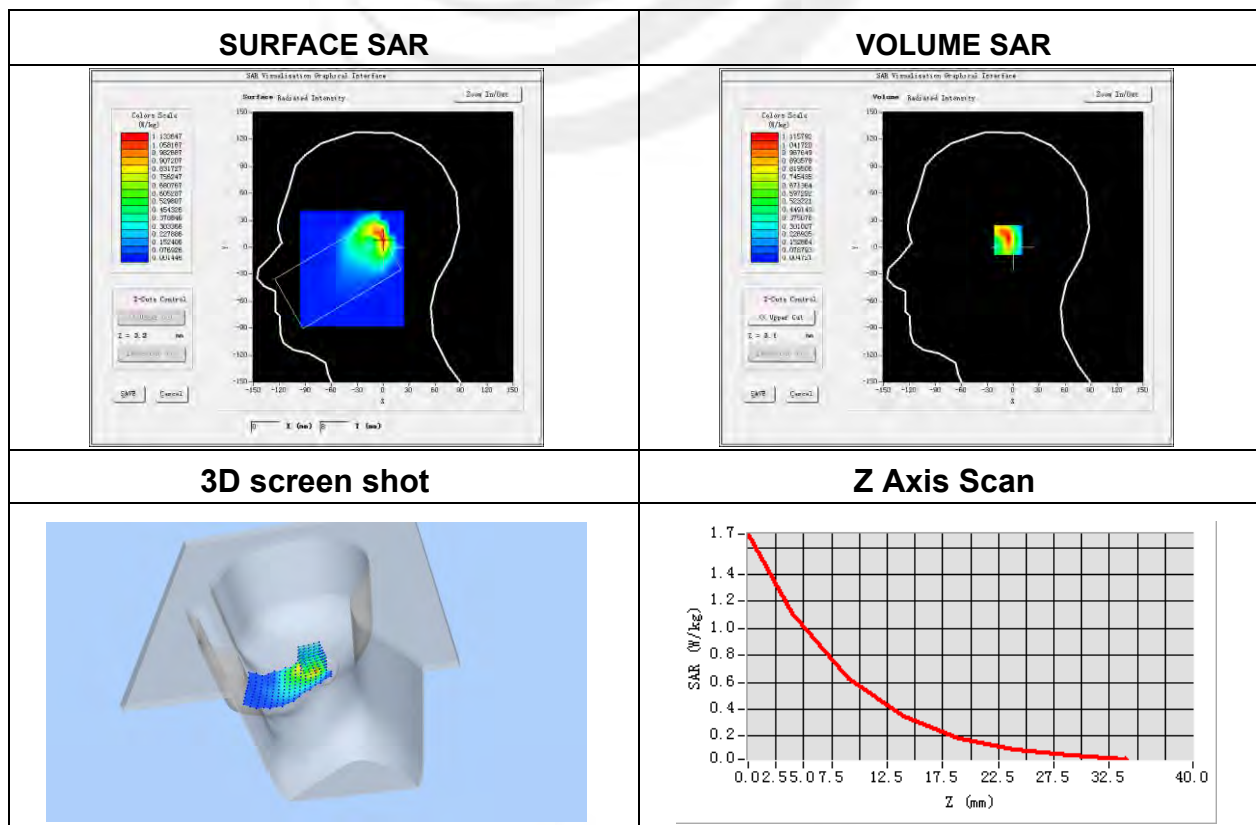


Plot 23: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head-Repeated
Device Position	Cheek
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-0.22

Maximum location: X=-1.00, Y=13.00

SAR Peak: 1.64 W/kg

SAR 10g (W/Kg)	0.486743
SAR 1g (W/Kg)	0.966472

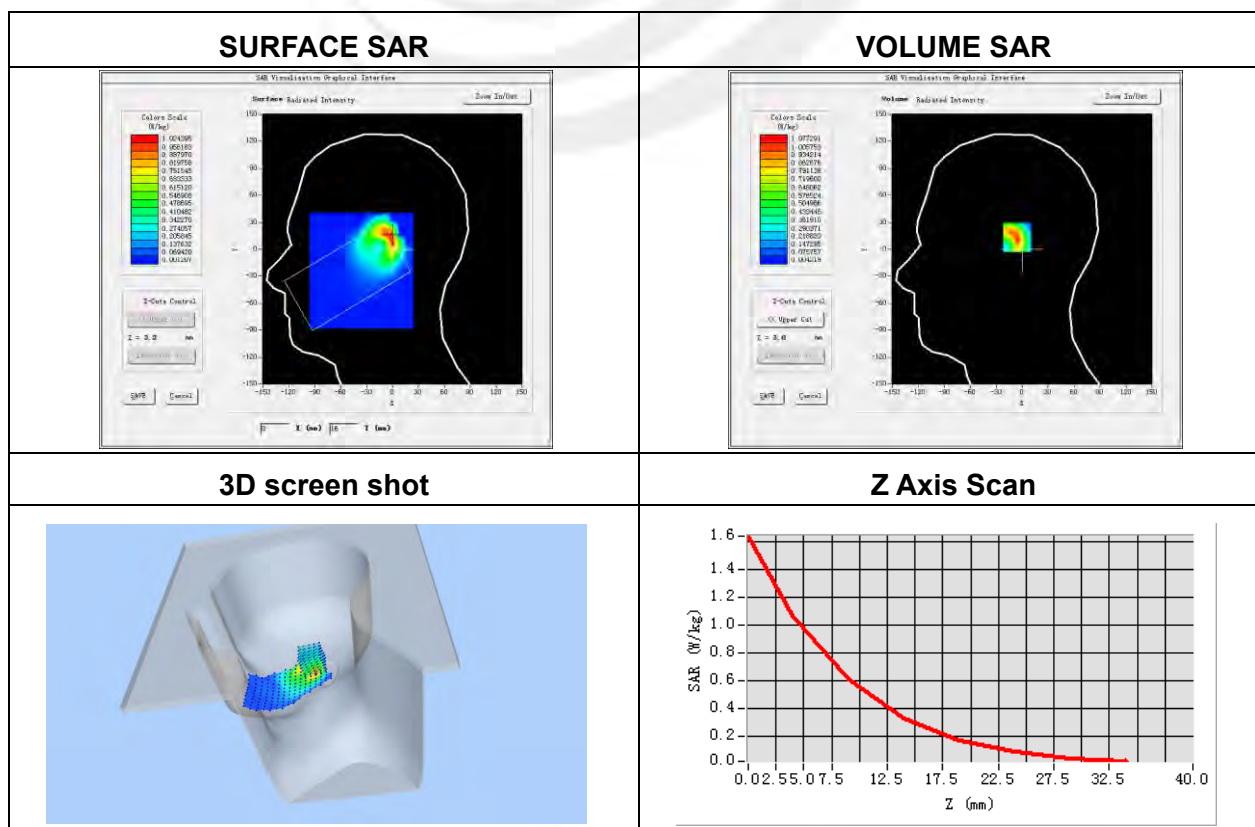


Plot 24: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Tilt
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	0.07

Maximum location: X=-11.00, Y=5.00

SAR Peak: 1.16 W/kg

SAR 10g (W/Kg)	0.317264
SAR 1g (W/Kg)	0.728348

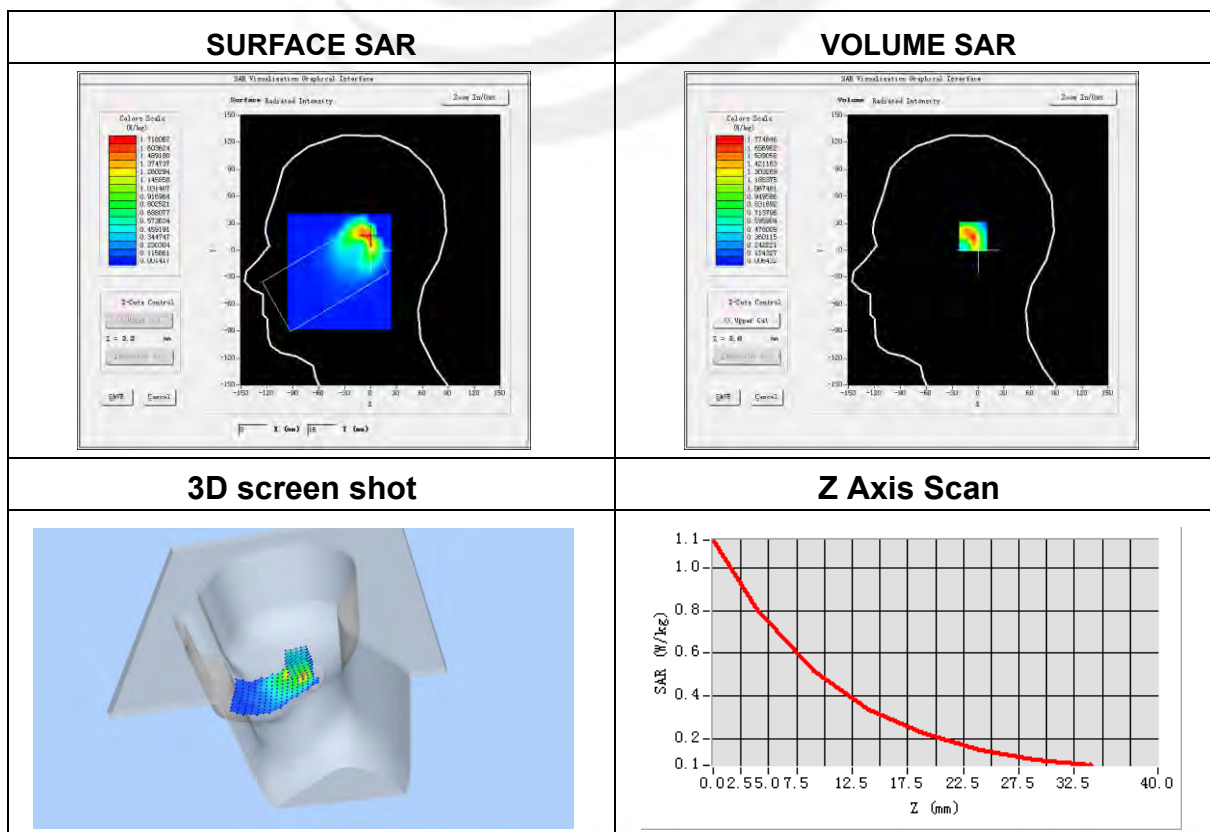


Plot 25: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-2.13

Maximum location: X=-3.00, Y=1.00

SAR Peak: 0.97 W/kg

SAR 10g (W/Kg)	0.325504
SAR 1g (W/Kg)	0.615825

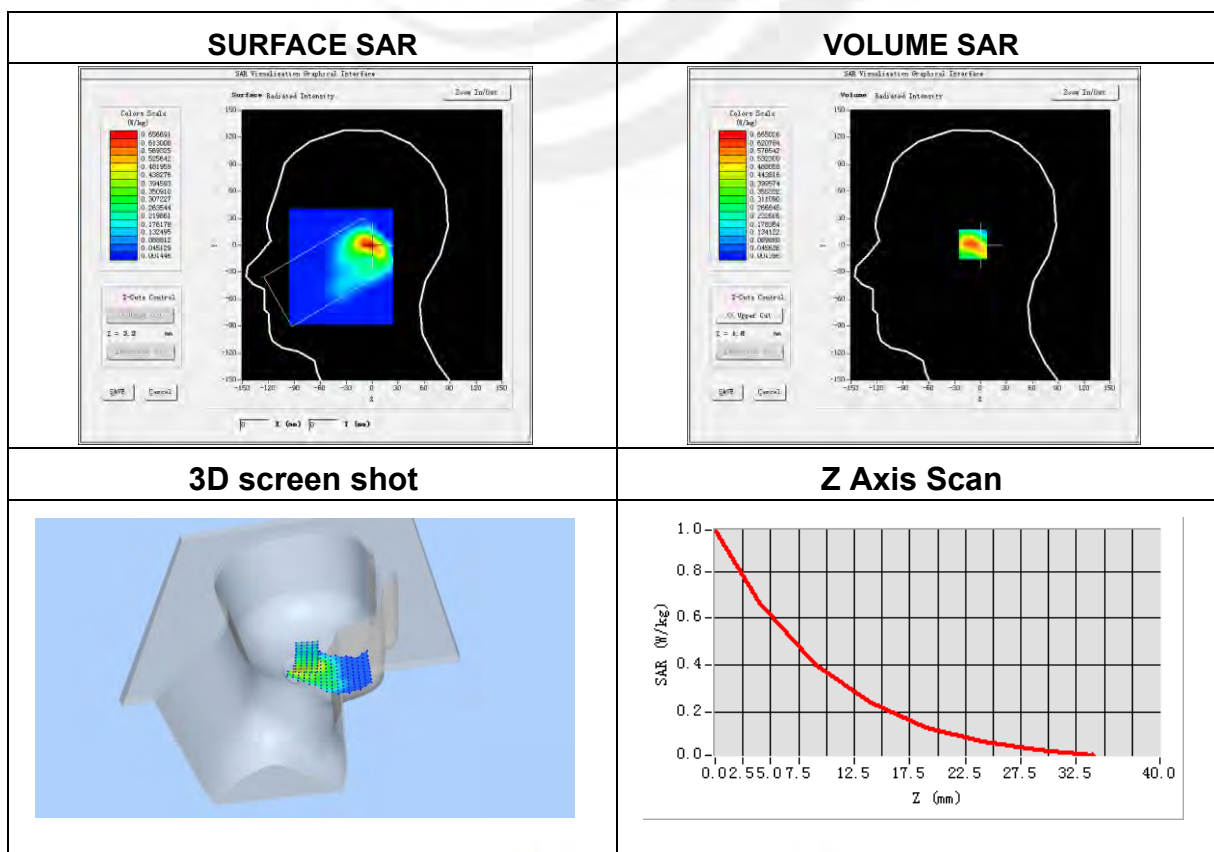


Plot 26: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Tilt
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-1.00

Maximum location: X=-8.00, Y=0.00

SAR Peak: 1.09 W/kg

SAR 10g (W/Kg)	0.275458
SAR 1g (W/Kg)	0.401948

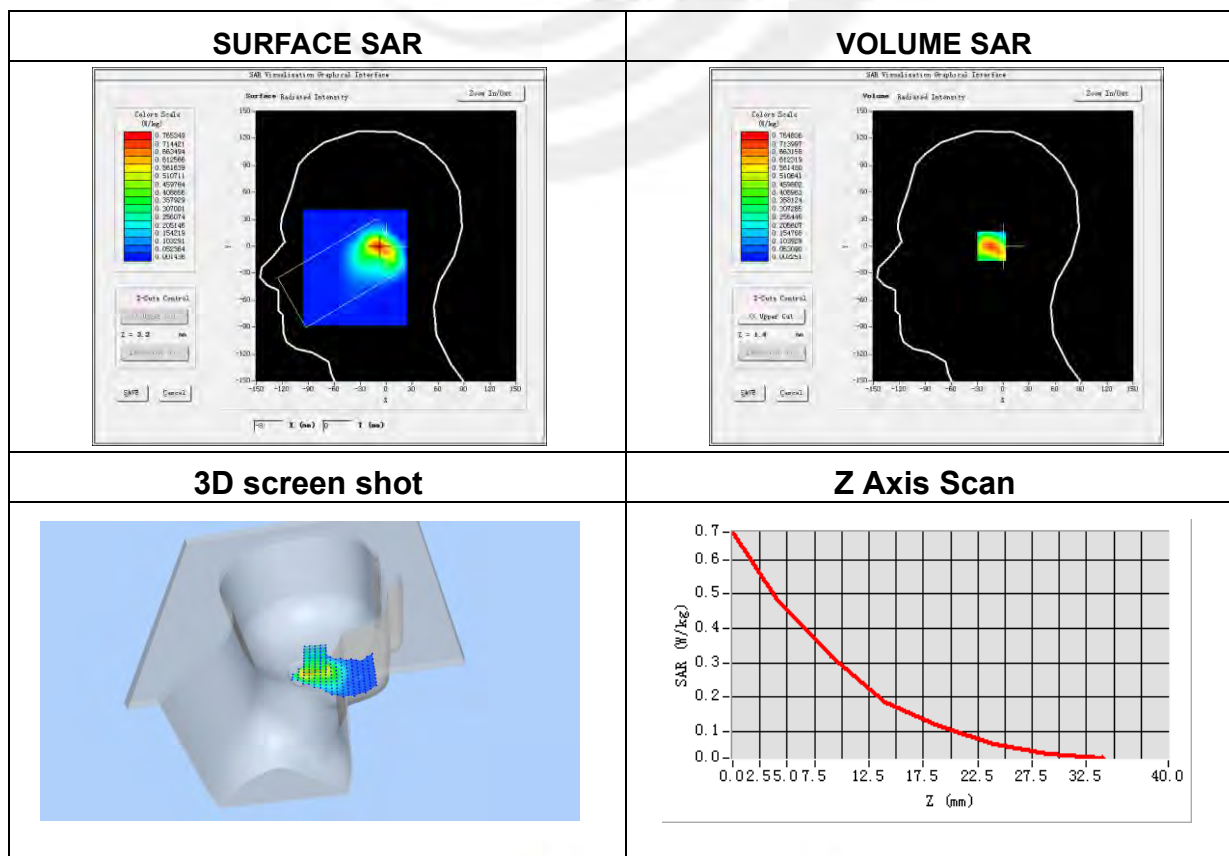


Plot 27: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Front
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	-1.02

Maximum location: X=24.00, Y=8.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.124902
SAR 1g (W/Kg)	0.233074

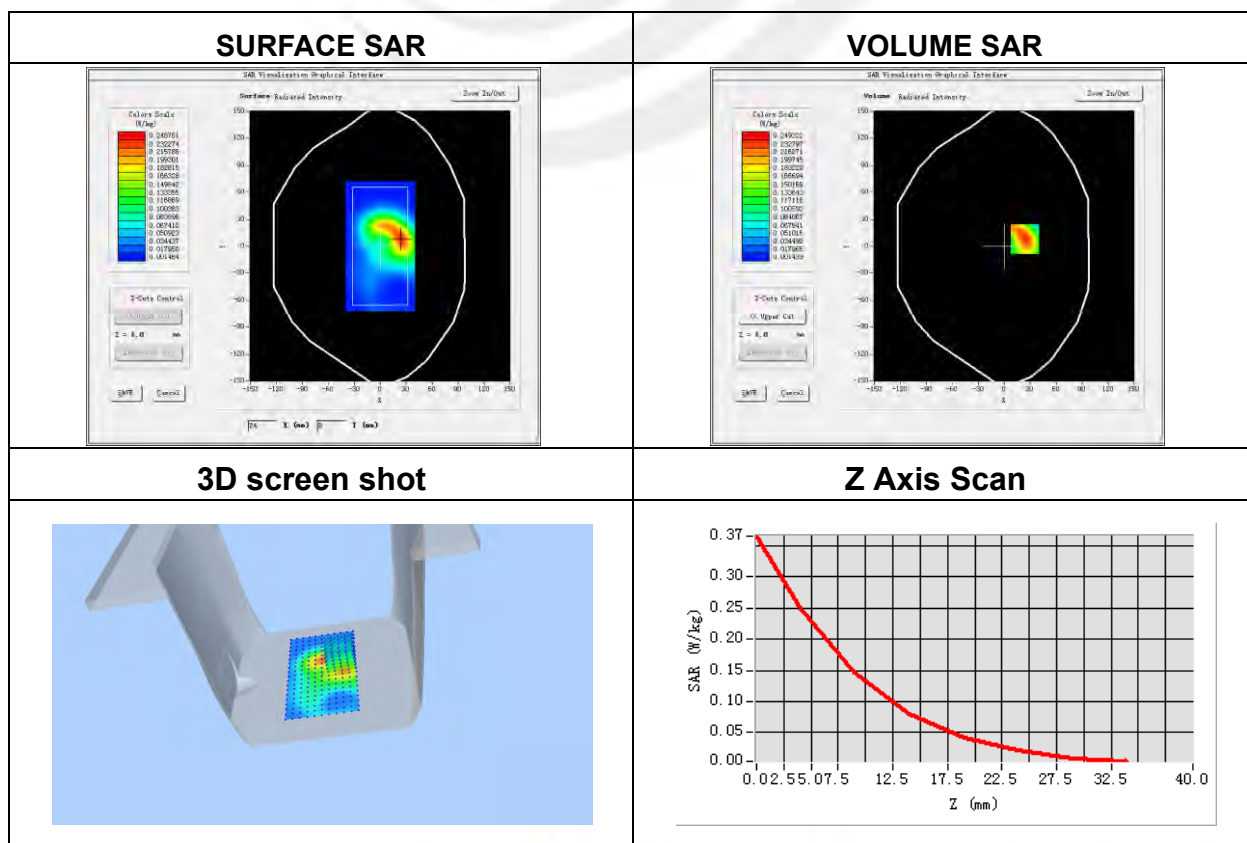


Plot 28: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	39.71
Conductivity (S/m)	1.40
Variation (%)	-0.13

Maximum location: X=23.00, Y=31.00

SAR Peak: 1.21 W/kg

SAR 10g (W/Kg)	0.370485
SAR 1g (W/Kg)	0.736587

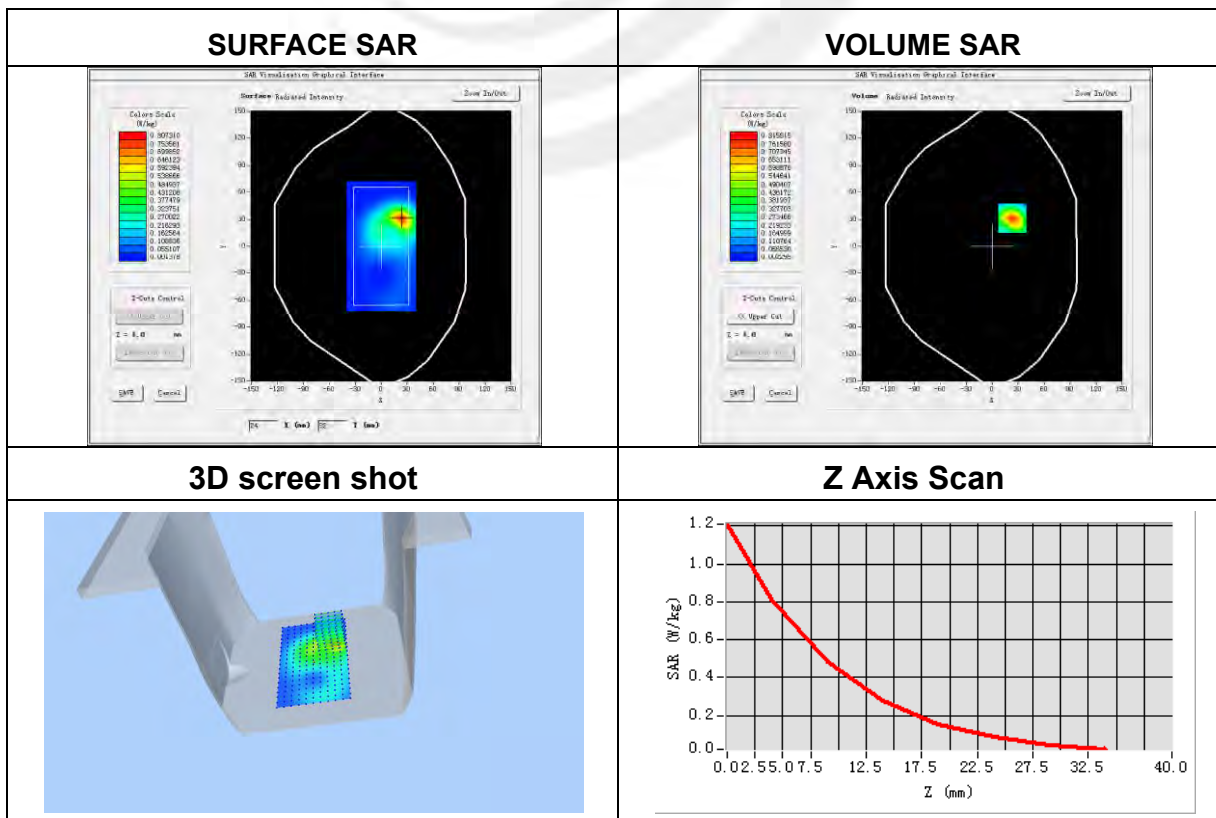


Plot 29: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body left side
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	-0.94

Maximum location: X=0.00, Y=-16.00

SAR Peak:0.54 W/kg

SAR 10g (W/Kg)	0.127883
SAR 1g (W/Kg)	0.274492

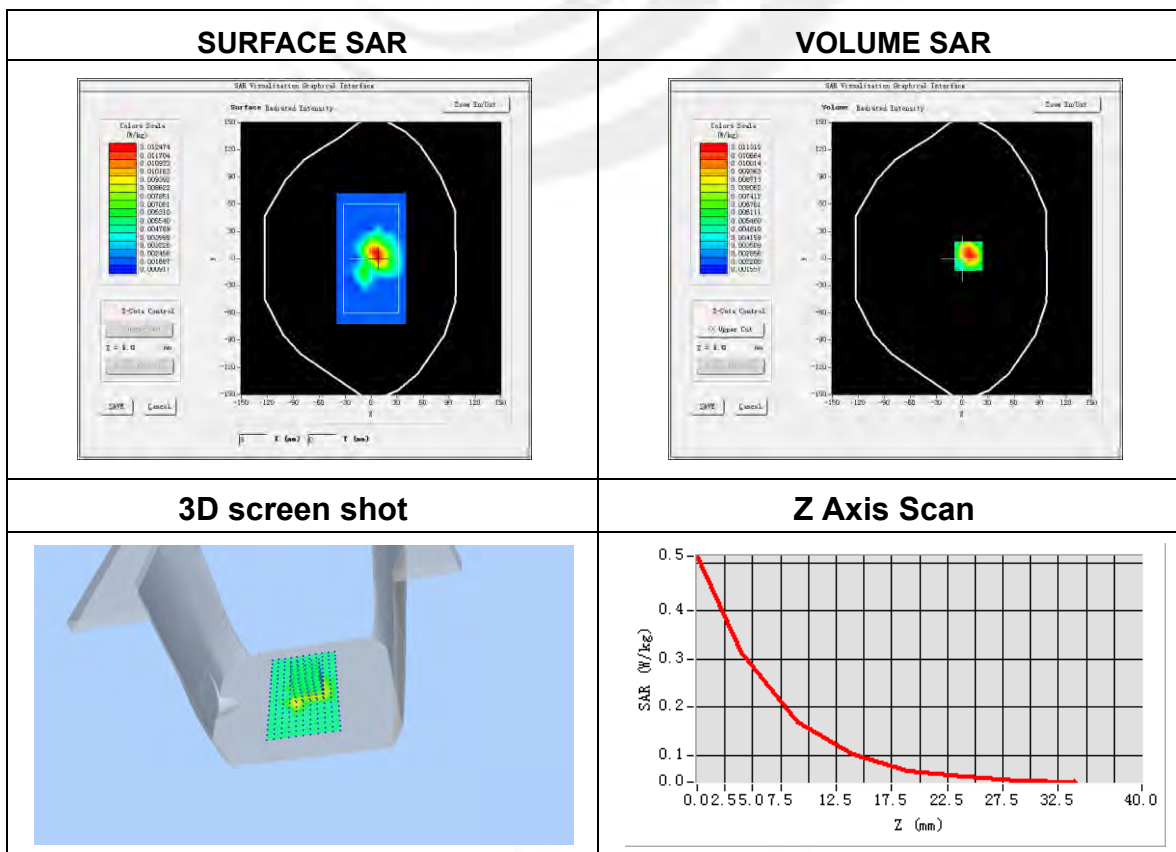


Plot 30: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body top side
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	-1.85

Maximum location: X=-11.00, Y=10.00

SAR Peak: 0.57 W/kg

SAR 10g (W/Kg)	0.194108
SAR 1g (W/Kg)	0.364278

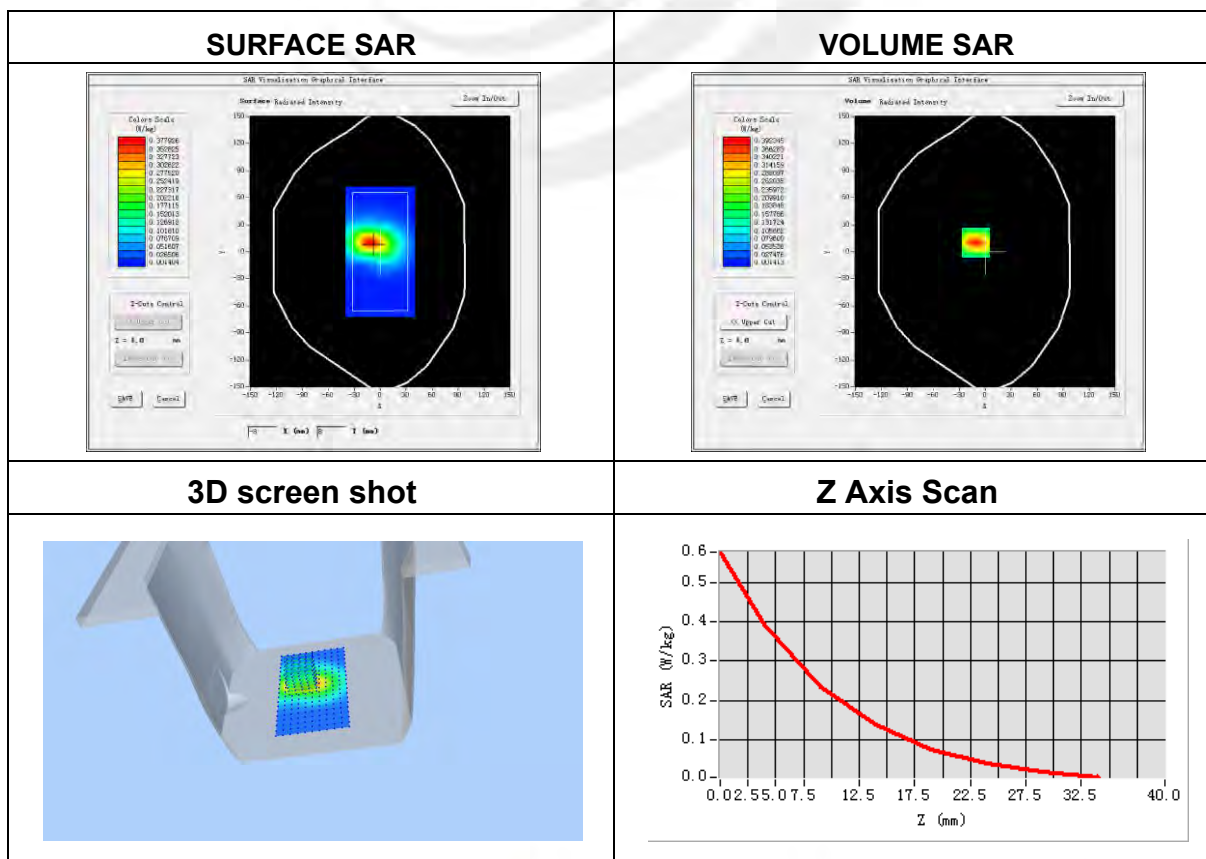


Plot 31: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA IV
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1712.0
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	0.55

Maximum location: X=3.00, Y=15.00

SAR Peak: 1.67 W/kg

SAR 10g (W/Kg)	0.485692
SAR 1g (W/Kg)	0.964409

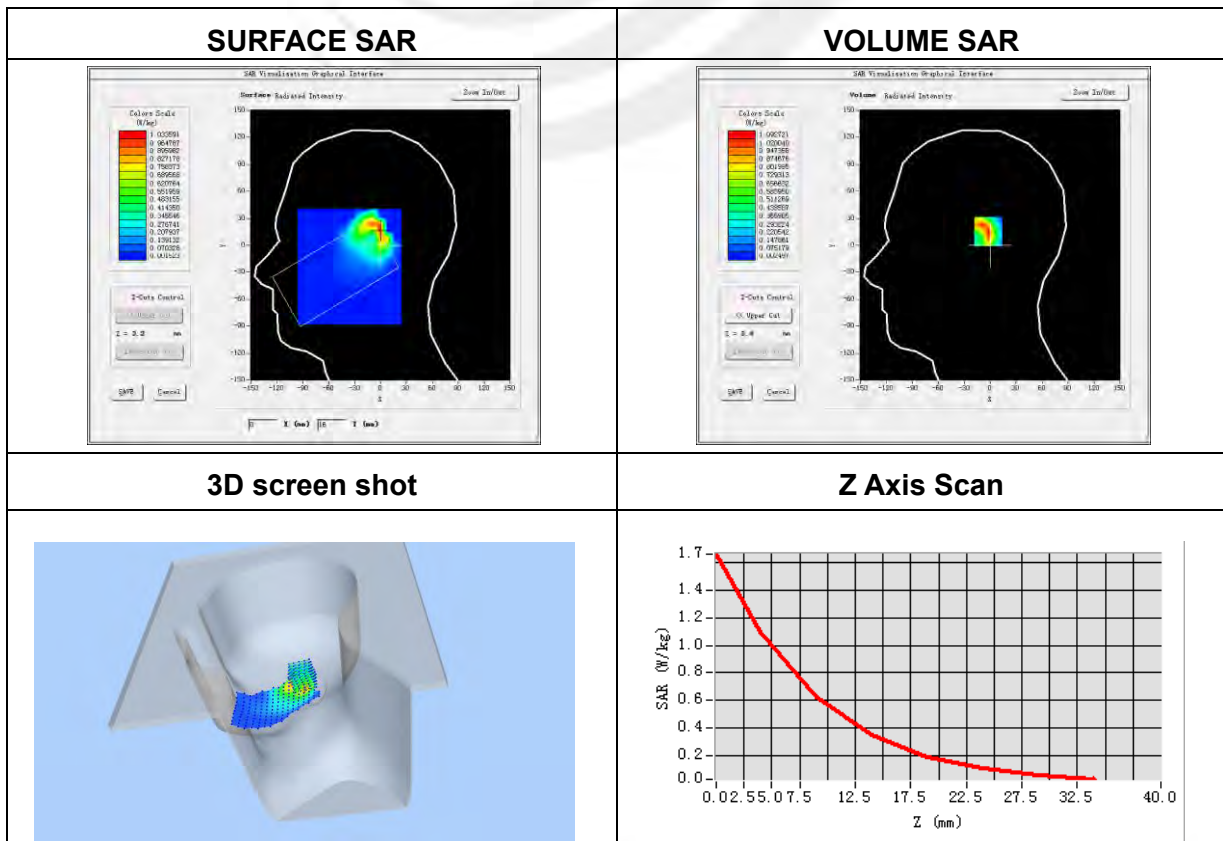


Plot 32: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA IV
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1732.0
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	4.48

Maximum location: X=-21.00, Y=16.00

SAR Peak: 1.10 W/kg

SAR 10g (W/Kg)	0.625958
SAR 1g (W/Kg)	0.803106

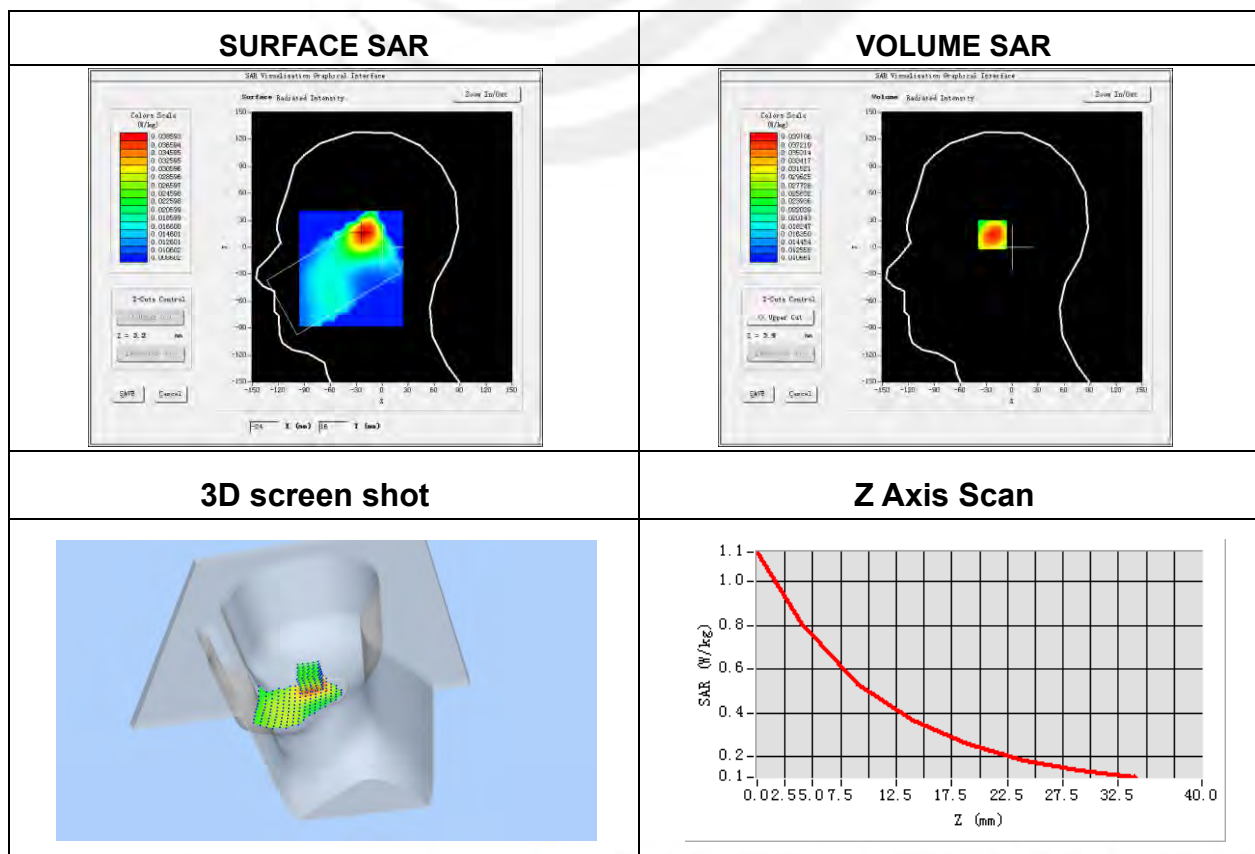


Plot 33: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA IV
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.6
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	-3.36

Maximum location: X=2.00, Y=15.00

SAR Peak: 2.04 W/kg

SAR 10g (W/Kg)	0.589049
SAR 1g (W/Kg)	1.180323

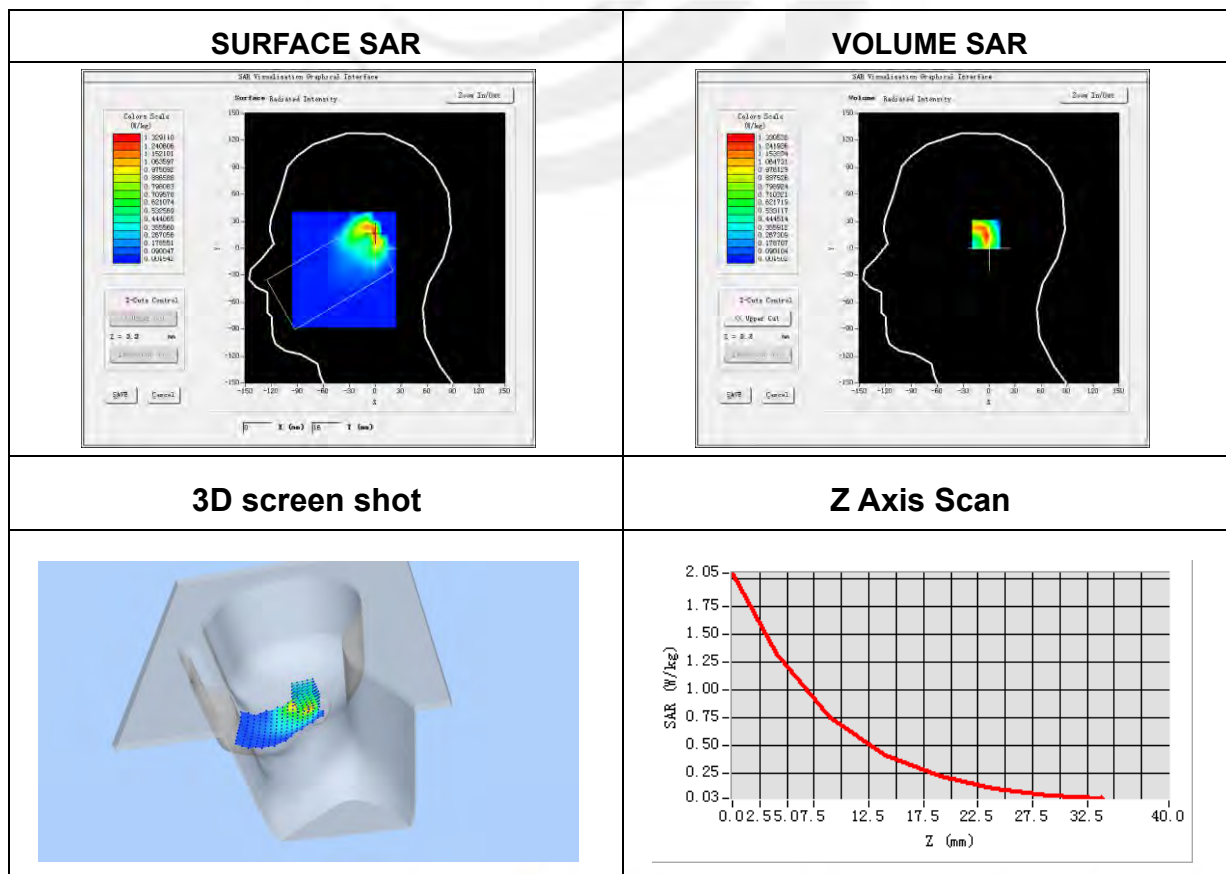


Plot 34: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head-Repeated
Device Position	Cheek
Band	WCDMA IV
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.6
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	0.30

Maximum location: X=2.00, Y=14.00

SAR Peak: 1.80 W/kg

SAR 10g (W/Kg)	0.751673
SAR 1g (W/Kg)	1.062343

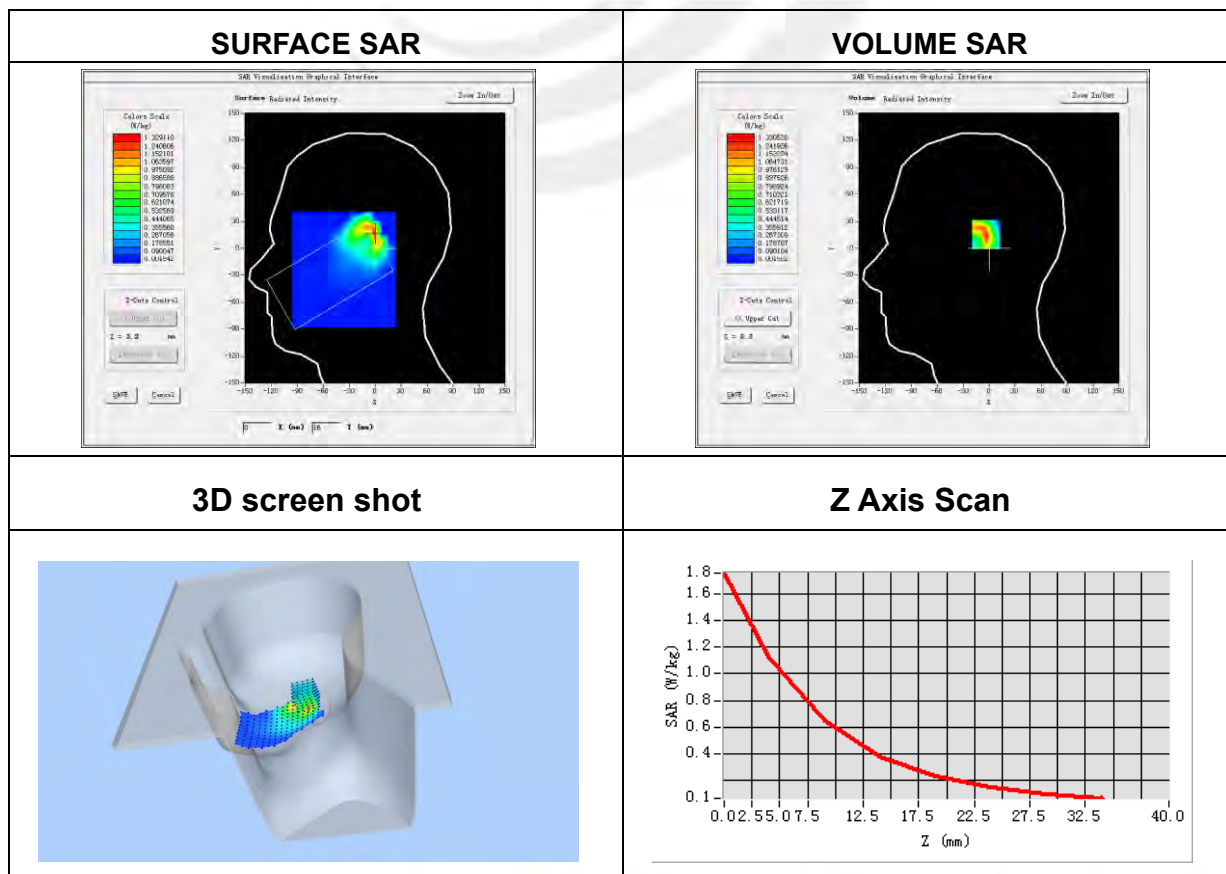


Plot 35: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Tilt
Band	WCDMA IV
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.6
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	0.55

Maximum location: X=-5.00, Y=14.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.365248
SAR 1g (W/Kg)	0.517381

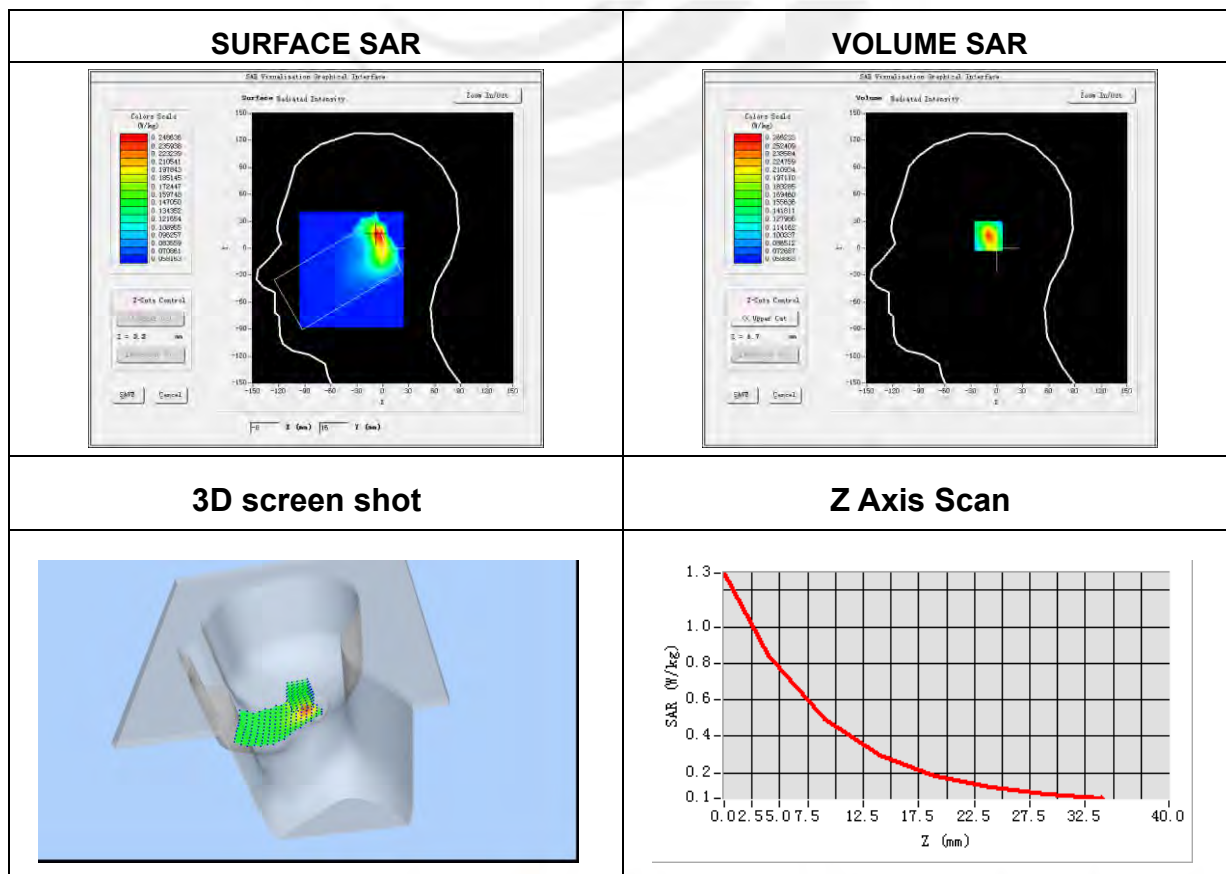


Plot 36: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA IV
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.6
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	2.62

Maximum location: X=-15.00, Y=8.00

SAR Peak: 1.64 W/kg

SAR 10g (W/Kg)	0.463824
SAR 1g (W/Kg)	0.718342

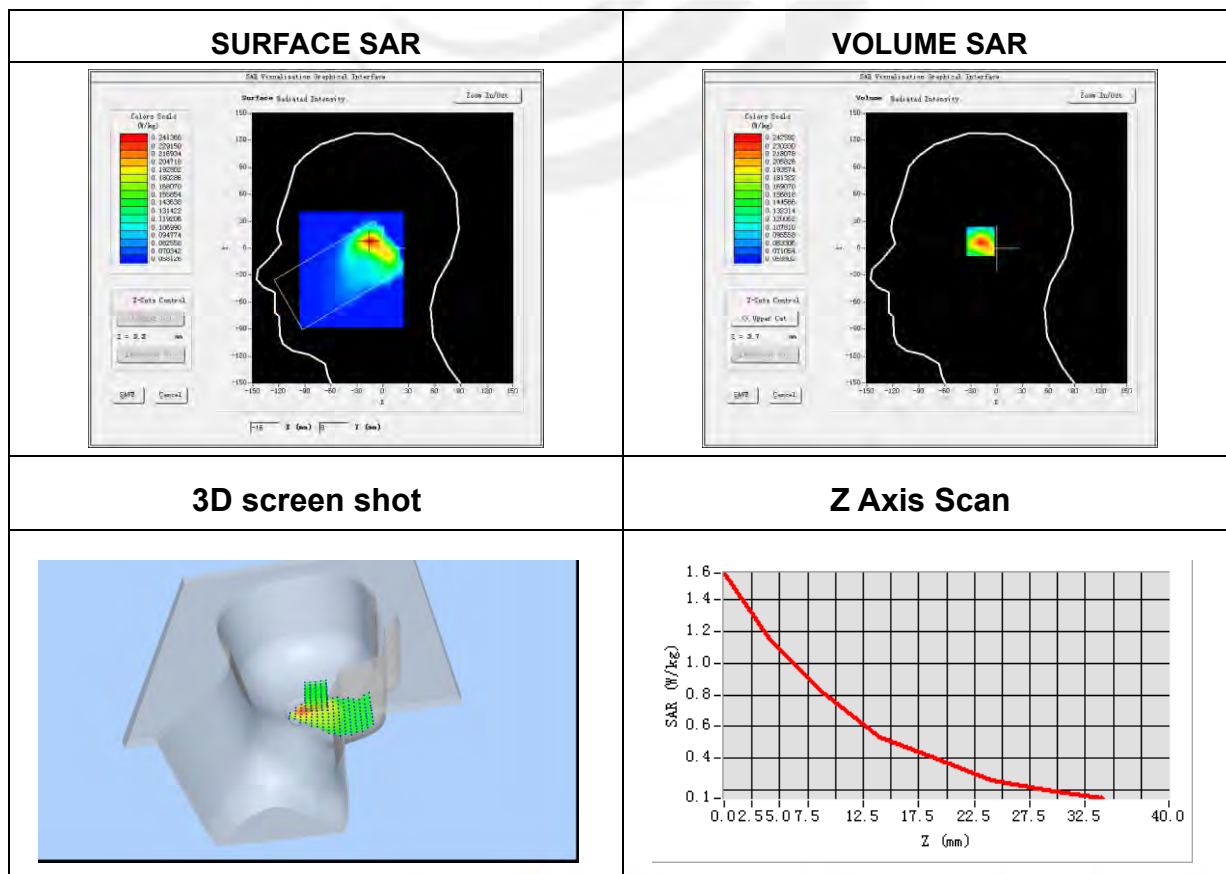


Plot 37: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Tilt
Band	WCDMA IV
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.6
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	-1.74

Maximum location: X=-8.00, Y=8.00

SAR Peak: 0.92 W/kg

SAR 10g (W/Kg)	0.296438
SAR 1g (W/Kg)	0.543876

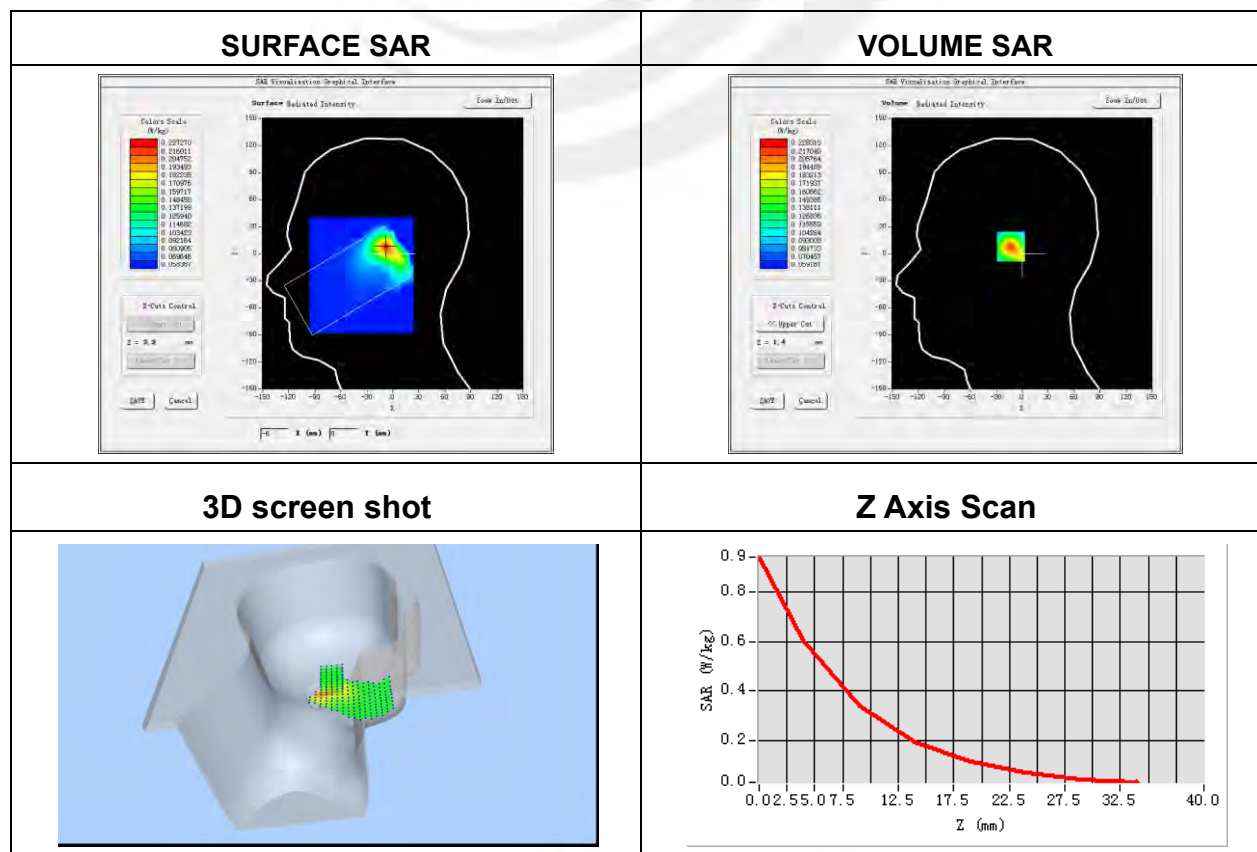


Plot 38: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.34
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Front
Band	WCDMA IV
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.6
Relative permittivity (real part)	39.71
Conductivity (S/m)	1.40
Variation (%)	-1.69

Maximum location: X=-8.00, Y=1.00

SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.149077
SAR 1g (W/Kg)	0.267516

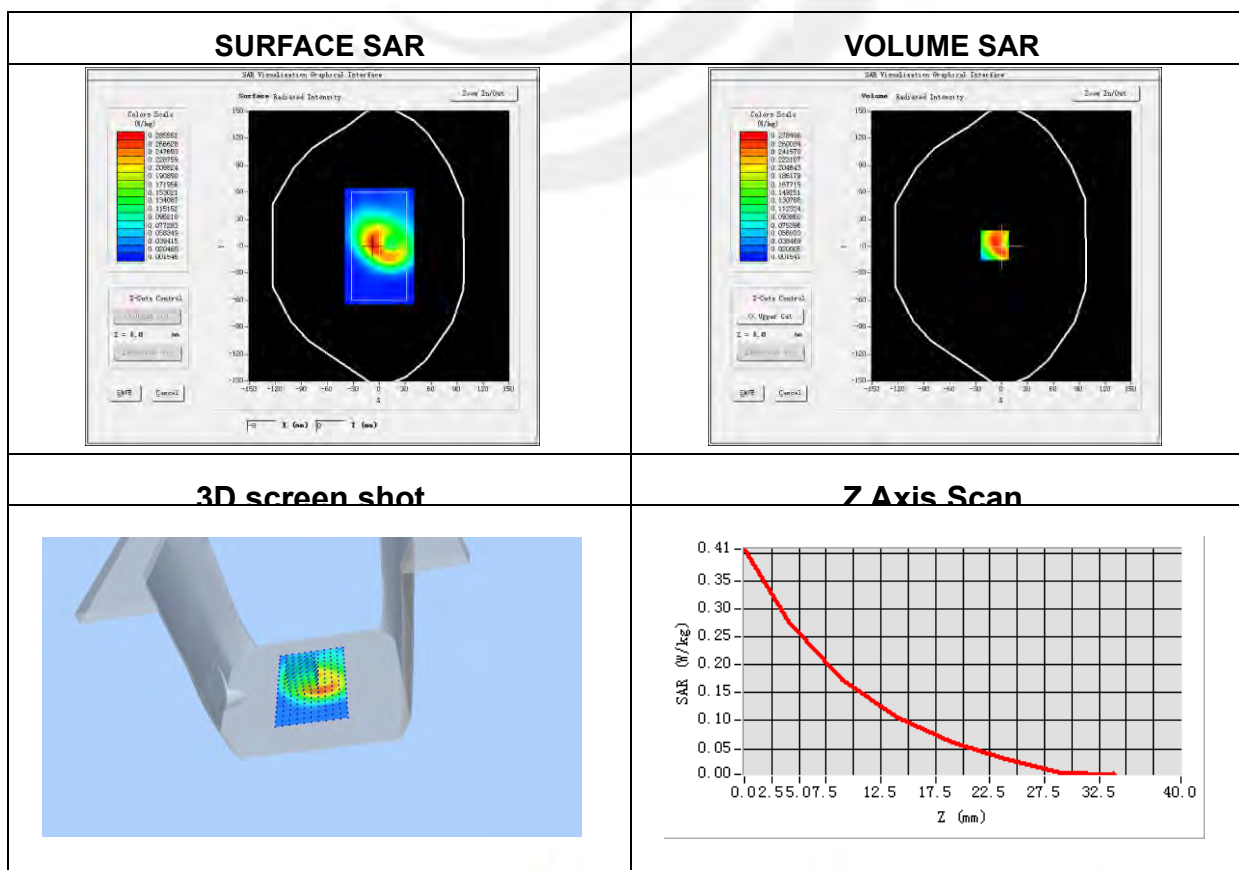


Plot 39: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.34
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	WCDMA IV
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.6
Relative permittivity (real part)	39.71
Conductivity (S/m)	1.40
Variation (%)	-2.77

Maximum location: X=-9.00, Y=-9.00

SAR Peak: 1.02 W/kg

SAR 10g (W/Kg)	0.325459
SAR 1g (W/Kg)	0.648107

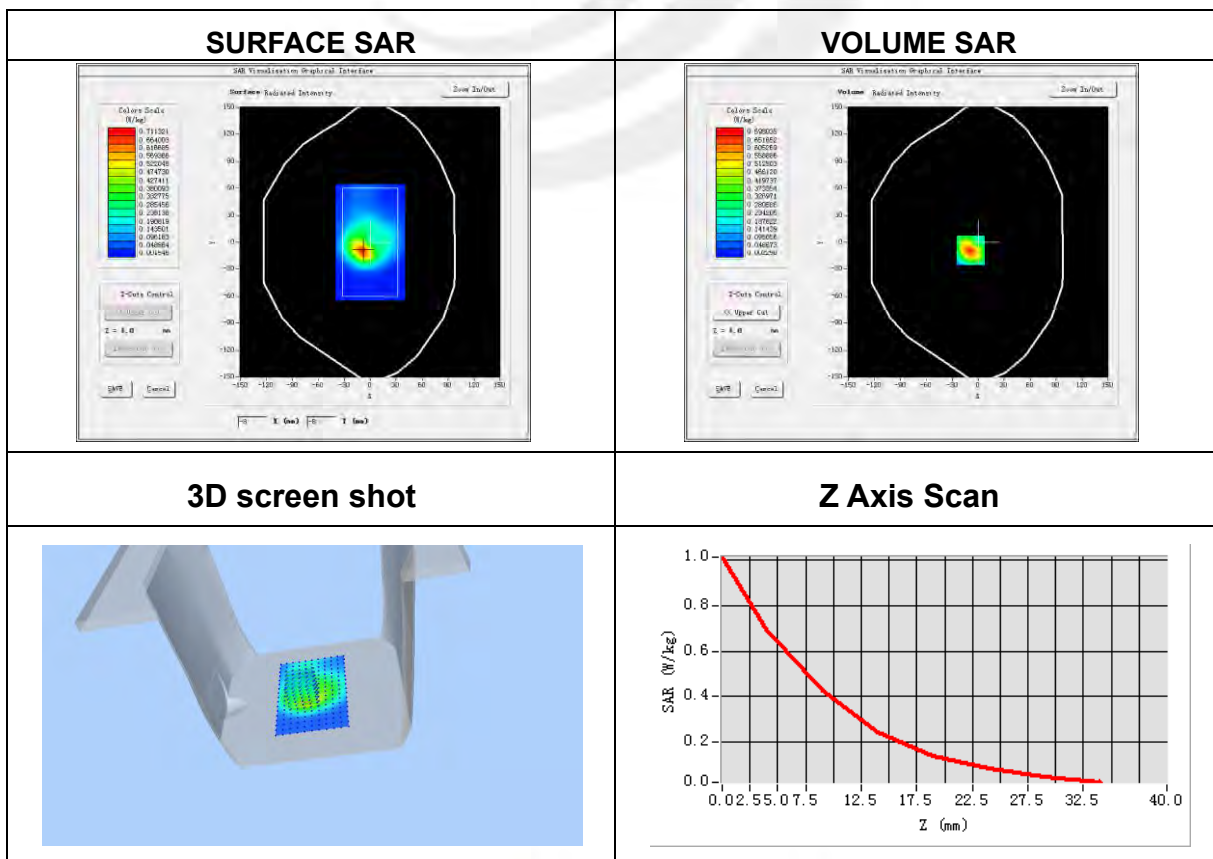


Plot 40: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.34
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body left side
Band	WCDMA IV
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.6
Relative permittivity (real part)	39.71
Conductivity (S/m)	1.40
Variation (%)	-0.69

Maximum location: X=-7.00, Y=9.00
SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.136093
SAR 1g (W/Kg)	0.260903

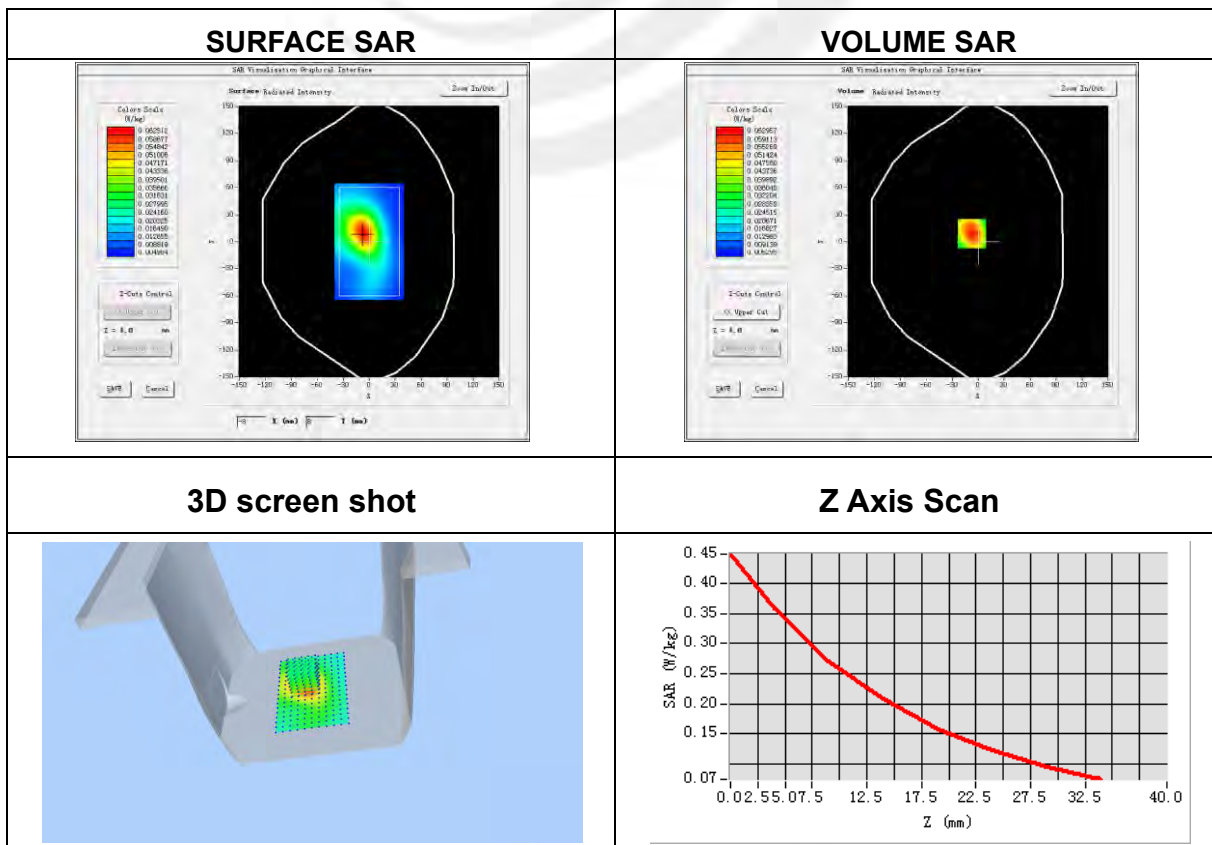


Plot 41: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.34
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body top side
Band	WCDMA IV
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.6
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43
Variation (%)	-0.24

Maximum location: X=15.00, Y=-2.00

SAR Peak: 0.39 W/kg

SAR 10g (W/Kg)	0.104972
SAR 1g (W/Kg)	0.213634

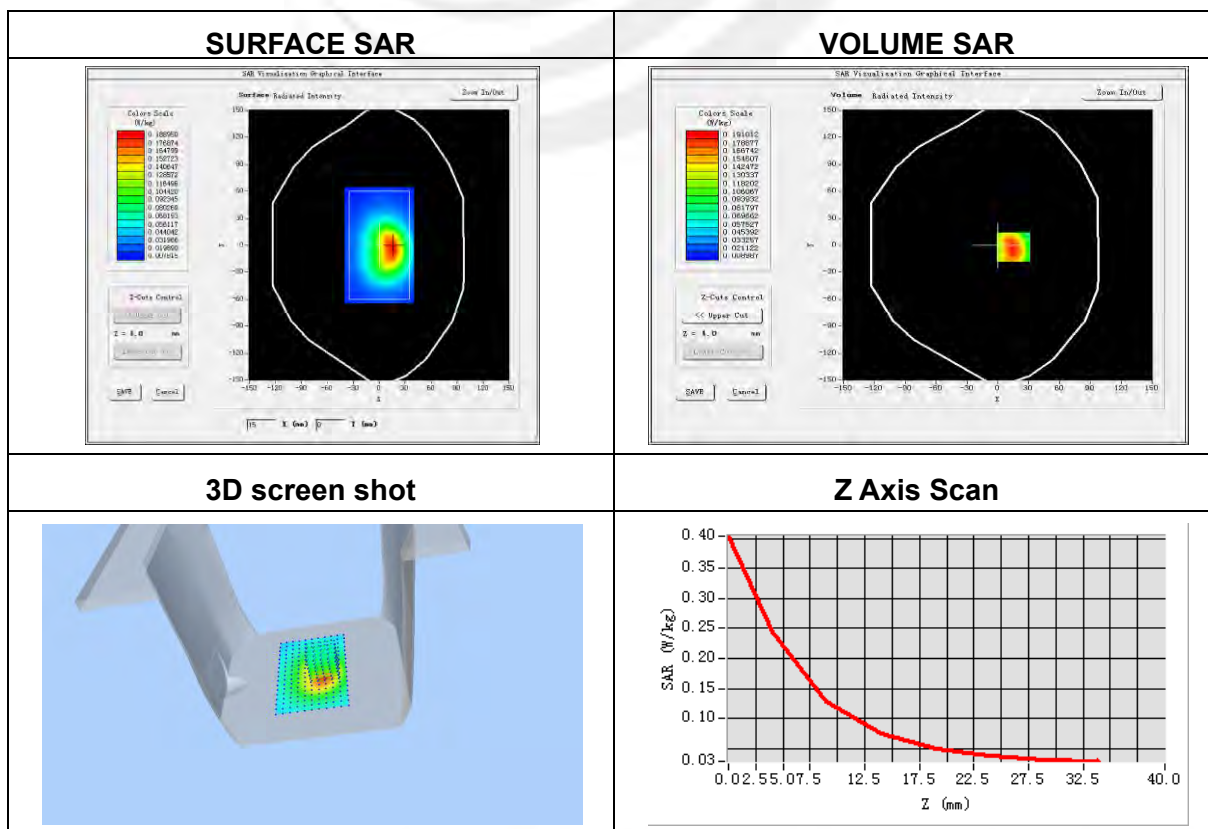


Plot 42: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.91
Variation (%)	-0.50

Maximum location: X=-24.00, Y=2.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.062858
SAR 1g (W/Kg)	0.111188

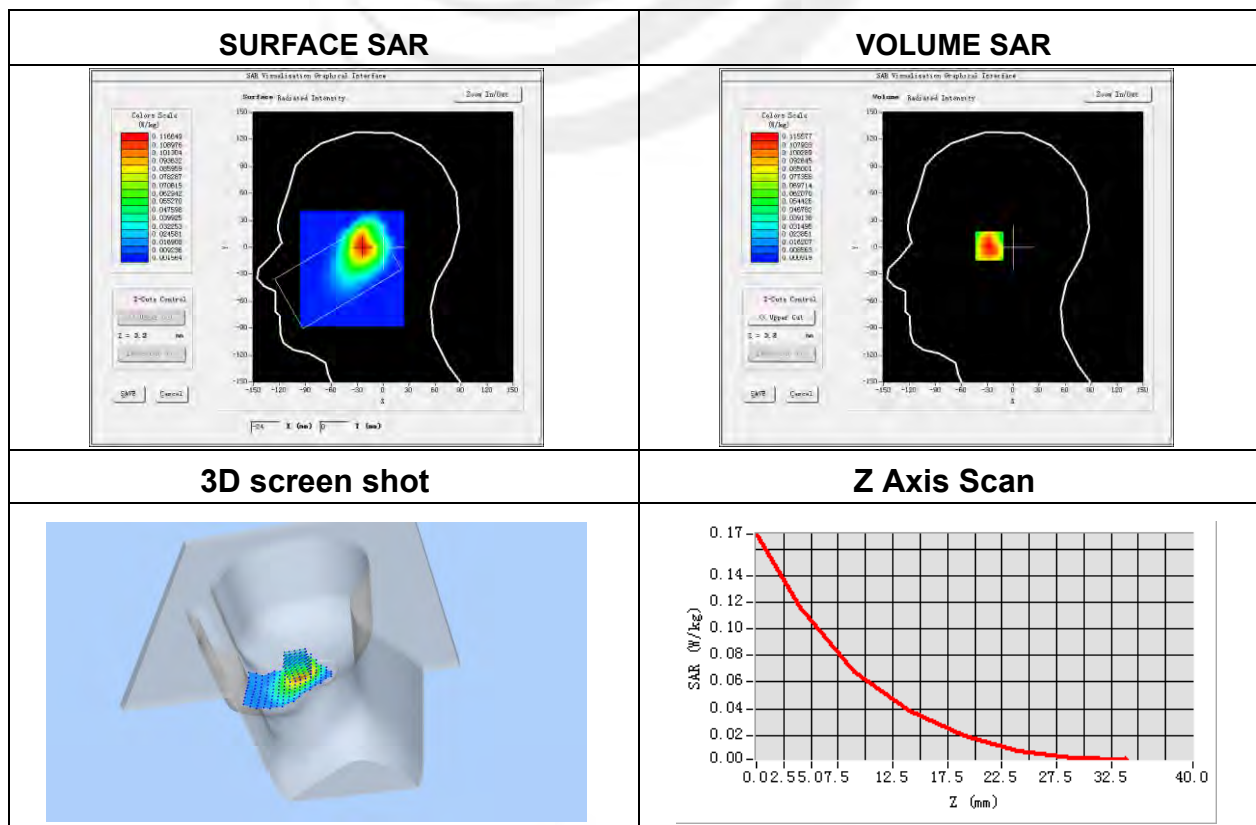


Plot 43: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Tilt
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.91
Variation (%)	-2.36

Maximum location: X=-24.00, Y=8.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.048209
SAR 1g (W/Kg)	0.092671

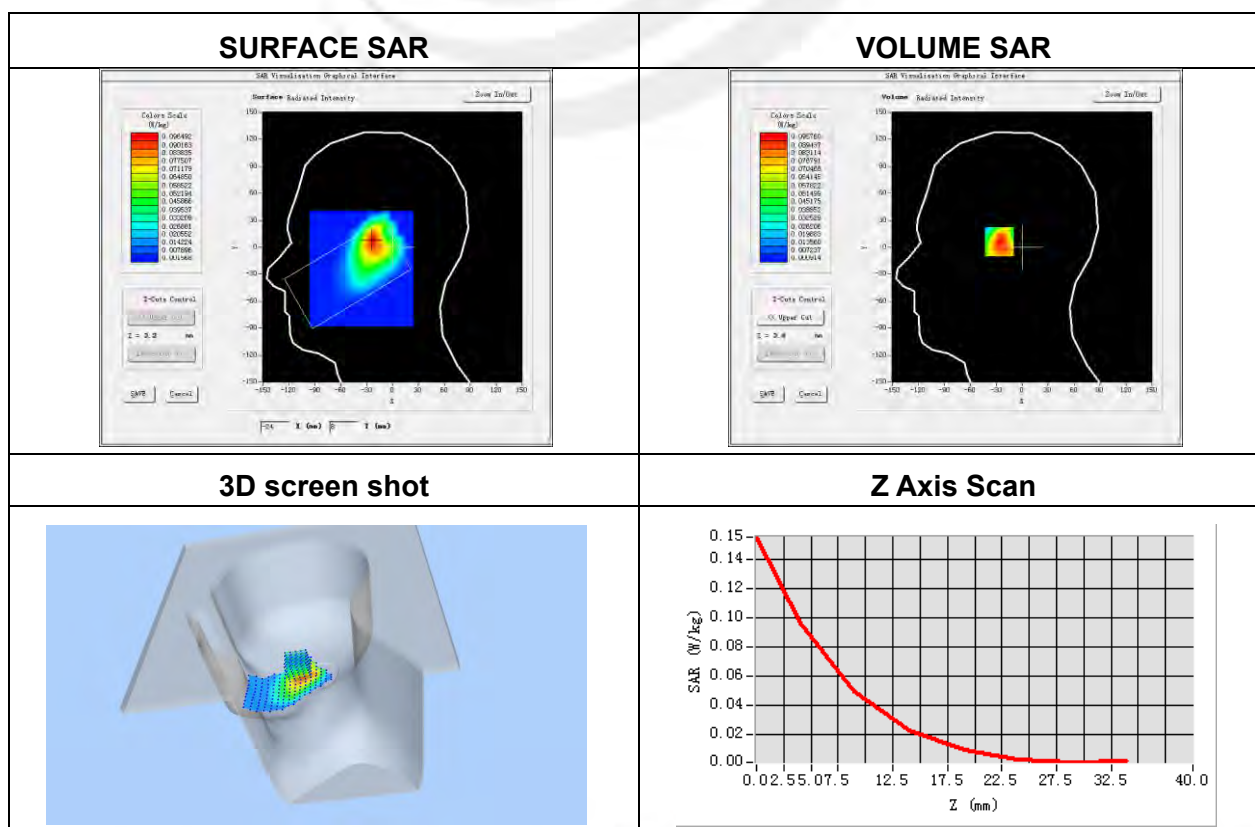


Plot 44: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.91
Variation (%)	2.12

Maximum location: X=-10.00, Y=-17.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.042367
SAR 1g (W/Kg)	0.076101

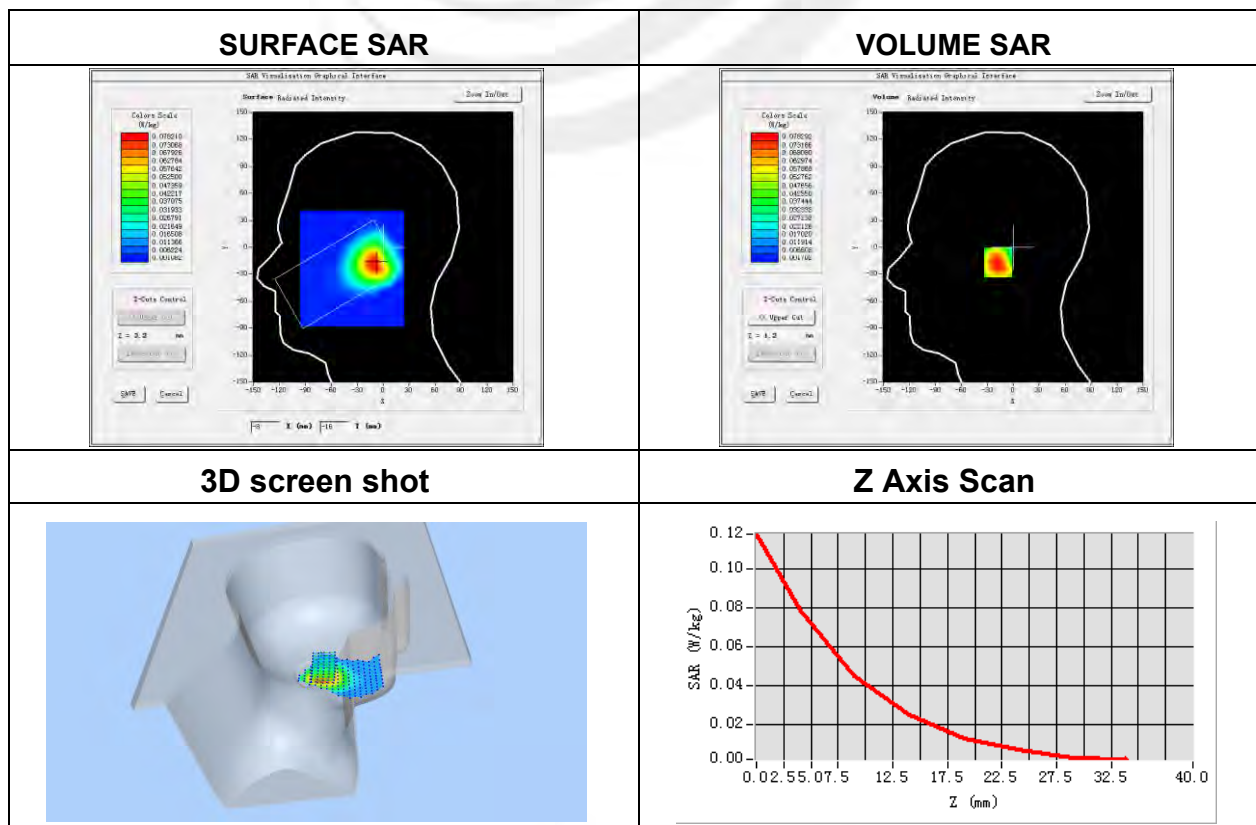


Plot 45: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	4.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Tilt
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.91
Variation (%)	2.64

Maximum location: X=-14.00, Y=-8.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.033544
SAR 1g (W/Kg)	0.061792

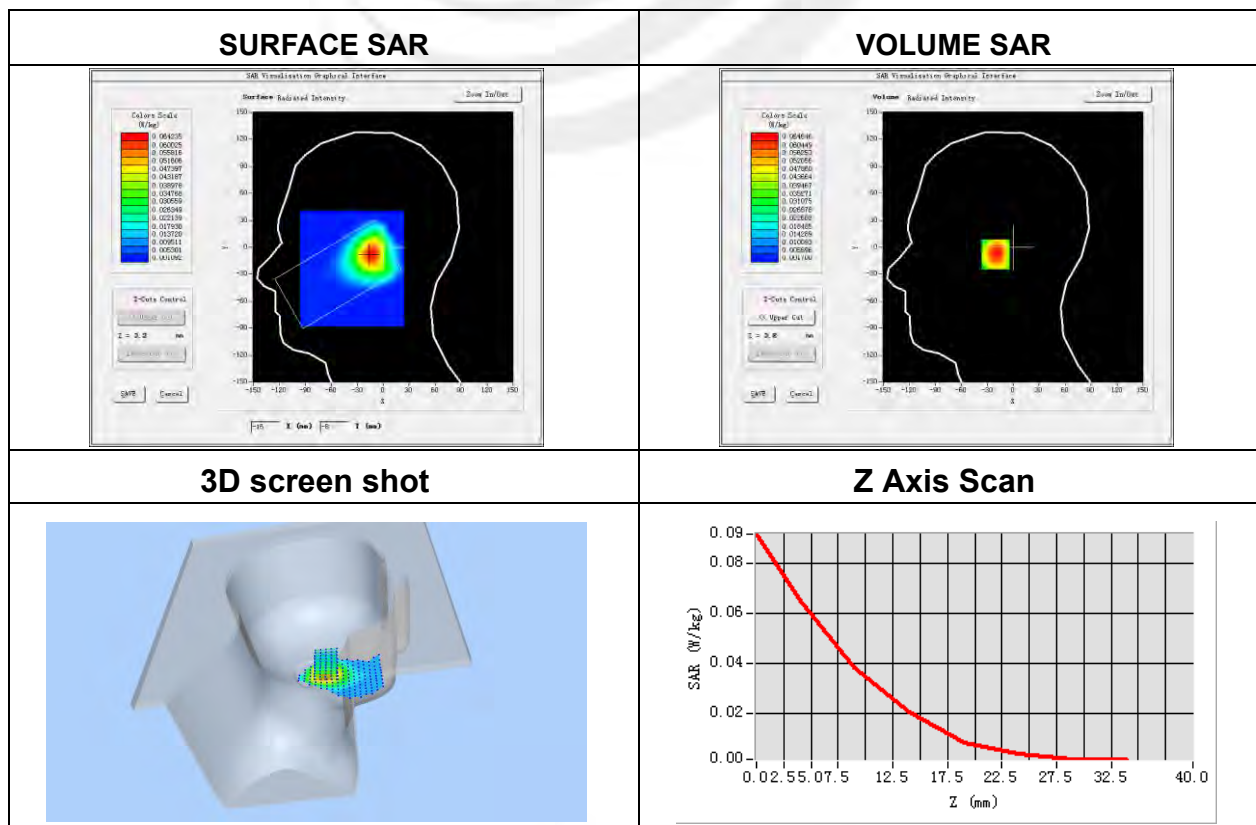


Plot 46: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	5.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body front
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	55.5
Conductivity (S/m)	0.96
Variation (%)	1.44

Maximum location: X=15.00, Y=-6.00

SAR Peak: 0.07 W/kg

SAR 10g (W/Kg)	0.023313
SAR 1g (W/Kg)	0.040519

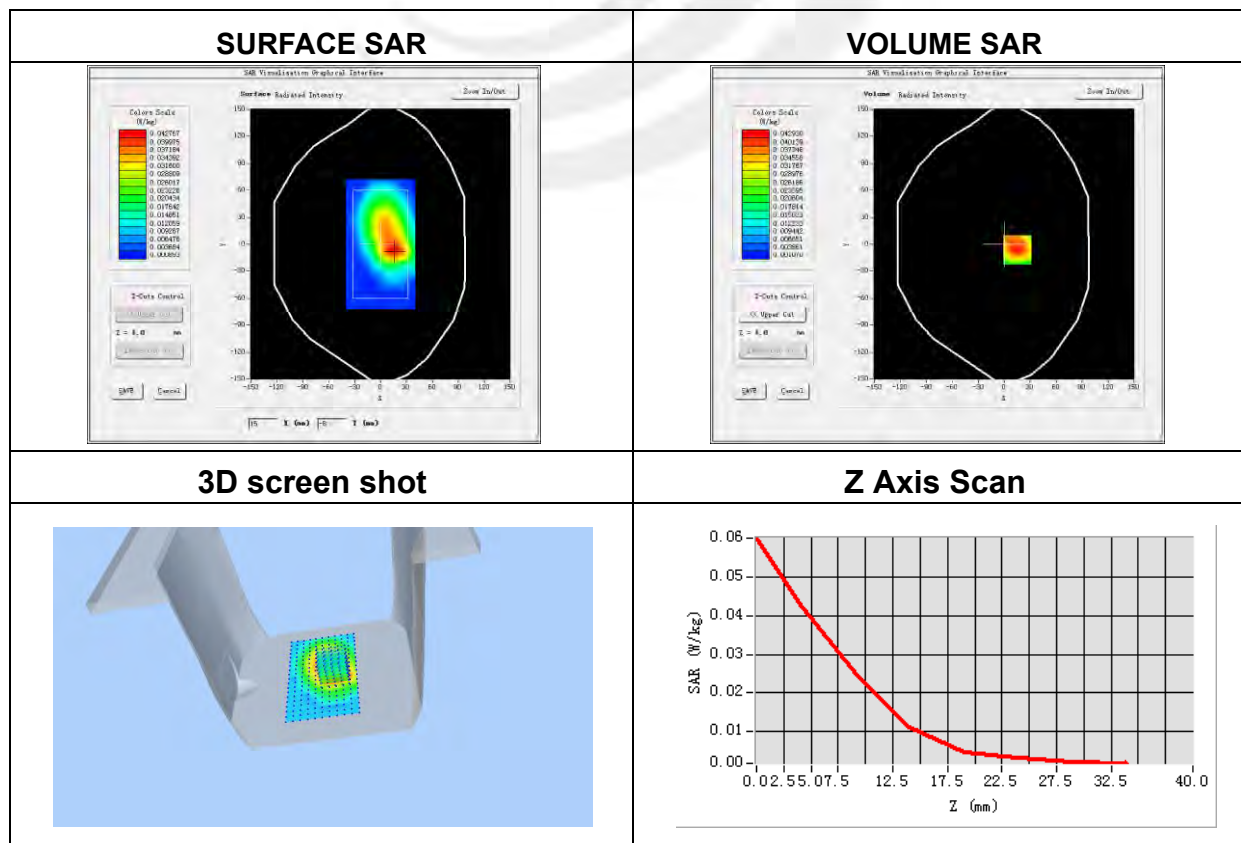


Plot 47: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	5.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	55.5
Conductivity (S/m)	0.96
Variation (%)	2.21

Maximum location: X=5.00, Y=2.00

SAR Peak: 0.13 W/kg

SAR 10g (W/Kg)	0.057065
SAR 1g (W/Kg)	0.089231

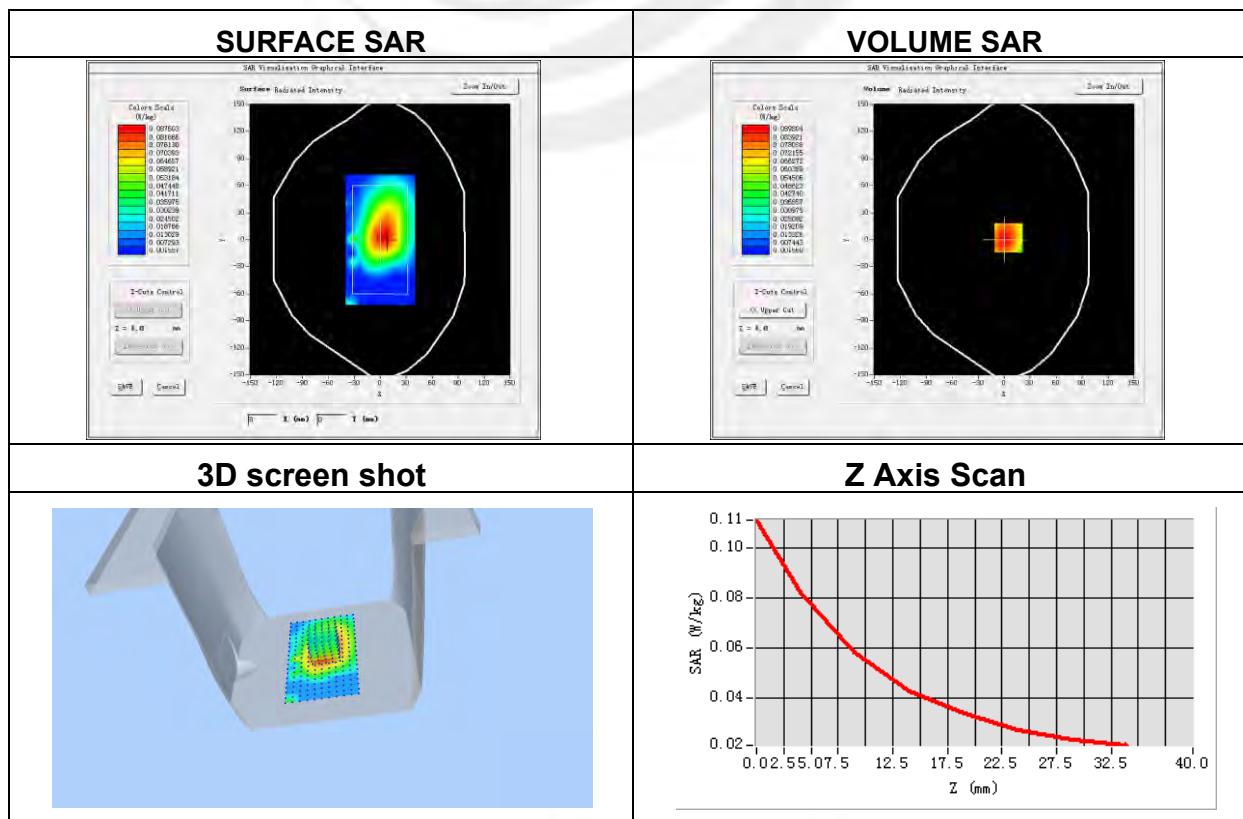


Plot 48: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	5.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body left side
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	55.5
Conductivity (S/m)	0.96
Variation (%)	4.09

Maximum location: X=1.00, Y=-8.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.037006
SAR 1g (W/Kg)	0.069261

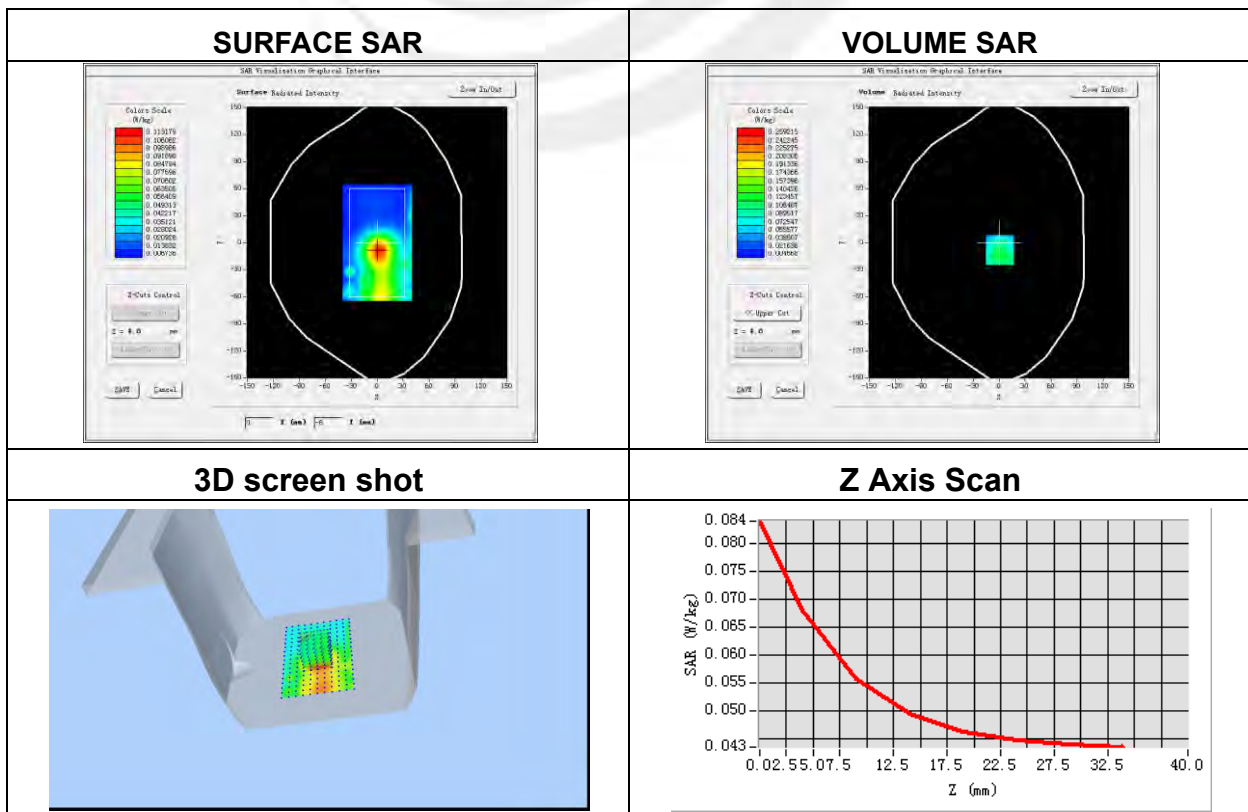


Plot 49: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Ambient Temperature(℃)	22.70
Liquid Temperature(℃)	22.30
Probe	SN 17/14 EP221
ConvF	5.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body top side
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	55.5
Conductivity (S/m)	0.96
Variation (%)	-2.04

Maximum location: X=7.00, Y=3.00

SAR Peak: 0.03 W/kg

SAR 10g (W/Kg)	0.005301
SAR 1g (W/Kg)	0.012421

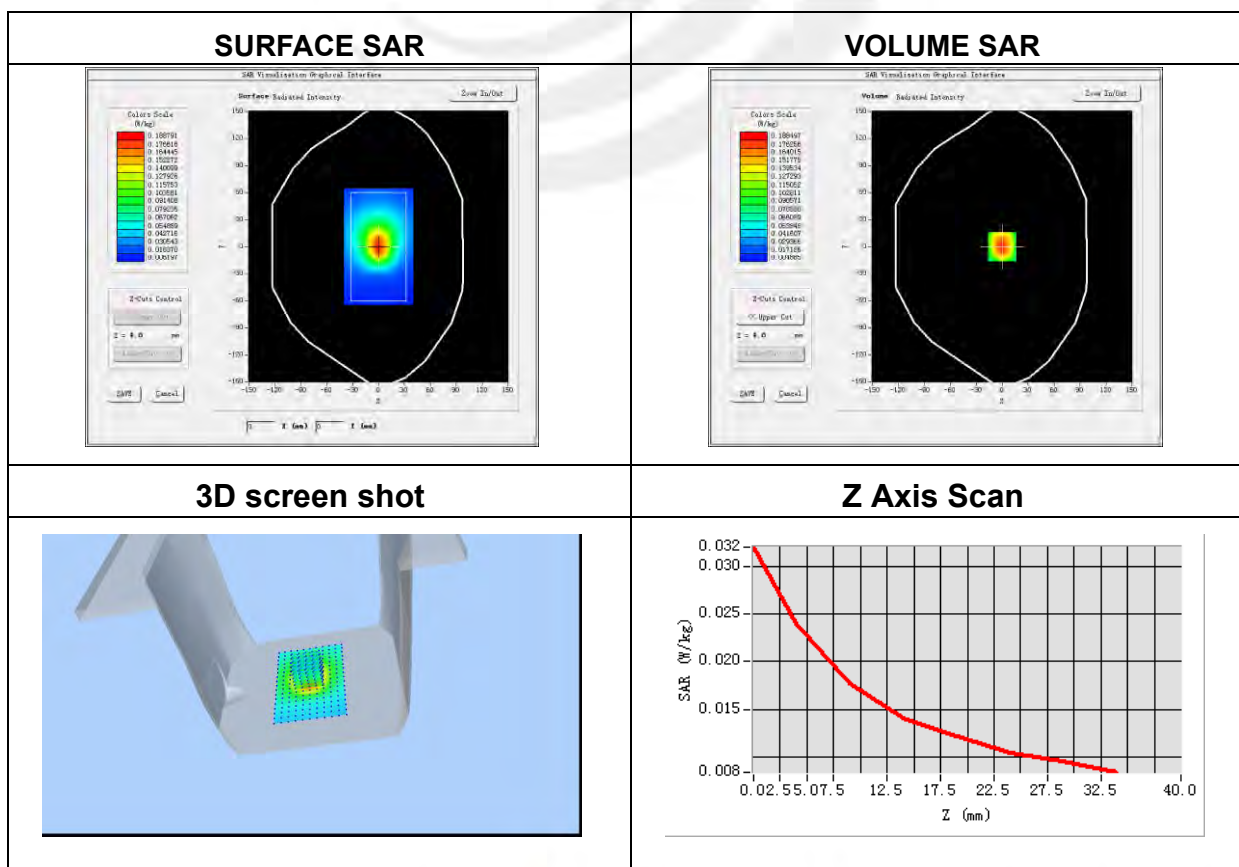


Plot 50: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Probe	SN 17/14 EP221
ConvF	4.11
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	Middle
Signal	<u>IEEE802.b (Crest factor: 1.0)</u>
Frequency (MHz)	2437
Relative permittivity (real part)	37.8
Conductivity (S/m)	1.86
Variation (%)	-1.53

Maximum location: X=-17.00, Y=16.00
SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.039243
SAR 1g (W/Kg)	0.115581

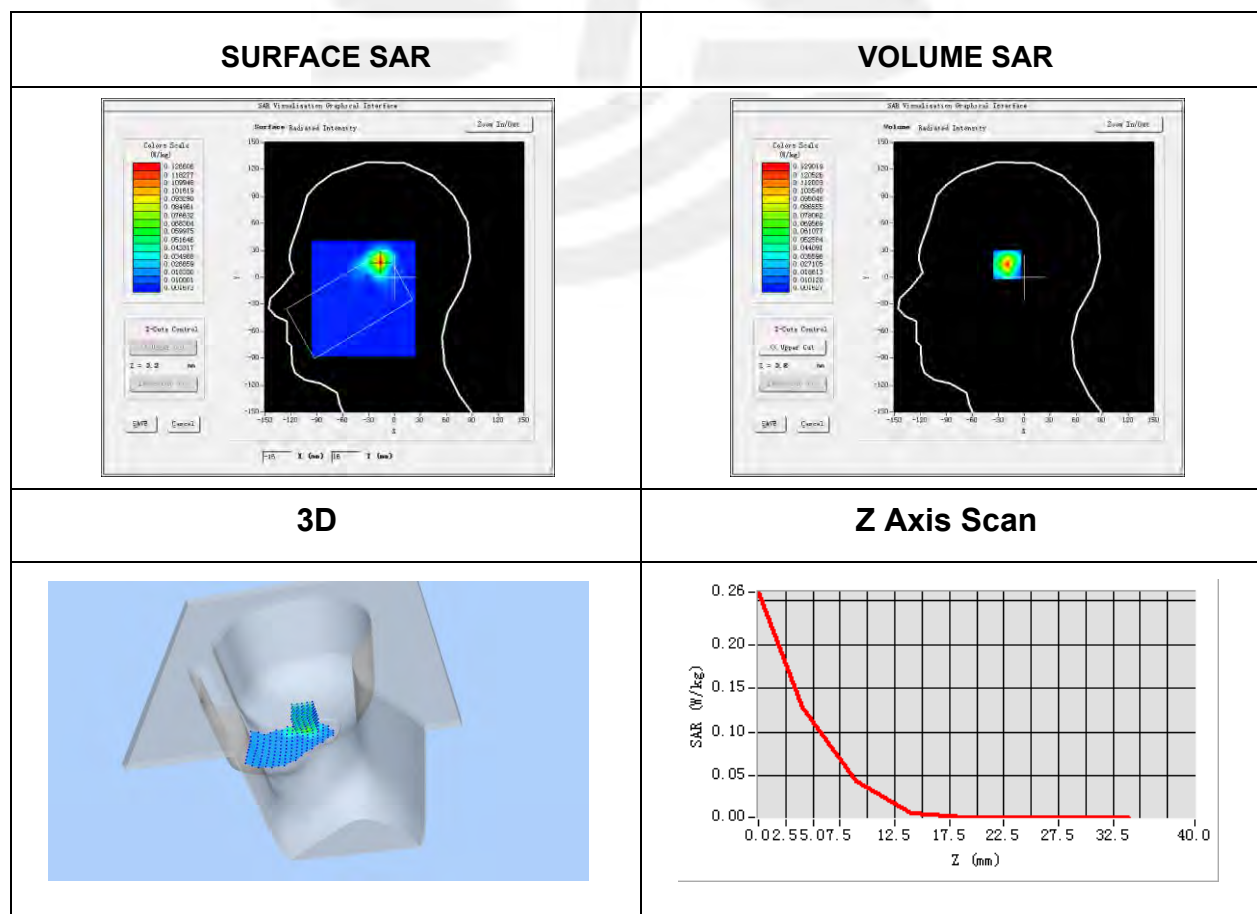


Plot 51: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Probe	SN 17/14 EP221
ConvF	4.11
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11b ISM
Channels	Middle
Signal	<u>IEEE802.b (Crest factor: 1.0)</u>
Frequency (MHz)	2437
Relative permittivity (real part)	37.8
Conductivity (S/m)	1.86
Variation (%)	1.10

Maximum location: X=-17.00, Y=16.00
SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.023839
SAR 1g (W/Kg)	0.070091

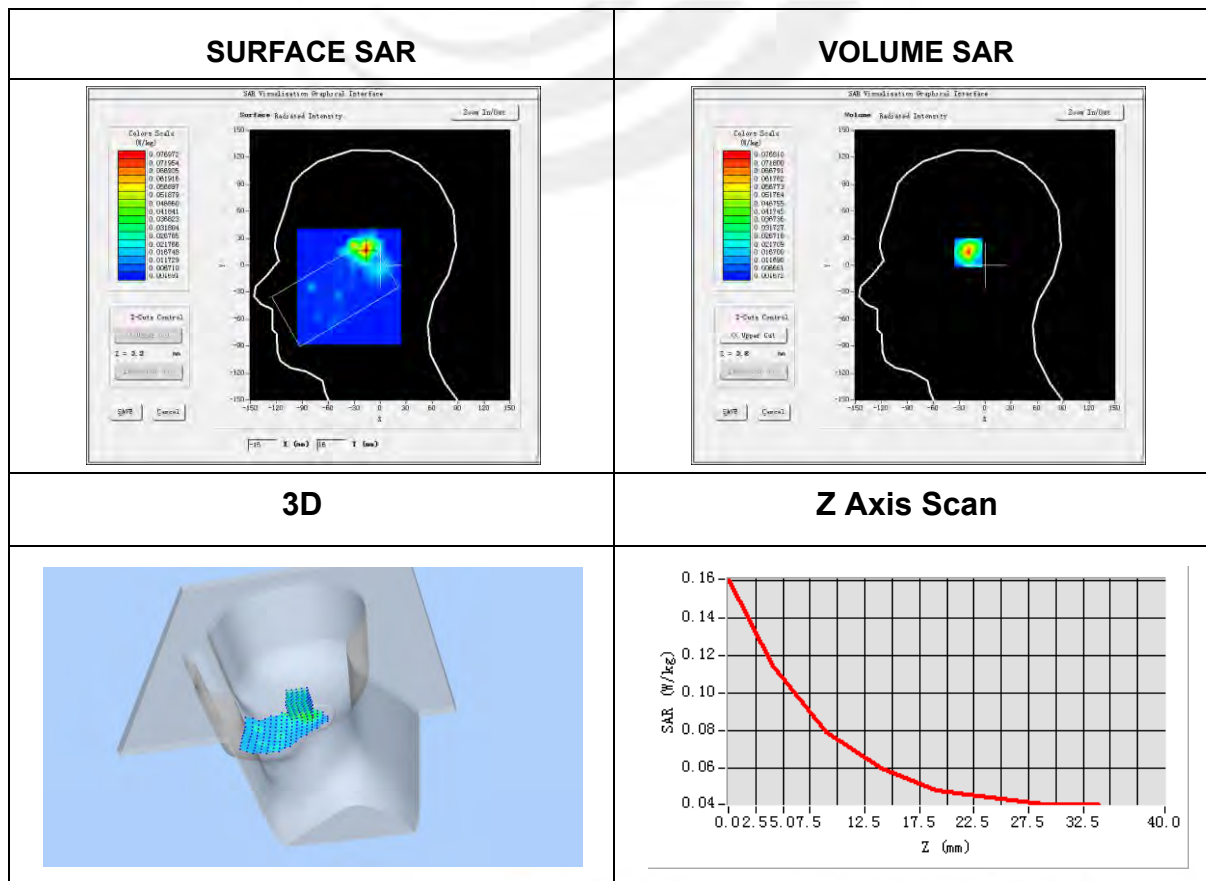


Plot 52: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Probe	SN 17/14 EP221
ConvF	4.11
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	Middle
Signal	<u>IEEE802.b (Crest factor: 1.0)</u>
Frequency (MHz)	2437
Relative permittivity (real part)	37.8
Conductivity (S/m)	1.86
Variation (%)	-3.05

Maximum location: X=0.00, Y=-20.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.015814
SAR 1g (W/Kg)	0.044411

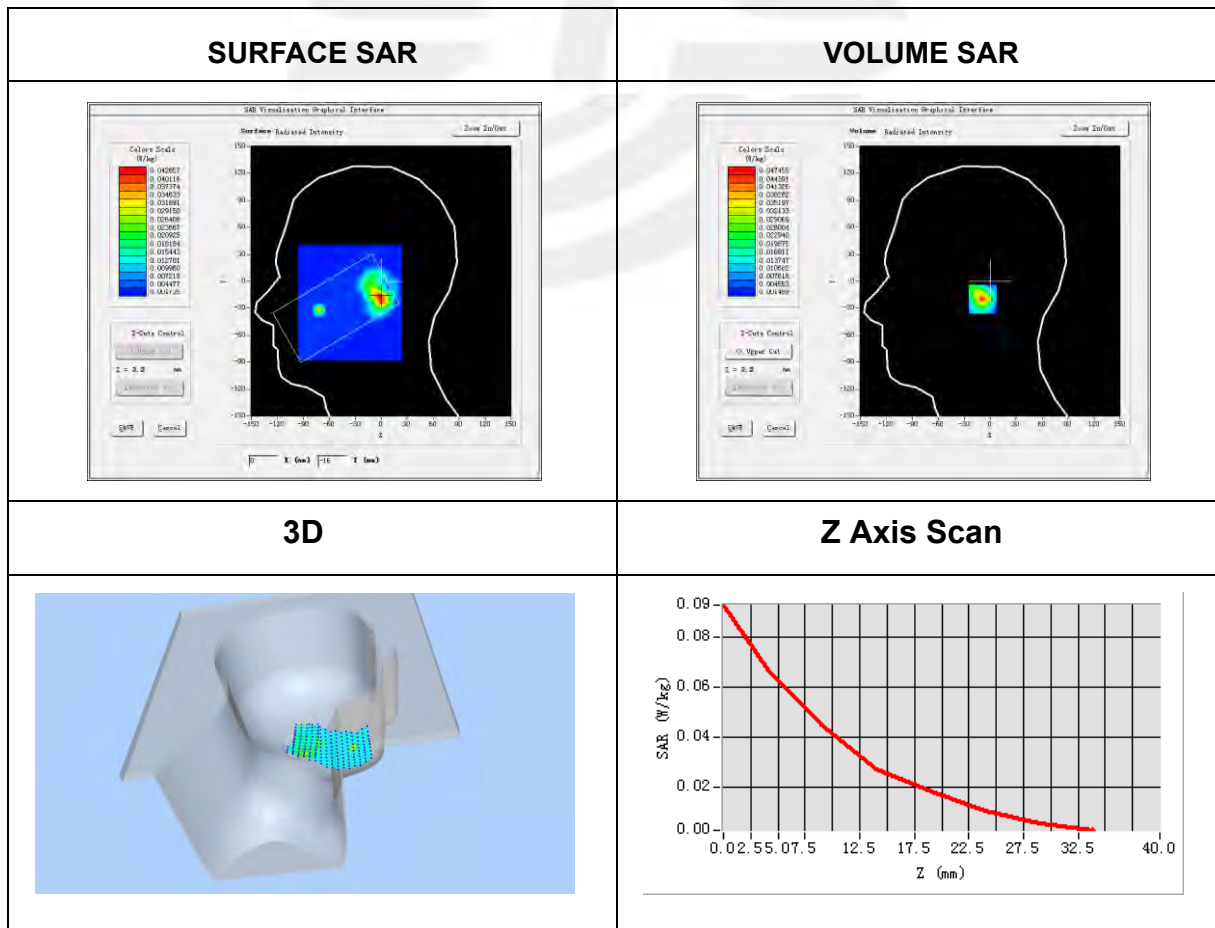


Plot 53: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Probe	SN 17/14 EP221
ConvF	4.11
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11b ISM
Channels	Middle
Signal	<u>IEEE802.b (Crest factor: 1.0)</u>
Frequency (MHz)	2437
Relative permittivity (real part)	37.8
Conductivity (S/m)	1.86
Variation (%)	-1.17

Maximum location: X=-1.00, Y=8.00
SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.009371
SAR 1g (W/Kg)	0.028991

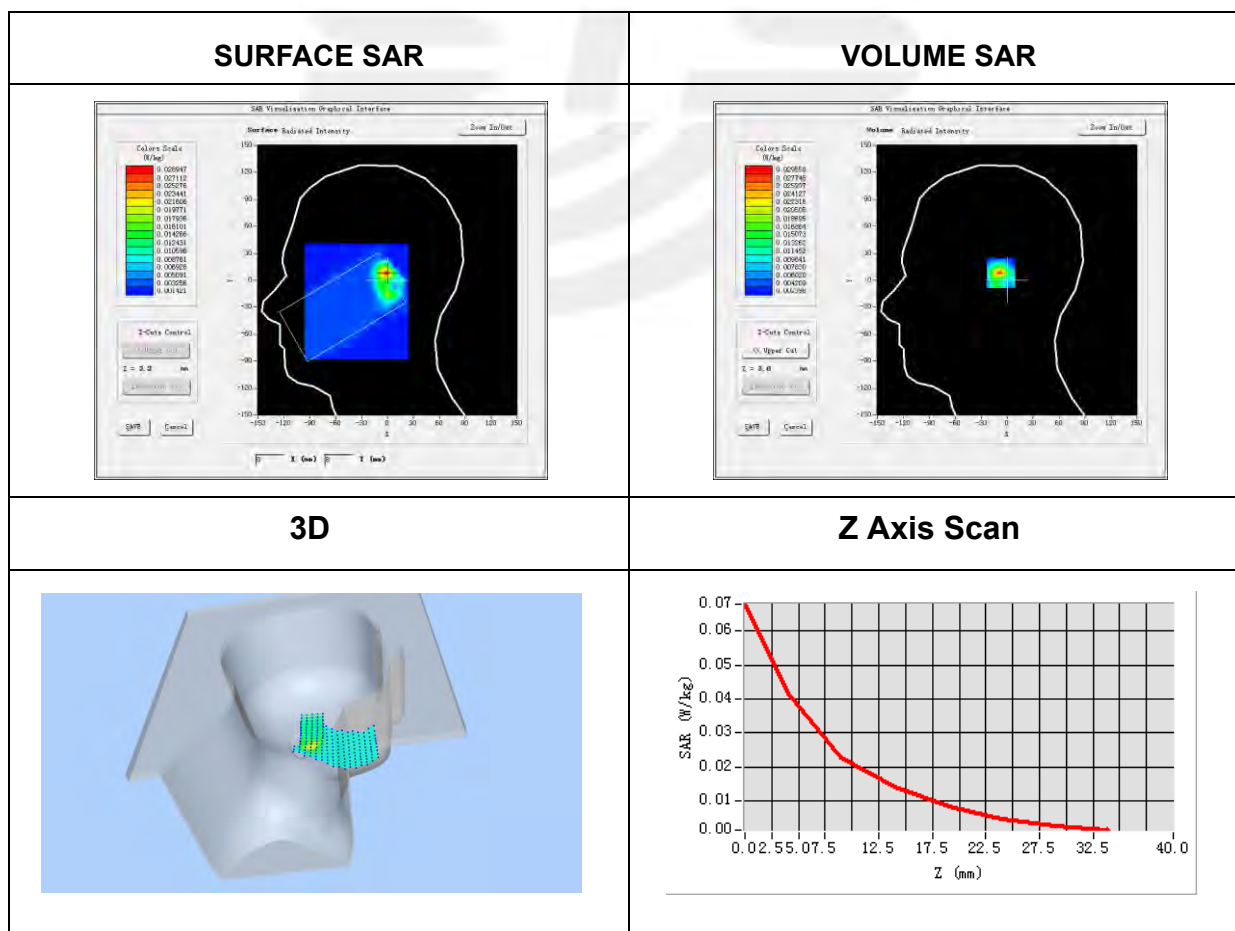


Plot 54: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Front side
Band	IEEE 802.11b ISM
Channels	Middle
Signal	<u>IEEE802.b (Crest factor: 1.0)</u>
Frequency (MHz)	2437
Relative permittivity (real part)	51.2
Conductivity (S/m)	1.95
Variation (%)	-0.50

Maximum location: X=25.00, Y=-13.00

SAR Peak: 0.04 W/kg

SAR 10g (W/Kg)	0.006102
SAR 1g (W/Kg)	0.015373

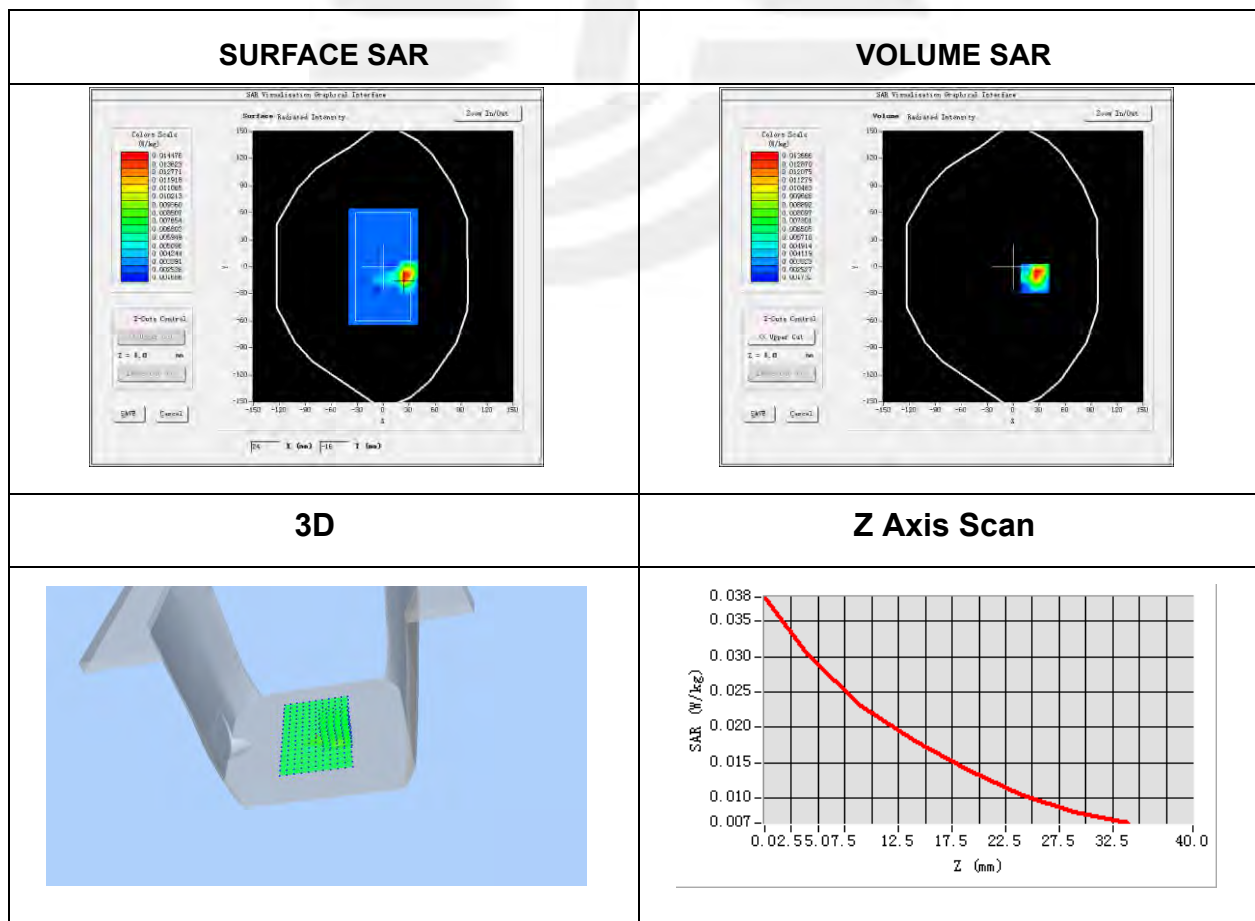


Plot 55: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	IEEE 802.11b ISM
Channels	Middle
Signal	<u>IEEE802.b (Crest factor: 1.0)</u>
Frequency (MHz)	2437
Relative permittivity (real part)	51.2
Conductivity (S/m)	1.95
Variation (%)	2.09

Maximum location: X=-16.00, Y=-8.00
SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.030333
SAR 1g (W/Kg)	0.076774

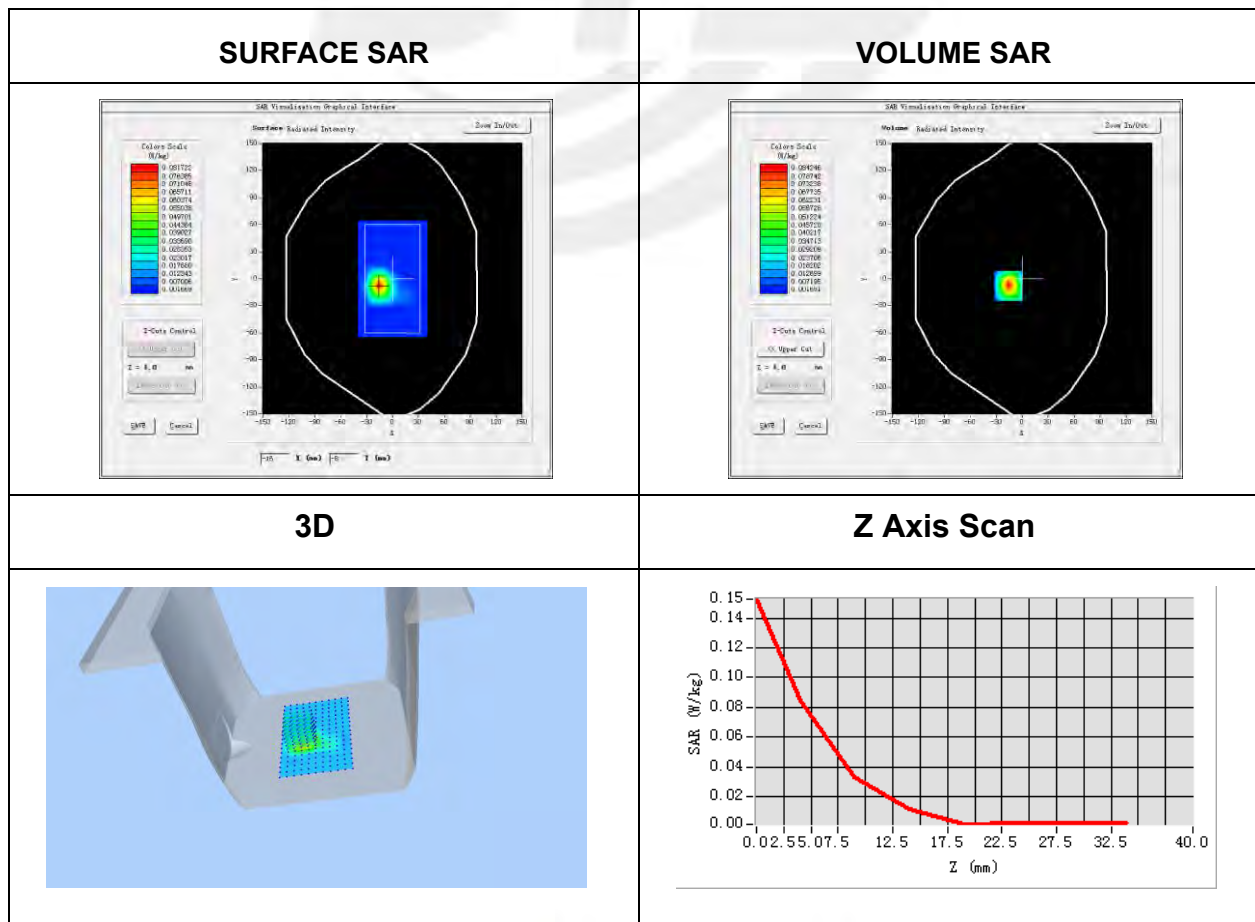


Plot 56: DUT: 3G Smart Phone; EUT Model: i422

Test Data	2016-01-16
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body left side
Band	IEEE 802.11b ISM
Channels	High
Signal	<u>IEEE802.b (Crest factor: 1.0)</u>
Frequency (MHz)	2462
Relative permittivity (real part)	51.2
Conductivity (S/m)	1.95
Variation (%)	-1.96

Maximum location: X=7.00, Y=-7.00
SAR Peak: 0.04 W/kg

SAR 10g (W/Kg)	0.006413
SAR 1g (W/Kg)	0.017600

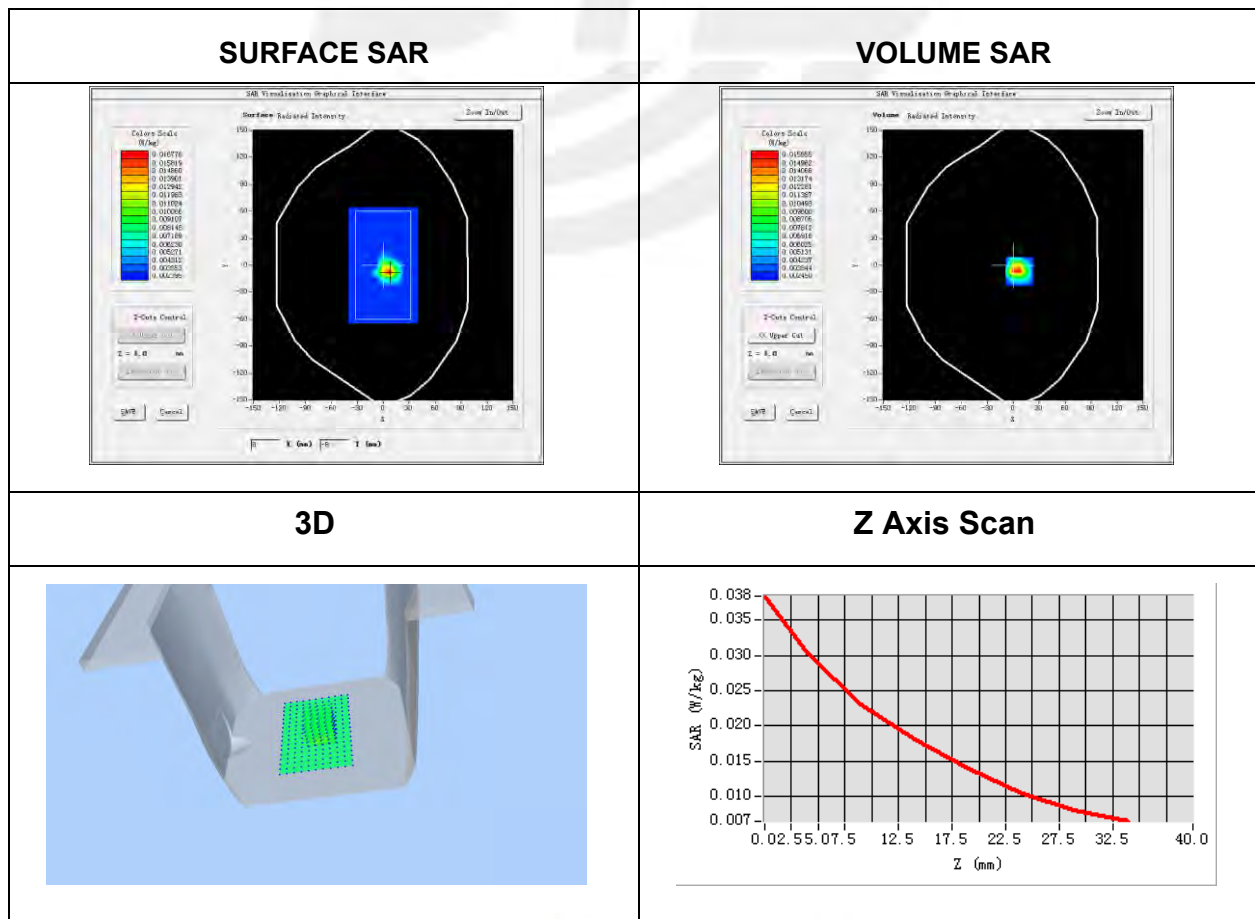



Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

