




TEST REPORT

APPLICANT:	GIOBERT S.P.A. Via Pavia 82 – 10098 RIVOLI (TO) - ITALY	
APPLICANT REFEREE:	Mr. Gianfranco Russo (gianfranco.russo@giobert.com)	
EUT DESCRIPTION	REMOTE KEYLESS ENTRY	
EUT MODEL	RKE22601	
EUT FCC ID	2ADPXRKE22601	
EUT TRADEMARK		
MANUFACTURER	Giobert do Brasil Sistemas Automotivos Ltda AV. VICENZO GRANGUELLI, 856 Bairro : Nassif, 13.820-000 Jaguariuna - São Paulo - BRASIL	
REFERENCE STANDARDS	47 CFR FCC part 15.231	
TEST REPORT NUMBER	FCCTR_161913-1	
TEST REPORT ISSUE DATE	12/01/2017	
TESTING LABORATORY	Prima Ricerca & Sviluppo S.r.l. Via Campagna, 92 -22020 Faloppio (Co) – Italy FCC test registration number: 421808	
TESTING LOCATION	As Above	
DATE OF TEST SAMPLE RECEIPT	13/10/2016	
NUMBER OF TESTED SAMPLES	1	
DATE OF TEST	13/10/2016	
TESTED BY	Giacomo ARMELLINI Responsabile Laboratorio EMC e RADIO/ EMC and RADIO Laboratory Manager	
APPROVED BY	Enrico BANFI Coordinatore Laboratori / Laboratory Manager	

The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
Reproduction of this Test Report, should not be reproduced, except in full, without the written authorization of the Laboratory

0. CONTENTS


	Page
0. CONTENTS	2
1. RELEASE CONTROL RECORD	2
2. TECHNICAL INFORMATION OF EQUIPMENT UNDER TEST (EUT).....	3
2.1 Identification	3
2.2 Technical data	3
2.3 Ports identification	4
2.4 Auxiliary equipment	4
3. OPERATING TEST MODES AND CONDITIONS	5
4. REFERENCE STANDARD / DOCUMENT FOR PERFORMED TESTS	6
5. SUMMARY OF TEST RESULTS.....	6
6. TEST RESULTS	6
7. LIST OF EQUIPMENT USED.....	17

1. RELEASE CONTROL RECORD

TEST REPORT NUMBER	REASON OF CHANGE	DATE OF ISSUE
FCCTR_161913-0	Original release	27/12/2016
FCCTR_161913-1	Editorial Change	12/01/2017

2. TECHNICAL INFORMATION OF EQUIPMENT UNDER TEST (EUT)

2.1 Identification

Type of Equipment :	REMOTE KEYLESS ENTRY
Model name:	RKE22601
Serial number :	S41801S
FCC ID :	2ADPXRKE22601
Trademark:	
Manufacturer:	Giobert do Brasil Sistemas Automotivos Ltda AV. VICENZO GRANGUELLI, 856 Bairro : Nassif, 13.820-000 Jaguariuna - São Paulo - BRASIL
Country of manufacturer:	BRASIL

2.2 Technical data

Product type:	Radio Equipment
Radio type:	Intentional radiators
Product description / application	The EUT is a remote keyless entry using the 433MHz frequency for remote control of vehicle's door (i.e lock door, unlock door...)
Power supply requirements :	3V (CR2032 type)
Operating Frequency:	433.92MHz
Channel bandwidth (20dB)	51.28kHz
Channel spacing	NA
Number of Channel	1
Modulation Type	FSK
Frequency Deviation	2.4kHz
Baud Rate	4.8kbit/s
Antenna Type	Integral Antenna



2.3 Ports identification

This section contains descriptions of all signal ports and AC/DC power input/output ports, the length and the type of the cable provided by manufacturer needed for the tests. Moreover it is specified if the ports are ever or optionally connected.

Port		Description	Connection
1	Enclosure	Plastic / Metal	Snaps & screw
2	AC Power Supply	Port not present	---
3	DC power supply	Port not present (powered by 3Vdc internal battery)	---
4	Signal lines	Port not present	---
5	Telecomm. Lines	Port not present	---
6	Antenna port	Port not present	---

Note: During the tests all cables must be what provided the manufacturer or the same that used in the real employment of the EUT.

2.4 Auxiliary equipment

- None

3. OPERATING TEST MODES AND CONDITIONS

In the following table there are the operating conditions adopted during tests identified by an indicator (#..) at which has been referred the item "Operating condition of the equipment under test"

Operating condition	Description
#1	Continuous transmission, modulated carrier, duty cycle 48.88% (see note 1)
#2	Standard operating condition, manually triggered, duty cycle 48.88% (see note 1)

Note:

¹ The timing of the continuous transmission and the usual standard operating condition is the same and it is illustrated in the following measurement:


According to CFR 47 Part 15.35 c) *Unless otherwise specified, e.g., §§15.255(b), and 15.256(l)(5), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds*

Starting from the measurement below the duty cycle used to calculate the correction factor for field strength measurements results:

DUTY CYCLE (DC): $28.36\text{ms}/60.57\text{ms} = 0.4682 = 46.82\%$

and so the correction factor results:

CORRECTION FACTOR: $20\text{Log}(1/\text{DC}) = 6.59 \text{ dB}$

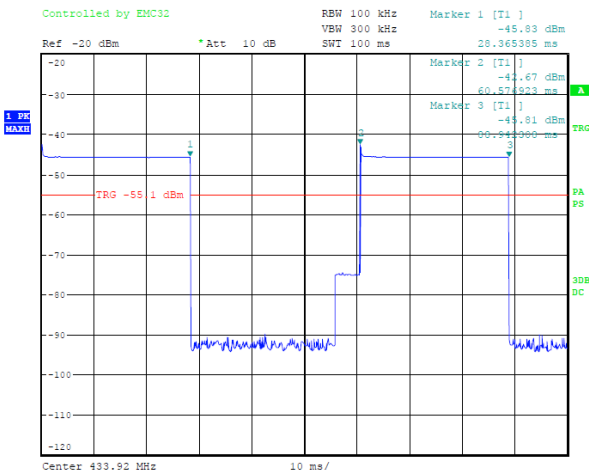

Special Test Software: Special software and hardware by the Applicant to operate the EUT at channel frequency continuously.

Transmitter Test Antenna: The EUT has been tested with the antenna fitted in a manner typical of normal intended use as integral antenna equipment as described with the test results.

4. REFERENCE STANDARD / DOCUMENT FOR PERFORMED TESTS

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
ANSI C63.10:2013	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz

5. SUMMARY OF TEST RESULTS

Phenomena	Basic standard	Operating condition	Result
Antenna Requirements	FCC Part 15 §15.203	---	Compliant
Conducted Emission	FCC Part 15 §15.207	---	Not applicable The EUT is battery powered
Periodic Operation Characteristics	FCC Part 15 §15.231 (a)	#2	Compliant
Field Strength of Fundamental and Spurious Emissions	FCC Part 15 § 15.231 (b)	#1	Compliant
20 dB Bandwidth	FCC Part 15 § 15.231 (c)	#1	Compliant

6. TEST RESULTS

ANTENNA REQUIREMENTS.....	7
PERIODIC OPERATION CHARACTERISTICS.....	8
20DB BANDWIDTH	10
FIELD STRENGTH OF FUNDAMENTAL AND SPURIOUS EMISSIONS	12

**TEST
1.**

ANTENNA REQUIREMENTS

**REFERENCE
DOCUMENT**

According to §15.203 / 15.204

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna requirement
The RKE22601 have an integrated PCB antenna
RESULT: COMPLIANT

**TEST
2.**

PERIODIC OPERATION CHARACTERISTICS

**REFERENCE
DOCUMENT**

According to 15.231 (a): The provisions of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition
- (5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data

TEST SETUP	In according to ref std
TEST LOCATION	Radio test area
TYPE OF MEASUREMENT	RADIATED
TEST EQUIPMENT	Spectrum Analyzer Rohde&Schwarz mod. FSP40 SYSTEM DC POWER SUPPLY HP mod. 6623A
TEST PERFORMED BY	Giacomo Armellini
TESTING DATE	12 October 2016
UNCERTAINTY	±10µs

TEST CONDITIONS:	MEASURED
Ambient temperature : 23°C ± 5°C	24°C
Ambient humidity : 25 – 75 %rH	45%
Pressure : 85 – 106 kPa (860 mbar – 1060 mbar)	960mbar

OPERATING CONDITION	#2
----------------------------	----

TEST RESULT	COMPLIANT
--------------------	------------------


15.231 (a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

COMPLIANT the EUT is immediately deactivated after the release of the push button

Marker 1: push button pressed (start of transmission)

Marker 2: push button released

Marker 3: transmitter deactivation

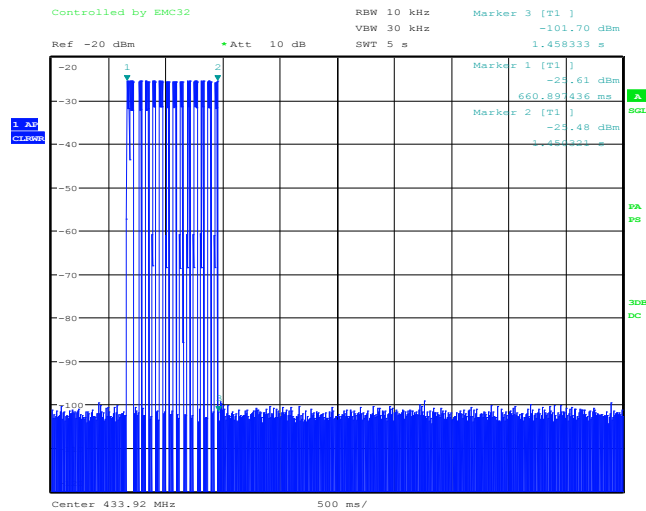

15.231 (a) (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

NOT APPLICABLE: The EUT is a manually operated transmitter

15.231 (a) (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

NOT APPLICABLE: The EUT is a manually operated transmitter

15.231 (a) (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition

NOT APPLICABLE: The EUT is not employed for radio control purposes during emergencies involving fire, security, and safety of life

(5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data

NOT APPLICABLE: The EUT is not employed for security systems

TEST
3.

20dB BANDWIDTH

REFERENCE DOCUMENT

According to 15.231©: The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

TEST SETUP	In according to ref std
TEST LOCATION	Radio test area
TYPE OF MEASUREMENT	RADIATED
TEST EQUIPMENT	Spectrum Analyzer Rohde&Schwarz mod. FSP40 SYSTEM DC POWER SUPPLY HP mod. 6623A
TEST PERFORMED BY	Giacomo Armellini
TESTING DATE	12 October 2016
UNCERTAINTY	±1 KHz


TEST CONDITIONS:	MEASURED
Ambient temperature : 23°C ± 5°C	24°C
Ambient humidity : 25 - 75 %rH	45%
Pressure : 85 - 106 kPa (860 mbar - 1060 mbar)	960mbar

OPERATING CONDITION	#1
----------------------------	----

TEST RESULT	COMPLIANT
--------------------	------------------

Measurement Result

Channel	Frequency (MHz)	20dB Bandwidth (kHz)	Limit 0.0025* Frequency (kHz)	Result
NA	433.92	51.28	1084.8	WITHIN THE LIMITS
Incertezza di misura / Measurement Uncertainty : ±1 KHz				

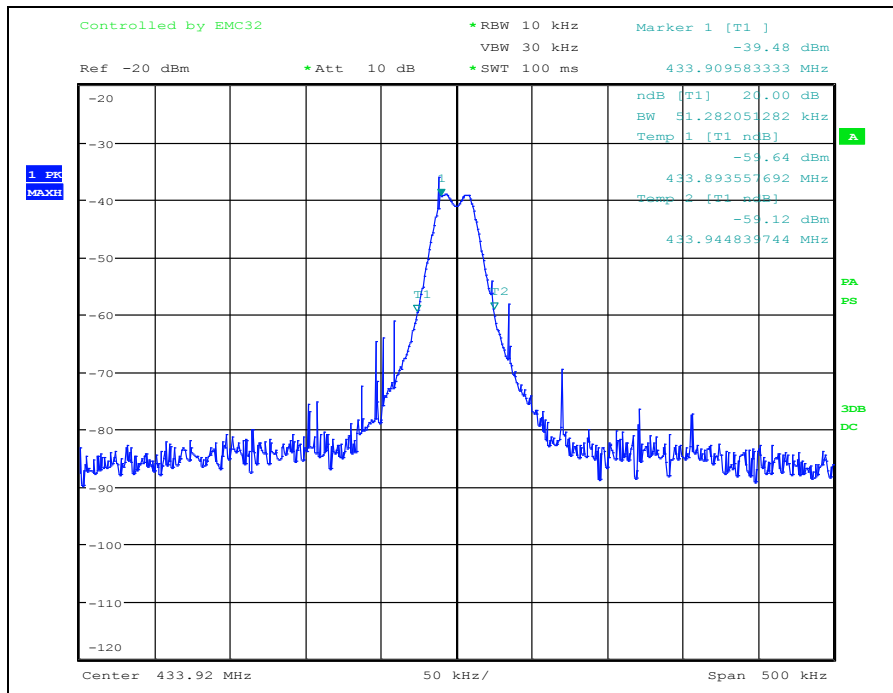

**TEST
4.**

FIELD STRENGTH OF FUNDAMENTAL AND SPURIOUS EMISSIONS

REFERENCE DOCUMENT

According to 15.231 (b) In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	11,250 to 3,750	1125 to 375
174-260	3,750	375
260-470	13,750 to 12,500	1375 to 1,250
Above 470	12,500	1,250

¹Linear interpolations.

TEST SETUP	In according to ref std
TEST LOCATION	Semi Anechoic Chamber
TYPE OF MEASUREMENT	RADIATED
TEST EQUIPMENT	EMI receiver Rohde & Schwarz Mod, ESU 40 Spectrum Analyzer Rohde & Schwarz Mod, FSP40 Chase Antenna Mod, CBL 6111 C Antenna Rohde & Schwarz mod, HL050 High pass filter Wainwright WHNX 1,3/18G-10SS
TEST PERFORMED BY	Giacomo Armellini
TESTING DATE	12 October 2016
UNCERTAINTY OF MEASURE:	Combined uncertainty = $\pm 1,75$ dB Total uncertainty = (k=2) $\pm 3,5$ dB

TEST CONDITIONS:	MEASURED
Ambient temperature : 23°C \pm 5°C	24°C
Ambient humidity : 25 - 75 %rH	45%
Pressure : 85 - 106 kPa (860 mbar - 1060 mbar)	960mbar


OPERATING CONDITION	#1
----------------------------	----

TEST RESULT	COMPLIANT
--------------------	------------------

RADIATED MEASUREMENT

FREQUENCY RANGE 30MHz – 1GHz

VERTICAL POLARIZATION

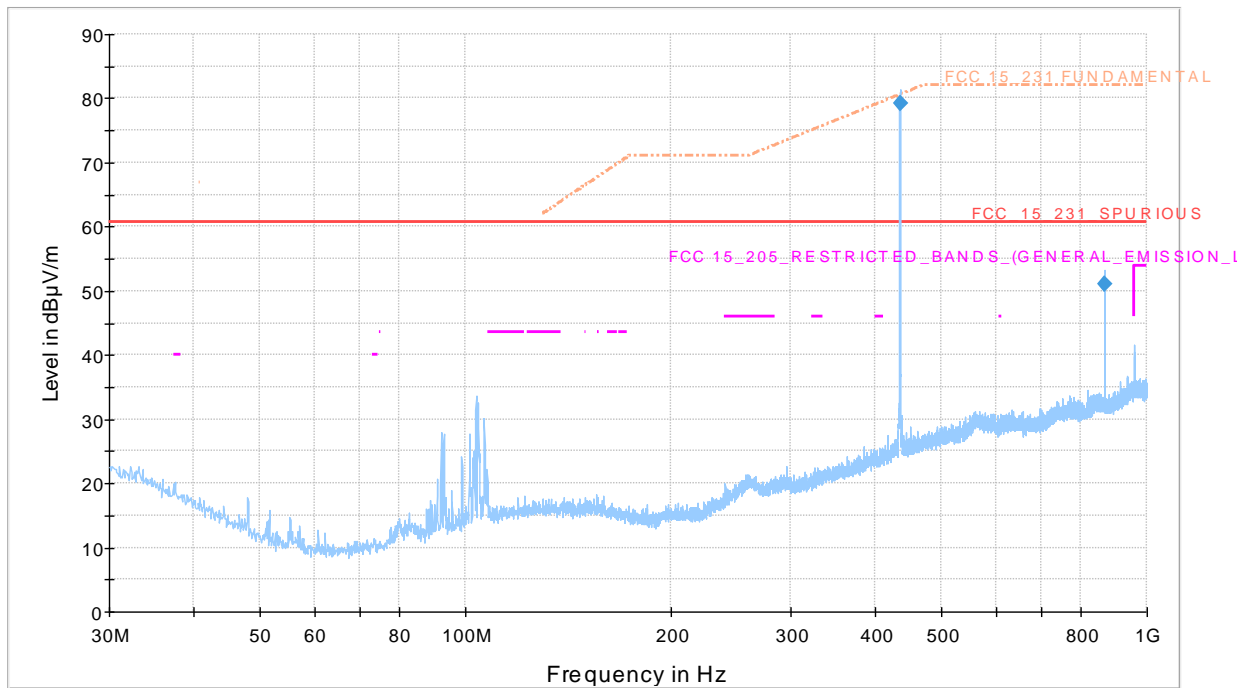

Blue trace Peak detector, Blue Marker Peak detector


Final Result

Frequency (MHz)	Max Peak (dBµV/m)	Duty Cycle correction (dB)	Average (dBµV/m)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Limit (dBµV/m)	Margin (dB)
433.908000	78.1	6.59	71.51	100.000	259.0	V	91.0	80.83	9.32
867.886000	42.4	6.59	35.81	100.000	259.0	V	179.0	60.83	25.02



FREQUENCY RANGE 1GHz-5GHz

VERTICAL POLARIZATION

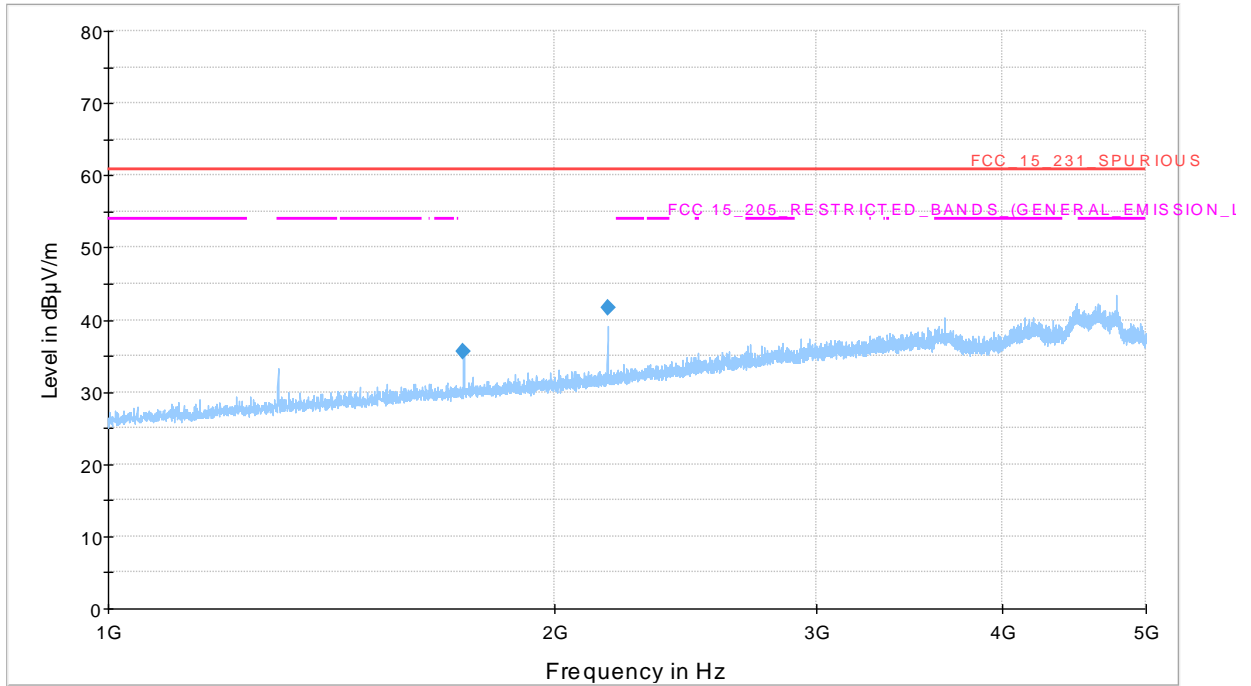

Blue trace Peak detector, Blue Marker Peak detector


Final Result

Frequency (MHz)	Max Peak (dBµV/m)	Duty Cycle correction (dB)	Average (dBµV/m)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Limit (dBµV/m)	Margin (dB)
1735.60000	35.5	6.59	28.91	100.000	100.0	V	1.0	60.83	31.92
2169.20000	41.7	6.59	35.11	100.000	100.0	V	1.0	60.83	25.72



FREQUENCY RANGE 30MHz – 1GHz

HORIZONTAL POLARIZATION

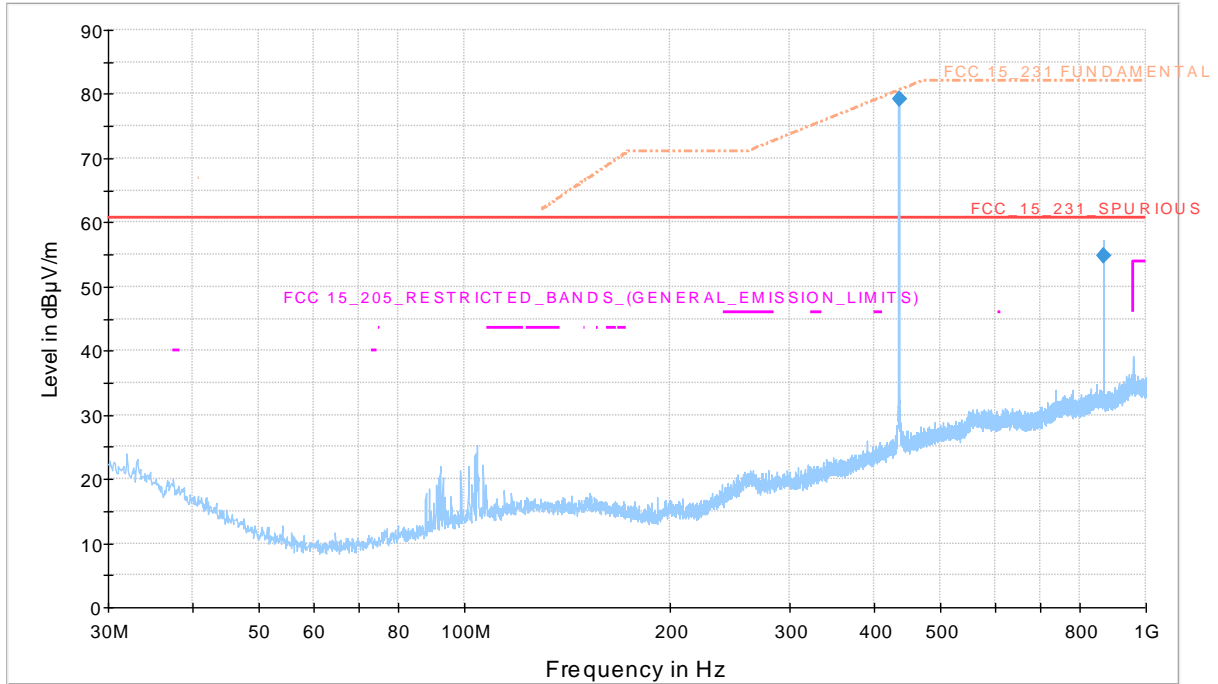

Blue trace Peak detector, Blue Marker Peak detector


Final Result

Frequency (MHz)	Average (dBµV/m)	Duty Cycle correction (dB)	Average (dBµV/m)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Limit (dBµV/m)	Margin (dB)
433.908000	79.1	6.59	72.51	100.000	103.0	H	89.0	80.83	8.32
867.886000	54.8	6.59	48.21	100.000	103.0	H	1.0	60.83	12.62



FREQUENCY RANGE 1GHz-5GHz

HORIZONTAL POLARIZATION

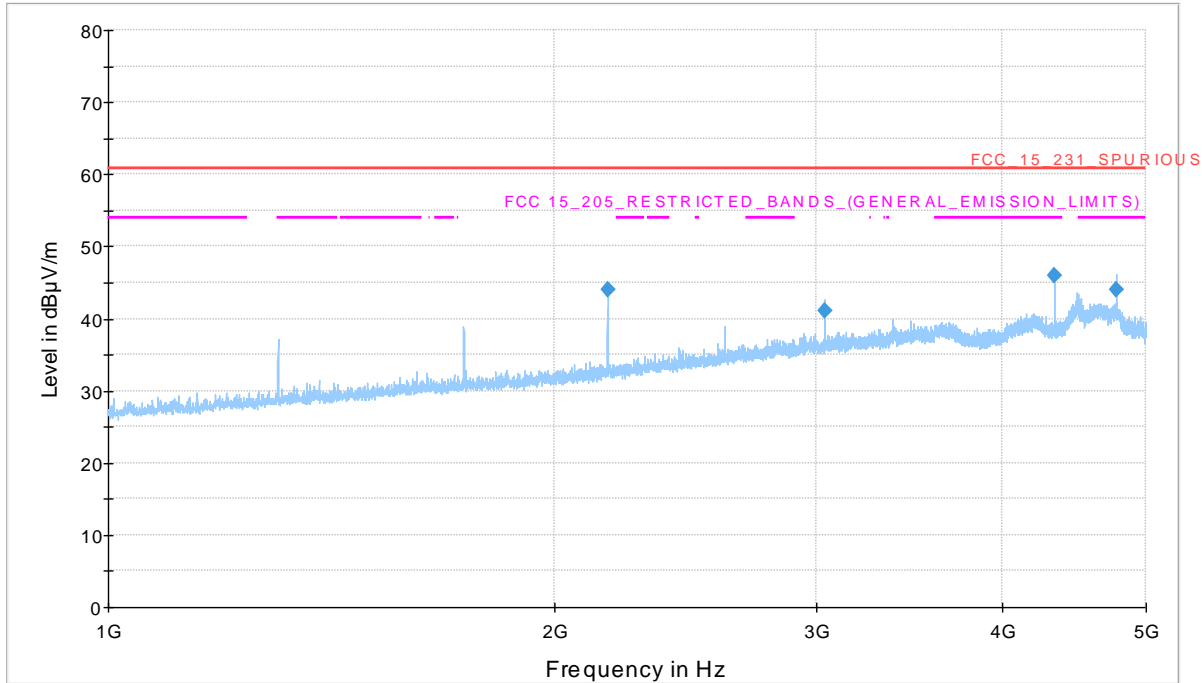

Blue trace Peak detector, Blue Marker Peak detector

Final Result

Frequency (MHz)	Max Peak (dBµV/m)	Duty Cycle correction (dB)	Average (dBµV/m)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Limit (dBµV/m)	Margin (dB)
2169.60000	43.9	6.59	37.31	100.000	257.0	H	90.0	60.83	23.52
3037.60000	41.0	6.59	34.41	100.000	103.0	H	1.0	60.83	26.42
4339.20000	46.0	6.59	39.41	100.000	103.0	H	90.0	60.83	21.42
4773.60000	44.1	6.59	37.51	100.000	103.0	H	1.0	60.83	23.32

7. LIST OF EQUIPMENT USED

EQUIPMENT	MANUFACTURER	MODEL	SERIAL Nr.	CAL. DUE
EMI TEST RECEIVER 20Hz - 40GHz	Rohde & Schwarz	ESU40	100111	09/2017
RF SEMI-ANECHOIC CHAMBER (CSSA)	Siemens	B83117-D6019- T232	003-005- 134/94C	01/2017
BILOG ANTENNA	Chase	CBL6111C	2717	05/2017
LOG PERIODIC ANTENNA BROAD BAND 1-26,5GHz	Rohde & Schwarz	HL050	100437	04/2017
SPECTRUM ANALYZER	Rohde & Schwarz	FSP40	100038	01/2017
SYSTEM DC POWER SUPPLY	HP	6623A	3448A04501	01/2017
HIGH PASS FILTER	Wainwright	WHNX 1,3/18G- 10SS	1	11/2017