



# InterLab®

## FCC Measurement/Technical Report on

### Icarus TxMini

**Report Reference:** MDE\_ICPGROUP\_1401\_FCCb

FCC ID: 2ADQ3ICARUSTXMINI

#### **Test Laboratory:**

7Layers AG  
Borsigstrasse 11  
40880 Ratingen  
Germany



#### Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
[www.7Layers.com](http://www.7Layers.com)

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Peter Mertel  
Vorstand • Board:  
Dr. H. Ansorge

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385  
A Bureau Veritas Group Company



## Table of Contents

<b>0 Summary</b>	<b>3</b>
0.1    Technical Report Summary	3
0.2    Measurement Summary	4
<b>1 Administrative Data</b>	<b>5</b>
1.1    Testing Laboratory	5
1.2    Project Data	5
1.3    Applicant Data	5
1.4    Manufacturer Data	5
<b>2 Test object Data</b>	<b>6</b>
2.1    General EUT Description	6
2.2    EUT Main components	7
2.3    Ancillary Equipment	7
2.4    Auxiliary Equipment	7
2.5    EUT Setups	7
2.6    Operating Modes	8
2.7    Product labeling	8
<b>3 Test Results</b>	<b>9</b>
3.1    Duty cycle measurement (based on dwell time measurement)	9
3.2    Spurious radiated emissions	11
3.3    Peak power output	17
3.4    Occupied bandwidth	18
<b>4 Test Equipment</b>	<b>19</b>
<b>5 Photo Report</b>	<b>25</b>
<b>6 Setup Drawings</b>	<b>25</b>
<b>7 Correlation table FCC-IC</b>	<b>26</b>
<b>8 Annex measurement plots</b>	<b>27</b>
8.1    Duty cycle measurement (based on dwell time measurement)	27
8.2    Radiated emissions	29
8.3    Occupation bandwidth	38



## 0 Summary

### 0.1 Technical Report Summary

#### Type of Authorization

Certification for an Intentional Radiator (Periodic operation in the band above 70 MHz)

#### Applicable FCC Rules

Edition of FCC Rules: 10-1-13

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.231 Periodic operation in the band 40.66-40.70 MHz, above 70 MHz

Note:  
none

#### Summary Test Results:

**The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.**



## 0.2 Measurement Summary

<b>FCC Part 15, Subpart C</b>		<b>§ 15.207</b>	
Conducted emissions (AC power line)			
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>2009</b>
		AC Port (power line)	<b>Final Result</b>
			N/A
<b>FCC Part 15, Subpart C</b>		<b>§ 15.231</b>	
Duty cycle measurement (based on dwell time measurement)			
The measurement was performed according to FCC § 15.31		10-1-13 Edition	
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	Setup_02	Temporary antenna connector	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.231</b>	
Spurious Radiated Emissions			
The measurement was performed according to ANSI C63.4		2009	
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 2	Setup_01	Enclosure	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.231</b>	
Peak power output			
The measurement was performed according to ANSI C63.4		2009	
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 2	Setup_01	Enclosure	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.231</b>	
Occupied Bandwidth			
The measurement was performed according to FCC § 15.31		10-1-13 Edition	
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 2	Setup_01	Enclosure	passed
N/A	not applicable (the EUT is powered by DC internal battery)		

Responsible for  
Accreditation Scope:

Responsible  
for Test Report:



## 1 Administrative Data

### 1.1 Testing Laboratory

Company Name: 7Layers AG  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:  
Laboratory accreditation no.: DAkkS D-PL-12140-01-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka  
Dipl.-Ing. Robert Machulec  
Dipl.-Ing. Andreas Petz  
Dipl.-Ing. Marco Kullik

Report Template Version: 2012-03-14

### 1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Dobrin Dobrinov  
Date of Test(s): 2014-10-08 to 2014-10-20  
Date of Report: 2014-11-26

### 1.3 Applicant Data

Company Name: ICP Systems b.v.  
Address: Handelsweg 48  
7451PJ Holten  
Netherlands  
Contact Person: Philipp Rasche

### 1.4 Manufacturer Data

Company Name: please see applicant data  
Address:  
Contact Person:



## 2 Test object Data

### 2.1 General EUT Description

<b>Equipment under Test</b>	Icarus
<b>Type Designation:</b>	TxMini
<b>Kind of Device: (optional)</b>	433 MHz transmitter
<b>Voltage Type:</b>	DC internal battery
<b>Voltage level:</b>	3.0V
<b>Repeated Operation:</b>	Manually
<b>The EUT is part of a security or safety system:</b>	No

#### **General product description:**

The Equipment Under Test (EUT) is a wireless handheld remote control unit transmitter for non-periodic operation in the band above 70 MHz. The operating frequency is in the 433 MHz ISM band.

#### **Specific product description for the EUT:**

None

#### **The EUT provides the following ports:**

##### **Ports**

- Enclosure

**The main components of the EUT are listed and described in Chapter2.2.**



## 2.2 EUT Main components

### Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: DE10 66001aa01)	Icarus	TxMini	14.000.243	92379 100	21.042.314 continuous CW/CM (for test purpose only)	-

Remark: EUT A is equipped with an integral antenna (gain = -16 dBi).

**NOTE: The short description is used to simplify the identification of the EUT in this test report.**

## 2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial no.	FCC ID
-	-	-	-	-	-	-

## 2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial no.	FCC ID
-	-	-	-	-	-	-

## 2.5 EUT Setups

This chapter describes the combination of EUTs and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
Setup_01	EUT A	setup for Peak Power Output, Occupied Bandwidth and Spurious Radiated Emissions measurements
Setup_02	EUT A	setup for Duty Cycle measurements



## 2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1	normal operation	At each pressing of a button 6, transmitter is sending a pulse coded signal once.
op-mode 2	continuous operation	Transmitter is sending continuously a CW or CM signal (after pressing buttons 4 or 3). Special op mode for test purpose only.

## 2.7 Product labelling

### 2.7.1 FCC ID label

FCC ID: 2ADQ3ICARUSTXMINI

### 2.7.2 Location of the label on the EUT

Please refer to the documentation of the applicant.



## 3 Test Results

### 3.1 Duty cycle measurement (based on dwell time measurement)

**Standard** FCC Part 15, 10-1-13 Edition Subpart C

**The test was performed according to:** FCC §15.35, §15.231

#### 3.1.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the dwell time measurements. For analyzer settings please see measurement plots in annex.

#### 3.1.2 Test Limits

Depending on the function of the EUT different paragraphs of FCC §15.231 apply:

Either

(a)(1): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Or

(a)(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

And

(a)(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

Otherwise

(e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation [...]. In addition, [...] the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

This test is also performed to determine the pulse train of the transmitter and calculate the correction factor for pulse modulated transmitters according to FCC §15.35. This factor is used as a correction factor for the field strength measurements, both for Spurious radiated emissions and Peak power output.



### 3.1.3 Test Protocol

Temperature: °C  
Air Pressure: hPa  
Humidity: %

Op. Mode	Setup	Port
op-mode 1	Setup_02	Temporary antenna connector

a) Determine the total duration of a transmission within 100 ms:

Duty cycle = ( (L1\*N1) + (L2\*N2) + ... + (Ln\*Nn) ) / 100 ms or T, whichever is less  
Correction factor = 20 \* LOG (Duty cycle) [dB]

Step 1	Holdover time	Less than 5s
Step 2	Cycle to determine the on/off ratio within a cycle (period T)	922 ms
Step 3	Sweep of a data word to determine the on time within a data word (L1-LN).	L1 = 20.40 ms
Step 4	Determine the number of pulses (N1-NN). First range (trigger delay = -10 ms).	N1 = 2

Calculation of Duty Cycle / Correction Factor:

If T > 100 ms => T := 100 ms; L1 = 67.75 ms; N1 = 2;

In 100 ms T<sub>on</sub> = 2\*20.40 ms = 40.8 ms

Duty cycle = 40.8 / 100 = 0.408

Correction factor = 20\*LOG(0.408) = **-7.8 dB**

b) Determine the period of periodic re-transmission, if any, or cease (deactivation) time:

Period of retransmission T<sub>R</sub>. There is no periodic retransmission. After pressing a button, the EUT sends only one pulse train (RKE telegram message).

Deactivation after **T<sub>c</sub> = 0.922 s**, Limit: ≤ 5 s

c) Determine the total duration of periodic transmissions within 1 hour, if any:

Duration t<sub>d</sub> of all pulses/bursts during T<sub>R</sub> ("on-time"):

t<sub>d</sub> = 19\*L1 = **387.6 ms**

d) If the result of c) exceeds 2 seconds/hour then paragraph (e) applies:

Determine the duration of each transmission (one complete pulse train) and silent time:

Duration t<sub>PT</sub>, Limit: ≤ 1 s (Remark: t<sub>PT</sub> is identical to t<sub>d</sub> if T ≤ 100 ms)

Silent time between transmissions t<sub>S</sub> = , Limit: ≤ Maximum(10 s and 30\*t<sub>PT</sub>).

### 3.1.4 Test result: Duty cycle / correction factor

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed



### 3.2 Spurious radiated emissions

**Standard** FCC Part 15, 10-1-13 Edition Subpart C

**The test was performed according to:** FCC §15.31, ANSI C 63.4, 2009

#### 3.2.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2009. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

#### 1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2009. The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The Loop antenna HFH2-Z2 is used.

##### Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 10 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

##### Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

#### 2. Measurement above 30 MHz and up to 1 GHz

##### Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs



- Turntable angle range: -180 to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

#### **Step 2:** second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

#### **Step 3:** final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to + 22.5° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

#### **Step 4:** final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s



### 3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

Important EMI receiver settings:

- Detector: Peak, Average
- RBW = 1 MHz, VBW = 3 MHz
- Sweep time = 100 ms / per 100 MHz sweep

#### 3.2.2 Test Requirements / Limits

1) A radiated emission test is relating to the fundamental frequency.

a) Either for "non-periodic" operation of the EUT as defined in §15.231(a) the limits for the average field strength apply according to FCC Part 15, Subpart C, §15.231(b):

For fundamental frequency (MHz)	Limit Fundamental (dB $\mu$ V/m)	Limit Spurious (dB $\mu$ V/m)
40.66 – 40.70	67.0	47.0
70 – 130	67.0	47.0
130 – 174	67.0 – 71.5	47.0 – 51.5 *)
174 – 260	71.5	51.5
260 – 470	71.5 – 81.9	51.5 – 61.9 *)
above 470	81.9	61.9

b) Or for "periodic" operation of the EUT the limits for the average field strength apply according to FCC Part 15, Subpart C, §15.231(e):

For fundamental frequency (MHz)	Limit Fundamental (dB $\mu$ V/m)	Limit Spurious (dB $\mu$ V/m)
40.66 – 40.70	60.0	40.0
70 – 130	54.0	34.0
130 – 174	54.0 – 63.5	34.0 – 43.5 *)
174 – 260	63.5	43.5
260 – 470	63.5 – 74.0	43.5 – 54.0 *)
above 470	74.0	54.0

\*) linear interpolation



2) A radiated emission test applies to harmonic/spurs that fall in the restricted bands as listed in § 15.205(a). The maximum permitted QP (< 1 GHz) and Average (> 1GHz) field strength is listed in § 15.209(a):

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency in MHz	Limit ( $\mu$ V/m)	Measurement distance (m)	Calculate Limit( $\text{dB}\mu$ V/m @10m)	Limit ( $\text{dB}\mu$ V/m @10m)
0.009 - 0.49	2400/F (kHz)	300	(48.5 - 13.8) + 59.1 dB	107.6 - 77.9
0.49 - 1.705	24000/F (kHz)	30	(48.9 - 23.0) + 19.1 dB	68.0 - 42.1
1.705 - 30	30	30	29.5 + 19.1 dB	48.6

Frequency in MHz	Limit ( $\mu$ V/m)	Measurement distance (m)	Limit ( $\text{dB}\mu$ V/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b) ... , there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit ... .

Used conversion factor: Limit ( $\text{dB}\mu$ V/m) = 20 log (Limit ( $\mu$ V/m)/1 $\mu$ V/m)

§15.35(c):

[...] when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted [...].

§15.231(b)(3)

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator.

Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

Interpretation of the test laboratory:

The last subordinate clause of §15.231(b)(3) is overruled by §15.205/209, therefore within the restricted bands the limits defined at §15.205/209 and outside the restricted bands the limits defined at §15.231(b) resp. §15.231(e) are applied.



### 3.2.3 Test Protocol

#### 3.2.3.1 Measurement up to 30 MHz

Temperature: 24 °C  
 Air Pressure: 1009 hPa  
 Humidity: 38 %

Op. Mode	Setup	Port						
op-mode 2	Setup_01	Enclosure						
Polarisation	Frequency MHz	Corrected value dB $\mu$ V/m	Limit dB $\mu$ V/m	Limit dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin to limit dB	Margin to limit dB	
		QP	Peak	AV	QP	Peak	AV	QP/Peak
channel 1								
0°	-	-	-	-	-	-	-	-
90°	-	-	-	-	-	-	-	-
channel 6								
0°	-	-	-	-	-	-	-	-
90°	-	-	-	-	-	-	-	-

Remark: In step 1 no spurious emissions above the limit were found using a peak detector, therefore step 2 (using a QP-detector) was not performed. Please see the measurement plots in annex.

All the Spurious radiated emissions measurements are done at the lowest and highest carrier frequencies the EUT operates on, resp. channel 1 and channel 6. All three axis (Y,Y,Z) of the device and both antenna polarizations (H/V) were considered.

#### 3.2.3.2 Measurement 30 MHz – 1 GHz

Temperature: 24 °C  
 Air Pressure: 1006 hPa  
 Humidity: 42 %

Op. Mode	Setup	Port						
op-mode 2	Setup_01	Enclosure						
Polarisation of the antenna and the EUT	Frequency MHz	Corrected value dB $\mu$ V/m	Limit dB $\mu$ V/m	Limit dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin to limit dB	Margin to limit dB	
		QP	Peak	AV	QP	Peak	AV	QP/Peak
channel 1								
-	-	-	-	-	-	-	-	-
channel 6								
-	-	-	-	-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found. The test was performed in the frequency range from 30 MHz to 1 GHz. For this test an EUT sending a CW signal was used.

All the Spurious radiated emissions measurements are done at the lowest and highest carrier frequencies the EUT operates on, resp. channel 1 and channel 6. All three axis (Y,Y,Z) of the device and both antenna polarizations (H/V) were considered.



### **Measurement above 1 GHz**

Temperature: 24 °C  
Air Pressure: 1006 hPa  
Humidity: 42 %

<b>Op. Mode</b>		<b>Setup</b>		<b>Port</b>					
<b>Polarisation</b>	<b>Frequency MHz</b>	<b>Corrected value dB<math>\mu</math>V/m</b>			<b>Limit dB<math>\mu</math>V/ m</b>	<b>Limit dB<math>\mu</math>V/ m</b>	<b>Limit dB<math>\mu</math>V/ m</b>	<b>Margin to limit dB</b>	<b>Margin to limit dB</b>
		<b>QP</b>	<b>Peak</b>	<b>AV</b>	<b>QP</b>	<b>Peak</b>	<b>AV</b>	<b>QP/Peak</b>	<b>AV</b>
channel 1		-			-				
channel 6		-			-				

Remarks: No spurious emissions in the range 20 dB below the limit found. The test was performed in the frequency range from 1 GHz to 4.5 GHz. For this test an EUT sending a CW signal was used.

All the Spurious radiated emissions measurements are done at the lowest and highest carrier frequencies the EUT operates on, resp. channel 1 and channel 6. All three axis (Y,Y,Z) of the device and both antenna polarizations (H/V) were considered.

#### **3.2.4 Test result: Spurious radiated emissions**

<b>FCC Part 15, Subpart C</b>	<b>Op. Mode</b>	<b>Result</b>
	<u>op-mode 2</u>	<u>passed</u>



### 3.3 Peak power output

**Standard** FCC Part 15, 10-1-13 Edition Subpart C

**The test was performed according to:** FCC §15.31, §15.231, ANSI C 63.4, 2009

#### 3.3.1 Test Description

Please refer to sub-clause 3.2.1.

#### 3.3.2 Test Limits

Please refer to sub-clause 3.2.2.

#### 3.3.3 Test Protocol

Temperature: 24 °C  
Air Pressure: 1009 hPa  
Humidity: 38 %

Op. Mode	Setup	Port		
op-mode 2	Setup_01	Enclosure		
<hr/>				
channel	Output power dB $\mu$ V/m	Frequency MHz	Limit dB $\mu$ V/m	Remarks
1	72.2	433.2	80.81	Maximum radiated field strength at fundamental frequency
4	72.3	434.1	80.83	
6	74.9	434.7	80.85	

Note: The maximal peak power output values shown in the table above are corrected by using the Duty Cycle Correction Factor, calculated in 3.1.3.

#### 3.3.4 Test result: Peak power output

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 2	passed



### 3.4 Occupied bandwidth

**Standard** FCC Part 15, 10-1-13 Edition Subpart C

**The test was performed according to:** FCC §15.231

#### 3.4.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

For analyzer settings please see measurement plots in annex.

#### 3.4.2 Test Limits

FCC Part 15, Subpart C, §15.231(c)

The maximum 20 dB bandwidth of a transmitter operating at a frequency range:

70 to 900 MHz is 0.25% of the centre frequency

above 900 MHz is 0.5% of the centre frequency

#### 3.4.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1009 hPa

Humidity: 42 %

Op. Mode	Setup	Port
op-mode 2	Setup_01	Enclosure

Channel	20 dB bandwidth kHz	99% bandwidth kHz	Limit kHz	Remarks
1	605.210	661.323	1086.75	The limit is calculated as: 434.7 MHz (the maximal carrier frequency used) * 0.25% = = 1086.75 kHz.
4	599.198	663.327	1086.75	
6	623.246	675.351	1086.75	

Remark: Please see annex for the measurement plots.

#### 3.4.4 Test result: Occupied bandwidth

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 2	passed



## 4 Test Equipment

The calibration, hardware and software states are shown for the testing period.

### Test Equipment Anechoic Chamber

Lab ID:	Lab 2		
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6.00 m <sup>3</sup>		
	NSA (FCC)	2014/01/09	2017/01/09

### Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup> FCC listing 96716 3m Part15/18	none	Frankonia 2014/01/09 2017/01/08
Controller Mastro	MCU	961208	Mastro GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

### Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1		
Manufacturer:	Rohde & Schwarz GmbH & Co.KG		
Description:	EMI Conducted Auxiliary Equipment		

### Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/03/01 2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/08 2016/01/31

**Single Devices for Auxiliary Equipment for Conducted emissions (continued)**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG	
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/11/25	2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standart Calibration		2013/03/01	2015/02/28
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/03/01	2015/02/28



### Test Equipment Auxiliary Equipment for Radiated emissions

**Lab ID:****Lab 2****Description:**

Equipment for emission measurements

**Serial Number:**

see single devices

### Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/119205 13	Maturo GmbH
Antenna mast	AS 620 P	620/37	HD GmbH
Biconical dipole	VUBA 9117 <i>Calibration Details</i> Standard Calibration	9117-108	Schwarzbeck <i>Last Execution</i> 2012/01/18 <i>Next Exec.</i> 2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906 <i>Calibration Details</i> Standard Calibration	357357/001	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> 2012/05/18 <i>Next Exec.</i> 2015/05/17
Double-ridged horn	HF 906 <i>Calibration Details</i> Standard Calibration	357357/002	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> 2012/06/26 <i>Next Exec.</i> 2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26 GHz	BBHA 9170		
Log.-per. Antenna	HL 562 Ultralog <i>Calibration Details</i> Standard Calibration	100609	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> 2012/12/18 <i>Next Exec.</i> 2015/12/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2 <i>Calibration Details</i> Standard calibration	829324/006	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> 2011/10/27 <i>Next Exec.</i> 2014/10/26



### Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

### Test Equipment Auxiliary Test Equipment

**Lab ID:** **Lab 2, Lab 3**  
**Manufacturer:** see single devices  
**Description:** Single Devices for various Test Equipment  
**Type:** various  
**Serial Number:** none

### Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider 1506A / 93459 N (Aux)		LM390	Weinschel Associates
Broadband Power Divider WA1515 SMA		A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
Calibration Details		Last Execution	Next Exec.
	Customized calibration	2013/12/04	2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
Calibration Details		Last Execution	Next Exec.
	Standard	2014/02/10	2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
Calibration Details		Last Execution	Next Exec.
	Standard	2012/06/13	2015/06/12
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
Calibration Details		Last Execution	Next Exec.
	Standard calibration	2013/07/29	2014/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG



## Test Equipment Radio Lab Test Equipment

**Lab ID:** Lab 3  
**Description:** Radio Lab Test Equipment

### Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider	WA1515 SMA	A856	Weinschel Associates
Coax Attenuator 10dB	4T-10 SMA 2W	F9401	Weinschel Associates
Coax Attenuator 10dB	56-10 SMA 2W	W3702	Weinschel Associates
Coax Attenuator 10dB	56-10 SMA 2W	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner
Coax Cable Rosenberger	FA210A0010003030 Micro Coax FA210A0010003030 SMA/SMA 1,0m	54491-2	Rosenberger Micro-Coax
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/25   2014/11/24
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/05/06   2016/05/05
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/02/12   2015/02/11
Temperature Chamber Vötsch 03	VT 4002	58566002150010	Vötsch
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2012/03/12   2014/03/11
	Customized calibration		2014/03/11   2016/03/10



## Test Equipment Temperature Chamber 01

**Lab ID:** Lab 4  
**Manufacturer:** see single devices  
**Description:** Temperature Chamber KWP 120/70  
**Type:** Weiss  
**Serial Number:** see single devices


## Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
Calibration Details		Last Execution	Next Exec.
Customized calibration		2012/03/12	2014/03/11
Customized calibration		2014/03/12	2016/03/11

## 5 Photo Report

Photos are included in an external report.

## 6 Setup Drawings

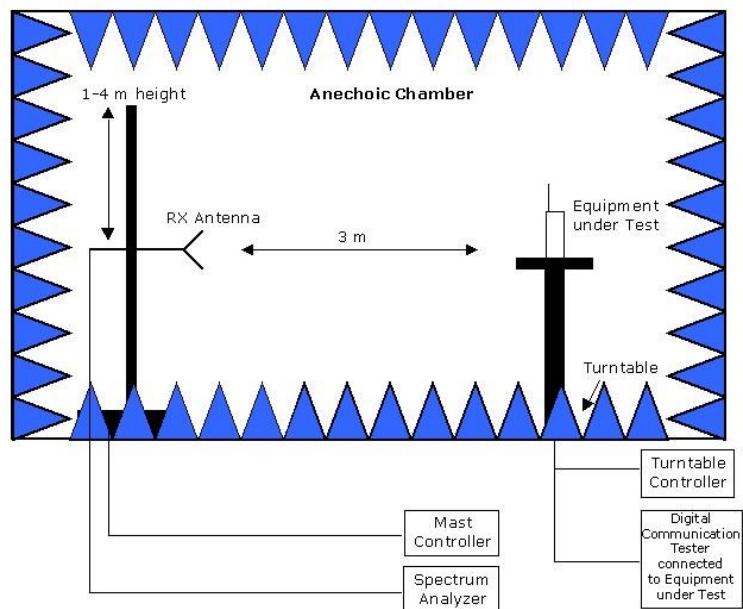

**Drawing 1:** Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.



## 7 Correlation table FCC-IC

Correlation of measurement requirements for Momentarily (incl. Periodically) Operated Devices and Remote Control from FCC and IC


### Radio equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Transmitter spurious radiated emissions	§ 15.231 (b) / (e)	RSS Gen Issue 4: 6.10/6.13/8.9/8.10; RSS-210 Issue 8: A1.1.2, A1.1.5
Duty cycle measurement (based on dwell time measurement)	§ 15.231 (a)	RSS-210 Issue 8: A1.1.1, A1.1.5
Peak power output	§ 15.231 (b) / (e)	RSS-210 Issue 8: A1.1.2, A1.1.5; RSS Gen Issue 4: 6.12
Occupied bandwidth	§ 15.231 (c)	RSS-210 Issue 8: A1.1.3
Frequency Stability	§ 15.231 (d)	RSS-210 Issue 8: A1.1.4
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	-	RSS-210 Issue 8: 2.3 RSS Gen Issue 4: 5/7 *)


\*) Receivers are exempted from certification besides if operating in stand-alone mode in the frequency range 30–960 MHz or if these are scanner receivers.

## 8 Annex measurement plots

## 8.1 Duty cycle measurement (based on dwell time measurement)

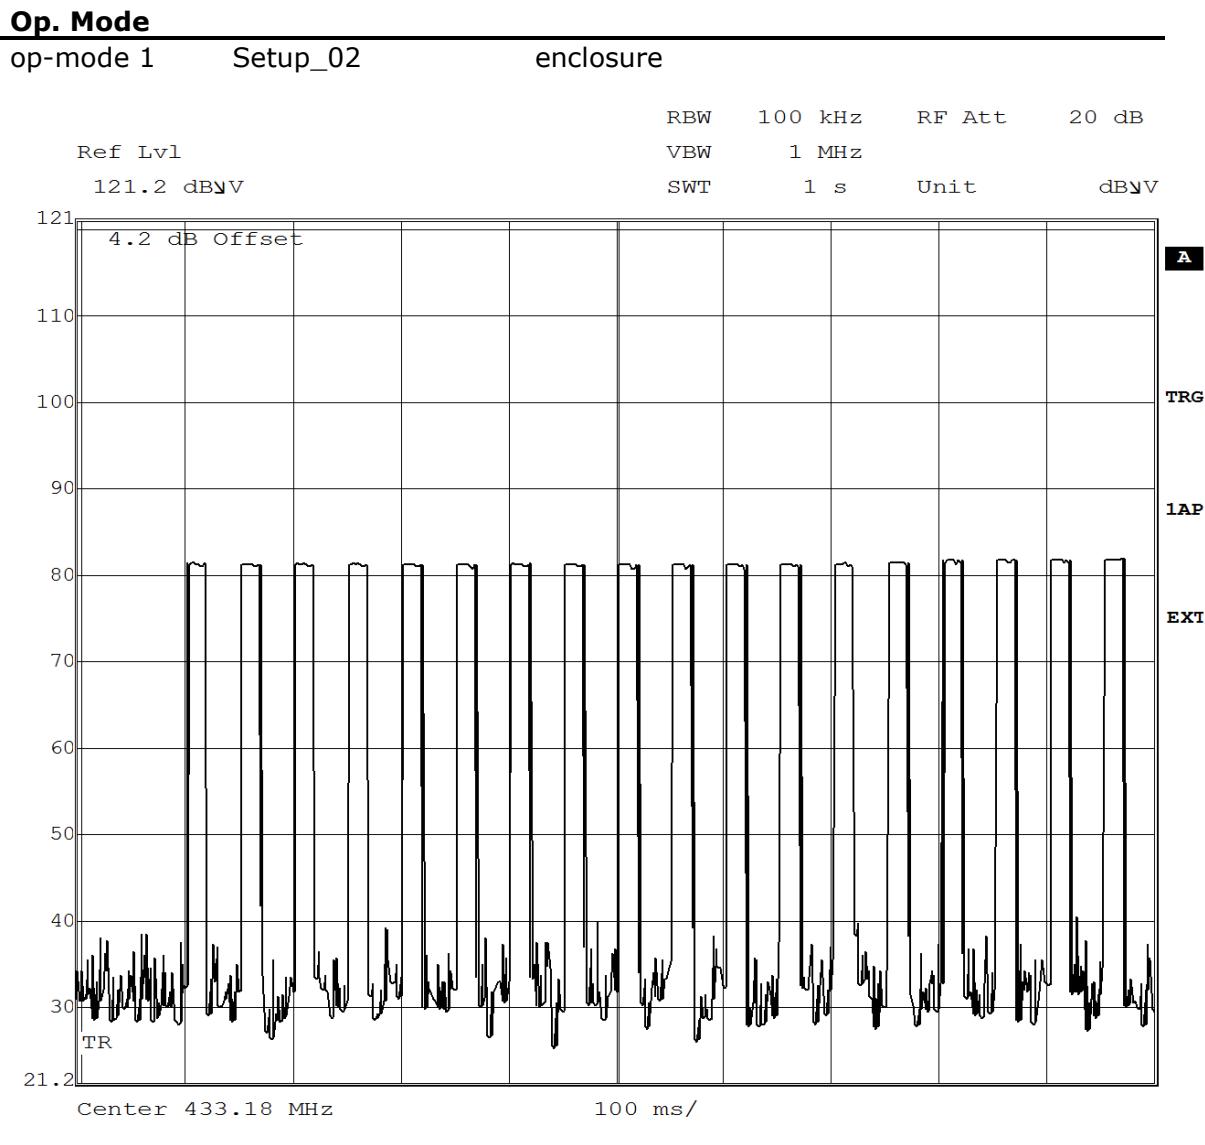

Wagga Wagga, 20 May, 1911. 15

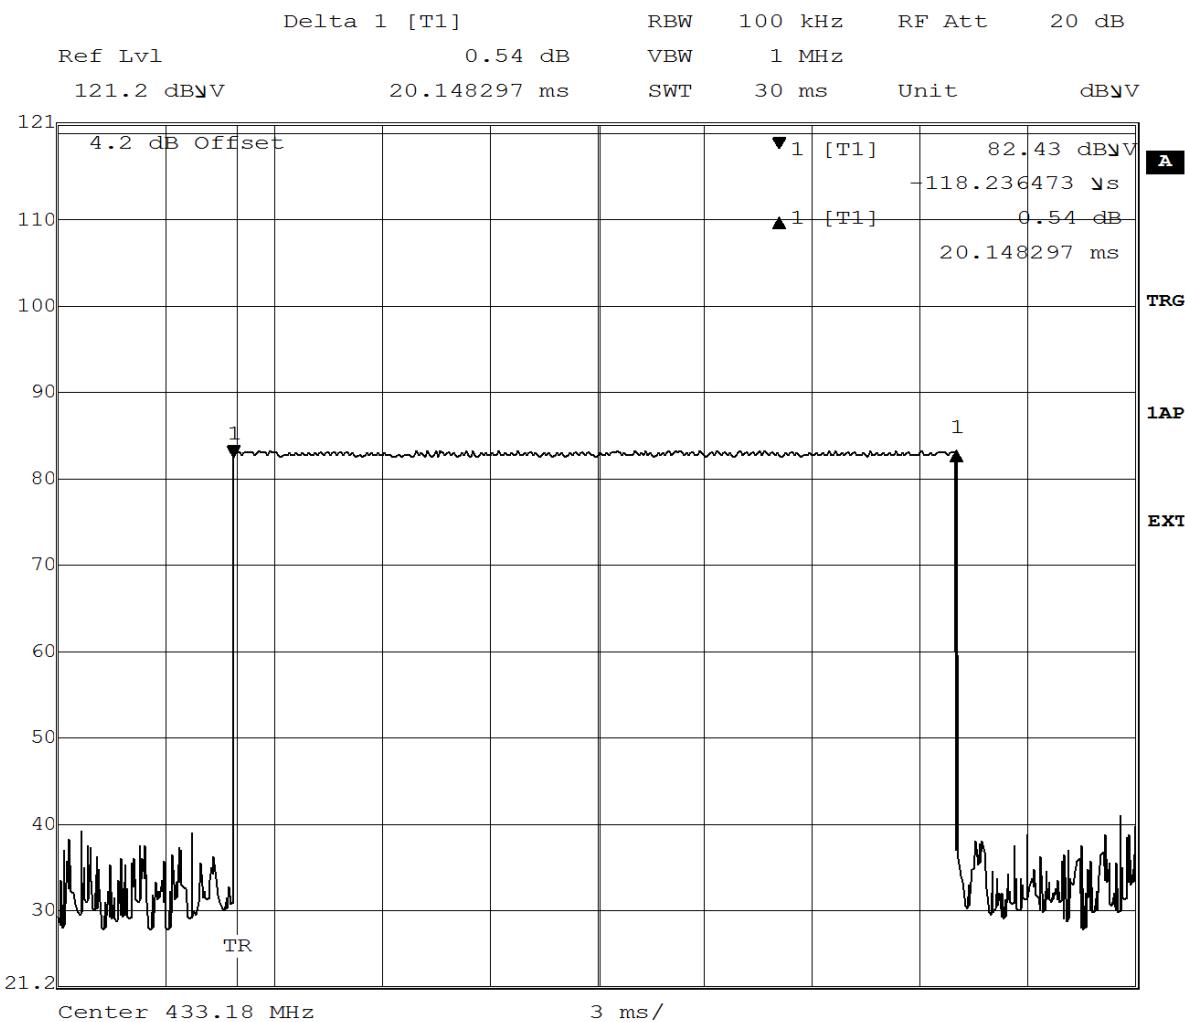

Date: 5.AUG.2014 17:12:37

The N1 pulse.


Trigger delay = -5 ms, SWT = 30 ms

L1 = 20.15 ms

## 8.2 Radiated emissions

### 8.2.1 Radiated emissions (f < 30 MHz)


EUT: (DE1066000aa01)  
 Manufacturer: ICP Group  
 Operating Condition: TX on 434.07 MHz, Ch: 4  
 Test Site: 7 layers, Ratingen  
 Test Specification: FCC 15c.231  
 Comment: Antenna position 0° Side 1 horizontal EUT position

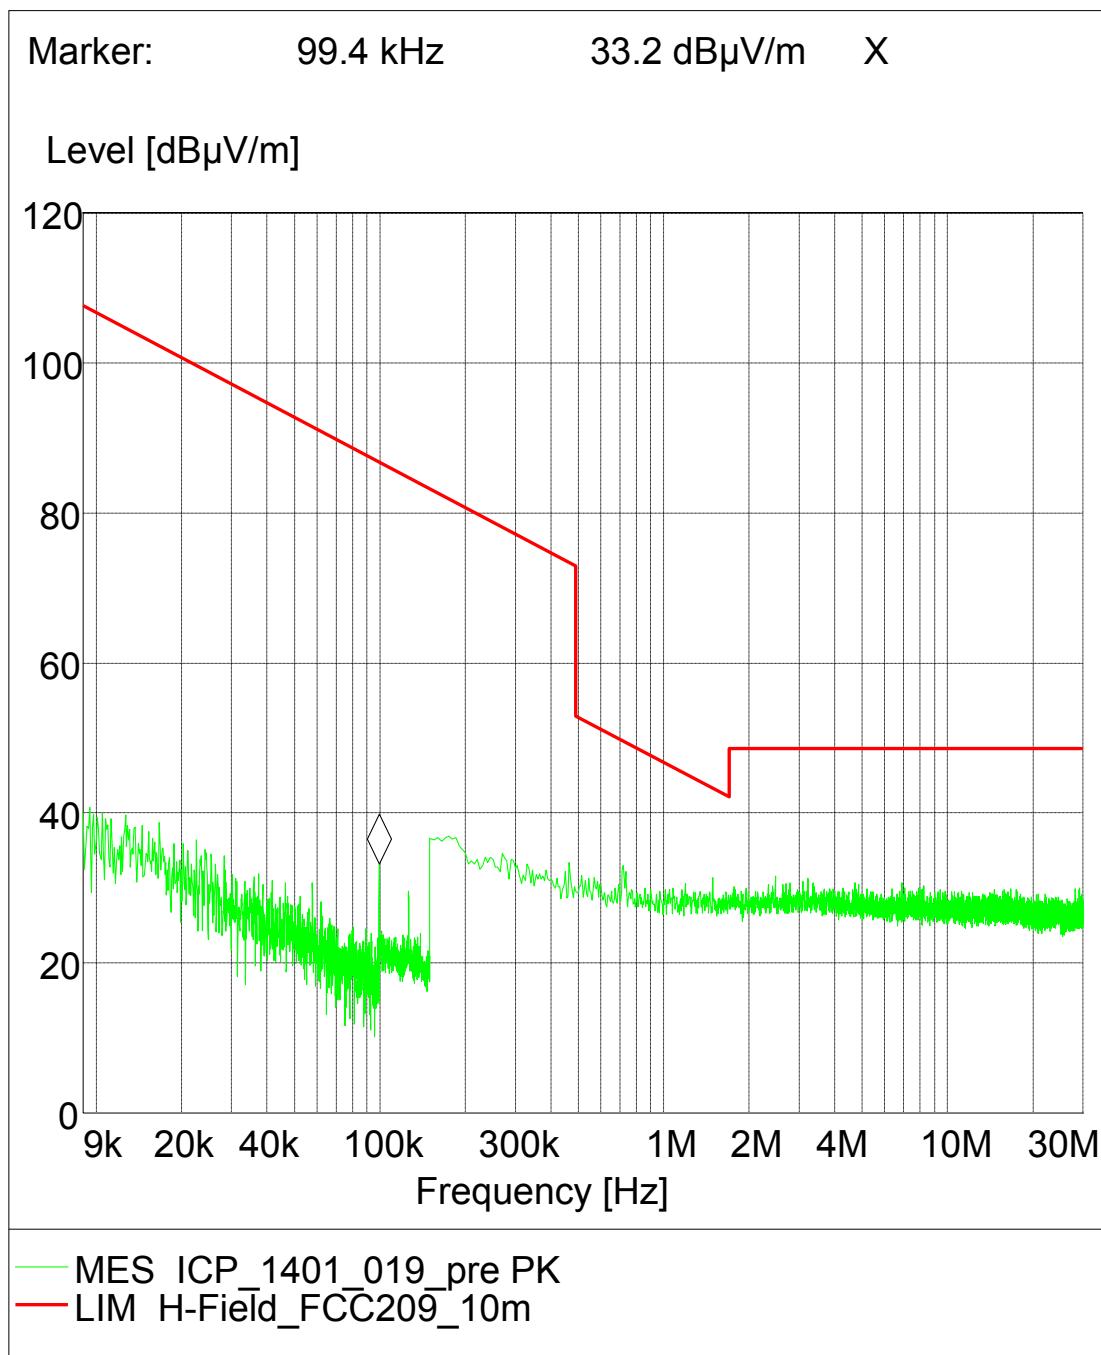

Remark: The peak found at 99.4 kHz is an emission from the loop antenna power supply




Antenna position 90° Side 1 horizontal EUT position

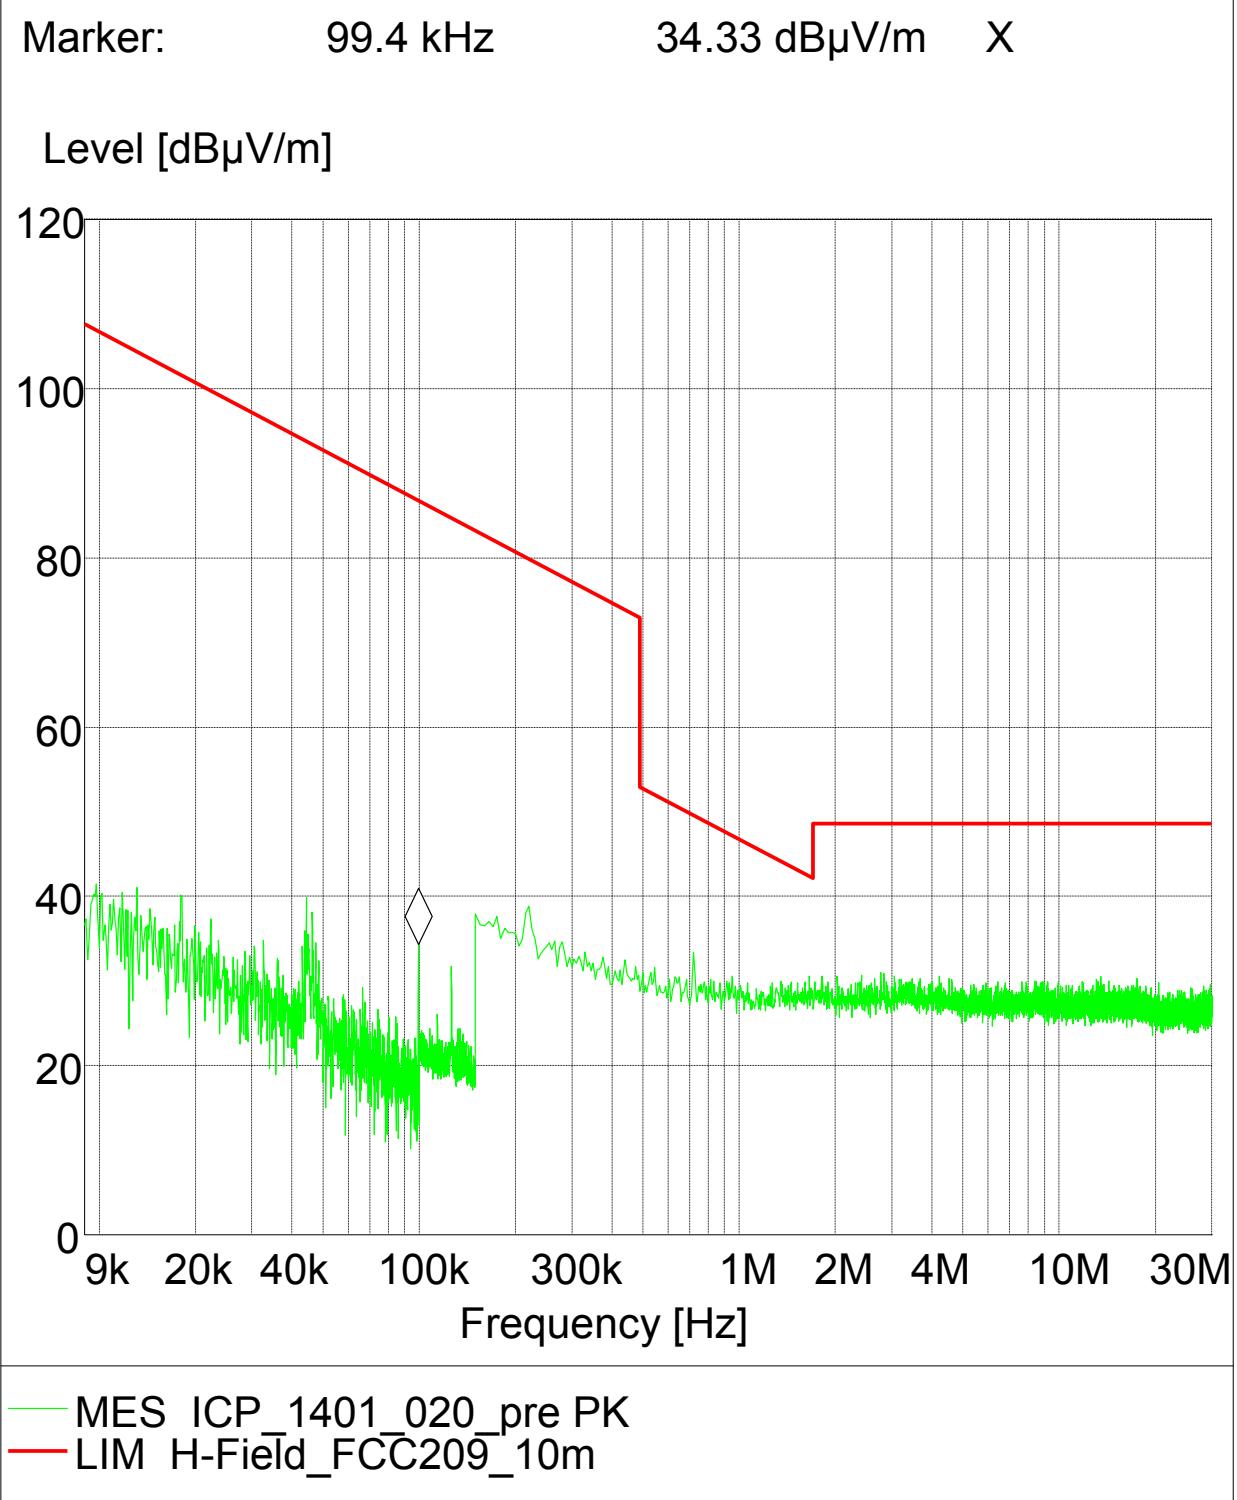


Remark: The peak found at 99.4 kHz is an emission from the loop antenna power supply

Antenna position 90° Side 2 horizontal EUT position

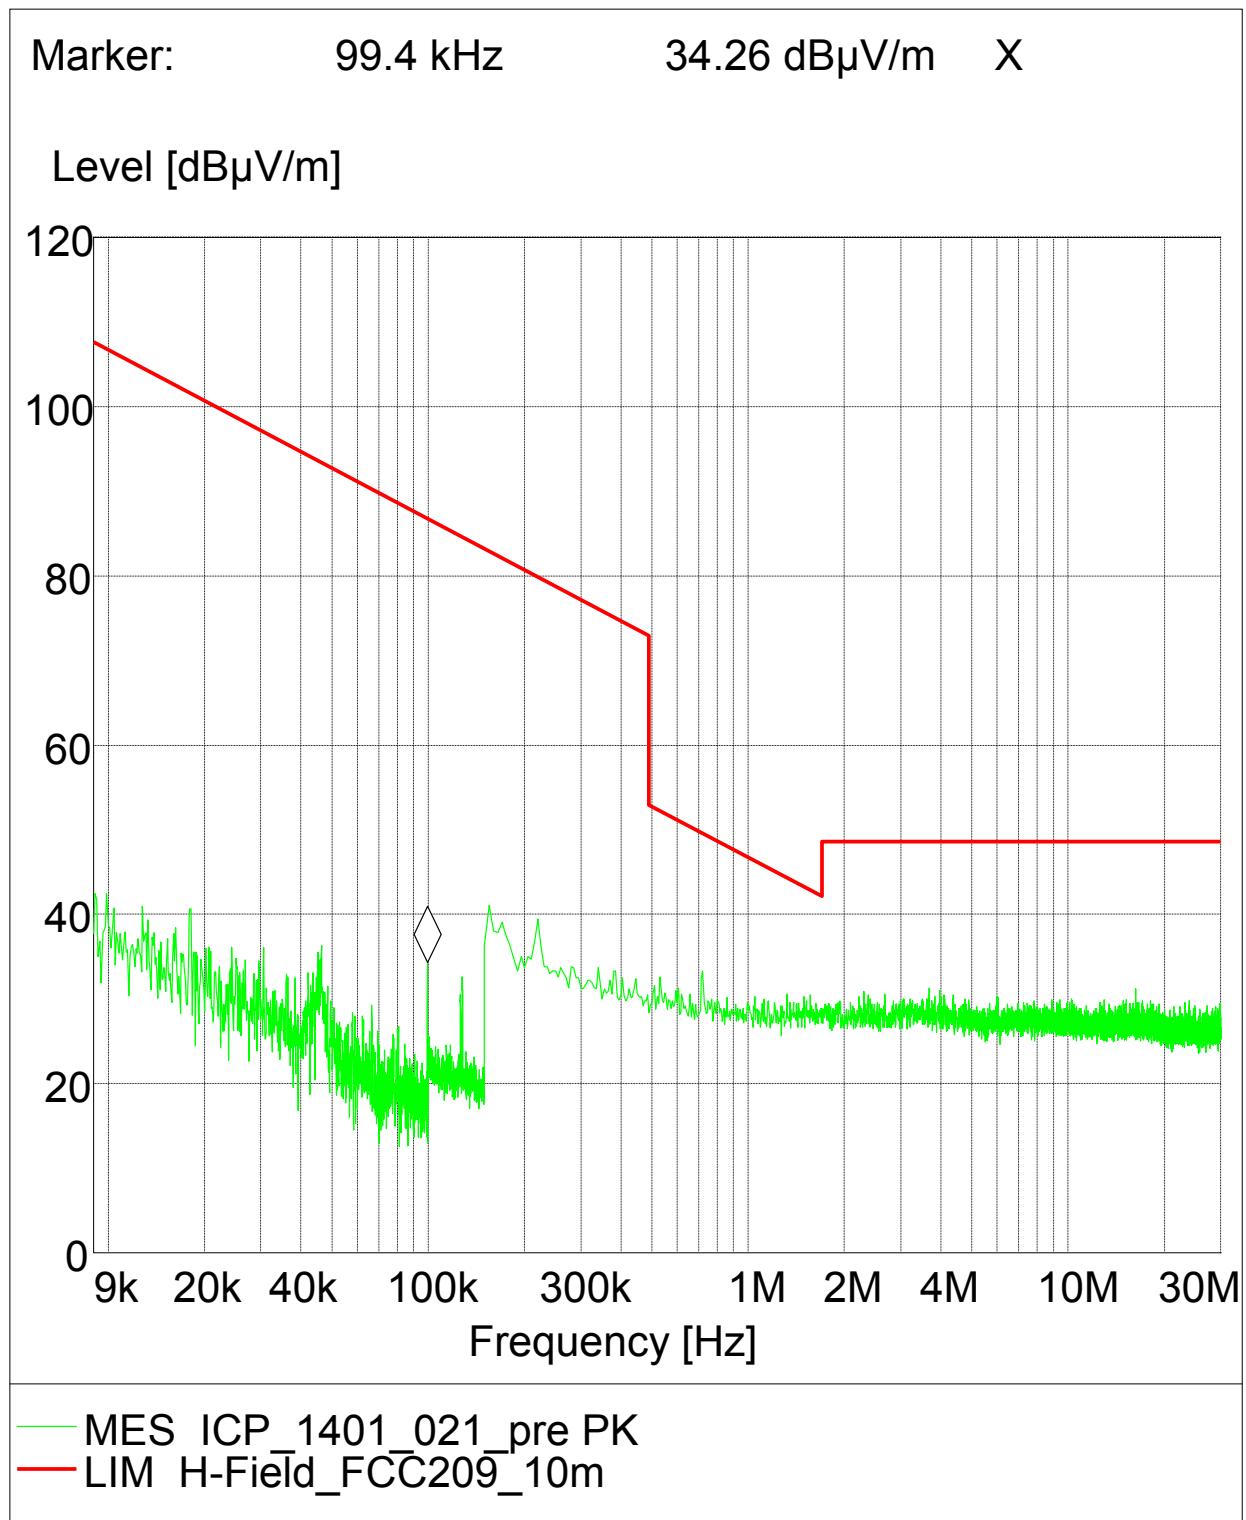

Remark: The peak found at 99.4 kHz is an emission from the loop antenna power supply

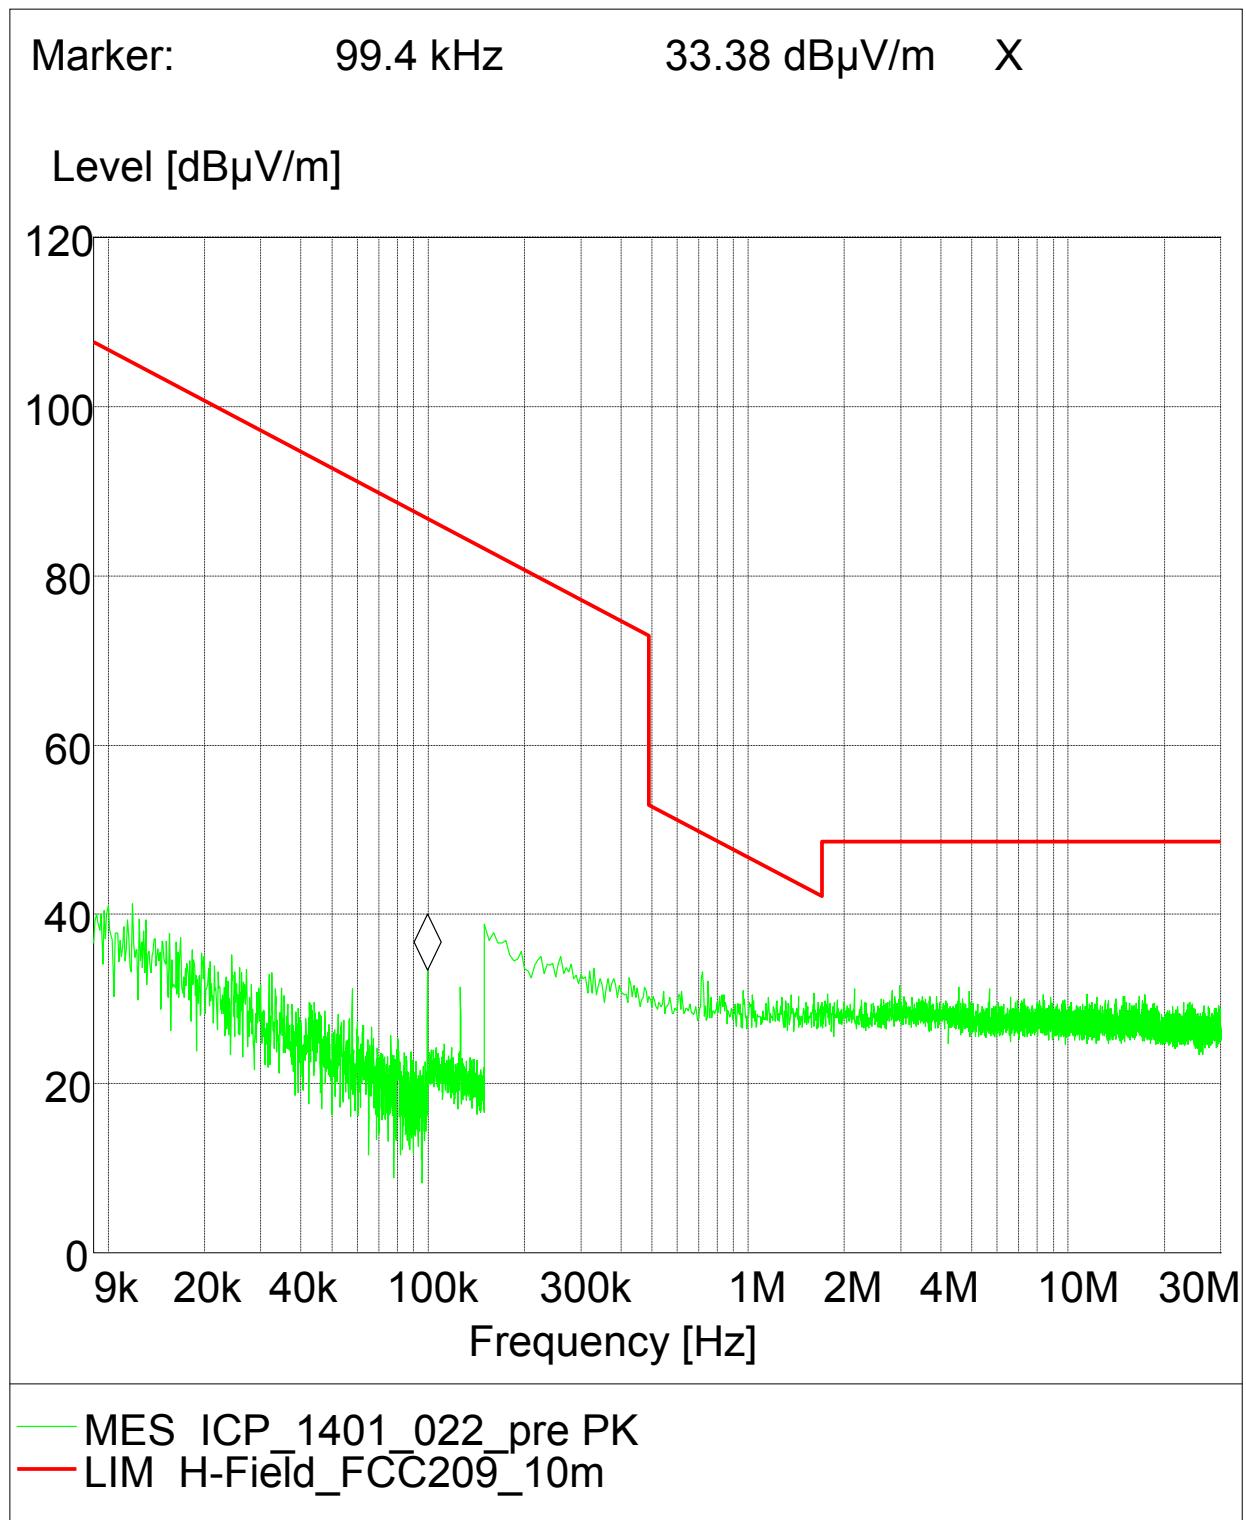

Remark: The peak found at 99.4 kHz is an emission from the loop antenna power supply



### Radiated emissions 30 MHz < f < 1 GHz


EUT: DE1066000aa01  
Manufacturer: ICP Group  
Operating Condition: 433.2 Ch. 1  
Test Site: 7 layers, Ratingen  
Comment: Horizontal EUT position  
Start of Test: 05.11.2014 / 16:30:10

#### SCAN TABLE: "FCC 15.231 C F433MHz"

Short Description:		FCC ClassB Field Strength				
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
30.0 MHz	1.0 GHz	60.0 kHz	MaxPeak	1.0 ms	120 kHz	HL562
1.0 GHz	1.6 GHz	500.0 kHz	MaxPeak	1.0 ms	1 MHz	HF 906 / 001
1.6 GHz	5.0 GHz	500.0 kHz	MaxPeak	1.0 ms	1 MHz	HF 906 / 001


Marker: 433.2 MHz 83.55 dB $\mu$ V/m

Level [dB $\mu$ V/m]

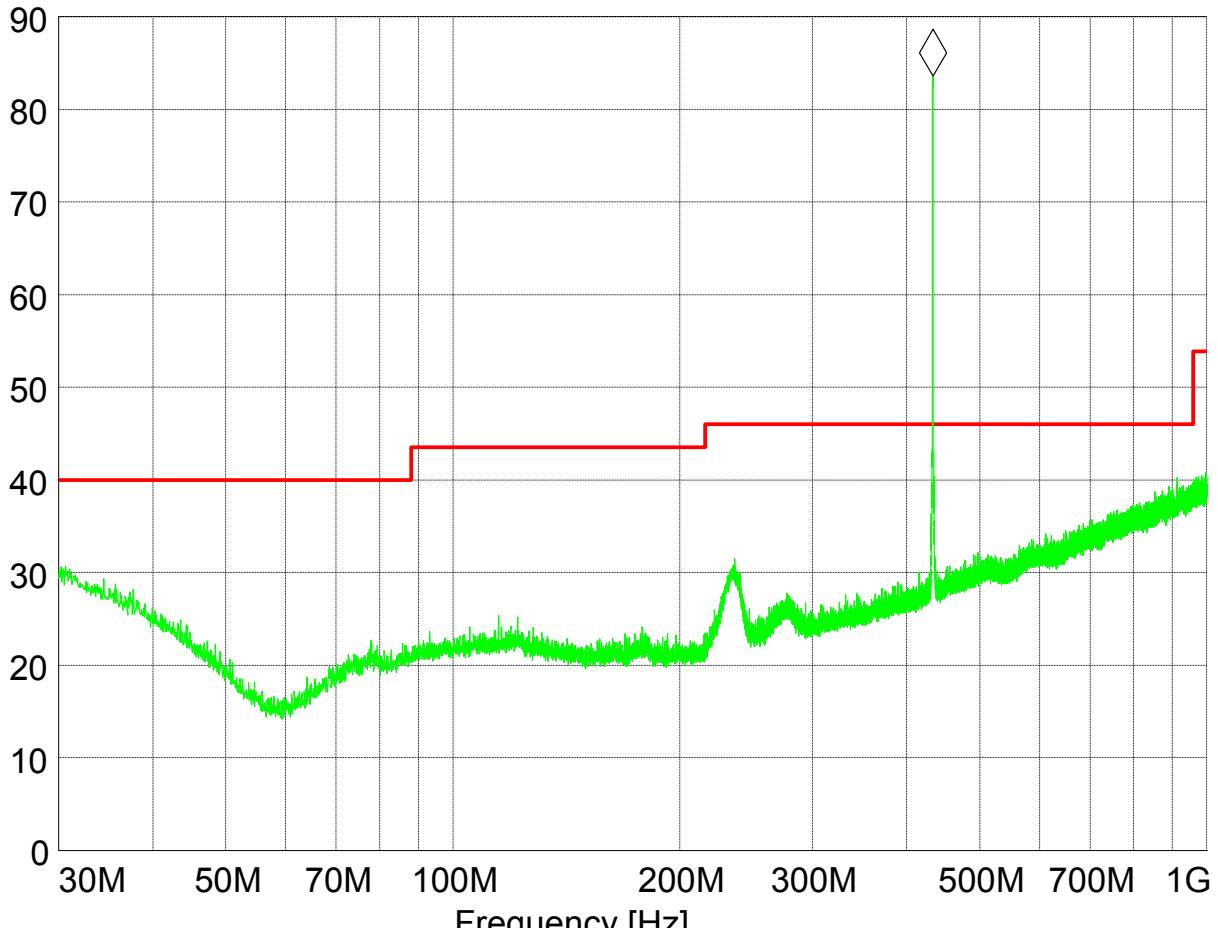




EUT: DE1066000aa01  
Manufacturer: ICP Group  
Operating Condition: 434.7 Ch. 6  
Test Site: 7 layers, Ratingen  
Comment: Horizontal EUT position  
Start of Test: 07.10.2014 / 16:12:58

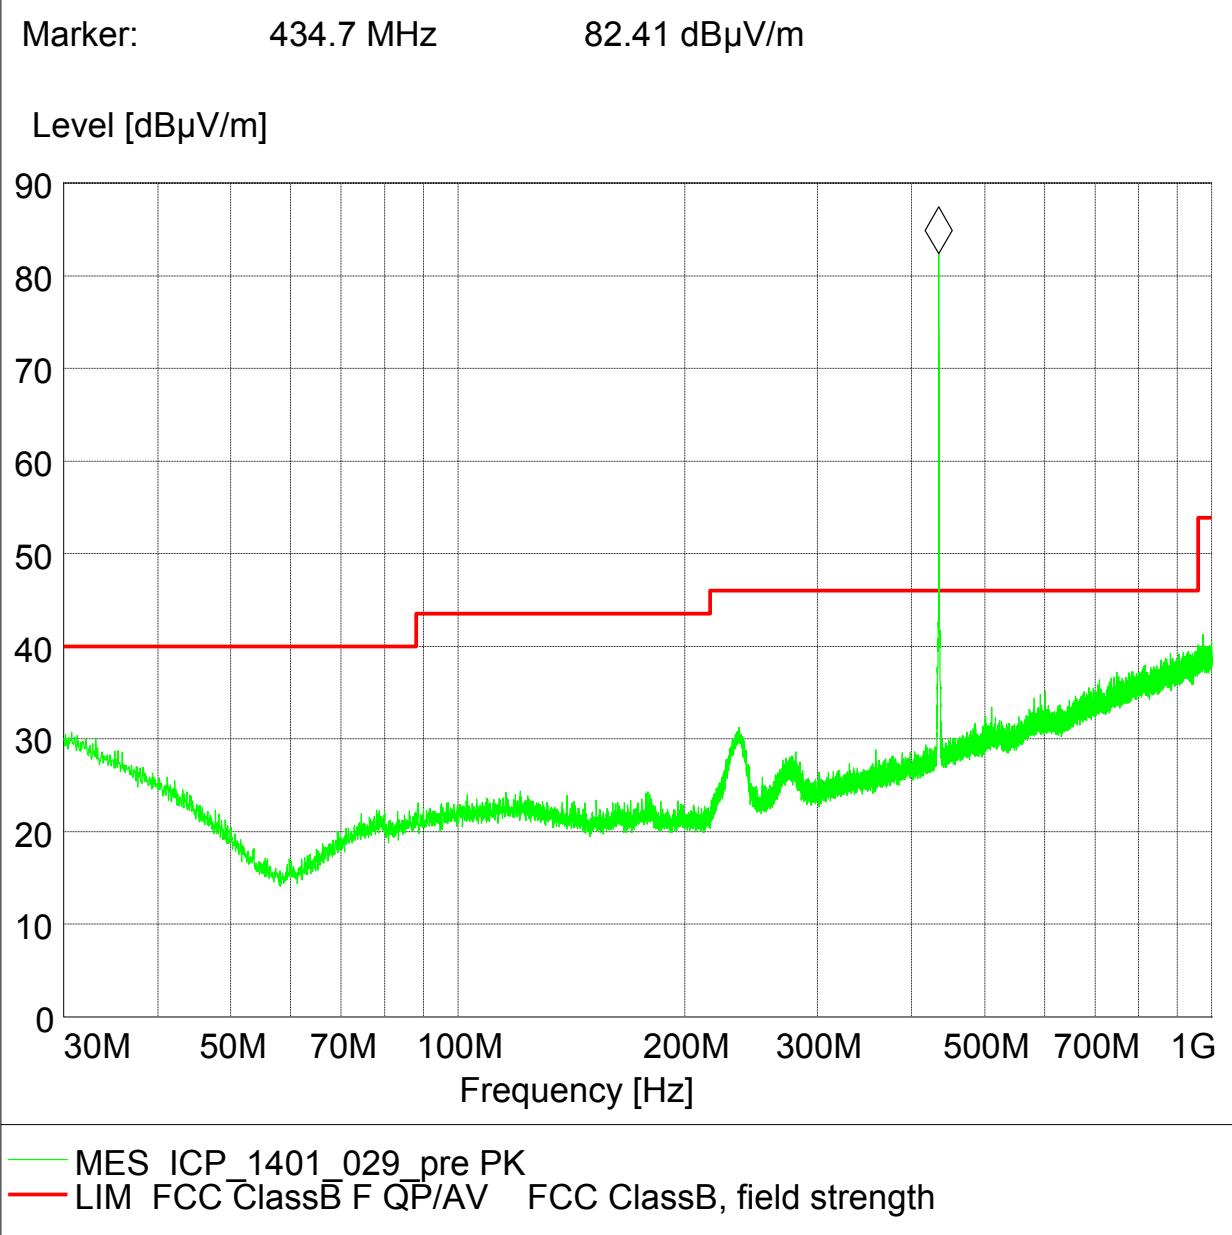


### 8.2.2 Radiated emissions f > 1 GHz


EUT: (DE1066000aa01)  
 Manufacturer: ICPGROUP  
 Operating Condition: TX 433.18 MHz, Ch: 1  
 Test Site: 7 layers Ratingen  
 Test Specification: FCC 15.231  
 Comment: vertical + horizontal antenna pol.; vertical EUT pos.  
 Horizontal EUT position

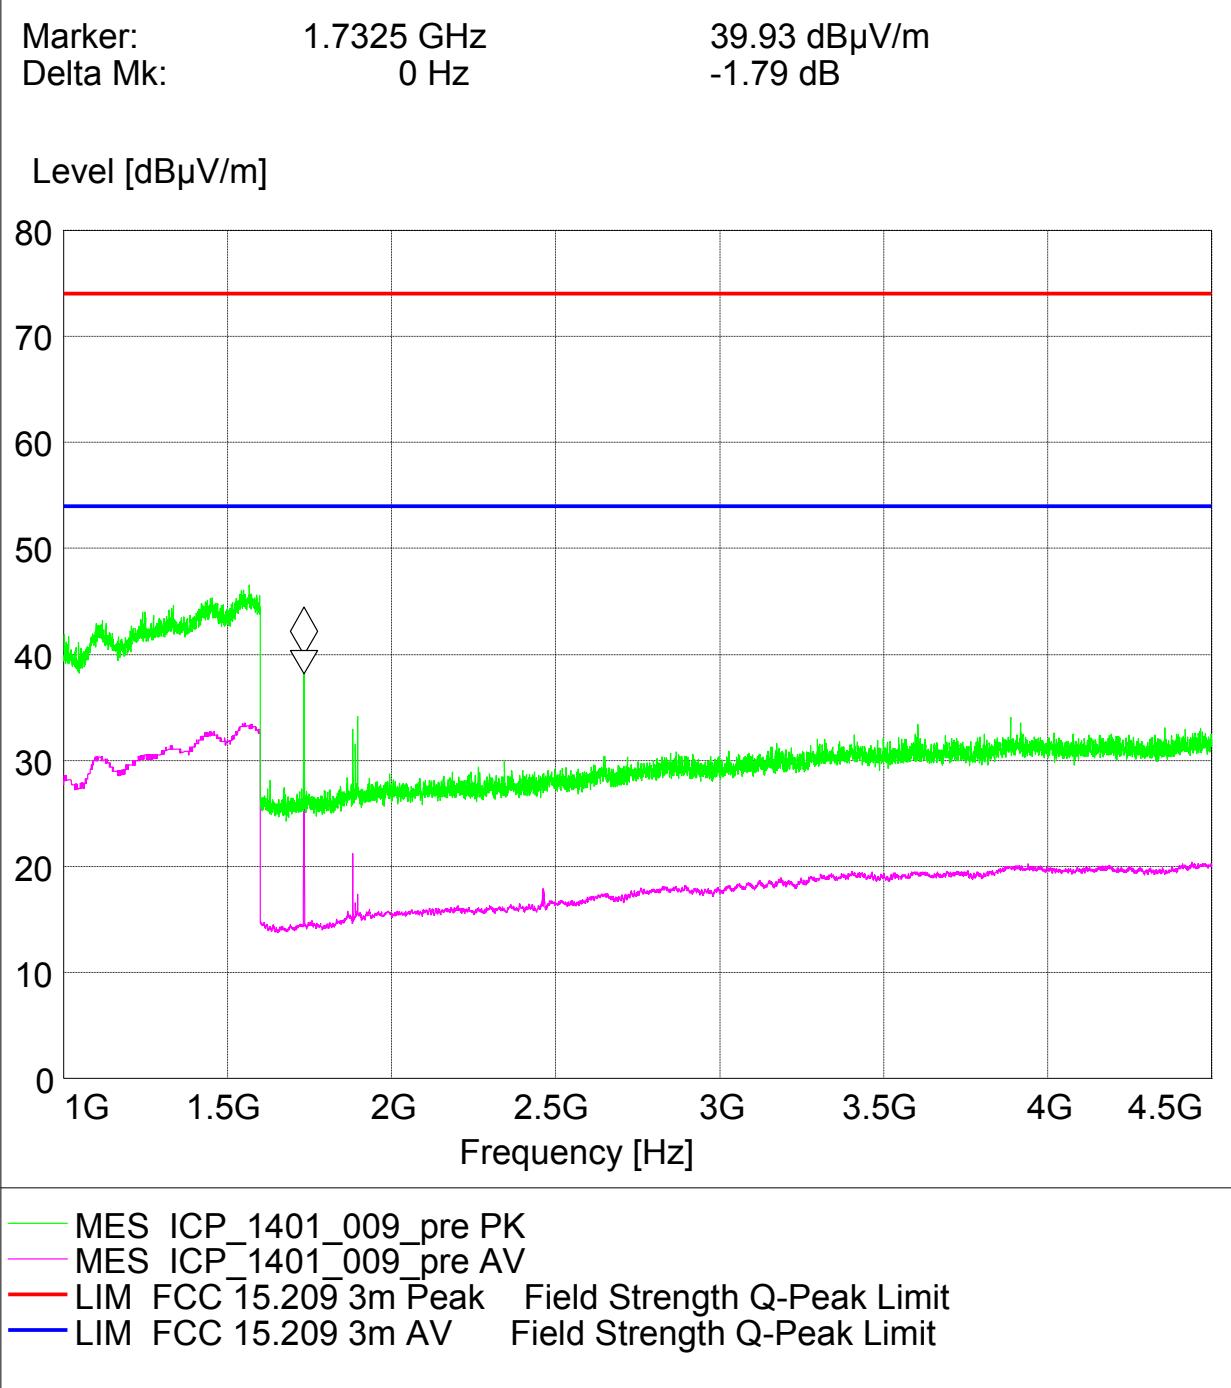

For the detailed scan around the peak value please see the page at the end of this section.

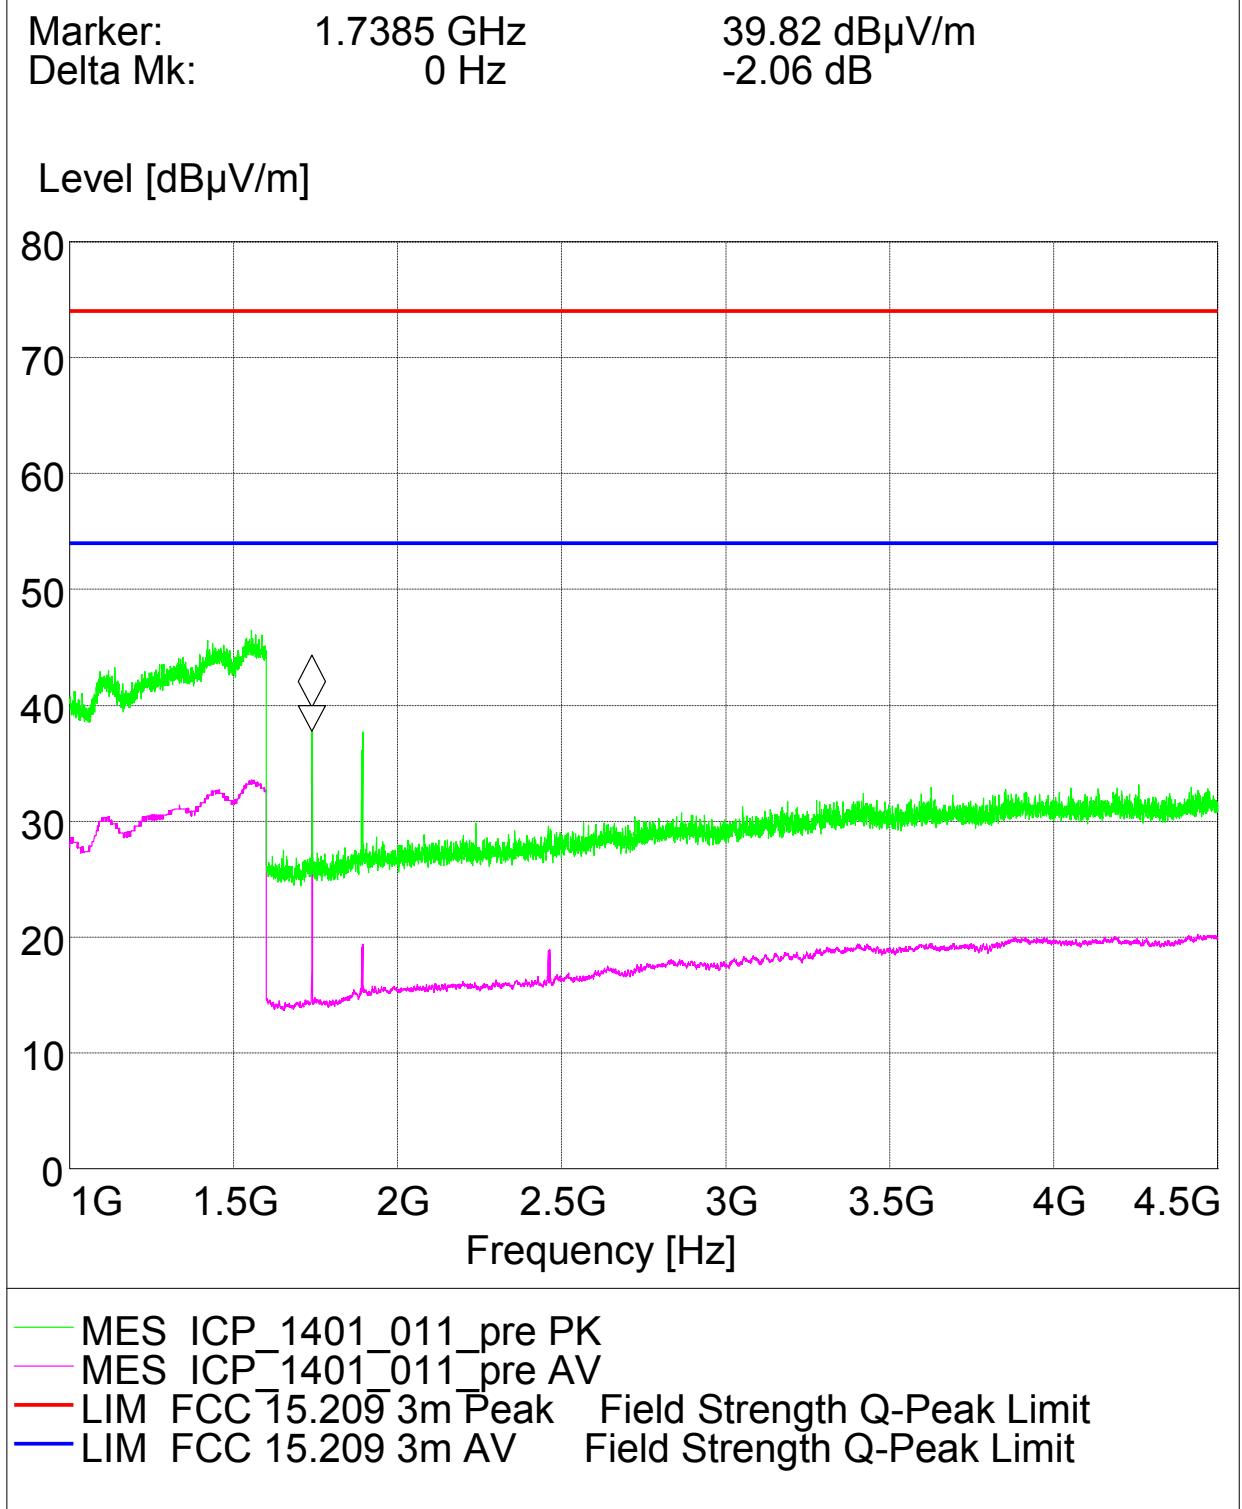

For the detailed scan around the peak value please see the page at the end of this section.

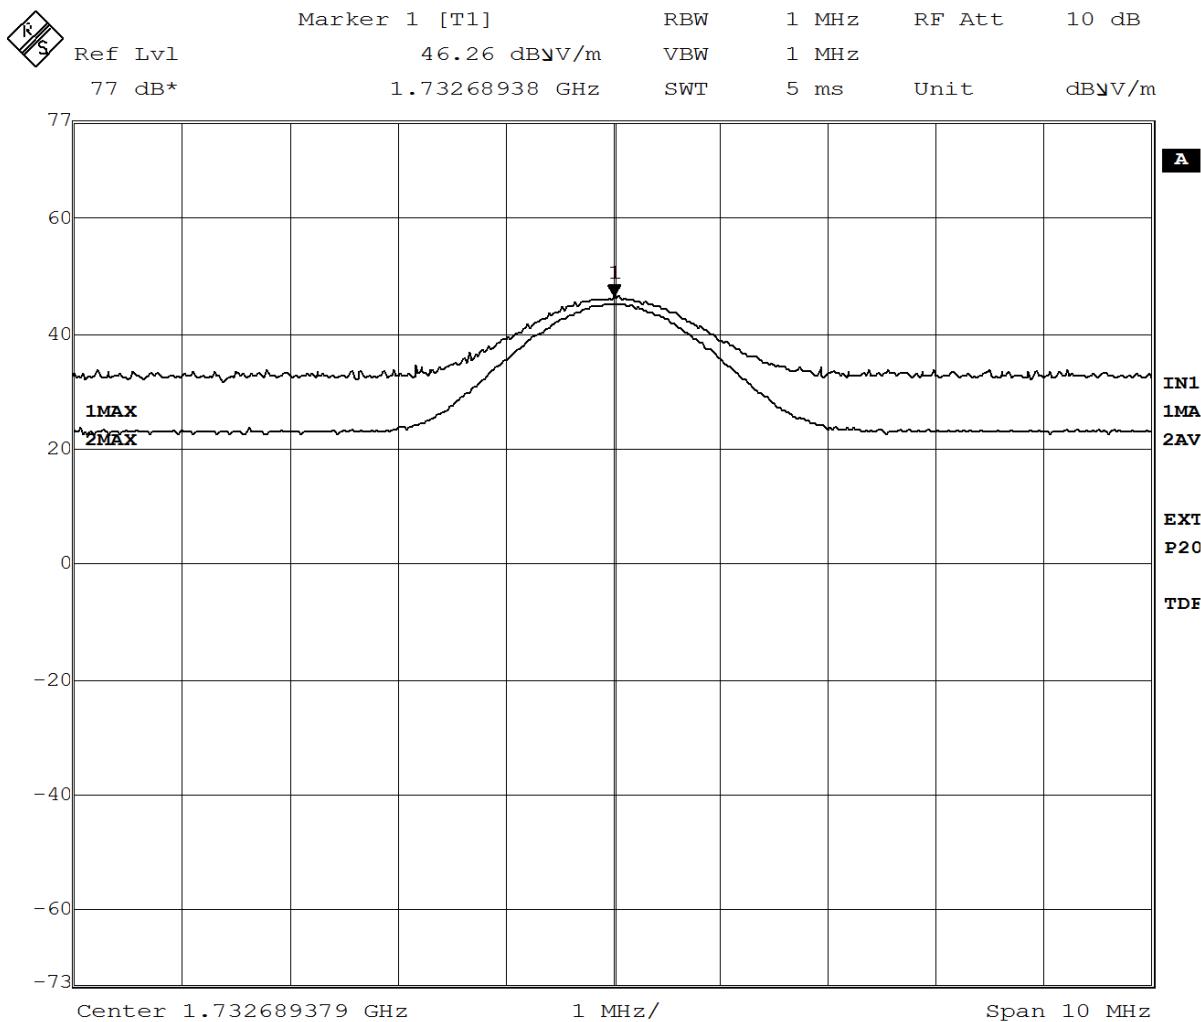

Date: 9.OCT.2014 13:21:22


Detailed scan for the peak value from the previous pages.

## 8.3 Occupation bandwidth


### 8.3.1 20 dB bandwidth

#### Op. Mode


op-mode 2

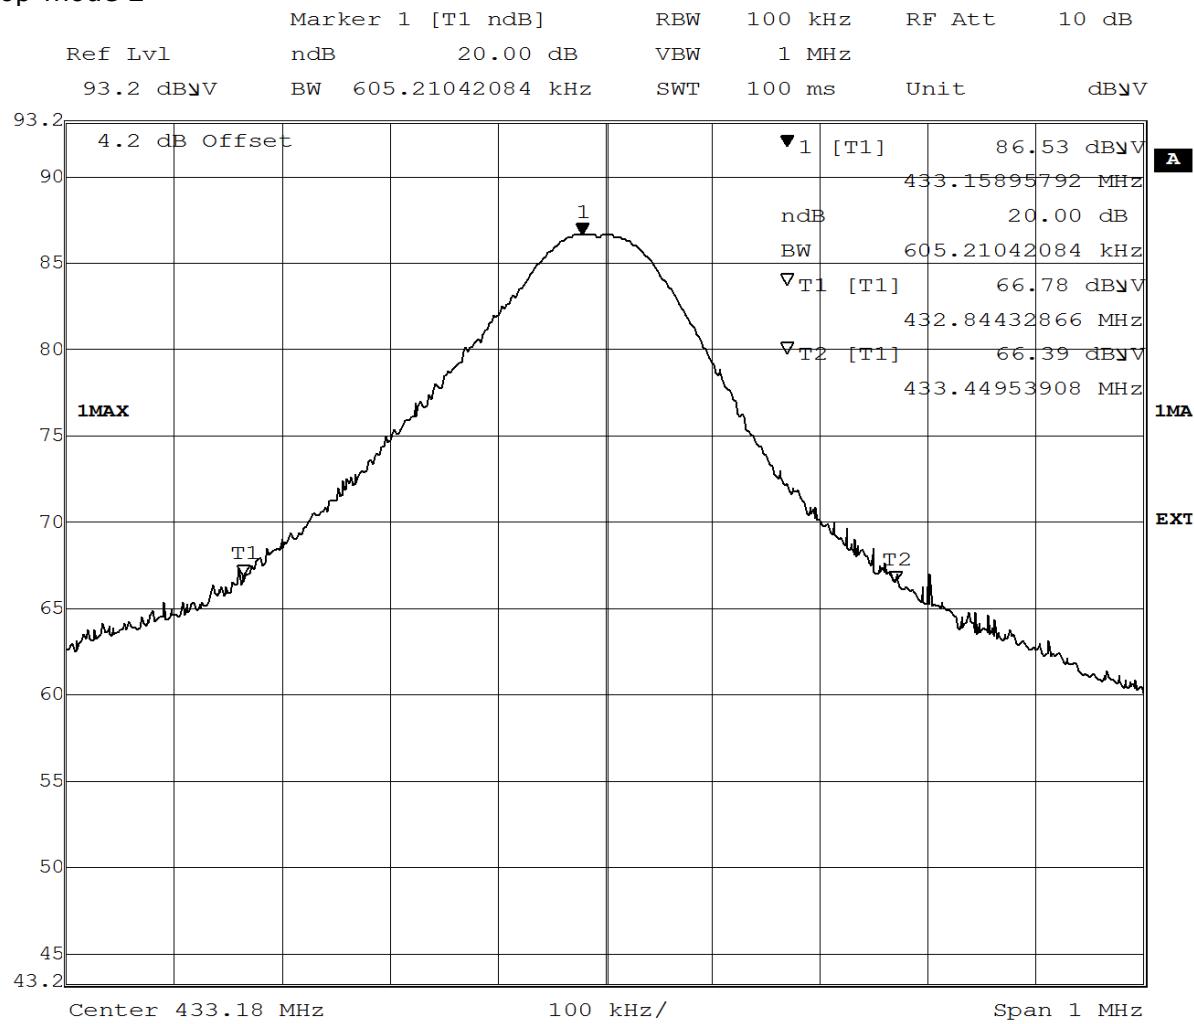

Date: 5.AUG.2014 16:58:52  
Channel 1 - 20 dB occupied bandwidth

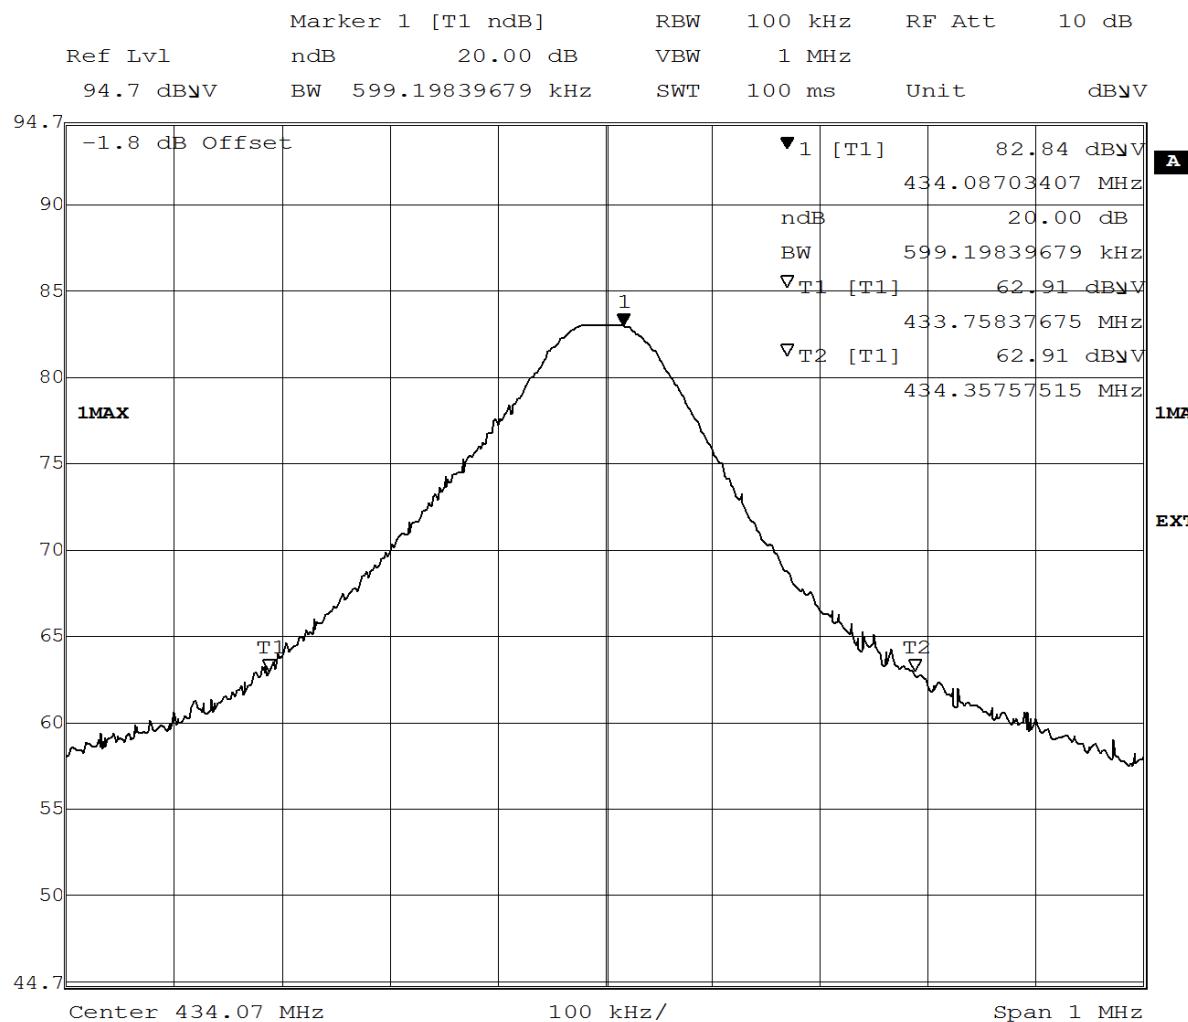

Date: 5.AUG.2014 15:40:47  
Channel 4 - 20 dB occupied bandwidth

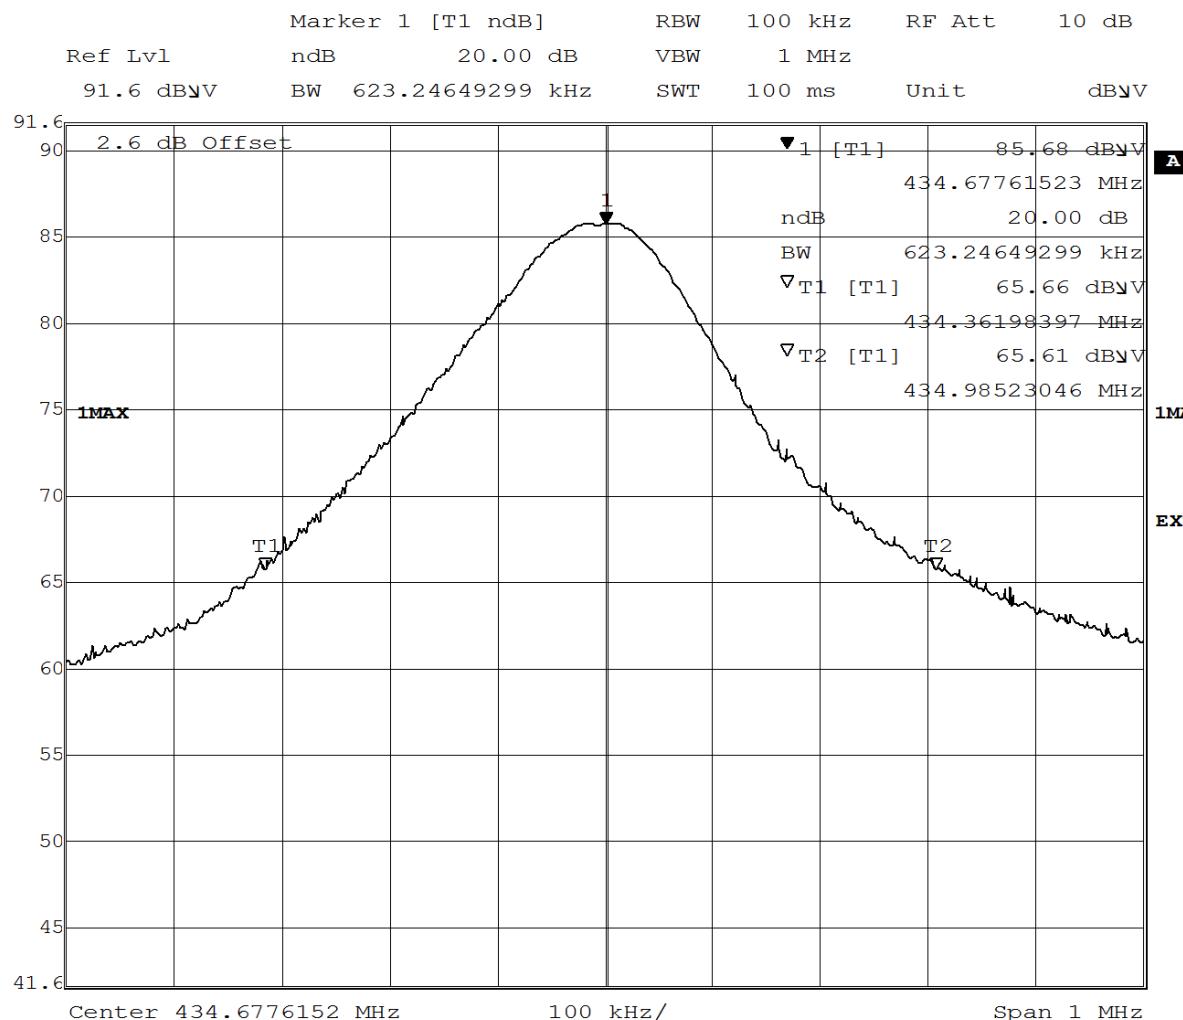


Date: 5.AUG.2014 16:43:57  
Channel 6 - 20 dB occupied bandwidth

### 8.3.2 99 % bandwidth


## Op. Mode

op-mode 2

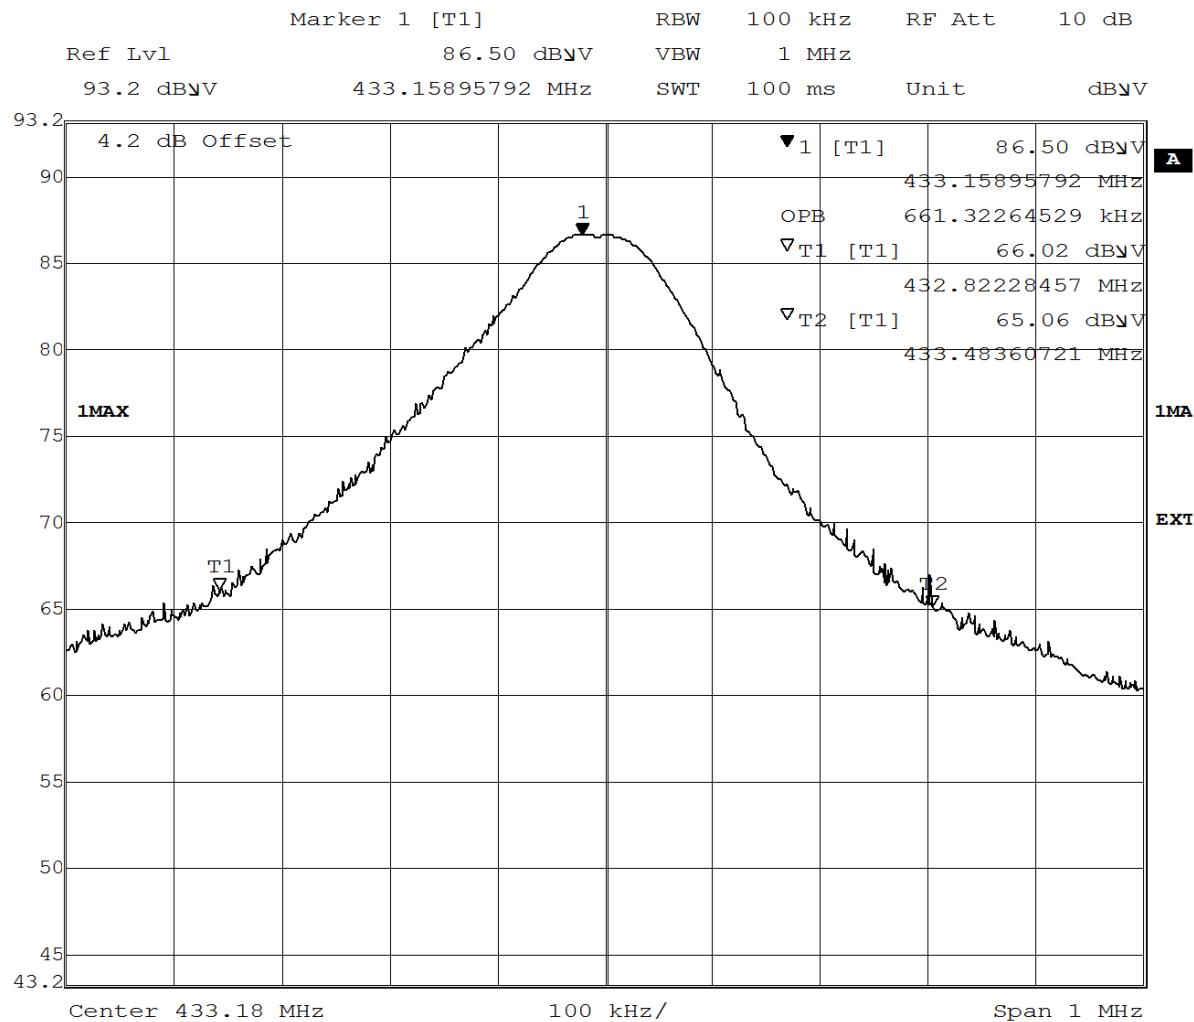


Date: 5.AUG.2014 16:57:52

Channel 1: 99% bandwidth.

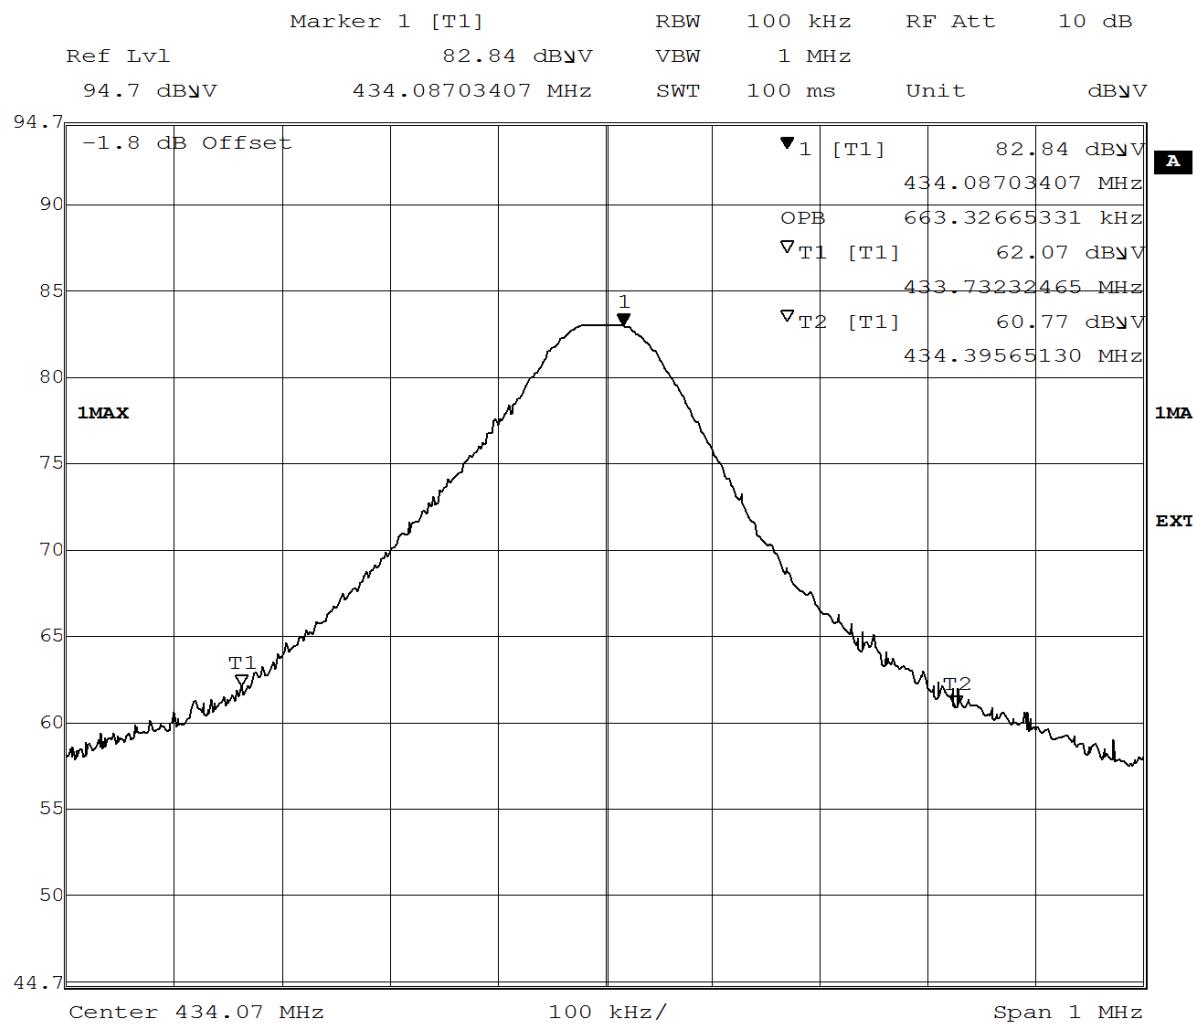

Date: 5.AUG.2014 15:39:26

Channel 4: 99% bandwidth.

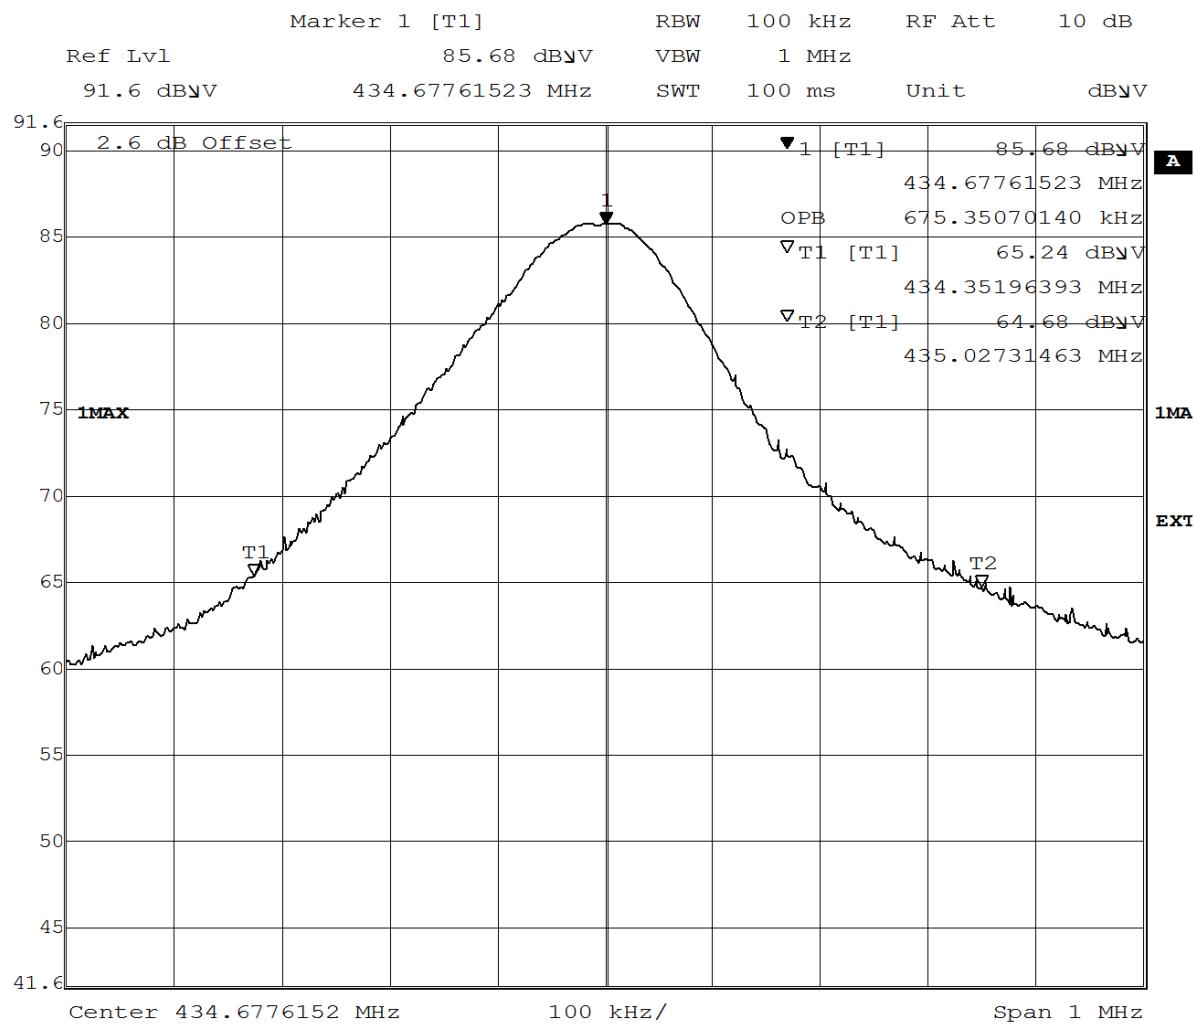

Date: 5.AUG.2014 16:44:48

Channel 6: 99% bandwidth.