

## Global United Technology Services Co., Ltd.

Report No.: GTSE14110199803

# **FCC REPORT**

Applicant: Yuko Technology Co., Ltd.

Address of Applicant: 6th Floor, A9 building, TianRui Industrial Park, FuYuan 1st

Road, FuYong ,Bao'an Shenzhen

**Equipment Under Test (EUT)** 

Product Name: Tablet PC

Model No.: 1853W, 1695,1890, 1971, 1102A, 1106, 1701, 1856, 1103, 1790

FCC ID: 2ADQN-I853W

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2013

Date of sample receipt: November 24, 2014

Date of Test: November 24, 2014-December 05, 2014

Date of report issued: December 05, 2014

Test Result: PASS \*

Authorized Signature:

Robinson Lo Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



#### Version 2

Version No.	Date	Description
00	December 05, 2014	Original

Prepared By:	5am. 900	Date:	December 05, 2014
	Project Engineer	_	
Check By:	hank yan	Date:	December 05, 2014

Reviewer

Global United Technology Services Co., Ltd. Project No.: GTSE141101998RF

2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China 518102



### 3 Contents

		Page
1	1 COVER PAGE	1
2	2 VERSION	2
3	3 CONTENTS	3
4		
5	5 GENERAL INFORMATION	5
	5.1 CLIENT INFORMATION	
	5.2 GENERAL DESCRIPTION OF EUT	5
	5.3 TEST MODE	
	5.4 DESCRIPTION OF SUPPORT UNITS	
	5.5 TEST FACILITY	
	5.6 TEST LOCATION	7
6	6 TEST INSTRUMENTS LIST	8
7	7 TEST RESULTS AND MEASUREMENT DATA	9
	7.1 ANTENNA REQUIREMENT	9
	7.2 CONDUCTED EMISSIONS	
	7.3 CONDUCTED OUTPUT POWER	13
	7.4 CHANNEL BANDWIDTH	
	7.5 POWER SPECTRAL DENSITY	
	7.6 BAND EDGES	
	7.6.1 Conducted Emission Method	
	7.6.2 Radiated Emission Method	
	7.7 Spurious Emission	
	7.7.1 Conducted Emission Method	
	7.7.2 Radiated Emission Method	25
8	8 TEST SETUP PHOTO	31
9	9 EUT CONSTRUCTIONAL DETAILS	32
J	· Loi Joitoiitouital de lailu	



### 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.



### 5 General Information

### 5.1 Client Information

Applicant:	Yuko Technology Co., Ltd.	
Address of Applicant:	6th Floor, A9 building, TianRui Industrial Park, FuYuan 1st Road, FuYong ,Bao'an Shenzhen	
Manufacturer:	Yuko Technology Co., Ltd.	
Address of Manufacturer:	6th Floor, A9 building, TianRui Industrial Park, FuYuan 1st Road, FuYong ,Bao'an Shenzhen	

### 5.2 General Description of EUT

Product Name:	Tablet PC	
Model No.:	I853W, I695, I890, I971, I102A, I106, I701, I856, I103, I790	
Operation Frequency:	2402MHz~2480MHz	
Channel Numbers:	40	
Channel Separation:	2MHz	
Modulation Type:	GFSK	
Antenna Type:	Integral antenna	
Antenna Gain:	2.0dBi (declare by Applicant)	
Power Supply:	Model No.: K-E30502000U1	
	Input: AC 100-240V, 50-60Hz, 0.35A Max.	
	Output: DC 5.0V, 2A	
	Or	
	DC 3.8V Li-ion battery	

Shenzhen, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Operation Frequency each of channel								
Channel Frequency Channel		Frequency	Channel	Frequency	Channel	Frequency		
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz	
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz	
•			• !	• !	• !		•	
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz	
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz	

### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2442MHz
The Highest channel	2480MHz



### 5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode		
Remark: During the test, the new battery was used.			

### 5.4 Description of Support Units

None

### 5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### • CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

### • FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fuly described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

### • Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

### 5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen,

China

Tel: 0755-27798480 Fax: 0755-27798960

Global United Technology Services Co., Ltd.

2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District,

Shenzhen, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



### 6 Test Instruments list

Radi	Radiated Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 29 2014	Mar. 28 2015		
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A		
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Jul. 01 2014	Jun 30 2015		
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 01 2014	Jun 30 2015		
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Jul. 01 2014	Jun 30 2015		
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 27 2014	June 26 2015		
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 28 2014	Mar. 27 2015		
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 29 2014	Mar. 28 2015		
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014	Mar. 28 2015		
11	Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014	Mar. 28 2015		
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 29 2014	Mar. 28 2015		
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 01 2014	Jun. 30, 2015		
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 01 2014	Jun. 30, 2015		
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 27 2014	June 26 2015		
16	Band filter	Amindeon	82346	GTS219	Mar. 29 2014	Mar. 28 2015		
17	Power Meter	Anritsu	ML2495A	GTS540	July 01 2014	June 30 2015		
18	Power Sensor	Anritsu	MA2411B	GTS541	July 01 2014	June 30 2015		

Cond	Conducted Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	July 01 2014	June 30 2015		
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015		
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015		
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015		
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015		
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015		
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		

Gen	General used equipment:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015		

Project No.: GTSE141101998RF

Page 8 of 32



### 7 Test results and Measurement Data

### 7.1 Antenna requirement

**Standard requirement:** FCC Part15 C Section 15.203 /247(c)

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### E.U.T Antenna:

The antenna is Integral antenna, the best case gain of the antenna is 2.0dBi



Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960




### 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207	,					
Test Method:	ANSI C63.4:2003						
Test Frequency Range:	150KHz to 30MHz						
, , ,	Class B						
Class / Severity:	RBW=9KHz, VBW=30KHz, Sv	woon time-oute					
Receiver setup:	RBVV=9KHZ, VBVV=3UKHZ, SV		15.10				
Limit:	Frequency range (MHz)						
	0.15-0.5	Quasi-peak 66 to 56*	Average 56 to 46*				
	0.5-5	56	46				
	5-30	60	50				
	* Decreases with the logarithn	n of the frequency.	<u> </u>				
Test setup:	Reference Plane						
	AUX Equipment  Test table/Insulation plane  Remark E.U.T. Equipment Under Test LISN Line Impedence Stabilization Network Test table height=0.8m						
Test procedure:	<ol> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative</li> </ol>						
	positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.3 for details	}					
Test results:	Pass						



### Measurement data

Line:

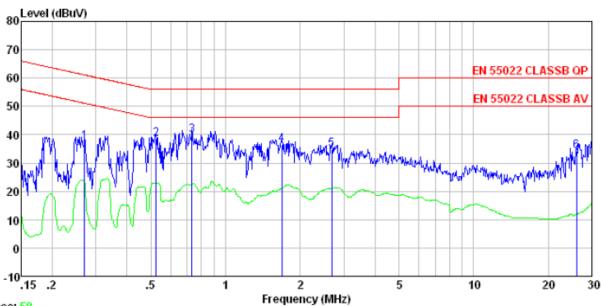

Trace: 58

Site

: Shielded room

Condition : EN 55022 CLASSB QP LISN-2013 LINE

: 1998RF

Job No. Test mode : Bluetooth4.0 mode

Wike


est	Engineer:	Mike Read	ITSM	Cable		Limit	Over		
	Freq		Factor					Remark	
	MHz	dBuV	dB	dB	dBuV	dBuV	dB		
1 2 3 4 5	0.270 0.524 0.731 1.689 2.678	39. 47 36. 15 34. 67	0.14 0.12 0.14	0.11 0.13 0.14 0.15	39. 74 36. 41 34. 96	56.00 56.00 56.00 56.00	-17.54 -16.26 -19.59 -21.04	QP QP QP QP	
6		34.67		0.15					

Shenzhen, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



#### Neutral:

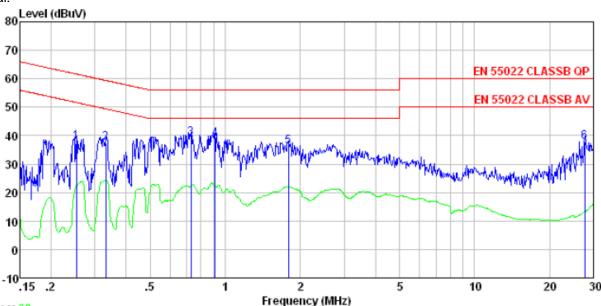

Trace: 60

Site

: Shielded room

Condition : EN 55022 CLASSB QP LISN-2013 NEUTRAL

Job No. : 1998RF

Test mode : Bluetooth4.0 mode

Test Engineer: Mike


	Freq	Read	LISN Factor				Over Limit	Remark
	MHz	-dBuV	dB	dB	dBu₹	dBuV	dB	
1 2 3 4 5 6	0.332 0.727	38. 92 38. 77 35. 83	0.06 0.07 0.07 0.09	0.13 0.13 0.14	37. 46 39. 12 38. 97 36. 06	59. 40 56. 00 56. 00 56. 00	-21. 94 -16. 88 -17. 03 -19. 94	QP QP QP QP

#### Motos

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



### 7.3 Conducted Output Power

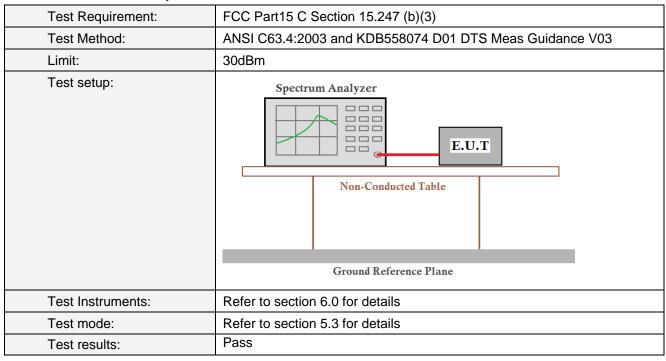


### **Measurement Data**

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result	
Lowest	-1.94			
Middle	Middle -0.72		Pass	
Highest	-0.53			


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960




### Test plot as follows:



### Lowest channel



### Middle channel



Highest channel

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



### 7.4 Channel Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)		
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03		
Limit:	>500KHz		
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		


### **Measurement Data**

Test channel	Channel Bandwidth (KHz)	Limit(KHz)	Result
Lowest	807.672		
Middle	804.369	>500	Pass
Highest	807.041		


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960




### Test plot as follows:



### Lowest channel



### Middle channel



Highest channel

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



### 7.5 Power Spectral Density

Test Requirement:	FCC Part15 C Section 15.247 (e)		
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03		
Limit:	8dBm/3kHz		
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

### **Measurement Data**


Test channel	Power Spectral Density (dBm)	Limit(dBm/3kHz)	Result
Lowest	-4.28		
Middle	-3.03	8.00	Pass
Highest	-2.87		

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960


Page 17 of 32




### Test plot as follows:



### Lowest channel



### Middle channel



Highest channel

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960




### 7.6 Band edges


### 7.6.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)			
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Pass			

### Test plot as follows:







Highest channel



### 7.6.2 Radiated Emission Method

7.6.2 Radiated Emission Met					
Test Requirement:	FCC Part15 C S		and 15.205		
Test Method:	ANSI C63.4: 20	03			
Test Frequency Range:	All of the restric	t bands were t	tested, only	the worst b	and's (2310MHz to
	2500MHz) data	was showed.			
Test site:	Measurement D	istance: 3m			
Receiver setup:	Frequency	Detector	RBW	VBW	Value
,		Peak	1MHz	3MHz	Peak
	Above 1GHz	RMS	1MHz	3MHz	Average
Limit:	Freque		Limit (dBuV		Value
		•	54.0		Average
	Above 1	GHz	74.0		Peak
Test setup:	EUT Turn Table 0	3m 4m 4m 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		Antenna Tower  Horn Antenna Spectrum Analyzer  Amplifier	_
Test Procedure:	<ol> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.</li> <li>The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test</li> </ol>				
Test Instruments:	Refer to section	node is recorde 6.0 for details			
Test mode:	Refer to section				
Test results:	Pass				



### Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test channel:	Lowest
---------------	--------

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	39.12	27.91	5.30	34.11	38.22	74.00	-35.78	Vertical
2390.00	36.72	27.59	5.38	34.01	35.68	74.00	-38.32	Vertical
2400.00	58.40	27.58	5.39	34.01	57.36	74.00	-16.64	Vertical
2310.00	37.00	27.91	5.30	34.11	36.10	74.00	-37.90	Horizontal
2390.00	37.89	27.59	5.38	34.01	36.85	74.00	-37.15	Horizontal
2400.00	59.71	27.58	5.39	34.01	58.67	74.00	-15.33	Horizontal

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	22.59	27.91	5.30	34.11	21.69	54.00	-32.31	Vertical
2390.00	20.90	27.59	5.38	34.01	19.86	54.00	-34.14	Vertical
2400.00	42.45	27.58	5.39	34.01	41.41	54.00	-12.59	Vertical
2310.00	21.61	27.91	5.30	34.11	20.71	54.00	-33.29	Horizontal
2390.00	20.50	27.59	5.38	34.01	19.46	54.00	-34.54	Horizontal
2400.00	43.38	27.58	5.39	34.01	42.34	54.00	-11.66	Horizontal

Shenzhen, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



9
---

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	39.64	27.53	5.47	33.92	38.72	74.00	-35.28	Vertical
2500.00	38.70	27.55	5.49	33.90	37.84	74.00	-36.16	Vertical
2483.50	42.97	27.53	5.47	33.92	42.05	74.00	-31.95	Horizontal
2500.00	38.68	27.55	5.49	33.90	37.82	74.00	-36.18	Horizontal

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	24.47	27.53	5.47	33.92	23.55	54.00	-30.45	Vertical
2500.00	23.43	27.55	5.49	33.90	22.57	54.00	-31.43	Vertical
2483.50	26.66	27.53	5.47	33.92	25.74	54.00	-28.26	Horizontal
2500.00	24.95	27.55	5.49	33.90	24.09	54.00	-29.91	Horizontal

### Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



### 7.7 Spurious Emission

### 7.7.1 Conducted Emission Method


Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960




### Test plot as follows:

### Lowest channel




30MHz~10GHz






30MHz~10GHz


Highest channel Agilent




30MHz~10GHz



10GHz~25GHz



10GHz~25GHz



10GHz~25GHz



### 7.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Se	ection 15.209						
Test Method:	ANSI C63.4: 200	3						
Test Frequency Range:	30MHz to 25GHz	•						
Test site:	Measurement Dis	stance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Value			
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak			
	Above 1GHz	Peak	1MHz	3MHz	Peak			
	Above TOTIZ	RMS	1MHz	3MHz	Average			
Limit:	Frequen	су	Limit (dBuV	/m @3m)	Value			
	30MHz-88	MHz	40.0	0	Quasi-peak			
	88MHz-216	SMHz	43.5	0	Quasi-peak			
	216MHz-96	0MHz	46.0	0	Quasi-peak			
	960MHz-1	GHz	54.0	0	Quasi-peak			
	Above 10	`U-7	54.0	0	Average			
	Above 10	JI 12	74.0	0	Peak			
	Turn 0.8m Table 0.8m A Ground Plane — Above 1GHz	Antenna Tower  Antenna Tower						
Test Procedure:	1. The EUT was	placed on the		ating table 0	.8 meters above			

Global United Technology Services Co., Ltd.

2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District,

Shenzhen, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



	the ground at a 3 meter camber. The table was rotated 360 degrees to
	<ul><li>determine the position of the highest radiation.</li><li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li></ul>
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	<ol><li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li></ol>
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
	7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

### Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis which it is worse case.



### **Measurement Data**

### ■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
32.98	48.76	14.31	0.59	32.06	31.60	40.00	-8.40	Vertical
62.43	36.20	13.77	0.88	31.92	18.93	40.00	-21.07	Vertical
94.43	39.58	14.75	1.15	31.74	23.74	43.50	-19.76	Vertical
212.27	36.25	12.93	1.91	32.15	18.94	43.50	-24.56	Vertical
392.10	36.97	16.87	2.82	31.91	24.75	46.00	-21.25	Vertical
142.82	51.44	10.21	1.52	31.95	31.22	43.50	-12.28	Vertical
53.69	40.74	15.07	0.81	31.95	24.67	40.00	-15.33	Horizontal
79.80	49.31	10.54	1.03	31.76	29.12	40.00	-10.88	Horizontal
148.44	53.71	10.25	1.56	31.98	33.54	43.50	-9.96	Horizontal
246.82	45.63	14.08	2.11	32.16	29.66	46.00	-16.34	Horizontal
590.97	36.98	20.29	3.69	31.09	29.87	46.00	-16.13	Horizontal
776.88	38.69	21.77	4.37	31.29	33.54	46.00	-12.46	Horizontal

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



### ■ Above 1GHz

Test channel	:			Low	est			
Peak value:				•				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	41.87	31.78	8.60	32.09	50.16	74.00	-23.84	Vertical
7206.00	43.48	36.15	11.65	32.00	59.28	74.00	-14.72	Vertical
9608.00	32.30	37.95	14.14	31.62	52.77	74.00	-21.23	Vertical
12010.00	33.02	39.08	15.03	35.51	51.62	74.00	-22.38	Vertical
14412.00	*					74.00		Vertical
4804.00	33.91	31.78	8.60	32.09	42.20	74.00	-31.80	Horizontal
7206.00	34.48	36.15	11.65	32.00	50.28	74.00	-23.72	Horizontal
9608.00	22.94	37.95	14.14	31.62	43.41	74.00	-30.59	Horizontal
12010.00	23.65	39.08	15.03	35.51	42.25	74.00	-31.75	Horizontal
14412.00	*					74.00		Horizontal

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	27.79	31.78	8.60	32.09	36.08	54.00	-17.92	Vertical
7206.00	28.02	36.15	11.65	32.00	43.82	54.00	-10.18	Vertical
9608.00	20.12	37.95	14.14	31.62	40.59	54.00	-13.41	Vertical
12010.00	18.63	39.08	15.03	35.51	37.23	54.00	-16.77	Vertical
14412.00	*					54.00		Vertical
4804.00	22.13	31.78	8.60	32.09	30.42	54.00	-23.59	Horizontal
7206.00	22.21	36.15	11.65	32.00	38.01	54.00	-15.99	Horizontal
9608.00	11.75	37.95	14.14	31.62	32.22	54.00	-21.78	Horizontal
12010.00	10.79	39.08	15.03	35.51	29.39	54.00	-24.61	Horizontal
14412.00	*					54.00		Horizontal

### Remark:

Shenzhen, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960

Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor
 "\*", means this data is the too weak instrument of signal is unable to test.



Test channel	l:			М	iddle			
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4884.00	47.27	31.86	8.67	32.12	55.68	74.00	-18.32	Vertical
7326.00	40.08	36.41	11.72	31.89	56.32	74.00	-17.68	Vertical
9768.00	30.13	38.35	14.27	31.62	51.13	74.00	-22.87	Vertical
12210.00	31.27	38.89	15.16	35.65	49.67	74.00	-24.33	Vertical
14652.00	*					74.00		Vertical
4884.00	35.38	31.86	8.67	32.12	43.79	74.00	-30.21	Horizontal
7326.00	31.25	36.41	11.72	31.89	47.49	74.00	-26.51	Horizontal
9768.00	22.81	38.35	14.27	31.62	43.81	74.00	-30.19	Horizontal
12210.00	24.27	38.89	15.16	35.65	42.67	74.00	-31.33	Horizontal
14652.00	*					74.00		Horizontal
Average val	ue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4884.00	31.27	31.86	8.67	32.12	39.68	54.00	-14.32	Vertical
7326.00	24.19	36.41	11.72	31.89	40.43	54.00	-13.57	Vertical
9768.00	15.21	38.35	14.27	31.62	36.21	54.00	-17.79	Vertical
12210.00	17.65	38.89	15.16	35.65	36.05	54.00	-17.95	Vertical
14652.00	*					54.00		Vertical
4884.00	23.57	31.86	8.67	32.12	31.98	54.00	-22.02	Horizontal
7326.00	18.85	36.41	11.72	31.89	35.09	54.00	-18.91	Horizontal
9768.00	9.96	38.35	14.27	31.62	30.96	54.00	-23.04	Horizontal
12210.00	12.27	38.89	15.16	35.65	30.67	54.00	-23.33	Horizontal
14652.00	*					54.00		Horizontal

### Remark:

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960

<sup>1.</sup> Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

<sup>2. &</sup>quot;\*", means this data is the too weak instrument of signal is unable to test.



Test channel	<b>:</b>			Hig	hest			
Peak value:			,					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	45.76	31.93	8.73	32.16	54.26	74.00	-19.74	Vertical
7440.00	36.63	36.59	11.79	31.78	53.23	74.00	-20.78	Vertical
9920.00	28.69	38.81	14.38	31.88	50.00	74.00	-24.00	Vertical
12400.00	31.59	38.76	15.27	35.27	50.35	74.00	-23.65	Vertical
14880.00	*					74.00		Vertical
4960.00	33.14	31.93	8.73	32.16	41.64	74.00	-32.36	Horizontal
7440.00	31.46	36.59	11.79	31.78	48.06	74.00	-25.94	Horizontal
9920.00	24.81	38.81	14.38	31.88	46.12	74.00	-27.88	Horizontal
12400.00	26.87	38.76	15.27	35.27	45.63	74.00	-28.37	Horizontal
14880.00	*					74.00		Horizontal
Average val	ue:		•		•		•	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	30.38	31.93	8.73	32.16	38.88	54.00	-15.12	Vertical
7440.00	21.95	36.59	11.79	31.78	38.55	54.00	-15.45	Vertical
9920.00	14.20	38.81	14.38	31.88	35.51	54.00	-18.49	Vertical
12400.00	17.09	38.76	15.27	35.27	35.85	54.00	-18.15	Vertical
14880.00	*					54.00		Vertical
4960.00	21.51	31.93	8.73	32.16	30.01	54.00	-23.99	Horizontal
7440.00	19.12	36.59	11.79	31.78	35.72	54.00	-18.28	Horizontal
9920.00	12.32	38.81	14.38	31.88	33.63	54.00	-20.37	Horizontal
12400.00	15.69	38.76	15.27	35.27	34.45	54.00	-19.55	Horizontal
14880.00	*					54.00		Horizontal

### Remark:

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960

<sup>1.</sup> Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor


<sup>2. &</sup>quot;\*", means this data is the too weak instrument of signal is unable to test.




Project No.: GTSE141101998RF

### 8 Test Setup Photo

Radiated Emission

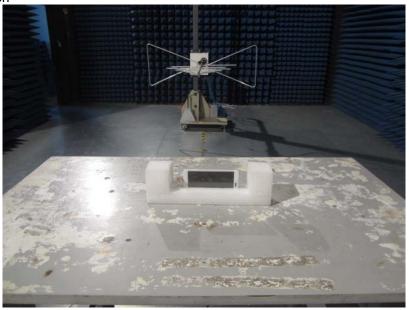

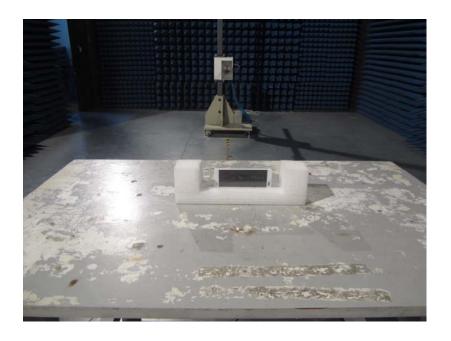



Conducted Emission



### 9 EUT Constructional Details

Reference to the test report No. GTSE14110199801

-----End-----